



7368 Intelligent Services Access Manager ONT

G-2425G-B Product Guide

3FE-48293-ACAA-TCZZA

Issue 3

July 2020

Legal notice

Nokia is a registered trademark of Nokia Corporation. Other products and company names mentioned herein may be trademarks or tradenames of their respective owners.

The information presented is subject to change without notice. No responsibility is assumed for inaccuracies contained herein.

© 2020 Nokia.

Contains proprietary/trade secret information which is the property of Nokia and must not be made available to, or copied or used by anyone outside Nokia without its written authorization.

Not to be used or disclosed except in accordance with applicable agreements.

Contents

About this document.....	10
1 ETSI ONT safety guidelines.....	15
1.1 Safety instructions.....	15
1.2 Safety standards compliance.....	17
1.3 Electrical safety guidelines.....	17
1.4 ESD safety guidelines.....	18
1.5 Laser safety guidelines.....	18
1.6 Environmental requirements.....	22
2 ETSI environmental and CRoHS guidelines.....	23
2.1 Environmental labels.....	23
2.2 Hazardous Substances Table (HST).....	25
2.3 Other environmental requirements.....	25
3 ANSI ONT safety guidelines.....	27
3.1 Safety instructions.....	27
3.2 Safety standards compliance.....	29
3.3 Laser safety guidelines.....	31
3.4 Electrical safety guidelines.....	34
3.5 ESD safety guidelines.....	35
3.6 Environmental requirements.....	35
4 G-2425G-B unit data sheet.....	37
4.1 Overview.....	37
4.2 G-2425G-B part numbers and identification.....	37
4.3 G-2425G-B general description.....	39
4.4 G-2425G-B software and installation feature support.....	44
4.5 G-2425G-B interfaces and interface capacity.....	45
4.6 G-2425G-B LEDs.....	47
4.7 G-2425G-B detailed specifications.....	49
4.8 G-2425G-B GEM ports and T-CONTs.....	50
4.9 G-2425G-B performance monitoring statistics.....	50
4.10 G-2425G-B functional blocks.....	52
4.11 G-2425G-B standards compliance.....	53
4.12 G-2425G-B special considerations.....	55

5	Install a G-2425G-B indoor ONT	57
5.1	Overview	57
5.2	Purpose	57
5.3	General	57
5.4	Prerequisites	57
5.5	Recommended tools	57
5.6	Safety information	58
5.7	Procedure	58
6	Replace a G-2425G-B indoor ONT	63
6.1	Overview	63
6.2	Purpose	63
6.3	General	63
6.4	Prerequisites	63
6.5	Recommended tools	63
6.6	Safety information	64
6.7	Procedure	64
7	Configure a G-2425G-B indoor ONT	69
7.1	Overview	69
7.2	General	69
7.3	HGU mode GUI configuration	69
8	ONT configuration file over OMCI	149
8.1	Overview	149
8.2	Purpose	149
8.3	Supported configuration file types	149
8.4	ONT configuration file over OMCI	151

List of tables

Table 1-1	Safety labels.....	16
Table 3-1	Safety labels.....	28
Table 4-1	Identification of G-2425G-B indoor ONTs.....	37
Table 4-2	G-2425G-B power supply ordering information.....	38
Table 4-3	G-2425G-B indoor ONT interface connection capacity.....	45
Table 4-4	G-2425G-B indoor ONT physical connections.....	46
Table 4-5	G-2425G-B indoor ONT LED descriptions.....	48
Table 4-6	G-2425G-B indoor ONT physical specifications.....	49
Table 4-7	G-2425G-B indoor ONT power consumption specifications.....	49
Table 4-8	G-2425G-B indoor ONT environmental specifications.....	50
Table 4-9	G-2425G-B indoor ONT capacity for GEM ports and T-CONTs.....	50
Table 4-10	Package S ONTs ONTENET performance monitoring statistics.....	51
Table 4-11	Package S ONTs ONTL2UNI performance monitoring statistics.....	51
Table 4-12	Package S ONTs PONONTTC, PONONTMCTC, PONONTTCHSI, PONONTTCES, PONONTTCFLOW, PONONTTCVOIP performance monitoring statistics.....	51
Table 4-13	Package S ONTs PONONTTC aggregate performance monitoring statistics.....	52
Table 4-14	G-2425G-B ONT considerations and limitations.....	56
Table 7-1	Device Information parameters.....	72
Table 7-2	LAN status parameters.....	73
Table 7-3	WAN status parameters.....	75
Table 7-4	WAN status IPv6 parameters.....	77
Table 7-5	Home networking parameters.....	79
Table 7-6	Optics module status parameters.....	81
Table 7-7	Voice Information parameters.....	85
Table 7-8	LAN network parameters.....	88
Table 7-9	LAN IPv6 network parameters.....	89
Table 7-10	WAN network parameters.....	91
Table 7-11	WAN DHCP parameters.....	92
Table 7-12	WiFi 2.4GHz network parameters.....	94
Table 7-13	WiFi 5GHz network parameters.....	97
Table 7-14	IP Routing network parameters.....	101
Table 7-15	DNS network parameters.....	102

Table 7-16	TR-069 network parameters.....	103
Table 7-17	GRE Tunnel parameters.....	105
Table 7-18	US Classifier Policy parameters.....	106
Table 7-19	US Classifier parameters.....	108
Table 7-20	US Classifier Rules parameters.....	109
Table 7-21	QoS Config parameters.....	113
Table 7-22	Firewall parameters.....	114
Table 7-23	MAC filter parameters.....	116
Table 7-24	IP filter parameters.....	117
Table 7-25	URL Filter parameters.....	118
Table 7-26	Parental control parameters.....	121
Table 7-27	DMZ and ALG parameters.....	122
Table 7-28	Access control parameters.....	124
Table 7-29	Port forwarding parameters.....	125
Table 7-30	Port triggering parameters.....	127
Table 7-31	DDNS parameters.....	128
Table 7-32	NTP parameters.....	130
Table 7-33	USB parameters.....	131
Table 7-34	Voice setting parameters.....	134
Table 7-35	Password parameters.....	137
Table 7-36	LOID configuration parameters.....	138
Table 7-37	SLID configuration parameters.....	139
Table 7-38	Device management parameters.....	140
Table 7-39	RG Troubleshooting Counters parameters.....	147
Table 8-1	Supported configuration files.....	150
Table 8-2	Download configuration files.....	151

List of figures

Figure 1-1	PSE certification.....	16
Figure 1-2	Laser product label.....	19
Figure 1-3	Laser classification label.....	20
Figure 1-4	Laser warning labels.....	21
Figure 2-1	Products below MCV value label.....	24
Figure 2-2	Products above MCV value label.....	24
Figure 2-3	Recycling/take back/disposal of product symbol.....	26
Figure 3-1	Sample safety label on the ONT equipment.....	29
Figure 3-2	Sample laser product label showing CDRH 21 CFR compliance.....	31
Figure 3-3	Laser product label.....	32
Figure 3-4	Laser classification label.....	32
Figure 3-5	Laser warning labels.....	33
Figure 3-6	Sample laser product safety label on the ONT equipment.....	34
Figure 4-1	G-2425G-B ONT.....	40
Figure 4-2	G-2425G-B indoor ONT physical connections (back).....	45
Figure 4-3	G-2425G-B indoor ONT with fiber optic connector.....	46
Figure 4-4	G-2425G-B indoor ONT LEDs.....	47
Figure 4-5	G-2425G-B ONT functional block.....	53
Figure 5-1	G-2425G-B ONT connections.....	59
Figure 6-1	G-2425G-B indoor ONT connections.....	65
Figure 7-1	Web login window.....	70
Figure 7-2	Device Information window.....	71
Figure 7-3	LAN status window.....	73
Figure 7-4	WAN status window.....	75
Figure 7-5	WAN status IPv6 window.....	77
Figure 7-6	Home networking information window.....	79
Figure 7-7	Optics module status window.....	80
Figure 7-8	LAN ports Statistics window.....	82
Figure 7-9	WAN ports statistics window.....	83
Figure 7-10	WLAN ports statistics window.....	84
Figure 7-11	Voice Information window.....	85

Figure 7-12	LAN network window.....	87
Figure 7-13	LAN IPv6 network window.....	89
Figure 7-14	WAN network window.....	91
Figure 7-15	WAN DHCP window.....	92
Figure 7-16	WiFi 2.4GHz network window.....	94
Figure 7-17	WiFi 5GHz network window.....	97
Figure 7-18	Wireless Schedule window.....	99
Figure 7-19	IP Routing network window.....	100
Figure 7-20	DNS network window.....	102
Figure 7-21	TR-069 network window.....	103
Figure 7-22	GRE Tunnel window.....	104
Figure 7-23	US Classifier Policy window.....	106
Figure 7-24	US Classifier window.....	107
Figure 7-25	US Classifier Rules window.....	109
Figure 7-26	QoS Config window (L2).....	111
Figure 7-27	QoS Config window (L3).....	112
Figure 7-28	Firewall window.....	114
Figure 7-29	MAC filter window.....	115
Figure 7-30	IP filter window.....	117
Figure 7-31	URL Filter window.....	118
Figure 7-32	Parental Control window.....	120
Figure 7-33	DMZ and ALG window.....	122
Figure 7-34	Access Control window.....	123
Figure 7-35	Port forwarding window.....	125
Figure 7-36	Port Triggering window.....	127
Figure 7-37	DDNS window.....	128
Figure 7-38	NTP window.....	130
Figure 7-39	USB window.....	131
Figure 7-40	UPnP and DLNA window.....	133
Figure 7-41	Voice setting window.....	134
Figure 7-42	Password window.....	136
Figure 7-43	LOID Config window.....	137
Figure 7-44	SLID configuration window.....	138

Figure 7-45	Device management window.....	139
Figure 7-46	Backup and Restore window.....	140
Figure 7-47	Firmware upgrade window.....	141
Figure 7-48	Reboot window.....	142
Figure 7-49	Factory default window.....	143
Figure 7-50	Diagnostics window.....	144
Figure 7-51	Log window.....	145
Figure 7-52	RG Troubleshooting Counters window.....	147

About this document

Purpose

This documentation set provides information about safety, features and functionality, ordering, hardware installation and maintenance, and software installation procedures of this ONT for the current release.

Intended audience

This documentation set is intended for planners, administrators, operators, and maintenance personnel involved in installing, upgrading, or maintaining the ONTs.

The reader must be familiar with general telecommunications principles.

Safety information

For your safety, this document contains safety statements. Safety statements are given at points where risks of damage to personnel, equipment, and operation may exist. Failure to follow the directions in a safety statement may result in serious consequences.

Safety Information Examples



DANGER

Hazard

Danger indicates that the described activity or situation may result in serious personal injury or death; for example, high voltage or electric shock hazards.



WARNING

Equipment Damage

Warning indicates that the described activity or situation may, or will, cause equipment damage or serious performance problems.



CAUTION

Service Disruption

Caution indicates that the described activity or situation may, or will, cause service interruption.

Note: A note provides information that is, or may be, of special interest.

Acronyms and initialisms

The expansions and optional descriptions of most acronyms and initialisms appear in the glossary

Nokia quality processes

Nokia's ONT manufacturing, testing, and inspecting practices are in compliance with TL 9000 requirements. These requirements are documented in the Fixed Networks Quality Manual 3FQ-30146-6000-QRZZA.

The quality practices adequately ensure that technical requirements and customer end-point requirements are met. The customer or its representatives may be allowed to perform on-site quality surveillance audits, as agreed upon during contract negotiations.

Documents

Documents are available using ALED or OLCS.

To download a ZIP file package of the customer documentation

- 1

Navigate to <http://customer.nokia.com/s/> and enter your user name and password. If you are a new user and require access to this service, please contact your Nokia sales representative.
- 2

Select **Products**.
- 3

Type your product name in the **Find and select a product** field and click the search icon. Select a product.
- 4

Click **Downloads: ALED** to go to the Electronic Delivery: Downloads page.
- 5

Select **Documentation** from the list.
- 6

Select a release from the list.
- 7

Follow the on-screen directions to download the file.

END OF STEPS

To access individual documents

Individual PDFs of customer documents are also accessible through the Nokia Support Portal website.

-
- 1

Navigate to <http://customer.nokia.com/s/> and enter your user name and password. If you are a new user and require access to this service, please contact your Nokia sales representative.
 - 2

Select **Products**.
 - 3

Type your product name in the **Find and select a product** field and click the search icon. Select a product.
 - 4

Click **Documentation: Doc Center** to go to the product page in the Doc Center.
 - 5

Select a release from the **Release** list and click **SEARCH**.
 - 6

Click on the PDF icon to open or save the file.

END OF STEPS

Procedures with options or substeps

When there are options in a procedure, they are identified by letters. When there are required substeps in a procedure, they are identified by roman numerals.

Example of options in a procedure

At [Step 1](#), you can choose option a or b. At [Step 2](#), you must do what the step indicates.

- 1

This step offers two options. You must choose one of the following:
 - a. This is one option.
 - b. This is another option.
- 2

You must perform this step.

END OF STEPS

Example of required substeps in a procedure

At [Step 1](#), you must perform a series of substeps within a step. At [Step 2](#), you must do what the step indicates.

1

This step has a series of substeps that you must perform to complete the step. You must perform the following substeps:

- a. This is the first substep.
- b. This is the second substep.
- c. This is the third substep.

2

You must perform this step.

END OF STEPS

Multiple PDF document search

You can use Adobe Reader Release 6.0 and later to search multiple PDF files for a common term. Adobe Reader displays the results in a single display panel. The results are grouped by PDF file, and you can expand the entry for each file.

Note: The PDF files in which you search must be in the same folder.

To search multiple PDF files for a common term

1

Open Adobe Acrobat Reader.

2

Choose **Edit→Search** from the Acrobat Reader main menu. The Search PDF panel displays.

3

Enter the search criteria.

4

Select **All PDF Documents In**.

5

Select the folder in which to search using the drop-down menu.

6

Click **Search**.

Acrobat Reader displays the search results. You can expand the entries for each document by clicking on the + symbol.

END OF STEPS

Technical support

For details, refer to the [Nokia Support portal \(https://customer.nokia.com/support/s/\)](https://customer.nokia.com/support/s/).

For ordering information, contact your Nokia sales representative.

How to comment

To comment on this document, go to the [Online Comment Form \(https://documentation.nokia.com/comments/\)](https://documentation.nokia.com/comments/) or e-mail your comments to the [Comments Hotline \(mailto:comments@nokia.com\)](mailto:comments@nokia.com).

1 ETSI ONT safety guidelines

This chapter provides information about the mandatory regulations that govern the installation and operation of the optical network terminals (ONTs).

1.1 Safety instructions

This section describes the safety instructions that are provided in the ONT customer documentation and on the equipment.

1.1.1 Safety instruction boxes

The safety instruction boxes are provided in the ONT customer documentation. Observe the instructions to meet safety requirements.

The following is an example of the Danger box.



DANGER

Hazard

Possibility of personal injury.

The Danger box indicates that the described activity or situation may pose a threat to personal safety. It calls attention to a situation or procedure which, if not correctly performed or adhered to, may result in death or serious physical harm.

Do not proceed beyond a Danger box until the indicated conditions are fully understood and met.

The following is an example of the Warning box.



WARNING

Equipment Damage

Possibility of equipment damage.

Possibility of data loss.

The Warning box indicates that the described activity or situation may, or will, cause equipment damage, loss of data, or serious performance problems. It identifies a possible equipment-damaging situation or provides essential information to avoid the degradation of system operations or data.

Do not proceed beyond a warning until the indicated conditions are fully understood and met.

The following is an example of the Caution box.



CAUTION

Service Disruption

Possibility of service interruption.

Service interruption.

The Caution box indicates that the described activity or situation may, or will, cause service interruption.

Do not proceed beyond a caution until the indicated conditions are fully understood and met.

The following is an example of the Note box.



Note: Information of special interest.

The Note box provides information that assists the personnel working with ONTs. It does not provide safety-related instructions.

1.1.2 Safety-related labels

The ONT equipment is labeled with the specific safety instructions and compliance information that is related to a variant of the ONT. Observe the instructions on the safety labels.

Table 1-1, “Safety labels” (p. 15) provides sample safety labels on the ONT equipment.

Table 1-1 Safety labels

Description	Label text
ESD warning	Caution: This assembly contains an electrostatic sensitive device.
Laser classification	Class 1 laser product
PSE marking	These power supplies are Japan PSE certified and compliant with Japan VCCI emissions standards.

Figure 1-1, “PSE certification” (p. 16) shows the PSE certification.

Figure 1-1 PSE certification

	This is a Class B product based on the standard of the Voluntary Control Council for Interference from Information Technology Equipment (VCCI). If this is used near a radio or television receiver in a domestic environment, it may cause radio interference. Install and use the equipment according to the instruction manual.
警告	VCCI準拠クラスB機器（日本） この機器は、Information Technology EquipmentのVoluntary Control Council for Interference (VCCI)の規格に準拠したクラスB製品です。この機器をラジオやテレビ受信機の近くで使用した場合、混信が発生する恐れがあります。本機器の設置および使用に際しては、取扱説明書に従ってください。

19841

1.2 Safety standards compliance

This section describes the ONT compliance with the European safety standards.

1.2.1 EMC, EMI, and ESD compliance

The ONT equipment complies with the following EMC, EMI, and ESD requirements:

- EN 300-328 v1.9.1 wide band data transmission standards for 2.4GHz bands
- EN 300-386 V1.5.1: Electromagnetic Compatibility and Radio Spectrum Matters (ERM): Telecommunications Network Equipment; Electromagnetic Compatibility (EMC) requirements; Electrostatic Discharge (ESD) requirements
- EN 55022 (2006): Class B, Information Technology Equipment, Radio Disturbance Characteristics, limits and methods of measurement
- EN 55024 (2010): Information Technology Equipment, Immunity Characteristics, limits and methods of measurement
- European Council Directive 2004/108/EC
- EN 300-386 V1.4.1: 2008
- EN 55022:2006 Class B (ONTs)

1.2.2 Equipment safety standard compliance

The ONT equipment complies with the requirements of EN 60950-1, Safety of Information Technology Equipment for use in a restricted location (per R-269).

1.2.3 Environmental standard compliance

The ONT equipment complies with the EN 300 019 European environmental standards.

1.2.4 Laser product standard compliance

For most ONTs, the ONT equipment complies with EN 60825-1 and IEC 60825-2 for laser products. If there is an exception to this compliance regulation, you can find this information in the standards compliance section of the unit data sheet in this Product Guide.

1.2.5 Resistibility requirements compliance

The ONT equipment complies with the requirements of ITU Recommendation K.21 for resistibility of telecommunication equipment installed in customer premises to over voltage and over currents.

1.2.6 Acoustic noise emission standard compliance

The ONT equipment complies with EN 300 753 acoustic noise emission limit and test methods.

1.3 Electrical safety guidelines

This section provides the electrical safety guidelines for the ONT equipment.

 **Note:** The ONTs comply with the U.S. National Electrical Code. However, local electrical authorities have jurisdiction when there are differences between the local and U.S. standards.

The ONTs comply with BS EN 61140.

1.3.1 Power supplies

The use of any non-Nokia approved power supplies or power adapters is not supported or endorsed by Nokia. Such use will void any warranty or support contract with Nokia. Such use greatly increases the danger of damage to equipment or property.

1.3.2 Cabling

The following are the guidelines regarding cables used for the ONT equipment:

- All cables must be approved by the relevant national electrical code.
- The cables for outdoor installation of ONTs must be suitable for outdoor use.
- POTS wiring run outside the subscriber premises must comply with the requirements of local electrical codes. In some markets, the maximum allowed length of the outside run is 140 feet (43 m). If the outside run is longer, NEC requires primary protection at both the exit and entry points for the wire.

1.3.3 Protective earth

Earthing and bonding of the ONTs must comply with the requirements of local electrical codes.

1.4 ESD safety guidelines

The ONT equipment is sensitive to ESD. Operations personnel must observe the following ESD instructions when they handle the ONT equipment.



CAUTION

Service Disruption

This equipment is ESD sensitive. Proper ESD protections should be used when you enter the TELCO Access portion of the ONT.

During installation and maintenance, service personnel must wear wrist straps to prevent damage caused by ESD.

1.5 Laser safety guidelines

Observe the following instructions when you perform installation, operations, and maintenance tasks on the ONT equipment.

Only qualified service personnel who are extremely familiar with laser radiation hazards should install or remove the fiber optic cables and units in this system.



DANGER

Hazard

There may be invisible laser radiation at the fiber optic cable when the cable is removed from the connector. Avoid direct exposure to the laser beam.

Observe the following danger for laser hazard. Eyes can be damaged when they are exposed to a laser beam. Take necessary precautions before you plug in the optical modules.



DANGER

Hazard

Possibility of equipment damage. Risk of eye damage by laser radiation.

1.5.1 Laser classification


The ONT is classified as a Class 1 laser product based on its transmit optical output.

Laser warning labels

The following figures show the labels related to laser product, classification and warning.

[Figure 1-2, "Laser product label" \(p. 18\)](#) shows a laser product label.

Figure 1-2 Laser product label



18455

[Figure 1-3, "Laser classification label" \(p. 20\)](#) shows a laser classification label. Laser classification labels may be provided in other languages.

Figure 1-3 Laser classification label


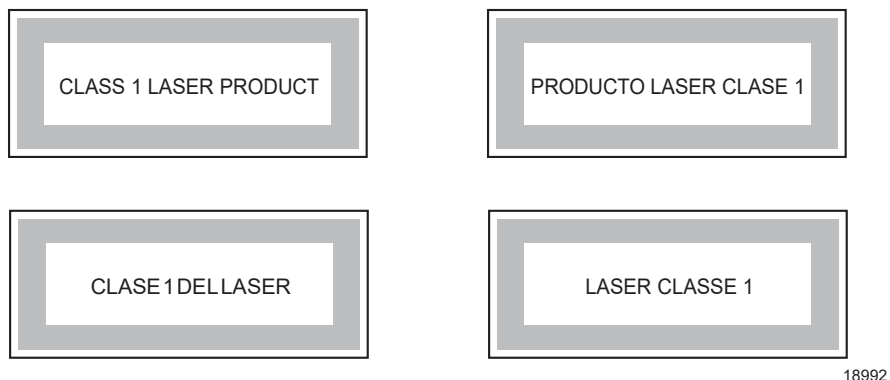



Figure 1-4, “Laser warning labels” (p. 21) shows a laser warning label and an explanatory label for laser products. Labels and warning may be provided in other languages. The explanatory label provides the following information:

- a warning that calls attention to the invisible laser radiation
- an instruction against staring into the beam or viewing directly with optical instruments
- wavelength
- normal output power
- maximum output power


Figure 1-4 Laser warning labels



Laser Warning Label

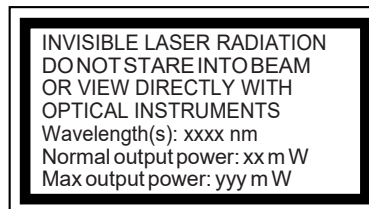

Laser Warning Label

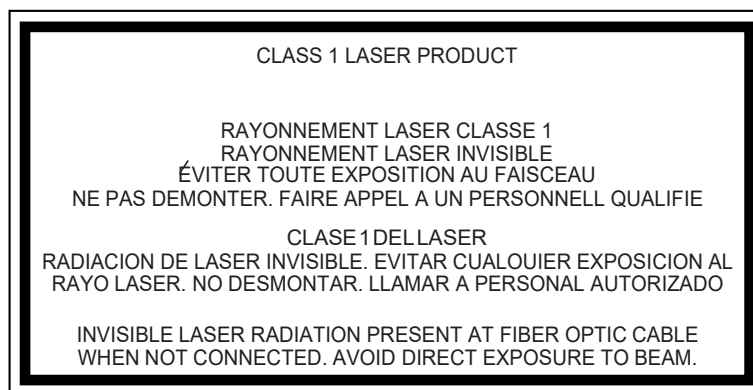

Laser Warning Label

18993

1.5.2 Transmit optical output

The maximum transmit optical output of an ONT is +5 dBm.

1.5.3 Normal laser operation

In normal operation, fiber cable laser radiation is always off until it receives signal from the line terminal card.

Eyes can be damaged when they exposed to a laser beam. Operating personnel must observe the instructions on the laser explanatory label before plugging in the optical module.



DANGER

Hazard

Risk of eye damage by laser radiation.

1.5.4 Location class

Use cable supports and guides to protect the receptacles from strain.

1.6 Environmental requirements

See the ONT technical specification documentation for more information about temperature ranges.

During operation in the supported temperature range, condensation inside the ONT caused by humidity is not an issue. To avoid condensation caused by rapid changes in temperature and humidity, Nokia recommends:

- The door of the ONT not be opened until temperature inside and outside the enclosure has stabilized.
- If the door of the ONT must be opened after a rapid change in temperature or humidity, use a dry cloth to wipe down the metal interior to prevent the risk of condensation.
- When high humidity is present, installation of a cover or tent over the ONT helps prevent condensation when the door is opened.

2 ETSI environmental and CRoHS guidelines

This chapter provides information about the ETSI environmental China Restriction of Hazardous Substances (CRoHS) regulations that govern the installation and operation of the optical line termination (OLT) and optical network termination (ONT) systems. This chapter also includes environmental operation parameters of general interest.

2.1 Environmental labels

This section describes the environmental instructions that are provided with the customer documentation, equipment, and location where the equipment resides.

2.1.1 Overview

CRoHS is applicable to Electronic Information Products (EIP) manufactured or sold and imported in the territory of the mainland of the People's Republic of China. EIP refers to products and their accessories manufactured by using electronic information technology, including electronic communications products and such subcomponents as batteries and cables.

2.1.2 Environmental related labels

Environmental labels are located on appropriate equipment. The following are sample labels.

Products below Maximum Concentration Value (MCV) label

[Figure 2-1, "Products below MCV value label" \(p. 24\)](#) shows the label that indicates a product is below the maximum concentration value, as defined by standard SJ/T11363-2006 (Requirements for Concentration Limits for Certain Hazardous Substances in Electronic Information Products). Products with this label are recyclable. The label may be found in this documentation or on the product.

Figure 2-1 Products below MCV value label



18986

Products containing hazardous substances above Maximum Concentration Value (MCV) label

Figure 2-2, “Products above MCV value label” (p. 24) shows the label that indicates a product is above the maximum concentration value, as defined by standard SJ/T11363-2006 (Requirements for Concentration Limits for Certain Hazardous Substances in Electronic Information Products). The number contained inside the label indicates the Environment-Friendly User Period (EFUP) value. The label may be found in this documentation or on the product.

Figure 2-2 Products above MCV value label



Together with major international telecommunications equipment companies, Nokia has determined it is appropriate to use an EFUP of 50 years for network infrastructure equipment and an EFUP of 20 years for handsets and accessories. These values are based on manufacturers' extensive practical experience of the design, manufacturing, maintenance, usage conditions, operating

environments, and physical condition of infrastructure and handsets after years of service. The values reflect minimum values and refer to products operated according to the intended use conditions. See 2.2 "Hazardous Substances Table (HST)" (p. 24) for more information.

2.2 Hazardous Substances Table (HST)

This section describes the compliance of the OLT and ONT equipment to the CRoHS standard when the product and sub assemblies contain hazardous substances beyond the MCV value. This information is found in this user documentation where part numbers for the product and sub assemblies are listed. It may be referenced in other OLT and ONT documentation.

In accordance with the People's Republic of China Electronic Industry Standard Marking for the Control of Pollution Caused by Electronic Information Products (SJ/T11364-2006), customers may access the Nokia Hazardous Substance Table, in Chinese, from the following location:

- <http://www.alcatel-sbell.com.cn/wwwroot/images/upload/private/1/media/ChinaRoHS.pdf>
(<http://www.alcatel-sbell.com.cn/wwwroot/images/upload/private/1/media/ChinaRoHS.pdf>)

2.3 Other environmental requirements

Observe the following environmental requirements when handling the P-OLT or ONT equipment.

2.3.1 ONT environmental requirements

See the ONT technical specification documentation for more information about temperature ranges.

2.3.2 Storage

According to ETS 300-019-1-1 - Class 1.1, storage of ONT equipment must be in Class 1.1, weather-protected, temperature-controlled locations.

2.3.3 Transportation

According to EN 300-019-1-2 - Class 2.3, transportation of the ONT equipment must be in packed, public transportation with no rain on packing allowed.

2.3.4 Stationary use

According to EN 300-019-1-3 - Class 3.1/3.2/3.E, stationary use of ONT equipment must be in a temperature-controlled location, with no rain allowed, and with no condensation allowed.

2.3.5 Material content compliance

European Union (EU) Directive 2002/95/EC, "Restriction of the use of certain Hazardous Substances" (RoHS), restricts the use of lead, mercury, cadmium, hexavalent chromium, and certain flame retardants in electrical and electronic equipment. This Directive applies to electrical and electronic products placed on the EU market after 1 July 2006, with various exemptions, including an exemption for lead solder in network infrastructure equipment. Nokia products shipped to the EU after 1 July 2006 comply with the EU RoHS Directive.

Nokia has implemented a material/substance content management process. The process is described in: Nokia process for ensuring RoHS Compliance (1AA002660031ASZZA). This ensures

compliance with the European Union Directive 2011/65/EU on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS2). With the process equipment is assessed in accordance with the Harmonised Standard EN50581:2012 (CENELEC) on Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances.

2.3.6 End-of-life collection and treatment

Electronic products bearing or referencing the symbol shown in [Figure 2-3, “Recycling/take back/disposal of product symbol” \(p. 25\)](#), when put on the market within the European Union (EU), shall be collected and treated at the end of their useful life, in compliance with applicable EU and local legislation. They shall not be disposed of as part of unsorted municipal waste. Due to materials that may be contained in the product, such as heavy metals or batteries, the environment and human health may be negatively impacted as a result of inappropriate disposal.

i **Note:** In the European Union, a solid bar under the symbol for a crossed-out wheeled bin indicates that the product was put on the market after 13 August 2005.

Figure 2-3 Recycling/take back/disposal of product symbol



At the end of their life, the OLT and ONT products are subject to the applicable local legislations that implement the European Directive 2012/19/EU on waste electrical and electronic equipment (WEEE).

There can be different requirements for collection and treatment in different member states of the European Union.

In compliance with legal requirements and contractual agreements, where applicable, Nokia will offer to provide for the collection and treatment of Nokia products bearing the logo shown in [Figure 2-3, “Recycling/take back/disposal of product symbol” \(p. 26\)](#) at the end of their useful life, or products displaced by Nokia equipment offers. For information regarding take-back of equipment by Nokia, or for more information regarding the requirements for recycling/disposal of product, contact your Nokia account manager or Nokia take back support at sustainability.global@nokia.com.

3 ANSI ONT safety guidelines

This chapter provides information about the mandatory regulations that govern the installation and operation of the optical network terminals or units (ONTs or ONUs) in the North American or ANSI market.

3.1 Safety instructions

This section describes the safety instructions that are provided in the ONT customer documentation and on the equipment.

3.1.1 Safety instruction boxes in customer documentation

The safety instruction boxes are provided in the ONT customer documentation. Observe the instructions to meet safety requirements.

The following is an example of the Danger box.



DANGER

Hazard

Possibility of personal injury.

The Danger box indicates that the described activity or situation may pose a threat to personal safety. It calls attention to a situation or procedure which, if not correctly performed or adhered to, may result in death or serious physical harm.

Do not proceed beyond a Danger box until the indicated conditions are fully understood and met.

The following is an example of the Warning box.



WARNING

Equipment Damage

Possibility of equipment damage.

Possibility of data loss.

The Warning box indicates that the described activity or situation may, or will, cause equipment damage, loss of data, or serious performance problems. It identifies a possible equipment-damaging situation or provides essential information to avoid the degradation of system operations or data.

Do not proceed beyond a warning until the indicated conditions are fully understood and met.

The following is an example of the Caution box.



CAUTION

Service Disruption

Possibility of service interruption.

Service interruption.

The Caution box indicates that the described activity or situation may, or will, cause service interruption.

Do not proceed beyond a caution until the indicated conditions are fully understood and met.

The following is an example of the Note box.



Note: Information of special interest.

The Note box provides information that assists the personnel working with ONTs. It does not provide safety-related instructions.

3.1.2 Safety-related labels

The ONT equipment is labeled with specific safety compliance information and instructions that are related to a variant of the ONT. Observe the instructions on the safety labels.


[Table 3-1, “Safety labels” \(p. 27\)](#) provides examples of the text in the various ONT safety labels.

Table 3-1 Safety labels

Description	Label text
UL compliance	Communication service equipment US listed. Type 3R enclosure - Rainproof.
TUV compliance	Type 3R enclosure - Rainproof.
ESD warning	Caution: This assembly contains electrostatic sensitive device.
Laser classification	Class 1 laser product
Laser product compliance	This laser product conforms to all applicable standards of 21 CFR 1040.10 at date of manufacture.
FCC standards compliance	Tested to comply with FCC standards for home or office use.
CDRH compliance	Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007
Operation conditions	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Canadian standard compliance (modular ONT)	This Class A digital apparatus complies with Canadian ICES-003.
Canadian standard compliance (outdoor ONT)	This Class B digital apparatus complies with Canadian ICES-003.
CE marking	There are various CE symbols for CE compliance.

Figure 3-1, “Sample safety label on the ONT equipment” (p. 28) shows a sample safety label on the ONT equipment.

Figure 3-1 Sample safety label on the ONT equipment

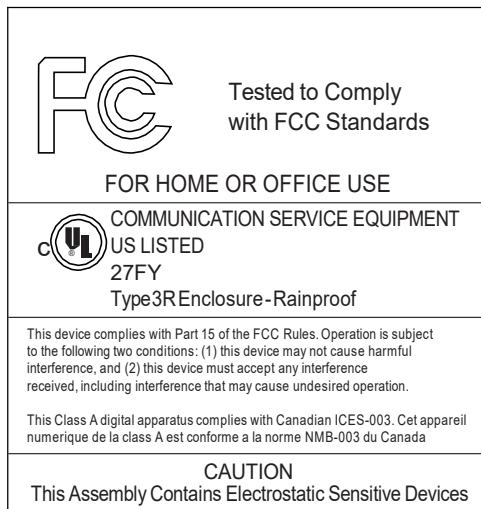

18533

3.2 Safety standards compliance

This section describes the ONT compliance with North American safety standards.



WARNING

Equipment Damage

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3.2.1 EMC, EMI, and ESD standards compliance

The ONT equipment complies with the following requirements:

- Federal Communications Commission (FCC) CFR 47, Part 15, Subpart B, Class A requirements for OLT equipment
- GR-1089-CORE requirements, including:
 - Section 3 Electromagnetic Interference, Emissions Radiated and Conducted
 - Section 3 Immunity, Radiated and Conducted
 - Section 2 ESD Discharge Immunity: System Level Electrostatic Discharge and EFT Immunity: Electrically Fast Transients

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is needed.
- Consult the dealer or an experienced radio/TV technician for help.

3.2.2 Equipment safety standard compliance

The ONT equipment complies with the requirements of UL60950-1, Outdoor ONTs to “Communication Service Equipment” (CSE) and Indoor ONTs to Information Technology Equipment (ITE).

3.2.3 Environmental standards compliance

The ONT equipment complies with the following standards:

- GR-63-CORE (NEBS): requirements related to operating, storage, humidity, altitude, earthquake, office vibration, transportation and handling, fire resistance and spread, airborne contaminants, illumination, and acoustic noise
- GR-487-CORE: requirements related to rain, chemical, sand, and dust
- GR-487 R3-82: requirements related to condensation
- GR-3108: Requirements for Network Equipment in the Outside Plant (OSP)
- TP76200: Common Systems Equipment Interconnections Standards

3.2.4 Laser product standards compliance

The ONT equipment complies with 21 CFR 1040.10 and CFR 1040.11, except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007” or to 21 CFR 1040.10 U.S. Center for Devices and Radiological Health (CDRH) of the Food and Drug Administration (FDA) Laser Notice 42 for ONTs containing Class 1 Laser modules certified by original manufactures.

Per CDRH 21 CFR 10.40.10 (h) (1) (iv) distributors of Class 1 laser products, such as Nokia ONTs shall leave the following Laser Safety cautions with the end user.

a) “Class 1 Laser Product”

b) “Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.”

[Figure 3-2, “Sample laser product label showing CDRH 21 CFR compliance” \(p. 31\)](#) shows a laser product label.

Figure 3-2 Sample laser product label showing CDRH 21 CFR compliance



3.2.5 Resistibility requirements compliance

The ONT equipment complies with the requirements of ITU Recommendation K.21 for resistibility of telecommunication equipment installed in customer premises to over voltage and over currents.

3.3 Laser safety guidelines

Only qualified service personnel who are extremely familiar with laser radiation hazards should install or remove the fiber optic cables and units in this system.

Observe the following warnings when you perform installation, operations, and maintenance tasks on the ONT equipment.



DANGER

Hazard

There may be invisible laser radiation at the fiber optic cable when the cable is removed from the connector. Avoid direct exposure to beam.

Observe the following danger for a laser hazard. Eyes can be damaged when they are exposed to a laser beam. Take necessary precautions before you plug in the optical modules.



DANGER

Hazard

Possibility of equipment damage. Risk of eye damage by laser radiation.

Per CDRH 21 CFR 10.40.10 (h) (1) (iv) distributors of Class 1 laser products, such as Nokia ONTs shall leave the following Laser Safety cautions with the end user.

a) "Class 1 Laser Product"


- b) “Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.”

3.3.1 Laser warning labels

The following figures show sample labels related to laser product, classification and warning.

Figure 3-3, “Laser product label” (p. 31) shows a laser product label.


Figure 3-3 Laser product label



18455

Figure 3-4, “Laser classification label” (p. 32) shows a laser classification label. Laser classification labels may be provided in other languages.

Figure 3-4 Laser classification label

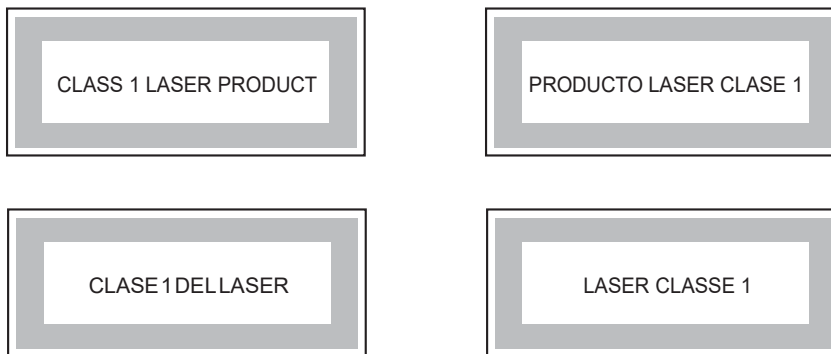

18992

Figure 3-5, “Laser warning labels” (p. 33) shows a laser warning label and an explanatory label for laser products. Explanatory labels may be provided in other languages. The explanatory label provides the following information:

- a warning that calls attention to the invisible laser radiation
- an instruction against staring into the beam or viewing directly with optical instruments
- wavelength
- normal output power
- maximum output power

Figure 3-5 Laser warning labels



18993


3.3.2 Laser classification

The ONT is classified as a Class 1 laser product based on its transmit optical output.

For Class 1 laser products, lasers are safe under reasonably foreseeable conditions of operation, including the use of optical instruments for intrabeam viewing.

Figure 3-6, “Sample laser product safety label on the ONT equipment” (p. 34) shows a sample laser product safety label on the ONT equipment.

Figure 3-6 Sample laser product safety label on the ONT equipment

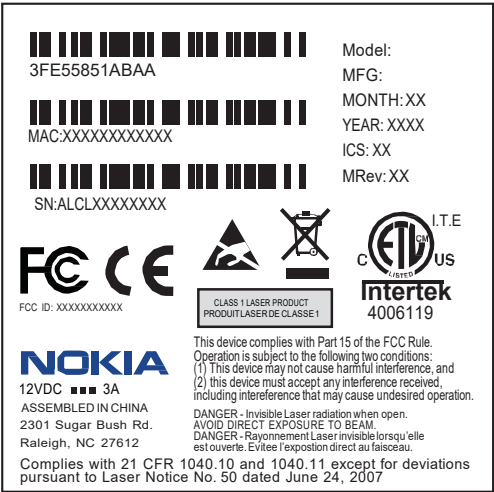

18532

3.3.3 Transmit optical output

The maximum transmit optical output of an ONT is +5 dBm.

3.3.4 Normal laser operation

In normal operation, fiber cable laser radiation is always off until it receives signal from the line terminal card.

Operating personnel must observe the instructions on the laser explanatory label before plugging in the optical module.



DANGER

Hazard

Risk of eye damage by laser radiation.

3.3.5 Location class

Use cable supports and guides to protect the receptacles from strain.

3.4 Electrical safety guidelines

This section provides the electrical safety guidelines for the ONT equipment.



Note: The ONTs comply with the U.S. National Electrical Code. However, local electrical authorities have jurisdiction when there are differences between the local and U.S. standards.

3.4.1 Power supplies

The use of any non-Nokia approved power supplies or power adapters is not supported or endorsed by Nokia. Such use will void any warranty or support contract with Nokia. Such use greatly increases the danger of damage to equipment or property.

3.4.2 Cabling

The following are the guidelines regarding cables used for the ONT equipment:

- Use only cables approved by the relevant national electrical code.
- Use cables suitable for outdoor use for outdoor installation of ONTs.
- The ONTs have been evaluated for use with external POTS wiring without primary protection that may not exceed 140 ft (43 m) in reach. However, the power cable must not exceed 100 ft (31 m).

3.4.3 Protective earth

Earthing and bonding of the ONTs must comply with the requirements of NEC article 250 or local electrical codes.

3.5 ESD safety guidelines

The ONT equipment is sensitive to ESD. Operations personnel must observe the following ESD instructions when they handle the ONT equipment.



CAUTION

Service Disruption

This equipment is ESD sensitive. Proper ESD protections should be used when entering the TELCO Access portion of the ONT.

During installation and maintenance, service personnel must wear wrist straps to prevent damage caused by ESD.

Nokia recommends that you prepare the site before you install the ONT equipment. In addition, you must control relative humidity, use static dissipating material for furniture or flooring, and restrict the use of air conditioning.

3.6 Environmental requirements

See the ONT technical specification documentation for temperature ranges for ONTs.

During operation in the supported temperature range, condensation inside the ONT caused by humidity is not an issue. To avoid condensation caused by rapid changes in temperature and humidity, Nokia recommends:

- The door of the ONT not be opened until temperature inside and outside the enclosure has stabilized.
- If the door of the ONT must be opened after a rapid change in temperature or humidity, use a dry cloth to wipe down the metal interior to prevent the risk of condensation.

-
- When high humidity is present, installation of a cover or tent over the ONT helps prevent condensation when the door is opened.

4 G-2425G-B unit data sheet

4.1 Overview

4.1.1 Purpose

4.1.2 Contents

4.1 Overview	37
4.2 G-2425G-B part numbers and identification	37
4.3 G-2425G-B general description	39
4.4 G-2425G-B software and installation feature support	44
4.5 G-2425G-B interfaces and interface capacity	45
4.6 G-2425G-B LEDs	47
4.7 G-2425G-B detailed specifications	49
4.8 G-2425G-B GEM ports and T-CONTs	50
4.9 G-2425G-B performance monitoring statistics	50
4.10 G-2425G-B functional blocks	52
4.11 G-2425G-B standards compliance	53
4.12 G-2425G-B special considerations	55

4.2 G-2425G-B part numbers and identification

Table 4-1, “Identification of G-2425G-B indoor ONTs” (p. 37) provides part numbers and identification information for the G-2425G-B indoor ONT.

Table 4-1 Identification of G-2425G-B indoor ONTs

Ordering kit part number	Provisioning number	Description	CLEI Code	CPR	ECI/ Bar code
3FE 48293 AC Mexico-generic variant	3FE 48296 AC	G-2425G-B, GPON ONT supports 2 POTS ports, 4xGE UNI, 4x4 11n + 4x4 11ac. Includes two USB 2.0 Type A ports and a 12V 3A wall mounted AC/DC power adapter with 2-pin US input plug	—	—	—
3FE 48293 BA EU-generic variant	3FE 48296 BA	G-2425G-B, GPON ONT supports 2 POTS ports, 4xGE UNI, 4x4 11n + 4x4 11ac. Includes two USB 2.0 Type A ports and a 12V 3A wall mounted AC/DC power adapter with 2-pin EU input plug	—	—	—

Table 4-1 Identification of G-2425G-B indoor ONTs (continued)

Ordering kit part number	Provisioning number	Description	CLEI Code	CPR	ECI/ Bar code
3FE 48293 BB Chile-generic variant	3FE 48296 BB	G-2425G-B, GPON ONT supports 2 POTS ports, 4xGE UNI, 4x4 11n + 4x4 11ac. Includes two USB 2.0 Type A ports and a 12V 3A wall mounted AC/DC power adapter with 2-pin EU input plug	—	—	—
3FE 48293 CA UK-generic variant	3FE 48296 BA	G-2425G-B, GPON ONT supports 2 POTS ports, 4xGE UNI, 4x4 11n + 4x4 11ac. Includes two USB 2.0 Type A ports and a 12V 3A wall mounted AC/DC power adapter with 3-pin UK input plug	—	—	—
3FE 48293 CB Customer-specific variant	3FE 48296 CA	G-2425G-B, GPON ONT supports 2 POTS ports, 4xGE UNI, 4x4 11n + 4x4 11ac. Includes two USB 2.0 Type A ports and a 12V 3A wall mounted AC/DC power adapter with 3-pin UK input plug	—	—	—
3FE 48293 DB Customer-specific variant	3FE 48296 DB	G-2425G-B, GPON ONT supports 2 POTS ports, 4xGE UNI, 4x4 11n + 4x4 11ac. Includes two USB 2.0 Type A ports and a 12V 3A desktop AC/DC power adapter with 2-pin Argentina input plug	—	—	—
3FE 48293 EA	3FE 48296 EA	G-2425G-B, GPON ONT supports 2 POTS ports, 4xGE UNI, 4x4 11n + 4x4 11ac. Includes two USB 2.0 Type A ports and a 12V 3A wall mounted AC/DC power adapter with 2-pin Australia input plug This variant supports the channel range between 1 to 11 for 2.4Ghz band.	—	—	—
3FE48293 AB NAR_US Variant	3FE48308 AA	G-2425G-B, Wi-Fi GPON RGW,2xPOTS,4xGE, 4x4 11n + 4x4 11ac,Molex DC int. US plug. Includes two USB 2.0 Type A ports and a 12V 3A wall mounted AC/DC power adapter with 2-pin US input plug	BVMG70 0BRA	—	—
3FE48293 AE NAR_CA Variant	3FE48308 AA	G-2425G-B, Wi-Fi GPON RGW,2xPOTS,4xGE, 4x4 11n + 4x4 11ac,Molex DC int. US plug. Includes two USB 2.0 Type A ports and a 12V 3A wall mounted AC/DC power adapter with 2-pin US input plug	BVMG70 0BRA	—	—

Table 4-2, “G-2425G-B power supply ordering information” (p. 38) provides the power supply information for the G-2425G-B ONT. For more information on power supplies, see the **7368 ISAM ONT Power Supply and UPS Guide**.

Table 4-2 G-2425G-B power supply ordering information

ONT part numbers	Power information (Model No./Manufacture Part Number)	Power information	Customer category or country compliance tested for	Notes
Kit: 3FE 48293 AC EMA: 3FE 48296 AC	SOY: SUN-1200300/BG120300-UA6A-LL04 MOSO:MSS-V3000WR120-042A0-US/ SA209-U2	12V 3A wall mounted AC/DC power adapter with 2-pin US input plug	ANSI municipality US, Canada UL/ETL IEC62368-1 Mexico NOM	2-pin US input plug

Kit: 3FE 48293 BA EMA: 3FE 48296 BA	FUHUA: UES36WV-120300SPA/ UE200723GWZF1RI SOY: SOY-1200300EU/BC120300-EA6A- LLAB	12V 3A wall mounted AC/DC power adapter with 2-pin EU input plug	Europe CE EN62368-1	2-pin EU input plug
Kit: 3FE 48293 AB EMA: 3FE 48308 AA	SOY: SUN- 1200300/BG120300-UA6A-LL05 MOSO: MSS-V3000WR120- 042A0-US/SA209-U3	12V 3A wall mounted AC/DC power adapter with 2- pin US input plug	ANSI municipality US, Canada,Mexico, UL/ETL IEC62368-1, FCC, NOM,	2-pin US input plug
Kit: 3FE 48293 AE EMA: 3FE 48308 AA	SOY: SUN- 1200300/BG120300-UA6A-LL05 MOSO: MSS-V3000WR120- 042A0-US/SA209-U3	12V 3A wall mounted AC/DC power adapter with 2- pin US input plug	ANSI municipality US, Canada,Mexico, UL/ETL IEC62368-1, FCC, NOM,	2-pin US input plug

Table 4-2 G-2425G-B power supply ordering information (continued)

ONT part numbers	Power information (Model No./Manufacture Part Number)	Power information	Customer category or country compliance tested for	Notes
Kit: 3FE 48293 BB EMA: 3FE 48296 BB	FUHUA: UES36WV-120300SPA/ UE200723GWZF1RI SOY: SOY-1200300EU/BC120300-EA6A-LLAB	12V wall mounted AC/DC power adapter with 2-pin EU input plug	Europe CE EN62368-1	2-pin EU input plug
Kit: 3FE 48293 CA EMA: 3FE 48296 BA	FUHUA: UES36WB-120300SPA/ UE200723GWZF3RI SOY: SOY-1200300GB/BC120300-YB6A-LL09	12V 3A wall mounted AC/DC power adapter with 3-pin UK input plug	Europe CE EN62368-1	Dummy 3-pin UK input plug
Kit: 3FE 48293 CB EMA: 3FE 48296 CA	FUHUA: UES36WB-120300SPA/ UE200723GWZF3RI SOY: SOY-1200300GB/BC120300-YB6A-LL09	12V 3A wall mounted AC/DC power adapter with 3-pin UK input plug	Europe CE EN62368-1	Dummy 3-pin UK input plug
Kit: 3FE 48293 DB EMA: 3FE 48296 DB	SOY: SOY-1200300-3014-II/BC120300-AE6A-LL07 Masspower: NBS40C120300M2/SL00197	12V 3A desktop AC/DC power adapter with 2-pin Argentina input plug	Argentina IRAM/S-mark IEC60950-1	2-pin Argentina input plug
Kit: 3FE 48293 EA EMA: 3FE 48296 EA	FUHUA: UES36WS-120300SPA/ UE200723GWZF4RI SOY: SOY-1200300AU/BC120300-FA6A-LL01	12V 3A wall mounted AC/DC power adapter with 2-pin Australia input plug	Australia RCM	2-pin Australia input plug

4.3 G-2425G-B general description


G-2425G-B indoor ONTs provide the subscriber interface for the network by terminating the PON interface and converting it to user interfaces that directly connect to subscriber devices.

The G-2425G-B has built-in Wi-Fi 802.11 b/g/n/ac networking with triple play capability and can provide triple play services with voice, video and data.

The ONT is compatible with all existing subscriber equipment, including analog phones with both tone and rotary dial capabilities, cordless phones, modems, fax machines, and caller ID boxes (Type I, Type II, and Type III).

The ONT can be placed on a flat surface, such as a desk or shelf.

Figure 4-1 G-2425G-B ONT

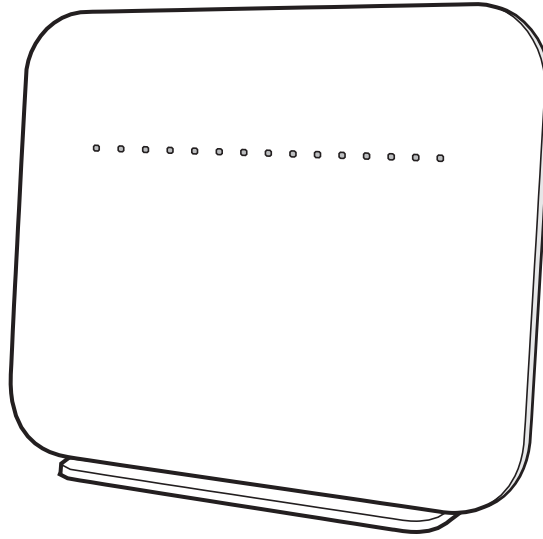

35957

G-2425G-B indoor ONTs provide the following functions:

- Dual-band concurrent 4x4 IEEE 802.11b/g/n 2.4 GHz and 802.11ac MU-MIMO 5 GHz
- Supports 802.11 b/g/n 4x4 Wireless 2.4 GHz MIMO; Channel bandwidth 20, 40 MHz, auto
- Supports 802.11ac 4x4 Wireless 5 GHz Mu-MIMO; Channel bandwidth 20, 40, 80 MHz, auto
- Four Gigabit standard RJ-45 10/100/1000 Mbps, auto negotiating Ethernet ports and MDI/MDIX auto sensing
- Two POTS ports with R-J11 connectors
- Two USB 2.0 Type A ports
- GPON uplink: G.984 and G.988 series standard compliant
- 256MB NAND Flash with bad block management, 512MB DDR3 RAM, pin2pin compatible design for possible upgrade of RAM/Flash
- Four RJ-45 10/100/1000 Ethernet ports with auto negotiation and MDI/MDIX auto sensing
- WLAN on/off push button
- WPS on/off push button
- LEDs on/off push button
- Reset button
- Triple-Play services, including voice, video and high speed Internet access
- Support for fax services
- Built-in layer 2 switch; Line Rate L2 traffic
- IP video distribution
- Wavelength: 1490 nm downstream; 1310 nm upstream

-
- Supports WBF filter. The GPON ONTs can co-exist with XGSPON ONTs in the same PON.
 - Line rate: 2.488 Gb/s downstream; 1.244 Gb/s upstream
 - 4 inner dual band antennas for 2.4G and 5G
 - Optics that support received signal strength indication (RSSI)
 - Wireless 2.4 GHz 802.11 b/g/n 4x4 MIMO
 - Wireless 5 GHz 802.11ac 4x4 MU-MIMO
 - 64/128 WEP encryption
 - WPA, WPA-PSK/TKIP
 - WPA2, WPA2-PSK/AES
 - VLAN tagging/detagging and marking/remarking of IEEE 802.1p per Ethernet port.
 - Dying gasp support
 - Voice Services via Session Initiation Protocol (SIP)
 - Multiple voice Code
 - DTMF dialing
 - Echo cancellation (G.168)
 - Fax mode configuration (T.30/T.38)
 - Caller ID, call waiting, call hold, 3-way calling, call transfer, message waiting
 - Forward Error Correction (FEC)
 - support for multiple SSIDs (private and public instances); contact your Nokia representative for further details.
 - Conductive power: 500mW/24 dBm (2.4 GHz); 1000 mW/30 dBm (5GHz)
 - Maximum effective isotropic radiated power (EIRP): 1000mW/30dBm (2.4GHz); 2000mW/33dBm (5GHz)
 - Bridged mode or routed mode per LAN port
 - Ethernet-based Point-to-Point (PPPoE)
 - DHCP client/server
 - DNS server/client
 - DDNS
 - Port forwarding
 - Network Address Translation (NAT)
 - Network Address Port Translation (NAPT)
 - UPnP IGD2.0 support
 - ALG
 - IGMP snooping and proxy (v2/v3)
 - Traffic classification and QoS capability
 - OMCI/TR-069 Web GUI configuration
 - Performance monitoring and alarm reporting

-
- Remote software image downloading and activation
 - IP/MAC/URL filter
 - Multi-level firewall and ACL

4.3.1 TR-069 parameter support

The G-2425G-B ONT supports the following TR-069 features:

- Host object
- Port forwarding
- Optical parameters
- Object support for WiFi parameters
- Statistics and troubleshooting
- Diagnostic parameters

Host object support

The ONT provides host object support for: InternetGatewayDevice.LANDevice.Hosts.Host.

Port forwarding support

The ONT supports the port forwarding of objects via TR-069:

- Application Name
- WAN Port
- LAN Port
- Internal Client
- Protocol
- Enable Mapping
- WAN Connection List

These are the same port forwarding parameters supported in the GUI. For more information, see [Table 7-29, “Port forwarding parameters” \(p. 125\)](#) in [Chapter 7, “Configure a G-2425G-B indoor ONT”](#).

Optical parameters support

The ONT supports the reading of optical parameters via TR-069:

- laser bias current
- voltage
- temperature
- received signal levels
- lower thresholds

These are the same optical parameters supported in the GUI. For more information, see [Table 7-6, “Optics module status parameters” \(p. 81\)](#) in [Chapter 7, “Configure a G-2425G-B indoor ONT”](#).

Object support for WiFi parameters

The ONT supports the status retrieval and configuration of the following Wi-Fi parameters via TR-069:

- channel
- SSID
- password for WPA and WEP
- Tx power (transmission rate in percentage of maximum transmit power)
- WPS

These are the same TR-069 object parameters that are supported in the GUI. For more information, see [Table 7-12, “WiFi 2.4GHz network parameters”](#) (p. 94) and [Table 7-13, “WiFi 5GHz network parameters”](#) (p. 97) in [Chapter 7, “Configure a G-2425G-B indoor ONT”](#).

Statistics and troubleshooting support

The ONT supports TR-069 statistics and troubleshooting for LAN, WAN, and WiFi.

For more information, see the Procedure [7.3.54 “Retrieve Residential Gateway \(RG\) troubleshooting counters”](#) (p. 146) in [Chapter 7, “Configure a G-2425G-B indoor ONT”](#).

Diagnostic parameter support

The ONT supports the following TR-069 diagnostic parameters:

- TR-143
- IP ping
- traceroute

These are the same diagnostic parameters supported in the GUI. For more information, see the Procedure [7.3.51 “Diagnose WAN connections”](#) (p. 143) in [Chapter 7, “Configure a G-2425G-B indoor ONT”](#).

4.3.2 TR69 authentication using TLS and CA certificates

G-2425G-B ONTs support TLS, as well as ACS authentication using SHA-256 pre-installed certificates.

If the URL is set to the https://... format, by default, the connection will use TLS without authentication mode. The ONT can also authenticate the ACS using a pre-installed CA certificate.

The G-2425G-B ONTs support TLSv1.3 for TR069. The ONT supports download certification from ACS.

4.3.3 TR-104 parameter extension support for voice service

A vendor specific attribute has been added to the TR-104 Voice Service object structure to enable the ACS to configure the name of the embedded GSIP XML file to be selected.

The TR-104 Voice Service Object is:

InternetGatewayDevice.Services.VoiceService.{i}.Capabilities.SIP.

The vendor specific attribute is: X_ALU-COM_XML_File_Name_Path.

4.3.4 TR-104 voice-related alarms

The G-2425G-B ONT supports the following four TR-104 voice-related alarms on a per FXS port basis.

These alarms all represent SIP registration failures with an alarm level of MAJOR.

- SIPREGDNS: domain name could not be resolved
- SIPREGAUTH: authentication failed
- SIPREGTO: re-transmissions timed out
- SIPREGERR: error response from the registration server

4.3.5 TR-104 parameters for FX line testing

New attributes have been added to the TR-104 Voice Service object structure to enable the ACS to perform line tests. The ONT supports the following electrical line tests:

- hazardous potential
- foreign electrical motive force
- resistive faults
- receiver off-hook test
- ringers test

4.3.6 TR-111 support

The G-2425G-B ONT supports TR-111, which extends the WAN Management Protocol defined in TR-069 to enhance the ability to remotely manage LAN devices.

The device-gateway association enables an ACS to identify the associated gateway through which a device is connected.

A connect request via the NAT gateway enables an ACS to initiate a TR-069 session with a device that is operating behind a NAT gateway.

4.4 G-2425G-B software and installation feature support

For information on installing or replacing the G-2425G-B see:

- [Chapter 5, “Install a G-2425G-B indoor ONT”](#)
- [Chapter 6, “Replace a G-2425G-B indoor ONT”](#)

For information on the following topics, see the **7368 ISAM ONT Product Overview Guide**:

- ONT and MDU general descriptions of features and functions
- Ethernet interface specifications
- POTS interface specifications
- RSSI specifications
- Wi-Fi specifications
- ONT optical budget
- SLID entry via Ethernet port

- ONT management using an ONT interface

4.5 G-2425G-B interfaces and interface capacity

Table 4-3, “G-2425G-B indoor ONT interface connection capacity” (p. 44) describes the supported interfaces and interface capacity for G-2425G-B indoor ONTs.

Table 4-3 G-2425G-B indoor ONT interface connection capacity

ONT type and model	Maximum capacity								
	POTS	10/ 100 BASE-T	10/ 100/ 1000 BASE-T	RF video (CATV)	MoCA	VDSL2	E1/T1	Local craft	GPON SC/APC
G-2425G-B ¹	2	—	4	—	—	—	—	—	1


Notes:

1. The G-2425G-B ONTs provide Wi-Fi service that is enabled and disabled using a Wi-Fi on/off switch.

4.5.1 G-2425G-B connections and components

Figure 4-2, “G-2425G-B indoor ONT physical connections (back)” (p. 45) shows the physical connections for G-2425G-B indoor ONTs. Two USB port is on the side of the ONT.


Figure 4-2 G-2425G-B indoor ONT physical connections (back)

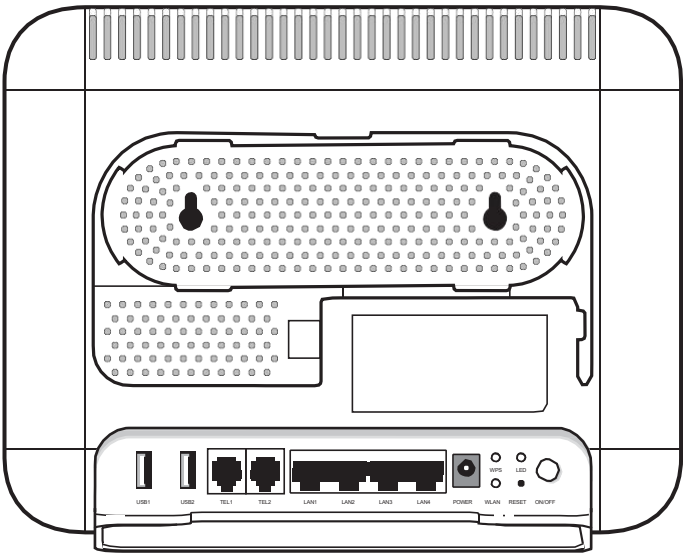

35955

Figure 4-3, “G-2425G-B indoor ONT with fiber optic connector” (p. 46) shows the G-2425G-B indoor ONT with a fiber optic connector.

Figure 4-3 G-2425G-B indoor ONT with fiber optic connector

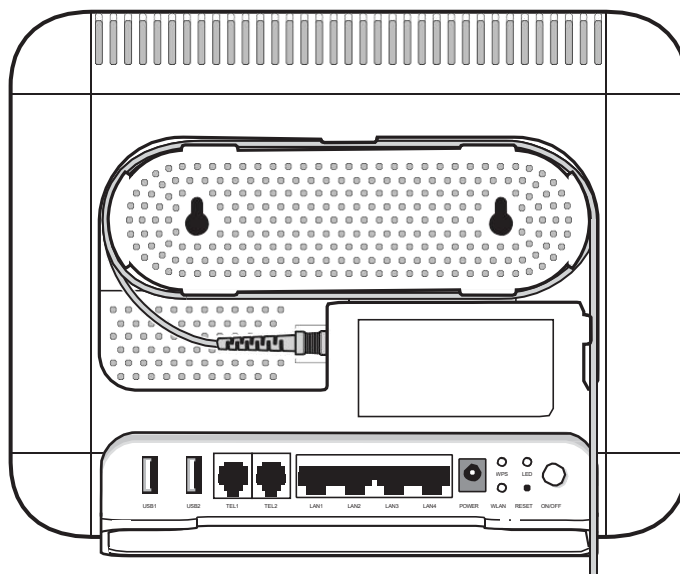

35956

Table 4-4, “G-2425G-B indoor ONT physical connections” (p. 46) describes the physical connections for G-2425G-B indoor ONTs.

Table 4-4 G-2425G-B indoor ONT physical connections

Connection ¹	Print Letters	Description
POTS port	TEL1 and TEL2	This connection is provided through an RJ-11 port. One POTS connection is supported. The POTS port supports voice services.
Ethernet ports	LAN1 to LAN4	This connection is provided through Ethernet RJ-45 connectors. Up to four 10/100/1000 Base-T Ethernet interfaces are supported. The Ethernet ports can support both data and in-band video services on all four interfaces.
Power input	POWER	This connection is provided through the power connector. A power cable fitted with a barrel connector is used to make the connection.
Reset button	RESET	Pressing the Reset button for less than 10 seconds reboots the ONT; pressing the Reset button for 10 seconds resets the ONT to the factory defaults, except for the LOID and SLID.
WLAN button	WLAN	Wi-Fi service is compliant with IEEE 802.11 standards and is enabled and disabled using the WLAN button.
WPS button	WPS	The Wi-Fi Protected Setup (WPS) button enables and disables the WPS.
LED button	LED	The LED button turns the LED indicators on or off.
On/Off button	ON/OFF	This button turns the ONT on or off.
USB port	USB1 and USB2	This connection is provided through 1 USB port on the side of the ONT. The ONT supports external USB hard drives that can be made accessible to all LAN devices.

Table 4-4 G-2425G-B indoor ONT physical connections (continued)

Connection ¹	Print Letters	Description
Fiber optic port		The SC/APC fiber optic port is located at the back of the ONT and provides the connection for the fiber optic cable.


Notes:

1. The primary path for the earth ground for these ONTs is provided by the 12V Return signal in the power connector.

4.6 G-2425G-B LEDs

Figure 4-4, “G-2425G-B indoor ONT LEDs” (p. 47) shows the G-2425G-B indoor ONT LEDs.

Figure 4-4 G-2425G-B indoor ONT LEDs

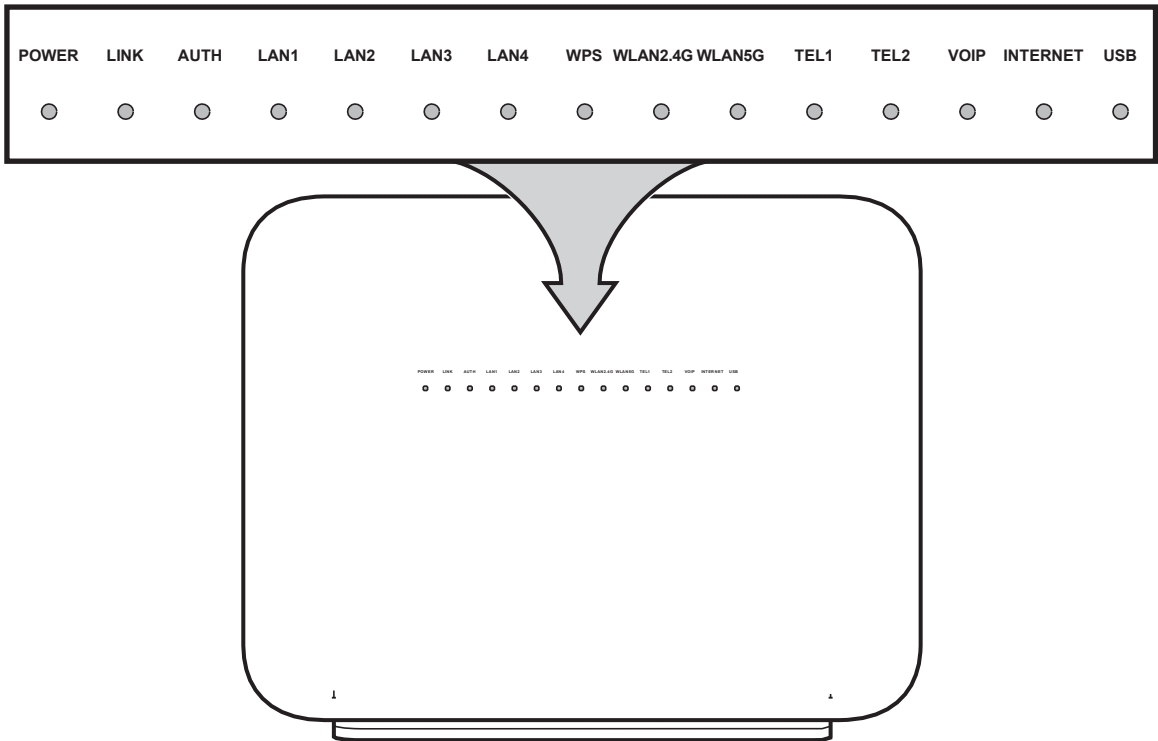

35958

Table 4-5, “G-2425G-B indoor ONT LED descriptions” (p. 48) provides LED descriptions for G-2425G-B indoor ONTs.

Table 4-5 G-2425G-B indoor ONT LED descriptions

Indicator	LED color and behavior	LED behavior description
Power	Green solid Red solid Off	Power on Light failed on startup (for example corrupt flash), or self test failed on startup, or self test failed during regular operation or when executed over OMCI Power off
Link	Green solid Off	GPON link between ONT and OLT is operating normally GPON link is down or no link is connected
Auth	Off Green solid Green flashing	Fiber is not connected or no power is received to the ONT ONT is configured on the OLT and is in service (UP) ONT is in the process of ranging or synchronizing over the OLT ONT is ranged but not configured on the OLT ONT is configured on OLT but admin is down and the ONT is out of service ONT is in service and subsequently un-configured on the OLT ONT is in service while other services are being configured ONT is in service but admin is down and the ONT is out of service
LAN 1 to 4	Green solid Green flashing Off	ONT is connected to the associated LAN port (includes devices with wake-on-LAN capability where a slight voltage is supplied to an Ethernet connection) LAN activity is present (traffic in either direction) ONT power is off or Ethernet is not connected
TEL 1 to 2	Green solid Green flashing Off	Phone is off hook. Phone is in 'call in' or 'talking' condition All phones are on hook
VOIP	Green solid Off	VoIP service is built up and can provide service VoIP service is not built up or out of service
WPS	Green solid Green flashing Red solid Off	WiFi protected setup link is up (negotiation and auto-configuration successful) WiFi protected setup link activity (negotiation and auto-configuration ongoing) WiFi protected setup processing exception or multiple peers using WPS simultaneously WiFi protected setup link down or no link connected (negotiation has not started or has failed)
WLAN 2.4 GHz	Green solid Green flashing Off	WLAN link is enabled in 2.4 GHz Traffic is passing through the WLAN link WLAN link is disabled or no link is connected
WLAN 5 GHz	Green solid Green flashing Off	WLAN link is enabled in 5 GHz Traffic is passing through the WLAN link WLAN link is disabled or no link is connected
USB	Green solid Green flashing Off	At least one device is connected to the USB port There is traffic activity on at least one device connected to the USB port No device is connected to the USB port

Table 4-5 G-2425G-B indoor ONT LED descriptions (continued)

Indicator	LED color and behavior	LED behavior description
INTERNET	Green solid Green flashing Off	HSI WAN is connected: a) the device has an IP address assigned from IPCP, DHCP, or static, and no traffic has been detected; b) the session is dropped due to idle timeout but the PON link is still present. PPPoE or DHCP connection is in progress. HSI WAN is not connected: a) there is no physical interface connection; b) the device is in bridged mode without an assigned IP address; c) the session has been dropped for reasons other than idle timeout.

4.7 G-2425G-B detailed specifications

Table 4-6, “G-2425G-B indoor ONT physical specifications” (p. 49) lists the physical specifications for G-2425G-B indoor ONTs.

Table 4-6 G-2425G-B indoor ONT physical specifications

Description	Specification
Length	9.6 in. (245 mm)
Width	3.14 in. (80 mm)
Height (including antenna) (without antenna)	7.63 in. (194 mm) 5.45 in.(138.4 mm)
Weight [within ± 0.5 lb (0.23 kg)] (net weight of ONT)	1.36 lbs (618g)

Table 4-7, “G-2425G-B indoor ONT power consumption specifications” (p. 49) lists the power consumption specifications for G-2425G-B indoor ONT.

Table 4-7 G-2425G-B indoor ONT power consumption specifications

Mnemonic	Maximum power (Not to exceed)	Condition	Minimum power	Condition
G-2425G-B	36 W	1 POTS off-hook, 4 10/100/1000 Base-T Ethernet, Wi-Fi operational, USB operational	7.2 W	1 POTS on-hook, other interfaces/services not provisioned

Table 4-8, “G-2425G-B indoor ONT environmental specifications” (p. 50) lists the environmental specifications for G-2425G-B indoor ONT.

Table 4-8 G-2425G-B indoor ONT environmental specifications

Mounting method	Temperature range and humidity	Altitude
On desk or shelf	Operating: 23°F to 113°F (•5°C to 45°C) ambient temperature 5% to 95% relative humidity, non-condensing	Contact your Nokia technical support representative for more information
	Storage: •4°F to 158°F (•20°C to 70°C)	

4.8 G-2425G-B GEM ports and T-CONTs

Table 4-9, “G-2425G-B indoor ONT capacity for GEM ports and T-CONTs” (p. 50) lists the maximum number of supported T-CONTs and GEM ports. See the appropriate release Customer Release Notes for the most accurate list of supported devices.

Table 4-9 G-2425G-B indoor ONT capacity for GEM ports and T-CONTs

ONT or MDU	Maximum	Notes
Package P ONTs		
GEM ports per indoor or outdoor ONT	256	256 are present; 254 are available, and 2 are reserved for multicast and debugging
T-CONTs per indoor or outdoor ONT	32	32 are present; 31 are available, and 1 is reserved for OMCI

4.9 G-2425G-B performance monitoring statistics

The following section identifies the supported performance monitoring statistics for G-2425G-B ONTs. A check mark indicates the statistic is supported on that ONT. An empty cell indicates the statistic is not supported. The following tables are categorized by supported alarm types:

- Table 4-10, “Package S ONTs ONTENET performance monitoring statistics” (p. 51) provides statistics for ONTENET type counters
- Table 4-11, “Package S ONTs ONTL2UNI performance monitoring statistics” (p. 51) provides statistics for ONTL2UNI type counters
- Table 4-12, “Package S ONTs PONONTTC, PONONTMCTC, PONONTTCHSI, PONONTTCES, PONONTTCFLOW, PONONTTCVOIP performance monitoring statistics” (p. 51) provides statistics for PONONTTC, PONONTMCTC, PONONTTCHSI, PONONTTCES, PONONTTCFLOW, and PONONTTCVOIP type counters
- Table 4-13, “Package S ONTs PONONTTC aggregate performance monitoring statistics” (p. 52) provides statistics for PONONTTC aggregate type counters

i **Note:** If you have trouble accessing G-2425G-B ONTs performance monitoring statistics using TL1, please contact your Nokia support representative for more information about how to access and retrieve performance monitoring type counters.

Table 4-10 Package S ONTs ONTENET performance monitoring statistics

ONT	ONTENET statistics													
	FCSE	EC	LC	RBO	SCF	MCF	DT	IMTE	CSE	AE	IMRE	FTL	TBO	SQE
G-2425G-B ¹	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	—	✓ ²	✓	—

Notes:

1. A 5 second polling window limitation exists on the ONT, therefore the margin of error for each 15-min window is 5 seconds
2. Only packets larger than 9 kB will be counted.

Table 4-11 Package S ONTs ONTL2UNI performance monitoring statistics

ONT	ONTL2UNI statistics										
	FRAMES	BYTES	MCFRAMES	DSDRPDFRMS	USDRPDFRMS	USFRAMES	DSFRAMES	USBYTES	DSBYTES	USMCFRAMES	DSMCFRAMES
G-2425G-B ¹	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Notes:

1. A 5 second polling window limitation exists on the ONT, therefore the margin of error for each 15-min window is 5 seconds

Table 4-12 Package S ONTs PONONTTC, PONONTMCTC, PONONTTCHSI, PONONTTCES, PONONTTCFLOW, PONONTTCVOIP performance monitoring statistics

ONT	PONONTTC, PONONTMCTC, PONONTTCHSI, PONONTTCES, PONONTTCFLOW, PONONTTCVOIP statistics					
	TXBLOCKS	TXFRAGS	RXBLOCKS	RXFRAGS	LOSTFRAGS	BADGEMHDRS
G-2425G-B ¹	✓	✓	✓	✓	✓	—

Notes:

1. A 5 second polling window limitation exists on the ONT, therefore the margin of error for each 15-min window is 5 seconds

Table 4-13 Package S ONTs PONONTTC aggregate performance monitoring statistics

ONT	PONONTTC (aggregate) statistics					
	TXBLOCKS	TXFRAGS	RXBLOCKS	RXFRAGS	LOSTFRAGS	BADGEMHDRS
G-2425G-B ¹	✓	✓	✓	✓	✓	—

Notes:


1. A 5 second polling window limitation exists on the ONT, therefore the margin of error for each 15-min window is 5 seconds

4.10 G-2425G-B functional blocks

G-2425G-B indoor ONTs are single-residence ONTs that support Wireless (Wi-Fi) service. Wi-Fi service on these ONTs is compliant with the IEEE 802.11 standard and enabled or disabled using a WLAN button. In addition to the Wi-Fi service, these ONTs transmit Ethernet packets to four RJ-45 Ethernet ports and voice traffic to two RJ-11 POTS port. These ONTs also feature fiber optic, USB, and power connectors.

[Figure 4-5, “G-2425G-B ONT functional block” \(p. 53\)](#) shows the functional blocks for G-2425G-B indoor ONT.

Figure 4-5 G-2425G-B ONT functional block

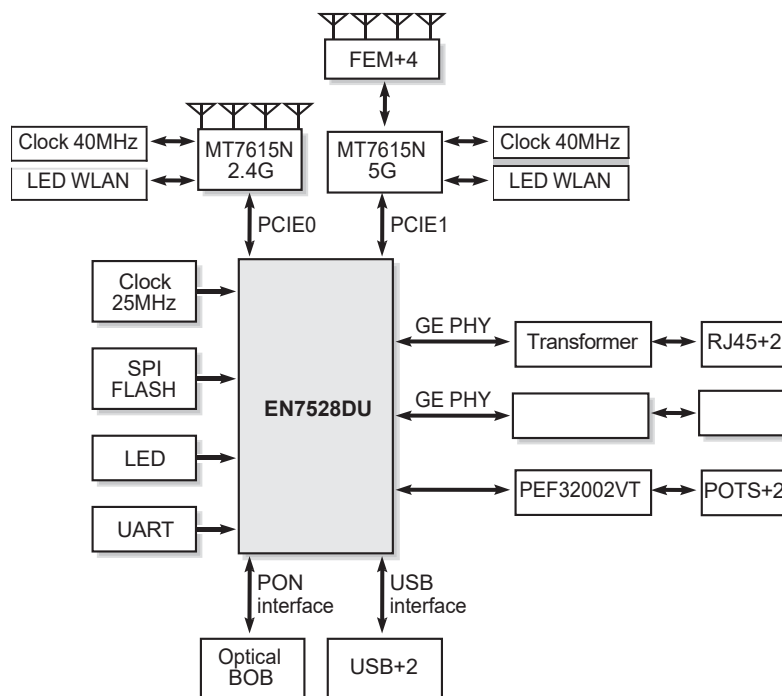

35655

4.11 G-2425G-B standards compliance

G-2425G-B indoor ONTs are compliant with the following standards:

- CE marking for European standards for health, safety, and environmental protection
- EN 300-328 v1.9.1 wide band data transmission standards for 2.4GHz bands
- G.984 support GPON interface (framing)
- G.984.2 (Amd1, class B+) for GPON
- G.984.3 support for activation and password functions
- G.984.3 support for AES with operator enable/disable on per port-ID level
- G.984.3 support for dynamic bandwidth reporting
- G.984.3 support for FEC in both upstream and downstream directions
- G.984.3 support for multicast using a single GEM Port-ID for all video traffic
- G.984.4 and G.983.2 support for ONT management and provisioning
- IEEE 802.1p for traffic prioritization
- IEEE 802.1q for VLANs
- IEEE 802.3 (2012)
- IEEE 802.11 ac/b/g/n for Wi-Fi

- ITU-T G.711, G.722, G.723, G.726, G.729
- SIP RFC 3261

4.11.1 Energy-related products standby and off modes compliance

Hereby, Nokia declares that the G-2425G-B ONTs are in compliance with the essential requirements and other relevant provisions of Directive 2009/125/EC together with Commission Regulation (EC) No 1275/2008 and Commission Regulation (EC) No 801/2013.

The G-2425G-B ONTS qualify as equipment with high network availability (HiNA) functionality. Since the main purpose of G-2425G-B ONTs is to provide network functionality with HiNA 7 days /24 hours, the modes Off/Standby, Power Management, and Networked Standby are inappropriate.

For information about the type and number of network ports, see [4.5 “G-2425G-B interfaces and interface capacity” \(p. 45\)](#) in this chapter.

For information about power consumption, see [4.7 “G-2425G-B detailed specifications” \(p. 49\)](#) in this chapter.

4.11.2 FCC statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

4.11.3 FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference, and

2. this device must accept any interference received, including interference that may cause undesired operation.



CAUTION

Service Disruption

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

4.12 G-2425G-B special considerations

G-2425G-B is a package P ONT.

4.12.1 Wi-Fi service

G-2425G-B indoor ONTs feature Wi-Fi service as well as voice and data services. Wi-Fi is a wireless networking technology that uses radio waves to provide wireless HSI and network connections. This ONT complies with the IEEE 802.11 standards, which the Wi-Fi Alliance defines as the basis for Wi-Fi technology.

Wi-Fi physical features

G-2425G-B indoor ONTs have the following physical features that assist in providing Wi-Fi service:

- 1 WLAN button for enabling and disabling Wi-Fi service
- 1 Wi-Fi Protected Setup (WPS) push button for adding WPS-enabled wireless devices
- 4 internal antennas: 2 for 2.4G and 2 for 5G

Wi-Fi standards and certifications

The Wi-Fi service on G-2425G-B indoor ONTs supports the following IEEE standards and Wi-Fi Alliance certifications:

- Certified for IEEE 802.11ac/b/g/n/standards
- WPA support including WPA-PSK
- Certified for WPA2-Personal
- Certified for WPA2-enterprise

Wi-Fi GUI features

G-2425G-B indoor ONTs have HTML-based Wi-Fi configuration GUIs.

4.12.2 G-2425G-B ONT considerations and limitations

[Table 4-14, "G-2425G-B ONT considerations and limitations" \(p. 56\)](#) lists the considerations and limitations for Package P G-2425G-B ONTs.

Table 4-14 G-2425G-B ONT considerations and limitations

Considerations and limitations
Call History Data collection (ONTCALLHST) is supported, except for the following parameters: RTP packets (discarded), far-end RTCP and RTCP-XR participation, RTCP average and peak round trip delay, MOS, average jitter, number of jitter-buffer over-runs and under runs.
Some voice features are configurable on a per ONT basis, including Call Waiting, Call Hold, 3-Way Calling, and Call Transfer.
The following voice features / GSIP parameters are configurable on a per-Client/ per-ONT basis (not per-Subscriber): • Enable Caller ID and Enable Caller Name ID • Digitmap and the associated Interdigit and Critical timers and Enter key parameters • Warmline timer is enabled per subscriber, but the warmline timer value is configured per ONT and must have a lower value than the Permanent time • Miscellaneous timers: Permanent, Timed-release, Reanswer, Error-tone, and CW-alert timers • Features / functions: Message waiting mode, WMWI refresh interval, DTMF volume level • Service Codes for the following features: CW, Call Hold and Warmline

5 Install a G-2425G-B indoor ONT

5.1 Overview

5.1.1 Purpose

5.1.2 Contents

5.1 Overview	57
5.2 Purpose	57
5.3 General	57
5.4 Prerequisites	57
5.5 Recommended tools	57
5.6 Safety information	58
5.7 Procedure	58

5.2 Purpose

This chapter provides the steps to install a G-2425G-B indoor ONT.

5.3 General

The steps listed in this chapter describe mounting and cabling for a G-2425G-B indoor ONT.

5.4 Prerequisites

You need the following items before beginning the installation:

- all required cables

5.5 Recommended tools

You need the following tools for the installation:

- #2 Phillips screwdriver
- 1/4 in. (6 mm) flat blade screwdriver
- wire strippers
- fiber optic splicing tools
- RJ-45 cable plug crimp tool
- voltmeter or multimeter
- optical power meter

- drill and drill bits
- paper clip

5.6 Safety information

Read the following safety information before installing the unit.



DANGER

Hazard

Hazardous electrical voltages and currents can cause serious physical harm or death. Always use insulated tools and follow proper safety precautions when connecting or disconnecting power circuits.

Make sure all sources of power are turned off and have no live voltages present on feed lines or terminals. Use a voltmeter to measure for voltage before proceeding.

Always contact the local utility company before connecting the enclosure to the utilities.



WARNING

Equipment Damage

This equipment is ESD sensitive. Proper ESD protections should be used when removing the fiber access cover of the indoor ONT.



CAUTION

Service Disruption

Keep indoor ONTs out of direct sunlight. Prolonged exposure to direct sunlight can damage the unit.



Note: Observe the local and national laws and regulations that may be applicable to this installation.

Observe the following:

- The indoor ONT should be installed in accordance with the applicable requirements of the NEC or CEC. Local authorities and practices take precedent when there is conflict between the local standard and the NEC or CEC.
- The indoor ONT must be installed by qualified service personnel.
- Indoor ONTs must be installed with cables that are suitably rated and listed for indoor use.
- See the detailed specifications in the [Chapter 4, “G-2425G-B unit data sheet”](#) for the temperature ranges of these ONTs.

5.7 Procedure

Use this procedure to install a G-2425G-B indoor ONT.

1

Place the indoor ONT unit on a flat surface, such as a desk or shelf.




Note: The G-2425G-B cannot be stacked with another ONT or with other equipment. The ONT mounting requirements are:

- allow a minimum 100 mm clearance above the top cover
- allow a minimum 50 mm clearance from the side vents
- do not place any heat source directly above the top cover or below the bottom cover

2

Review the connection locations, as shown in [Figure 5-1, “G-2425G-B ONT connections” \(p. 58\)](#).

Figure 5-1 G-2425G-B ONT connections

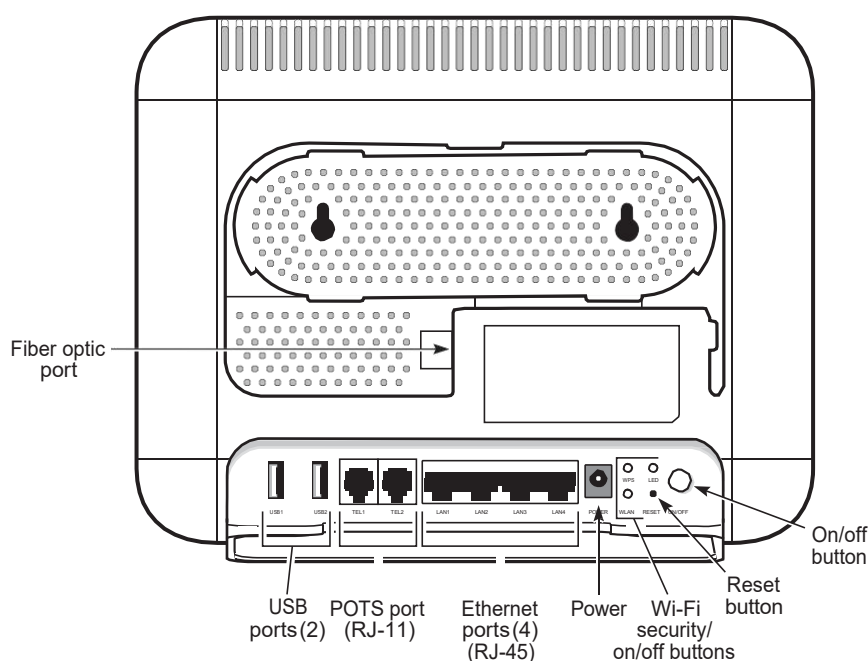

36083

3

Connect the Ethernet cables to the RJ-45 ports.

4

Route the POTS cable directly to the RJ-11 port as per local practices.

5



DANGER

Hazard

Fiber cables transmit invisible laser light. To avoid eye damage or blindness, never look directly into fibers, connectors, or adapters.



WARNING

Equipment Damage

Be careful to maintain a bend radius of no less than 1.5 in. (3.8 cm) when connecting the fiber optic cable. Too small of a bend radius in the cable can result in damage to the optic fiber.

Connect the fiber optic cable with SC/APC adapter to the SC/APC connector on the bottom of the ONT.



Note: Fiber cable preparation varies depending on the type and size of the inside or outside plant fiber cable being spliced to the SC/APC fiber optic pigtail cable.

6

Connect the power cable to the power connector.

7

Power up the ONT unit by using the power switch.

8

If used, enable the Wi-Fi service.

- a. Locate the WLAN button on the ONT; see [Figure 5-1, “G-2425G-B ONT connections”](#) (p. 59) for location of the WLAN button.
- b. Press the WLAN button to change the status of the Wi-Fi service.

9

Verify the ONT LEDs, voltage status, and optical signal levels; see the **7368 Hardware and Cabling Installation Guide**.

10

Activate and test the services; see the **7368 Hardware and Cabling Installation Guide**.

11

If used, configure the SLID; see the **7368 ISAM ONT Configuration, Management, and Troubleshooting Guide**.

12

If necessary, reset the ONT.

- a. Locate the Reset button on a G-2425G-B indoor ONT as shown in [Figure 5-1, “G-2425G-B ONT connections” \(p. 59\)](#).
- b. Insert the end of a straightened paper clip or other narrow object into the hole in the Reset button to reset the ONT.

END OF STEPS

6 Replace a G-2425G-B indoor ONT

6.1 Overview

6.1.1 Purpose

6.1.2 Contents

6.1 Overview	63
6.2 Purpose	63
6.3 General	63
6.4 Prerequisites	63
6.5 Recommended tools	63
6.6 Safety information	64
6.7 Procedure	64

6.2 Purpose

This chapter provides the steps to replace a G-2425G-B indoor ONT.

6.3 General

The steps listed in this chapter describe mounting and cabling for a G-2425G-B indoor ONT.

6.4 Prerequisites

You need the following items before beginning the installation:

- all required cables

6.5 Recommended tools

You need the following tools for replacing the ONT:

- #2 Phillips screwdriver
- 1/4 in. (6 mm) flat blade screwdriver
- wire strippers
- fiber optic splicing tools
- RJ-45 cable plug crimp tool
- voltmeter or multimeter
- optical power meter

- drill and drill bits

6.6 Safety information

Read the following safety information before replacing the unit.



DANGER

Hazard

Hazardous electrical voltages and currents can cause serious physical harm or death. Always use insulated tools and follow proper safety precautions when connecting or disconnecting power circuits.

Make sure all sources of power are turned off and have no live voltages present on feed lines or terminals. Use a voltmeter to measure for voltage before proceeding.

Always contact the local utility company before connecting the enclosure to the utilities.



WARNING

Equipment Damage

This equipment is ESD sensitive. Proper ESD protections should be used when removing the fiber access cover of the indoor ONT.



CAUTION

Service Disruption

Keep indoor ONTs out of direct sunlight. Prolonged exposure to direct sunlight can damage the unit.



Note: Observe the local and national laws and regulations that may be applicable to this installation.

Observe the following:

- The indoor ONT should be installed in accordance with the applicable requirements of the NEC or CEC. Local authorities and practices take precedent when there is conflict between the local standard and the NEC or CEC.
- The indoor ONT must be installed by qualified service personnel.
- Indoor ONTs must be installed with cables that are suitably rated and listed for indoor use.
- See the detailed specifications in the [Chapter 4, "G-2425G-B unit data sheet"](#) for the temperature ranges of these ONTs.

6.7 Procedure

Use this procedure to replace a G-2425G-B indoor ONT.

1

Deactivate the ONT services at the P-OLT.

If you are using the SLID feature, this step is not required. The ONT and the services can remain in service (IS).

- a. Use the RTRV-ONT command to verify the ONT status and th associated services. Record the serial number or the SLID of the ONT displayed in the command output.

Example:

```
RTRV-ONT::ONT-1-1-1-1-1;
```

- b. If the ONT is in service, place the ONT in OOS state.


Example:

```
ED-ONT::ONT-1-1-1-1-1;
```

2

If used, disable the Wi-Fi service by pressing the WLAN button; see [Figure 6-1, “G-2425G-B indoor ONT connections” \(p. 64\)](#) for the location of the WLAN button.

Figure 6-1 G-2425G-B indoor ONT connections

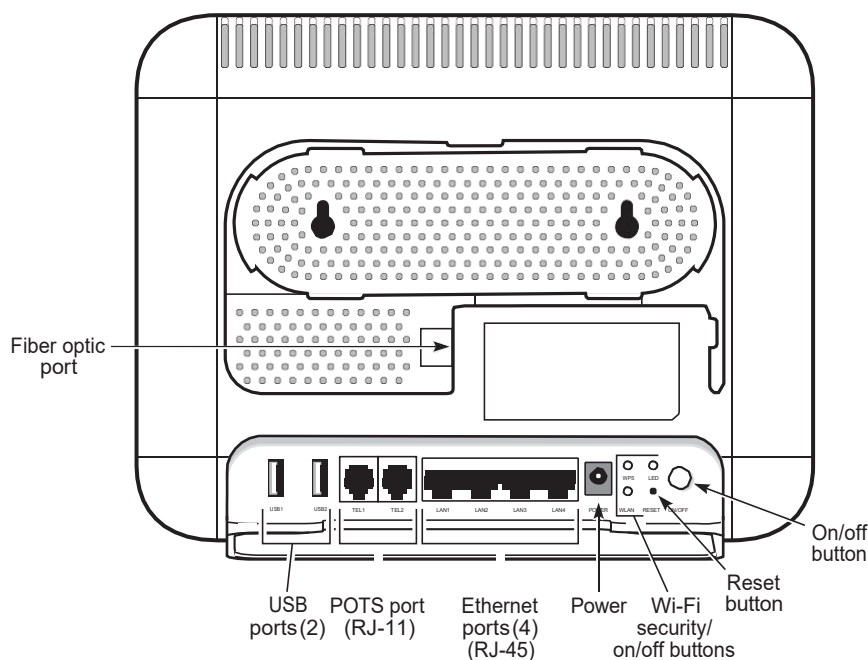

36083

-
- 3 _____
- Power down the unit by using the on/off power switch.

- 4 _____
- Disconnect the POTS, Ethernet, and power cables from the ONT; see [Figure 6-1, “G-2425G-B indoor ONT connections” \(p. 65\)](#) for the connector locations on the G-2425G-B indoor ONT.

- 5 _____



DANGER

Hazard

Fiber cables transmit invisible laser light. To avoid eye damage or blindness, never look directly into fibers, connectors, or adapters.

Disconnect the fiber optic cables.

- a. Unplug the fiber optic cable with SC/APC connector from the bottom of the ONT.
- b. Attach a fiber dust cover to the end of the SC/APC connector.

- 6 _____

Replace the old ONT with a new ONT on a flat surface, such as a desk or shelf.

- 7 _____

Connect the Ethernet cables directly to the RJ-45 ports; see [Figure 6-1, “G-2425G-B indoor ONT connections” \(p. 65\)](#) for the location of the RJ-45 ports.

- 8 _____

Connect the POTS cable directly to the RJ-11 port as per local practices; see [Figure 6-1, “G-2425G-B indoor ONT connections” \(p. 65\)](#) for the location of the RJ-11 ports.

- 9 _____



DANGER

Hazard

Fiber optic cables transmit invisible laser light. To avoid eye damage or blindness, never look directly into fibers, connectors, or adapters.

If required, have approved service personnel who are trained to work with optic fiber clean the fiber optic connection. See the **7368 ISAM ONT Configuration, Management, and Troubleshooting Guide** for more information about fiber optic handling, inspection, and cleaning.

10



DANGER

Hazard

Fiber cables transmit invisible laser light. To avoid eye damage or blindness, never look directly into fibers, connectors, or adapters.



WARNING

Equipment Damage

Be careful to maintain a bend radius of no less than 1.5 in. (3.8 cm) when connecting the fiber optic cable. Too small of a bend radius in the cable can result in damage to the optic fiber.

Connect the fiber optic cable with SC/APC adapter into the SC/APC connector on the bottom of the ONT.



Note: Fiber cable preparation varies depending on the type and size of the inside or outside plant fiber cable being spliced to the SC/APC fiber optic pigtail cable.

11

Connect the power cable to the power connector.

12

Power up the unit by using the power switch.

13

If used, enable the Wi-Fi service by pressing the WLAN button; see [Figure 6-1, “G-2425G-B indoor ONT connections” \(p. 65\)](#) for the location of the WLAN button.

14

If used, configure the SLID; see the **7368 ISAM ONT Configuration, Management, and Troubleshooting Guide** for more information.



Note: A new SLID or the old SLID may be used with the replacement ONT.
If a new SLID is used, the new SLID must also be programmed at the P-OLT using TL1 or a network manager.
If the old SLID is used, no changes need to be made at the P-OLT; see the operations and maintenance documentation for the OLT for more details.

15

Verify the ONT LEDs, voltage status, and optical signal levels; see the **7368 Hardware and Cabling Installation Guide**.

16 _____
Activate and test the services; see the **7368 Hardware and Cabling Installation Guide**.

17 _____
If necessary, reset the ONT.

- a. Locate the Reset button on a G-2425G-B indoor ONT as shown in [Figure 6-1, "G-2425G-B indoor ONT connections"](#) (p. 65).
- b. Insert the end of a straightened paper clip or other narrow object into the hole in the Reset button to reset the ONT.

END OF STEPS _____

7 Configure a G-2425G-B indoor ONT

7.1 Overview

7.1.1 Purpose

7.1.2 Contents

7.1 Overview	69
7.2 General	69
7.3 HGU mode GUI configuration	69

7.2 General

Please refer to the configuration information provided with your OLT for the software configuration procedure for a G-2425G-B ONT.

For HTTP configuration procedures, please refer to the **7368 ISAM ONT Configuration, Management, and Troubleshooting Guide**.

7.3 HGU mode GUI configuration

Use the procedures below to use the web-based GUI for the G-2425G-B in HGU mode. This mode is preset at delivery.

A home gateway unit (HGU) is a home networking device, used as a gateway to connect devices in the home through fiber to the Internet. An HGU provides a variety of features for the home network including routing and firewall capability. By using the HGU, users can connect all smart equipment in their home, including personal computers, set-top boxes, mobile phones, and other consumer electronics devices, to the Internet.

The G-2425G-B ONTs support TLSv1.2 for WEBGUI (HTTPS).

7.3.1 Login

Use the procedure below to login to the web-based GUI for the G-2425G-B.

7.3.2 Login to web-based GUI

1

-
- Open a web browser and enter the IP address of the ONT in the address bar.
The login window appears.

The default gateway IP address must be same as the one printed on the device label. You can connect to this IP address using your web browser after connecting your PC to one of Ethernet ports of the ONT. The static IP address of your PC must be in the same default gateway subnet as the ONT.

2



CAUTION

Service Disruption

Pressing the Reset button for less than 10 seconds reboots the ONT; pressing the Reset button for 10 seconds resets the ONT to the factory defaults, except for the LOID and SLID.

Enter your username and password in the Log in window, as shown in [Figure 7-1, “Web login window”](#) (p. 69).

The default end-user account name and the default password for this account are printed on the device label. The superadmin account is meant for the Operator and is unique per device. Contact your Nokia representative to obtain the superadmin password based on the serial number on the device.

Figure 7-1 Web login window



Note: If you forget the current username and password, press the reset button for 5 seconds and the default values for the username and password will be recovered at startup.

3

Click Login. The Device Information screen appears.



Note: To help protect the security of your Internet connection, the application displays a pop-up reminder to change both the Wi-Fi password and the ONT password. To increase password security, use a minimum of 10 characters, consisting of a mix of numbers and upper and lower case letters.

END OF STEPS

7.3.3 Device and connection status

G-2425G-B ONTs support the retrieval of a variety of device and connection information, including:


- device information
- LAN status
- WAN status
- WAN status IPv6
- Home networking information
- optics module status
- Statistics retrieval
- voice information

7.3.4 Device information retrieval

1

Select Status > Device Information from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-2, “Device Information window” \(p. 70\)](#).

Figure 7-2 Device Information window

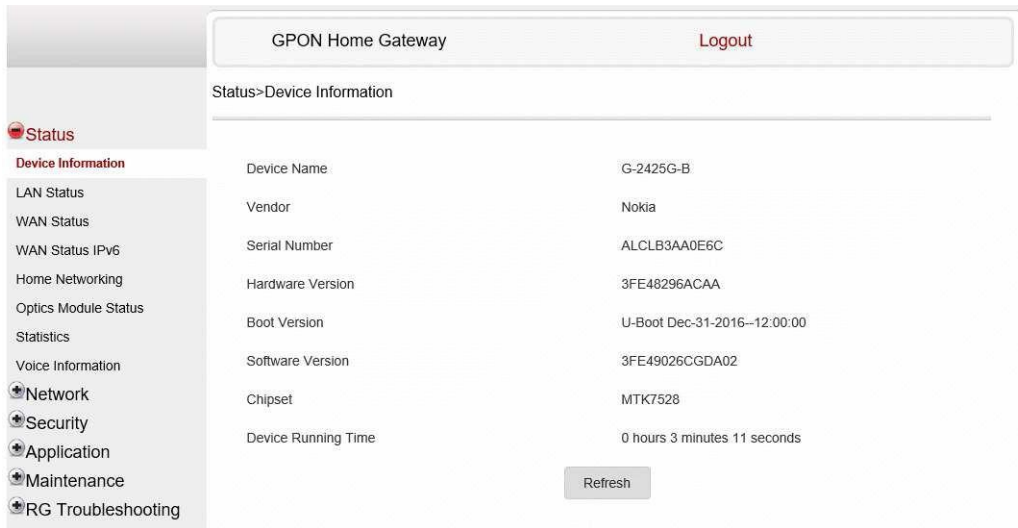

Note: Upon login, the GPON Home Gateway window displays the WAN status block on the bottom left part of each window. This block shows the WAN connection ID, the WAN status, and any WAN errors.

This block is accurate upon login, but it is static; click the Refresh button to update the information.

[Table 7-1, “Device Information parameters” \(p. 72\)](#) describes the fields in the Device Information window.

Table 7-1 Device Information parameters

Field	Description
Device Name	Name on the ONT
Vendor	Name of the vendor
Serial Number	Serial number of the ONT
Hardware version	Hardware version of the ONT
Boot version	Boot version of the ONT
Software version	Software version of the ONT
Chipset	Chipset of the ONT
Device Running Time	Amount of time the device has run since last reset in hours, minutes, and seconds

2

Click Refresh to update the displayed information.

END OF STEPS

7.3.5 LAN status retrieval

1

Select Status > LAN Status from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-3, “LAN status window” \(p. 73\)](#).

Figure 7-3 LAN status window

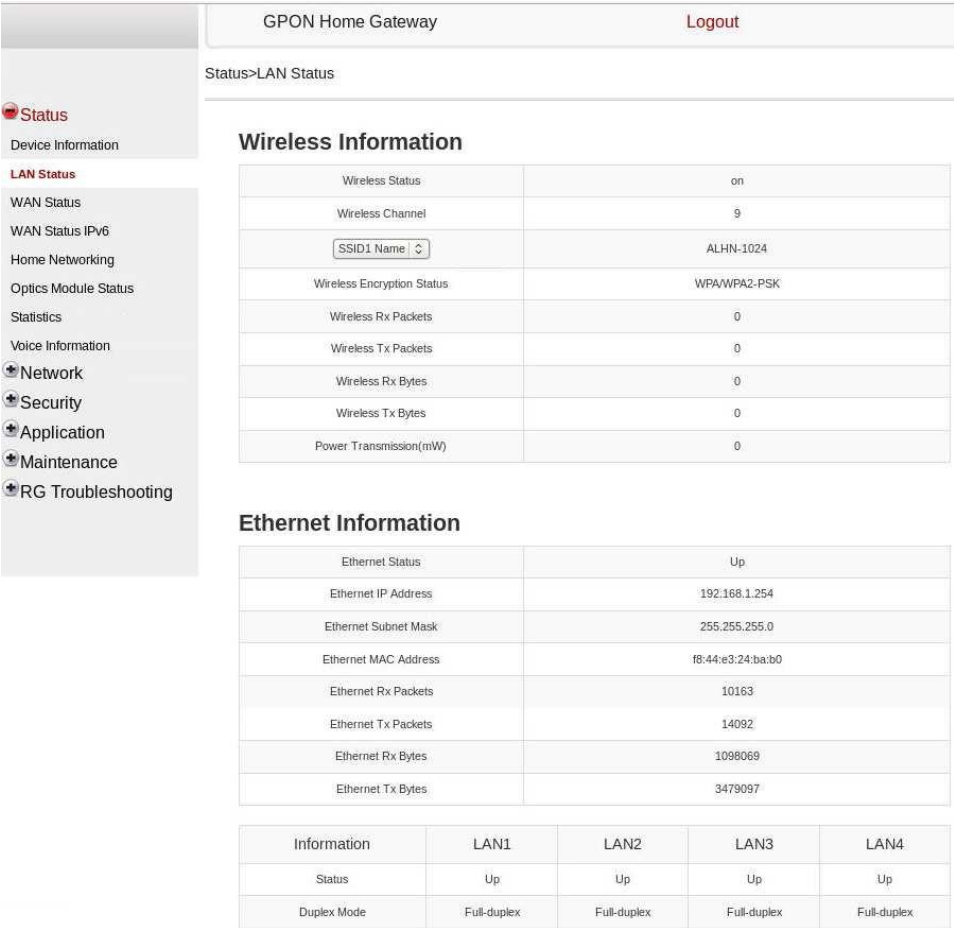


Table 7-2, “LAN status parameters” (p. 73) describes the fields in the LAN status window.

Table 7-2 LAN status parameters

Field	Description
Wireless Information	
Wireless Status	Indicates whether the wireless is on or off
Wireless Channel	Wireless channel number
SSID Name	Name of each SSID
Wireless Encryption Status	Encryption type used on the wireless connection
Wireless Rx Packets	Number of packets received on the wireless connection
Wireless Tx Packets	Number of packets transmitted on the wireless connection

Table 7-2 LAN status parameters (continued)

Field	Description
Wireless Rx Bytes	Number of bytes received on the wireless connection
Wireless Tx Bytes	Number of bytes transmitted on the wireless connection
Power Transmission (mW)	Power of the wireless transmission, in mW
Ethernet Information	
Ethernet Status	Indicates whether the Ethernet connection is on or off
Ethernet IP Address	IP address of the Ethernet connection
Ethernet Subnet Mask	Subnet Mask of the Ethernet connection
Ethernet MAC Address	MAC address of the Ethernet connection
Ethernet Rx Packets	Number of packets received on the Ethernet connection
Ethernet Tx Packets	Number of packets transmitted on the Ethernet connection
Ethernet Rx Bytes	Number of bytes received on the Ethernet connection
Ethernet Tx Bytes	Number of bytes transmitted on the Ethernet connection

2

Click Refresh to update the displayed information.

END OF STEPS

7.3.6 WAN status retrieval

1

Select Status > WAN Status from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-4, "WAN status window" \(p. 75\)](#).

Figure 7-4 WAN status window

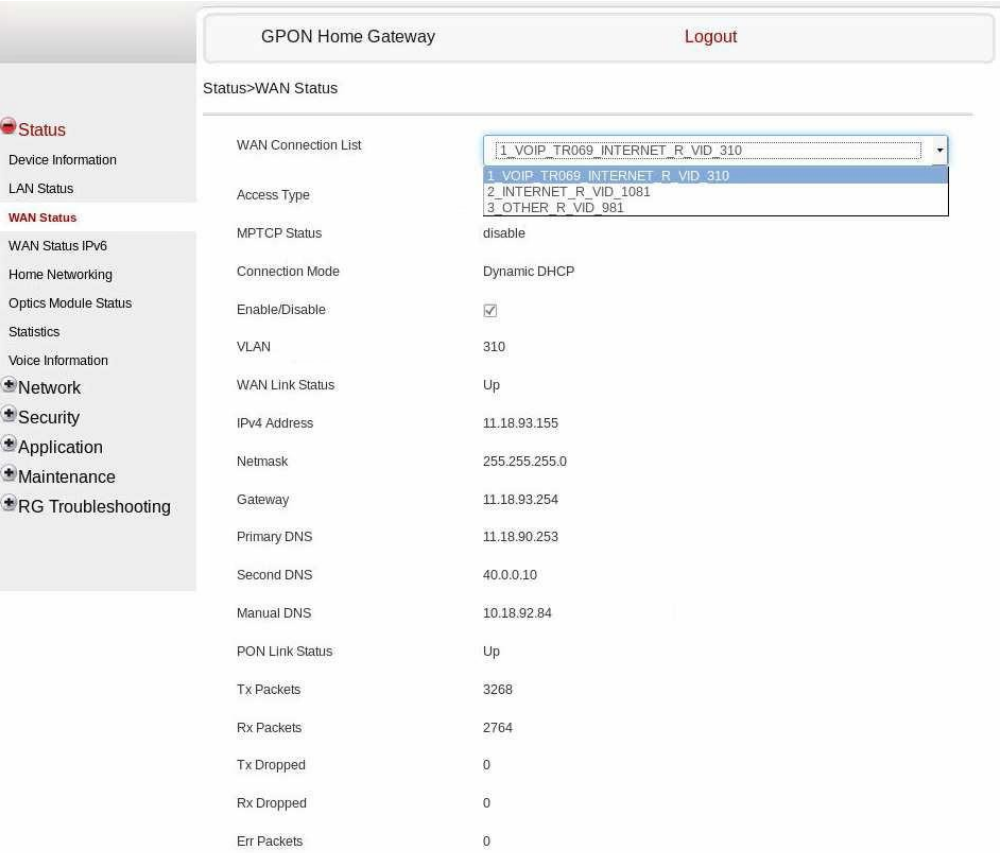


Table 7-3, “WAN status parameters” (p. 75) describes the fields in the WAN status window.

Table 7-3 WAN status parameters

Field	Description
WAN Connection List	Drop-down menu listing all WAN connections. The connection shown is the connection for which WAN status will be shown.
MPTCP Status	Enables or disables the MPTCP status
Connection Mode	Connection mode of the WAN connection
Enable/Disable	Select this checkbox to enable or disable the WAN connection
VLAN	VLAN ID
WAN Link Status	Whether the WAN link is up or down
IPv4 Address	IP Address of the ONT
Netmask	Network mask

Table 7-3 WAN status parameters (continued)

Field	Description
Gateway	Gateway address
Primary DNS	Primary Domain Name Server
Second DNS	Secondary Domain Name Server
Manual DNS	Manual Domain Name Server
PON Link Status	Whether the PON link is up or down
Tx Packets	Number of packets transmitted on the WAN connection
Rx Packets	Number of packets received on the WAN connection
Tx Dropped	Number of packets dropped on the transmit WAN connection
Rx Dropped	Number of packets dropped on the receive WAN connection
Err Packets	Number of errored packets on the WAN connection

2

Click Refresh to update the displayed information.

END OF STEPS

7.3.7 WAN status IPv6 retrieval

1

Select Status > WAN Status IPv6 from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-5, "WAN status IPv6 window" \(p. 77\)](#).

Figure 7-5 WAN status IPv6 window

Status

Device Information

LAN Status

WAN Status

WAN Status IPv6

Home Networking

Optics Module Status

Statistics

Voice Information

Network

Security

Application

Maintenance

RG Troubleshooting

GPON Home Gateway

Logout

Status>WAN Status IPv6

WAN Connection List

1_INTERNET_R_VID_1103

Enable/Disable

☒

VLAN

1103

WAN Link Status

UP

IPv6 address

IPv6 Prefix

2003:1118:93:1006::/64

IPv6 Gateway

fe80::66d1:54ff:fe37:db06

Primary DNS

2003:1118:93::252

Second DNS

2003:1118:93::253

PON Link Status

Up

Tx Packets

26

Rx Packets

29

Tx Dropped

0

Rx Dropped

0

Err Packets

0

Refresh

Table 7-4, “WAN status IPv6 parameters” (p. 77) describes the fields in the WAN status IPv6 window.

Table 7-4 WAN status IPv6 parameters

Field	Description
WAN Connection List	Drop-down menu listing all WAN connections. The connection shown is the connection for which WAN status will be shown.
Enable/Disable	Select this checkbox to enable the WAN connection
VLAN	VLAN ID
WAN Link Status	Whether the WAN link is up or down
IPv6 Address	IPv6 address that identifies the device and its location
IPv6 Prefix	IPv6 prefix
IPv6 Gateway	IPv6 gateway address
Primary DNS	Primary Domain Name Server
Second DNS	Secondary Domain Name Server

Table 7-4 WAN status IPv6 parameters (continued)

Field	Description
PON Link Status	Whether the PON link is up or down
Tx Packets	Number of packets transmitted on the WAN connection
Rx Packets	Number of packets received on the WAN connection
Tx Dropped	Number of packets dropped on the transmit WAN connection
Rx Dropped	Number of packets dropped on the receive WAN connection
Err Packets	Number of errored packets on the WAN connection

2

Click Refresh to update the displayed information.

END OF STEPS

7.3.8 Home networking information retrieval

1

Select Status > Home Networking from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-6, "Home networking information window" \(p. 79\)](#).

Figure 7-6 Home networking information window

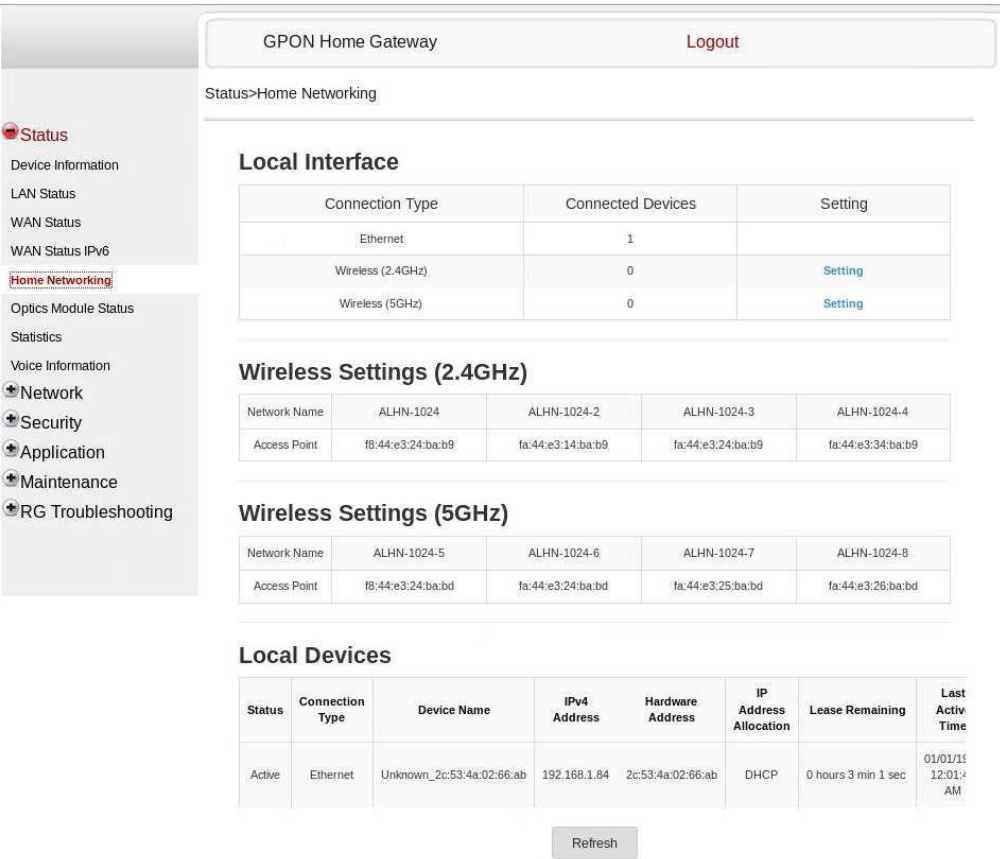


Table 7-5, “Home networking parameters” (p. 79) describes the fields in the Home networking window.

Table 7-5 Home networking parameters

Field	Description
Local Interface	
Ethernet	Table displays the number of Ethernet connections and their settings
Wireless	Table displays the number of wireless connections and their settings (2.4GHz and 5GHz)
Wireless Settings (2.4GHz and 5GHz)	
Network Name	Name of the wireless network
Access Point	Hexadecimal address of the wireless access point
Local Devices	

Table 7-5 Home networking parameters (continued)

Field	Description
Table entry	Each entry indicates the status (active or inactive), connection type, device name, IP address, hardware address, IP address allocation, lease remaining, and last active time of each connected local device.

2

Click Delete to delete a particular local device connection.

3

Click Refresh to update the displayed information.


END OF STEPS

7.3.9 Optics module status retrieval

1

Select Status > Optics Module Status from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-7, “Optics module status window” \(p. 80\)](#).

Figure 7-7 Optics module status window

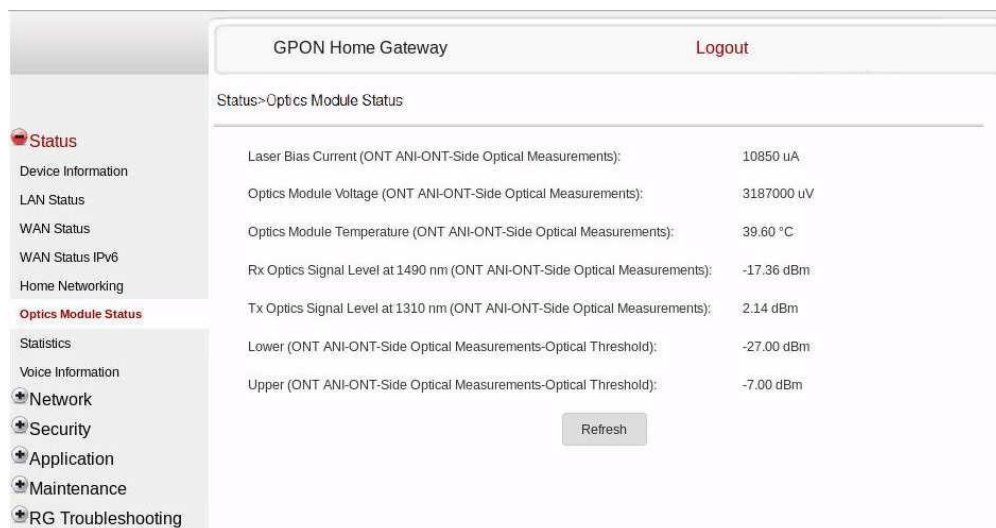

[Table 7-6, “Optics module status parameters” \(p. 81\)](#) describes the fields in the Optics module status window.

Table 7-6 Optics module status parameters

Field	Description
Laser Bias Current (ONT ANI-ONT-Side Optical Measurements)	Laser bias current, measured in uA
Optics Module Voltage (ONT ANI-ONT-Side Optical Measurements)	Optics module voltage, measured in V
Optics Module Temperature (ONT ANI-ONT-Side Optical Measurements)	Optics module temperature, measured in C
Rx Optics Signal Level at 1490 nm (ONT ANI-ONT-Side Optical Measurements)	Received optics signal level at 1490 nm, measured in dBm
Tx Optics Signal Level at 1310 nm (ONT ANI-ONT-Side Optical Measurements)	Transmitted optics signal level at 1310 nm, measured in dBm
Lower (ONT ANI-ONT-Side Optical Measurements-Optical Threshold)	Lower optical threshold, measured in dBm
Upper (ONT ANI-ONT-Side Optical Measurements-Optical Threshold)	Upper optical threshold, measured in dBm

2

Click Refresh to update the displayed information.

END OF STEPS

7.3.10 Statistics retrieval

1

Select Status > Statistics from the top-level menu in the GPON Home Gateway window.
Statistics are available for LAN ports, WAN ports, and WLAN ports.

[Figure 7-8, “LAN ports Statistics window” \(p. 82\)](#) shows the statistics for the LAN ports.

Figure 7-8 LAN ports Statistics window

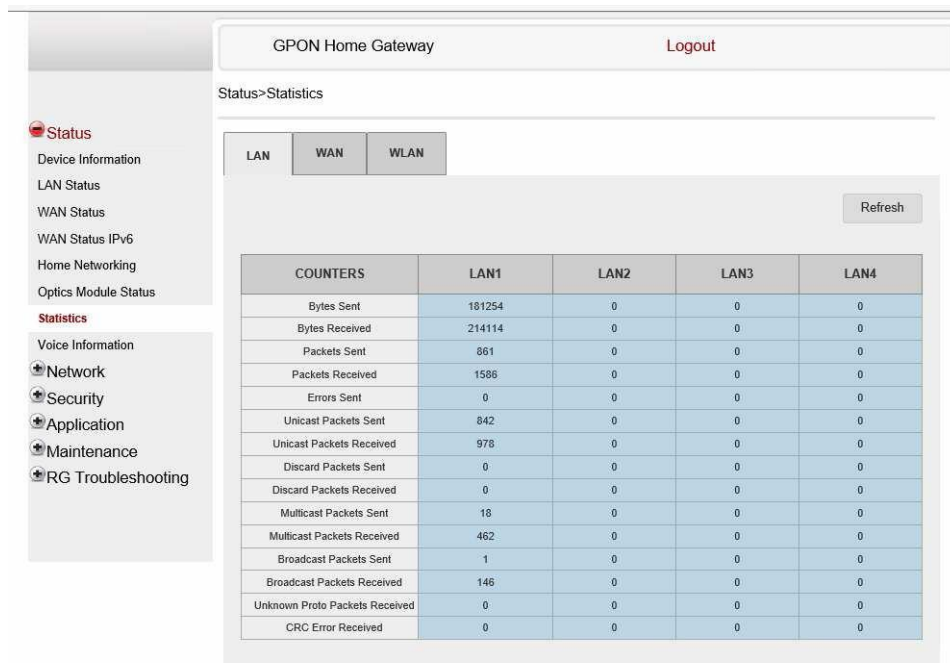


Figure 7-9, “WAN ports statistics window” (p. 83) shows the statistics for the WAN ports.

Figure 7-9 WAN ports statistics window


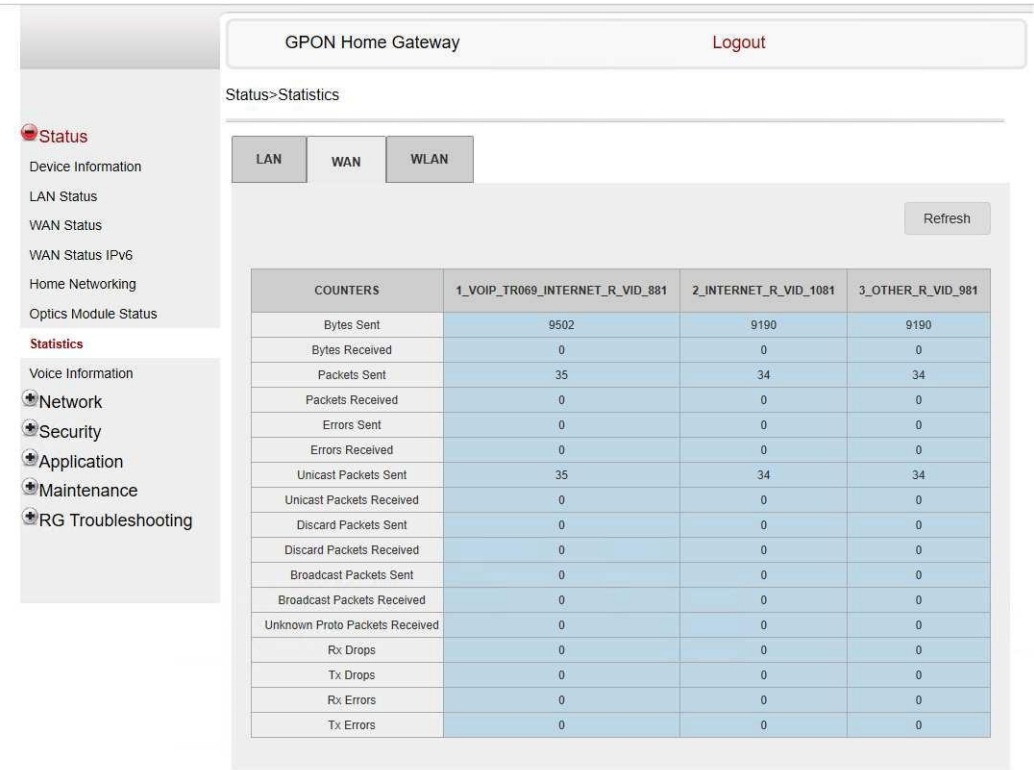


Figure 7-10, “WLAN ports statistics window” (p. 84) shows the statistics for the WLAN ports.

Figure 7-10 WLAN ports statistics window

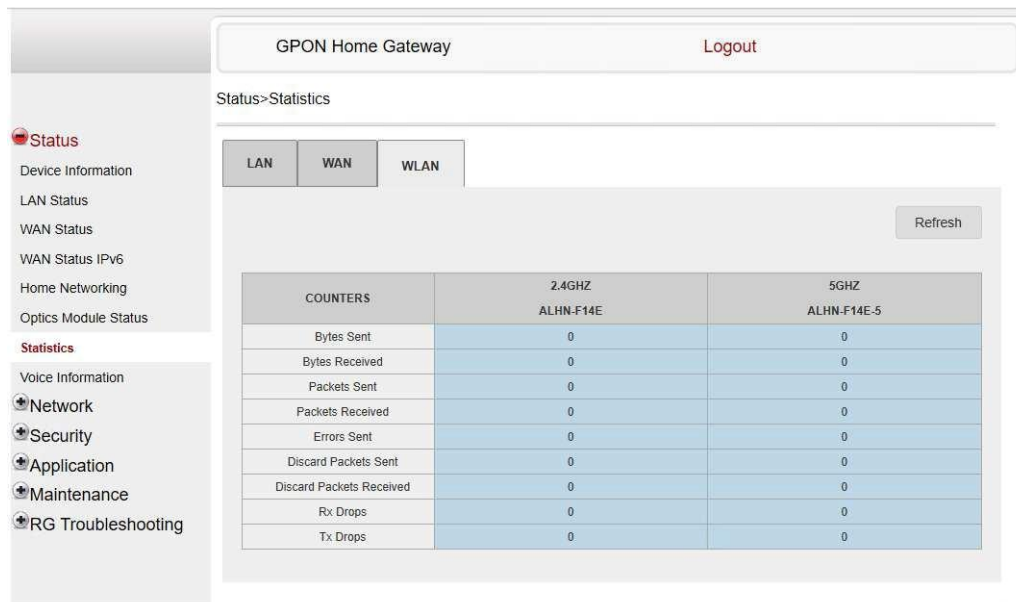

END OF STEPS

7.3.11 Voice information retrieval

1

Select Status > Voice Information from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-11, "Voice Information window" \(p. 85\)](#).

Figure 7-11 Voice Information window

Status

Device Information

LAN Status

WAN Status

WAN Status IPv6

Home Networking

Optics Module Status

Statistics

Voice Information

Network

Security

Application

Maintenance

RG Troubleshooting

GPON Home Gateway

Logout

Status>Voice Information

Line

Line 1

Line Status

Disabled

Soft Switch

Phone Number

Register Status

Register Error Code

Register Error Reason

User Agent IP

11.18.93.155

Refresh

Table 7-7, “Voice Information parameters” (p. 85) describes the fields in the Voice Information window.

Table 7-7 Voice Information parameters

Field	Description
Line	Choose a line from the drop-down menu. The default is Line 1.
Line Status	Depending on the line chosen, the line options are: • Up • Initializing • Registering • Unregistering • Error • Testing • Quiescent • Disabled The default is Disabled
Soft Switch	Proxy IP address; blank if the line is not registered
Phone number	Phone number configured for a telephone line 1; +13290611266
Register Status	The default is Registered Blank if no voice service is provisioned
Register Error Code	SIP standard error code for the register status; for example, 401, 403, 503 This field is blank if the register is set to OK

Table 7-7 Voice Information parameters (continued)

Field	Description
Register Error Reason	SIP standard error reason for the register status This field is blank if the register is set to OK
User Agent IP	IP address of the user agent ExternalIPAddress in WANIPConnection or WANPPPConnection

2

Click Refresh to update the displayed information.

END OF STEPS

7.3.12 Network configuration

The G-2425G-B ONT supports network configuration, including:

- LAN
- LAN IPv6
- WAN
- WAN DHCP
- WiFi 2.4G
- WiFi 5G
- Wireless schedule
- Routing
- DNS
- TR-069
- GRE
- US classifier
- QoS

7.3.13 LAN networking configuration

1

Select Network > LAN from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-12, "LAN network window" \(p. 87\)](#).

Figure 7-12 LAN network window

Status

Network

LAN

LAN_IPV6

WAN

WAN_DHCP

Wireless_2.4GHz

Wireless_5GHz

Wireless_Schedule

IP_Routing

DNS

TR-069

GRE_Tunnel

US_Classifier

QoS_Config

Security

Application

Maintenance

RG_Troubleshooting

GPON Home Gateway

Logout

Network>LAN

Port Mode

All Ports to Bridge Mode

Port1

Port2

Port3

Port4

Route Mode

Route Mode

Route Mode

Route Mode

Save

IPv4 Address

Subnet Mask

DHCP Enable

DHCP Start IP Address

DHCP End IP Address

DHCP Lease Time

Primary DNS

Secondary DNS

192.168.1.254

255.255.255.0

☒

192.168.1.64

192.168.1.253

1440

(2~129600 mins, or 0 means 1 day)mins.

Save

Refresh

Static DHCP Entry

MAC Address

IPv4 Address

Add

MAC Address	IPv4 Address	Delete
-------------	--------------	--------

Table 7-8, “LAN network parameters” (p. 88) describes the fields in the LAN network window.

Table 7-8 LAN network parameters

Field	Description
Port Mode	
All Ports to Bridge Mode	Select this checkbox to set all ports to Bridge mode
Port 1 - 4	Drop-down port mode for each port: Route mode or Bridge mode
IPv4 Address	IP Address of the ONT
Subnet Mask	Subnet mask of the ONT
DHCP enable	Select this checkbox to enable DHCP
DHCP Start IP Address	Starting DHCP IP address
DHCP End IP Address	Ending DHCP IP address
DHCP Lease Time	DHCP lease time (in min)
Primary DNS	Primary DNS identifier
Secondary DNS	Secondary DNS identifier
Static DHCP Entry	
MAC Address	MAC address for the static DHCP
IPv4 Address	IPv4 address for the static DHCP

2 _____

Select the mode for each port.

3 _____

Click Save.

4 _____

Enter the DHCP configuration information.

5 _____

Click Save.

6 _____

Enter the Static DHCP information.

7 _____

Click Add.

You can also use this panel to delete a Static DHCP MAC address or IPv4 address.

END OF STEPS _____

7.3.14 LAN IPv6 networking configuration

- 1
- Select Network > LAN_IPv6 from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-13, “LAN IPv6 network window”](#) (p. 88).

Figure 7-13 LAN IPv6 network window

GPON Home Gateway

Logout

Network>LAN_IPv6

Status

Network

LAN

LAN_IPv6

WAN

WAN DHCP

Wireless (2.4GHz)

Wireless (5GHz)

Wireless Schedule

IP Routing

DNS

TR-069

QoS Config

Security

Application

Maintenance

RG Troubleshooting

IPv6 LAN Host Configuration

DNS Server

HGWProxy

Prefix Config

WANConnection

Interface

DHCPv6 Server Pool

DHCP Start IP Address

0:0:0:2

DHCP End IP Address

0:0:0:255

Whether the address info through DHCP

Whether other info obtained through DHCP

Maximum interval for periodic RA messages

600

seconds

Minimum interval for periodic RA messages

200

seconds

Save/Apply

[Table 7-9, “LAN IPv6 network parameters”](#) (p. 89) describes the fields in the LAN IPv6 network window.

Table 7-9 LAN IPv6 network parameters

Field	Description
IPv6 LAN Host Configuration	
DNS Server	Choose a DNS server from the drop-down menu

Table 7-9 LAN IPv6 network parameters (continued)

Field	Description
Prefix Config	Choose a prefix config option from the drop-down menu, either WANConnection (prefix will be obtained from the WAN) or Static (enables you to enter the prefix).
Interface	This field appears if you selected the Wan Connection option for the "prefix config" field. Choose a WAN connection interface from the drop-down menu.
DHCPv6 Server Pool	
DHCP Start IP Address	Enter the starting DHCP IP address
DHCP End IP Address	Enter the ending DHCP IP address
Whether the address info through DHCP	Select this checkbox to enable address information retrieval through DHCP
Whether other info obtained through DHCP	Select this checkbox to enable retrieval of other information through DHCP
Maximum interval for periodic RA messages	Enter the maximum interval (in seconds) for periodic Router Advertisement messages. The interval range is from 4 to 1800.
Minimum interval for periodic RA messages	Enter the minimum interval (in seconds) for periodic Router Advertisement messages. The interval range is from 4 to 1800.

2 _____
Choose a DNS server, prefix config, and interface.

3 _____
Select or enter the DHCP configuration information.

4 _____
Enter the maximum and minimum intervals for RA messages.

5 _____
Click Save/Apply.

END OF STEPS _____

7.3.15 WAN networking configuration

1 _____
Select Network > WAN from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-14](#), "WAN network window" (p. 91).

Figure 7-14 WAN network window

Status

Network

LAN

LAN_IPv6

WAN

WAN DHCP

Wireless (2.4GHz)

Wireless (5GHz)

Wireless Schedule

IP Routing

DNS

TR-069

GRE Tunnel

US Classifier

QoS Config

Security

Application

Maintenance

RG Troubleshooting

GPON Home Gateway

Logout

Network>WAN

WAN Connection List

1_VOIP_TR069_INTERNET_R_VID_881

Connection Type

☒IPoE ☐PPPoE

IP mode

IPv4

Enable/Disable

☒

NAT

☒

Service

☒VOIP ☒TR-069 ☒INTERNET ☐IPTV

Enable VLAN

☒

VLAN ID

881

VLAN PRI

0

WAN IP Mode

DHCP

Manual DNS

Save

Delete

Table 7-10, “WAN network parameters” (p. 91) describes the fields in the WAN network window.

Table 7-10 WAN network parameters

Field	Description
WAN Connection List	Choose a WAN connection from the drop-down menu to set the connection parameters
Connection Type	Choose a connection type: IPoE or PPPoE
IP mode	Choose an IP mode from the drop-down menu: IPv4 or IPv6
Enable/Disable	Select this checkbox to enable the WAN connection
NAT	Select this checkbox to enable NAT
Service	Select the checkboxes to enable service types for this connection
Enable VLAN	Select this checkbox to enable VLAN
VLAN ID	Enter the VLAN ID
VLAN PRI	Enter the VLAN PRI
WAN IP Mode	Choose an IP mode from the drop-down menu
Manual DNS	Manual Domain Name Server

- 2
- Configure a specific WAN connection.

3

Click Save.

END OF STEPS

7.3.16 WAN DHCP configuration

1

Select Network > WAN DHCP from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-15, “WAN DHCP window”](#) (p. 91).

Figure 7-15 WAN DHCP window

[Table 7-11, “WAN DHCP parameters”](#) (p. 92) describes the fields in the WAN DHCP window.

Table 7-11 WAN DHCP parameters

Field	Description
WAN Connection List	Choose a WAN connection from the drop-down menu
DHCP Option 50 Persistent	Select this checkbox to enable DHCP Option 50 persistent
Enable DHCP Option 60	Select this checkbox to enable DHCP Option 60 (vendor class identifier)
Enable DHCP Option 61	Select this checkbox to enable DHCP Option 61 (client identifier)
Enable DHCP Option 77	Select this checkbox to enable DHCP Option 77

Table 7-11 WAN DHCP parameters (continued)

Field	Description
Enable DHCP Option 90	Select this checkbox to enable DHCP Option 90

2 _____
Configure a WAN DHCP option.

3 _____
Click Save.

END OF STEPS _____

7.3.17 WiFi 2.4GHz networking configuration

1 _____
Select Network > WiFi 2.4GHz from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-16, "WiFi 2.4GHz network window" \(p. 94\)](#).

Figure 7-16 WiFi 2.4GHz network window

GPON Home Gateway

Logout

Network>Wireless (2.4GHz)

Status

Network

LAN

LAN_IPv6

WAN

WAN_DHCP

Wireless (2.4GHz)

Wireless (5GHz)

Wireless Schedule

IP Routing

DNS

TR-069

GRE Tunnel

US Classifier

QoS Config

Security

Application

Maintenance

RG Troubleshooting

Enable☒

Mode

auto(b/g/n)

Bandwidth

20MHz

Channel

Auto

Transmitting Power

100%

WMM

Enable

Total MAX Users

32

SSID Configuration

SSID Select

SSID1

SSID Name

ALHN-1212

Enable SSID

Enable

SSID Broadcast

Enable

Port Mode

Route

MAX Users

32

Encryption Mode

WPA/WPA2 Personal

WPA Version

WPA/WPA2

WPA Encryption Mode

TKIP/AES

WPA Key

.....

Show password

Disable

Save

Refresh

Table 7-12, “WiFi 2.4GHz network parameters” (p. 94) describes the fields in the WiFi 2.4GHz network window.

Table 7-12 WiFi 2.4GHz network parameters

Field	Description
Enable	Select this checkbox to enable WiFi

Table 7-12 WiFi 2.4GHz network parameters (continued)

Field	Description
Mode	Choose a Wi-Fi mode from the drop-down menu: • auto (b/g/n) • b • g • n • b/g • g/n
Bandwidth	Choose from: • 20 MHz • 40 MHz • 20/40 MHz
Channel	Choose a channel from the drop-down menu or choose Auto to have the channel automatically assigned
Transmitting Power	Choose a percentage for the transmitting power from the drop-down menu: • Low (25%) • Medium (50%) • High (75%) • Maximum (100%)
WMM	Choose Enable or Disable from the drop-down menu to enable or disable WiFi multi-media
Total MAX Users	Enter the number of total MAX users
SSID Configuration	
SSID Select	Choose the SSID from the drop-down menu
SSID Name	Enter the SSID name
Enable SSID	Enable or disable SSID from this drop-down menu
SSID Broadcast	Enable or disable SSID broadcast from this drop-down menu
Port Mode	Select a port mode from the drop-down menu. Route is the default.
MAX Users	Enter the number of MAX users
Encryption Mode	Choose an encryption mode from the drop-down menu: • OPEN • WEP • WPA/WPA2 Personal • WPA/WPA2 Enterprise
WPA Version	Choose a WPA version from the drop-down menu: • WPA1 • WPA2 • WPA1/WPA2

Table 7-12 WiFi 2.4GHz network parameters (continued)

Field	Description
WPAEncryption Mode	Choose a WPA encryption mode from the drop-down menu: • TKIP • AES • TKIP/AES
WPAKey	Enter the WPA key
Enable WPS	Choose Enable or Disable WPS from this drop-down menu
WPS Mode	Choose a WPS mode from the drop-down menu: PBC (Push Button Connect) or PIN (Personal Identification Number)

2 _____
Configure the WiFi connection.

3 _____
If you have enabled and configured WPS, click WPS connect.

4 _____
Click Save.

END OF STEPS _____

7.3.18 WiFi 5GHz networking configuration

1 _____
Select Network > WiFi 5GHz from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-17, "WiFi 5GHz network window" \(p. 97\)](#).

Figure 7-17 WiFi 5GHz network window

Status

Network

LAN

LAN_IPv6

WAN

WAN_DHCP

Wireless (2.4GHz)

Wireless (5GHz)

Wireless Schedule

IP Routing

DNS

TR-069

GRE Tunnel

US Classifier

QoS Config

Security

Application

Maintenance

RG Troubleshooting

GPON Home Gateway

Logout

Network>Wireless (5GHz)

Enable

☒

Bandwidth

80MHz

Channel

Auto

Transmitting Power

100%

WMM

Enable

Total MAX Users

32

SSID Configuration

SSID Select

SSID5

SSID Name

ALHN-1212-5

Enable SSID

Enable

SSID Broadcast

Enable

Port Mode

Route

MAX Users

32

Encryption Mode

WPA2-AES

WPA Key

••••••••

☐ Show password

Enable WPS

Disable

Save

Refresh

Table 7-13, “WiFi 5GHz network parameters” (p. 97) describes the fields in the WiFi 5GHz network window.

Table 7-13 WiFi 5GHz network parameters

Field	Description
Enable	Select this checkbox to enable WiFi
Bandwidth	Choose from: • 20 MHz • 40 MHz • 80 MHz
Channel	Choose a channel from the drop-down menu or choose Auto to have the channel automatically assigned

Table 7-13 WiFi 5GHz network parameters (continued)

Field	Description
Transmitting Power	Choose a percentage for the transmitting power from the drop-down menu: • Low (20%) • Medium (40%) • High (60%) • Maximum (100%)
WMM	Choose Enable or Disable from the drop-down menu to enable or disable WiFi multi-media
Total MAX Users	Enter the total number of MAX users
SSID Configuration	
SSID Select	Choose the SSID from the drop-down menu
SSID Name	Change the name of the selected SSID
Enable SSID	Choose Enable or disable SSID from this drop-down menu
SSID Broadcast	Choose Enable or disable SSID broadcast from this drop-down menu
Port Mode	Select a port mode from the drop-down menu. Route is the default.
MAX Users	Enter the number of MAX users
Encryption Mode	Choose an encryption mode from the drop-down menu: • OPEN • WEP • WPA/WPA2 Personal • WPA/WPA2 Enterprise
WPAKey	Enter the WPA key
Enable WPS	Choose Enable or Disable WPS from this drop-down menu
WPS Mode	Choose a WPS mode from the drop-down menu: PBC (Push Button Connect) or PIN (Personal Identification Number)

2 _____
Configure the WiFi connection.

3 _____
If you have enabled and configured WPS, click WPS connect.

4 _____
Click Save.


END OF STEPS _____

7.3.19 Wireless scheduling

1

Select Network > Wireless Schedule from the top-level menu in the GPON Gateway window, as shown in [Figure 7-18, “Wireless Schedule window”](#) (p. 98).

Figure 7-18 Wireless Schedule window

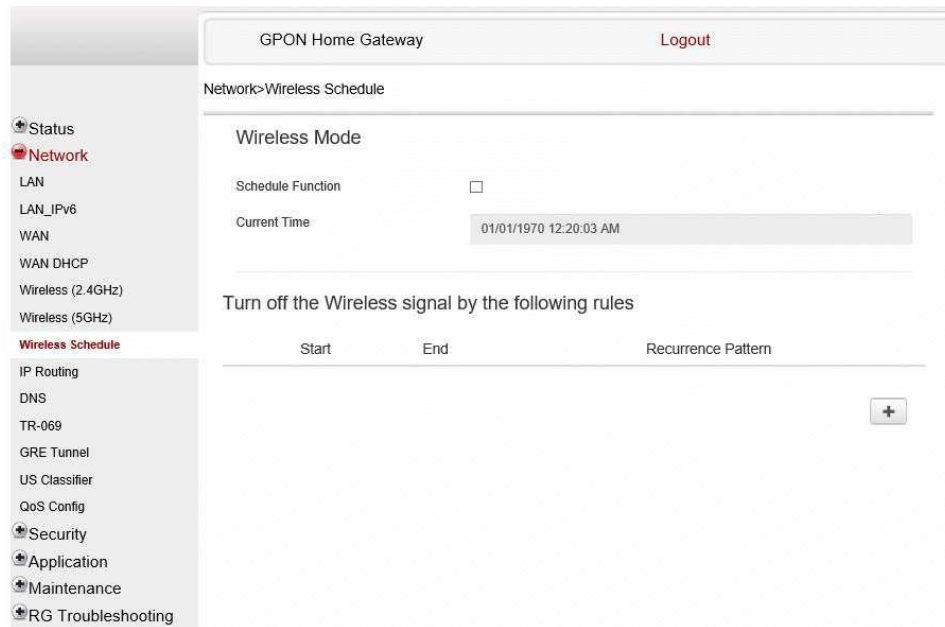

2

Select the Schedule Function checkbox to turn the wireless signal off for the configured period.

3

Click the plus sign (+) to add a scheduling rule.

A separate panel displays for configuring wireless schedule rules.

4

Enter a start time and end time for the period in which you want the wireless signal off.

5

Choose Everyday or Individual Days from the drop-down menu.

6

If you chose Individual Days, select the checkboxes for the desired days.

The Recurrence Pattern shows the rules created to date.

7

If desired, click the plus sign (+) to add more rules.

8

Click Save Changes.

END OF STEPS

7.3.20 IP Routing configuration

1

Select Network > IP Routing from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-19, “IP Routing network window”](#) (p. 99).

Figure 7-19 IP Routing network window

GPON Home Gateway Logout

Network>IP Routing

Enable Routing ☒

Destination IP Address

Destination Netmask

Gateway

IPv4 Interface

Forwarding Policy Help

ID	Source MAC	Source MAC Exclude	Protocol	Protocol Exclude	Source Port	Source Max	SExclude	Dest Port	Dest Max	DExclude	Source IP	Source IP Mask	SExclude	Dest IP

Add

IP Routing Table

Destination IP Address	Destination Netmask	Gateway	Interface	Forwarding Policy	Enable	Delete

Refresh

[Table 7-14, “IP Routing network parameters”](#) (p. 101) describes the fields in the IP Routing network window.

Table 7-14 IP Routing network parameters

Field	Description
Enable Routing	Select this checkbox to enable routing
Destination IP Address	Enter the destination IP address
Destination Netmask	Enter the destination network mask
Gateway	Enter the gateway address
IPv4 Interface	Choose a WAN connection previously created in the WAN network window from the drop-down menu
Forwarding Policy	Choose a forwarding policy from the drop-down menu

2 _____
Enter the IP routing information.

3 _____
Click Add.

END OF STEPS _____

7.3.21 DNS configuration

1 _____
Select Network > DNS from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-20, “DNS network window” \(p. 102\)](#).

Figure 7-20 DNS network window

GPON Home Gateway

Logout

Network>DNS

DNS Proxy

☒Enabled

Save

Domain Name

IPv4 Address

Add

Origin Domain

New Domain

Add

Domain Name	New Domain	IPv4 Address	Delete
dsdevice.lan		192.168.1.254	Delete

Origin Domain	New Domain	Delete
---------------	------------	--------

Refresh

Table 7-15, “DNS network parameters” (p. 102) describes the fields in the DNS network window.

Table 7-15 DNS network parameters

Field	Description
DNS Proxy	Select the Enabled checkbox to enable DNS proxy
Domain Name	Domain name
IPv4 Address	Domain IP address
Origin Domain	Origin domain name
New Domain	New domain name

- 2

Select the Enabled checkbox and click Save to enable DNS proxy.
- 3

Enter the domain name and IPv4 address and click Add.

4

If required, associate an origin domain with a new domain, click Add.

END OF STEPS

7.3.22 TR-069 configuration

1

Select Network > TR-069 from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-21, “TR-069 network window”](#) (p. 102).

Figure 7-21 TR-069 network window

GPON Home Gateway Logout

Network>TR-069

Periodic Inform Enable ☒

Periodic Inform Interval(s) 5

URL https://acsgpon.alu.net

Username AdminGPON

Password

Connect Request Username ilms

Connect Request Password

Save Refresh

[Table 7-16, “TR-069 network parameters”](#) (p. 103) describes the fields in the TR-069 network window.

Table 7-16 TR-069 network parameters

Field	Description
Periodic Inform Enable	Select this checkbox to enable periodic inform updates
Periodic Inform Interval(s)	Time between periodic inform updates, in seconds
URL	URL of the auto-configuration server
Username	Username used to log in to the auto-configuration server
Password	Password used to log in to the auto-configuration server

Table 7-16 TR-069 network parameters (continued)

Field	Description
Connect Request Username	Username used to log in to the ONT
Connect Request Password	Password used to log in to the ONT

2 _____
Configure TR-069 by entering the required information.

3 _____
Click Save.

END OF STEPS _____

7.3.23 GRE Tunnel configuration

i **Note:** This feature is available to admin users (super users) only.

1 _____
Select Network > GRE Tunnel from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-22, “GRE Tunnel window” \(p. 104\)](#).

Figure 7-22 GRE Tunnel window

The screenshot shows the 'GPON Home Gateway' window with a 'Logout' button. The left sidebar contains a menu with items: Status, Network (selected), LAN, LAN_IPV6, WAN, WAN_DHCP, Wireless (2.4GHz), Wireless (5GHz), Wireless Schedule, IP Routing, DNS, TR-069, GRE Tunnel (highlighted), US Classifier, QoS Config, Security, Application, Maintenance, and RG Troubleshooting. The main content area is titled 'Network>GRE Tunnel' and contains the following fields:

- Tunnel Name: Create new GRE Tunnel (dropdown menu)
- WAN Interface: 1_TR069_INTERNET_R_VID_41 (dropdown menu)
- Primary Remote End: (text input field)
- Secondary Remote End: (text input field)
- Connected Remote End: (text input field)
- Connectivity Check: ☒
- Traffic timeout to start pings: 10 (text input field, with range (2 ~ 1024)seconds below)
- No. of retries before unreachable: 3 (text input field, with range (0 ~ 100)times below)

At the bottom right of the form are 'Save' and 'Delete' buttons.

Table 7-17, “GRE Tunnel parameters” (p. 105) describes the fields in the GRE Tunnel window.

Table 7-17 GRE Tunnel parameters

Field	Description
Tunnel Name	Choose Create new GRE Tunnel, or Choose an existing tunnel from the drop-down menu. The tunnel name is automatically assigned by the system. Up to 4 GRE tunnels are supported.
WAN Interface	Choose a WAN interface from the drop-down menu. GRE tunnels can only be created on HSI-enabled WAN interfaces.
Primary Remote End Secondary Remote End (optional)	Enter an IP address or FQDN that is unique in the system. If the primary remote endpoint is down or unreachable, the secondary remote endpoint becomes active, if configured. The secondary remote endpoint remains active until it becomes unreachable, in which case the primary remote endpoint becomes active again. Revertive mode is not supported. If both endpoints are unreachable, the GRE tunnel is declared down.
Connected Remote End	This field displays the current data traffic path for the GRE tunnel.
Connectivity check	This feature is automatically selected by the system.
Traffic timeout to start pings	Enter the traffic timeout in seconds (2 to 1024).
No. of retries before unreachable	Enter the number of retries before the tunnel is declared down (0 to 100).

2

Configure the GRE tunnel by entering or selecting the required information.

3

Click Save.

END OF STEPS

7.3.24 Upstream (US) Classifier configuration

The US Classifier feature is used to create policies, classifiers, and classifier rules for upstream traffic handling. This feature is available to admin users (super users) only.

A policy defines an action to be performed on a set of LAN or WAN packets. A policy can be created at any time and then subsequently assigned to one or more classifiers.

A classifier is used to select key fields for which the classifier rules will be written. A classifier can be created at any time and then subsequently assigned to one or more classifier rules.

A classifier rule is used to assign actions to a group of packets based on a set of parameters. A classification rule must be created against a pre-defined classifier.

Up to 16 policies can be created, with up to 8 classifiers and 32 classifier rules.

1

Select Network > US Classifier from the top-level menu in the GPON Home Gateway window, and select the Policy tab, as shown in [Figure 7-23, "US Classifier Policy window" \(p. 106\)](#).

All classifier policies are displayed in the policy table in the window.

Figure 7-23 US Classifier Policy window

Table 7-18, “US Classifier Policy parameters” (p. 106) describes the fields in the US Classifier Policy window.

Table 7-18 US Classifier Policy parameters

Field	Description
Tunnel Type	The tunnel type is set to GRE and cannot be modified.
Tunnel Interface	Choose a tunnel interface from the drop-down menu: No Tunnel, GRE Tunnel, or LAN traffic.
VLAN ID	Enter a VLAN ID (0-4094).
VLAN Tag	This field is not configurable. The VLAN tag is set to 8100 (hexadecimal).
VLAN Priority	Enter a VLAN priority level (0 to 7). A lower number indicates a higher priority.
IP TOS/DSCP	This field is not configurable. All tunnel packets are generated with a default DSCP value (usually 0).
Drop	Select this checkbox to drop the packets.

2

Select a tunnel interface.

- 3

Enter a VLAN ID and priority level.
- 4

Click Save.
- 5

To delete a policy, click the Delete option for the applicable policy in the policy table.

A policy can only be deleted if it is not associated with any classifier rules.
- 6

Select Network > US Classifier from the top-level menu in the GPON Home Gateway window, and select the Classifier tab, as shown in [Figure 7-24, “US Classifier window” \(p. 106\)](#).

All classifiers are displayed in the classifier table in the window.

Figure 7-24 US Classifier window

GPON Home Gateway

Logout

Network>US Classifier

Status

Network

LAN

LAN_IPv6

WAN

WAN DHCP

Wireless (2.4GHz)

Wireless (5GHz)

Wireless Schedule

IP Routing

DNS

TR-069

GRE Tunnel

US Classifier

QoS Config

Security

Application

Maintenance

RG Troubleshooting

[+] Policy

[-] Classifier

Interface

NONE

Source MAC

Destination MAC

Source IP

Destination IP

Source Port

Destination Port

Protocol

Priority

1

Save

Reset

Name	Interface	Source MAC	Destination MAC	Source IP	Destination IP	Source Port	Destination Port	Protocol	Priority	No. of Rules	Delete
------	-----------	------------	-----------------	-----------	----------------	-------------	------------------	----------	----------	--------------	--------

Refresh

<

>

[+] Classifier Rules

[Table 7-19, “US Classifier parameters” \(p. 108\)](#) describes the fields in the US Classifier window.

July 2020
Issue 3

3FE-48293-ACAA-TCZZA

107

Table 7-19 US Classifier parameters

Field	Description
Interface	Choose an interface from the drop-down menu; for example, None, LAN, 2.4G SSID, or 5G SSID.
Source MAC	Click to enter a source MAC
Destination MAC	Click to enter a destination MAC
Source IP	Click to enter a source IP
Destination IP	Click to enter a destination IP
Source Port	Click to enter a source port
Destination Port	Click to enter a destination port
Protocol	Click to enter a protocol
Priority	Choose a priority level from 1 to 8. The lower the number, the higher the priority. No more than 1 classifier can be created with the same priority.

7

Configure the US classifier.

At least one field must be selected to create a classifier. A maximum of four fields may be selected to create a classifier; this includes the interface field.

8

Click Save.

9

To delete a classifier, click the Delete option for the applicable classifier in the classifier table. A classifier can only be deleted if it is not associated with any classifier rules.

10

Select the Classifier Rules tab, as shown in [Figure 7-25, “US Classifier Rules window”](#) (p. 109). All classifier rules are displayed in the classifier rules table in the window.

Figure 7-25 US Classifier Rules window

The screenshot displays the 'US Classifier Rules' configuration window. On the left is a sidebar with navigation links: Status, Network (selected), LAN, LAN IPv6, WAN, WAN DHCP, Wireless (2.4GHz), Wireless (5GHz), Wireless Schedule, IP Routing, DNS, TR-069, GRE Tunnel, US Classifier (highlighted), QoS Config, Security, Application, Maintenance, and RG Troubleshooting. The main area is titled 'GPON Home Gateway' with a 'Logout' link. Below the title is 'Network>US Classifier'. The configuration section includes: '[+] Policy', '[+] Classifier', and '[-] Classifier Rules'. Fields for configuration are: Policy (dropdown), Classifier (dropdown), Interface (dropdown), Source MAC (text input), Destination MAC (text input), Source IP (text input), Destination IP (text input), Source Port (text input), Destination Port (text input), and IP Protocol Type (text input with '(0 - 254)' hint). 'Save' and 'Reset' buttons are present. Below is a table with 11 columns: Name, Interface, Source MAC, Destination MAC, Source IP, Destination IP, Source Port, Destination Port, IP Protocol, Policy, Classifier, and Delete. A 'Refresh' button is at the bottom right of the table area.

Table 7-20, “US Classifier Rules parameters” (p. 109) describes the fields in the US Classifier Rules window.

Table 7-20 US Classifier Rules parameters

Field	Description
Policy	Choose a policy from the drop-down menu
Classifier	Choose a classifier from the drop-down menu
Interface	Choose an interface from the drop-down menu; for example, None, LAN, 2.4G SSID, 5G SSID.
Source MAC	Enter a source MAC
Destination MAC	Enter a destination MAC
Source IP	Enter a source IP
Destination IP	Enter a destination IP
Source Port	Enter a source port
Destination Port	Enter a destination port
IP Protocol Type	Enter a value between 0 and 254

-
- 11** _____
Configure the classifier rule.
- 12** _____
Click Save.
- 13** _____
To delete a classifier rule, click the Delete option for the applicable classifier rule in the classifier rules table.
- END OF STEPS** _____

7.3.25 QoS configuration

- 1** _____
Select Network > QoS Config from the top-level menu in the Home Gateway window.
[Figure 7-26, “QoS Config window \(L2\)” \(p. 109\)](#) shows the window for configuring QoS L2 (Layer 2 packet sizes).

Figure 7-26 QoS Config window (L2)

Status

Network

LAN

LAN_IPv6

WAN

WAN_DHCP

Wireless_2.4GHz

Wireless_5GHz

Wireless_Schedule

IP_Routing

DNS

TR-069

GRE_Tunnel

US_Classifier

QoS_Config

Security

Application

Maintenance

RG_Troubleshooting

GPON Home Gateway

Logout

Network>QoS Config

QoS Setting

ID	Source MAC	Source MAC Exclude	Protocol	Protocol Exclude	Source Port	Source Max	SExclude	Dest Port	Dest Max	DExclude
----	------------	--------------------	----------	------------------	-------------	------------	----------	-----------	----------	----------

Type

L2 Criteria

Classification Criteria

Source MAC

Exclude

Interface

select an option

Classification Result

DSCP Remark:

(Range: 0~63)

802.1p Remark:

(Range: 0~7)

Forwarding Policy:

(Range: 1~7)

Add

Figure 7-27, “QoS Config window (L3)” (p. 112) shows the window for configuring QoS L3 (Layer 3 packet sizes).

Figure 7-27 QoS Config window (L3)

GPON Home Gateway
Logout

Status

Network

LAN

LAN_IPv6

WAN

WAN DHCP

Wireless (2.4GHz)

Wireless (5GHz)

Wireless Schedule

IP Routing

DNS

TR-069

GRE Tunnel

US Classifier

QoS Config

Security

Application

Maintenance

RG Troubleshooting

Network>QoS Config

QoS Setting

ID	Source MAC	Source MAC Exclude	Protocol	Protocol Exclude	Source Port	Source Max	SExclude	Dest Port	Dest Max	DExclude

Type L3 Criteria

Classification Criteria

Protocol None Exclude ☐

Application Customer setting

Source Ip Source Ip Mask Exclude ☐

Dest Ip Dest Ip Mask Exclude ☐

Source Port Source Port Max Exclude ☐

Dest Port Dest Port Max Exclude ☐

DSCP 802.1p

(Range:0~63) (Range:0~7)

Interface select an option

Classification Result

DSCP Remark: 802.1p Remark:

(Range:0~63) (Range:0~7)

Forwarding Policy:

(Range:1~7)

Add

Table 7-21, “QoS Config parameters” (p. 113) describes the fields in the QoS Config window.

Table 7-21 QoS Config parameters

Field	Description
QoS Setting	
Type	Choose a QoS service layer type from the drop-down menu L2 or L3.
Classification Criteria	
Source MAC	Enter the source MAC Select the Exclude checkbox to exclude the source MAC
Interface	Choose an interface from the drop-down menu
Classification Result	
DSCP Remark	Enter the value for the DSCP mark (range: 0-63); valid only for L3 Criteria
802.1p Remark	Enter the value for the 802.1p (range: 0-7)
Forwarding Policy	Enter the number for the forwarding policy (range: 1-7)
Additional fields for L3	
Protocol	Choose a protocol from the drop-down menu, or select the Exclude checkbox
Application	Choose an application from the drop-down menu
Source IP and Source IP Mask	Enter the values for the source IP and IP mask, or select the Exclude checkbox
Destination IP and Destination IP Mask	Enter the values for the destination IP and IP mask, or select the Exclude checkbox
Source Port and Source Port Max	Enter the values for the source port and port max (highest port number) or select the Exclude checkbox
Destination Port and Destination Port Max	Enter the values for the destination port and port max (highest port number), or select the Exclude checkbox

2 _____

Choose a QoS type from the drop-down menu: L2 or L3.

3 _____

Configure a QoS policy.

4 _____

Click Add to add a QoS policy.

END OF STEPS _____

7.3.26 Security configuration

The G-2425G-B ONT supports security configuration, including:

- firewall
- MAC filter

- IP filter
- URL filter
- parental control
- DMZ and ALG
- access control

7.3.27 Firewall configuration

1

Select Security > Firewall from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-28, “Firewall window”](#) (p. 113).

Figure 7-28 Firewall window

Three security levels are available: High, Low, and Off.

High—Traffic denied inbound and minimally permit common services outbound Low—All outbound traffic and pinhole-defined inbound traffic is allowed Off—All inbound and outbound traffic is allowed

[Table 7-22, “Firewall parameters”](#) (p. 114) describes the fields in the firewall window.

Table 7-22 Firewall parameters

Field	Description
Security level	Choose the security level from the drop-down menu: High, Low, or Off
Attack Protect (Protection against DoS or DDoS attacks)	Choose enable or disable attack protect from the drop-down menu The default is Enable

2 _____
Configure the firewall.

3 _____
Click Save.

END OF STEPS _____

7.3.28 MAC filter configuration

1 _____
Select Security > Mac Filter from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-29, “MAC filter window”](#) (p. 114).

Figure 7-29 MAC filter window

GPON Home Gateway

Logout

Security>MAC Filter

Status

Network

Security

Firewall

MAC Filter

IP Filter

URL Filter

Parental Control

DMZ and ALG

Access Control

Application

Maintenance

RG Troubleshooting

Ethernet Interface

MAC Filter Mode

Allowed

LAN Port

☐ LAN1 ☐ LAN2 ☐ LAN3 ☐ LAN4

MAC Address

Custom settings

e.g. D0:54:2D:00:00:00

Save

Mac Address	Delete
-------------	--------

Refresh

Wi-Fi SSID

MAC Filter Mode

Allowed

SSID Select

SSID1

Enable

☐

MAC Address

Custom settings

e.g. D0:54:2D:00:00:00

Save

Mac Address	Delete
-------------	--------

Refresh

[Table 7-23, “MAC filter parameters”](#) (p. 116) describes the fields in the MAC filter window.

Table 7-23 MAC filter parameters

Field	Description
Ethernet Interface	
MAC Filter Mode	Choose the MAC filter mode from the drop-down menu: Blocked or Allowed
LAN Port	LAN port range
MAC Address	Choose the MAC address from the drop-down menu or enter the address in the text field
Wi-Fi SSID	
MAC Filter Mode	Choose the MAC filter mode from the drop-down menu: Blocked or Allowed
SSID Select	Choose the SSID from the drop-down menu
Enable	Select this checkbox to enable the MAC filter
MAC Address	Choose a MAC address from the drop-down menu or enter the address in the text field

2 _____

Click Refresh to update the information.

3 _____

Configure a MAC filter.

4 _____

Click Add.

END OF STEPS _____

7.3.29 IP filter configuration

1 _____

Select Security > IP filter from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-30, "IP filter window" \(p. 117\)](#).

Figure 7-30 IP filter window

GPON Home Gateway

Logout

Status

Network

Security

Firewall

MAC Filter

IP Filter

URL Filter

Parental Control

DMZ and ALG

Access Control

Application

Maintenance

RG Troubleshooting

Security>IP Filter

Enable IP Filter

☐

Mode

Drop for upstream

Internal Client

Custom settings

Local IP Address

Source Subnet Mask

Remote IP Address

Destination Subnet Mask

Protocol

ALL

Mode

Internal Client

Protocol

Local IP Address

Source Subnet Mask

Remote IP Address

Destination Subnet Mask

Wan Port Range

Lan Port Range

Delete

Save

Refresh

Table 7-24, “IP filter parameters” (p. 117) describes the fields in the IP filter window.

Table 7-24 IP filter parameters

Field	Description
Enable IP Filter	Select this checkbox to enable an IP filter
Mode	Choose an IP filter mode from the drop-down menu: - Drop for upstream - Drop for downstream
Internal Client	Choose an internal client from the drop-down menu: - Customer setting - uses the IP address input below - IP - uses the connecting devices' IP to the ONT
Local IP Address	Local IP address
Source Subnet Mask	Source subnet mask
Remote IP Address	Remote IP address
Destination Subnet Mask	Destination subnet mask
Protocol	Choose an application protocol or all from the drop-down menu

2 _____
Configure the IP filter.

3

Click Add.

END OF STEPS

7.3.30 URL filter configuration

1

Select Security > URL Filter from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-31, “URL Filter window”](#) (p. 117).

Figure 7-31 URL Filter window

Note: You cannot use URL filtering for HTTPS. The URL is encrypted when using HTTPS. [Table 7-25, “URL Filter parameters”](#) (p. 118) describes the fields in the URL Filter window.

Table 7-25 URL Filter parameters

Field	Description
Enable URL filter	Select the checkbox to enable the URL filter
URL filter type	Select the radio button to block the URL or allow the URL
URL List	
URL Address	Type the URL address
Port - default to 80	Type the port number; the default is 80

2

Configure the URL Filter.

3

Click Add Filter.

END OF STEPS

7.3.31 Parental control

1

Select Security > Parent Control from the top-level menu in the GPON Gateway window, as shown in [Figure 7-32, “Parental Control window” \(p. 118\)](#).

Figure 7-32 Parental Control window

GPON Home Gateway

Logout

Security>Parental Control

Status

Network

Security

Firewall

MAC Filter

IP Filter

URL Filter

Parental Control

DMZ and ALG

Access Control

Application

Maintenance

RG Troubleshooting

Block access of LAN devices at given times, according to their MAC, IPv4 or URL addresses

Access Control ☐

Policy Name	Device	IP	URL	Days Of Week	From	To	Delete	Edit	Enable
-------------	--------	----	-----	--------------	------	----	--------	------	--------

Add Access Control rule

Policy Name:

New Policy

MAC Address:

New MAC

e.g. D0:54:2D:00:00:00

Add

IPv4 Address:

New IP

e.g. 192.168.1.100

Add

Url Port:

e.g. http://www.baidu.com

e.g. 0~65535 (default: 80)

Add

Days of Week:

Everyday

From:

e.g. 00:00~23:59

To:

e.g. 00:00~23:59

Close

Save changes

[Table 7-26, "Parental control parameters" \(p. 120\)](#) describes the fields in the Parental Control window.

Table 7-26 Parental control parameters

Field	Description
Access Control	Select this checkbox to enable access control
Add Access Control rule	
Policy Name	Enter a name for the parental control policy or choose a policy from the list
MAC Address	Enter the MAC address or choose a MAC address from the list
IPv4 Address	Enter the IPv4 address for the device or choose an IPv4 address from the list
Url Port	Enter the URL port for the device
Days of week	Choose Every Day, or Individual Days and select the checkboxes for the days of the week for which the policy applies
From	Enter the times for the policy to be in effect
To	

2 _____

Select the Access Control checkbox.

3 _____

Click the plus sign (+) to add a policy.

A separate panel displays for configuring the policy name, IP address of the device, and dates and times for the policy.

4 _____

Configure the parental control policy.

5 _____

Click Enable to activate the policy.

END OF STEPS _____

7.3.32 DMZ and ALG configuration

1 _____

Select Security > DMZ and ALG from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-33, "DMZ and ALG window" \(p. 122\)](#).

Figure 7-33 DMZ and ALG window

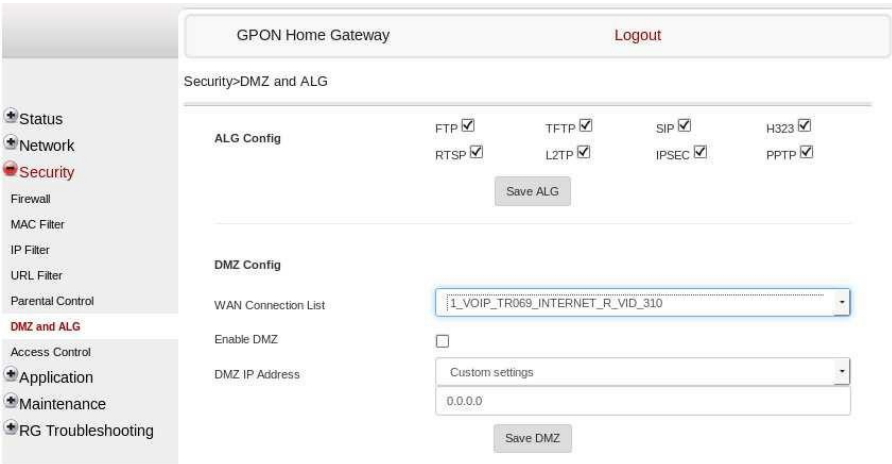


Table 7-27, “DMZ and ALG parameters” (p. 122) describes the fields in the DMZ and ALG window.

Table 7-27 DMZ and ALG parameters

Field	Description
ALG Config	Select the checkboxes to enable the protocols to be supported by the ALG: FTP, TFTP, SIP, H323, RTSP, L2TP, IPSEC, PPTP
DMZ Config	
WAN Connection List	Choose a WAN connection from the drop-down menu
Enable DMZ	Select this checkbox to enable DMZ on the chosen WAN connection
DMZ IP Address	Choose Customer Setting and enter the DMZ IP address or choose the IP address of a connected device from the drop-down menu

- 2 _____
Configure ALG.
- 3 _____
Click Save ALG.
- 4 _____
Configure DMZ.

5

Click Save DMZ.

END OF STEPS

7.3.33 Access control configuration

This procedure describes how to configure the access control level (ACL).

Note: ACL takes precedence over the firewall policy.
The trusted network object will be shared for all WAN connections; it is not applied individually to a WAN connection.

1

Select Security > Access Control from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-34, “Access Control window”](#) (p. 122).

Figure 7-34 Access Control window

GPON Home Gateway

Logout

Security>Access Control

WAN

LAN

1 VOIP TR069 INTERN

Trusted Network Enable

ICMP

Allow

Allow

Telnet

Deny

Allow

SSH

Deny

Allow

HTTP

Deny

Allow

TR-069

Allow

Deny

HTTPS

Deny

Allow

SFTP

Deny

Deny

SFTP access can be set in Application -> USB

Save

Refresh

Trusted Network

Source IP Start

Source IP End

Add

Source IP Start

Source IP End

Delete

[Table 7-28, “Access control parameters”](#) (p. 124) describes the fields in the Access Control window.

Table 7-28 Access control parameters

Field	Description
WAN	Choose a connection from the drop-down menu
Trusted Network Enable	Click to enable or disable
ICMP, Telnet, SSH, HTTP, TR-069, HTTPS, SFTP	Select an access control level for each protocol: WAN side: Allow, Deny, or Trusted Network Only LAN side: Allow or Deny
Trusted Network	
Source IP Start	Enter a start IP address for the new subnet trusted network
Source IP End	Enter an end IP address for the new subnet trusted network

- 2 _____
Select a WAN connection from the drop-down menu.
- 3 _____
Click to enable or disable Trusted Network.
- 4 _____
Select an access control level for each of the protocols: ICMP, Telnet, SSH, HTTP, TR-069, HTTPS, and SFTP for both the WAN side and the LAN side.
- 5 _____
Click Save.
- 6 _____
Optionally, add one or more subnet trusted networks.
The maximum number of entries is 32.
You can also use the Source IP fields to delete a previously created entry for a subnet trusted network.

END OF STEPS _____

7.3.34 Application configuration

The G-2425G-B ONT supports application configuration, including:

- port forwarding
- port triggering
- DDNS
- NTP
- USB

- UPnP and DLNA
- Voice setting

7.3.35 Port forwarding configuration

1

Select Application > Port forwarding from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-35, “Port forwarding window”](#) (p. 124).

Figure 7-35 Port forwarding window

Application Name	WAN Connection	WAN Port	LAN Port	Device Name	Internal Client	Protocol	Status	Delete
------------------	----------------	----------	----------	-------------	-----------------	----------	--------	--------

[Table 7-29, “Port forwarding parameters”](#) (p. 125) describes the fields in the port forwarding window.

Table 7-29 Port forwarding parameters

Field	Description
Application Name	Choose an application name from the drop-down menu The default is Custom settings
WAN Port	WAN port range
LAN Port	LAN port range
Internal Client	Choose a connected device from the drop-down menu and enter the associated IP address

Table 7-29 Port forwarding parameters (continued)

Field	Description
Protocol	Choose the port forwarding protocol from the drop-down menu: • TCP • UDP • TCP/UDP
Enable Mapping	Select this checkbox to enable mapping
WAN Connection List	Choose a WAN connection from the drop-down menu Note: only active devices are shown on this menu

2 _____
Configure port forwarding.

3 _____
Click Add.

END OF STEPS _____

7.3.36 Port triggering

1 _____
Select Application > Port Triggering from the top-level menu in the GPON Gateway window, as shown in [Figure 7-36, "Port Triggering window" \(p. 127\)](#).

Figure 7-36 Port Triggering window

Status

Network

Security

Application

Port Forwarding

Port Triggering

DDNS

NTP

USB

UPNP and DLNA

Voice Setting

Maintenance

RG Troubleshooting

GPON Home Gateway

Logout

Application>Port Triggering

Application Name

Custom settings

Open Port

Triggering Port

Expire Time

600

(Range:1~999999)(seconds)

Open Protocol

TCP

Trigger Protocol

TCP

Enable Triggering

☐

WAN Connection List

1_VOIP_TR069_INTERNET_R_VID_310

Add

Application Name	WAN Connection	Open Port	Triggering Port	Expire Time	Open Protocol	Trigger Protocol	Status	Delete
------------------	----------------	-----------	-----------------	-------------	---------------	------------------	--------	--------

Table 7-30, “Port triggering parameters” (p. 127) describes the fields in the Port Triggering window.

Table 7-30 Port triggering parameters

Field	Description
Application Name	Choose an application name from the drop-down menu The default is Custom settings
Open Port	Enter the open port range
Triggering Port	Enter the triggering port range
Expire Time	Enter the expiration time in seconds
Open Protocol	Choose the open port protocol from the drop-down menu: • TCP • UDP • TCP/UDP
Trigger Protocol	Choose the triggering port protocol from the drop-down menu: • TCP • UDP • TCP/UDP
Enable Triggering	Select this checkbox to enable port triggering

Table 7-30 Port triggering parameters (continued)

Field	Description
WAN Connection List	Choose a WAN connection from the drop-down menu Note: only active devices are shown on this menu

2 _____
Configure port triggering.

3 _____
Click Add.

END OF STEPS _____

7.3.37 DDNS configuration

1 _____
Select Application > DDNS from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-37, “DDNS window” \(p. 128\)](#).

Figure 7-37 DDNS window

[Table 7-31, “DDNS parameters” \(p. 128\)](#) describes the fields in the DDNS window.

Table 7-31 DDNS parameters

Field	Description
WAN Connection List	Choose a WAN connection from the drop-down menu

Table 7-31 DDNS parameters (continued)

Field	Description
Enable DDNS	Select this checkbox to enable DDNS on the chosen WAN connection
ISP	Choose an ISP from the drop-down menu.
Domain Name	Domain name
Username	Username
Password	Password
DDNS Status	Displays the status of the DDNS: Synchronized, Synchronization failed, or blank if no update message has been received from the ISP.

2 _____
Configure DDNS.

3 _____
Click Save.

END OF STEPS _____

7.3.38 NTP configuration

1 _____
Select Application > NTP from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-38, “NTP window” \(p. 130\)](#).

Figure 7-38 NTP window

The screenshot shows the 'GPON Home Gateway' configuration interface. On the left is a sidebar menu with options: Status, Network, Security, Application (highlighted), Port Forwarding, Port Triggering, DDNS, NTP, USB, UPNP and DLNA, Voice Setting, Maintenance, and RG Troubleshooting. The main area is titled 'Application>NTP'. It contains the following fields:

- Enable NTP Service:** A checkbox that is checked.
- Current Time:** A text input field containing '02/07/1970 09:08:30 PM'.
- Primary Time Server:** A dropdown menu showing 'Custom settings'.
- Secondary Time Server:** A dropdown menu showing 'None'.
- Third Time Server:** A dropdown menu showing 'None'.
- Interval Time:** A text input field containing '0', with '(0-259200)seconds' written below it.
- Time Zone:** A dropdown menu showing '(GMT-00:00) Casablanca, Monrovia'.

At the bottom right of the configuration area are two buttons: 'Save' and 'Refresh'.

Table 7-32, “NTP parameters” (p. 130) describes the fields in the NTP window.

Table 7-32 NTP parameters

Field	Description
Enable NTP Service	Select this checkbox to enable the NTP service
Current Time	Enter the current local date and time
Primary Time Server	Choose a time server from the drop-down menu or choose Customer setting and enter the address of the time server.
Secondary Time Server	Choose a time server from the drop-down menu or choose Customer setting and enter the address of the time server.
Third Time Server	Choose a time server from the drop-down menu or choose Customer setting and enter the address of the time server.
Interval Time	Interval at which to get the time from the time server, in seconds
Time Zone	Choose the local time zone from the drop-down menu

- 2 _____
Configure the NTP.
 - 3 _____
Click Save.
- END OF STEPS _____

7.3.39 USB configuration

You can connect USB storage devices and USB printers to the USB ports of the device. The USB menu enables you to configure FTP and SFTP for your USB storage devices.

The USB connected devices are shown in overview table on the bottom of the USB window.

1

Select Application > USB from the top-level menu, as shown in [Figure 7-39, “USB window” \(p. 130\)](#).

Figure 7-39 USB window

GPON Home Gateway

Logout

Application>USB

★ Status

★ Network

★ Security

★ Application

Port Forwarding

Port Triggering

DDNS

NTP

USB

UPNP and DLNA

Voice Setting

★ Maintenance

★ RG Troubleshooting

Enable FTP Server

☐

Username

ftpadmin

Password

Re-enter Password

Enable SFTP Server

☐

Enable SFTP for Remote Access

☐

Username

stftpadmin

Password

Re-enter Password

Enable Printer Sharing

☐

Username

myprinter

Password

Re-enter Password

Connected USB Devices Table

Host Number	Device Name	Format	Total Space	Free Space
-------------	-------------	--------	-------------	------------

Save

Refresh

Table 7-33, “USB parameters” (p. 131) describes the fields in the USB window.

Table 7-33 USB parameters

Field	Description
Enable FTP server	Select this checkbox to enable using an FTP server

Table 7-33 USB parameters (continued)

Field	Description
Username	Username for the FTP server
Password	Password for the FTP server
Re-enter Password	Password for the FTP server
Enable SFTP server	Select this checkbox to enable using an SFTP server
Enable SFTP for Remote Access	Select this checkbox to enable SFTP for remote access
Username	Username for the SFTP server
Password	Password for the SFTP server
Re-enter Password	Password for the SFTP server
Enable Printer Sharing	Select this checkbox to enable printer sharing Printer sharing is disabled by default
Username	Username for the SFTP server
Password	Password for the SFTP server
Re-enter Password	Password for the SFTP server
Connected USB Devices Table	For each printer that is connected to the ONT, the following fields are displayed: • Host Number for example: Printer1, Printer2 • Device Name: name or identification for the USB device • Format: displays the storage format (applies only to a USB storage device) • Total space (applies only to a USB storage device) • Free space (applies only to a USB storage device)

2 _____
Configure USB.


3 _____
Click Save.

END OF STEPS _____

7.3.40 UPnP and DLNA configuration

1 _____
Select Application > UPnP and DLNA from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-40, "UPnP and DLNA window" \(p. 133\)](#).

Figure 7-40 UPnP and DLNA window

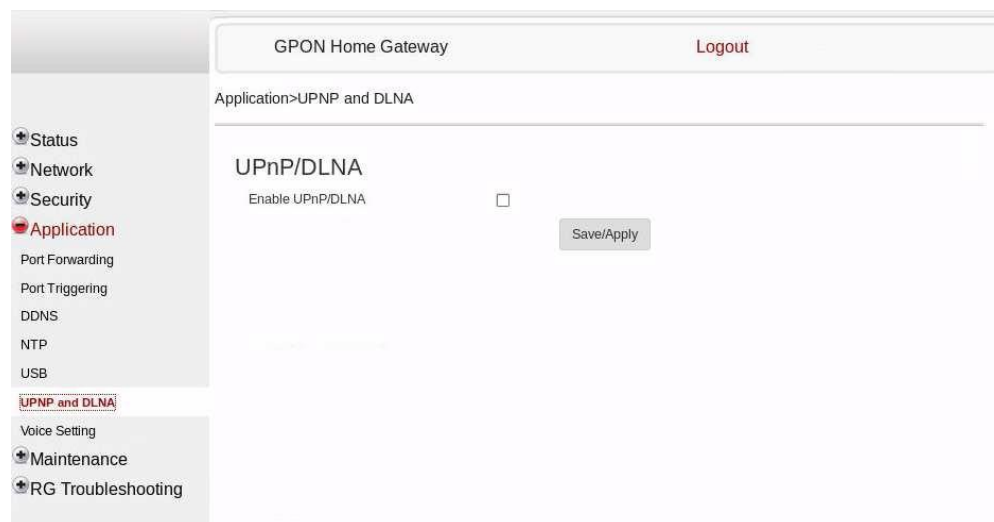

2 _____
Select the Enable UPnP/DLNA checkbox to enable UPnP/DLNA.

3 _____
Click Save/Apply.

END OF STEPS _____

7.3.41 Voice setting

1 _____
Select Application > Voice Setting from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-41, “Voice setting window” \(p. 134\)](#).

Status

Network

Security

Application

Port Forwarding

Port Triggering

DDNS

NTP

USB

UPNP and DLNA

Voice Setting

Maintenance

RG Troubleshooting

GPON Home Gateway

Logout

Application>Voice Setting

Voice Setting:

Outbound Proxy

10.1.1.253

Outbound Proxy Port

5080

Proxy Server

10.1.1.253

Proxy Server Port

5080

Registrar Server

10.1.1.253

Registrar Server Port

5080

UserAgentDomain

10.1.1.253

UserAgentPort

5080

DigitMap

*XX[0X]*X[P]XXXXXX[88885010]E[0601]XXXXXX[06001XXXXXX[0600X1]0602[0503-8]D-3][06034-9][0604[8-9][0605-9][4-9][0606[06021-9]XXXXXX[0606[1-9]X.XT

DTMF Mode

RFC2833

FaxT38

True

Line Setting:

POTS Line

Line 1

Enable

Enabled

Directory Number

8023

AuthUserName

8023

AuthPassword

URI

8023

Save

ice setting parameters

Field	Description
Voice Setting	
Outbound Proxy	Enter the SIP outbound proxy
Outbound Proxy Port	Enter the outbound proxy port
Proxy Server	Enter the proxy server
Proxy Server Port	Enter the proxy server port
Registrar Server	Enter the registrar server
Registrar Server Port	Enter the registrar server port

Table 7-34 Voice setting parameters (continued)

Field	Description
UserAgentDomain	Enter the user agent domain
UserAgentPort	Enter the user agent port
DigitMap	A string of characters with a length limit of 1024 bytes. A dial plan can consist of several dial plan tokens. Each token is a component of the overall dial plan.
DTMF Mode	Choose InBand, or RFC2833 from the drop-down menu
FaxT38	Choose False or True from the drop-down menu
Line Setting	
POTS line	Choose a POTS line from the drop-down menu
Enable	Choose Enabled or Disabled from the drop-down menu
Directory Number	Enter a directory number
AuthUserName	Enter an authorized user name
AuthPassword	Enter a password for the user
URI	The Uniform Resource Identifier of the SIP URL

2 _____
Configure voice setting.

3 _____
Click Save.

END OF STEPS _____

7.3.42 Maintenance

The G-2425G-B ONT supports maintenance tasks, including:

- change password
- configure LOID
- configure SLID
- manage device
- backup and restore
- upgrade firmware
- reboot device
- restore factory defaults
- diagnose WAN connections
- view log

7.3.43 Password configuration

A password must adhere to the password rules, which are as follows:

- the password may consist of uppercase letters, lowercase letters, digital numbers, and the following special characters ! # + , - / @ _ : =]
- the password length must be from 8 to 24 characters
- the first character must be a digital number or a letter
- the password must contain at least two types of characters: numbers, letters, or special characters
- the same character must not appear more than 8 times in a row

When the password meets the password rules, the application displays the message “Your password has been changed successfully”.

When the password does not meet the password rules, the application displays a message to indicate which password rule has not been followed, for example:

- the password is too short
- the password is too long
- the first character cannot be a special character
- there are not enough character classes

1

Select Maintenance > Password from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-42, “Password window” \(p. 135\)](#).

Figure 7-42 Password window

The screenshot shows the 'GPON Home Gateway' web interface. The top header bar includes the title 'GPON Home Gateway' and a 'Logout' button. On the left, a sidebar menu lists various configuration categories: Status, Network, Security, Application, Maintenance (selected), Password (sub-selected), and a list of maintenance tasks including LOID Configuration, SLID Configuration, Device Management, Backup and Restore, Firmware Upgrade, Reboot Device, Factory Default, Diagnostics, Log, and RG Troubleshooting. The main content area, titled 'Maintenance>Password', contains four text input fields labeled 'Original Password', 'New Password', 'Re-enter Password', and 'Prompt Message'. At the bottom of this section are two buttons: 'Save' and 'Refresh'.

[Table 7-35, “Password parameters” \(p. 137\)](#) describes the fields in the password window.

Table 7-35 Password parameters

Field	Description
Original Password	Current password
New Password	New password
Re-enter password	Password must match the new password entered above
Prompt message	Password prompt message

2 _____
Configure the new password.

3 _____
Click Save.

END OF STEPS _____

7.3.44 LOID configuration

1 _____
Select Maintenance > LOID Config from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-43, “LOID Config window”](#) (p. 137).

Figure 7-43 LOID Config window

The screenshot shows the GPON Home Gateway web interface. At the top, there's a header with 'GPON Home Gateway' and a 'Logout' link. Below the header, a breadcrumb trail reads 'Maintenance > LOID Configuration'. The left sidebar contains a menu with icons and labels: Status, Network, Security, Application, Maintenance (highlighted with a red circle), Password, LOID Configuration (highlighted with a red box), SLID Configuration, Device Management, Backup and Restore, Firmware Upgrade, Reboot Device, Factory Default, Diagnostics, Log, and RG Troubleshooting. The main content area is titled 'LOID Authentication' and contains the instruction: 'Please enter the LOID (length <25 characters) and the Password (length <13 characters). If the Password is null, leave the Password field blank.' There are two input fields: 'LOID:' with the value 'AdminGPON' and 'Password:' which is empty. A 'Save/Apply' button is located below the password field.

[Table 7-36, “LOID configuration parameters”](#) (p. 138) describes the fields in the LOID configuration window.

Table 7-36 LOID configuration parameters

Field	Description
LOID	Type the LOID; the maximum number of characters is 24 If the password is null, this field may be left blank
Password	Type the password; the maximum number of characters is 12

2 _____
Configure the LOID.

3 _____
Click Save/Apply.

END OF STEPS _____

7.3.45 SLID configuration

1 _____
Select Maintenance > SLID Configuration from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-44, "SLID configuration window" \(p. 138\)](#).

Figure 7-44 SLID configuration window

GPON Home Gateway Logout

Maintenance > SLID Configuration

Current SLID 44454641554C54

Enter New SLID

SLID Mode

Note:

ASCII Mode: Maximum of 10 ASCII characters allowed (e.g. abcdefg123).

HEX Mode: Maximum of 20 HEX numbers allowed (e.g. 1234567890ABCDEF1234).

Save Refresh

[Table 7-37, "SLID configuration parameters" \(p. 139\)](#) describes the fields in the SLID configuration window.

Table 7-37 SLID configuration parameters

Field	Description
Current SLID	Displays the current SLID
Enter New SLID	Enter new SLID
SLID Mode	Choose a SLID mode from the drop-down menu The default is HEX Mode

2 _____
Configure the new SLID.


3 _____
Click Save.

END OF STEPS _____

7.3.46 Device management

1 _____
Select Maintenance > Device Management from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-45, “Device management window” \(p. 139\)](#).

Figure 7-45 Device management window

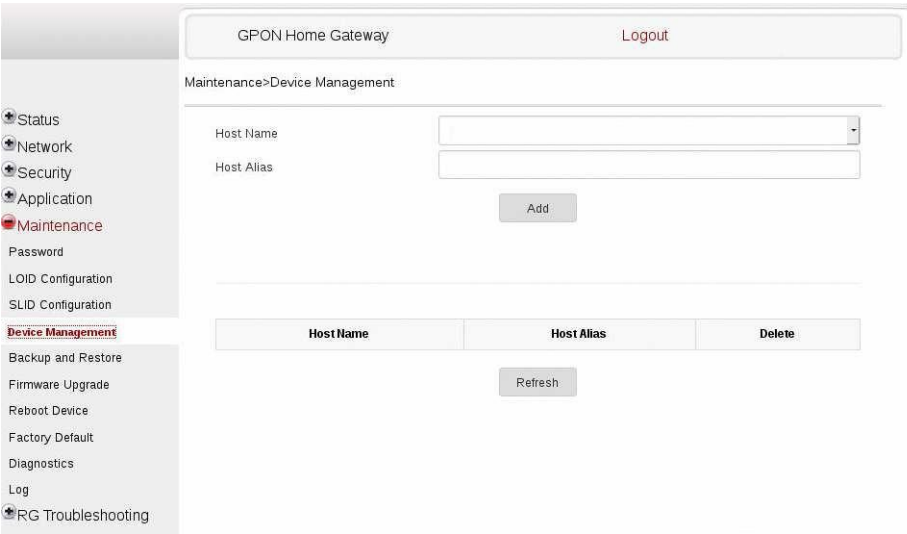

[Table 7-38, “Device management parameters” \(p. 140\)](#) describes the fields in the Device management window.

Table 7-38 Device management parameters

Field	Description
Host Name	Choose a hostname from the drop-down menu
Host Alias	Enter an alias for the chosen host

2 _____
Configure an alias for a specific host.


3 _____
Click Add.

END OF STEPS _____

7.3.47 Backup and restore

1 _____
Select Maintenance > Backup and Restore from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-46, "Backup and Restore window" \(p. 140\)](#).

Figure 7-46 Backup and Restore window

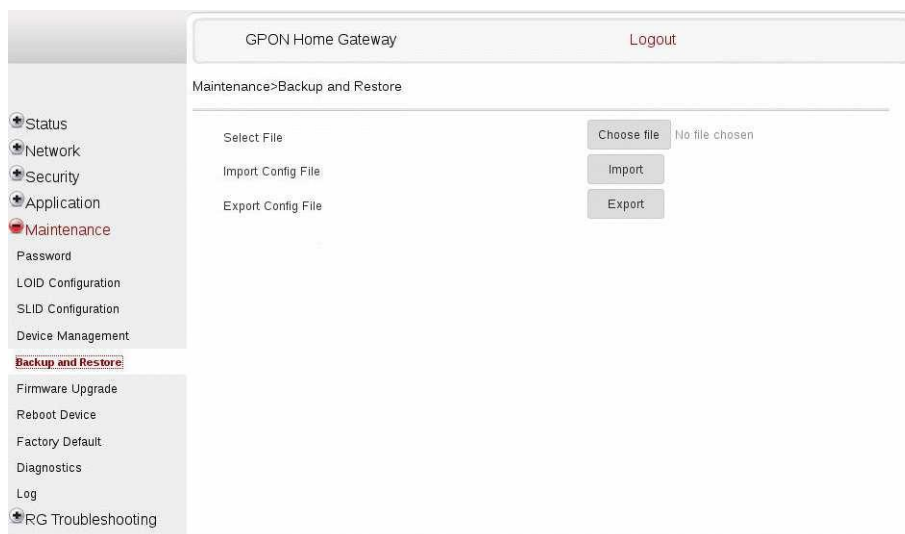

2 _____
Click Choose file and choose the backup file.

3

Click Import to restore the ONT to the saved backup, or click Export to export the current ONT configuration to the backup file.


END OF STEPS

7.3.48 Upgrade firmware

1

Select Maintenance > Firmware Upgrade from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-47, “Firmware upgrade window”](#) (p. 140).

Figure 7-47 Firmware upgrade window

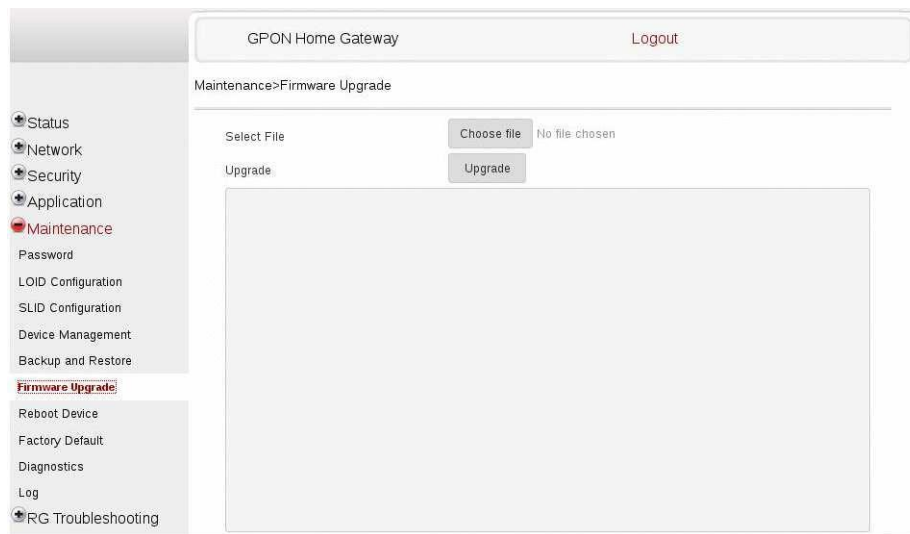

2

Click Choose file and choose the firmware file.

3

Click Upgrade to upgrade the firmware.


END OF STEPS

7.3.49 Reboot ONT

1

Select Maintenance > Reboot Device from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-48, “Reboot window”](#) (p. 142).

Figure 7-48 Reboot window

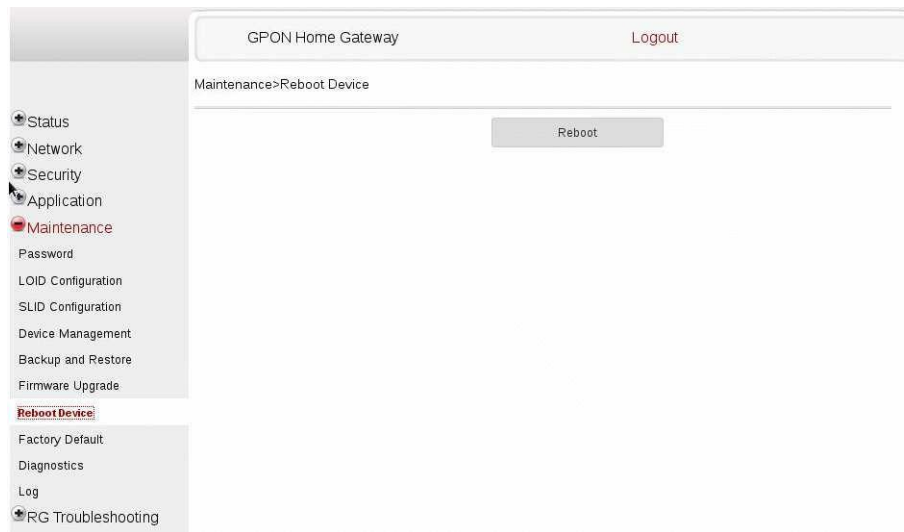

2

Click Reboot to reboot the ONT.


END OF STEPS

7.3.50 Restore factory defaults

1

Select Maintenance > Factory Default from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-49, "Factory default window" \(p. 143\)](#).

Figure 7-49 Factory default window

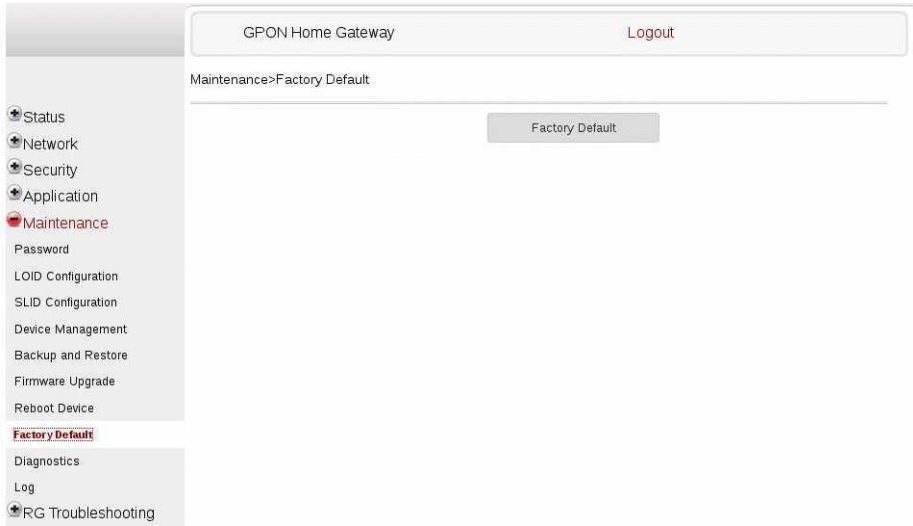

2

Click Factory Default to reset the ONT to its factory default settings.

END OF STEPS

7.3.51 Diagnose WAN connections

1

Select Maintenance > Diagnostics from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-50, “Diagnostics window” \(p. 144\)](#).

Figure 7-50 Diagnostics window

GPON Home Gateway Logout

Maintenance>Diagnostics

WAN Connect List LAN/WAN Interface

IP or Domain Name

Test ☒ ping ☒ tracert

Ping Try Times(1 ~ 1000) 4

Packet Length(64 ~ 1500) 64

Max no. of trace hops(1 ~ 255) 30

Start Test Cancel

- 2 _____
Choose a WAN connection to diagnose from the drop-down menu.
- 3 _____
Enter the IP address or domain name.
- 4 _____
Select the test type: ping, traceroute, or both.
- 5 _____
Enter the number of ping attempts to perform (1 - 1000); the default is 4.
- 6 _____
Enter a ping packet length (64-1024); the default is 64.
- 7 _____
Enter the maximum number of trace hops (1-255); the default is 30.
- 8 _____
Click Start Test. The results will be displayed at the bottom of the window.

9

Click Cancel to cancel the test.


END OF STEPS

7.3.52 View log files

1

Select Maintenance > Log from the top-level menu in the GPON Home Gateway window, as shown in [Figure 7-51, “Log window”](#) (p. 144).

Figure 7-51 Log window

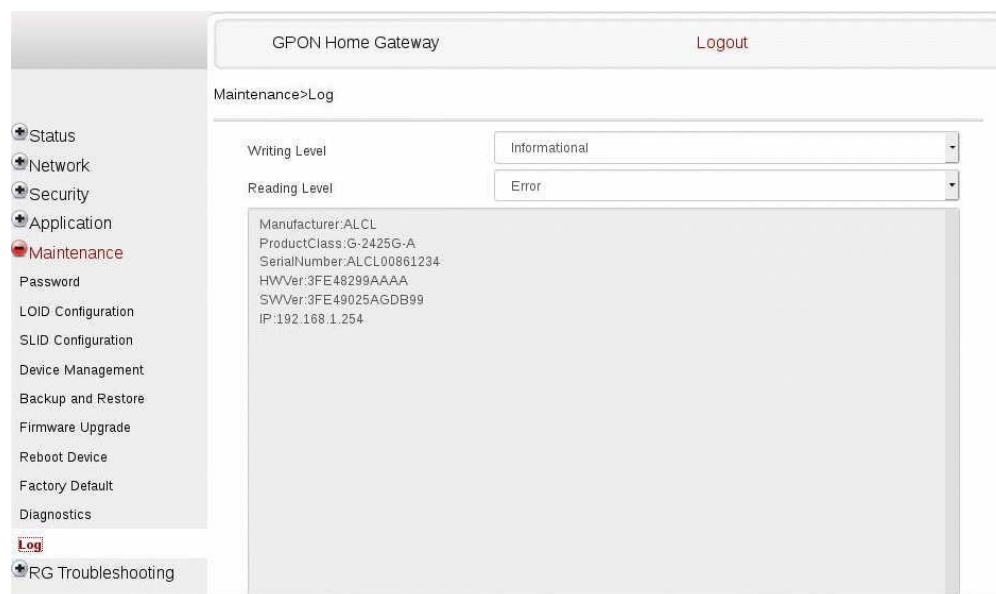

2

Choose a write level from the drop-down menu to determine which types of events are recorded in the log file:

- Emergency
- Alert
- Critical
- Error
- Warning
- Notice
- Informational
- Debug

3

Choose a reading level from the drop-down menu to determine which types of events to display from the log file:

- Emergency
- Alert
- Critical
- Error
- Warning
- Notice
- Informational
- Debug

4

The log file is displayed at the bottom of the window.

END OF STEPS

7.3.53 RG troubleshooting counters

The Troubleshooting Counters feature enables service providers and end users to monitor the performance of their broadband connection.

Tests are run to retrieve upstream and downstream throughput, latency, and DNS response time. The Troubleshooting Counters window also displays upstream and downstream packet loss and Internet status.

7.3.54 Retrieve Residential Gateway (RG) troubleshooting counters

1

Select RG Troubleshooting Counters from the left menu in the GPON Home Gateway window.

The RG Troubleshooting Counters window appears; see [Figure 7-52, "RG Troubleshooting Counters window"](#) (p. 147).

Figure 7-52 RG Troubleshooting Counters window

GPON Home Gateway

Logout

RG Troubleshooting>RG Troubleshoot Counters

WAN Connection List

1_INTERNET_TR069_VOIP_R_VID_881

US Throughput

US-SpeedTest

DS Throughput

DS-SpeedTest

US Packet Loss

0

DS Packet Loss

0

Internet Status

Linking

Latency

LatencyTest

DNS Response Time

DNSResponseTest

Refresh

Table 7-39, “RG Troubleshooting Counters parameters” (p. 147) describes the fields in the RG Troubleshooting Counters window.

Table 7-39 RG Troubleshooting Counters parameters

Field	Description
WAN Connection List	Choose a WAN connection from the list
US Throughput	This test is used to determine the upstream throughput/speed Click US Speed Test to specify the time for the upstream test The default is weekly, performed at idle to a public server
DS Throughput	This test is used to determine the downstream throughput/speed Click DS Speed Test to specify the time for the downstream test The default is weekly, performed at idle to a public server
US Packet Loss	The number of upstream packages lost
DS Packet Loss	The number of downstream packages lost
Internet Status	Whether the broadband connections is active (UP) or not (DOWN)

Table 7-39 RG Troubleshooting Counters parameters (continued)

Field	Description
Latency	This test is used to determine the lowest round-trip time in milliseconds by pinging the target server multiple times Click Latency Test to specify the time for the test The default is weekly, performed at idle to a public server
DNS Response Time	This test is used to determine the lowest round-trip time in milliseconds by sending a request to the target DNS server Click DNS Response Test to specify the time for the test The default is weekly, performed at idle to a public server

2

Configure the test times if desired.

3

Click Refresh to update the data.

END OF STEPS

8 ONT configuration file over OMCI

8.1 Overview

8.1.1 Purpose

8.1.2 Contents

8.1 Overview	149
8.2 Purpose	149
8.3 Supported configuration file types	149
8.4 ONT configuration file over OMCI	151

8.2 Purpose

This procedure describes how to use configuration files over OMCI to configure ONTs. Some advantages include:

- flexibility to change the ONT default behavior by downloading configuration file
- flexibility to update a deployed ONT by downloading updated parameters
- ability to securely download any configuration file to an ONT
- ability to avoid using embedded configuration files in ONT software

 **Note:** This feature is supported for use with the 7360 ISAM FX and the 7342 ISAM FTTU.

8.3 Supported configuration file types

[Table 8-1, “Supported configuration files” \(p. 150\)](#) describes the configuration file types that are supported from 7368 ISAM ONT R05.02.00 and later.

Table 8-1 Supported configuration files

File Index	Description	Details	Supported ONTs/DPU
PRE	ONT pre-configuration file	The XML-based PRECONFIG file controls the working mechanics of the ONT for various services. The default behavior of different ONTs may vary based on the factory settings. The pre-configuration file includes the factory default value for the residential gateway. Note: the pre-configuration file does not work with SFU ONTs; therefore, this feature applies only to Residential Gateway ONTs. The pre-configuration file can be used as is, but Nokia provides its customers with the flexibility to customize the pre-configuration file. This pre-configuration file enables operators to change the default behavior by downloading a customized pre-configuration based on customer inputs. This PRE XML file includes a custom OPERID. The Nokia defined index for the PRECONFIG file is: "PRE"	All Nokia GPON and 10 GPON ONT.
CFG	ONT configuration delta file	The XML-based CFG file updates the configurable parameters (the PRE settings) in the existing PRE file of a deployed ONT, where required. This configuration file enables operators to change the deployed behavior by downloading customized updates in the CFG file. This file is used only to modify the parameters in the PRE file; it is not used for service provisioning. No OPERID is required, because the update is based on the OPERID used for the PRE file. The Nokia defined index for the PRECONFIG DELTA file is: "CFG"	All Nokia GPON and 10GPON ONT.
XML	Voice XML file	The Voice XML file provides an alternate method for securely downloading voice parameters from the OLT, rather than using FTP (OMCiv1/OMCiv2) or HTTPS (TR-069). Downloading this file makes the applicable changes in the voice parameters. This file enables operators to change the voice behavior by downloading the updated voice XML file. Nokia recommends using this procedure, rather than embedded voice XML files. The Nokia defined index for the Voice XML file is: "XML"	All Nokia GPON and 10 GPON ONT.

Table 8-1 Supported configuration files (continued)

File Index	Description	Details	Supported ONTs/DPU
GFT	G.fast-related configuration file	This text-based json script file controls the default behavior of the G.Fast ONT. This file includes the provisioning parameters of the G.fast transports layer; it does not include VLAN or QoS provisioning. While the ONT functions well with the default values; they can optionally be customized. While default values can work in VDSL mode, a download file is required for the device to function as a G.fast ONT. The Nokia defined index for the G.fast file is: "GFT"	Nokia G.fast.

8.3.1 Filename conventions

Nokia provides the raw configuration files, which must be saved by the operator in a TAR file to be uploaded. TAR file names must be unique.

The filenames of the raw configuration files may not adhere to the naming conventions outlined below. In this case, the files must be renamed to adhere to the naming conventions before the operator generates the TAR file. Filenames are not case-sensitive.

8.3.2 Download configuration file

The following table provides the supported download options for ONT pre-configuration file and configuration file.

Table 8-2 Download configuration files

ONT type	Legacy method download		Zero management download	
	PRE file	CFG file	PRE file	CFG file
Broadlight(eg.I240WA-3FE54869AFGA80)	—	✓	—	✓
Broadcom(eg.G240WB-3FE56773BFGA07)	—	✓	✓	✓
MTK(eg.G240WF)	—	✓	✓	✓

8.4 ONT configuration file over OMCI



WARNING

Equipment Damage

Executing the following procedure will trigger the ONT to reboot, which will impact ongoing services.

Use this procedures to configure ONTs using configuration files via legacy method and OMCI.

8.4.1 Configuring an ONT using a configuration file via legacy method

1

Upload the ABCXXXXXVER TAR file to the /ONT/ directory in the OLT.
A maximum of 250 files can be kept in the OLT file system.

2

Using OLT commands, download the TAR file to the ONT.

For OLT commands, refer to the , or the **7342 ISAM FTTU Operation and Maintenance Using TL1 and CLI**.

Please note:

- **pri-cfgfile-pland/dnload** or **sec-cfgfile-pland/dnload** can be 1 to 14 characters.
- **pri-cfgfile-pland** and **pri-cfgfile-dnload** should be the same name.

Examples

Note: X can be 1 or 2 unless specified:

- If **pland-cfgfileX= Disabled** and **dnload-cfgfileX= Disabled** ,
no file will be downloaded to the ONT.
- If **pland-cfgfileX=FILENAME1** and **dnload-cfgfileX= Disabled** ,
FILENAME1 will be downloaded and FILENAME1 will be made active. An ONT reboot is required.
- If **pland-cfgfileX=Disabled** and **dnload-cfgfileX= FILENAME2**
FILENAME2 will be downloaded and FILENAME2 will be made passive. An ONT reboot is not required.
- If **pland-cfgfileX=FILENAME3** and **dnload-cfgfileX= FILENAME 4**, the OLT reports an error because the filenames are not the same.
- Configure equipment interface **pland-cfgfile1=XMLXXXXXX1** and **dnload-cfgfile1 XMLXXXXXX1**
Configure equipment interface **pland-cfgfile2=XMLXXXXXX2** and **dnload-cfgfile2 XMLXXXXXX2**
Although the OLT permits the above two steps without reporting an error, Nokia does not recommend executing them, because the ONT may exhibit unexpected behavior.
- If **pland-cfgfileX=Auto** and **dnload-cfgfileX= Auto**
The OLT will download the XML file from "sw-ctrl-list" (**configure equipment ont sw-ctrl**)

END OF STEPS

The ONT will distribute the configuration files to the different services based on the active indication from the OLT and on the Nokia defined index.

The ONT automatically reboots to apply the configuration files. After the ONT reboots and reports the active version, the OLT completes the file download procedure.

Operators must check the committed file from the OLT to verify whether the corresponding file has been applied. If an error occurs, contact Nokia for support.

8.4.2 Configuring an ONT using a configuration file via OMCI

1

Generate the TAR file to be uploaded to the OLT.

Using the raw configuration file(s) provided by Nokia, generate the TAR file as follows:

- a. On a Linux platform, rename the raw configuration file to adhere to the naming convention, as described in section 8.3 “Supported configuration file types” (p. 149).

- b. Tar the **ABCXXXXVER** raw configuration file:

```
tar -cf ABCXXXXVER.tar ABCXXXXVER
```

Where

ABCXXXXVER

Is the name of the file created in step i.

This creates two files: **ABCXXXXVER** and **ABCXXXXVER.tar**.

- c. Rename **ABCXXXXVER** to **ABCXXXXVER.org**

- d. Remove the “.tar” extension from **ABCXXXXVER.tar** file.

2

Upload the ABCXXXXVER TAR file to the /ONT/ directory in the OLT.

A maximum of 250 files can be kept in the OLT file system.

3

Using OLT commands, download the TAR file to the ONT.

For OLT commands, refer to the , or the **7342 ISAM FTTU Operation and Maintenance Using TL1 and CLI**.

Please note:

- **pri-cfgfile-pland/dnload** or **sec-cfgfile-pland/dnload** can be 1 to 14 characters.
- **pri-cfgfile-pland** and **pri-cfgfile-dnload** should be the same name.

Examples

Note: X can be 1 or 2 unless specified:

- a. If **pland-cfgfileX= Disabled** and **dnload-cfgfileX= Disabled** ,
no file will be downloaded to the ONT.
- b. If **pland-cfgfileX=FILENAME1** and **dnload-cfgfileX= Disabled** ,
FILENAME1 will be downloaded and FILENAME1 will be made active. An ONT reboot is required.
- c. If **pland-cfgfileX=Disabled** and **dnload-cfgfileX= FILENAME2**

FILENAME2 will be downloaded and FILENAME2 will be made passive. An ONT reboot is not required.

- d. If **pland-cfgfileX=FILENAME3** and **dnload-cfgfileX= FILENAME 4**, the OLT reports an error because the filenames are not the same.

- e. Configure equipment interface **pland-cfgfile1=XMLXXXXXX1** and **dnload-cfgfile1 XMLXXXXXX1**

Configure equipment interface **pland-cfgfile2=XMLXXXXXX2** and **dnload-cfgfile2 XMLXXXXXX2**

Although the OLT permits the above two steps without reporting an error, Nokia does not recommend executing them, because the ONT may exhibit unexpected behavior.

- f. If **pland-cfgfileX=Auto** and **dnload-cfgfileX= Auto**

The OLT will download the XML file from "sw-ctr-list" (**configure equipment ont sw-ctrl**)

END OF STEPS

The ONT will distribute the configuration files to the different services based on the active indication from the OLT and on the Nokia defined index.

The ONT automatically reboots to apply the configuration files. After the ONT reboots and reports the active version, the OLT completes the file download procedure.

Operators must check the committed file from the OLT to verify whether the corresponding file has been applied. If an error occurs, contact Nokia for support.