

### ACI-USB/ ADV transporter dongle Manual

#### 1. Package :

1-1 ACI-USB/ADV transporter dongle x 2

1-2 User manual x 1

1-3 433MHz Antenna x 2



#### 2. Setting guide:

2-1 Please to check OS system to USB driver software(**Windows /Mac /Linux**) you can find the driver below address.


<http://www.ftdichip.com/Drivers/D2XX.htm>

2-2 Finished the ACI-RSUSB dongle to plug to NB/PC's USB port, PW(Power) LED light will be light “ON “.

※ Tx LED light is yellow; Rx LED light is green.

Note: 433MHz antenna is pluggable.

2

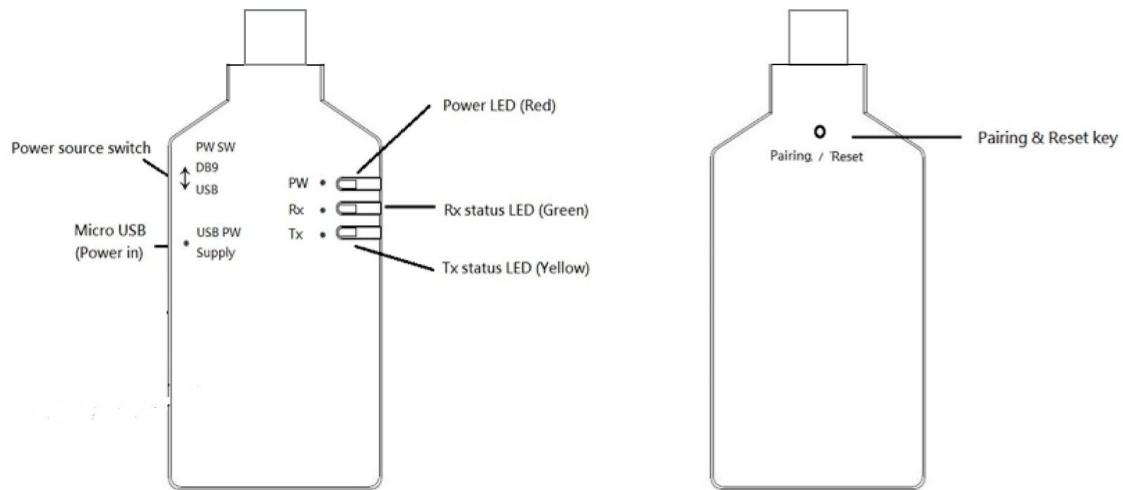

### 2-3 Default setting:

Baud rate: 9600 bps

Data bit: 8

Parity: None

Stop bit: 1


RF data-rate: 10k

Timeout: 300ms

Starting Paired : 1 to 1 mode

※ If the ACI-USB/ ADV dongle was used, Not sure the "Baud rate" setting, turn back to see a hole and press the Pairing/ Reset button and re-plugs the 5VDC power, waiting for 6 seconds and then release the button, Tx/ Rx LED light will be flashing each other about 5 times to be the default setting.

### 2-4 Baud rate AP setting:

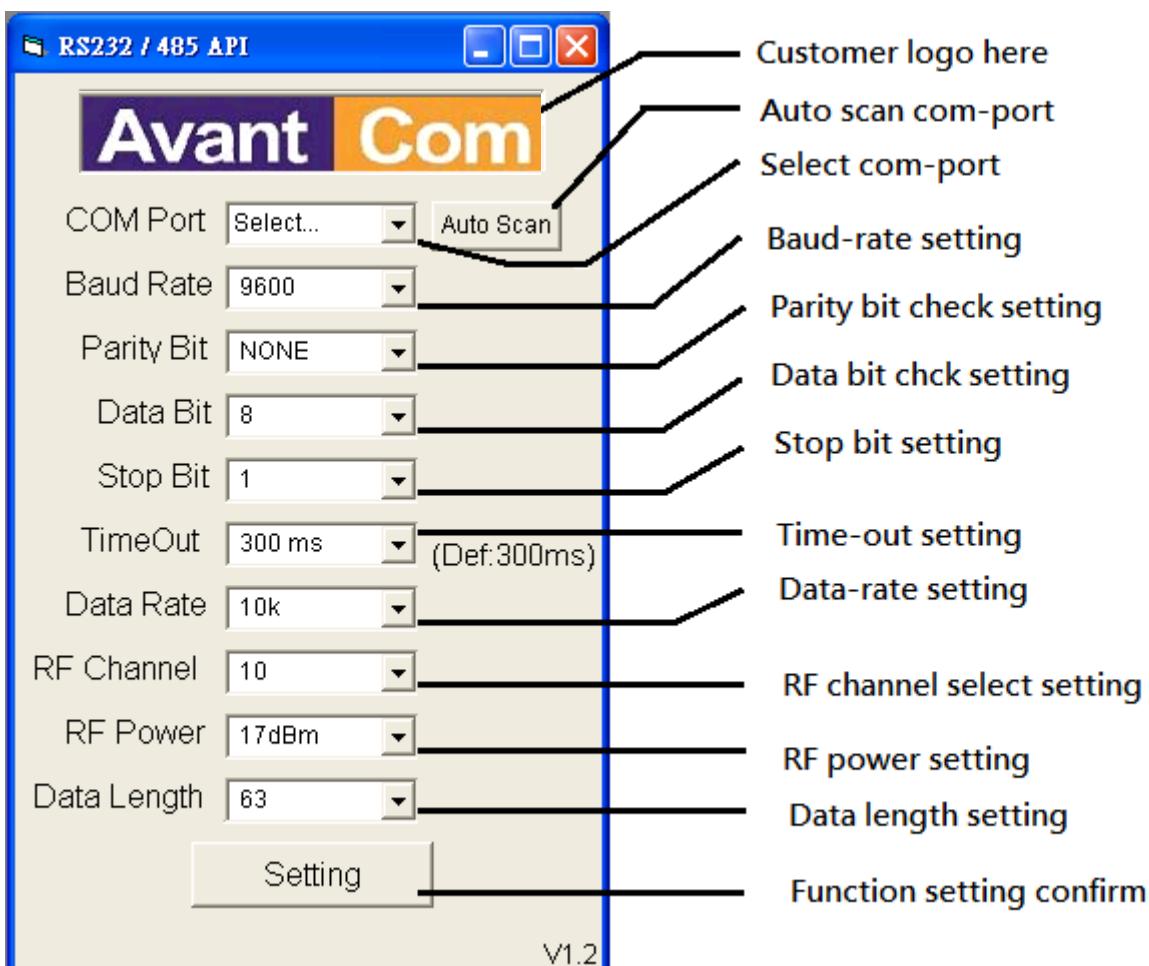

- 2-4-1 Execute the RS232/485/USB AP.exe, it show a window above.
- 2-4-2 Use the USB(Male) to USB(female) cable connecting between the USB dongle and NB/PC USB port.
- 2-4-3 Please check USB dongle and NB/PC connecting or not and then AP window will show “Auto scan” to select the Com Port.
- 2-4-4 Baud Rate: Baud Rate value.
- 2-4-5 Parity Bit: None/ Odd/ Even.
- 2-4-6 Data Bit: 6/ 7/ 8 (bit)。
- 2-4-7 Stop Bit: 1/ 2 (bit)。

4

2-4-8 Time Out: (UART wait for the time out value), selecting 2ms ~ 1000ms.

2-4-9 Data Rate: 2k bps ~ 250k bps.

2-4-10 RF Channel: Ch0 to Ch15( 16 channel).

※ If USB dongle on 1 to 1 or 1 to more mode, it must select the same channel.

2-4-11 RF Power: Min -8dBm to +17dBm, (4 levels is selected).

2-4-12 Data Length: 13 bit to 63 bit (11 levels is selected)

2-4-13 Press the "Setting" button, If the USB Dongle was succeed, it Tx/ Rx LED light will be flashing 3 times.

5

### 2-5 Pairing setting < 1 to 1>

1. Switch dongle to Master/ Slave



2. Check PW(Power) light.



3. Default setting :  
Jabbing Pairing/ Reset button, over 7 second and release it.



When it finished that Tx/ Rx LED light flashing each other 5 times.



6

Master



5. Jabbing Pairing/ Reset button, Tx/ Rx LED light holding to be pairing mode.



(When it finished that Tx/ Rx LED light flashing 5 times)



Slave

4. Jabbing Pairing/ Reset button, Tx/ Rx LED light holding to be pairing mode



(When it finished that Tx/ Rx LED light flashing 5 times)



Video for reference :

<https://www.youtube.com/watch?v=89LcFNZfsUs>

7

### 2-6 Pairing setting < 1 to more >

1. Setting the same one to one step again.



Master

Slave : S1

3. Jabbing Pairing/ Reset button, over 3 seconds and release it



The Tx/ Rx LED light flashing 3 times, it finished one to more mode



2. Jabbing Pairing/ Reset button, over 3 second and release it



The Tx/ Rx LED light flashing 3 times, finished one to more mode.



PS: If you wanna pair one to more, please to see step 4 ~ step 10.



Slave : S2



4. Switch S2 Dongle to Slave



8

Master

9. Jabbing Pairing/ Reset button, to be pairing mode.



The Tx/ Rx LED light will be flashing 3 times, it finished the pairing.



(Master has a first pairing group)



10. The Tx/ Rx LED light will be flashing 5 times, it finished the pairing.



(Master has a second pairing group)

PS: If you wanna pair S3, S4, ...Sn, Please  
re-setting step 4 to step 10.

Slave : S2

5. Plug Micro-USB to be supporting 5VDC power



6. Default setting :  
Jabbing Pairing/ Reset button over 7 seconds and release it.  
(Tx/ Rx LED ligh flashing 5 times)

**See <1 to 1> step3**



7. Jabbing Pairing/ Reset button, about 3 seconds and release it.  
The Tx/ Rx LED light flashing 3 times, it will be one to more mode.

**See <1 to more > step 2**



8. Jabbing Pairing/ Reset button, it wil be pairing mode, The Tx/ Rx LED will be holding light.  
(It's finished, Tx/ Rx LED light flashing 5 times)

**See <1 to 1> step 4**

(Slave S2 finished 1 to more)

### 3. Our contact info:

**Avant-Com, Inc. 瑋忠科技企業股份有限公司/ 台灣/ 台北**

**11494 台北市內湖區民權東路 6 段 13-23 號 3 樓**

**3F., No.13-23, Sec. 6, Minquan E. Rd., Neihu Dist., Taipei City 114, Taiwan, R.O.C.**

**TEL:+886-2-8792-5853**

**FAX:+886-2-8792-5796**

**E-Mail : [service@avantcom.com.tw](mailto:service@avantcom.com.tw)**

**Website: [www.avantcom.com.tw](http://www.avantcom.com.tw)**

**Avant-Com, Inc./ SZ 深圳奇翰電子有限公司/ 深圳市**

**深圳市南山区南头街 98 号南头大厦 7D ( 南头街道办事处楼上 )**

**TEL:+86-0755-8279-3556**

**FAX:+86-0755-8279-3553**

**E-Mail: [service@avantcom.com.cn](mailto:service@avantcom.com.cn)**

**Website: [www.avantcom.com.cn](http://www.avantcom.com.cn)**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correcting the interference by one or more of the following measures:

- Reorient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

低功率電波輻射性電機管理辦法(NCC)

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

10

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

英文警語：

NCC Warning Statement

Article 12

Without permission, any company, firm or user shall not alter the frequency, increase the power, or change the characteristics and functions of the original design of the certified lower power frequency electric machinery.

Article 14

The application of low power frequency electric machineries shall not affect the navigation safety nor interfere a legal communication, if an interference is found, the service will be suspended until improvement is made and the interference no longer exists.



**FCC ID: 2AE2I-GC632461**

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

Working temperature: -40 to 85 degree.