



## FCC PART 15B, CLASS B TEST REPORT

For

### LY Industrial Co., Limited

Room 904, President Commercial Centre, 608 Nathan Road,  
Mongkok, Kowloon, HongKong, China

**FCC ID: 2AE3XL8**

<b>Report Type:</b> Original Report	<b>Product Type:</b> 3G Smart Phone
<b>Test Engineer:</b> <u>Mike Hu</u> 	
<b>Report Number:</b> <u>RSZ150707004-00D</u>	
<b>Report Date:</b> <u>2015-07-15</u> Sunny Sun 	
<b>Reviewed By:</b> <u>EMC Manager</u>	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST FACILITY.....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>4</b>
DESCRIPTION OF TEST CONFIGURATION .....	4
EUT EXERCISE SOFTWARE .....	4
SPECIAL ACCESSORIES.....	4
EQUIPMENT MODIFICATIONS .....	4
SUPPORT EQUIPMENT LIST AND DETAILS .....	4
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....</b>	<b>7</b>
APPLICABLE STANDARD .....	7
MEASUREMENT UNCERTAINTY.....	7
EUT SETUP .....	7
EMI TEST RECEIVER SETUP.....	8
TEST PROCEDURE .....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
CORRECTED FACTOR & MARGIN CALCULATION .....	8
TEST RESULTS SUMMARY.....	9
TEST DATA .....	9
<b>FCC §15.109 - RADIATED SPURIOUS EMISSIONS.....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
MEASUREMENT UNCERTAINTY.....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE .....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST RESULTS SUMMARY.....	14
TEST DATA .....	14
<b>PRODUCT SIMILARITY DECLARATION LETTER.....</b>	<b>16</b>

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *LY Industrial Co., Limited*'s product, model number: *L8* (FCC ID: 2AE3XL8) or the "EUT" in this report was a *3G Smart Phone*, which was measured approximately: 126 mm (L) × 65 mm (W) × 9.0 mm (H), rated input voltage: DC 3.7V battery or DC 5.0V from adapter.

Trade Name: LY L8, Digifon DIG-4.0

Adapter Information:

Model: PS06B050K1000UU

Input: 100~240V 50/60Hz, 0.25A

Output: DC 5.0V, 1000mA

*Note: This series products model: DIG-4.0 and L8 are identical schematics, the difference among them is just the model number due to marketing purpose, and model L8 was selected for fully testing, the detailed information can be referred to the attached declaration letter that stated and guaranteed by the applicant.*

*\* All measurement and test data in this report was gathered from production sample serial number: 1505672 (Assigned by BACL Shenzhen). The EUT supplied by the applicant was received on 2015-07-09.*

### Objective

This test report is prepared on behalf of *LY Industrial Co., Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS/DTS and Part 22H&24E&27 PCE submissions with FCC ID: 2AE3XL8.

### Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT operation mode: Receiving single and control light.

### EUT Exercise Software

“BurnIn test v5.3” exercise software was used.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	VOSTRO 220S	127BP2X
DELL	LCD Monitor	E178WFPC	CN-OWY564-64180-7C4-2SQH
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Mouse	MOC5UO	G1900NKD
SAST	Modem	AEM-2100	0293
Kingston	Micro SD card	4 GB	/
PHILIPS	Earphone	SBCHP250	N/A

## External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielding Detachable USB Cable	1.5	Host PC	Mouse
Shielding Detachable Serial Cable	1.2	Host PC	Modem
Shielding Detachable K/B Cable	1.5	Host PC	Keyboard
Shielding Detachable VGA Cable	1.5	Host PC	LCD Monitor
Un-shielding Detachable Earphone Cable	1.0	EUT	Earphone
Unshielding Detachable USB Cable	1.0	EUT	PC

## Block Diagram of Test Setup

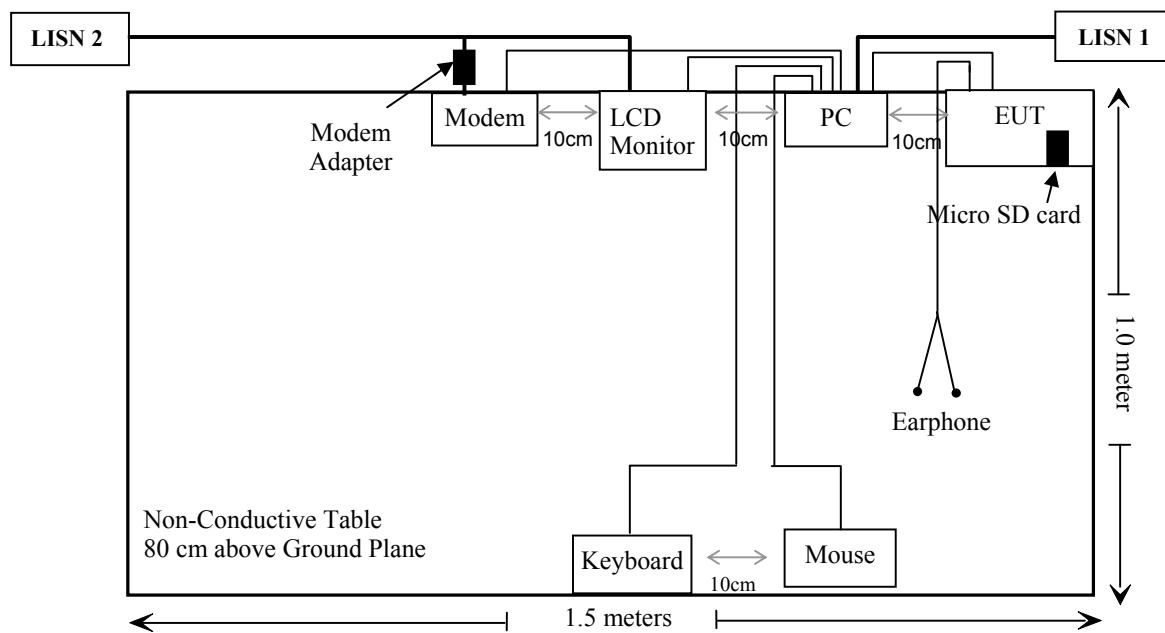

## **SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Results</b>
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

## FCC §15.107 – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

According to FCC §15.107


### Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN/ISN and receiver, LISN/ISN voltage division factor, LISN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

### EUT Setup

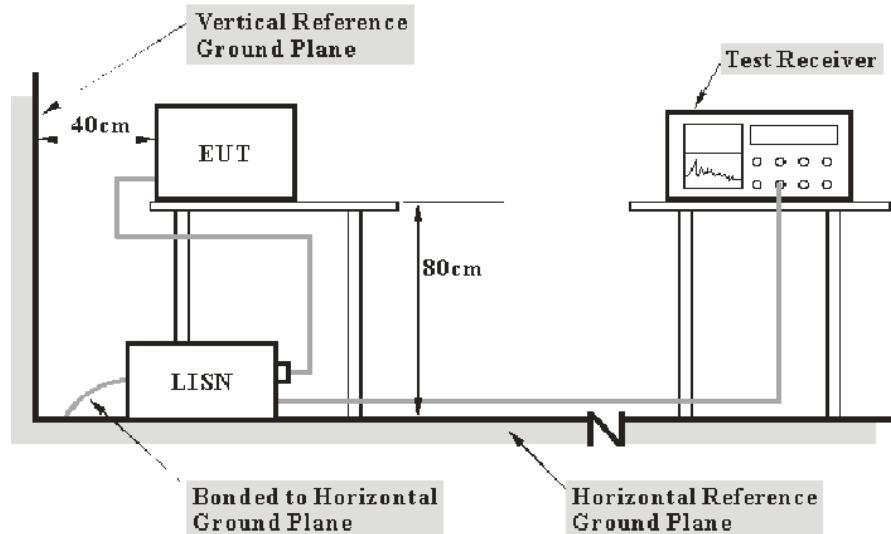

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2009. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2015-06-03	2016-06-03
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2014-12-01	2015-12-01
Rohde & Schwarz	LISN	ESH3-Z5	100113	NCR	NCR
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2015-05-14	2016-05-14
Rohde & Schwarz	CE Test software	EMC 32	V8.53	NCR	NCR

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, the worst margin reading as below:

**1.6 dB at 24.146190 MHz in the Neutral conducted mode**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cisp}$$


In BACL.,  $U_{(Lm)}$  is less than  $U_{cisp}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	26
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.0kPa


*The testing was performed by Mike Hu on 2015-07-13*

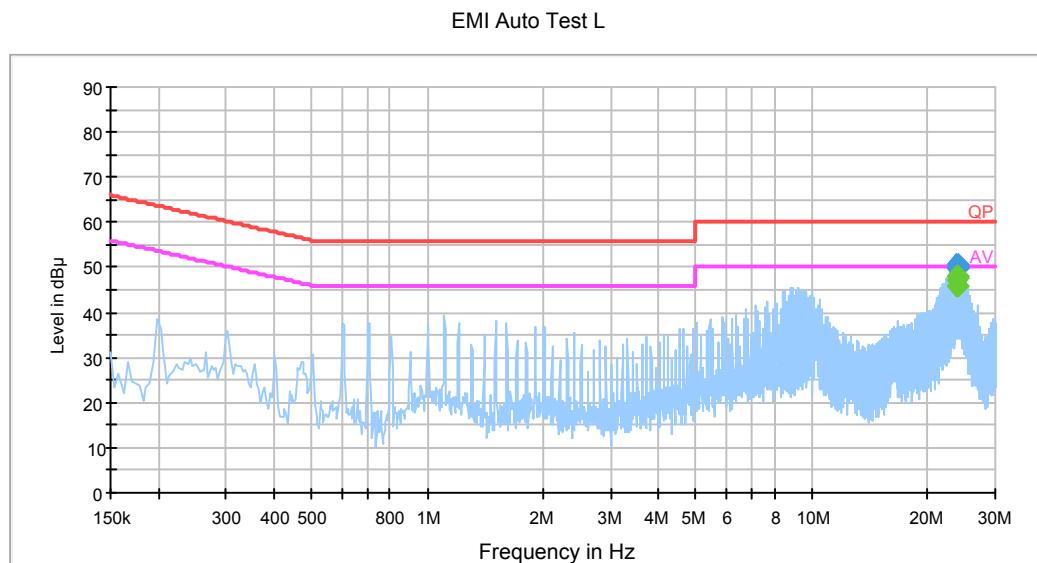**EUT Operation Mode: Downloading****AC 120V/60 Hz, Line**

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Corrected Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Remark (PK/QP/Ave.)
23.730490	49.8	20.1	60.0	10.2	QP
23.730490	45.9	20.1	50.0	4.1	Ave.
23.739430	50.5	20.1	60.0	9.5	QP
23.739430	47.3	20.1	50.0	2.7	Ave.
23.839930	50.6	20.1	60.0	9.4	QP
23.839930	48.0	20.1	50.0	2.0	Ave.
23.942930	49.8	20.1	60.0	10.2	QP
23.942930	46.0	20.1	50.0	4.0	Ave.
24.041430	50.4	20.1	60.0	9.6	QP
24.041430	47.7	20.1	50.0	2.3	Ave.
24.140490	50.8	20.1	60.0	9.2	QP
24.140490	48.2	20.1	50.0	1.8	Ave.

## AC 120V/60 Hz, Neutral

EMI Auto Test N

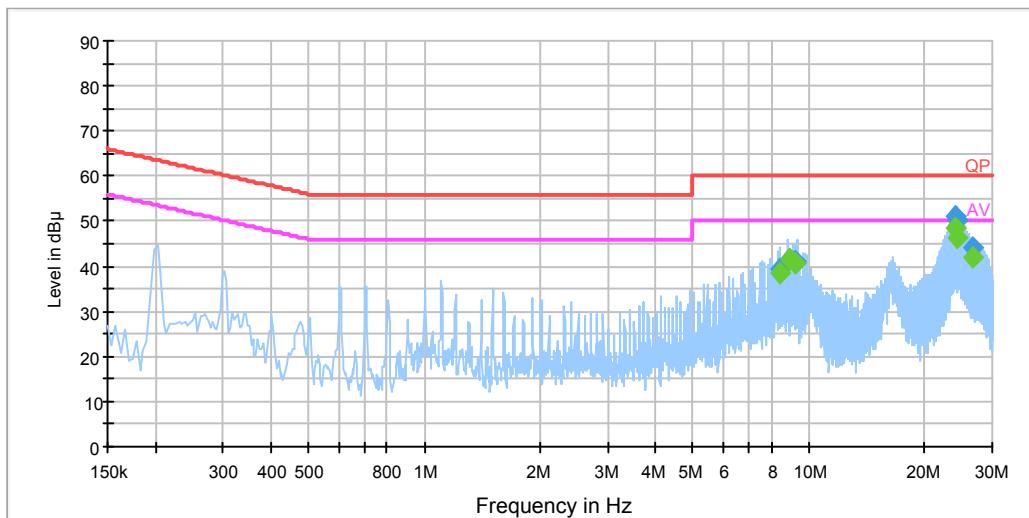

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Corrected Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Remark (PK/QP/Ave.)
8.448810	39.3	20.1	60.0	20.7	QP
8.448810	38.6	20.1	50.0	11.4	Ave.
8.953250	41.5	20.1	60.0	18.5	QP
8.953250	41.5	20.1	50.0	8.5	Ave.
9.253630	40.9	20.1	60.0	19.1	QP
9.253630	40.8	20.1	50.0	9.2	Ave.
24.146190	51.0	20.1	60.0	9.0	QP
24.146190	48.4	20.1	50.0	1.6	Ave.
24.248690	50.3	20.1	60.0	9.7	QP
24.248690	46.2	20.1	50.0	3.8	Ave.
26.758510	44.0	20.2	60.0	16.0	QP
26.758510	41.9	20.2	50.0	8.1	Ave.

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation
- 3) Margin = Limit – Corrected Amplitude

## FCC §15.109 - RADIATED SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.109


### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report

Frequency	Polarity	Measurement uncertainty
30 MHz~200 MHz	Horizontal	4.62 dB (k=2, 95% level of confidence)
	Vertical	4.54 dB (k=2, 95% level of confidence)
200 MHz~1 GHz	Horizontal	4.84 dB (k=2, 95% level of confidence)
	Vertical	5.91 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	Horizontal/Vertical	4.68 dB (k=2, 95% level of confidence)
Above 6 GHz	Horizontal/Vertical	4.92 dB (k=2, 95% level of confidence)

### EUT Setup

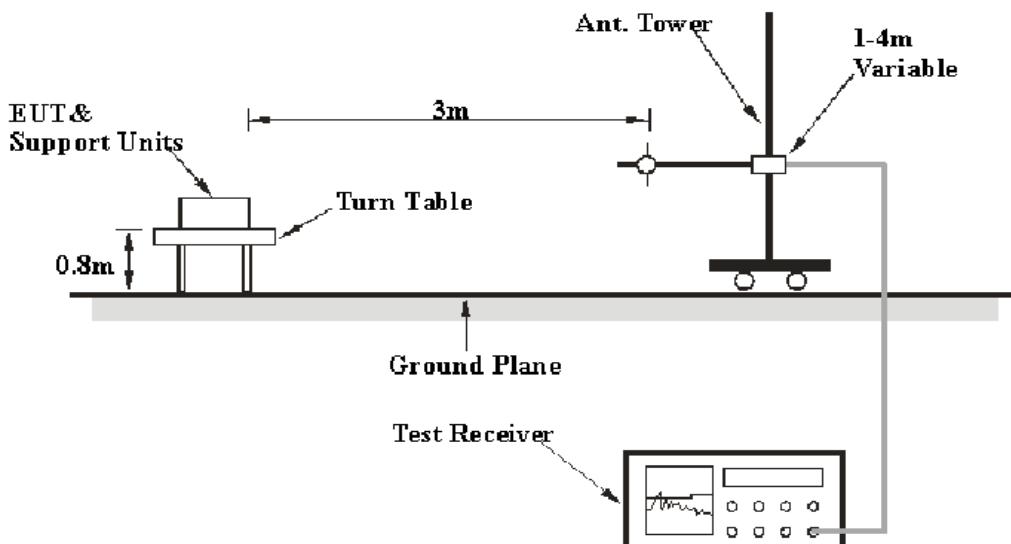

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The system was investigated from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2015-05-06	2016-05-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	NCR	NCR
TDK	Chamber	Chamber A	2#	2012-10-15	2015-10-15
TDK	Chamber	Chamber B	1#	2012-07-22	2015-07-22
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-11-12	2015-11-12
A.H.System	Horn Antenna	SAS-200/571	135	2013-02-10	2016-02-10
Mini	Pre-Amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-22
Rohde & Schwarz	Test software	EMC 32	V9.10.0.0	NCR	NCR

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B, the worst margin reading as below:

**7.52 dB at 42.5 MHz** in the **Vertical** polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cisp}}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{\text{cisp}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	26
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Mike Hu on 2015-07-13*

*EUT Operation Mode: Downloading***30 MHz – 6 GHz**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC Part15B	
	Reading (dB $\mu$ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB $\mu$ V/m)	Margin (dB)
42.5	47.68	QP	315	1.1	V	-15.2	32.48	40	7.52
43.4	42.77	QP	229	1.2	V	-15.9	26.87	40	13.13
58.5	47.29	QP	167	1.7	V	-19.9	27.39	40	12.61
60.66	44.62	QP	282	1.2	V	-19.8	24.82	40	15.18
336.0	32.82	QP	61	1.5	H	-12.0	31.82	46	14.18
619.8	39.04	QP	294	1.2	V	-7.3	31.74	46	14.26
1286.9	42.97	PK	234	1.3	H	-0.78	42.19	74	31.81
1286.9	24.32	Ave.	234	1.3	H	-0.78	23.54	54	30.46

Note:

- 1) Correction Factor=Antenna factor (RX) + cable loss – amplifier factor
- 2) Corrected Amplitude = Correction Factor + Reading
- 3) Margin = Limit - Corrected Amplitude

**PRODUCT SIMILARITY DECLARATION LETTER****LY Industrial Co., Limited**

Room 904, President Commercial Centre, 608 Nathan Road, Mongkok, Kowloon  
HongKong  
China

Phone:00852- 27711360

Fax:00852- 27711360

7/28/2015

**Product Similarity Declaration**

To Whom It May Concern,

We, LY Industrial Co., Limited, hereby declare that we have a product named as 3G Smart Phone (Model no: L8) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (DIG-4.0) on reports and certificate, all the models are identical schematics, except for the differences as below,

Trade name	Model name
LY L8	L8
Digifon DIG-4.0	DIG-4.0

No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Signature:

Leon cai

Leon Cai

Attestation Engineer

\*\*\*\*\* END OF REPORT \*\*\*\*\*