

FCC Radio Test Report

FCC ID: 2AE46-TX

Original Grant

Report No. : TB-FCC144561

Applicant : Yantai Hengtai Electronics Co., Ltd.

Equipment Under Test (EUT)

EUT Name : Wireless receiving and calling system

Model No. : APE700

Serial Model No. : Please see page 4.

Brand Name : SINGCALL

Receipt Date : 2015-06-18

Test Date : 2015-06-18 to 2015-06-23

Issue Date : 2015-06-23

Standards : FCC Part 15, Subpart C (15.231:2014)

Test Method : ANSI C63.10:2013

Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,

The EUT technically complies with the FCC requirements

Test/Witness Engineer :



Approved& Authorized :

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0

Contents

| | |
|---|-----------|
| CONTENTS..... | 2 |
| 1. GENERAL INFORMATION ABOUT EUT | 4 |
| 1.1 Client Information..... | 4 |
| 1.2 General Description of EUT (Equipment Under Test) | 4 |
| 1.3 Block Diagram Showing the Configuration of System Tested..... | 5 |
| 1.4 Description of Support Units | 5 |
| 1.5 Description of Test Mode..... | 5 |
| 1.6 Description of Test Software Setting | 6 |
| 1.7 Measurement Uncertainty | 6 |
| 1.8 Test Facility | 6 |
| 2. TEST SUMMARY..... | 8 |
| 3. TEST EQUIPMENT..... | 9 |
| 4. CONDUCTED EMISSION TEST | 10 |
| 4.1 Test Standard and Limit..... | 10 |
| 4.2 Test Setup..... | 10 |
| 4.3 Test Procedure..... | 10 |
| 4.4 Test Data..... | 11 |
| 5. RADIATED EMISSION TEST | 12 |
| 5.1 Test Standard and Limit..... | 12 |
| 5.2 Test Setup..... | 13 |
| 5.3 Test Procedure..... | 14 |
| 5.4 EUT Operating Condition | 15 |
| 4.5 Test Data..... | 15 |
| 6. BANDWIDTH | 21 |
| 6.1 Test Standard and Limit..... | 21 |
| 6.2 Test Setup..... | 21 |
| 6.3 Test Procedure..... | 21 |
| 6.4 EUT Operating Condition | 21 |
| 6.5 Test Data..... | 22 |

| | |
|--|-----------|
| 7. RELEASE TIME MEASUREMENT..... | 23 |
| 7.1 Test Standard and Limit..... | 23 |
| 7.3 Test Procedure..... | 23 |
| 7.4 EUT Operating Condition | 23 |
| 7.5 Test Data..... | 24 |
| 8. DUTY CYCLE | 25 |
| 8.1 Test Standard and Limit..... | 25 |
| 8.2 Test Setup..... | 25 |
| 8.3 Test Procedure..... | 25 |
| 8.4 EUT Operating Condition | 25 |
| 8.5 Test Data..... | 26 |
| 9. ANTENNA REQUIREMENT..... | 29 |
| 9.1 Standard Requirement..... | 29 |
| 9.2 Antenna Connected Construction | 29 |
| 9.3 Result..... | 29 |

1. General Information about EUT

1.1 Client Information

| | | |
|---------------------|---|--|
| Applicant | : | Yantai Hengtai Electronics Co., Ltd. |
| Address | : | Room 201, Building E, Yeda Industry and Technology Park, No. 300, Changjiang Road, Development Zone, Yantai City, Shandong Province, China |
| Manufacturer | : | Yantai Hengtai Electronics Co., Ltd. |
| Address | : | Room 201, Building E, Yeda Industry and Technology Park, No. 300, Changjiang Road, Development Zone, Yantai City, Shandong Province, China |


1.2 General Description of EUT (Equipment Under Test)

| | | |
|-------------------------------|----------------------|--|
| EUT Name | : | Wireless receiving and calling system |
| Models No. | : | APE700, APE560, APE520, APE330, APE730, APE830, APE510, APE100, APE160, SC-T180 |
| Brand Name | : | SINGCALL |
| Model Difference | : | All models are identical in the same PCB layout, interior structure and electrical circuits, The only difference is model name for commercial purpose. |
| Product Description | Operation Frequency: | 433.92 MHz |
| | Out Power: | 63.75 dBuV/m (PK Max.) 55.89 dBuV/m (AV Max.) |
| | Antenna Gain: | PCB Antenna(0 dBi) |
| | Modulation Type: | ASK |
| Power Supply | : | DC Voltage supplied from battery. |
| Power Rating | : | DC Battery: DC 6V by 2*Cell Battery. |
| Connecting I/O Port(S) | : | Please refer to the User's Manual |

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.3 Block Diagram Showing the Configuration of System Tested

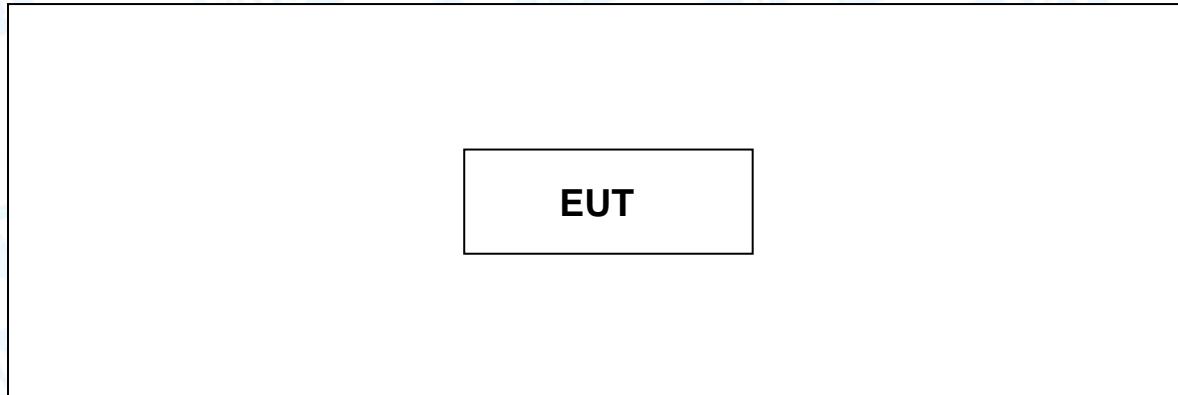

1.4 Description of Support Units

The EUT has been tested as an independent unit.

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

| Test Items | Note |
|-------------------|---------------------------|
| Radiated Emission | Continuously transmitting |
| Bandwidth | Continuously transmitting |
| Duty Cycle | Continuously transmitting |
| Release Time | Normal Mode |

Note:

- (1) During the testing procedure, the continuously transmitting mode was programmed by the customer.
- (2) The EUT is considered a portable unit, and it was pre-tested on the positioned of each 3 axis: X axis, Y axis and Z axis. The worst case was found positioned on Z-plane. There for only the test data of this Z-plane were used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of transmitting mode.

| | | |
|---|-------------------------------------|--------|
| 1 | Product SW/HW Version : | APE700 |
| 2 | Radio SW/HW Version: | N/A |
| 3 | Test SW Version: | N/A |
| 4 | RF Power Setting in Test SW: | DEF |

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| Test Item | Parameters | Expanded Uncertainty (U_{Lab}) |
|--------------------|---|------------------------------------|
| Conducted Emission | Level Accuracy: 9kHz~150kHz 150kHz to 30MHz | ± 3.42 dB ± 3.42 dB |
| Radiated Emission | Level Accuracy: 9kHz to 30 MHz | ± 4.60 dB |
| Radiated Emission | Level Accuracy: 30MHz to 1000 MHz | ± 4.40 dB |
| Radiated Emission | Level Accuracy: Above 1000MHz | ± 4.20 dB |

1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at:

1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

FCC List No.: (811562)

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

2. Test Summary

| FCC Part 15 Subpart (15.231) | | | |
|------------------------------|---------------------|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| 15.203 | Antenna Requirement | PASS | |
| 15.231 | Conducted Emission | N/A | |
| | Release Time | PASS | |
| | Radiation Emission | PASS | |
| | 20 dB Bandwidth | PASS | |
| | Duty Cycle | PASS | |

Note: N/A is an abbreviation for Not Applicable.

3. Test Equipment

| Conducted Emission Test | | | | | |
|--------------------------------|----------------------------------|------------------|-------------------|------------------|----------------------|
| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Due Date |
| EMI Test Receiver | Rohde & Schwarz | ESCI | 100321 | Aug. 08, 2014 | Aug. 07, 2015 |
| RF Switching Unit | Compliance Direction Systems Inc | RSU-A4 | 34403 | Aug. 08, 2014 | Aug. 07, 2015 |
| AMN | SCHWARZBECK | NNBL 8226-2 | 8226-2/164 | Aug. 08, 2014 | Aug. 07, 2015 |
| LISN | Rohde & Schwarz | ENV216 | 101131 | Aug. 08, 2014 | Aug. 07, 2015 |
| Radiation Emission Test | | | | | |
| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Due Date |
| Spectrum Analyzer | Agilent | E4407B | MY45106456 | Sep. 01, 2014 | Aug. 31, 2015 |
| EMI Test Receiver | Rohde & Schwarz | ESCI | 100010/007 | Aug. 08, 2014 | Aug. 07, 2015 |
| Bilog Antenna | ETS-LINDGREN | 3142E | 00117537 | Mar. 28, 2015 | Mar. 27, 2016 |
| Bilog Antenna | ETS-LINDGREN | 3142E | 00117542 | Mar. 28, 2015 | Mar. 27, 2016 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00143207 | Mar. 28, 2015 | Mar. 27, 2016 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00143209 | Mar. 28, 2015 | Mar. 27, 2016 |
| Pre-amplifier | Sonoma | 310N | 185903 | Mar. 28, 2015 | Mar. 27, 2016 |
| Pre-amplifier | HP | 8447B | 3008A00849 | Mar. 28, 2015 | Mar. 27, 2016 |
| Cable | HUBER+SUHNER | 100 | SUCOFLEX | Mar. 28, 2015 | Mar. 27, 2016 |
| Positioning Controller | ETS-LINDGREN | 2090 | N/A | N/A | N/A |

4. Conducted Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard
FCC Part 15.207

4.1.2 Test Limit


Conducted Emission Test Limit

| Frequency | Maximum RF Line Voltage (dB μ V) | |
|---------------|--------------------------------------|---------------|
| | Quasi-peak Level | Average Level |
| 150kHz~500kHz | 66 ~ 56 * | 56 ~ 46 * |
| 500kHz~5MHz | 56 | 46 |
| 5MHz~30MHz | 60 | 50 |

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Setup

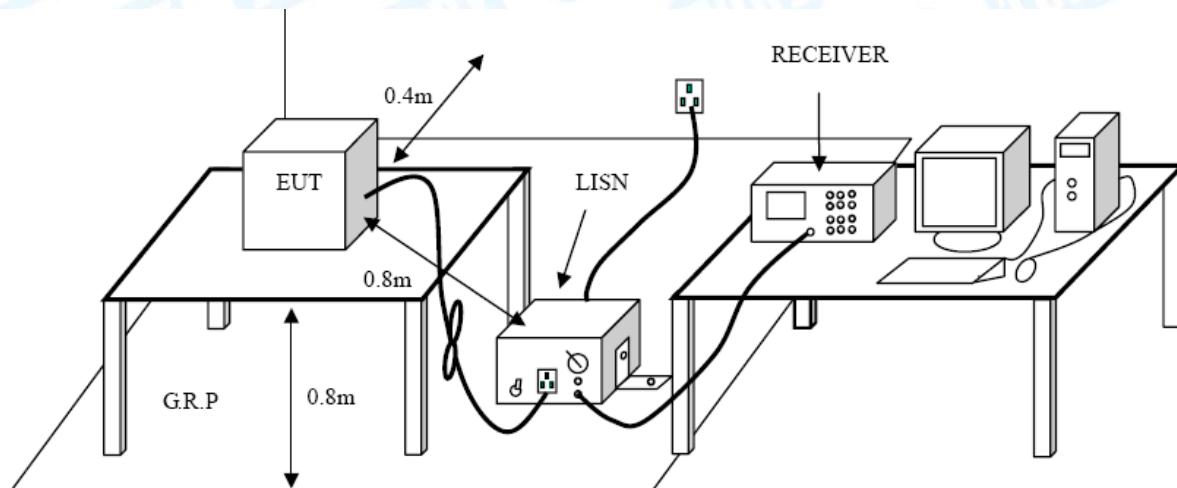

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

4.4 Test Data

The test is not applicable.

5. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.231(b)

5.1.2 Test Limit

According to FCC 15.231(b) requirement:

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

| Fundamental Frequency (MHz) | Field Strength of Fundamental (microvolt/meter) at 3m | Field Strength of Spurious Emissions (microvolt/meter) at 3m |
|-----------------------------|---|--|
| 40.66~40.70 | 2250 | 225 |
| 70~130 | 1250 | 125 |
| 130~174 | 1250 to 3750(**) | 125 to 375(**) |
| 174~260 | 3750 | 375 |
| 260~470 | 3750 to 12500(**) | 375 to 1250(**) |
| Above 470 | 12500 | 1250 |

** Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

(1) for the band 130~174 MHz, uV/m at 3 meters= $56.81818(F)-6136.3636$;

(2) for the band 260~470 MHz, uV/m at 3 meter= $41.6667(F)-7083.3333$.

(3) The maximum permitted unwanted emissions level is 20 dB below the maximum permitted fundamental level. In addition field strength of any emissions which appear inside of the restriction band shall not exceed the general radiated emissions limits in Section 15.209(a).

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 2400/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |

| | | |
|-----------|-----|---|
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


So the field strength of emission limits have been calculated in below table.

| Fundamental Frequency (MHz) | Field Strength of Fundamental (microvolt/meter) at 3m |
|-----------------------------|---|
| 433.92 MHz | 80.83 (Average) |
| 433.92 MHz | 100.83 (Peak) |


5.2 Test Setup

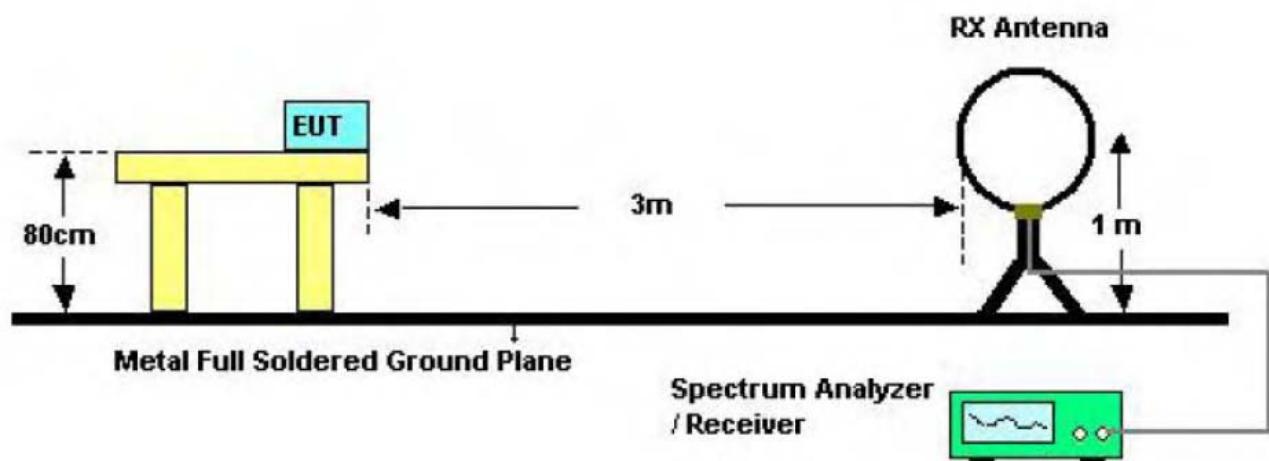

Bellow 30MHz Test Setup

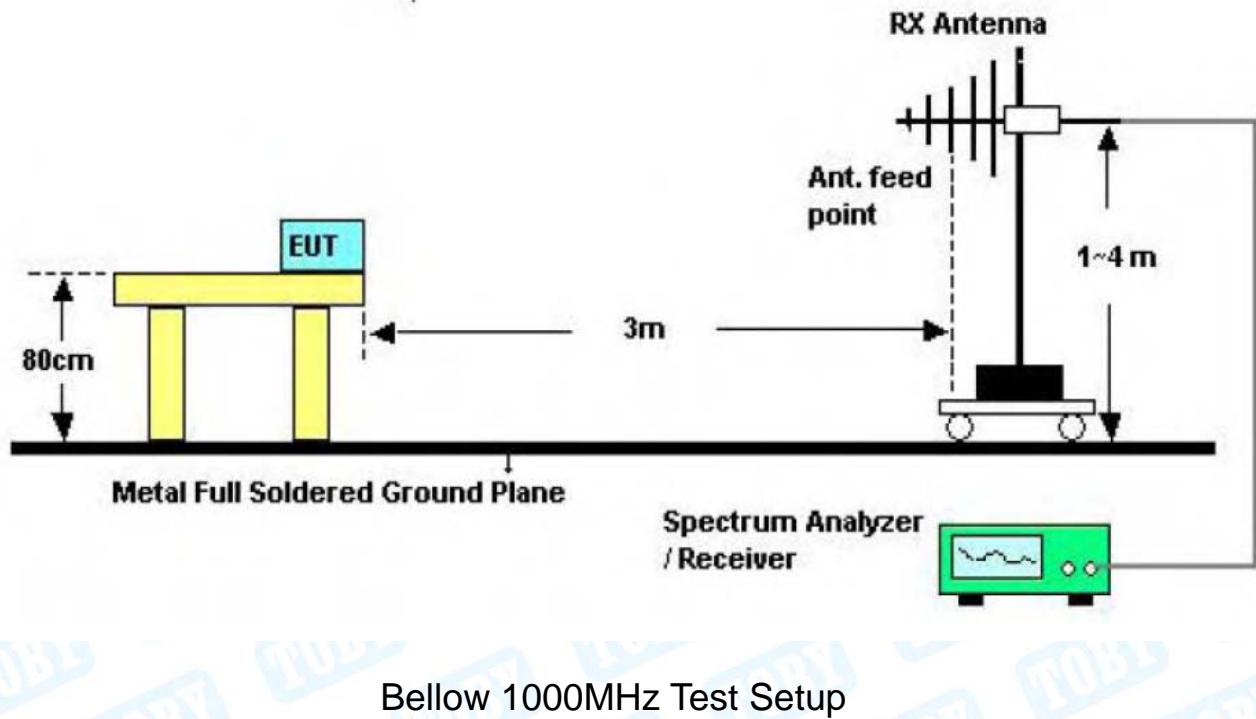

Bellow 1000MHz Test Setup

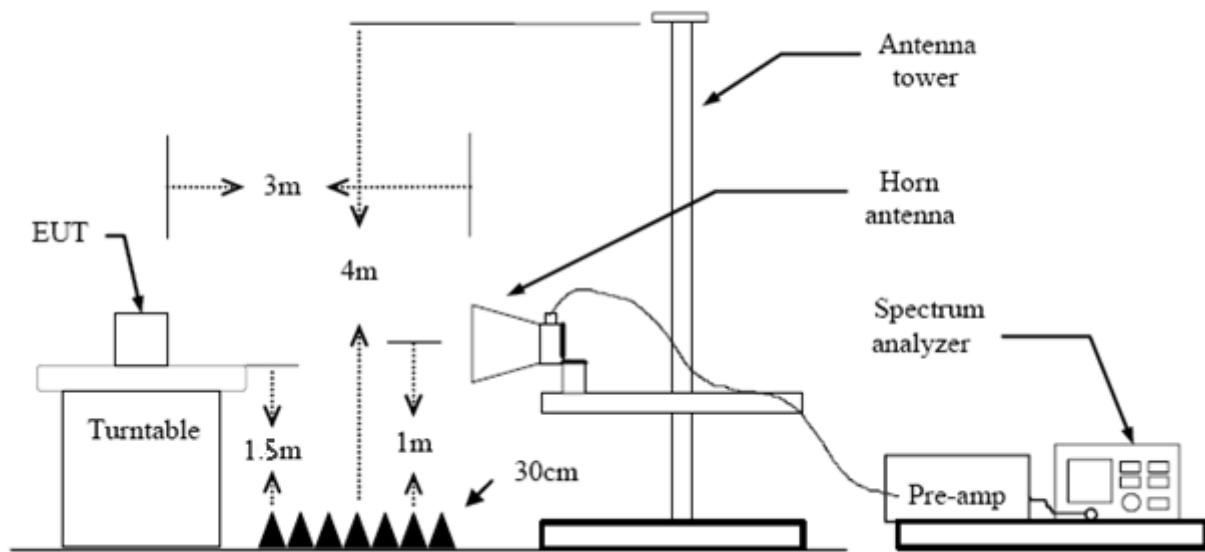

Above 1GHz Test Setup

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz. The EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by

3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.

- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use $VBW=120$ kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use $RBW=1$ MHz and $VBW=3$ MHz with Peak Detector for Peak Values, and use $RBW=1$ MHz and $VBW=10$ Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.


5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

4.5 Test Data


Radiated Emission Below 1 GHz

| | | | |
|----------------------|---------------------------------------|---------------------------|--------|
| EUT: | Wireless receiving and calling system | Model Name : | APE700 |
| Temperature: | 25 °C | Relative Humidity: | 55% |
| Test Voltage: | DC 6V | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX Mode | | |
| Remark: | | | |

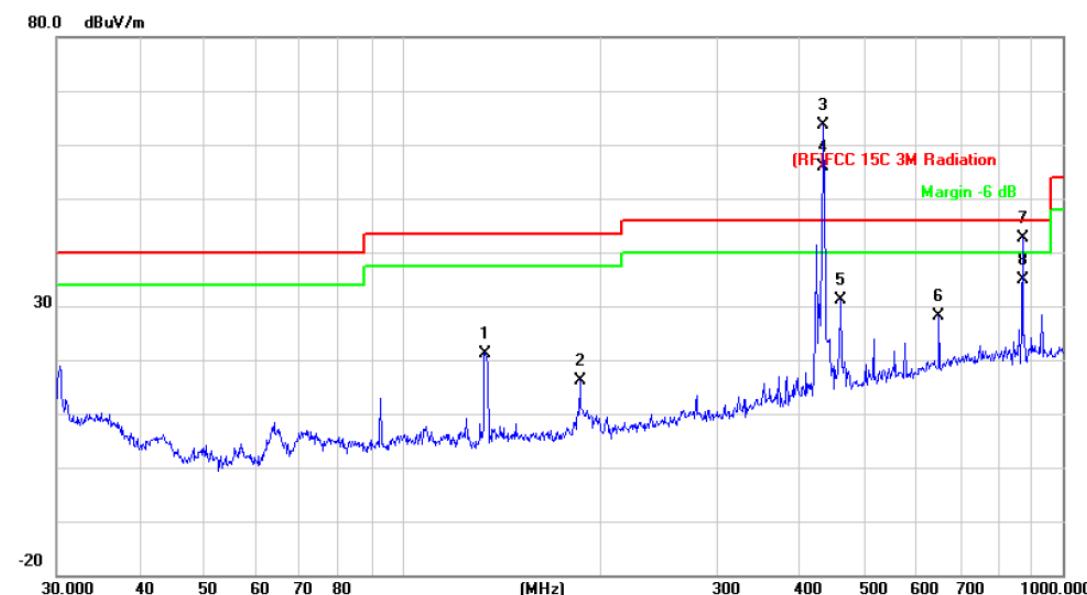

| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Over | Antenna | Table | | |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|-------------|--------|---------|
| | | | Level | Factor | ment | | | | | | |
| | | | MHz | dBuV | dB/m | dBuV/m | dB | Detector | cm | degree | Comment |
| 1 | | 133.6188 | 43.23 | -22.10 | 21.13 | 43.50 | -22.37 | peak | | | |
| 2 | | 185.7882 | 37.00 | -20.76 | 16.24 | 43.50 | -27.26 | peak | | | |
| 3 | * | 434.0649 | 76.51 | -12.76 | 63.75 | 100.83 | -37.08 | peak | Fundamental | | |
| 4 | X | 434.0651 | 68.65 | -12.76 | 55.89 | 80.83 | -24.94 | AVG | Fundamental | | |
| 5 | | 460.7271 | 43.32 | -12.09 | 31.23 | 46.00 | -14.77 | peak | | | |
| 6 | | 649.6597 | 36.95 | -8.74 | 28.21 | 46.00 | -17.79 | peak | | | |
| 7 | ! | 869.1299 | 48.84 | -6.18 | 42.66 | 46.00 | -3.34 | peak | Harmonics | | |
| 8 | | 869.1299 | 40.98 | -6.18 | 34.80 | 46.00 | -11.20 | AVG | Harmonics | | |

Emission Level= Read Level+ Correct Factor

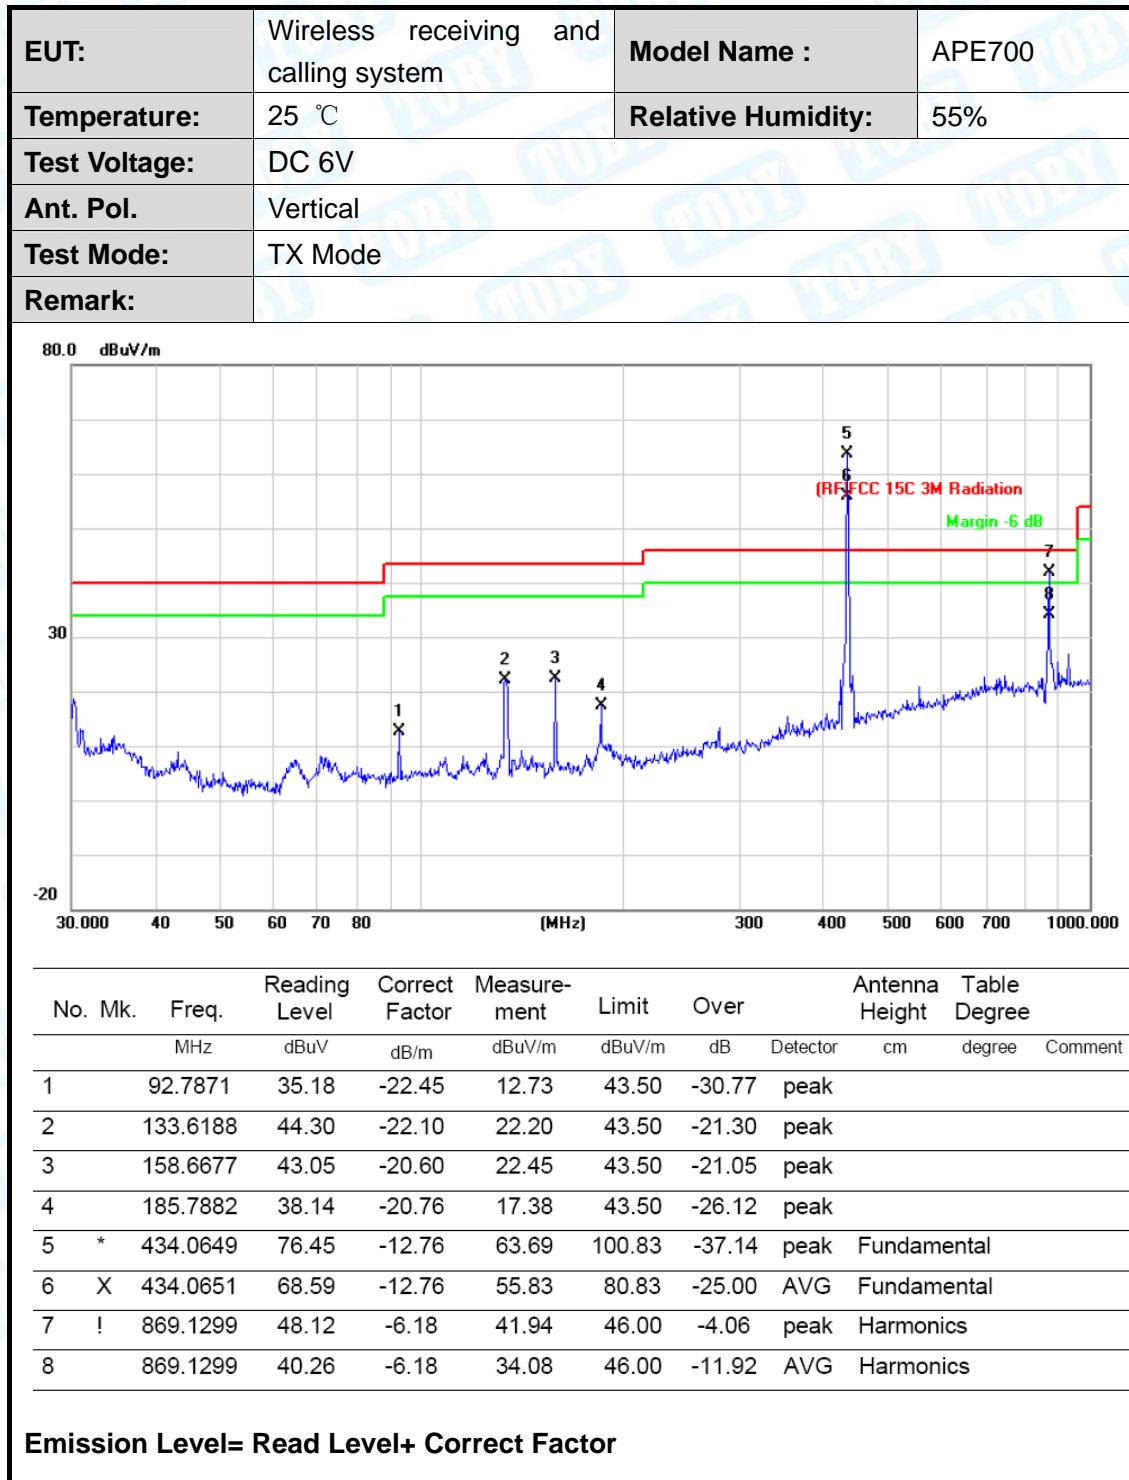


Note:

- (1) All Readings are Peak Value.
- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss
- (3) The QP measurement was not performed when the peak measured data under the limit of QP detection.
- (4) Average Value=Peak Value-7.86

Above 1G


| | | | |
|----------------------|---------------------------------------|---------------------------|--------|
| EUT: | Wireless receiving and calling system | Model Name : | APE700 |
| Temperature: | 25 °C | Relative Humidity: | 55% |
| Test Voltage: | DC 6V | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX Mode | | |
| Remark: | | | |

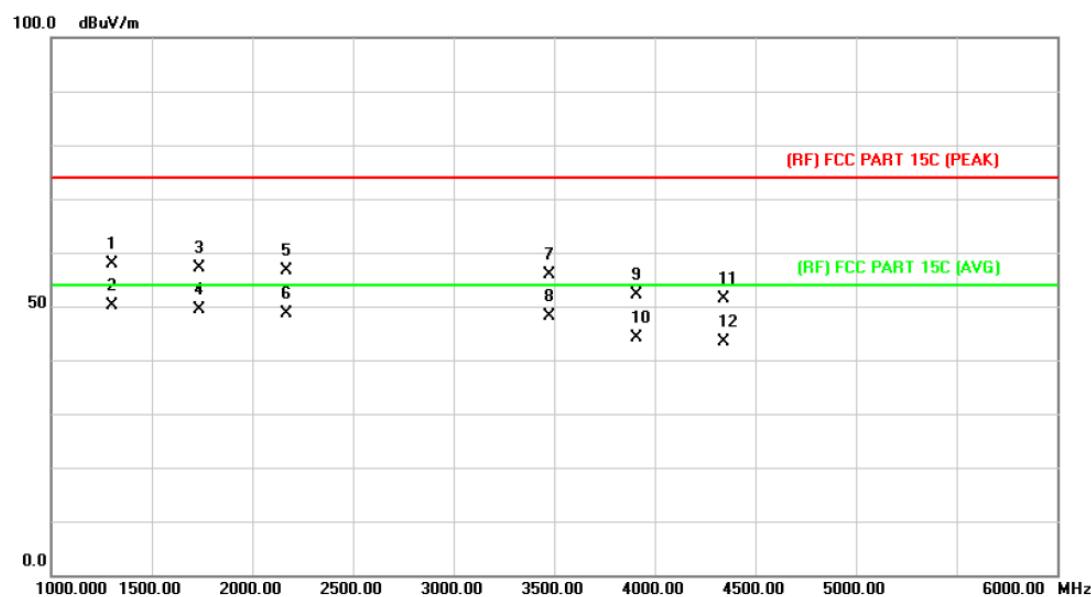

| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Over |
|-----|-----|----------|---------|---------|----------|-------|-------------|
| | | | Level | Factor | ment | | |
| | | MHz | dBuV | dB/m | dBuV/m | dB | Detector |
| 1 | | 1300.000 | 63.37 | -5.39 | 57.98 | 74.00 | -16.02 peak |
| 2 | * | 1300.000 | 55.51 | -5.39 | 50.12 | 54.00 | -3.88 AVG |
| 3 | | 1735.000 | 60.30 | -3.13 | 57.17 | 74.00 | -16.83 peak |
| 4 | | 1735.000 | 52.44 | -3.13 | 49.31 | 54.00 | -4.69 AVG |
| 5 | | 2170.000 | 56.77 | -0.16 | 56.61 | 74.00 | -17.39 peak |
| 6 | | 2170.000 | 48.91 | -0.16 | 48.75 | 54.00 | -5.25 AVG |
| 7 | | 3475.000 | 49.23 | 6.64 | 55.87 | 74.00 | -18.13 peak |
| 8 | | 3475.000 | 41.37 | 6.64 | 48.01 | 54.00 | -5.99 AVG |
| 9 | | 3910.000 | 43.29 | 8.78 | 52.07 | 74.00 | -21.93 peak |
| 10 | | 3910.000 | 35.43 | 8.78 | 44.21 | 54.00 | -9.79 AVG |
| 11 | | 4340.000 | 40.44 | 10.87 | 51.31 | 74.00 | -22.69 peak |
| 12 | | 4340.000 | 32.58 | 10.87 | 43.45 | 54.00 | -10.55 AVG |

Emission Level= Read Level+ Correct Factor

| | | | |
|----------------------|---------------------------------------|---------------------------|--------|
| EUT: | Wireless receiving and calling system | Model Name : | APE700 |
| Temperature: | 25 °C | Relative Humidity: | 55% |
| Test Voltage: | DC 6V | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX Mode | | |
| Remark: | | | |

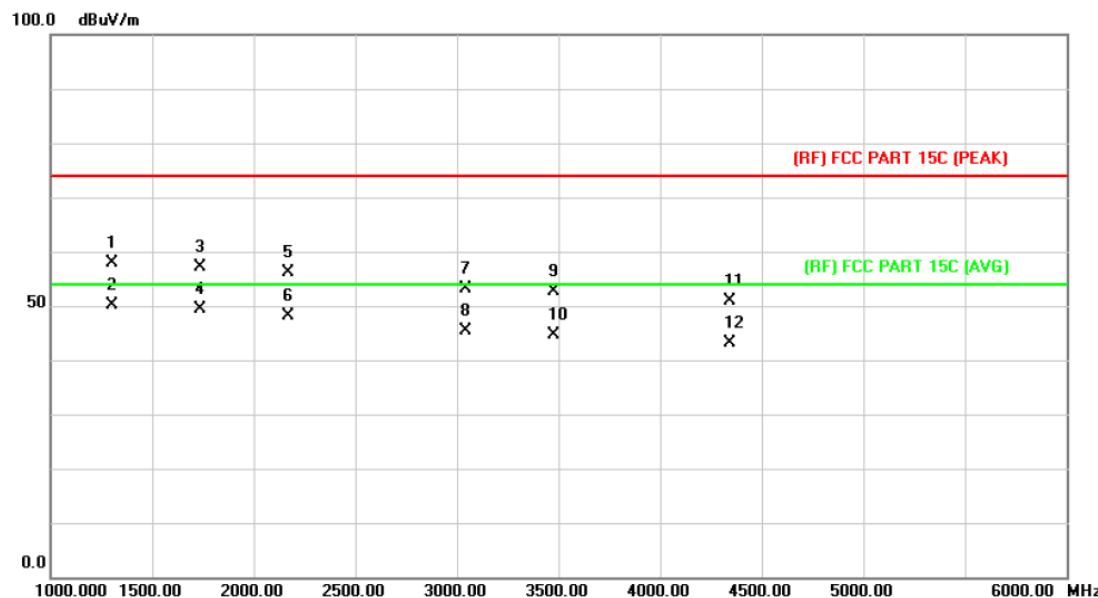

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over |
|-----|-----|----------|---------------|----------------|--------------|-------|-------------|
| | | MHz | dBuV | dB/m | dBuV/m | dB | Detector |
| 1 | | 1300.000 | 63.33 | -5.39 | 57.94 | 74.00 | -16.06 peak |
| 2 | * | 1300.000 | 55.47 | -5.39 | 50.08 | 54.00 | -3.92 AVG |
| 3 | | 1735.000 | 60.30 | -3.13 | 57.17 | 74.00 | -16.83 peak |
| 4 | | 1735.000 | 52.44 | -3.13 | 49.31 | 54.00 | -4.69 AVG |
| 5 | | 2170.000 | 56.26 | -0.16 | 56.10 | 74.00 | -17.90 peak |
| 6 | | 2170.000 | 48.40 | -0.16 | 48.24 | 54.00 | -5.76 AVG |
| 7 | | 3040.000 | 48.76 | 4.37 | 53.13 | 74.00 | -20.87 peak |
| 8 | | 3040.000 | 40.96 | 4.37 | 45.33 | 54.00 | -8.67 AVG |
| 9 | | 3475.000 | 45.96 | 6.64 | 52.60 | 74.00 | -21.40 peak |
| 10 | | 3475.000 | 38.10 | 6.64 | 44.74 | 54.00 | -9.26 AVG |
| 11 | | 4340.000 | 40.11 | 10.87 | 50.98 | 74.00 | -23.02 peak |
| 12 | | 4340.000 | 32.25 | 10.87 | 43.12 | 54.00 | -10.88 AVG |

Emission Level= Read Level+ Correct Factor

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV. And AV is calculated by the following:

Average =Peak Value + 20log(Duty Cycle), Final AV=PK-7.86

(2) Emission Level= Reading Level + Probe Factor +Cable Loss

(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Pulse Desensitization Correction Factor

Note:

(1)The shortest Pulse Width (PW)= 0.475ms

(2) $2/PW=2/0.475$ (ms)= 4.21 kHz<100 kHz

Because $2/PW<RBW$, so the PDCF is not needed.

6. Bandwidth

6.1 Test Standard and Limit

6.1.1 Test Standard


FCC Part 15.231

6.1.2 Test Limit

The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. So the emission bandwidth limits have been calculated in below table.

| Fundamental Frequency | 20 dB Bandwidth Limits (MHz) |
|-----------------------|------------------------------|
| 433.92 MHz | 1.0848 |

6.2 Test Setup

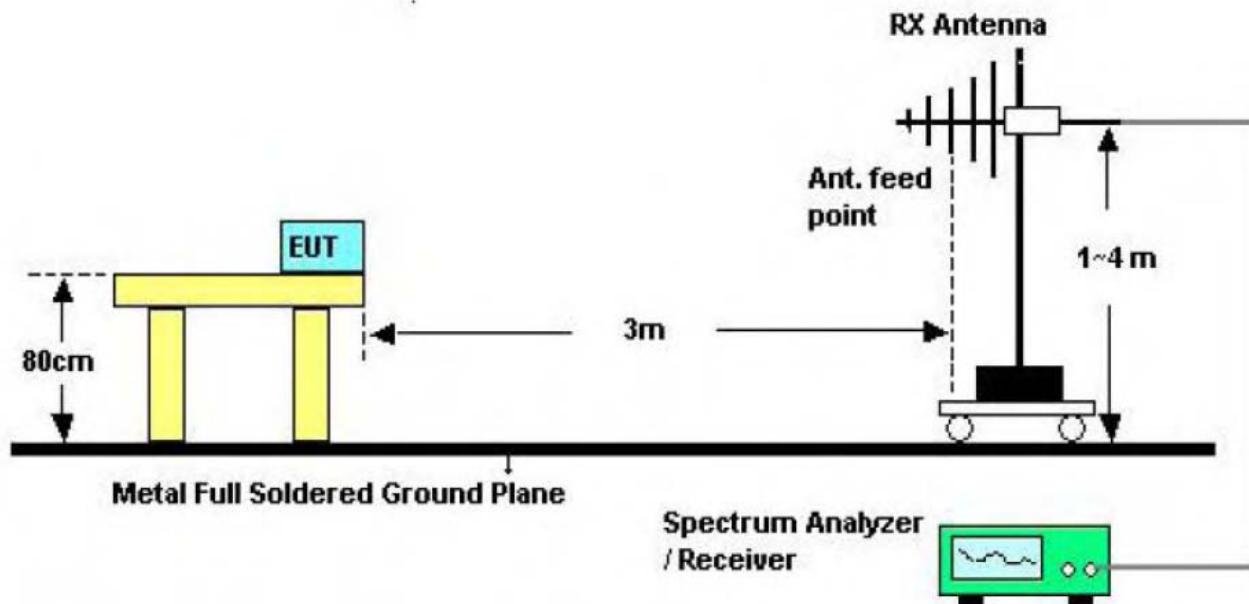

6.3 Test Procedure


- (1) Set Spectrum Analyzer Center Frequency= Fundamental Frequency, RBW=10 kHz, VBW= 30 kHz, Span= 1 MHz.
- (2) Measured the spectrum width with power higher than 20 dB below carrier.

6.4 EUT Operating Condition

The Equipment Under Test was Programmed to be in continuously transmitting mode.

6.5 Test Data

| Frequency (MHz) | 20 dBc Bandwidth (kHz) | 99% OBW (kHz) | Result |
|-----------------|------------------------|---------------|--------|
| 433.92 | 55.603 | 80.4954 | PASS |

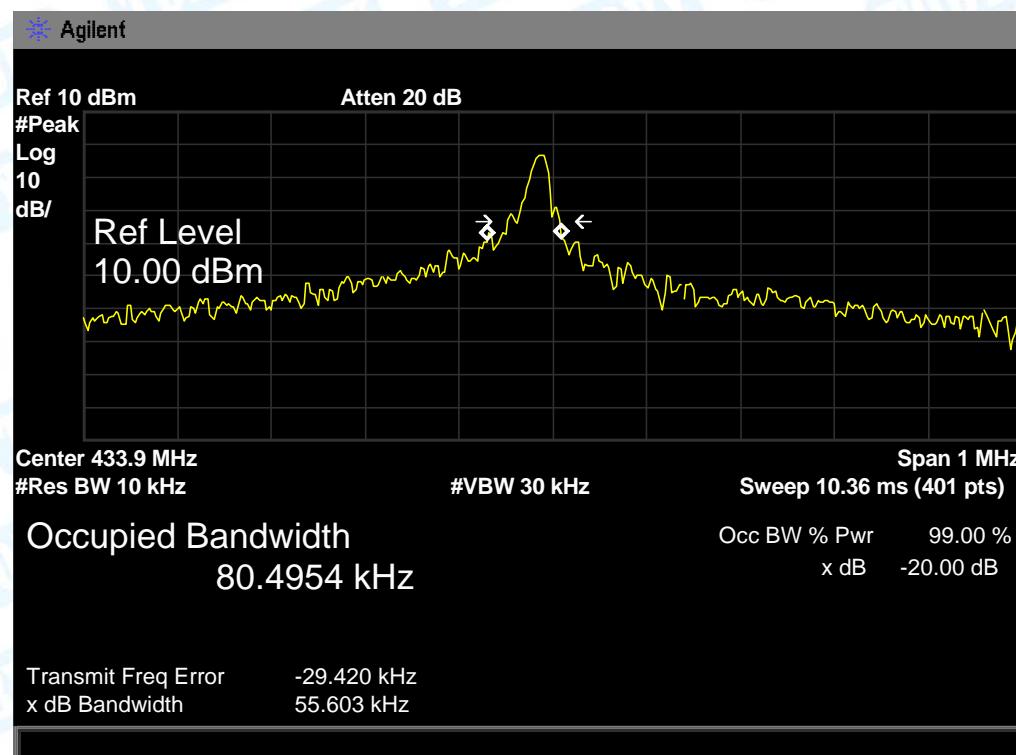

7. Release Time Measurement

7.1 Test Standard and Limit


7.1.1 Test Standard

FCC Part 15.231 (a)(1)

7.1.2 Test Limit

According to FCC Part 15.231 (a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

7.2 Test Setup

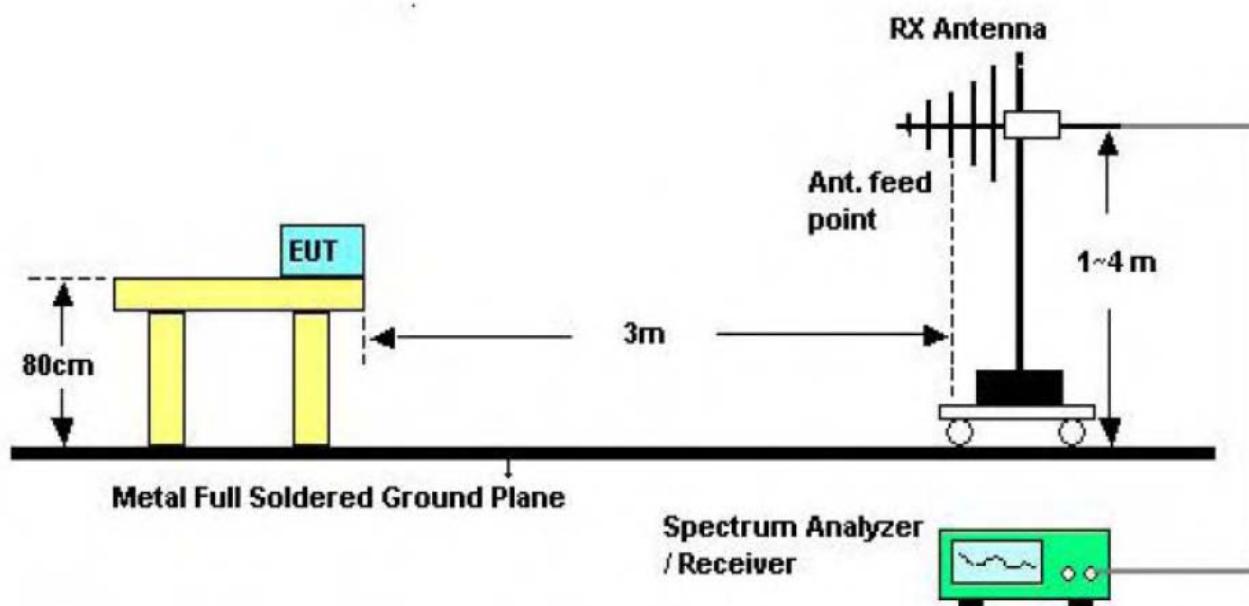

7.3 Test Procedure


- (1) Setup the EUT as show in the block diagram above.
- (2) Set Spectrum Analyzer Centre Frequency= Fundamental Frequency, RBW=100 kHz, VBW= 300 kHz, Span= 0 Hz.
- (3) Setup the EUT as normal operation and press Transmitter button.
- (4) Set Spectrum Analyzer View, Delta Mark time.

7.4 EUT Operating Condition

The EUT was set to work in transmitting mode.

7.5 Test Data

| Release Time (s) | Limit (s) | Result |
|---------------------|--------------|--------|
| 0.387 | 5 | PASS |

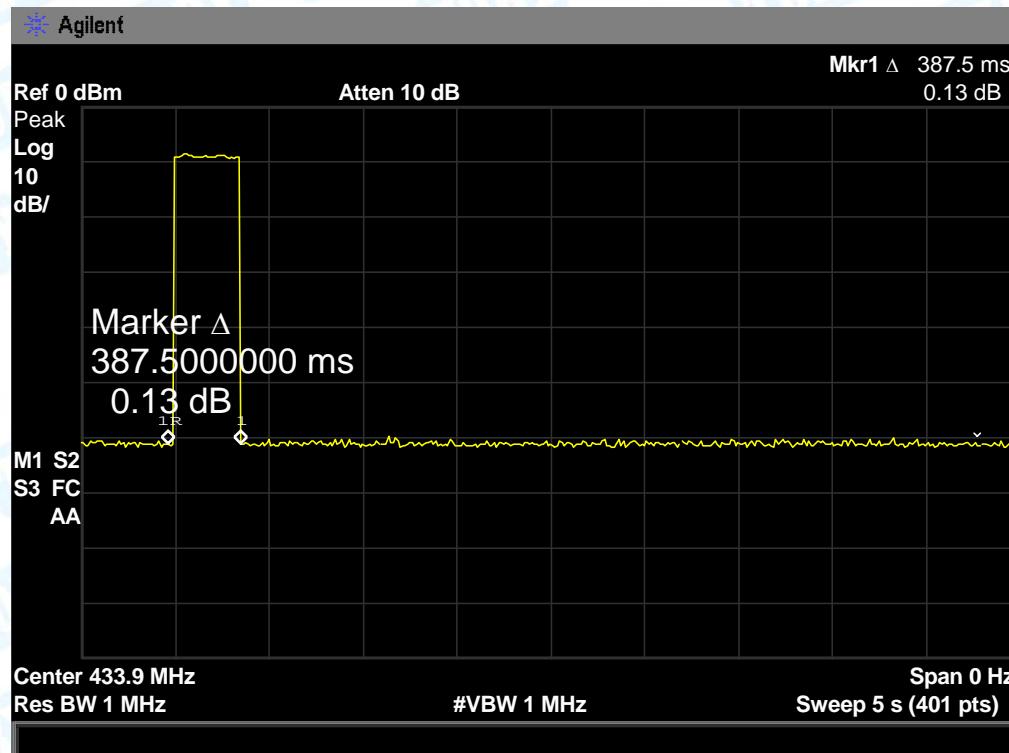


8. Duty Cycle

8.1 Test Standard and Limit

8.1.1 Test Standard
FCC Part 15.231

8.2 Test Setup

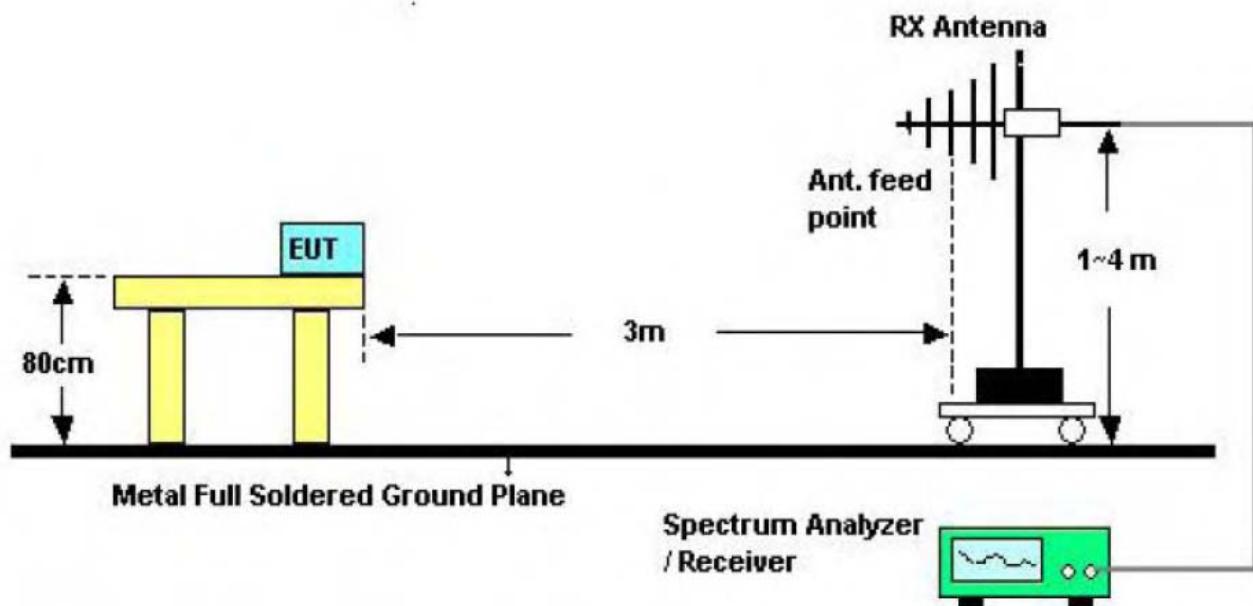

8.3 Test Procedure

- (1) The EUT was placed on a turntable which is 0.8m above ground plane.
- (2) Set EUT operating in continuous transmitting mode.
- (3) Set the Spectrum Analyzer to the transmitter carrier frequency, and set the spectrum analyzer resolution bandwidth (RBW) to 100 kHz and video bandwidth (VBW) to 300 kHz, Span was set to 0 Hz.
- (4) The Duty Cycle was measured and recorded.

8.4 EUT Operating Condition

The EUT was programmed to be in transmitting mode.

8.5 Test Data

Please refer the following pages:

Plot 1&Plot 2: transmit once in 100ms, and each cycle is 49.75 ms there are two kinds of pulse in each cycle, the large pulses total 11, the small pulses total 14

Plot 3: One large pulse in a time period of 1.225 ms


Plot 4: One small pulse in a time period of 0.475 ms.

Duty Cycle=ON/Total=(11*1.225+14*0.475)/49.75=20.125/49.75=40.45%


20 log(Duty Cycle)=-7.86

Average=Peak Value+ 20log(Duty Cycle), AV=PK-7.86


Plot 1

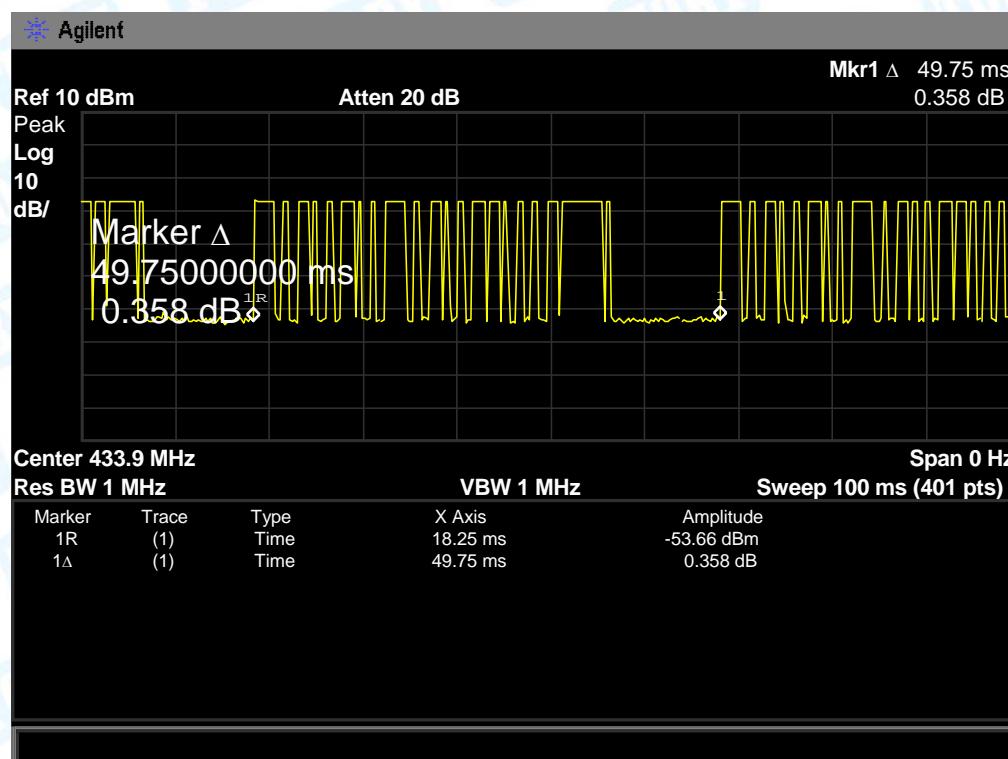


Plot 2

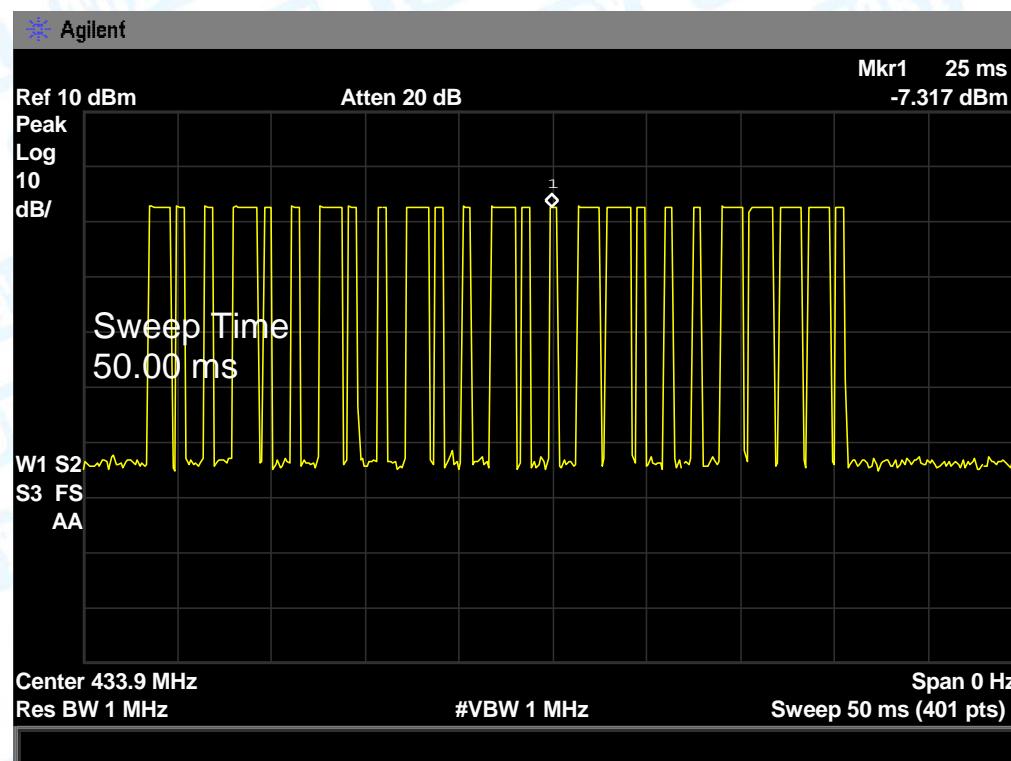

Plot 3

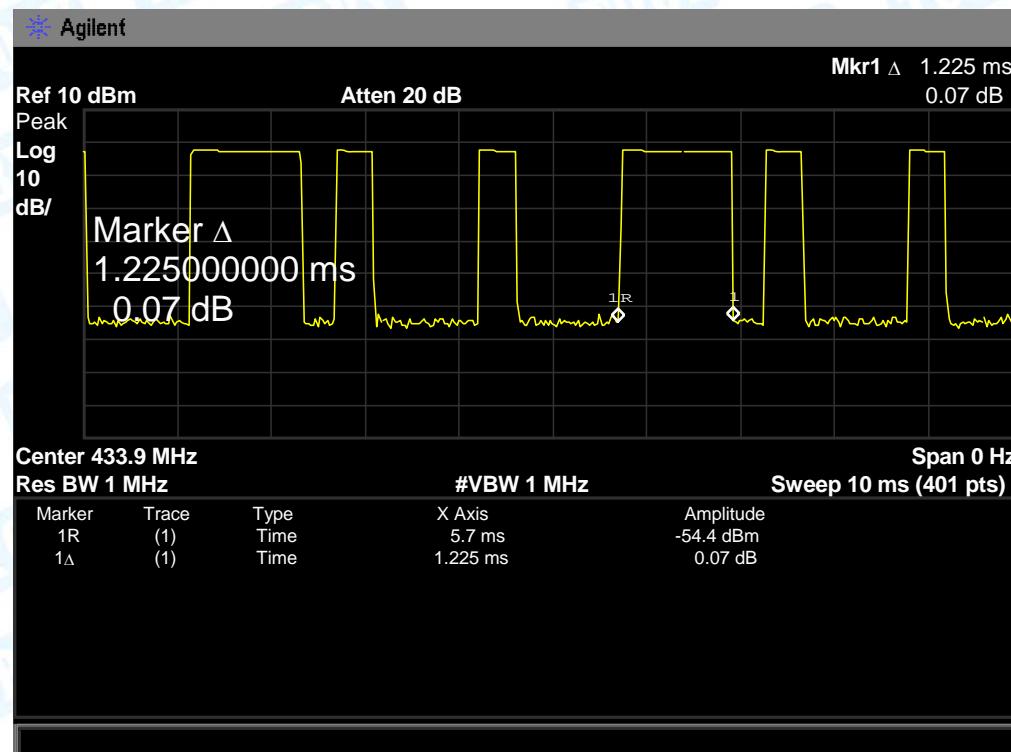

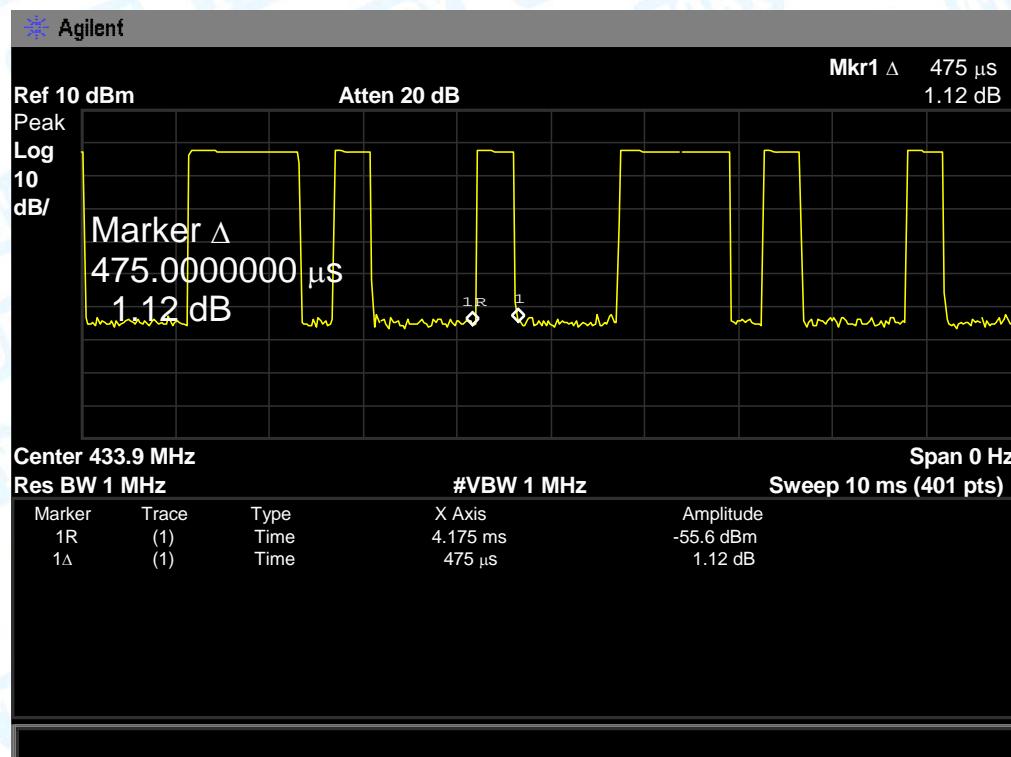Plot 4

9. Antenna Requirement

9.1 Standard Requirement

9.1.1 Standard

FCC Part 15.203

9.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

9.3 Result

The EUT antenna is a PCB Antenna. It complies with the standard requirement.

| Antenna Type |
|--|
| <input checked="" type="checkbox"/> Permanent attached antenna |
| <input type="checkbox"/> Unique connector antenna |
| <input type="checkbox"/> Professional installation antenna |