

Report No.: EED32H001048 Page 1 of 35

TEST REPORT

Product IR Thermometer

Trade mark : CliniCloud : SPL1024 Model/Type reference

Serial Number : N/A

Report Number EED32H001048 **FCC ID** : 2AE7C-SPL1024 Date of Issue: : Sep. 02, 2015

Test Standards : 47 CFR Part 15Subpart C (2014)

Test result : PASS

Prepared for:

CliniCloud Inc.

Level 1, 520 Bourke Street, Melbourne, VIC 3000, Australia

Prepared by:

Centre Testing International Group Co., Ltd. Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China

> TEL: +86-755-3368 3668 FAX: +86-755-3368 3385

Tested by:

Reviewed by:

Date:

Sep. 02, 2015

Sheek Luo

Lab supervisor

Check No.:2254787176









Page 2 of 35

2 Version

Version No.	Date	Description
00	Sep. 02, 2015	Original















































































Page 3 of 35

3 Test Summary

Test Item	Test Requirement	Test method	Result	
Antenna Requirement	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS	
AC Power Line Conducted Emission	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	PASS	
Conducted Peak Output Power	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS	
6dB Occupied Bandwidth	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS	
Power Spectral Density	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS	
Band-edge for RF Conducted Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS	
RF Conducted Spurious Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS	
Radiated Spurious Emissions	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS	
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS	

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

























































Page 4 of 35

4 Content

1		PAGE						
2	VERSIO	N	•••••		••••••	•••••	•••••	2
3	TEST S	UMMARY				•••••		3
4	CONTE	NT						4
5		EQUIREMENT						
3								
		ST SETUP For Conducted te						
		For Radiated Em						
		For Conducted Em						
		ST ENVIRONMENT.						
	5.3 TE	ST CONDITION						6
6	GENER	AL INFORMATIO)N	•••••	•••••	•••••	•••••	7
	6.1 CL	IENT INFORMATION	I					7
	6.2 GE	NERAL DESCRIPTION	ON OF EUT					7
		ODUCT SPECIFICA						
		SCRIPTION OF SUF						
		ST LOCATION						
		ST FACILITY						
		NORMALITIES FRO						
		HER INFORMATION						
		ASUREMENT UNCE						
7	FOLIEN	MENT LIST						10
		TECHNICAL REC						
8								
	Appendi	ix A) 6dB Occupie	ed Bandwidth.					13
		ix B) Conducted F ix C) Band-edge f						
		ix C) Bariu-euge i ix D) RF Conduct						
		ix E) Power Spec	•					
		ix F) Antenna Red						
	Appendi	ix G) Restricted b	ands around	fundamental f	requency (Rad	diated)/Radiate	ed Spurious L	Emissions24
Pł	HOTOGRAF	PHS OF TEST SE	ETUP	•••••	•••••	•••••	•••••	28
Ρŀ	HOTOGRAF	PHS OF EUT CO	NSTRUCTIO	NAL DETAILS	S			29
•								




Page 5 of 35

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

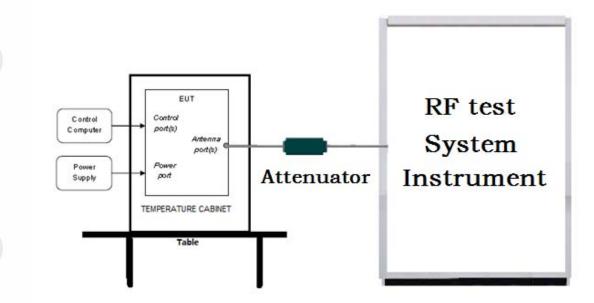

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

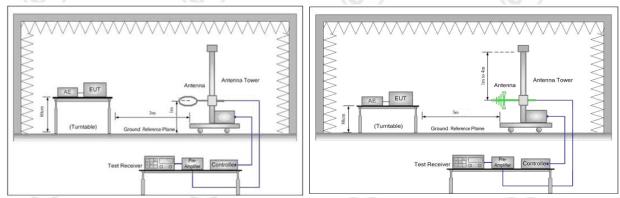


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz





Figure 3. Above 1GHz





5.1.3 For Conducted Emissions test setup Conducted Emissions setup

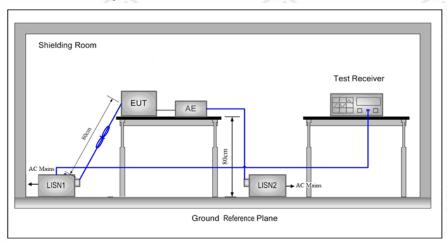

5.2 Test Environment

Operating Environment:			
Temperature:	25.0 °C		0
Humidity:	53 % RH		
Atmospheric Pressure:	995mbar	116000	

5.3 Test Condition

Test channel:

1 est charmer.						
Test Mode	Tx/Rx	RF Channel				
rest Mode	IA/NA	Low(L)	Middle(M)	High(H)		
OFOK	04000411- 0400 0411-	Channel 1	Channel 20	Channel 40		
GFSK	2402MHz ~2480 MHz	2402MHz	2440MHz	2480MHz		
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.					
(41)	2. Remark new battery is used during all test.					







6 General Information

6.1 Client Information

Applicant:	CliniCloud Inc.
Address of Applicant:	Level 1, 520 Bourke Street, Melbourne, VIC 3000, Australia
Manufacturer:	Shanghai Medical Instruments Co., Ltd
Address of Manufacturer:	Room 201, 6 th Building, No.515 Ju Jia Qiao Road Shanghai

6.2 General Description of EUT

A Review of the second of the	A R. A. Y. J.	1 K		1.65
Product Name:	IR Thermometer			
Model No.(EUT):	SPL1024			
Trade mark:	CliniCloud			
EUT Supports Radios application:	Bluetooth V4.0 BLE		(41)	
Power Supply:	DC 3V			
Sample Received Date:	Aug. 03, 2015			
Sample tested Date:	Aug. 03, 2015 to Sep. 02, 2015			

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz	
Bluetooth Version:	4.0	
Modulation Type:	GFSK	
Number of Channel:	40	
Sample Type:	Portable production	
Antenna Type and Gain:	Type: Integral antenna Gain:0dBi	
Test Voltage:	DC 3V	

Operation Frequency each of channel

operation requested outside the							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

6.4 Description of Support Units

The EUT has been tested independently.











Hotline: 400-6788-333 www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com



6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China518101

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

Page 8 of 35

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 565659

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 565659.

IC-Registration No.: 7408A

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A.

IC-Registration No.: 7408B

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Hotline: 400-6788-333 www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com





Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of

Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard ConditionsNone.

6.9 Other Information Requested by the CustomerNone.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

	3 (<u> </u>		
No.	Item	Measurement Uncertainty		
(1)	Radio Frequency	7.9 x 10 ⁻⁸		
2	DE novembre de destad	0.31dB (30MHz-1GHz)		
2	RF power, conducted	0.57dB (1GHz-18GHz)		
2	Padiated Spurious emission test	4.5dB (30MHz-1GHz)		
3	Radiated Spurious emission test	4.8dB (1GHz-12.75GHz)		
4	Conduction emission	3.6dB (9kHz to 150kHz)		
4	Conduction emission	3.2dB (150kHz to 30MHz)		
5	Temperature test	0.64°C		
6	Humidity test	2.8%		
7	DC power voltages	0.025%		









Page 10 of 35

7 Equipment List

		RF test	system		
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Communication test set test set	Agilent	N4010A	MY47230124	04-02-2015	04-01-2016
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2015	03-31-2016
Attenuator	HuaXiang	SHX370	15040701	04-01-2015	03-31-2016
Signal Generator	Keysight	N5182B	MY53051549	03-31-2015	03-30-2016
High-pass filter(3- 18GHz)	Sinoscite	FL3CX03WG18 NM12-0398-002	(2)	01-13-2015	01-12-2016
High-pass filter(5- 18GHz)	MICRO- TRONICS	SPA-F-63029-4	(C)	01-13-2015	01-12-2016
band rejection filter (GSM900)	Sinoscite	FL5CX01CA09C L12-0395-001		01-13-2015	01-12-2016
band rejection filter (GSM850)	Sinoscite	FL5CX01CA08C L12-0393-001		01-13-2015	01-12-2016
band rejection filter (GSM1800)	Sinoscite	FL5CX02CA04C L12-0396-002		01-13-2015	01-12-2016
band rejection filter (GSM1900)	Sinoscite	FL5CX02CA03C L12-0394-001		01-13-2015	01-12-2016
DC Power	Keysight	E3642A	MY54436035	03-31-2015	03-30-2016
PC-1	Lenovo	R4960d		04-01-2015	03-31-2016
BT&WI-FI Automatic control	R&S	OSPB157	101374	04-01-2015	03-31-2016
RF control unit	JS Tonscend	JS0806-2	2015860006	04-01-2015	03-31-2016
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2		04-01-2015	03-31-2016









































		3M Semi/full-anecl	hoic Chamber	•	
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber	TDK	SAC-3		06-02-2013	06-01-2016
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-31-2015	07-29-2016
Microwave Preamplifier	Agilent	8449B	3008A02425	02-05-2015	02-04-2016
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-30-2015	06-28-2016
Receiver	R&S	ESCI	100435	06-30-2015	06-28-2016
Multi device Controller	maturo	NCD/070/10711112		01-13-2015	01-12-2016
LISN	schwarzbeck	NNBM8125	81251547	06-30-2015	06-28-2016
LISN	schwarzbeck	NNBM8125	81251548	06-30-2015	06-28-2016
Signal Generator	Agilent	E4438C	MY45095744	04-19-2015	04-18-2016
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Temperature/ Humidity Indicator	TAYLOR	1451	1905	01-14-2015	01-13-2016
Communication test set	Agilent	E5515C	GB47050533	01-13-2015	01-12-2016
Cable line	Fulai(7M)	SF106	5219/6A	01-13-2015	01-12-2016
Cable line	Fulai(6M)	SF106	5220/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5216/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5217/6A	01-13-2015	01-12-2016
Communication test set	R&S	CMW500	152394	04-19-2015	04-18-2016
High-pass filter(3- 18GHz)	Sinoscite	FL3CX03WG18NM 12-0398-002		01-13-2015	01-12-2016
High-pass filter(5- 18GHz)	MICRO- TRONICS	SPA-F-63029-4	(<u>C.</u>)	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX01CA09CL1 2-0395-001		01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX01CA08CL1 2-0393-001		01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA04CL1 2-0396-002		01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA03CL1 2-0394-001		01-13-2015	01-12-2016


















8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2014)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicesed Wireless Devices

Test Results List:

oot ittoodite mieti				1 70 7
Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density		Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	N/A	N/A
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix G)



Hotline: 400-6788-333 www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com





Appendix A) 6dB Occupied Bandwidth

Test Result

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict
BLE	LCH	0.6445	1.1214	PASS
BLE	MCH	0.6480	1.0448	PASS
BLE	НСН	0.6546	1.0427	PASS

Remark: Peak detector is used.

Test Graphs











Page 14 of 35







































































Appendix B) Conducted Peak Output Power

Test Result

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	2.041	PASS
BLE	MCH	2.497	PASS
BLE	НСН	2.765	PASS

Test Graphs












Page 16 of 35

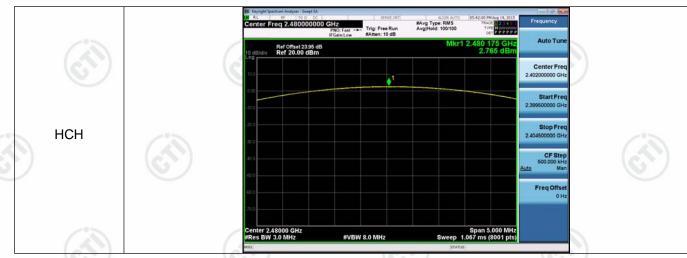








































































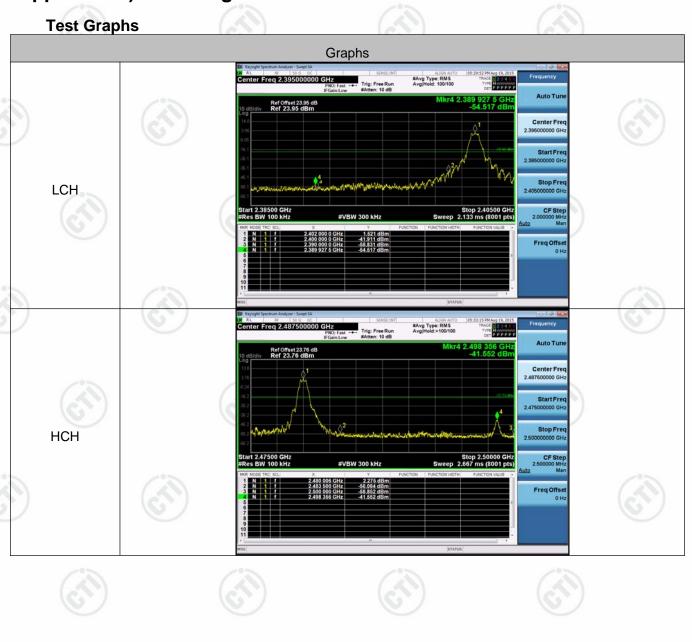























Appendix D) RF Conducted Spurious Emissions

Test Graphs












Page 19 of 35



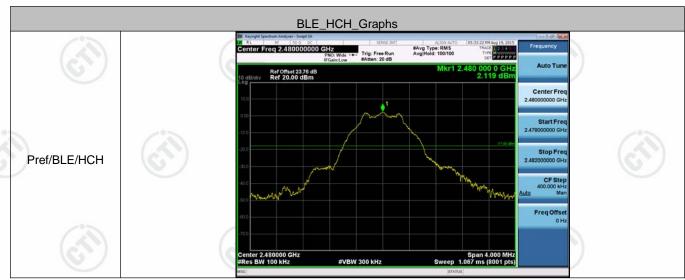


















Page 20 of 35

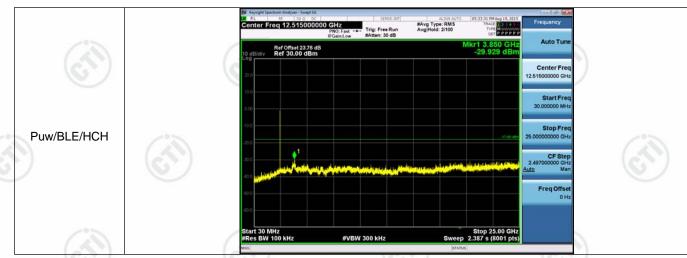



































































Page 21 of 35

Appendix E) Power Spectral Density

Result Table

	Mode	Channel	PSD [dBm]	Verdict
ł	Wiode	Chamie	F 3D [dBill]	Verdict
	BLE	LCH	-13.562	PASS
0 3	BLE	MCH	-12.755	PASS
5	BLE	нсн	-11.484	PASS

Test Graphs











Page 22 of 35









































































Page 23 of 35

Appendix F) Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna car be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentiona radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

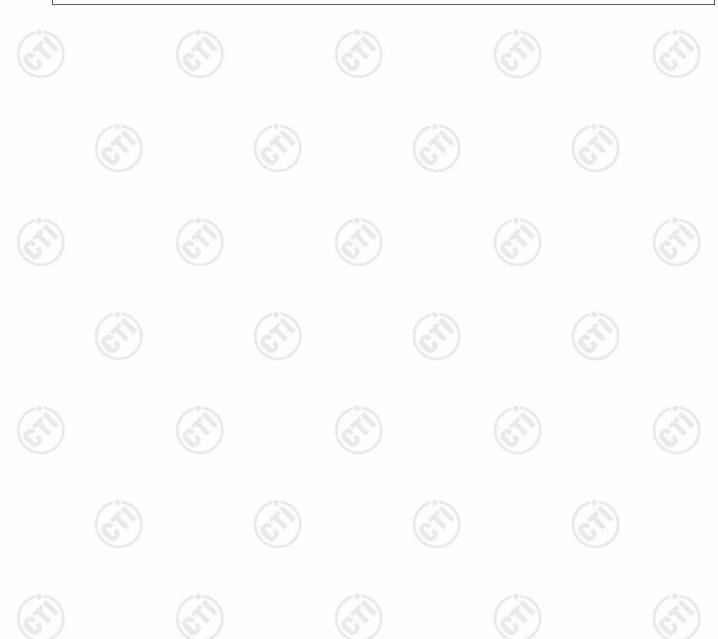









Appendix G) Restricted bands around fundamental frequency (Radiated)/Radiated Spurious Emissions

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
Above 4011-	Peak	1MHz	3MHz	Peak
Above 1GHz	Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- i. Repeat above procedures until all frequencies measured was complete.

		1		

	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-/3	30
	1.705MHz-30MHz	30) -	-(63)	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
L	Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

























Page 25 of 35

Radiated Spurious Emissions test Data:

All the modes of operation (X, Y, Z) were investigated and the worst-case emissions are reported.


A. Below 30MHz:

No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.

B. $30MHz \sim 1GHz$:

The test data of low channel, middle channel and high channel are almost same in frequency bands 30MHz to 1GHz, and the data of middle channel (GFSK mode) are chosen as representative in below:

H:

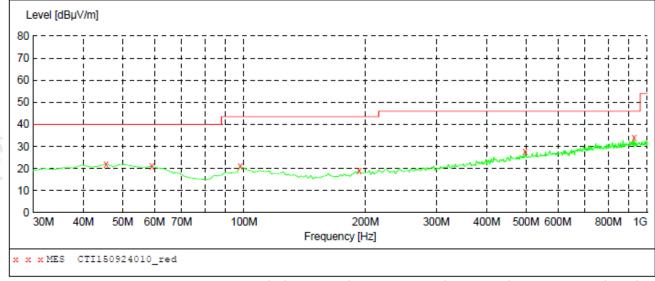

Frequency MHz	Level dBµV/m			_	Height cm	Azimuth deg	Polarization
45.520000	22.10	16.2	40.0	17.9	 100.0	280.00	HORIZONTAL
59.100000	21.10	15.3	40.0	18.9	 100.0	237.00	HORIZONTAL
97.900000	21.00	14.4	43.5	22.5	 100.0	369.00	HORIZONTAL
192.960000	19.20	13.5	43.5	24.3	 100.0	357.00	HORIZONTAL
497.540000	27.70	21.5	46.0	18.3	 100.0	146.00	HORIZONTAL
926.280000	33.90	26.7	46.0	12.1	 100.0	46.00	HORIZONTAL




































Page 26 of 35

V:

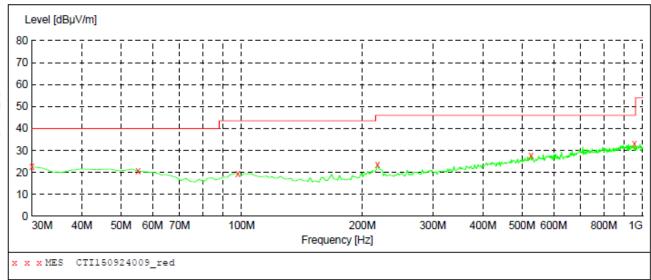

Frequency MHz	Level dBµV/m		Limit dBµV/m	_	Det.	Height cm	Azimuth deg	Polarization
30.000000	22.60	13.7	40.0	17.4		100.0	71.00	VERTICAL
55.220000	20.60	15.8	40.0	19.4		100.0	171.00	VERTICAL
97.900000	19.50	14.4	43.5	24.0		100.0	38.00	VERTICAL
218.180000	23.70	14.2	46.0	22.3		100.0	326.00	VERTICAL
526.640000	27.60	21.7	46.0	18.4		100.0	124.00	VERTICAL
953.440000	33.10	26.7	46.0	12.9		100.0	91.00	VERTICAL



















































C. Above 1GHz:

Test Results-(Measurement Distance: 3m)_Channel low_2402MHz_GFSK mode:

Frequency (MHz)	•		Detector Type	Antenna (H/V)	Result (P/F)	
2390.0	36.47	74	PK	Н	Р	
2400.0	48.37	74	PK	Н	Р	
2402.0*	87.47	(6,75)	PK	Н	P	
4804.0	44.63	74	PK	Н	Р	
2390.0	36.42	74	PK	V	Р	
2400.0	46.61	74	PK	V	Р	
2402.0*	88.87	·	PK	V	Р	
4804.0	46.19	74	PK	V	Р	

^{*:} fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel middle_2440MHz_GFSK mode:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2440.0*	87.93		PK	Н	Р
4880.0	47.27	74	PK	Н	Р
2440.0*	88.49	9	PK	V	Р
4880.0	47.61	74	PK	V	Р

^{*:} fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel high_2480MHz_GFSK mode:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2480.0*	89.39		PK	Н	Р
2483.5	45.62	74	PK	н (г	Р
4960.0	44.47	74	PK	Н	Р
2480.0*	87.61		PK	V	Р
2483.5	45.56	74	PK	V	Р
4960.0	46.49	74	PK	V	Р

^{*:} fundamental frequency

Remark:

- 1. The above tables show that the frequencies peak data are all below the average limit, so the average data of these frequencies are deems to fulfill the average limits and not reported.
- 2. No emission found from 18GHz to 25GHz.
- 3. All outside of operating frequency band and restricted band specified are below RSS-Gen section 6.13.













Page 28 of 35

PHOTOGRAPHS OF TEST SETUP

Test mode No.: SPL1024



Radiated spurious emission Test Setup-1(Below 1GHz)



Radiated spurious emission Test Setup-2(Above 1GHz)
















PHOTOGRAPHS OF EUT Constructional Details

Test mode No.: SPL1024



View of product-1





















Page 30 of 35



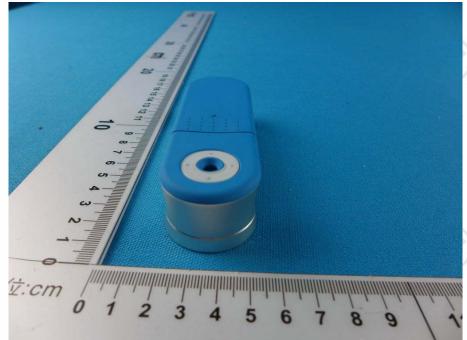









View of product-4

























Page 31 of 35







View of product-5







View of product-6



























Page 32 of 35

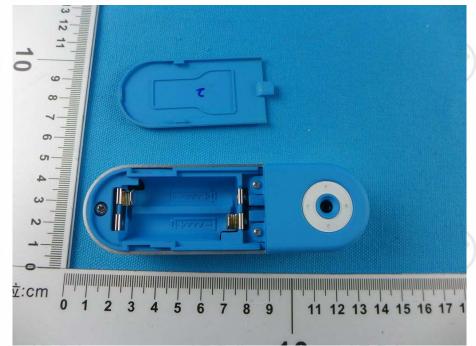





View of product-8





























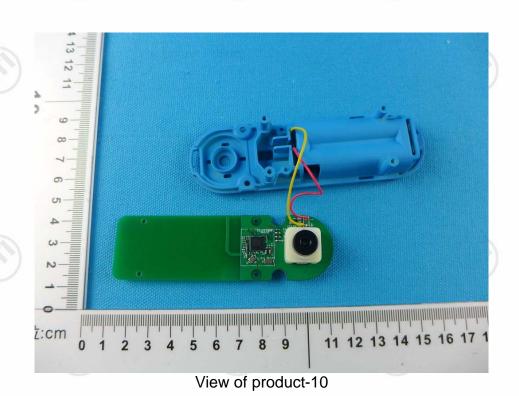









Page 34 of 35














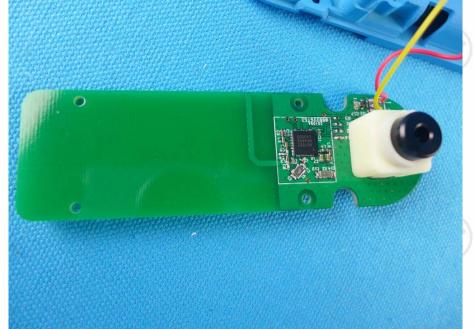

View of product-11











View of product-12

























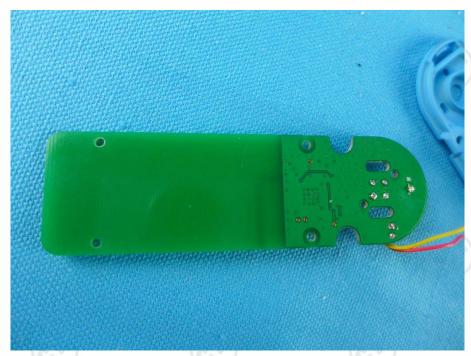

View of product-13

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

