

FCC TEST REPORT
FOR
Safe Baby Tech LLC
Baby Monitor System
Model No.: SBT-AS1901

Prepared for : Safe Baby Tech LLC
Address : 17470 N Pacesetter Way, Scottsdale, Arizona, USA 85255

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 17, 2015
Number of tested samples : 1
Serial number : Prototype
Date of Test : June 17, 2015 – July 13, 2015
Date of Report : July 13, 2015

FCC TEST REPORT**FCC CFR 47 PART 15 C(15.247): 2014****Report Reference No. : LCS1506150968E**

Date of Issue : July 13, 2015

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards Partial application of Harmonised standards Other standard testing method **Applicant's Name : Safe Baby Tech LLC**

Address : 17470 N Pacesetter Way, Scottsdale, Arizona, USA 85255

Test Specification

Standard : FCC CFR 47 PART 15 C(15.247): 2014

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Baby Monitor System

Trade Mark : N/A

Model/ Type reference : SBT-AS1901

Ratings : DC 3.7V by battery
Adapter parameters: Input: AC 100~240V, 50~60Hz, 120mA;
Output: DC 5V, 1A**Result : Positive****Compiled by:****Supervised by:****Approved by:**

Jacky Li/ File administrators

Glin Lu/ Technique principal

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1506150968E	<u>July 13, 2015</u> Date of issue
---	---------------------------------------

Type / Model..... : SBT-AS1901

EUT..... : Baby Monitor System

Applicant..... : Safe Baby Tech LLC

Address..... : 17470 N Pacesetter Way, Scottsdale, Arizona, USA 85255

Telephone..... : 480 466 8754

Fax..... : 480 447 3404

Manufacturer..... : Safe Baby Tech LLC

Address..... : 17470 N Pacesetter Way, Scottsdale, Arizona, USA 85255

Telephone..... : 480 466 8754

Fax..... : 480 447 3404

Factory..... : Safe Baby Tech LLC

Address..... : 17470 N Pacesetter Way, Scottsdale, Arizona, USA 85255

Telephone..... : 480 466 8754

Fax..... : 480 447 3404

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1 Description of Device (EUT)	5
1.2 Support equipment List	5
1.3 External I/O Cable	5
1.4 Description of Test Facility	5
1.5 Statement of The Measurement Uncertainty	6
1.6 Measurement Uncertainty.....	6
1.7 Description Of Test Modes	6
2. TEST METHODOLOGY	7
2.1 EUT Configuration	7
2.2 EUT Exercise.....	7
2.3 General Test Procedures.....	7
3. SYSTEM TEST CONFIGURATION	8
3.1 Justification	8
3.2 EUT Exercise Software	8
3.3 Special Accessories	8
3.4 Block Diagram/Schematics	8
3.5 Equipment Modifications	8
3.6 Test Setup	8
4. SUMMARY OF TEST RESULTS	9
5. SUMMARY OF TEST EQUIPMENT	10
6. ANTENNA PORT MEASUREMENT	11
6.1 Peak Power	11
6.2 Frequency Separation And 20 dB Bandwidth	12
6.3 Number Of Hopping Frequency	16
6.4 Time Of Occupancy (Dwell Time).....	18
6.5 Conducted Spurious Emissions and Band Edges Test	23
7. RADIATED MEASUREMENT	28
7.1 Block Diagram of Test Setup	28
7.2 Radiated Emission Limit	29
7.3 Instruments Setting	30
7.4 Test Procedures	31
7.5 Results for Radiated Emissions	31
7.6 Results for Band edge Testing (Radiated).....	34
7.7. Power line conducted emissions.....	35
8. ANTENNA REQUIREMENT	37
8.1 Standard Applicable	37
8.2 Antenna Connected Construction.....	37

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : Baby Monitor System

Model No. : SBT-AS1901

Frequency Range : 2410.870-2471.620MHz

Channel Number : 19

Channel frequency : 2410.870-2471.620MHz (Channel Frequency=2410.870+3.375(K-1), K=1, 2, 319);

Channel Spacing : 3.375MHz

Modulation Type : GFSK(3Mbps)

Antenna Gain : R-SMA antenna, 2.0dBi(Max.)

Input Voltage : DC 3.7V by battery
Adapter parameters: Input: AC 100~240V, 50~60Hz, 120mA;
Output: DC 5V, 1A

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	AC/DC Adapter	JLT-001	--	VOC

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
DC	1	--

1.4 Description of Test Facility

Site Description

EMC Lab.

: CNAS Registration Number. is L4595.
FCC Registration Number. is 899208.
Industry Canada Registration Number. is 9642A-1.
VCCI Registration Number. is C-4260 and R-3804.
ESMD Registration Number. is ARCB0108.
UL Registration Number. is 100571-492.
TUV SUD Registration Number. is SCN1081.
TUV RH Registration Number. is UA 50296516-001

1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description Of Test Modes

This product operates in the unlicensed ISM Band at 2.4GHz. The data rates can be up to 1 Mb/s which is achieved by modulating the RF carrier using GFSK techniques. All 3axis have been tested. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
GFSK	2410.870	3
	2441.245	3
	2471.620	3
For Conducted Emission		
Test Mode	TX Mode	
For Radiated Emission		
Test Mode	TX Mode	

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be TX(3Mbps-Hopping Mode).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX(3Mbps---High Channel).

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, RSS-210, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C and RSS-210.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2009

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a continuous transmit condition.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

N/A.

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(a)	Maximum Conducted Output Power	Compliant
§15.247(c)	Frequency Separation And 20 dB Bandwidth	Compliant
§15.247(a)(1)(ii)	Number Of Hopping Frequency	Compliant
§15.247(a)(1)(iii)	Time Of Occupancy (Dwell Time)	Compliant
§15.209, §15.205	Conducted Spurious Emissions and Band Edges Test	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§ 5.207(a)	Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant
§15.247(i)§2.1093	RF Exposure	Compliant


5. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Sensor	R&S	NRV-Z51	100458	2015-06-18	2016-06-17
2	Power Sensor	R&S	NRV-Z32	10057	2015-06-18	2016-06-17
3	Power Meter	R&S	NRVS	100444	2015-06-18	2016-06-17
4	DC Filter	MPE	23872C	N/A	2015-06-18	2016-06-17
5	RF Cable	Harbour Industries	1452	N/A	2015-06-18	2016-06-17
6	SMA Connector	Harbour Industries	9625	N/A	2015-06-18	2015-06-17
7	Spectrum Analyzer	Agilent	N9020A	MY50510140	2015-10-27	2016-10-26
8	Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	2015-06-16	2016-06-15
9	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2015-06-18	2016-06-17
10	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2015-06-18	2016-06-17
11	Amplifier	SCHAFFNER	COA9231A	18667	2015-06-18	2016-06-17
12	Amplifier	Agilent	8449B	3008A02120	2015-06-16	2016-06-15
13	Amplifier	MITEQ	AMF-6F-260 400	9121372	2015-06-16	2016-06-15
14	Loop Antenna	R&S	HFH2-Z2	860004/001	2015-06-18	2016-06-17
15	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2015-06-10	2016-06-09
16	Horn Antenna	EMCO	3115	6741	2015-06-10	2016-06-09
17	Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	2015-06-10	2016-06-09
18	RF Cable-R03m	Jye Bao	RG142	CB021	2015-06-18	2016-06-17
19	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2015-06-18	2016-06-17
20	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2015-06-18	2016-06-17
21	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2015-06-18	2016-06-17
22	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2015-06-18	2016-06-17
23	EMI Test Software	AUDIX	E3	N/A	2015-06-18	2016-06-17

6. ANTENNA PORT MEASUREMENT

6.1 Peak Power

6.1.1 Block Diagram of Test Setup

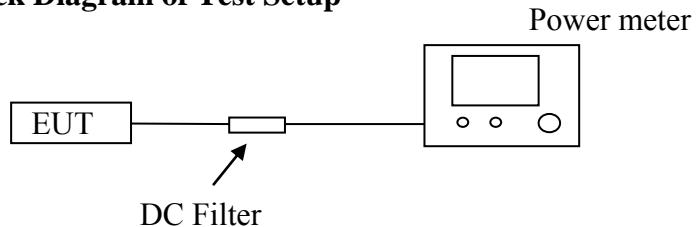

6.1.2 Limit

According to §15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

6.1.3 Test Procedure

The transmitter output is connected to the Power Meter.

6.1.4 Test Results


Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mw)	Limit (mW)	Result
GFSK	2410.870	14.724	29.676	125	Pass
	2441.245	14.527	28.360	125	Pass
	2471.620	14.291	26.860	125	Pass

6.2 Frequency Separation And 20 dB Bandwidth

6.2.1 Limit

According to §15.247(c) or A8.1(a), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

6.2.2 Block Diagram of Test Setup

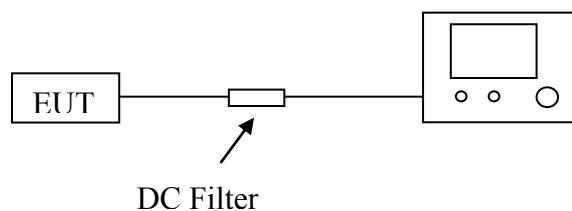

6.2.3 Test Procedure

Frequency separation test procedure:

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = middle of hopping channel.
- D. Set the Spectrum Analyzer as RBW = 100kHz, VBW = 100kHz, Span = wide enough to capture the peaks of two adjacent channels, Sweep = auto.
- E. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

20dB bandwidth test procedure:


- A. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
- B. RBW $\geq 1\%$ of the 20 dB bandwidth, VBW \geq RBW.
- C. Detector function = peak.
- D. Trace = max hold.

6.2.4 Test Results

The Measurement Result With 3Mbps For GFSK Modulation				
Channel	20dB Bandwidth (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	3.742	3.38	>=25 KHz or 2/3 20 dB BW	Pass
Middle	3.616	3.41	>=25 KHz or 2/3 20 dB BW	Pass
High	3.622	3.37	>=25 KHz or 2/3 20 dB BW	Pass

Test Plot Of Frequency Separation (Low channel)

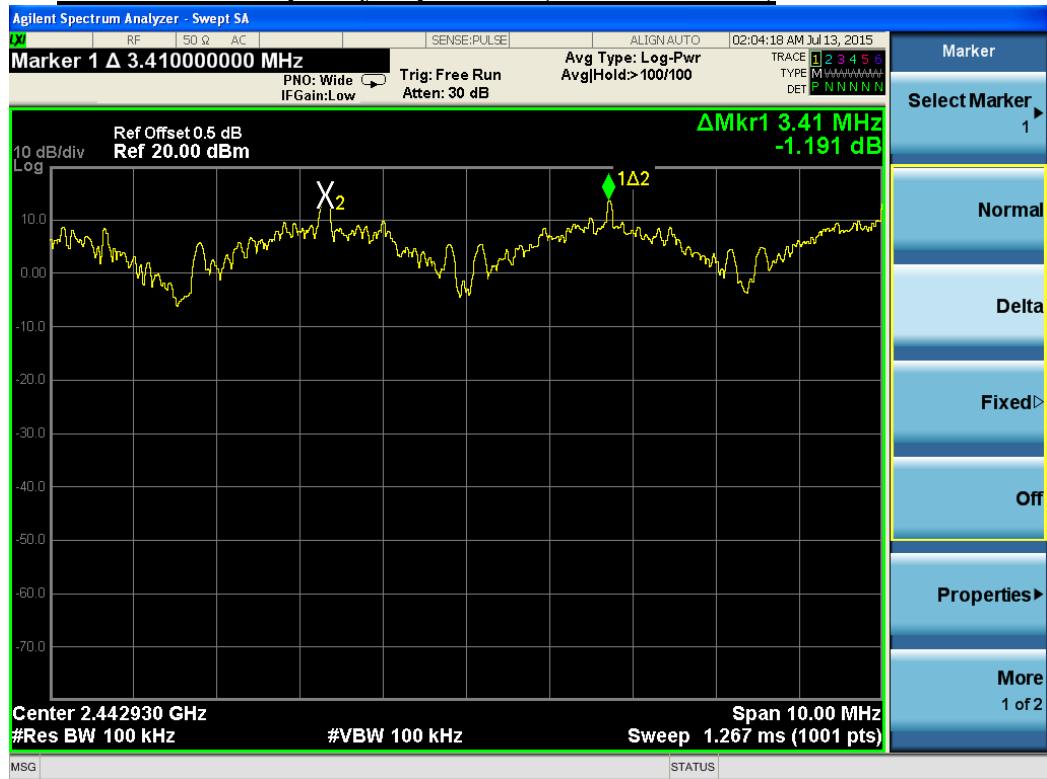


Test Plot Of Frequency Separation (Middle channel)**Test Plot Of Frequency Separation (High channel)**

Measurement of 20dB Bandwidth

Test frequency: 2410.870MHz



Test frequency: 2441.245MHz

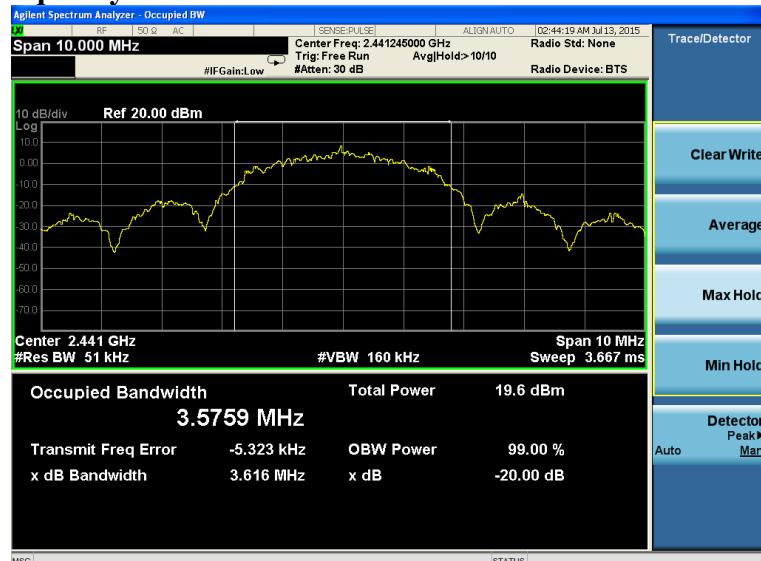

Test frequency: 2471.620MHz




6.3 Number Of Hopping Frequency

6.3.1 Limit

According to §15.247(a)(1)(ii) or A8.1 (d), Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

6.3.2 Block Diagram of Test Setup

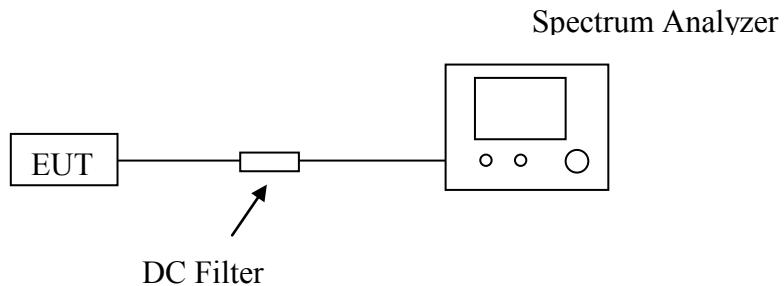

6.3.3 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz.
- E. Max hold, view and count how many channel in the band.

6.3.4 Test Results

The Measurement Result With The Worst Case			
Total No. of Hopping Channel	Measurement Result (No. of Ch)	Limit (MHz)	Result
	19	≥15	Pass

The test data refer to the following page.

Test Plot- Number of Hopping Channel




6.4 Time Of Occupancy (Dwell Time)

6.4.1 Limit

According to §15.247(a)(1)(iii) or A8.1 (d), Frequency hopping systems operating in the 2400MHz- 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

6.4.2 Block Diagram of Test Setup

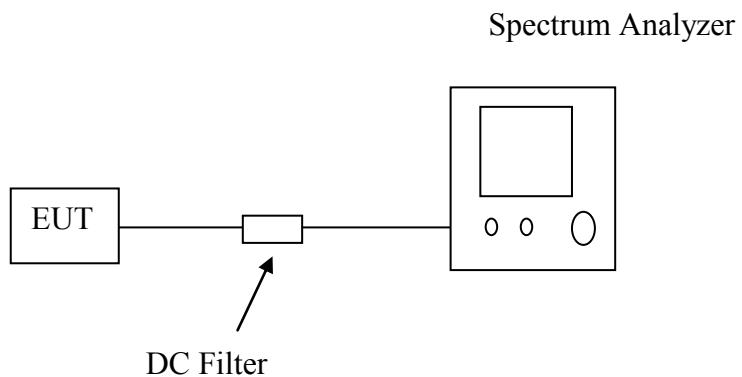

6.4.3 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = operating frequency.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- E. Repeat above procedures until all frequency measured were complete.

6.4.4 Test Results

The Measurement Result With The Worst Case				
Channel	Time of Pulse (ms)	Period Time (s)	Occupancy Time (ms)	Limit (ms)
Low	2.871	7.6	376.374	400
Middle	2.872	7.6	373.848	400
High	2.871	7.6	376.374	400

Low Channel

$$149*2.526=376.374\text{ms}$$

Middle Channel



$$148*2.526=373.848\text{ms}$$

High Channel



$$149*2.526=376.374\text{ms}$$

The test data refer to the following:



Low Channel

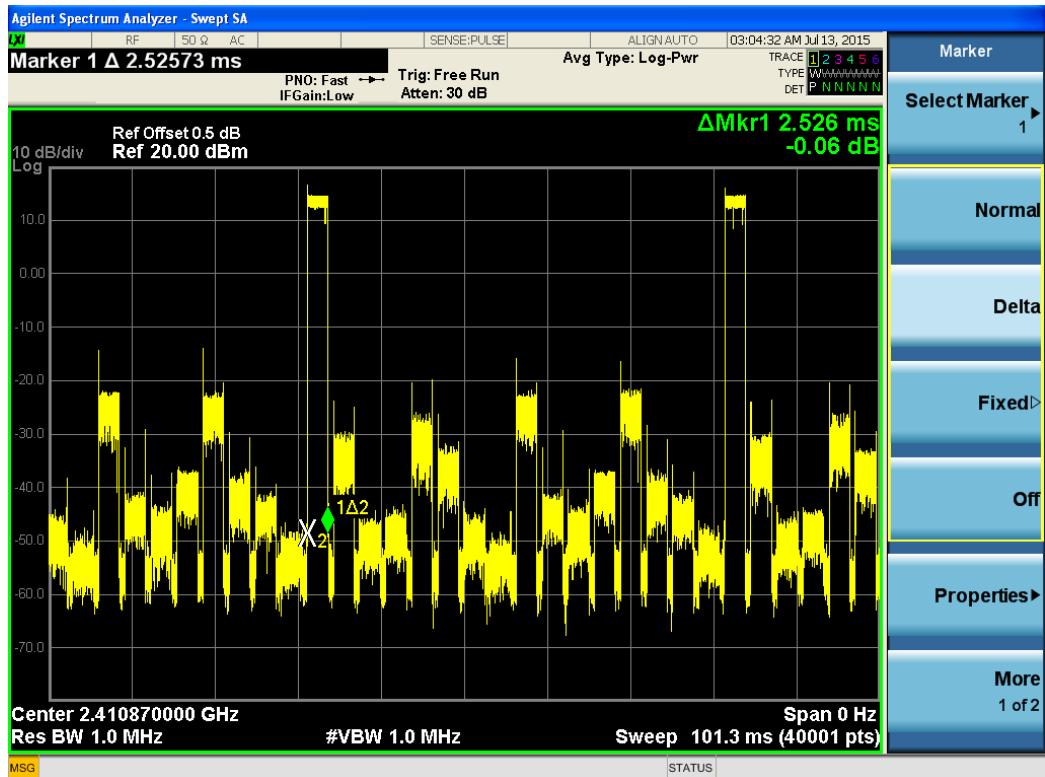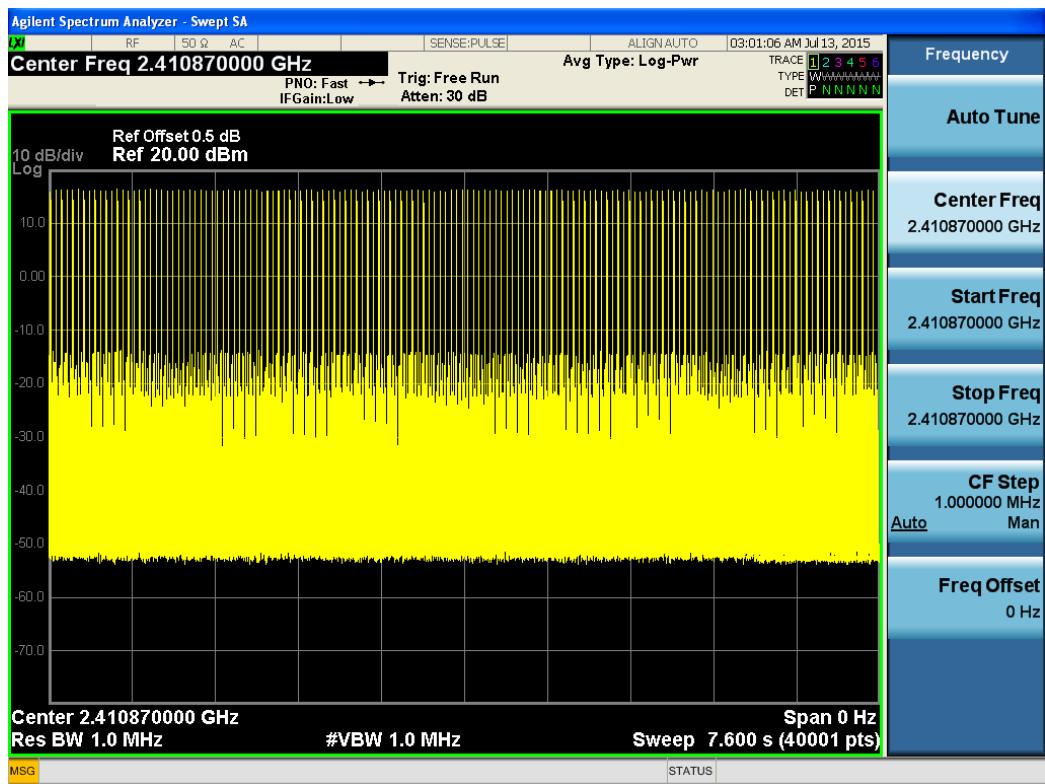

Middle Channel

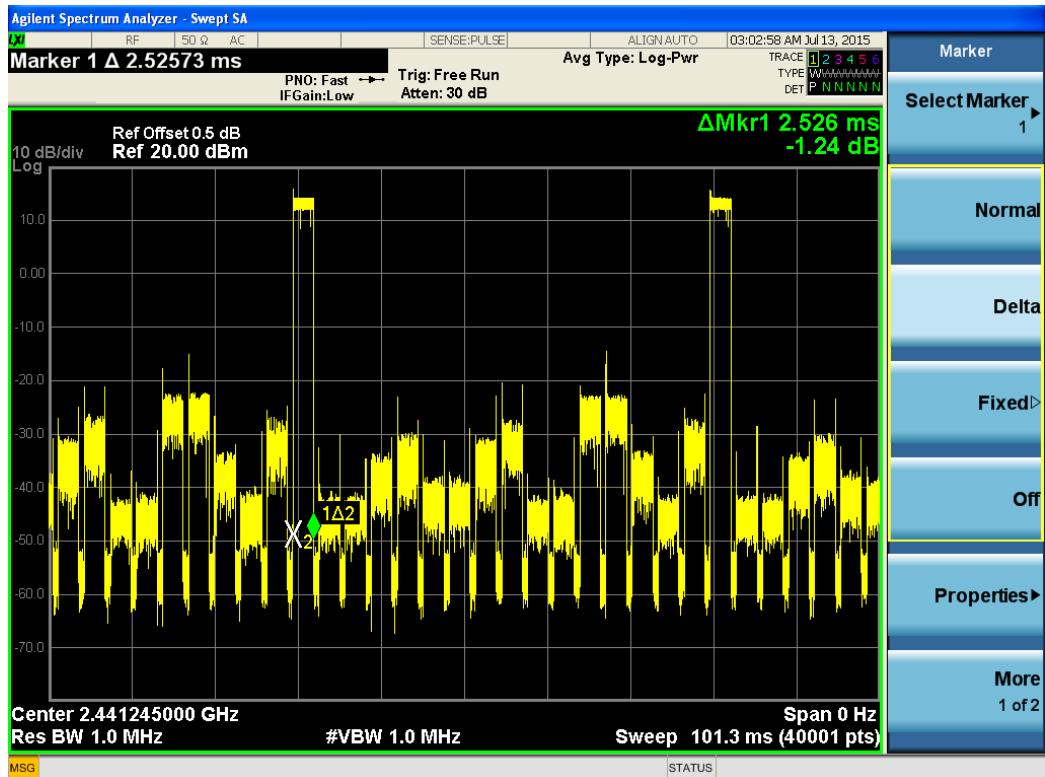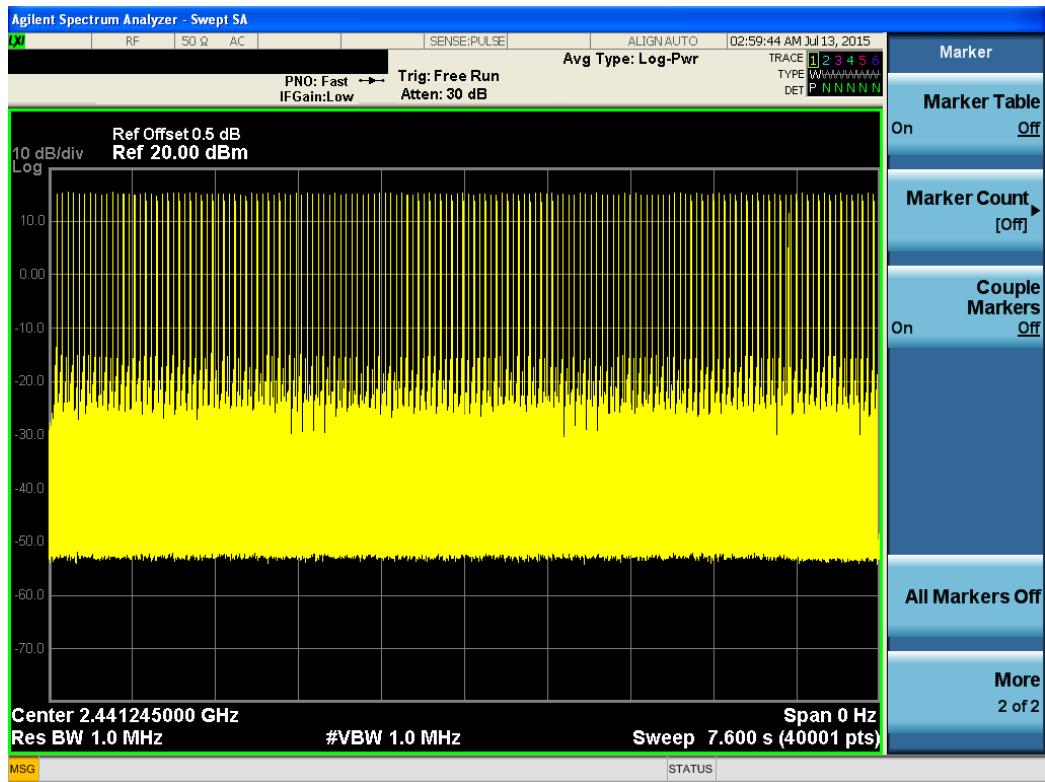

High Channel

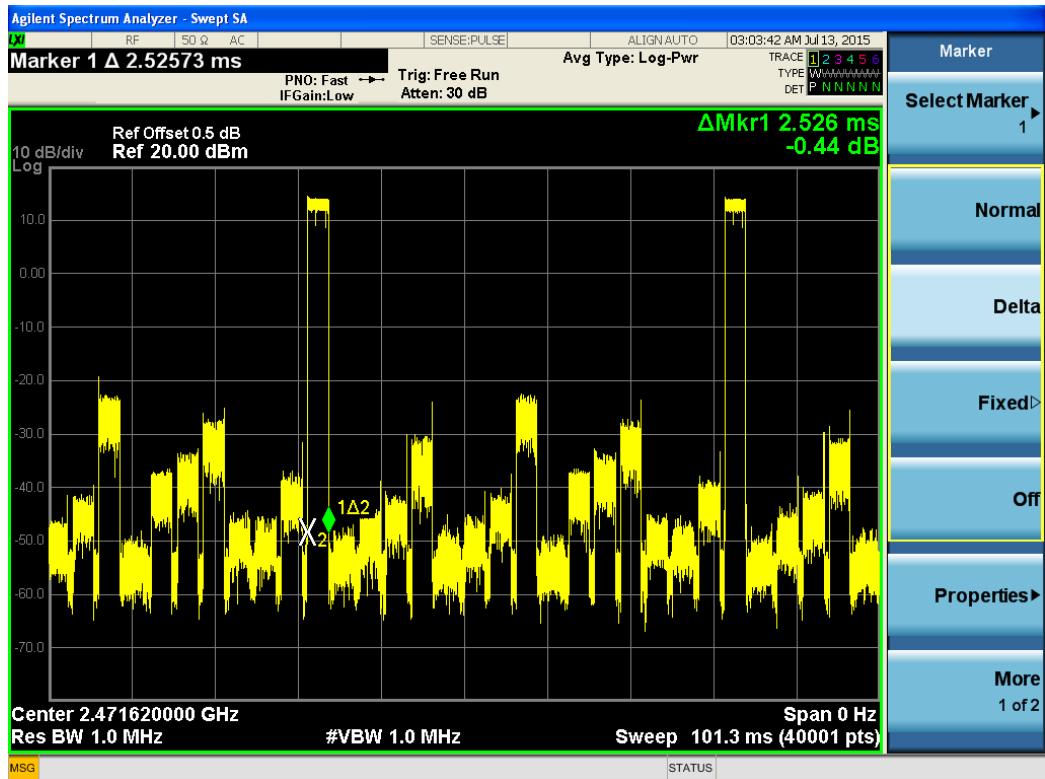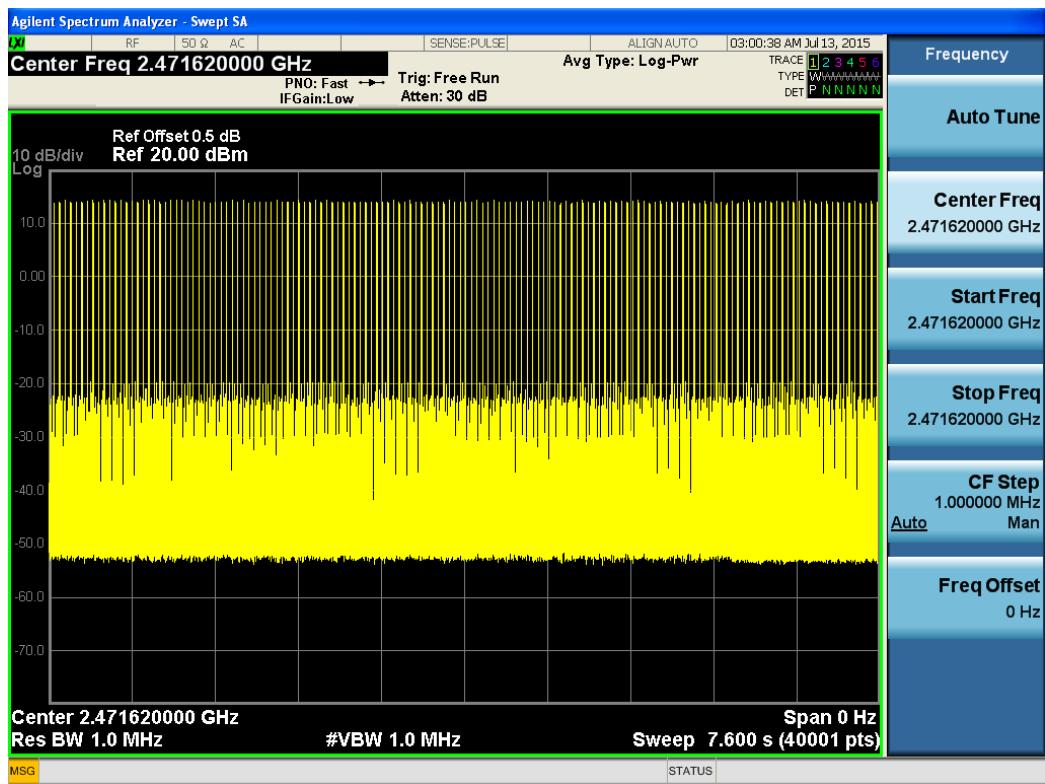


6.5 Conducted Spurious Emissions and Band Edges Test

6.5.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.5.2 Block Diagram of Test Setup

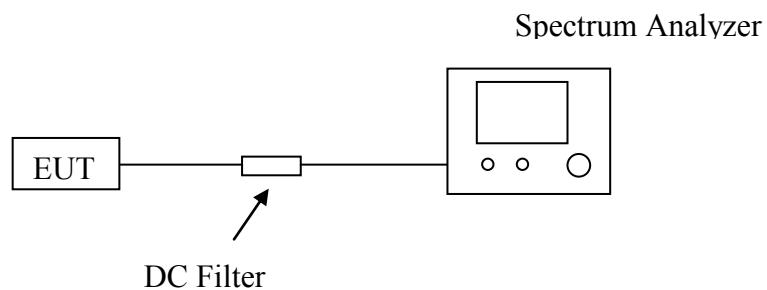

6.5.3 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.


Measurements are made over the 9kHz to 25GHz range with the transmitter set to the lowest, middle, and highest channels

6.5.4 Test Results of Conducted Spurious Emissions


No non-compliance noted. Only record the worst test result (TX-GFSK) in this report. The test data refer to the following page.

Test Plot


9KHz-25GHz Low Channel(GFSK)

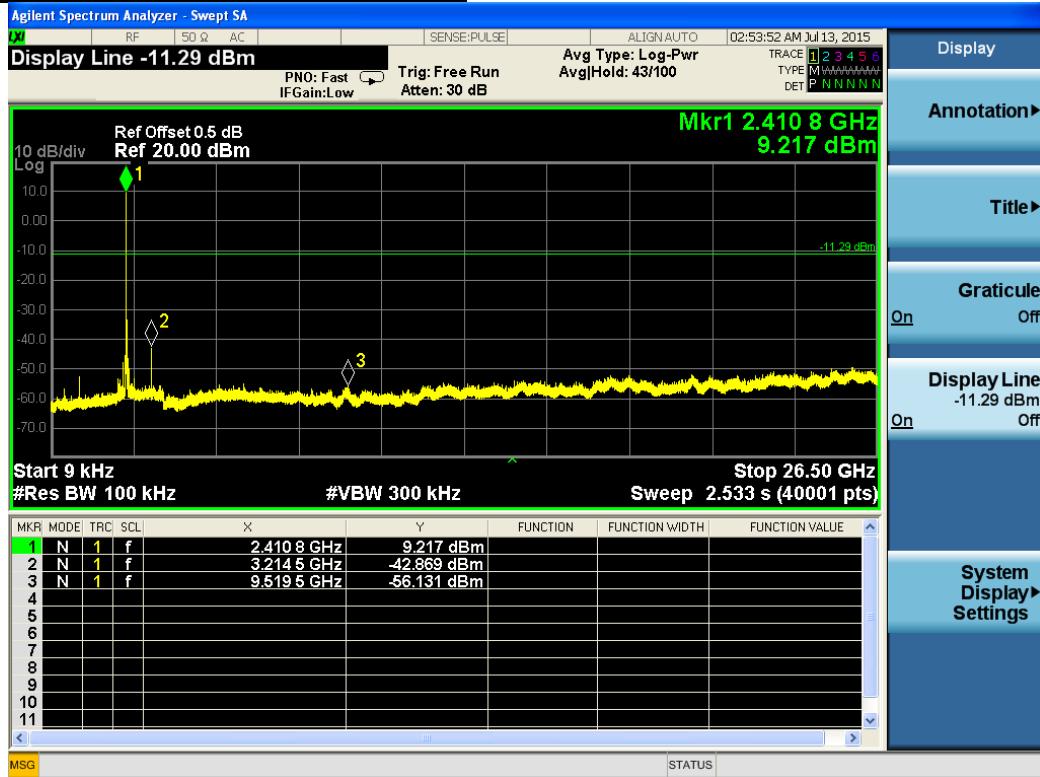

9KHz-25GHz Middle Channel(GFSK)

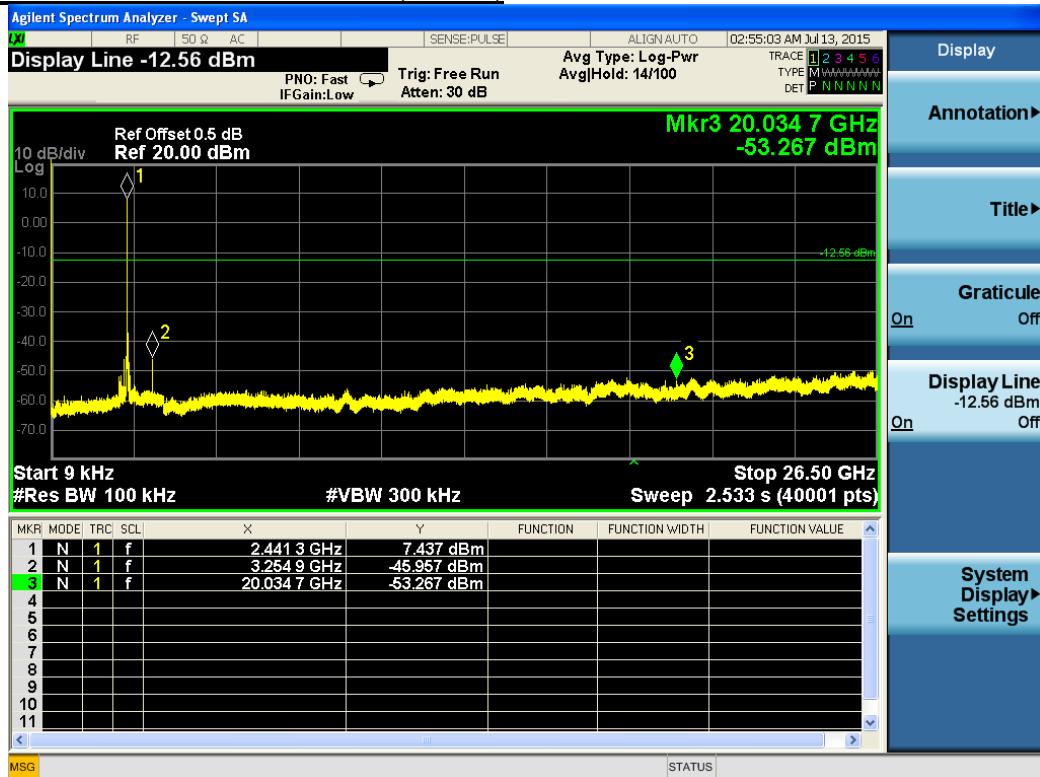

9KHz-25GHz High Channel(GFSK)

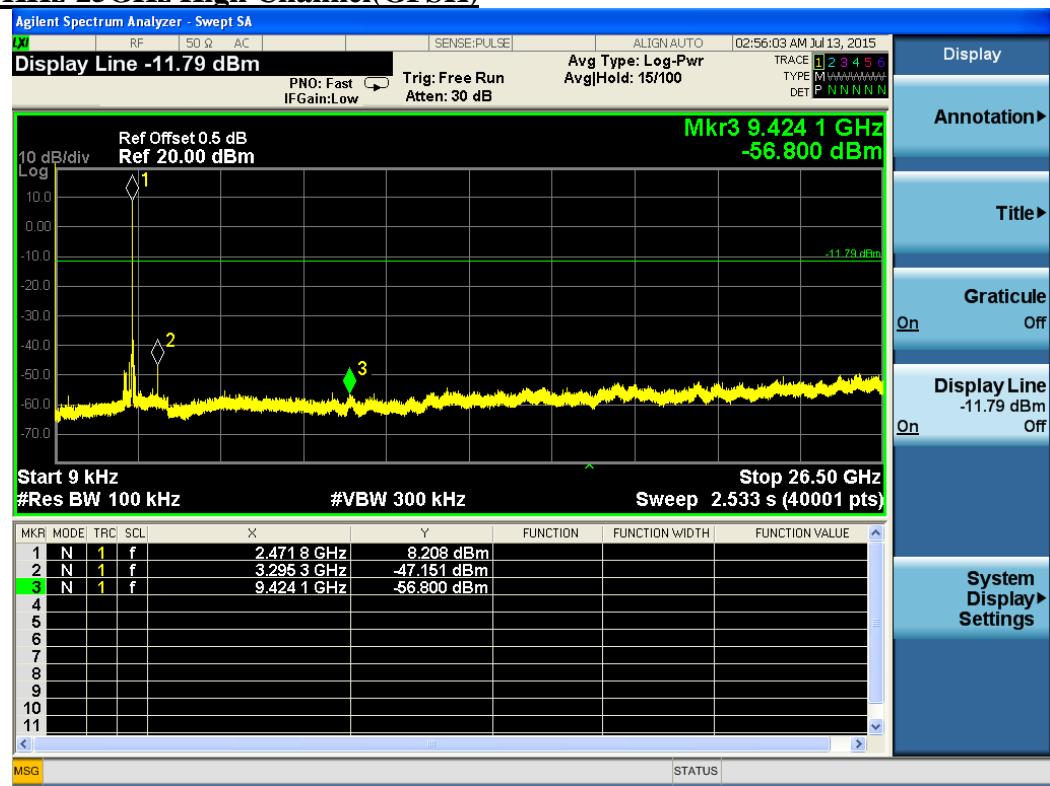


6.5.5 Test Results of Band Edges Test


No non-compliance noted. Only record the worst test result in this report. The test data refer to the following page.

Test Plot

Hopping On - (GFSK)

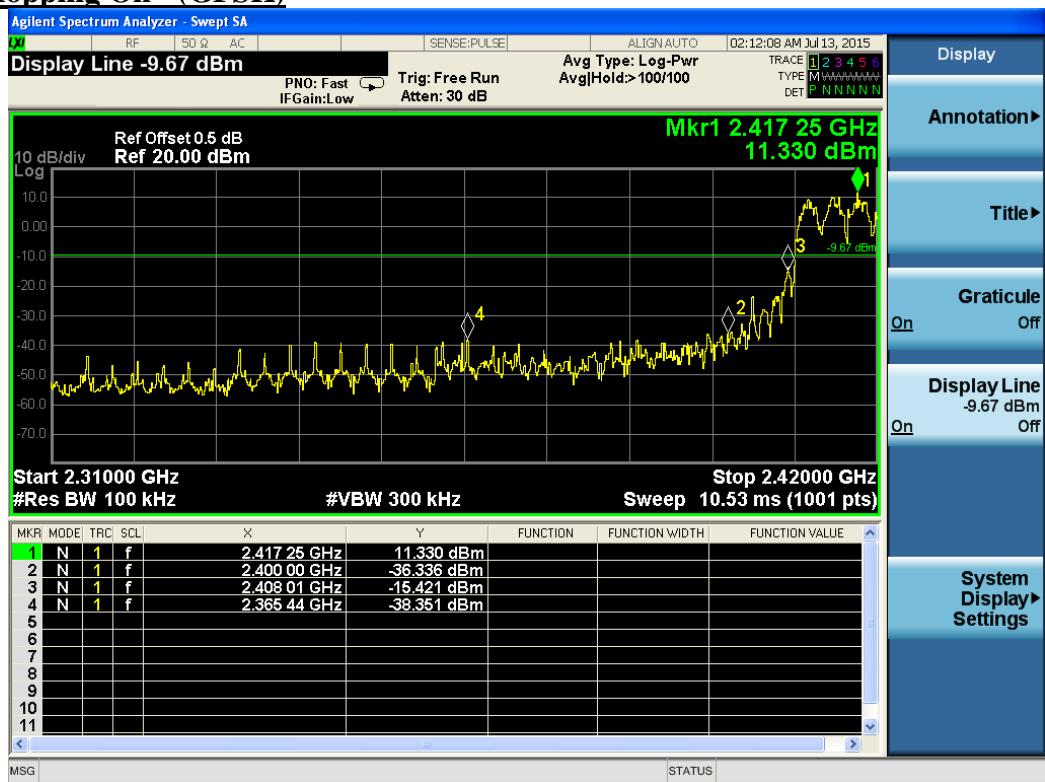


Hopping Off - (GFSK)

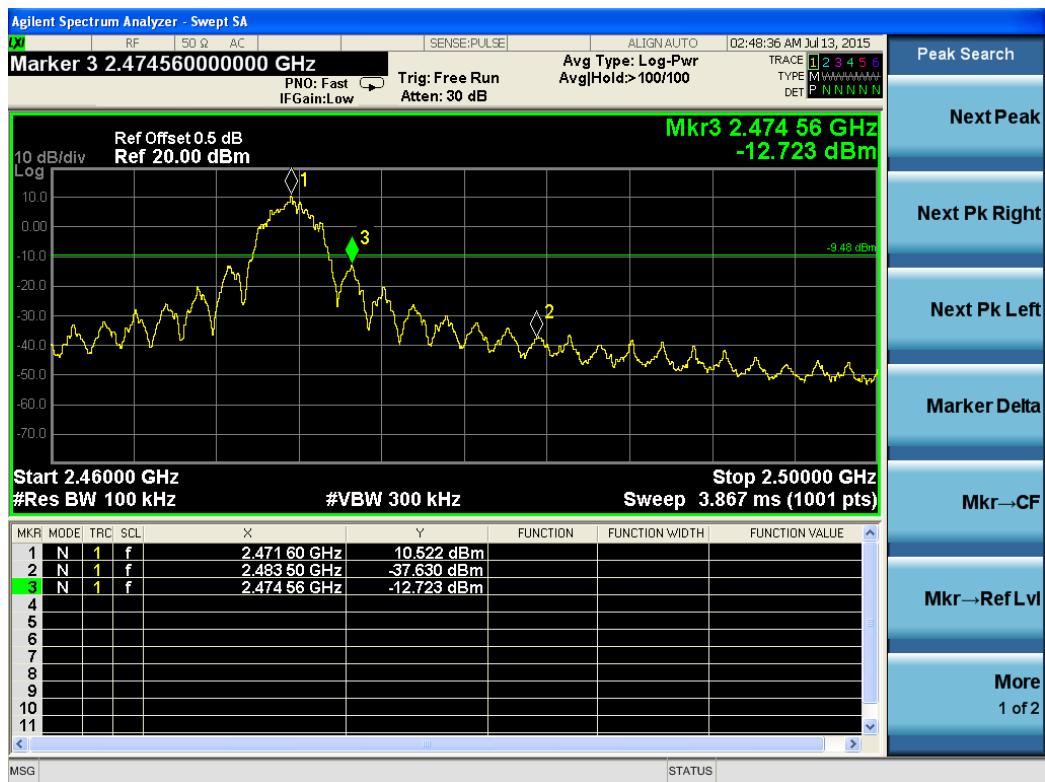


7. RADIATED MEASUREMENT


7.1 Block Diagram of Test Setup

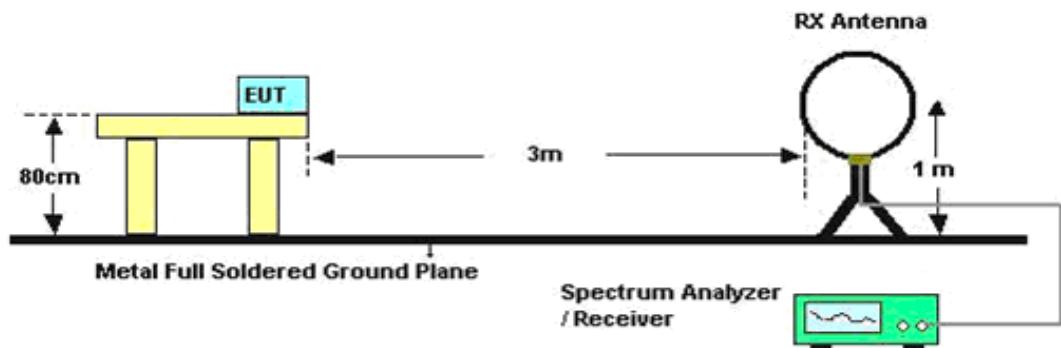

Below 30MHz

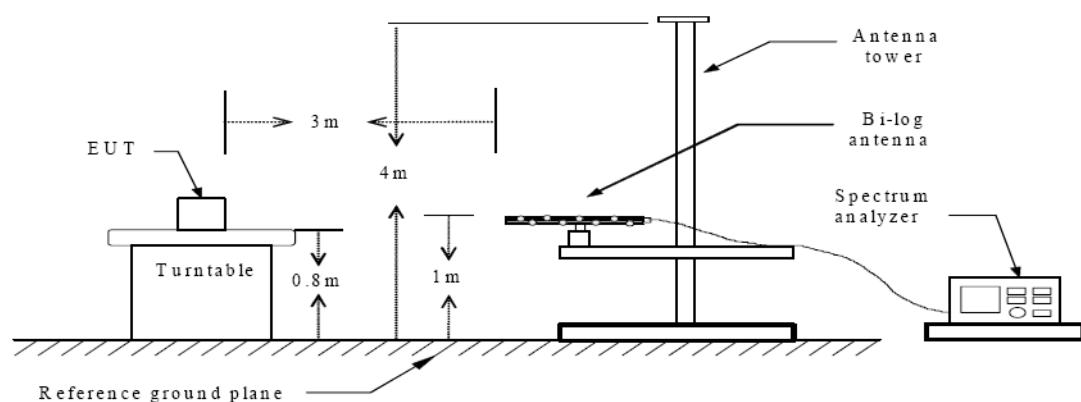

Below 1 GHz

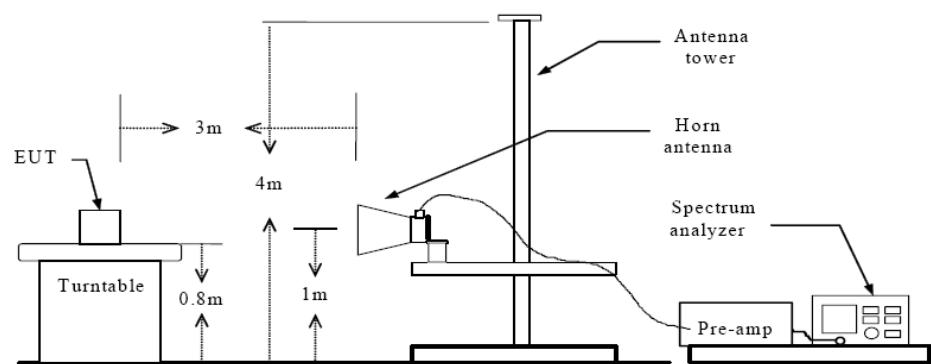

Above 1 GHz

7.2 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	\2\
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

7.3 Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

7.5 Results for Radiated Emissions

PASS.

Only record the worst test result in this report.


The test data please refer to following page:

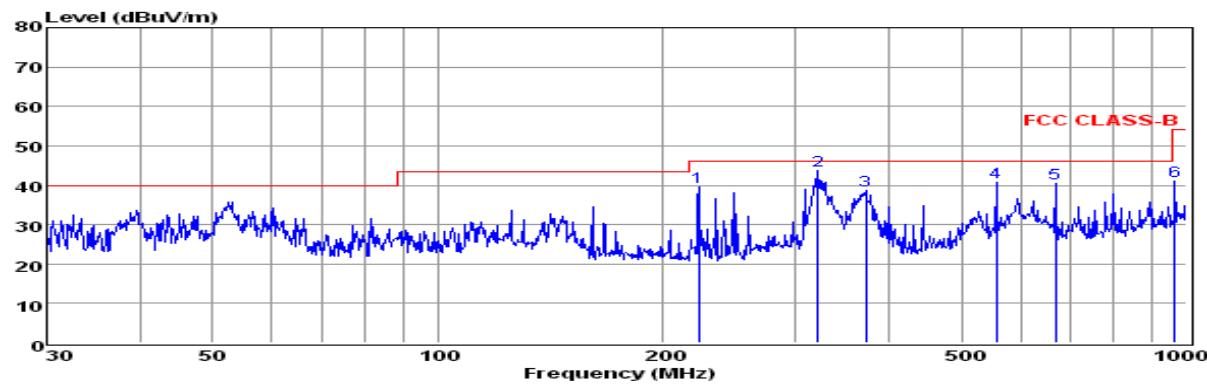Below 1GHz (High Channel)

Env. / Ins: 24 °C / 56%
 EUT: Baby Monitor System
 M/N: SBT-AS1901
 Power Rating: AC 120V/60Hz
 Test Mode: TX-High channel
 Operator: Jacky
 Memo:
 pol: VERTICAL

Freq	Reading	CabLoss	Antfac	Measured		Limit	Over	Remark
				MHz	dBuV	dB	dB/m	
1	222.95	27.20	0.95	11.33	39.48	46.00	-6.52	QP
2	322.19	29.18	1.16	13.42	43.76	46.00	-2.24	QP
3	373.31	23.00	1.10	14.54	38.64	46.00	-7.36	QP
4	556.77	21.63	1.46	17.64	40.73	46.00	-5.27	QP
5	668.14	19.95	1.71	18.70	40.36	46.00	-5.64	QP
6	965.54	17.78	1.88	21.52	41.18	54.00	-12.82	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

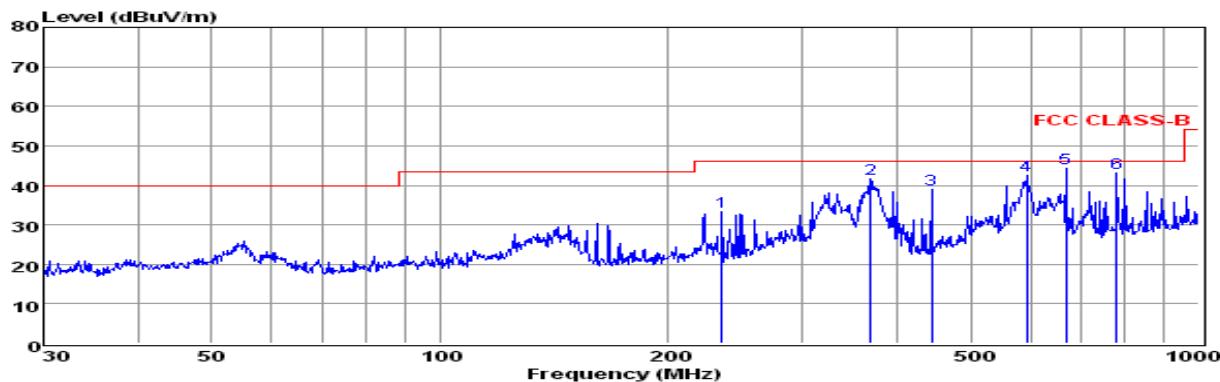

Env. / Ins: 24 °C / 56%
 EUT: Baby Monitor System
 M/N: SBT-AS1901
 Power Rating: AC 120V/60Hz
 Test Mode: TX-High channel
 Operator: Jacky
 Memo:
 pol: VERTICAL

Freq	Reading	CabLoss	Antfac	Measured		Limit	Over	Remark
				MHz	dBuV	dB	dB/m	
1	234.99	20.45	0.87	11.87	33.19	46.00	-12.81	QP
2	369.40	26.02	1.22	14.51	41.75	46.00	-4.25	QP
3	444.85	21.95	1.42	15.57	38.94	46.00	-7.06	QP
4	593.05	22.78	1.51	18.32	42.61	46.00	-3.39	QP
5	668.14	23.88	1.71	18.70	44.29	46.00	-1.71	QP
6	779.61	21.63	1.73	19.81	43.17	46.00	-2.83	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Above 1GHz

The worst test result for GFSK, Tx-Low Channel:

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4821.89	61.20	33.06	35.04	3.94	63.16	74	-10.84	Peak	Horizontal
4821.89	42.78	33.06	35.04	3.94	44.74	54	-9.26	Average	Horizontal
4821.89	58.19	33.06	35.04	3.94	60.15	74	-13.85	Peak	Vertical
4821.89	39.20	33.06	35.04	3.94	41.16	54	-12.84	Average	Vertical

The worst test result for GFSK, Tx-Middle Channel:

Freq. MHz	Reading Dbuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4882.45	61.44	33.16	35.15	3.96	63.41	74	-10.59	Peak	Horizontal
4882.45	42.81	33.16	35.15	3.96	44.78	54	-9.22	Average	Horizontal
4882.45	58.29	33.16	35.15	3.96	60.26	74	-13.74	Peak	Vertical
4882.45	39.49	33.16	35.15	3.96	41.46	54	-12.54	Average	Vertical

The worst test result for GFSK, Tx-High Channel:

Freq. MHz	Reading DBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Los dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4943.35	61.68	33.26	35.14	3.98	63.78	74	-10.22	Peak	Horizontal
4943.35	41.93	33.26	35.14	3.98	44.03	54	-9.97	Average	Horizontal
4943.35	58.02	33.26	35.14	3.98	60.12	74	-13.88	Peak	Vertical
4943.35	39.35	33.26	35.14	3.98	41.45	54	-12.55	Average	Vertical

Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. 18~25GHz at least have 20dB margin. No recording in the test report.

7.6 Results for Band edge Testing (Radiated)

Only record the worst test case (Tx, GFSK, Non-hopping) as following:

Tx-2402, GFSK, Non-hopping

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2390.00	49.63	32.89	35.16	3.51	50.87	74	-23.13	Peak	Horizontal
2390.00	38.75	32.89	35.16	3.51	39.99	54	-14.01	Average	Horizontal
2400.00	47.85	32.92	35.16	3.54	49.15	74	-24.85	Peak	Horizontal
2400.00	38.12	32.92	35.16	3.54	39.42	54	-14.58	Average	Horizontal
2390.00	48.54	32.89	35.16	3.51	49.78	74	-24.22	Peak	Vertical
2390.00	36.62	32.89	35.16	3.51	37.86	54	-16.14	Average	Vertical
2400.00	47.83	32.92	35.16	3.54	49.13	74	-24.87	Peak	Vertical
2400.00	37.44	32.92	35.16	3.54	38.74	54	-15.26	Average	Vertical

Tx-2480, GFSK, Non-hopping

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	49.98	33.06	35.18	3.60	51.46	74	-22.54	Peak	Horizontal
2483.50	38.67	33.06	35.18	3.60	40.15	54	-13.85	Average	Horizontal
2483.50	48.23	33.06	35.18	3.60	49.71	74	-24.29	Peak	Vertical
2483.50	35.90	33.06	35.18	3.60	37.38	54	-16.62	Average	Vertical


7.7. Power line conducted emissions

7.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

7.7.2 Block Diagram of Test Setup

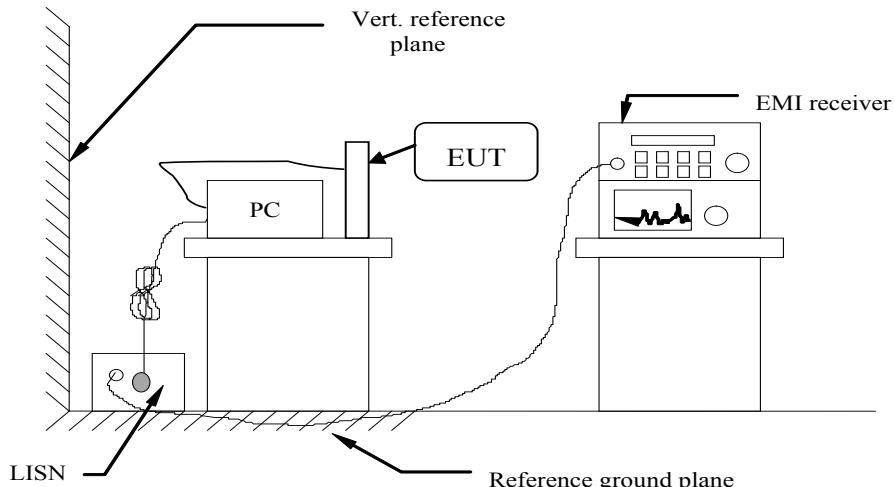


7.7.3 Test Results

PASS.

The test data please refer to following page.


Test result for GFSK (High Chanel)

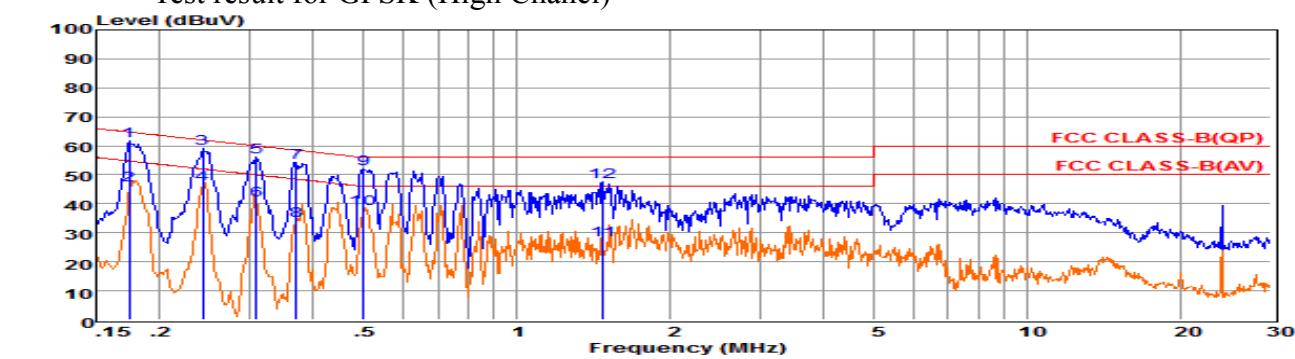

Env. Ins: 24*/56%
 EUT: Baby Monitor System
 M/N: SBT-AS1901
 Power Rating: AC 120V/60Hz
 Test Mode: TX-High channel
 Operator: Jacky
 Memo:
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.17399	42.17	9.64	0.02	10.00	61.83	64.77	-2.94	QP
2 0.17400	26.63	9.64	0.02	10.00	46.29	54.77	-8.48	Average
3 0.24293	39.48	9.60	0.03	10.00	59.11	62.00	-2.89	QP
4 0.24294	27.28	9.60	0.03	10.00	46.91	52.00	-5.09	Average
5 0.30834	36.50	9.60	0.03	10.00	56.13	60.02	-3.89	QP
6 0.30835	21.59	9.60	0.03	10.00	41.22	50.01	-8.79	Average
7 0.36920	34.60	9.61	0.03	10.00	54.24	58.52	-4.28	QP
8 0.36930	14.56	9.61	0.03	10.00	34.20	48.52	-14.32	Average
9 0.50203	32.21	9.62	0.04	10.00	51.87	56.00	-4.13	QP
10 0.50204	18.71	9.62	0.04	10.00	38.37	46.00	-7.63	Average
11 1.47967	7.65	9.63	0.05	10.00	27.33	46.00	-18.67	Average
12 1.47957	27.89	9.63	0.05	10.00	47.57	56.00	-8.43	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

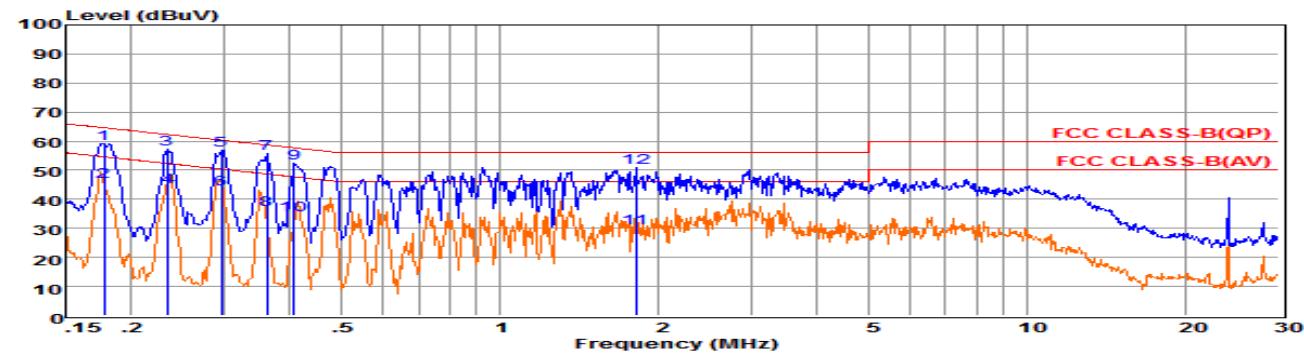

Env. Ins: 24*/56%
 EUT: Baby Monitor System
 M/N: SBT-AS1901
 Power Rating: AC 120V/60Hz
 Test Mode: TX-High channel
 Operator: Jacky
 Memo:
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.17772	39.47	9.61	0.02	10.00	59.10	64.59	-5.49	QP
2 0.17782	26.37	9.61	0.02	10.00	46.00	54.59	-8.59	Average
3 0.23409	37.54	9.63	0.03	10.00	57.20	62.30	-5.10	QP
4 0.23429	24.52	9.63	0.03	10.00	44.18	52.30	-8.12	Average
5 0.29554	37.20	9.63	0.03	10.00	56.86	60.37	-3.51	QP
6 0.29555	24.00	9.63	0.03	10.00	43.66	50.37	-6.71	Average
7 0.36146	36.09	9.62	0.03	10.00	55.74	58.69	-2.95	QP
8 0.36156	16.96	9.62	0.03	10.00	36.61	48.69	-12.08	Average
9 0.40615	32.74	9.62	0.04	10.00	52.40	57.73	-5.33	QP
10 0.40616	15.00	9.62	0.04	10.00	34.66	47.73	-13.07	Average
11 1.80967	10.38	9.64	0.05	10.00	30.07	46.00	-15.93	Average
12 1.80957	31.11	9.64	0.05	10.00	50.80	56.00	-5.20	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

8. ANTENNA REQUIREMENT

8.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

8.2.1. Standard Applicable

According to § 15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 0dBi, and the antenna is connect to PCB board and no consideration of replacement. Please see EUT photo for details.

8.2.3. Results: Compliance.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Limits:

FCC	IC
Antenna Gain	
6dBi	

T _{nom}	V _{nom}	Lowest channel 2410.870 MHz	Middle channel 2441.245 MHz	Highest channel 2471.620 MHz
Conducted power [dBm] Measured with GFSK modulation		14.724	14.527	14.291
Radiated power [dBm] Measured with GFSK modulation		16.724	16.477	16.221
Gain [dBi] Calculated		2.000	1.950	1.930
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

Result: -/-

-----THE END OF REPORT-----