

TEST REPORT

FCC ID: 2AEF5M10G1BA01

Product: Minno10

Model No.: M10G1BA01

Additional Model No.: A10G1BA01

Trade Mark: Minno, Armtab

Report No.: TCT150225E026

Issued Date: Apr. 20, 2015

Issued for:

Minno LLC

421 North Milpas Street, Santa Barbara, CA 93103 U.S.A.

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification.....	3
2. Test Result Summary	4
3. EUT Description	5
4. Genera Information.....	6
4.1. TEST ENVIRONMENT AND MODE.....	6
4.2. DESCRIPTION OF SUPPORT UNITS	7
5. Facilities and Accreditations	8
5.1. FACILITIES.....	8
5.2. LOCATION	8
5.3. MEASUREMENT UNCERTAINTY	8
6. Test Results and Measurement Data	9
6.1. ANTENNA REQUIREMENT	9
6.2. CONDUCTED EMISSION.....	10
6.3. CONDUCTED OUTPUT POWER.....	14
6.4. EMISSION BANDWIDTH	16
6.5. POWER SPECTRAL DENSITY	19
6.6. TEST SPECIFICATION.....	19
6.7. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	22
6.8. RADIATED SPURIOUS EMISSION MEASUREMENT	25
7. Photographs of Test Configuration	31
8. Photographs of EUT	33

1. Test Certification

Product:	Minno10
Model No.:	M10G1BA01
Additional Model No.:	A10G1BA01
Applicant:	Minno LLC
Address:	421 North Milpas Street, Santa Barbara, CA 93103 U.S.A.
Manufacturer:	Shenzhen Longhorn Technology Co.,Ltd.
Address:	Longhorn Hi-Tech Estate, Gongyeyuan Rd., Dalang Street, Baoan, Shenzhen, China.
Date of Test:	Mar. 02 – Mar. 31, 2015
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 KDB 558074 D01 DTS Meas Guidance v03r02

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:**Date:** Mar. 31, 2015

SKY

Reviewed By:**Date:** Apr. 17, 2015

Joe Zhou

Approved By:

Tomsin

Date: Apr. 20, 2015

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3)	PASS
6dB Emission Bandwidth	§15.247 (a)(2)	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	1§5.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Minno10
Model :	M10G1BA01
Additional Model:	A10G1BA01
Trade Mark:	Minno, Armtab
Operation Frequency:	2402MHz~2480MHz
Channel Separation:	2MHz
Number of Channel:	40
Modulation Technology:	GFSK
Antenna Type:	Internal Antenna
Antenna Gain:	1.6dBi
Power Supply:	Rechargeable Li-ion Battery DC3.7V, 4000mAh
Remark:	All models above are identical in interior structure, electrical circuits and components, and just differ in look and model for the marketing requirement.

Operation Frequency each of channel For GFSK

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark: Channel 0, 19 &39 selected for GFSK

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
<p>The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
GFSK	1Mbps

Final Test Mode:

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 1Mbps for GFSK Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
-----------------------	-------------------------------------

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The Bluetooth antenna is an internal PCB antenna which permanently attached, and the best case gain of the antenna is 1.6 dBi.

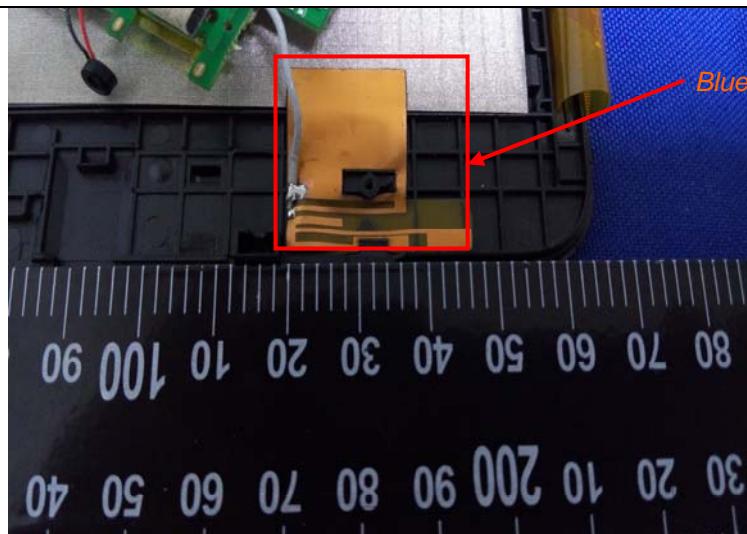

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.4: 2003														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p>Reference Plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Refer to section 4.1 for details														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2009 on conducted measurement. 														
Test Result:	PASS														

6.2.2. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Sep. 16, 2015
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 29, 2015
Coax cable	TCT	N/A	N/A	Sep. 15, 2015
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test data

Please refer to following diagram for individual


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

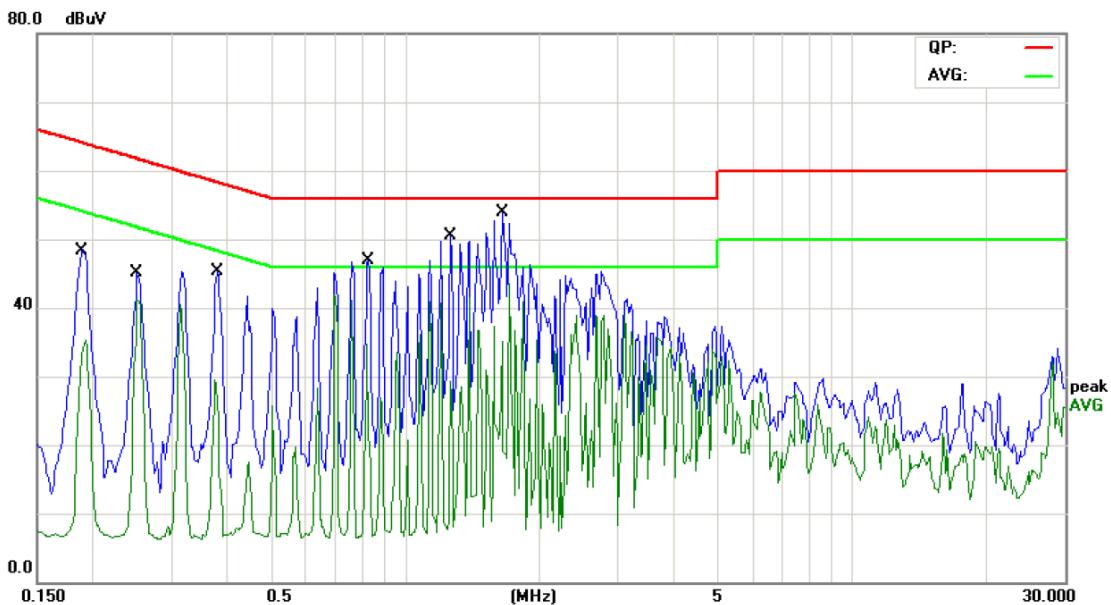

Site: Chamber #1 Phase: **N** Temperature: 23 (C)
 Limit: FCC PART15 Conduction(QP) Power: AC 120V/60Hz Humidity: 52 %

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
			dBuV	dB	dBuV	dB	Detector	
1		0.1891	35.18	11.49	46.67	64.07	-17.40	QP
2		0.1891	23.53	11.49	35.02	54.07	-19.05	AVG
3		0.2516	32.55	11.45	44.00	61.70	-17.70	QP
4		0.2516	24.59	11.45	36.04	51.70	-15.66	AVG
5		0.3805	31.27	11.37	42.64	58.27	-15.63	QP
6		0.3805	22.39	11.37	33.76	48.27	-14.51	AVG
7		0.8297	25.76	11.21	36.97	56.00	-19.03	QP
8		0.8297	4.28	11.21	15.49	46.00	-30.51	AVG
9		1.2672	34.87	11.32	46.19	56.00	-9.81	QP
10		1.2672	11.68	11.32	23.00	46.00	-23.00	AVG
11 *		1.6461	37.22	11.51	48.73	56.00	-7.27	QP
12		1.6461	16.46	11.51	27.97	46.00	-18.03	AVG

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

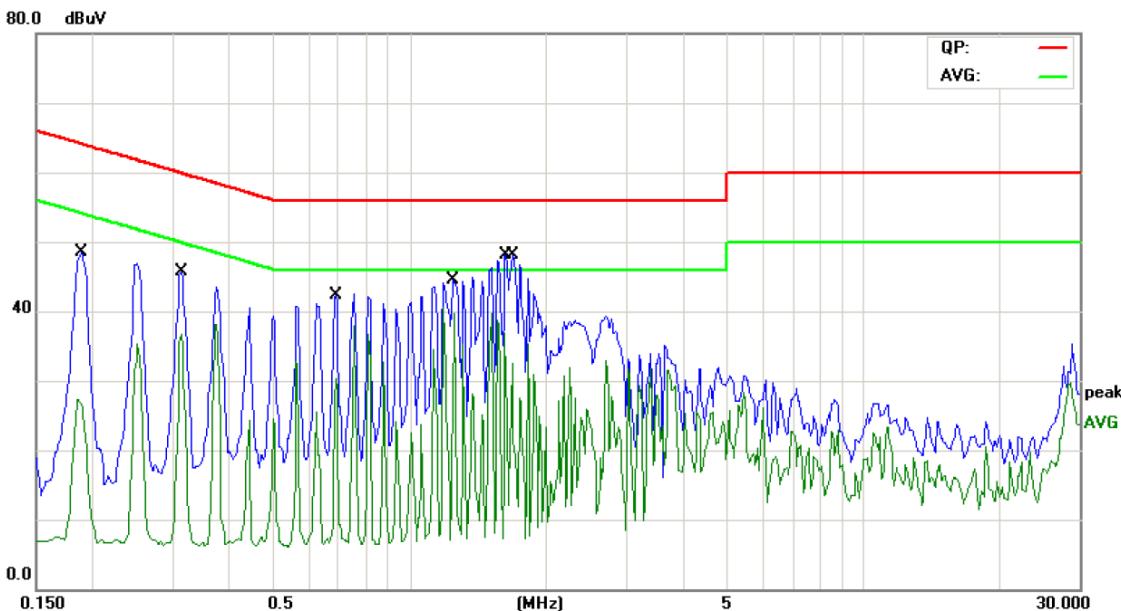

Site Chamber #1				Phase:	L1	Temperature:	23 (C)	
Limit: FCC PART15 Conduction(QP)				Power:	AC 120V/60Hz	Humidity:	52 %	
No.	Mk.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dB μ V	dB	dB μ V	dB μ V	dB	Detector	
1	0.1891	35.16	11.47	46.63	64.07	-17.44	QP	
2	0.1891	22.75	11.47	34.22	54.07	-19.85	AVG	
3	0.3141	32.73	11.40	44.13	59.86	-15.73	QP	
4	0.3141	24.11	11.40	35.51	49.86	-14.35	AVG	
5	0.6891	29.47	11.23	40.70	56.00	-15.30	QP	
6	0.6891	22.66	11.23	33.89	46.00	-12.11	AVG	
7	1.2477	30.96	11.29	42.25	56.00	-13.75	QP	
8	1.2477	19.11	11.29	30.40	46.00	-15.60	AVG	
9	1.6305	33.84	11.49	45.33	56.00	-10.67	QP	
10	*	1.6305	23.87	11.49	35.36	46.00	-10.64	AVG
11	1.6969	33.44	11.52	44.96	56.00	-11.04	QP	
12	1.6969	19.05	11.52	30.57	46.00	-15.43	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)


Q.P. = Quasi-Peak

AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.3. Conducted Output Power

6.3.1. Test Specification

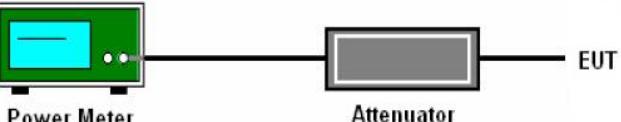Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2009 and KDB558074
Limit:	30dBm
Test Setup:	 <p>The diagram illustrates the test setup. A green rectangular box labeled 'Power Meter' contains a blue screen with a horizontal bar. A grey rectangular box labeled 'Attenuator' is connected to the right of the power meter. A third grey rectangular box labeled 'EUT' is connected to the right of the attenuator. A horizontal line connects the three components in a linear sequence.</p>
Test Mode:	Refer to section 4.1 for details
Test Procedure:	<ol style="list-style-type: none">1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.3. Set to the maximum power setting and enable the EUT transmit continuously.4. Measure the conducted output power and record the results in the test report.
Test Result:	PASS

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1005002	Dec. 11, 2015
Pulse Power Senor	Anritsu	MA2411B	0917070	Dec. 11, 2015


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data

GFSK mode			
Test channel	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.98	30.00	PASS
Middle	-3.58	30.00	PASS
Highest	-3.79	30.00	PASS

6.4. Emission Bandwidth

6.4.1. Test Specification

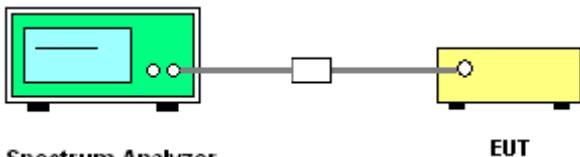Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	>500kHz
Test Setup:	
Test Mode:	Refer to section 4.1 for details
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02. 2. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 5. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep.16, 2015


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.4.3. Test data


Test channel	6dB Emission Bandwidth (KHz)
	GFSK
Lowest	711.54
Middle	701.92
Highest	706.73
Limit:	>500k
Test Result:	PASS

Test plots as follows:


Lowest channel

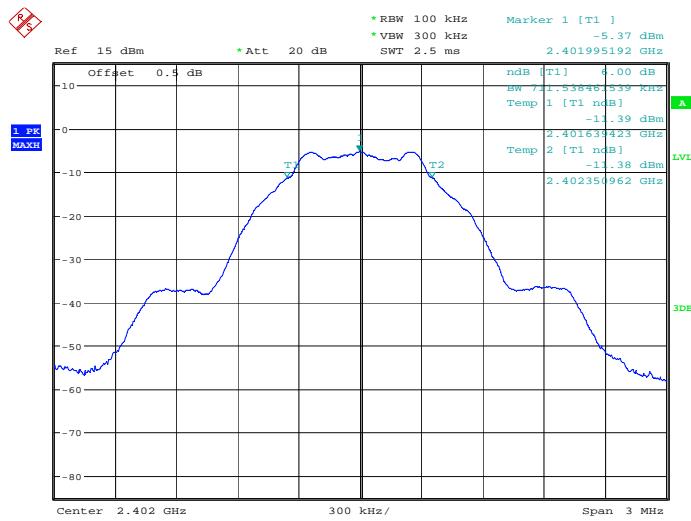

Middle channel

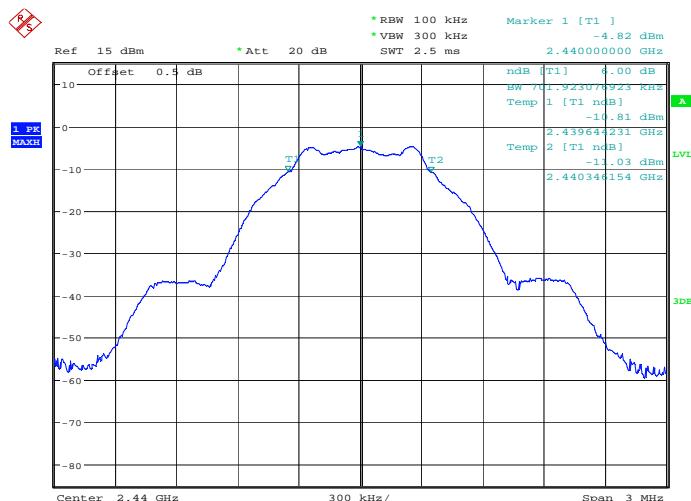

Highest channel

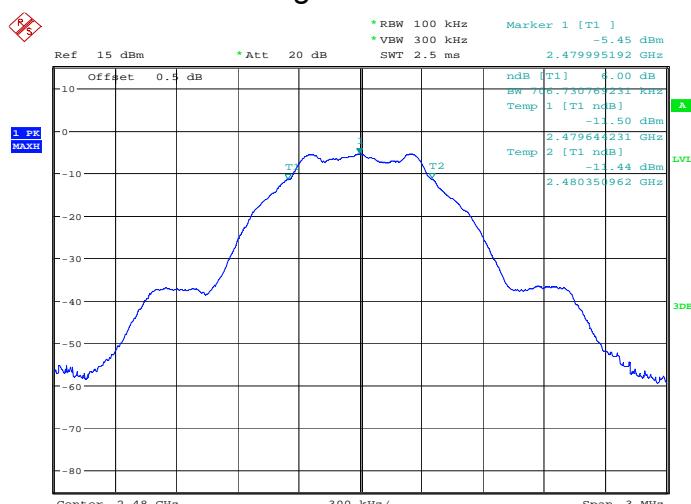

6.5. Power Spectral Density

6.6. Test Specification

6.6.1. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep.16, 2015


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.6.2. Test data


Test channel	Power Spectral Density (dBm)
Lowest	-20.37
Middle	-19.37
Highest	-20.04
Limit:	8dBm
Test Result:	PASS

Test plots as follows:


Lowest channel

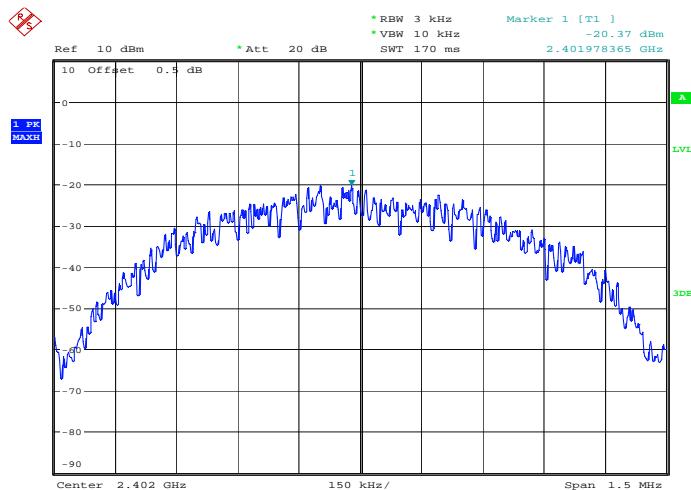

Middle channel

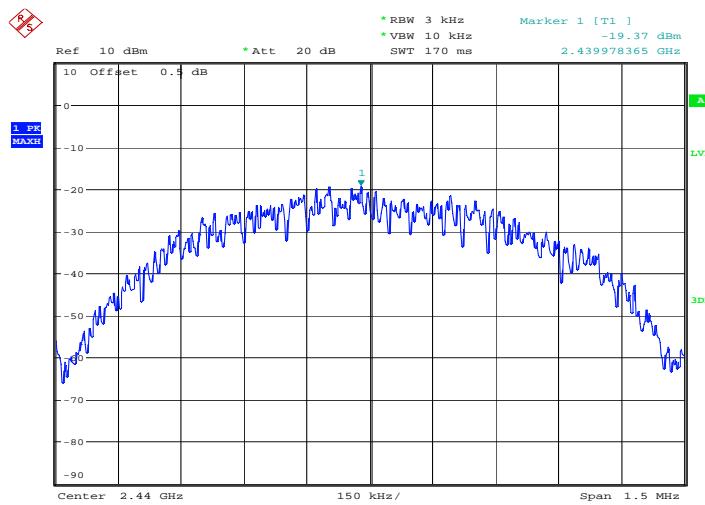


Highest channel

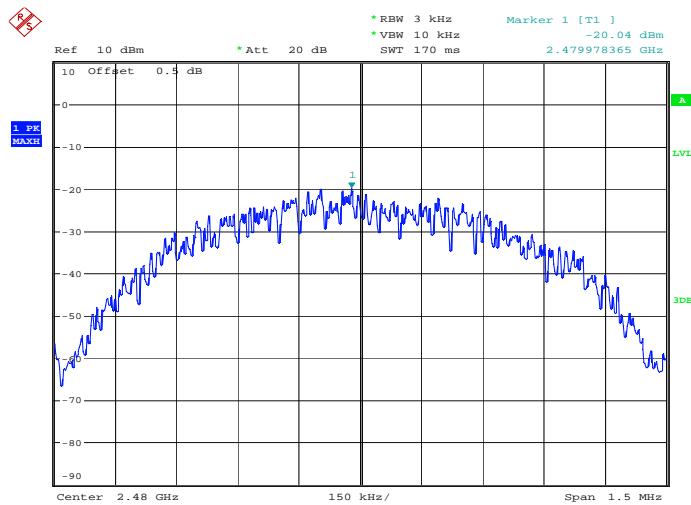

6.7. Conducted Band Edge and Spurious Emission Measurement

6.7.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Refer to section 4.1 for details
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS


6.7.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep.16, 2015
Spectrum Analyzer	Agilent	N9020A	MY49100060	Oct. 21, 2015


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.7.3. Test Data

GFSK Mode

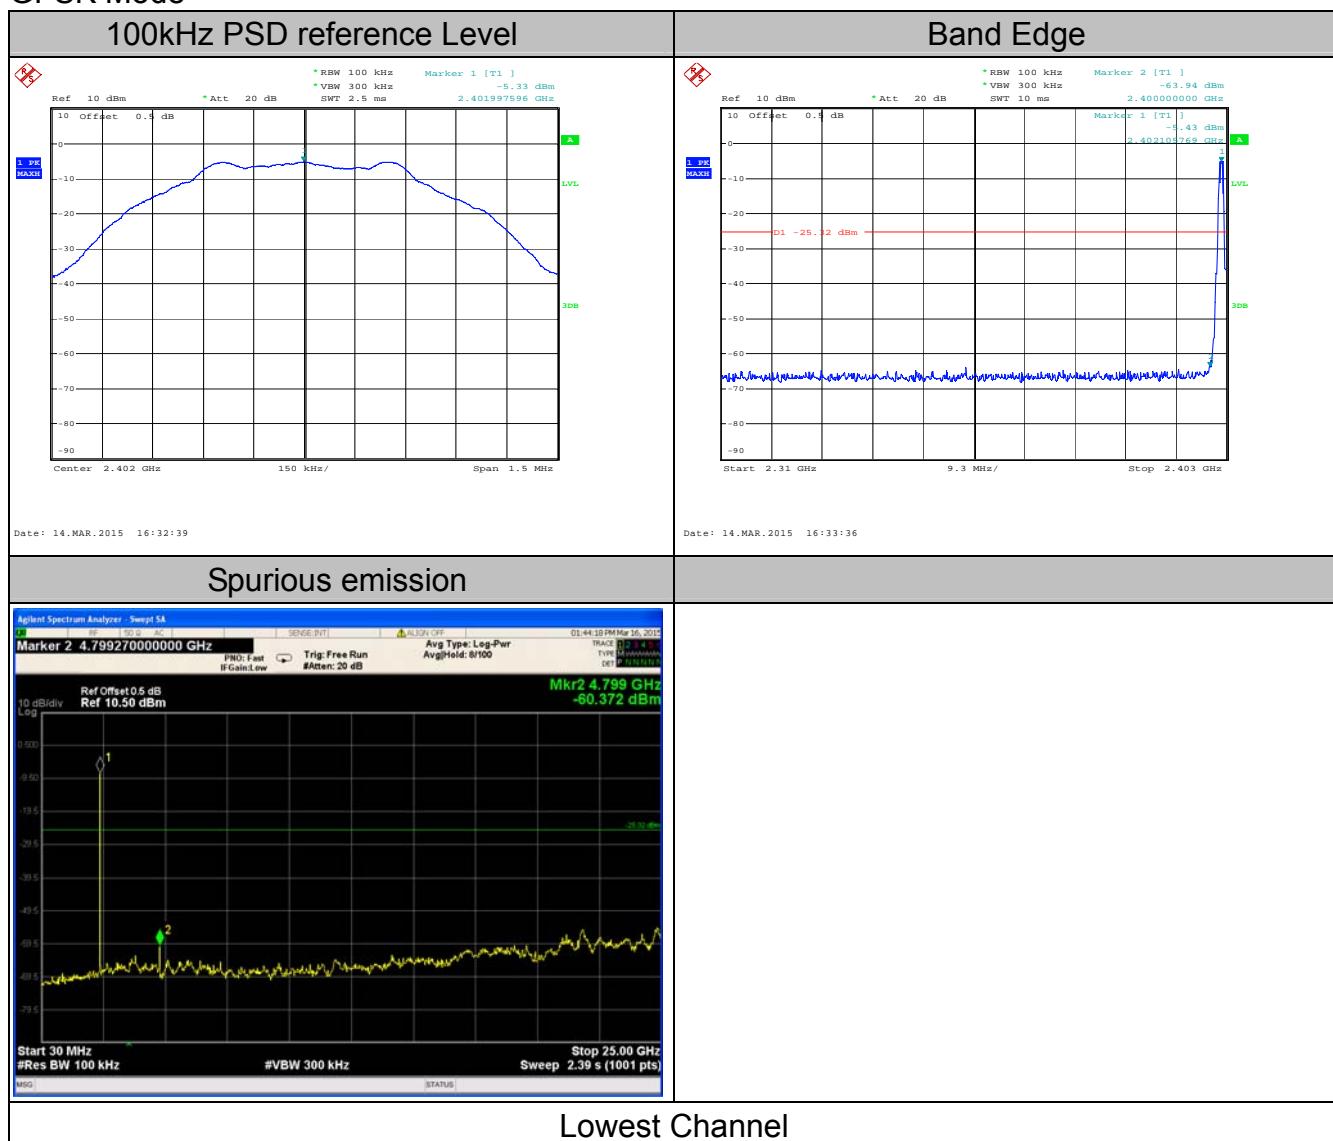

100kHz PSD reference Level

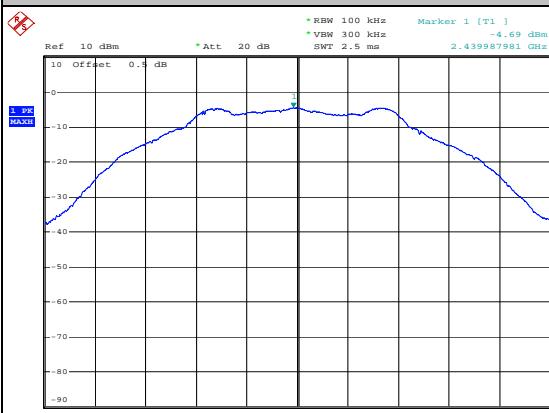

Date: 14.MAR.2015 16:34:18

Spurious emission




Middle Channel

100kHz PSD reference Level




Date: 14.MAR.2015 16:29:22

Band Edge

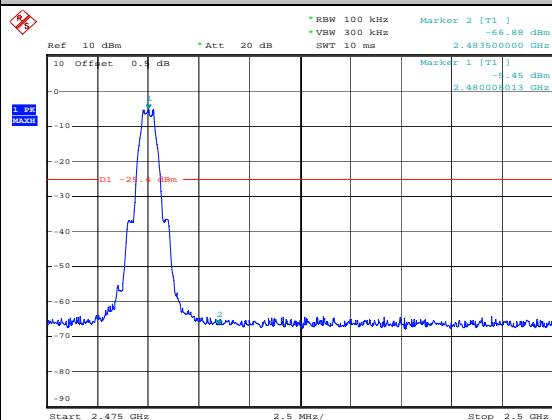

Date: 14.MAR.2015 16:31:09


Spurious emission

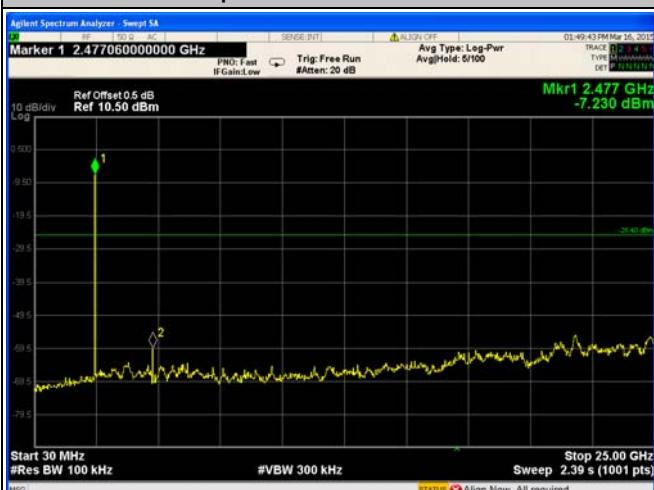


Highest Channel


6.8. Radiated Spurious Emission Measurement

6.8.1. Test Specification

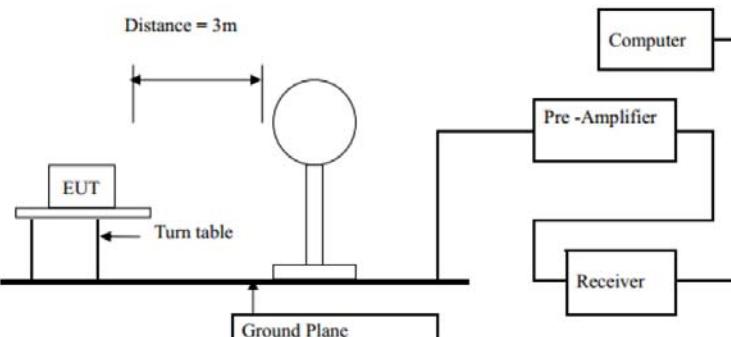Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4: 2009 and ANSI C63.10-2013				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)		300	
	0.490-1.705	24000/F(KHz)		30	
	1.705-30	30		30	
	30-88	100		3	
	88-216	150		3	
	216-960	200		3	
	Above 960	500		3	
	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)	Detector
	Above 1GHz	500		3	Average
		5000		3	Peak
Test setup:	For radiated emissions below 30MHz  30MHz to 1GHz				

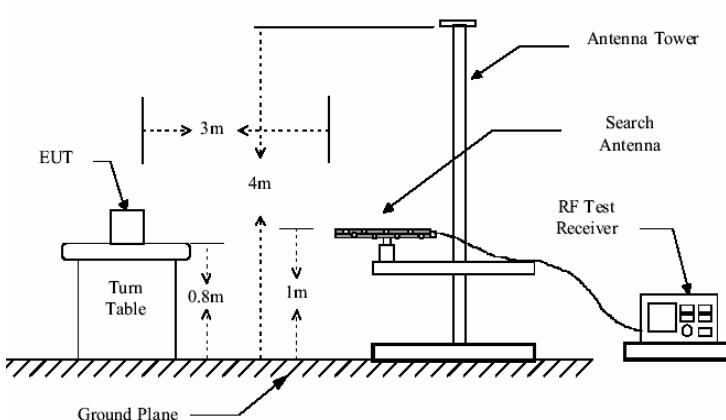

Above 1GHz

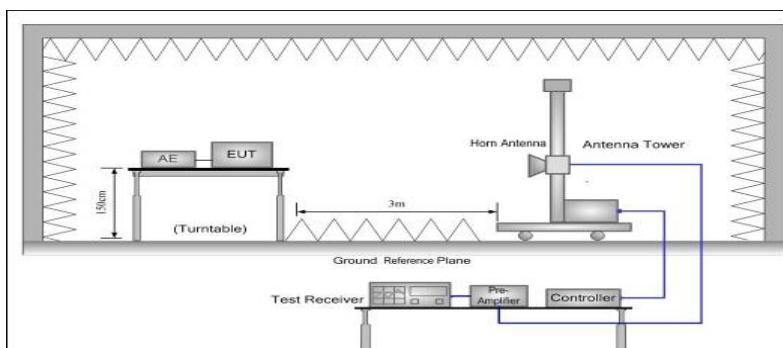

Test Procedure:

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground in below1GHz, 1.5 meter for above 1GHz
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW;

	<p>Sweep = auto; Detector function = peak; Trace = max hold;</p> <p>(3) Set RBW = 1 MHz, VBW= 3MHz for f < 1 GHz for peak measurement.</p> <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test results:	PASS

6.8.2. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep.16 , 2015
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Sep.16 , 2015
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep.16 , 2015
Pre-amplifier	HP	8447D	2727A05017	Sep.16 , 2015
Loop antenna	ZHINAN	ZN30900A	12024	Dec.14 , 2015
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep.16 , 2015
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep.16 , 2015
Coax cable	TCT	N/A	N/A	Sep.15 , 2015
Coax cable	TCT	N/A	N/A	Sep.15 , 2015
Coax cable	TCT	N/A	N/A	Sep.15 , 2015
Coax cable	TCT	N/A	N/A	Sep.15 , 2015
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.8.3. Test Data

Below 1GHz

Horizontal:

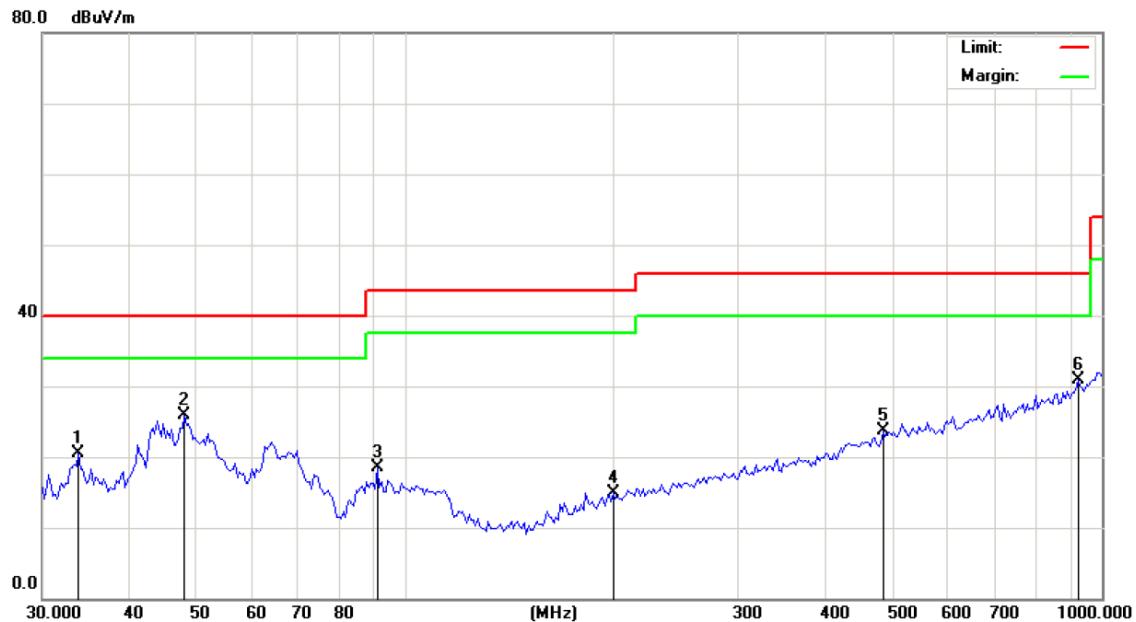

Site

Polarization: **Horizontal**

Temperature: 23

Limit: FCC Part 15B Class B RE_3 m

Power: AC 120V/60Hz

Humidity: 50 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		33.8066	33.75	-13.25	20.50	40.00	-19.50	peak	0	
2	*	48.0392	37.99	-12.12	25.87	40.00	-14.13	peak	0	
3		91.0574	31.24	-12.82	18.42	43.50	-25.08	peak	0	
4		198.6424	26.75	-11.77	14.98	43.50	-28.52	peak	0	
5		484.9067	27.22	-3.46	23.76	46.00	-22.24	peak	0	
6		925.6132	27.30	3.54	30.84	46.00	-15.16	peak	0	

Vertical:



Site

 Polarization: **Vertical**

Temperature: 23

Limit: FCC Part 15B Class B RE_3 m

Power: AC 120V/60Hz

Humidity: 50 %

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
			dBuV	dB	dBuV/m					
1	30.6390	44.29	-13.64	30.65	40.00	-9.35	peak	0		
2 *	43.8451	44.13	-12.30	31.83	40.00	-8.17	peak	0		
3	57.2653	33.19	-12.59	20.60	40.00	-19.40	peak	0		
4	91.6994	28.90	-12.72	16.18	43.50	-27.32	peak	0		
5	263.1154	27.28	-9.51	17.77	46.00	-28.23	peak	0		
6	713.6915	27.14	0.31	27.45	46.00	-18.55	peak	0		

Note:

1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported
2. Measurements were conducted in all three channels (high, middle, low), and the worst case (Middle channel) was submitted only.

Above 1GHz

Low channel: 2402 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
1378.25	H	49.07	---	-4.20	44.87	---	74	54	-9.13
4804.00	H	50.48	---	-3.94	46.54	---	74	54	-7.46
7206.00	H	45.04	---	0.52	45.56	---	74	54	-8.44
---	H	---	---	---	---	---	---	---	---
---	H	---	---	---	---	---	---	---	---
1378.25	V	48.38	---	-4.25	44.13	---	74	54	-9.87
4804.00	V	50.89	---	-3.94	46.95	---	74	54	-7.05
7206.00	V	44.65	---	0.59	45.24	---	74	54	-8.76
---	V	---	---	---	---	---	---	---	---
---	V	---	---	---	---	---	---	---	---

Middle channel: 2440MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
1226.85	H	49.40	---	-4.20	45.20	---	74	54	-8.80
4884.00	H	50.67	---	-3.98	46.69	---	74	54	-7.31
7326.00	H	45.28	---	0.56	45.84	---	74	54	-8.16
---	H	---	---	---	---	---	---	---	---
---	H	---	---	---	---	---	---	---	---
1306.45	V	48.91	---	-4.25	44.66	---	74	54	-9.34
4882.00	V	50.10	---	-3.98	46.12	---	74	54	-7.88
7323.00	V	44.56	---	0.57	45.13	---	74	54	-8.87
---	V	---	---	---	---	---	---	---	---
---	V	---	---	---	---	---	---	---	---

High channel: 2480 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
1303.34	H	48.28	---	-4.20	44.08	---	74	54	-9.92
4960.00	H	49.44	---	-3.98	45.46	---	74	54	-8.54
7440.00	H	44.50	---	0.52	45.02	---	74	54	-8.98
---	H	---	---	---	---	---	---	---	---
---	H	---	---	---	---	---	---	---	---
1309.82	V	48.84	---	-4.25	44.59	---	74	54	-9.41
4960.00	V	49.93	---	-3.98	45.95	---	74	54	-8.05
7440.00	V	45.11	---	0.57	45.68	---	74	54	-8.32
---	V	---	---	---	---	---	---	---	---
---	V	---	---	---	---	---	---	---	---

Note:


1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.


7. Photographs of Test Configuration

Conducted Emission




Radiated Emission


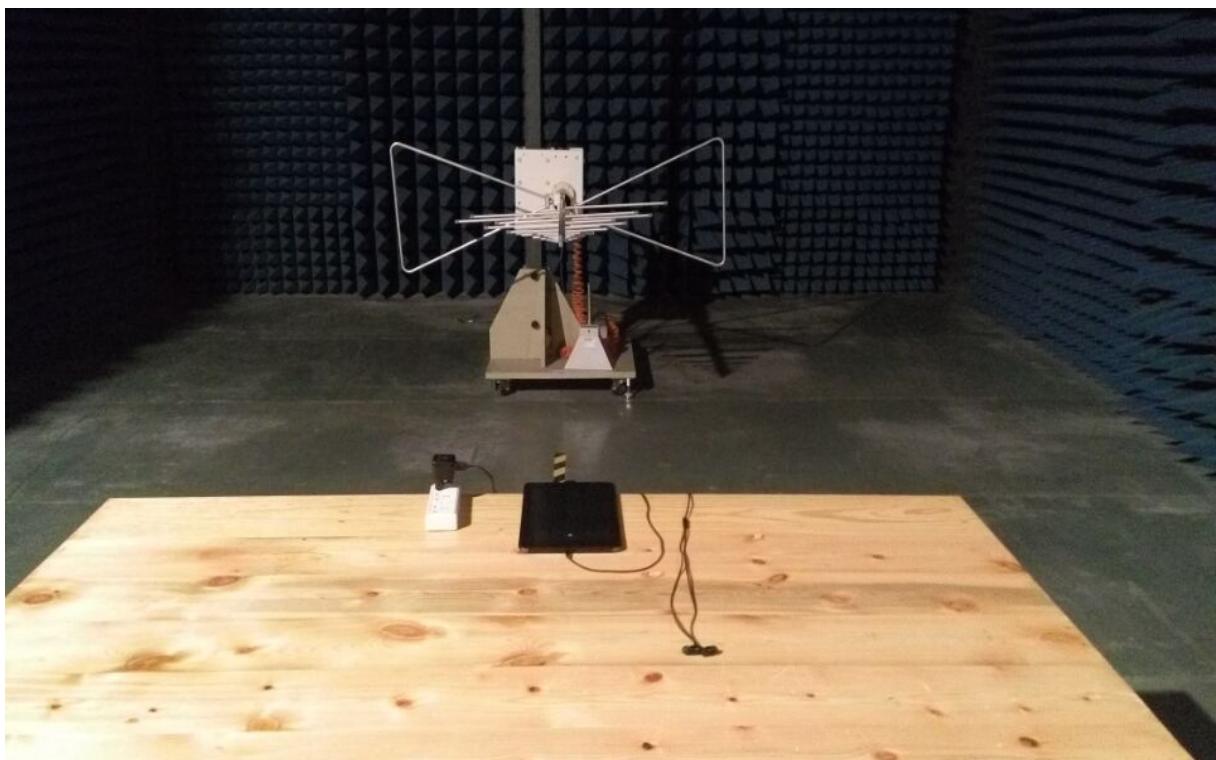



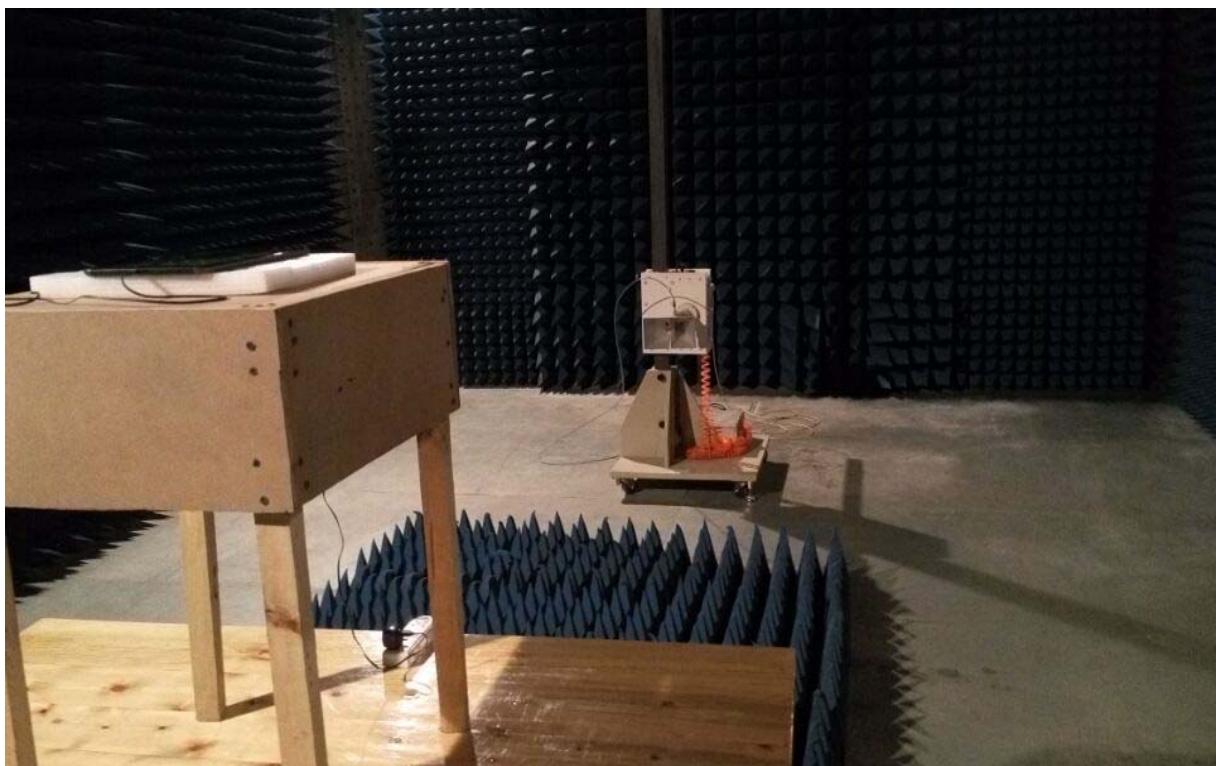


8. Photographs of EUT

Outside View

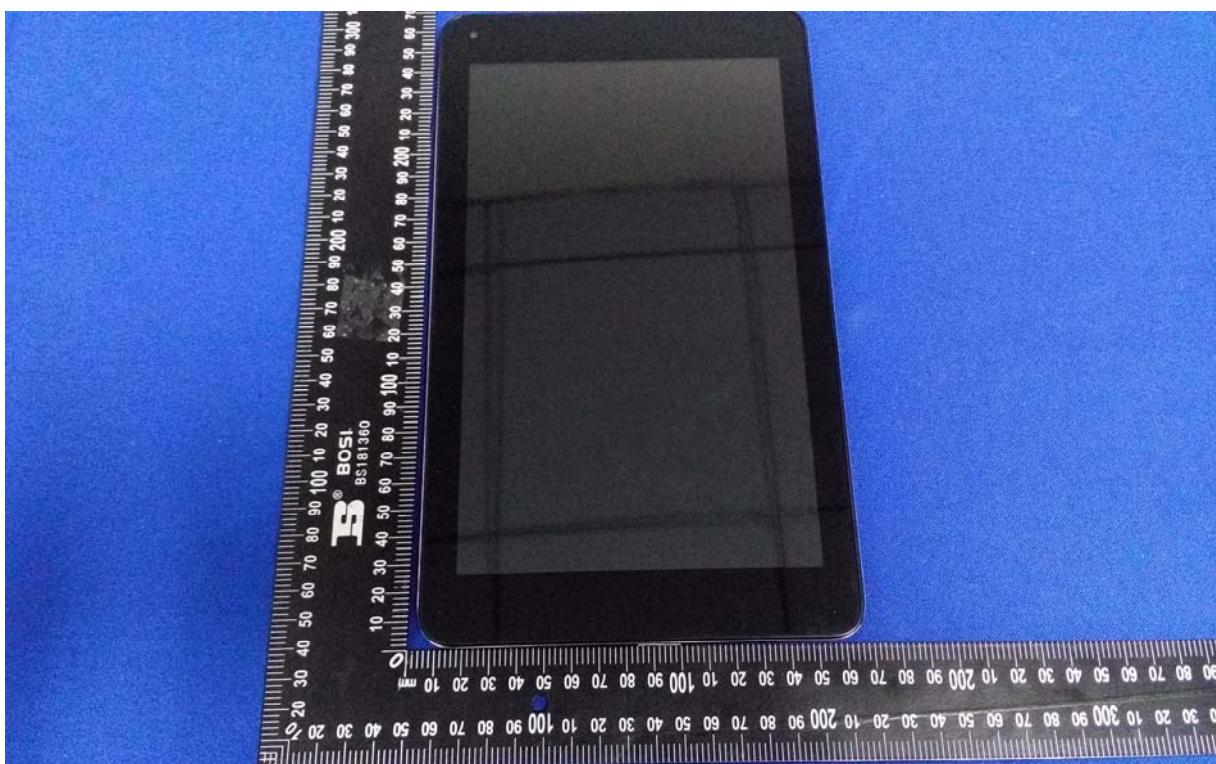


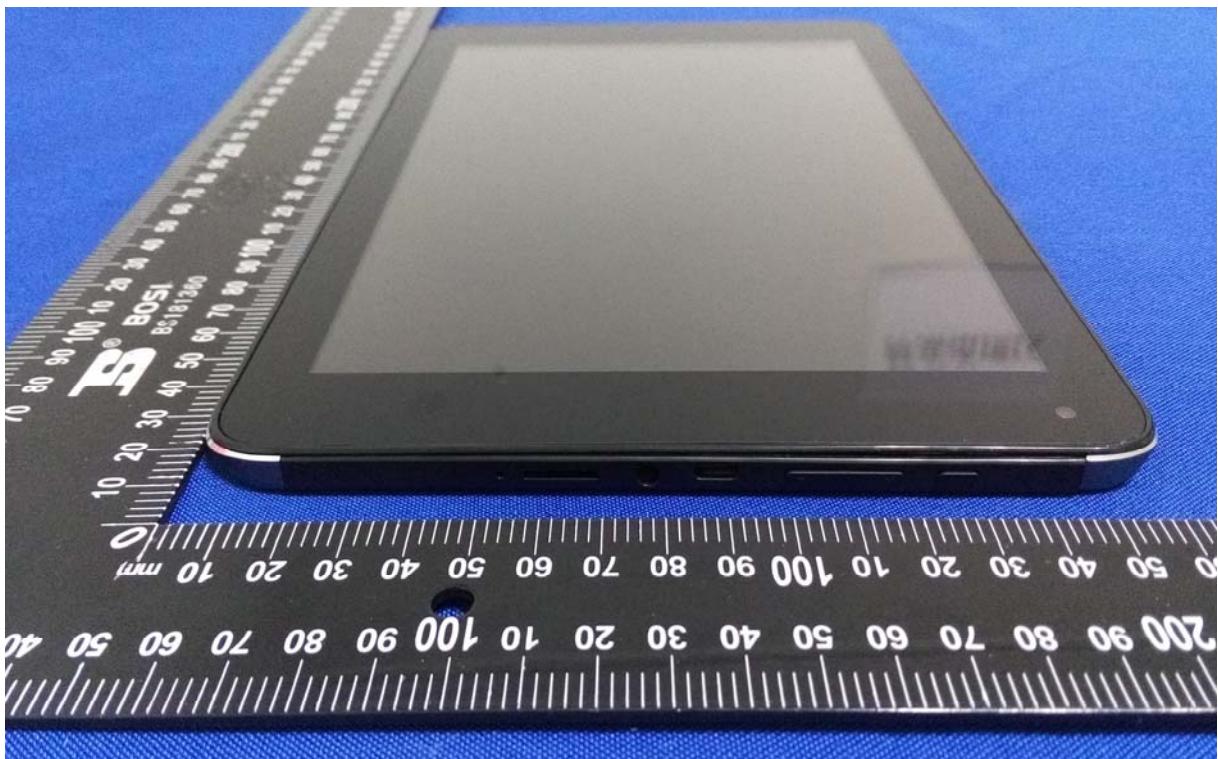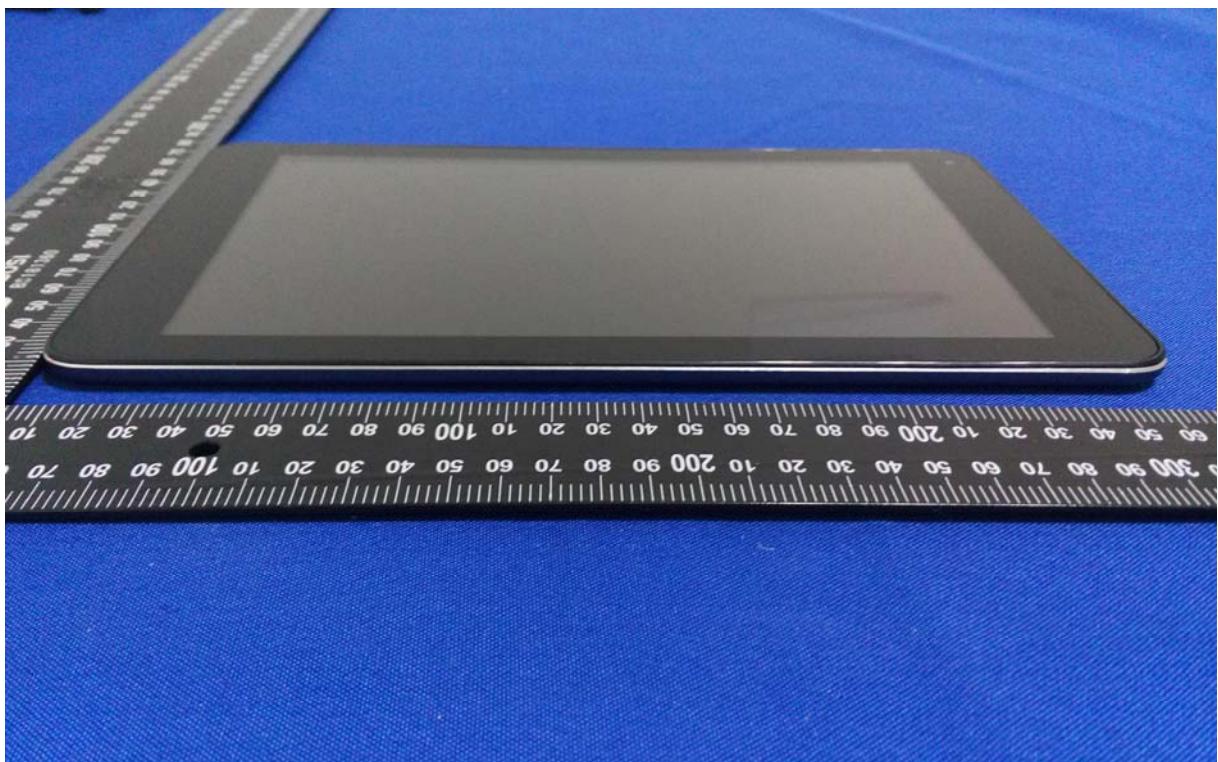


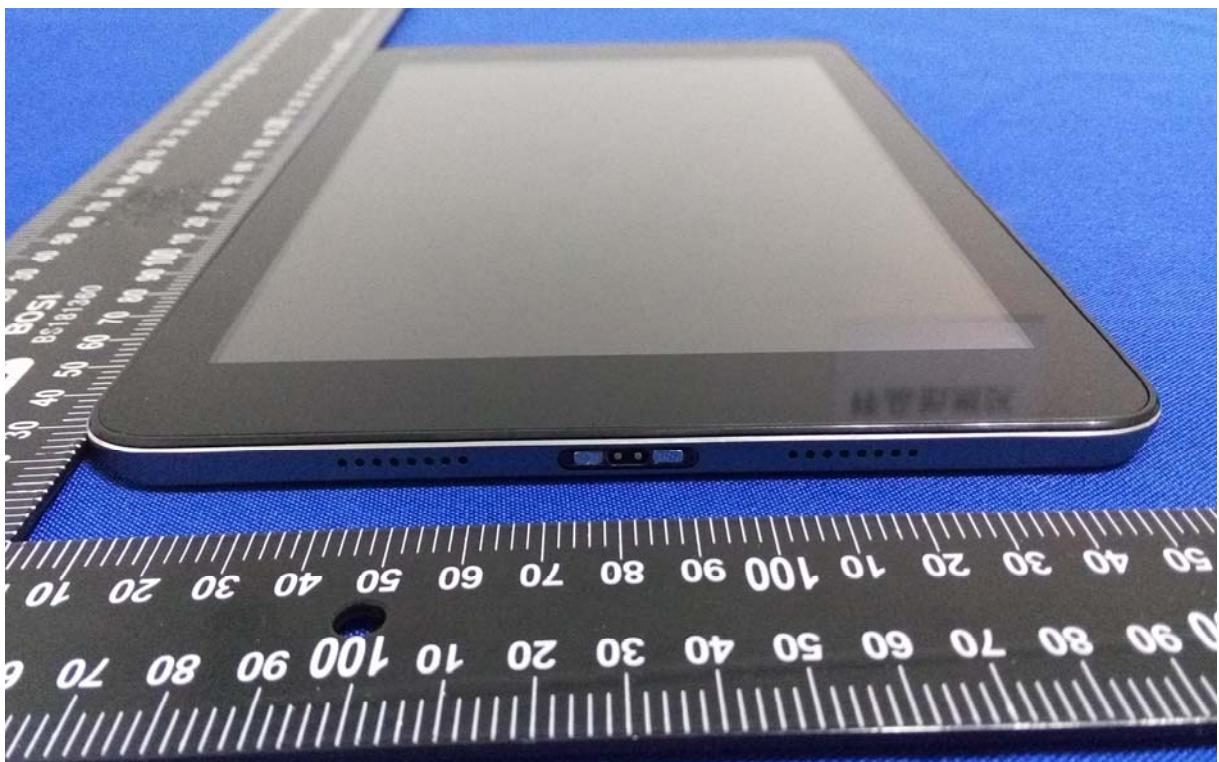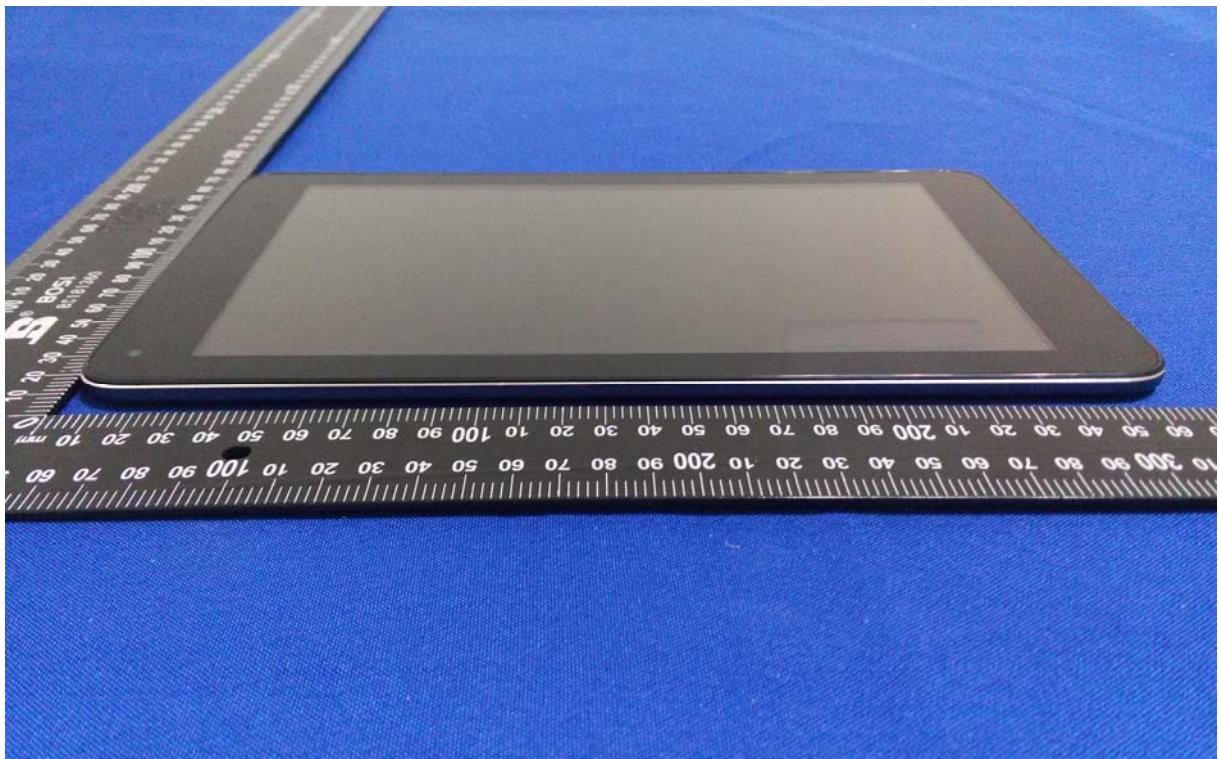





Inside View

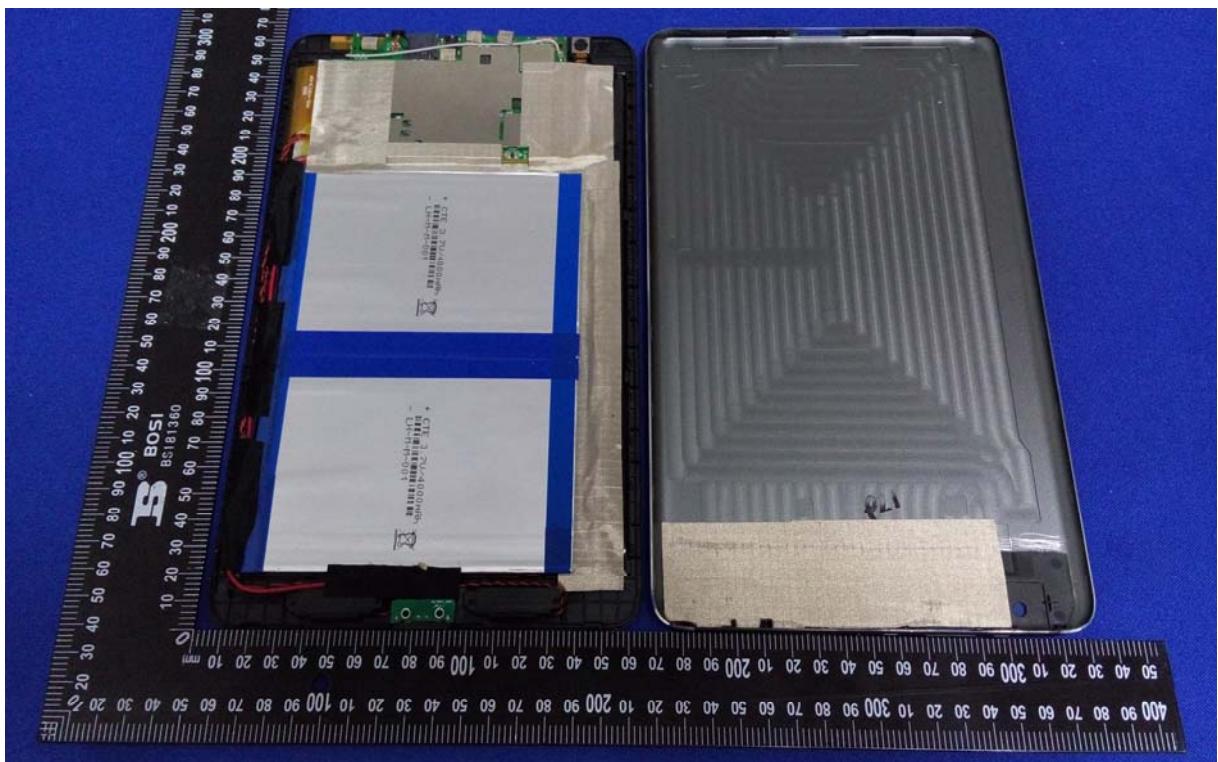

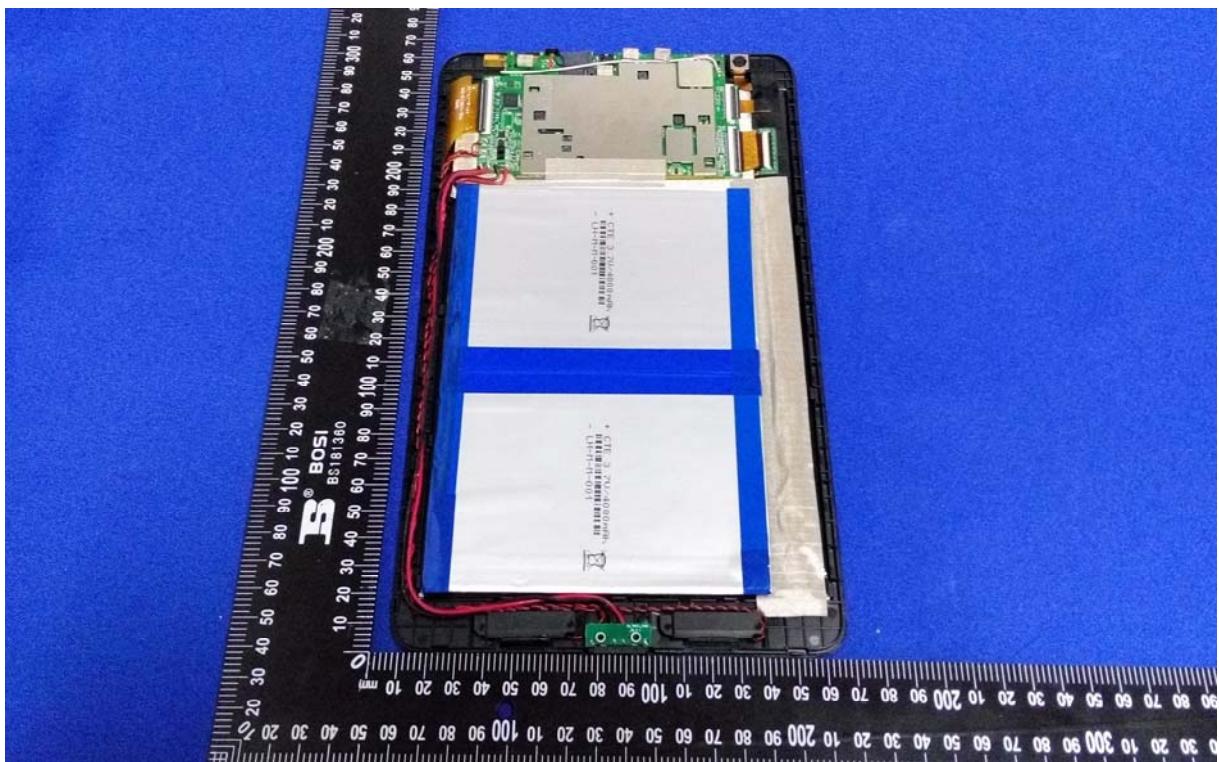

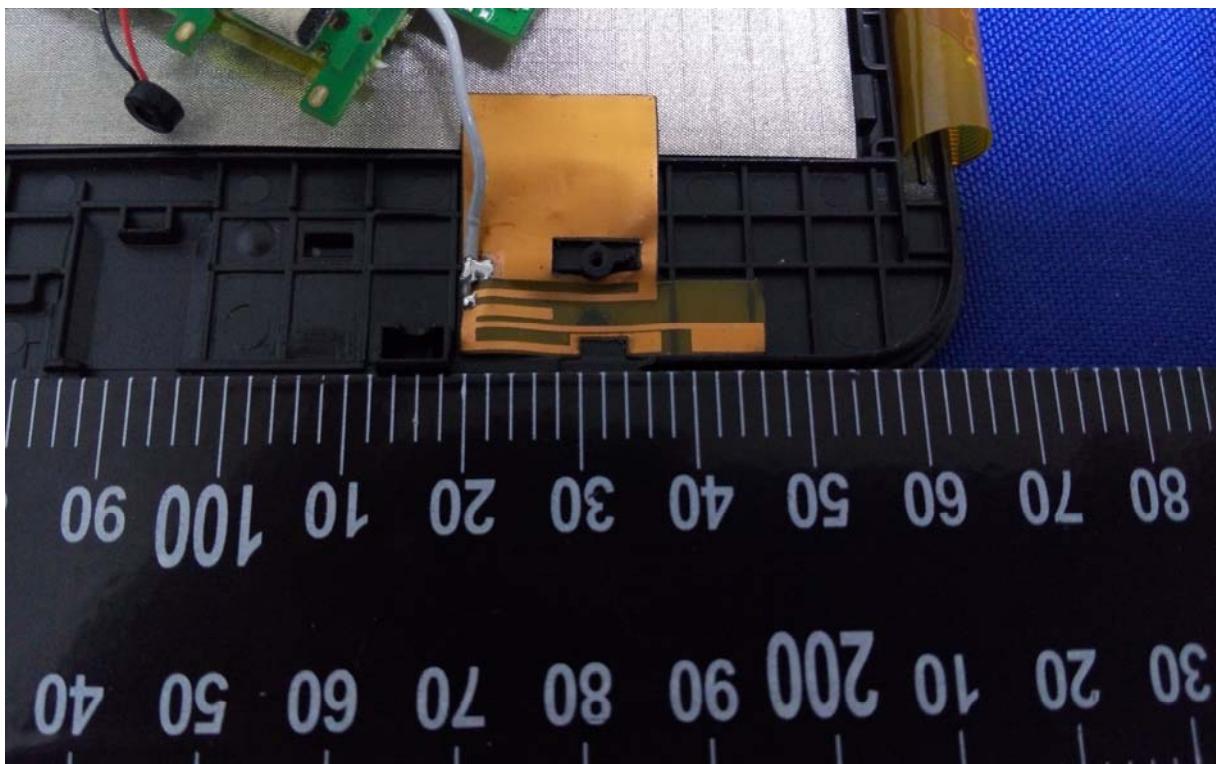

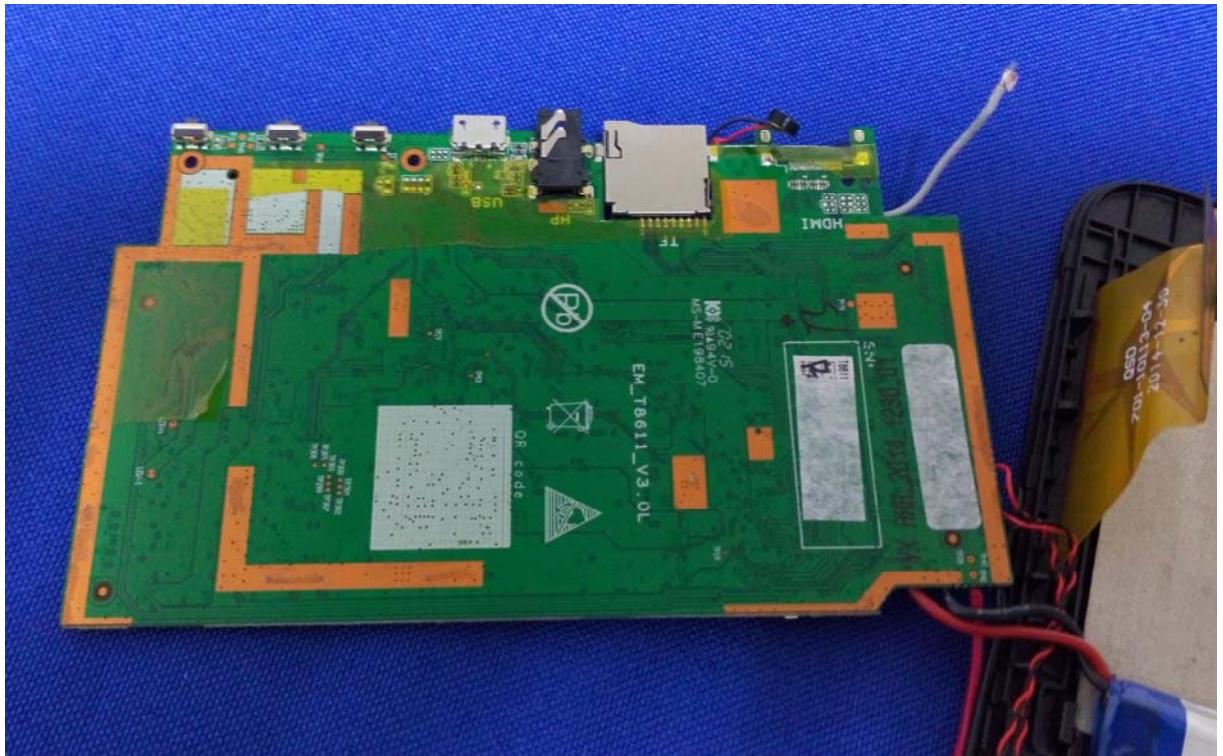

*****END OF REPORT*****