



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 15 SUBPART C TEST REPORT

Part 15.247

Report Reference No.....: CTL1502060364-WF01

Compiled by

(position+printed name+signature) ..: File administrators Happy Guo

Happy Guo

Name of the organization performing
the tests

Test Engineer Nice Nong

Nice Nong

(position+printed name+signature) ..:

Approved by

(position+printed name+signature) ..: Manager Tracy Qi

Tracy Qi

Date of issue.....: Apr. 06, 2015

Test Laboratory Name: Shenzhen CTL Testing Technology Co., Ltd.

Address: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Applicant's name.....: HYIN TECHNOLOGY CO.,LTD

Address: 709, Building 212, Tairan Industrial Part, Che Gong Miao, Futian
District, Shenzhen, Guangdong, China

Test specification:

Standard: FCC Part 15.247: Operation within the bands 902–928 MHz, 2400–
2483.5 MHz, and 5725–5850 MHz.

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Industrial Rugged Handheld Computer

FCC ID.....: 2AEG8-HY3800W

Trade Mark



Model/Type reference: HY3800W

Modulation: 802.11b DSSS, 802.11g: OFDM

Work Frequency Range: 802.11b/g: 2412~2462MHz

Antenna Type: Internal

Antenna Gain.....: 1.0dBi

Result: **Positive**

TEST REPORT

Test Report No. :	CTL1502060364-WF01	Apr. 06, 2015 Date of issue
-------------------	--------------------	--------------------------------

Equipment under Test : Industrial Rugged Handheld Computer

Model /Type : HY3800W

Applicant : HYIN TECHNOLOGY CO.,LTD

Address : 709, Building 212, Tairan Industrial Part, Che Gong Miao, Futian District, Shenzhen, Guangdong, China

Manufacturer : HYIN TECHNOLOGY CO.,LTD

Address : 709, Building 212, Tairan Industrial Part, Che Gong Miao, Futian District, Shenzhen, Guangdong, China

Test Result according to the standards on page 4:

Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	4
<u>2.</u>	<u>SUMMARY</u>	5
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	6
2.5.	EUT configuration	6
2.6.	NOTE	6
2.7.	Related Submittal(s) / Grant (s)	6
2.8.	Modifications	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	7
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Configuration of Tested System	7
3.5.	Duty Cycle	8
3.6.	Statement of the measurement uncertainty	8
3.7.	Equipments Used during the Test	9
3.8.	Summary of Test Result	10
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	11
4.1.	Conducted Emissions Test	11
4.2.	Radiated Emission Test	14
4.3.	6dB Bandwidth Measurement	20
4.4.	Maximum Peak Output Power	24
4.5.	Band Edge Measurement	25
4.6.	Power Spectral Density Measurement	42
4.7.	Spurious RF Conducted Emission	46
4.8.	Antenna Requirement	54

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

ANSI C63.4-2009

KDB Publication No. 558074 D01 v03r02 Guidance on Measurements for Digital Transmission Systems



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Mar. 07, 2015
Testing commenced on	:	Mar. 07, 2015
Testing concluded on	:	Mar. 31, 2015

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input checked="" type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 7.4V from battery

Description of the test mode

IEEE 802.11b/g: Thirteen channels are provided to the EUT, but only eleventh channels used for USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.3. Short description of the Equipment under Test (EUT)

Industrial Rugged Handheld Computer, support 802.11b/g.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

Test Mode:

1. The EUT has been tested under normal operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel low (2412MHz), mid (2437MHz) and high (2462MHz) for 802.11b/g with highest data rate are chosen for full testing.
3. Test Mode:

Test Mode(TM)	Description	Remark
1	Transmitting	802.11 b 2412MHz, 2437MHz, 2462MHz
2	Transmitting	802.11 g 2412MHz, 2437MHz, 2462MHz

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer

- supplied by the lab

AC adapter

Manufacturer: HYIN TECHNOLOGY CO.,LTD

Model No.: JT-H9001000

2.6. NOTE

1. The EUT is a Industrial Rugged Handheld Computer, The functions of the EUT listed as below:

	Test Standards	Reference Report
WLAN 802.11b/g, 802.11n	FCC Part 15 Subpart C (Section15.247) FCC Per 47 CFR 2.1091(b)	CTL1502060364-WF01 CTL1502060364-SAR

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	✓	—	—	—
802.11g	✓	—	—	—

3. The EUT incorporates a SISO function.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCCID: 2AEG8-HY3800W filing to comply with of the FCC part15.247 Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:


Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

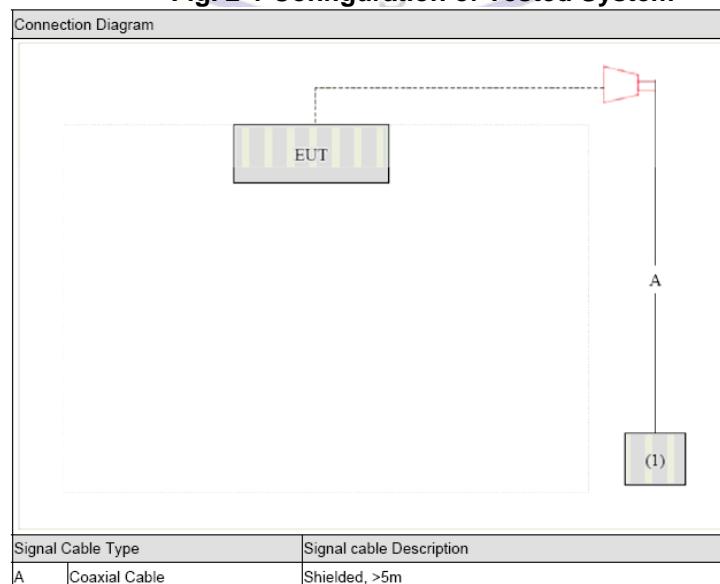

3.5. Duty Cycle

Operated Mode for Worst Duty Cycle		
<input type="checkbox"/> Operated normally mode for worst duty cycle <input checked="" type="checkbox"/> Operated test mode for worst duty cycle		
Mode	Duty Cycle (%)	Duty Factor (dB)
11b	100	0
11g	100	0


3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Radiated Emission	12.75GHz-25 GHz	4.68dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

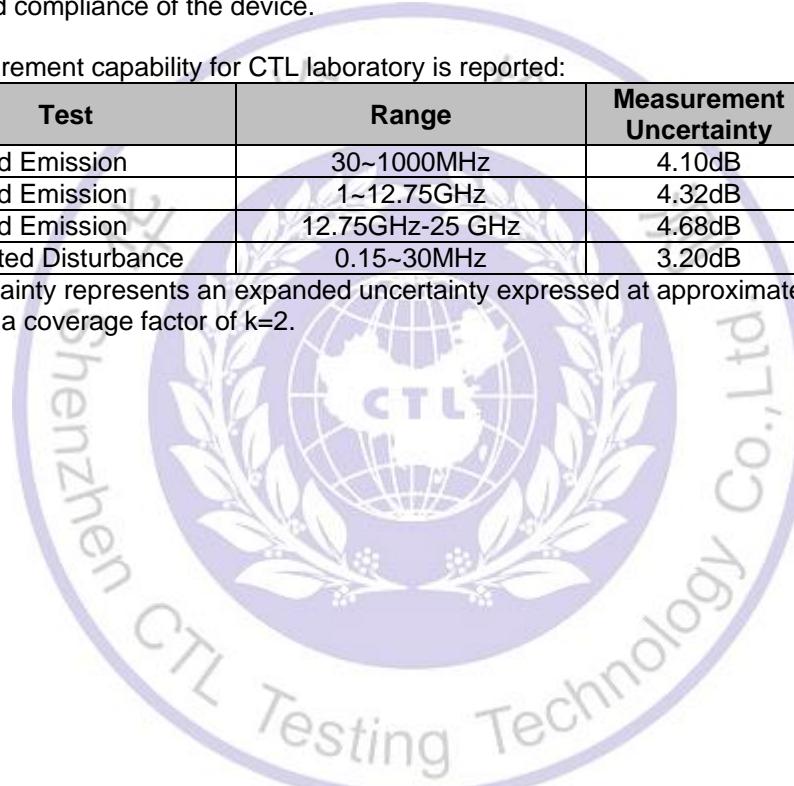

3.7. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2014/07/12	2015/07/11
EMI Test Receiver	R&S	ESCI	103710	2014/07/10	2015/07/09
Spectrum Analyzer	Agilent	E4407B	MY45108355	2014/07/06	2015/07/05
Controller	EM Electronics	Controller EM 1000	N/A	2014/07/06	2015/07/05
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2014/07/12	2015/07/11
Horn Antenna	SCHWARZBECK	BBHA9170	1562	2014/07/12	2015/07/11
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2014/07/12	2015/07/11
LISN	R&S	ENV216	101316	2014/07/10	2015/07/09
LISN	SCHWARZBECK	NSLK8127	8127687	2014/07/10	2015/07/09
Microwave Preamplifier	HP	8349B	3155A00882	2014/07/10	2015/07/09
Amplifier	HP	8447D	3113A07663	2014/07/10	2015/07/09
Power Sensor	Rohde&Schwarz	OSP-120 (including B157)	115683	2014/07/02	2015/07/01
Transient Limiter	Com-Power	LIT-153	532226	2014/07/10	2015/07/09
Radio Communication Tester	R&S	CMU200	3655A03522	2014/07/06	2015/07/05
Temperature/Humidity Meter	zhicheng	ZC1-2	22522	2014/07/10	2015/07/09
SIGNAL GENERATOR	HP	8647A	3200A00852	2014/07/10	2015/07/09
Wideband Peak Power Meter	Anritsu	ML2495A	220.23.35	2014/07/06	2015/07/05
Power Sensor	Anritsu	MA2411B	0738552	2014/07/06	2015/07/05
Climate Chamber	ESPEC	EL-10KA	A20120523	2014/07/06	2015/07/05
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	/	2014/07/06	2015/07/05
High-Pass Filter	K&L	41H10-1375/U12750-O/O	/	2014/07/06	2015/07/05
RF Cable	HUBER+SUHNER	RG214	/	2014/07/09	2015/07/08

3.8. Summary of Test Result

FCC PART 15		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark: The measurement uncertainty is not included in the test result.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.


Test Items	Mode	Data Rate	Channel
AC Power Conducted Emission	Normal Link	11 Mbps	1
Maximum Peak Conducted Output Power	11b/DSSS	11 Mbps	1/6/11
Power Spectral Density	11g/OFDM	54 Mbps	1/6/11
6dB Bandwidth			
Spurious RF conducted emission			
Radiated Emission 30MHz~1GHz	11b/DSSS	11 Mbps	1/6/11
	11g/OFDM	54 Mbps	1/6/11
Radiated Emission 1GHz~10th Harmonic	11b/DSSS	11 Mbps	1/6/11
	11g/OFDM	54 Mbps	1/6/11
Band Edge Compliance of RF Emission	11b/DSSS	11 Mbps	1/11
	11g/OFDM	54 Mbps	1/11

Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

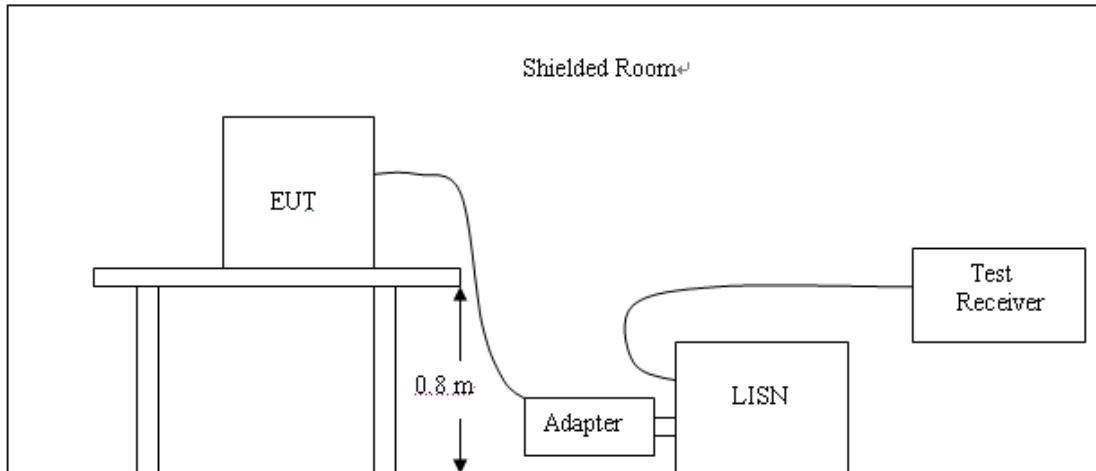

TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

1. Please follow the guidelines in ANSI C63.4-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

The RBW/VBW for 150KHz to 30MHz: 9KHz

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

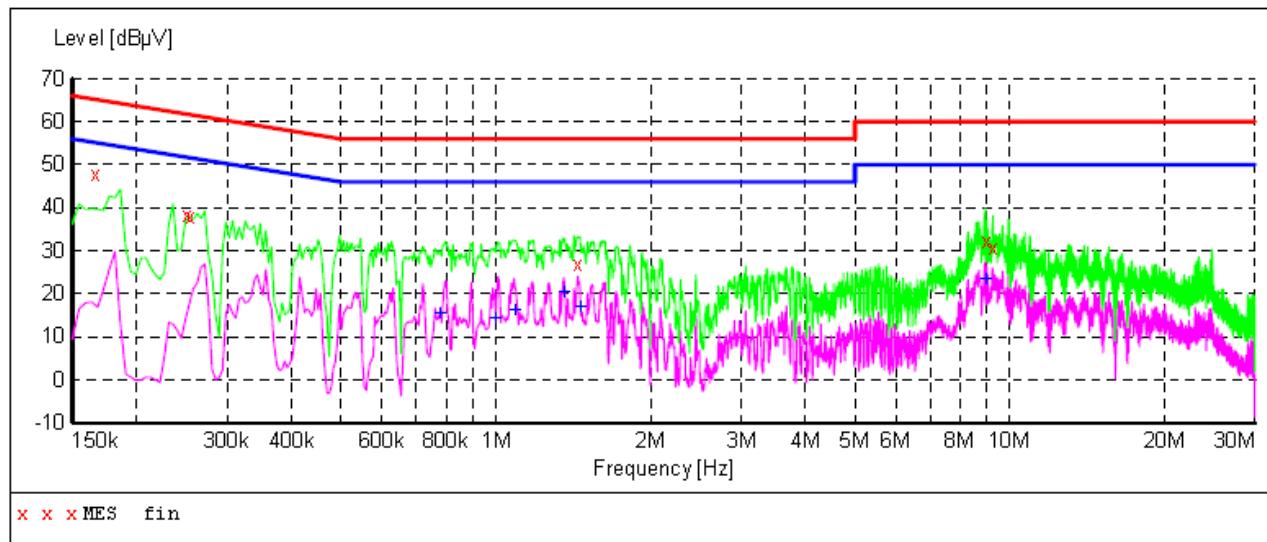
**MEASUREMENT RESULT:**

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.166000	47.70	10.2	65	17.5	QP	N	GND
0.250000	38.30	10.2	62	23.5	QP	N	GND
0.254000	38.00	10.2	62	23.6	QP	N	GND
1.436000	26.80	10.3	56	29.2	QP	N	GND
8.954000	32.30	10.6	60	27.7	QP	N	GND
9.260000	30.90	10.6	60	29.1	QP	N	GND

MEASUREMENT RESULT:

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.776000	15.50	10.2	46	30.5	AV	N	GND
0.992000	14.50	10.3	46	31.5	AV	N	GND
1.082000	16.40	10.3	46	29.6	AV	N	GND
1.352000	20.60	10.3	46	25.4	AV	N	GND
1.460000	16.90	10.3	46	29.1	AV	N	GND
8.972000	23.50	10.6	50	26.5	AV	N	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

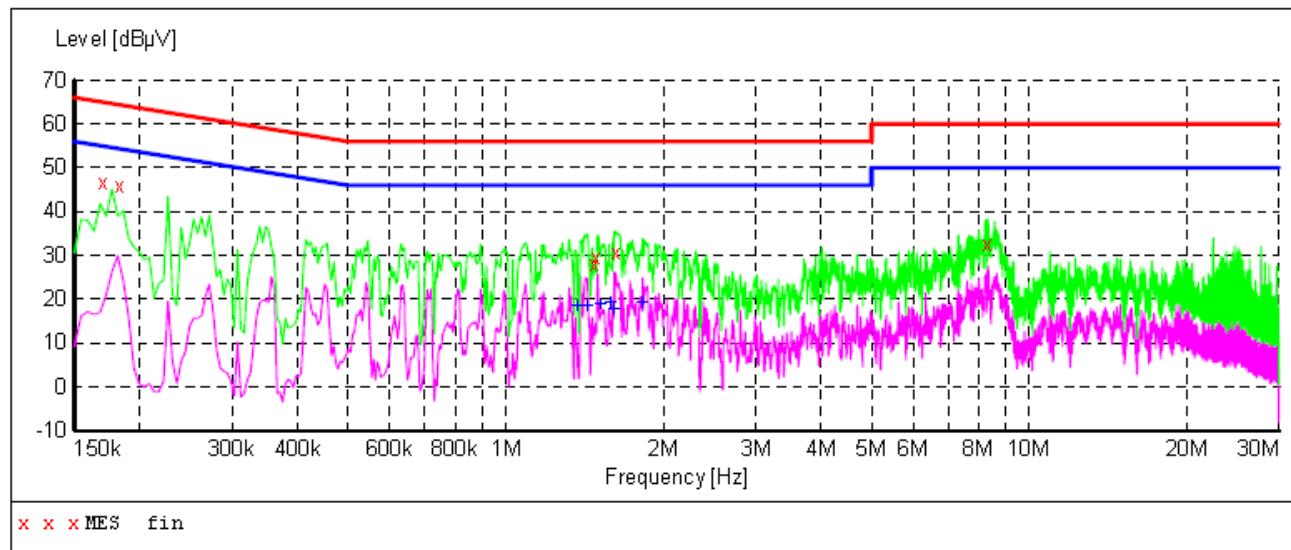

MEASUREMENT RESULT:

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.170000	46.80	10.2	65	18.2	QP	L1	GND
0.182000	46.00	10.2	64	18.4	QP	L1	GND
1.472000	28.00	10.3	56	28.0	QP	L1	GND
1.478000	29.70	10.3	56	26.3	QP	L1	GND
1.622000	30.70	10.3	56	25.3	QP	L1	GND
8.306000	32.50	10.5	60	27.5	QP	L1	GND


MEASUREMENT RESULT:

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
1.358000	18.50	10.3	46	27.5	AV	L1	GND
1.424000	18.60	10.3	46	27.4	AV	L1	GND
1.514000	19.00	10.3	46	27.0	AV	L1	GND
1.580000	19.10	10.3	46	26.9	AV	L1	GND
1.598000	17.90	10.3	46	28.1	AV	L1	GND
1.814000	19.20	10.3	46	26.8	AV	L1	GND


4.2. Radiated Emission Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

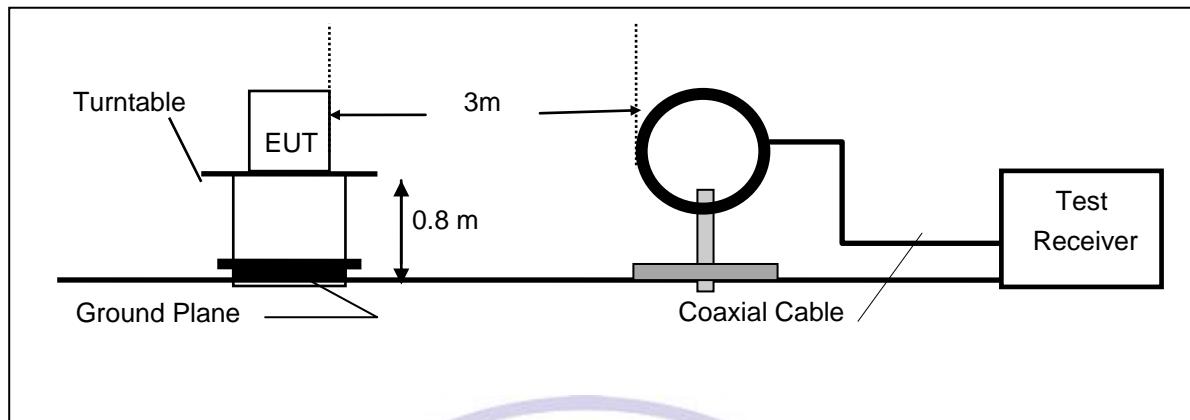

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

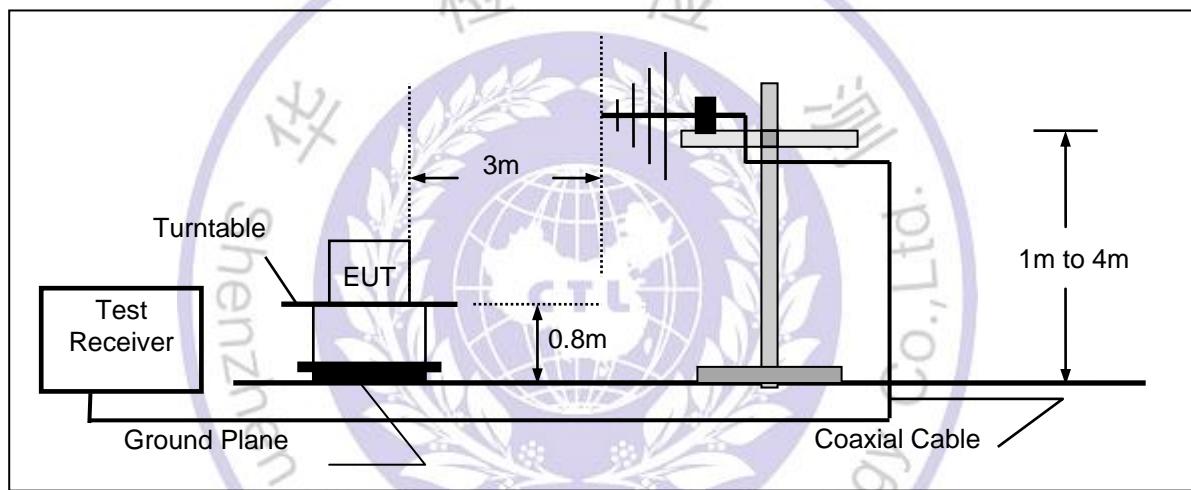

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

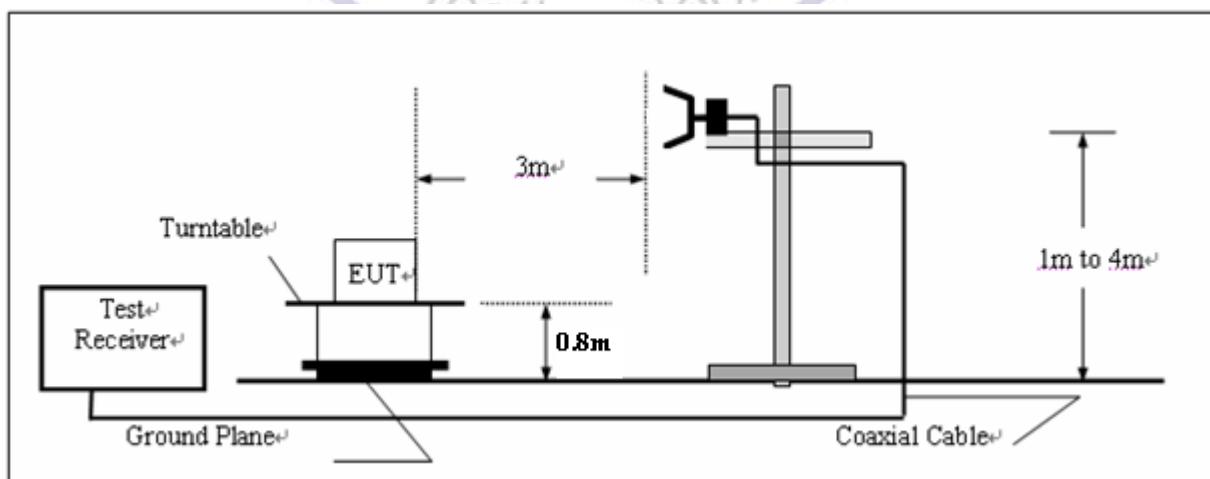

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

TEST PROCEDURE

1. The testing follows FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS).
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f > 1$ GHz, 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Repeat above procedures until all frequency measurements have been completed.

Note:

When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 60 degrees for H-plane and 90 degrees for E-plane.

LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

TEST RESULTS**9KHz-30MHz:**

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note: The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor= $40 \log (\text{specific distance} / \text{test distance})$ (dB);
 Limit line= specific limits (dBuV) + distance extrapolation factor.

Below 1GHz:

The radiated measurement are performed the each test mode (b/g) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.

SWEET TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

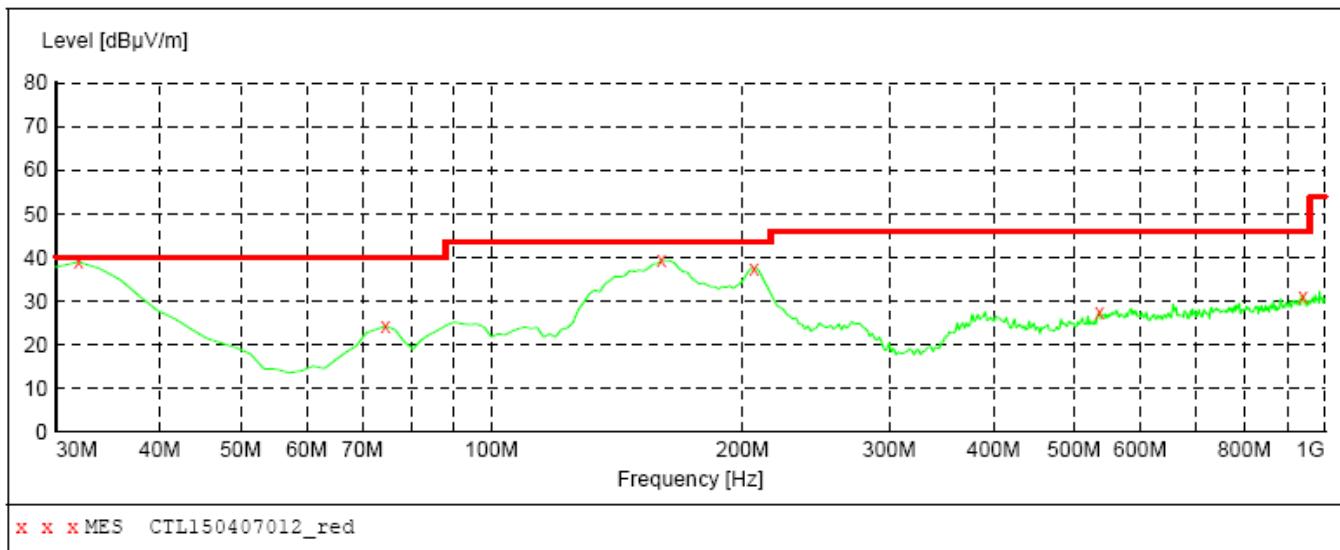
***MEASUREMENT RESULT: "CTL150407012_red"***

4/7/2015 10:09AM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	38.90	19.6	40.0	1.1	---	0.0	0.00	VERTICAL
74.620000	24.20	8.5	40.0	15.8	---	0.0	0.00	VERTICAL
159.980000	39.30	13.9	43.5	4.2	---	0.0	0.00	VERTICAL
206.540000	37.60	14.3	43.5	5.9	---	0.0	0.00	VERTICAL
536.340000	27.50	20.7	46.0	18.5	---	0.0	0.00	VERTICAL
941.800000	31.20	26.5	46.0	14.8	---	0.0	0.00	VERTICAL

SWEET TABLE: "test (30M-1G)"

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz
				JB1

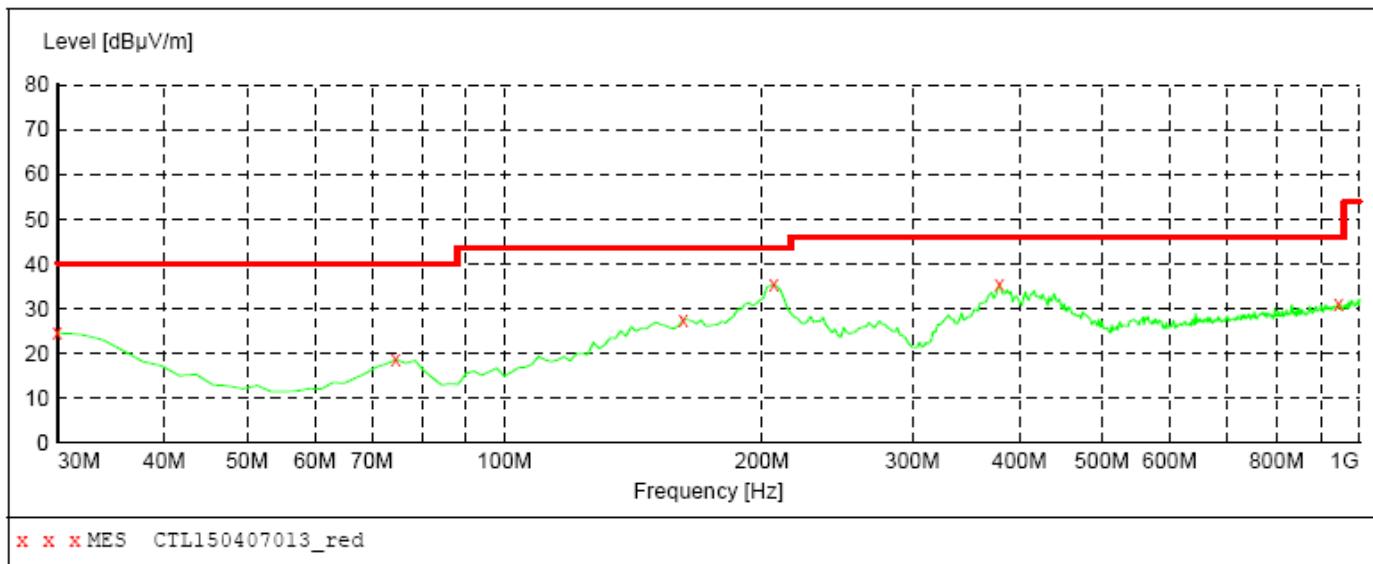***MEASUREMENT RESULT: "CTL150407013_red"***

4/7/2015 10:11AM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.50	21.1	40.0	15.5	---	0.0	0.00	HORIZONTAL
74.620000	18.50	8.5	40.0	21.5	---	0.0	0.00	HORIZONTAL
161.920000	27.60	13.9	43.5	15.9	---	0.0	0.00	HORIZONTAL
206.540000	35.40	14.3	43.5	8.1	---	0.0	0.00	HORIZONTAL
379.200000	35.20	17.8	46.0	10.8	---	0.0	0.00	HORIZONTAL
945.680000	31.00	26.6	46.0	15.0	---	0.0	0.00	HORIZONTAL

TL Testing Technology

Above 1GHz:

802.11b

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	V	2411.9	71.3	30.8	102.1	Fundamental	/	PK
	V	3200	48.7	-0.6	48.1	54(note3)	5.9	PK
	V	4824	49.3	2.6	51.9	54(note3)	2.1	PK
	V	7236	59.0	8.1	67.1	74	6.9	PK
	V	7236	42.0	8.9	50.9	54	3.1	AV
	H	24000	61.6	-8.9	52.7	54(note3)	1.3	PK
6	V	2437	71.5	31.2	102.7	Fundamental	/	PK
	V	3200	50.2	-0.6	49.6	54(note3)	4.4	PK
	V	4876	46.8	2.8	49.6	54(note3)	4.4	PK
	V	7298.5	59.3	8.8	68.1	74	5.9	PK
	V	7298.5	44.1	8.1	52.2	54	1.8	AV
	H	24000	59.2	-8.9	50.3	54(note3)	3.7	PK
11	V	2462.3	70.5	30.9	101.4	Fundamental	/	PK
	V	3200	46.8	-0.6	46.2	54(note3)	7.8	PK
	V	4927	46.1	3	49.1	54(note3)	4.9	PK
	V	7386	58.8	8.9	67.7	74	6.3	PK
	V	7386	43.0	8.9	51.9	54	2.1	AV
	H	24000	61.3	-8.9	52.4	54(note3)	1.6	PK

Note: 1. Measure Level = Reading Level + Factor.
 2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.
 3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
 4. RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value.

802.11g

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	V	2411.9	69.8	31.9	101.7	Fundamental	/	PK
	V	3200	45.8	-0.6	45.2	54(note3)	8.8	PK
	V	4824	49.3	2.6	51.9	54(note3)	2.1	PK
	V	7236	59.2	8.9	68.1	74	5.9	PK
	V	7236	40.8	8.9	49.7	54	4.3	AV
	H	24000	61.2	-8.9	52.3	54(note3)	1.7	PK
6	V	2437	71.0	31.2	102.2	Fundamental	/	PK
	V	3200	50.2	-0.6	49.6	54(note3)	4.4	PK
	V	4876	45.4	2.8	48.2	54(note3)	5.8	PK
	V	7298.5	55.5	8.8	64.3	74	9.7	PK
	V	7298.5	43.3	8.8	52.1	54	1.9	AV
	H	24000	60.0	-8.9	51.1	54(note3)	2.9	PK
11	V	2462.3	70.8	30.9	101.7	Fundamental	/	PK
	V	3200	48.8	-0.6	48.2	54(note3)	5.8	PK
	V	4927	43.6	3.0	46.6	54(note3)	7.4	PK
	V	7386	58.9	8.9	67.8	74	6.2	PK
	V	7386	42.9	8.9	51.8	54	2.2	AV
	H	24000	60.8	-8.9	51.9	54(note3)	2.1	PK

Note: 1. Measure Level = Reading Level + Factor.


2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

4. RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value.

4.3. 6dB Bandwidth Measurement

TEST CONFIGURATION

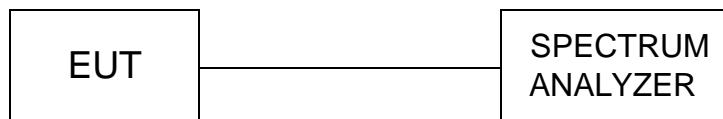

TEST PROCEDURE

1. The testing follows FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.


LIMIT



For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS

Product	:	Industrial Rugged Handheld Computer
Test Item	:	6dB Occupied Bandwidth
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	10366	500	Pass
06	2437	10335	500	Pass
11	2462	10462	500	Pass

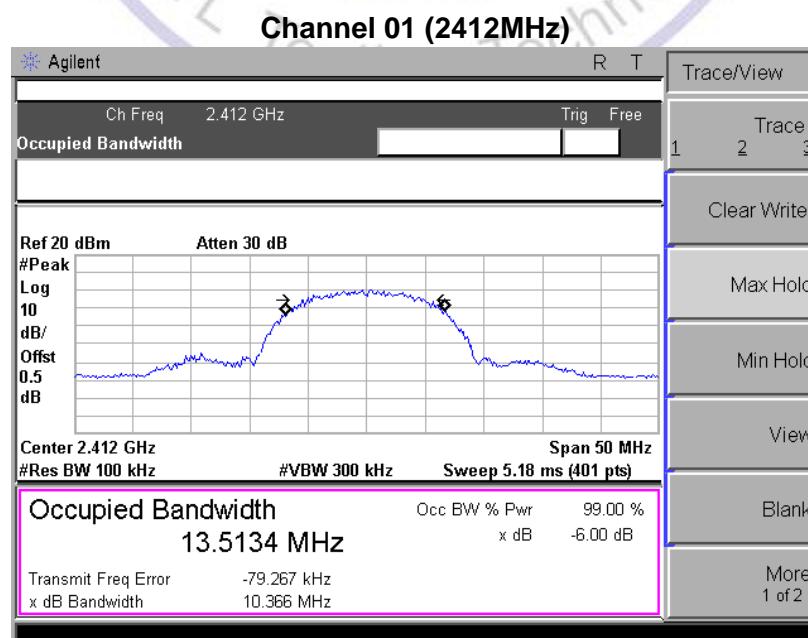


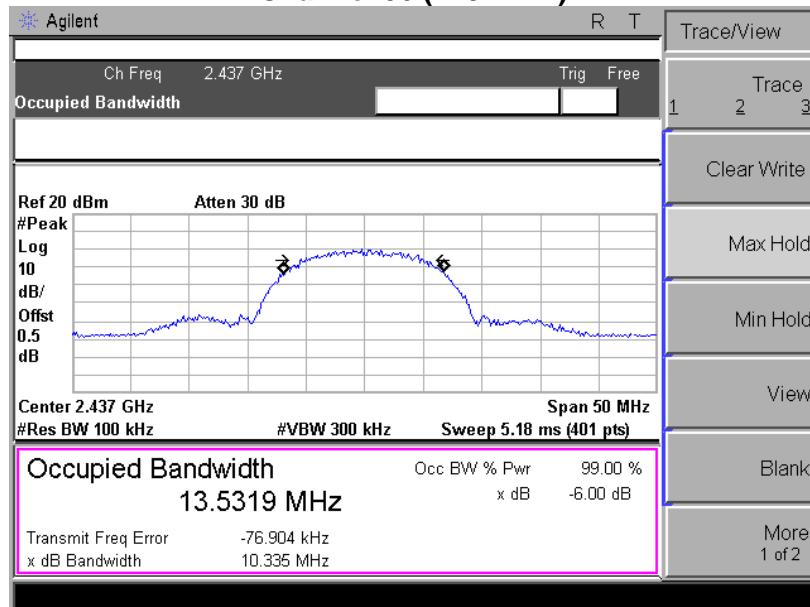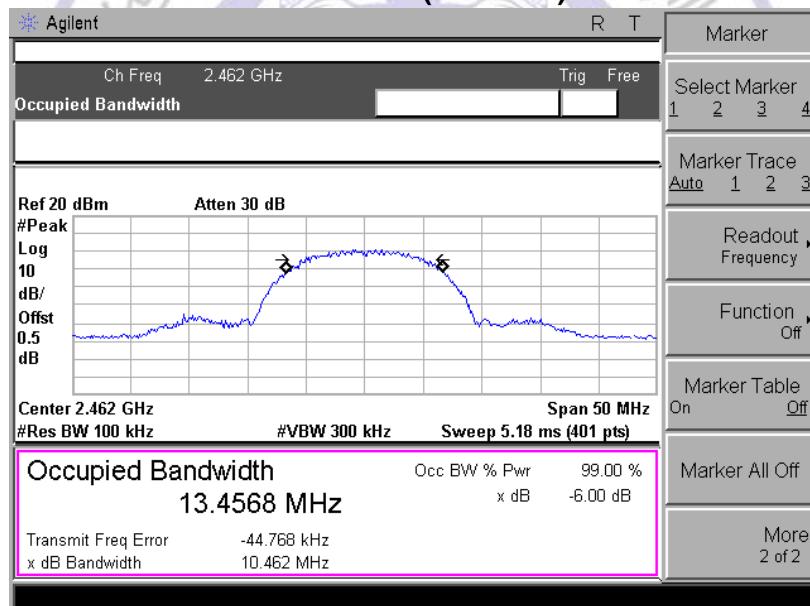Channel 06 (2437MHz)**Channel 11 (2462MHz)**


Product	:	Industrial Rugged Handheld Computer
Test Item	:	6dB Occupied Bandwidth
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	16423	500	Pass
06	2437	16545	500	Pass
11	2462	16583	500	Pass


Channel 01 (2412MHz)

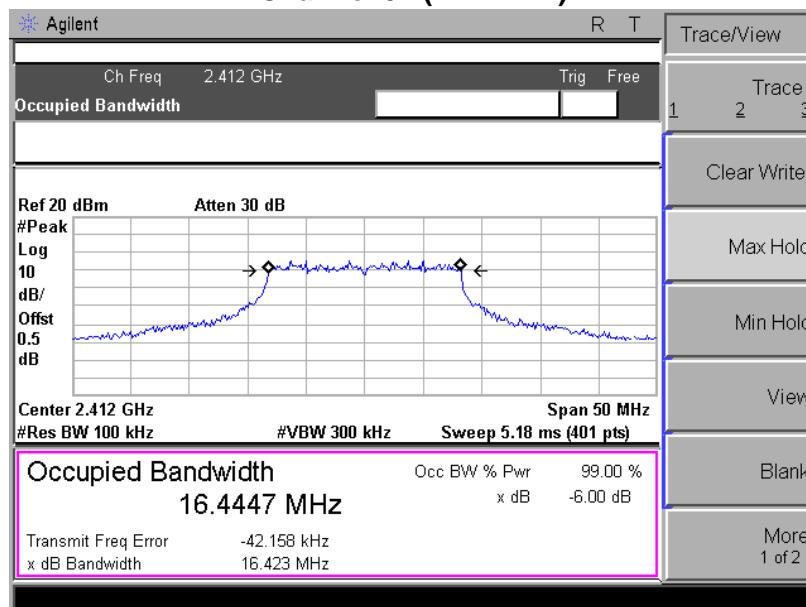

Channel 06 (2437MHz)

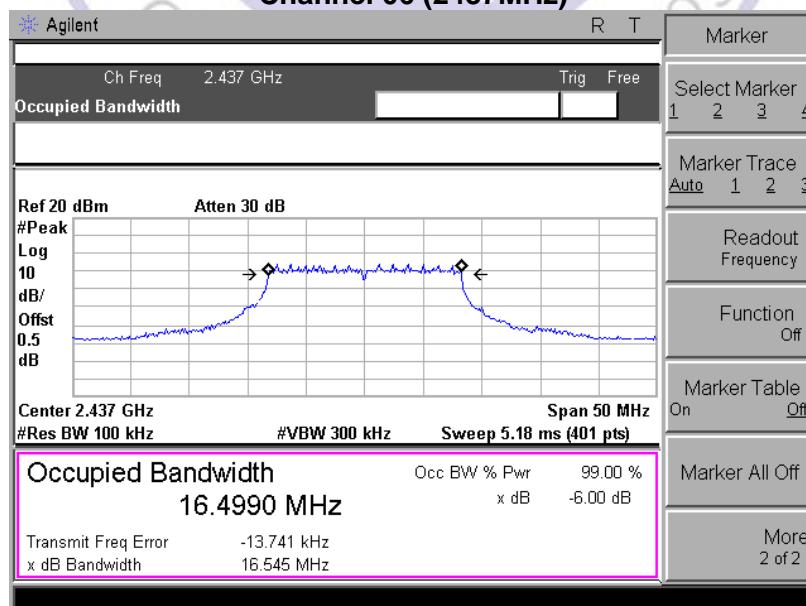


Channel 11 (2462MHz)

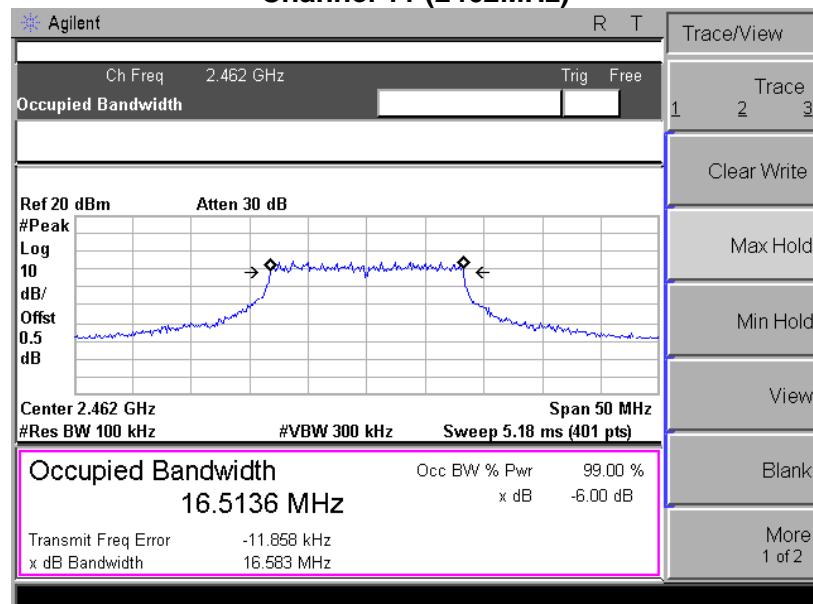

4.4. Maximum Peak Output Power

TEST CONFIGURATION

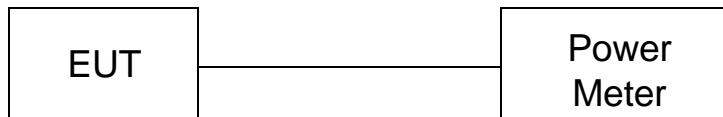

TEST PROCEDURE

According to C63.10 -2013 and KDB558074 D01 v03r02, The EUT was directly connected to the power meter / spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

Use the wideband power meter to test peak power and record the result.

LIMIT

The Peak Output Power Measurement limits are 30dBm.

TEST RESULTS

Product	:	Industrial Rugged Handheld Computer
Test Item	:	Power Output
Test Mode	:	Mode 1: Transmit by 802.11b


Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	2412	16.89	30.00	Pass
6	2437	17.53	30.00	Pass
11	2462	17.24	30.00	Pass

Product	:	Industrial Rugged Handheld Computer
Test Item	:	Power Output
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	2412	19.46	30.00	Pass
6	2437	19.91	30.00	Pass
11	2462	20.14	30.00	Pass

4.5. Band Edge Measurement

TEST CONFIGURATION

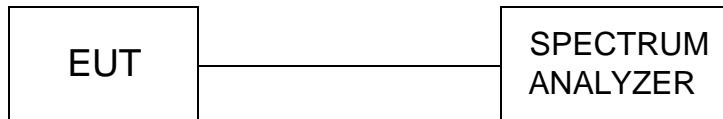

TEST PROCEDURE


According to FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS)

Set RBW 1MHz, VBW 3MHz PEAK detector for PK value, RMS detector for AV value

LIMIT


1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209(see Section 15.205(c)).

Frequency (MHz)	Limit Average (dB _{AV} /m)	Limit Peak (dB _{UV} /m)
Below 2390 or Above 2483.5	54	74

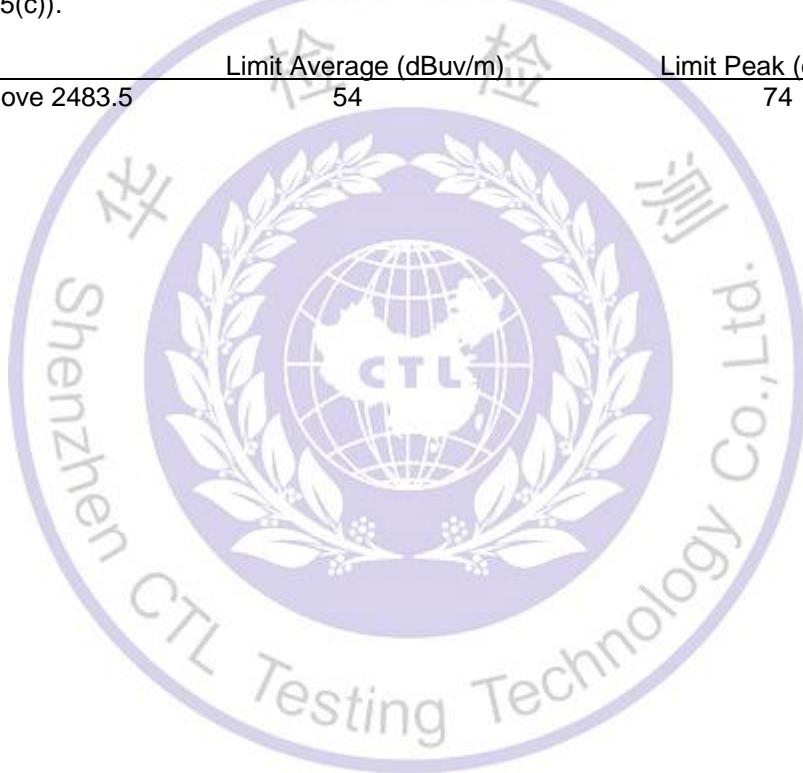

TEST RESULTS


Transmitting mode: 802.11b

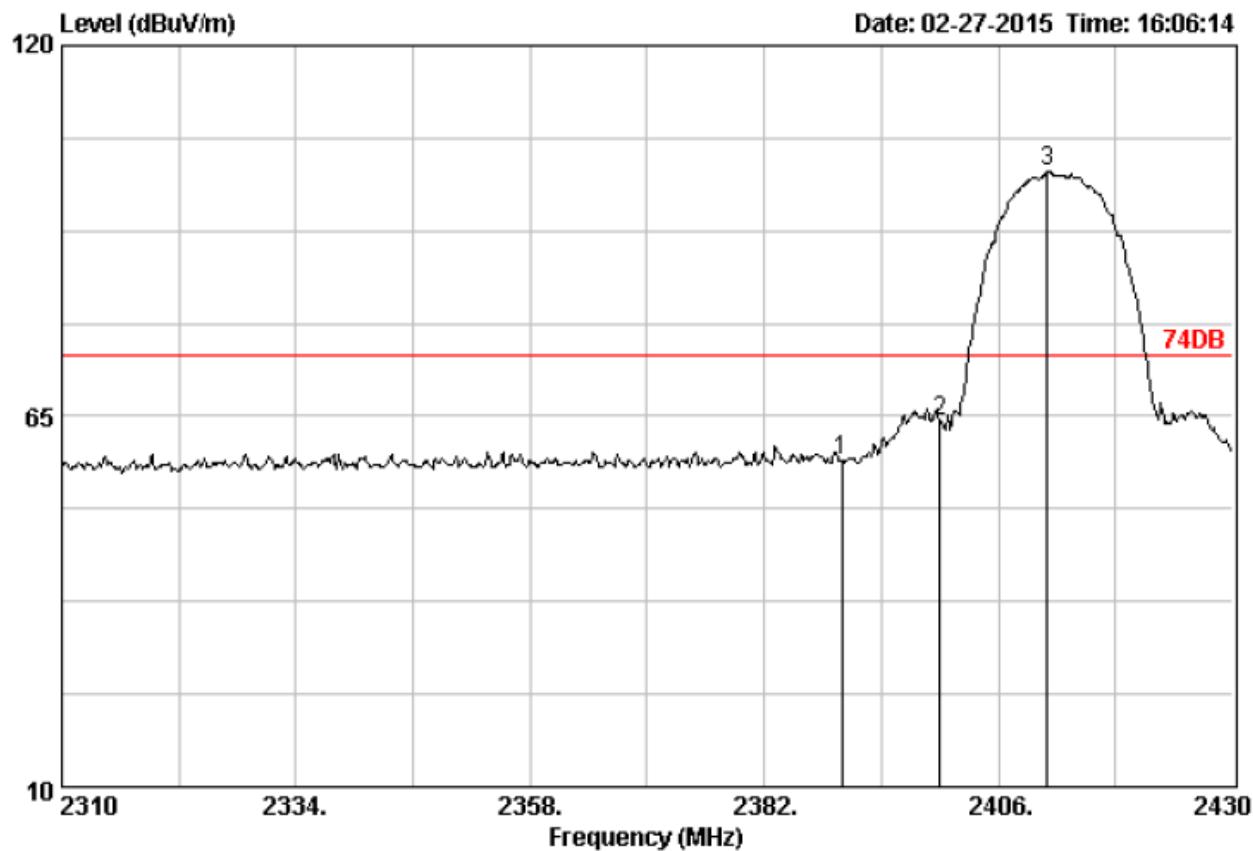

Site no.	:	3m Chamber	Data no. :	679
Dis. / Ant.	:	3m DRH-118	Ant. pol. :	HORIZONTAL
Limit	:	74DB		
Env. / Ins.	:	23*C/54%		
Engineer	:			
EUT	:			
Power	:			
M/N	:			
Test Mode	:			


Freq. (MHz)	Factor (dB)	Loss (dB)	Reading (dBuV)	Emission				Remark
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		

1 2390.00	28.78	4.61	60.50	58.53	74.00	15.47	Peak	
2 2400.00	28.78	4.61	66.13	64.16	74.00	9.84	Peak	
3 2411.04	28.81	4.63	103.28	101.36	74.00	-27.36	Peak	

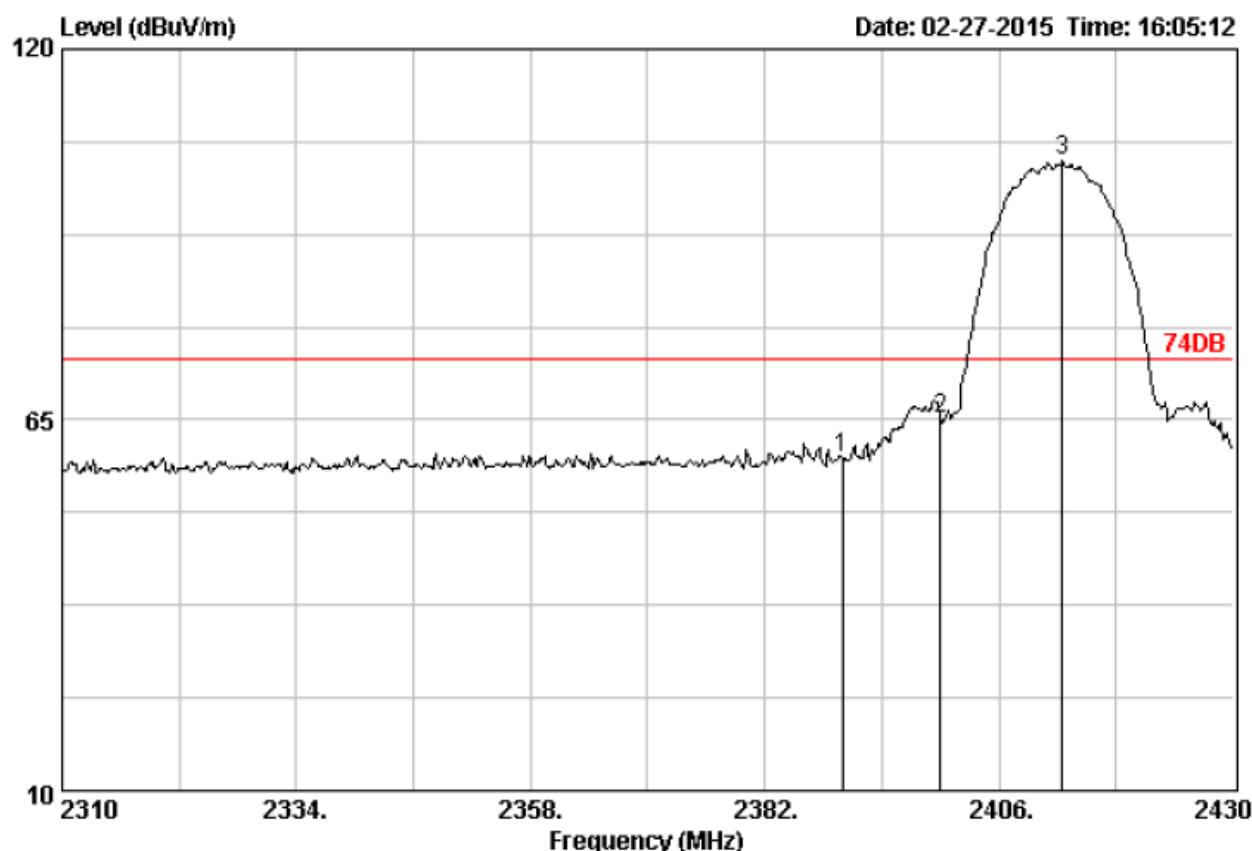


Site no. : 3m Chamber Data no. : 678
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	61.31	59.34	74.00	14.66	Peak
2 2400.00	28.78	4.61	67.22	65.25	74.00	8.75	Peak
3 2412.48	28.81	4.63	105.37	103.45	74.00	-29.45	Peak

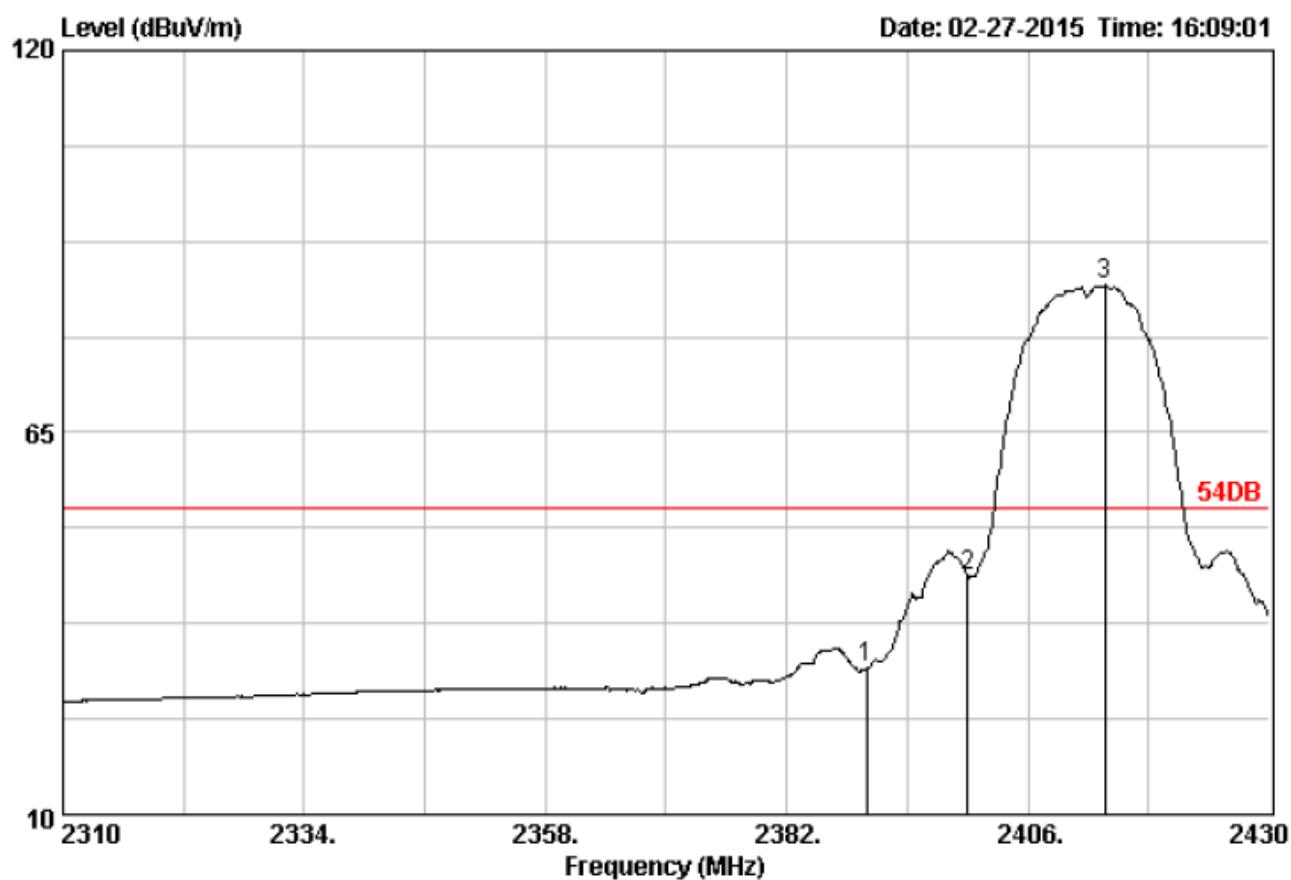


Site no. : 3m Chamber Data no. : 680
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	33.15	31.18	54.00	22.82	Average
2 2400.00	28.78	4.61	46.40	44.43	54.00	9.57	Average
3 2413.68	28.81	4.63	88.10	86.18	54.00	-32.18	Average

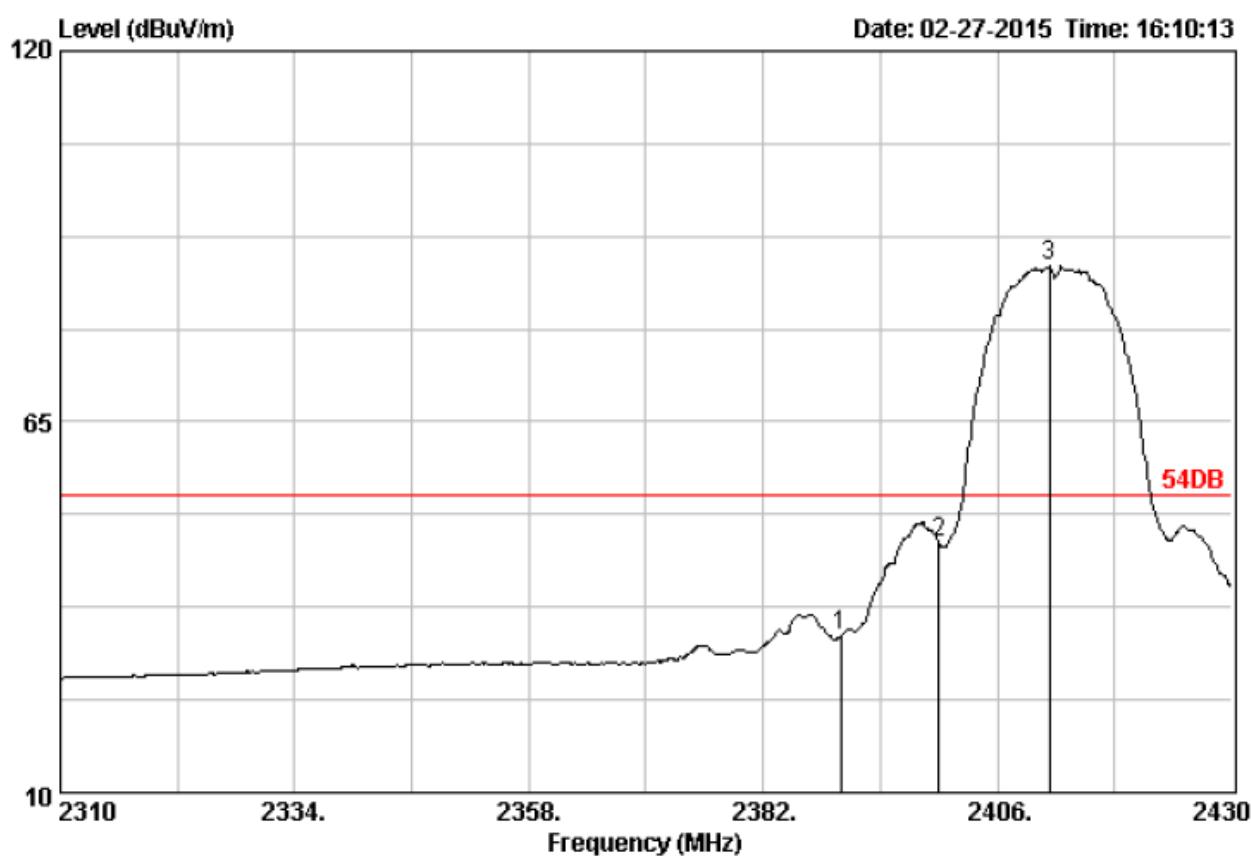


Site no. : 3m Chamber Data no. : 681
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1 2390.00	28.78	4.61	35.40	33.43	54.00	20.57	Average
2 2400.00	28.78	4.61	49.04	47.07	54.00	6.93	Average
3 2411.28	28.81	4.63	89.92	88.00	54.00	-34.00	Average

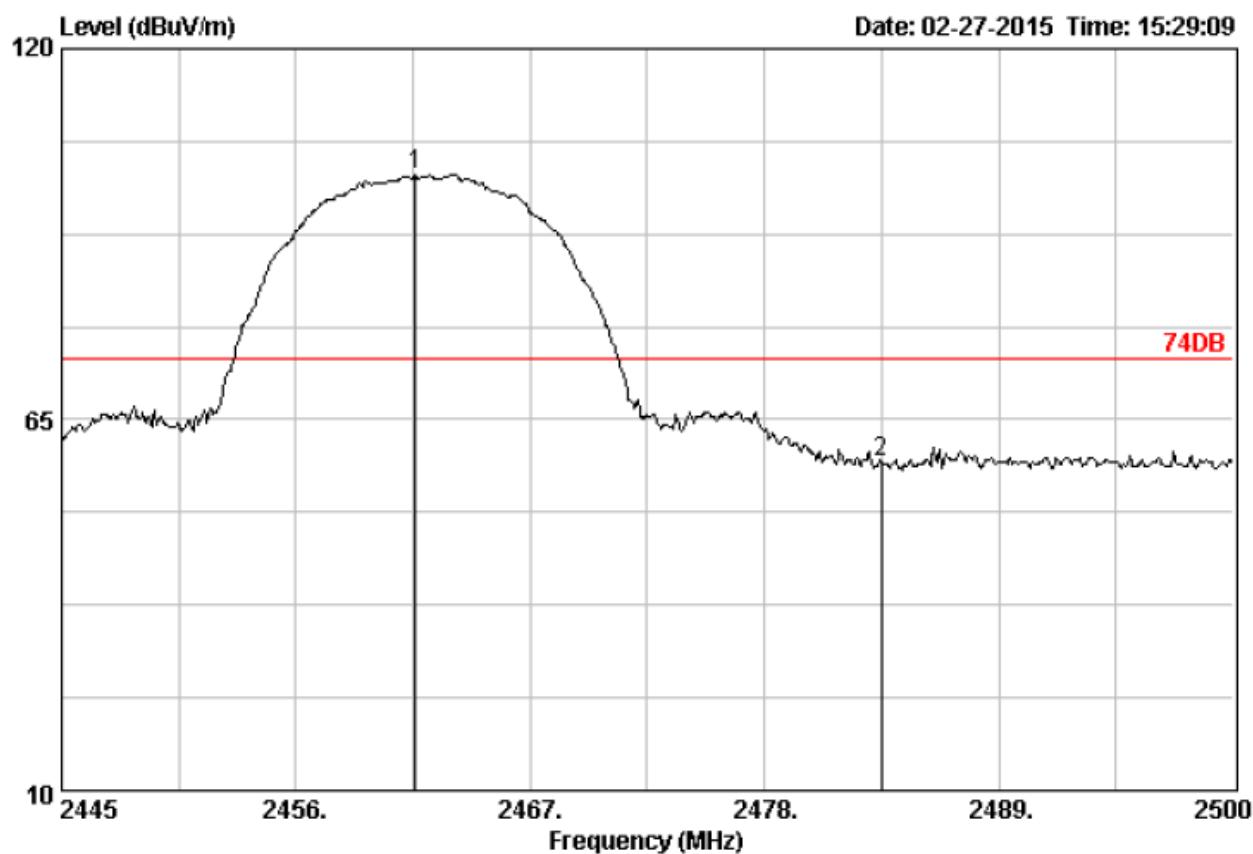


Site no. : 3m Chamber Data no. : 669
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
<hr/>							
1 2461.61	28.90	4.68	103.10	101.31	74.00	-27.31	Peak
2 2483.50	28.93	4.70	60.61	58.86	74.00	15.14	Peak

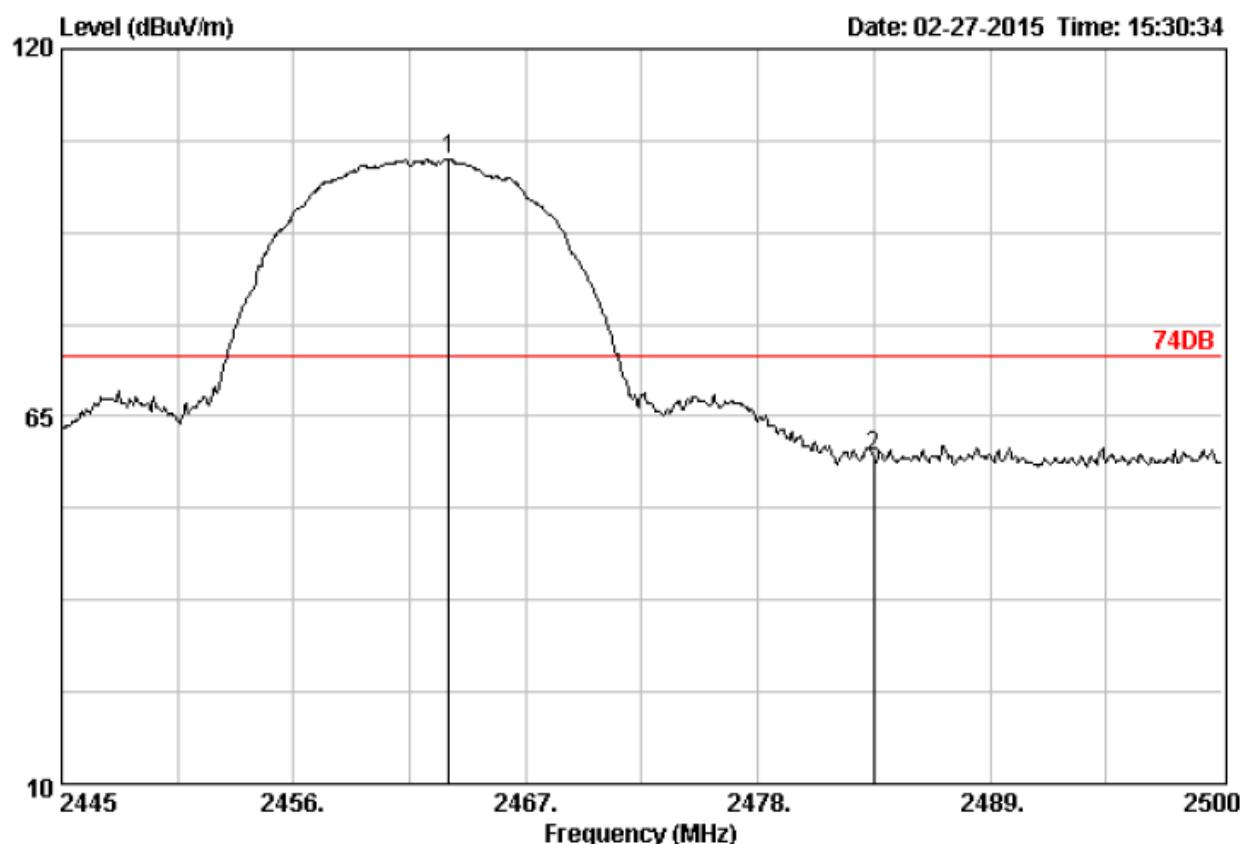

Site no. : 3m Chamber Data no. : 670
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
<hr/>								
1 2463.37	28.90	4.68	105.31	103.52	74.00	-29.52	Peak	
2 2483.50	28.93	4.70	60.81	59.06	74.00	14.94	Peak	

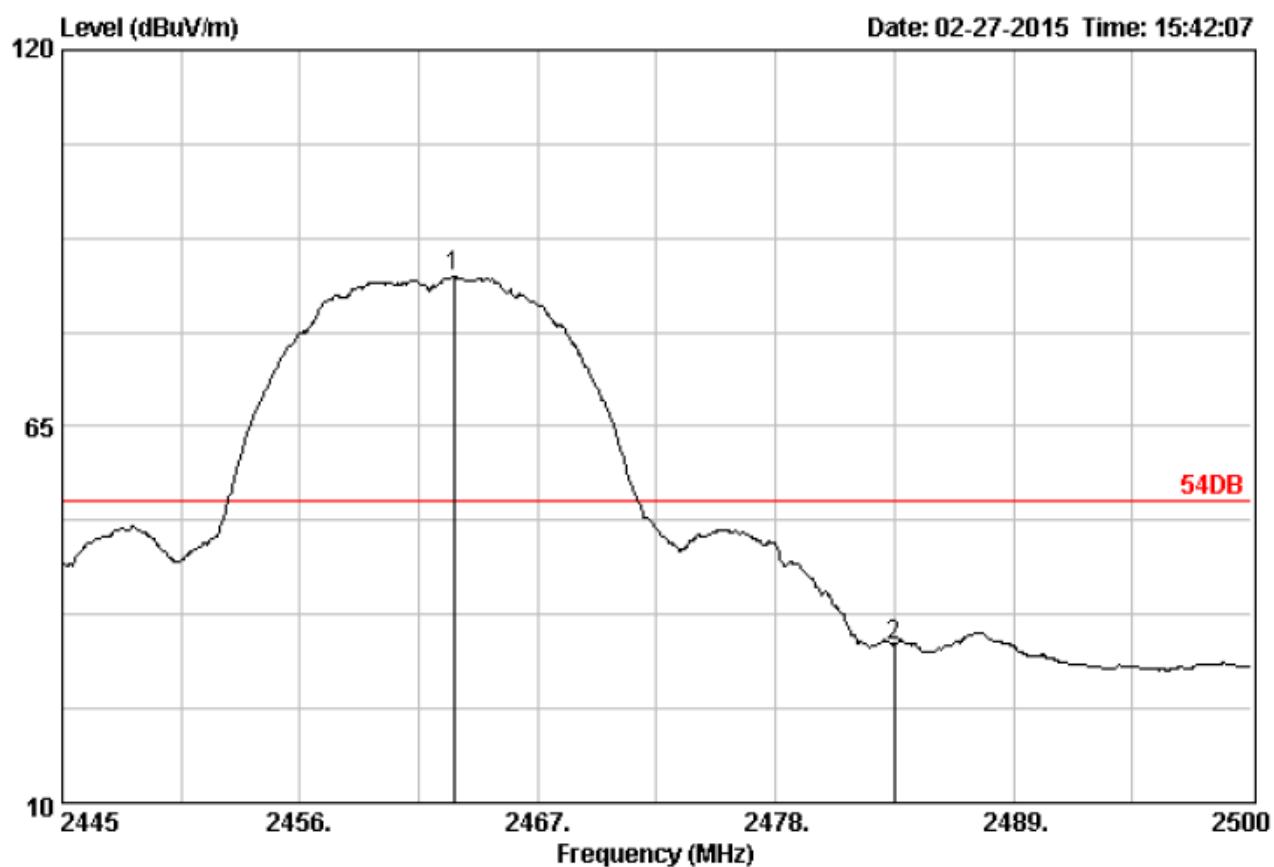

Site no. : 3m Chamber
 Dis. / Ant. : 3m DRH-118
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Data no. : 672
 Ant. pol. : HORIZONTAL


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2463.10	28.90	4.68	88.77	86.98	54.00	-32.98	Average	
2 2483.50	28.93	4.70	34.87	33.12	54.00	20.88	Average	

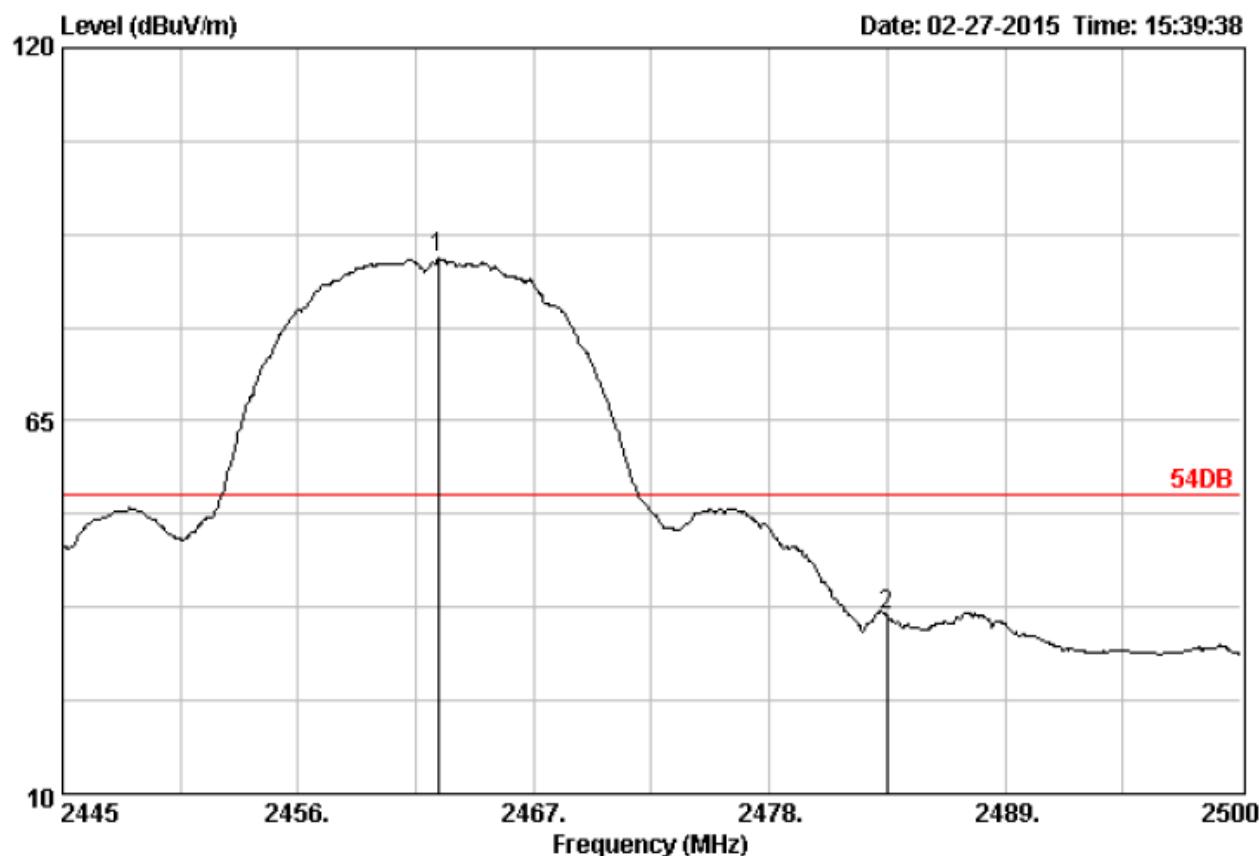

Site no. : 3m Chamber Data no. : 671
Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
Limit : 54DB
Env. / Ins. : 23°C/54%
Engineer :
EUT :
Power :
M/N :
Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2462.55	28.90	4.68	90.74	88.95	54.00	-34.95	Average
2 2483.50	28.93	4.70	37.97	36.22	54.00	17.78	Average

For 802.11g Mode:

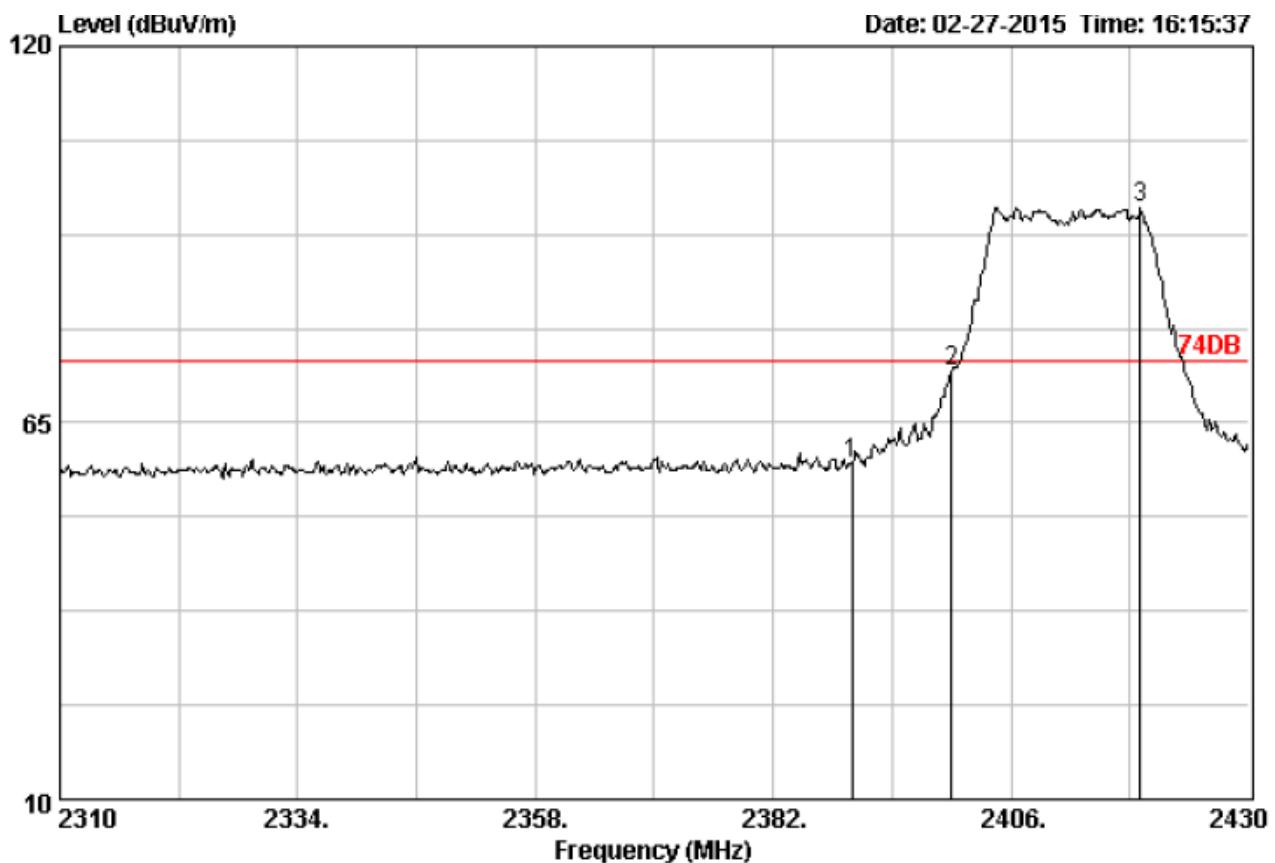


Site no. : 3m Chamber Data no. : 684
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	61.14	59.17	74.00	14.83	Peak
2 2400.00	28.78	4.61	74.49	72.52	74.00	1.48	Peak
3 2419.08	28.81	4.63	98.43	96.51	74.00	-22.51	Peak

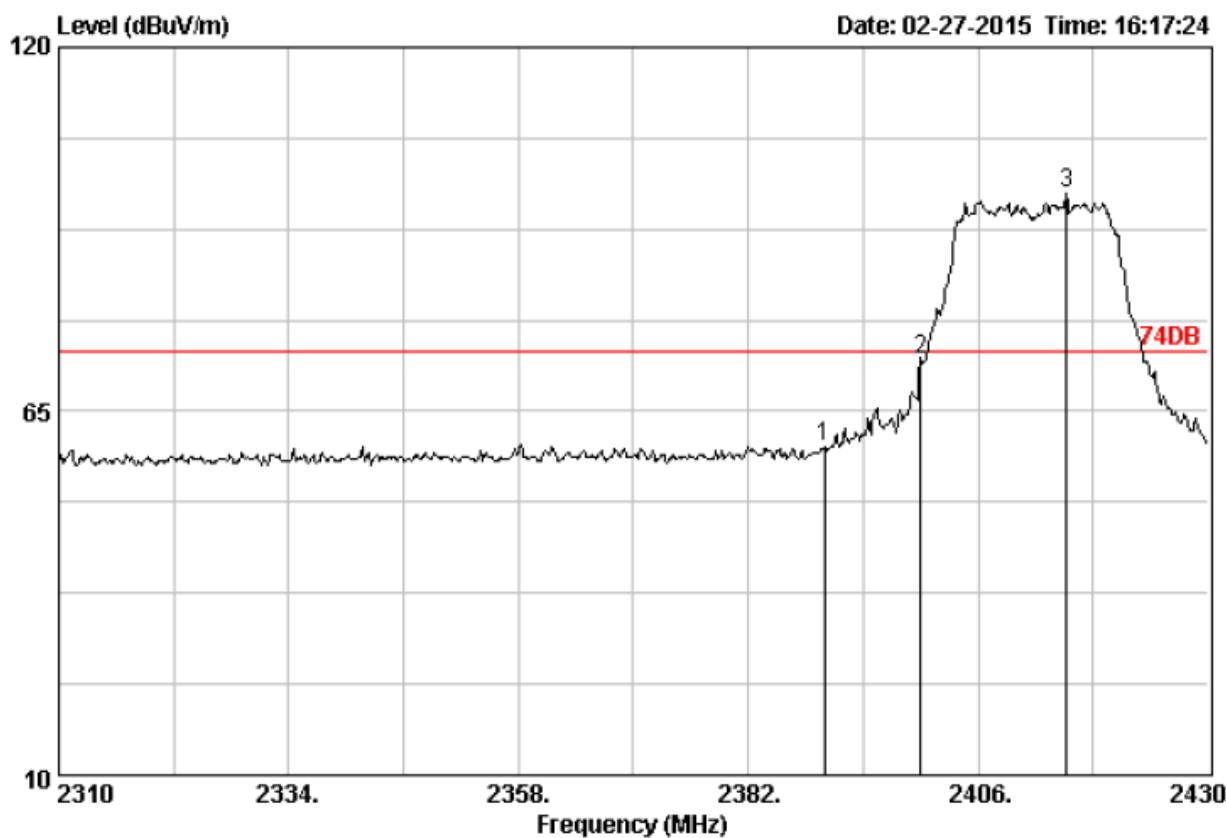

Site no. : 3m Chamber Data no. : 685
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	61.49	59.52	74.00	14.48	Peak
2 2400.00	28.78	4.61	74.89	72.92	74.00	1.08	Peak
3 2415.24	28.81	4.63	99.72	97.80	74.00	-23.80	Peak

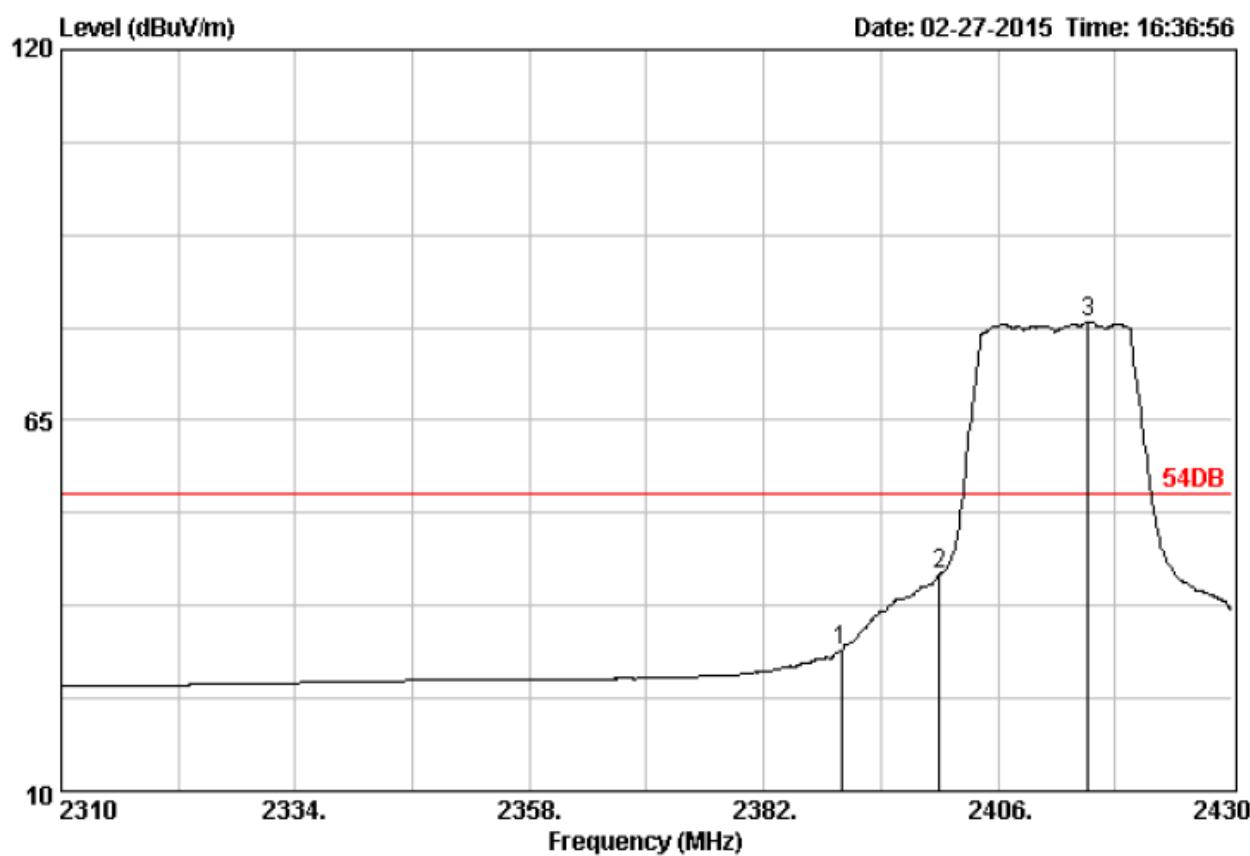

Site no. : 3m Chamber
 Dis. / Ant. : 3m DRH-118
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Data no. : 687
 Ant. pol. : HORIZONTAL

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dB _{UV})	Level (dB _{UV} /m)	Limits (dB _{UV} /m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	32.88	30.91	54.00	23.09	Average
2 2400.00	28.78	4.61	44.18	42.21	54.00	11.79	Average
3 2415.24	28.81	4.63	81.47	79.55	54.00	-25.55	Average

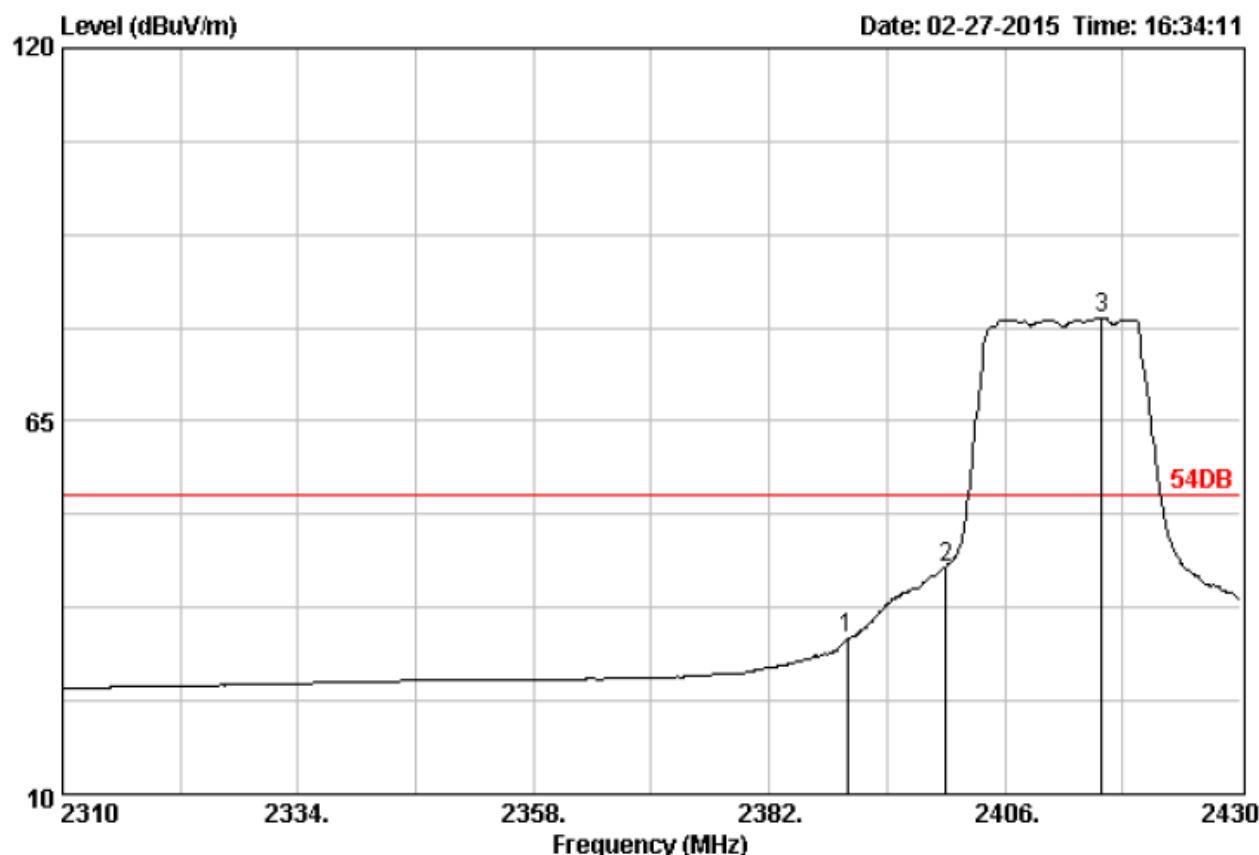


Site no. : 3m Chamber Data no. : 686
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
<hr/>							
1 2390.00	28.78	4.61	34.86	32.89	54.00	21.11	Average
2 2400.00	28.78	4.61	45.50	43.53	54.00	10.47	Average
3 2415.84	28.81	4.63	82.23	80.31	54.00	-26.31	Average

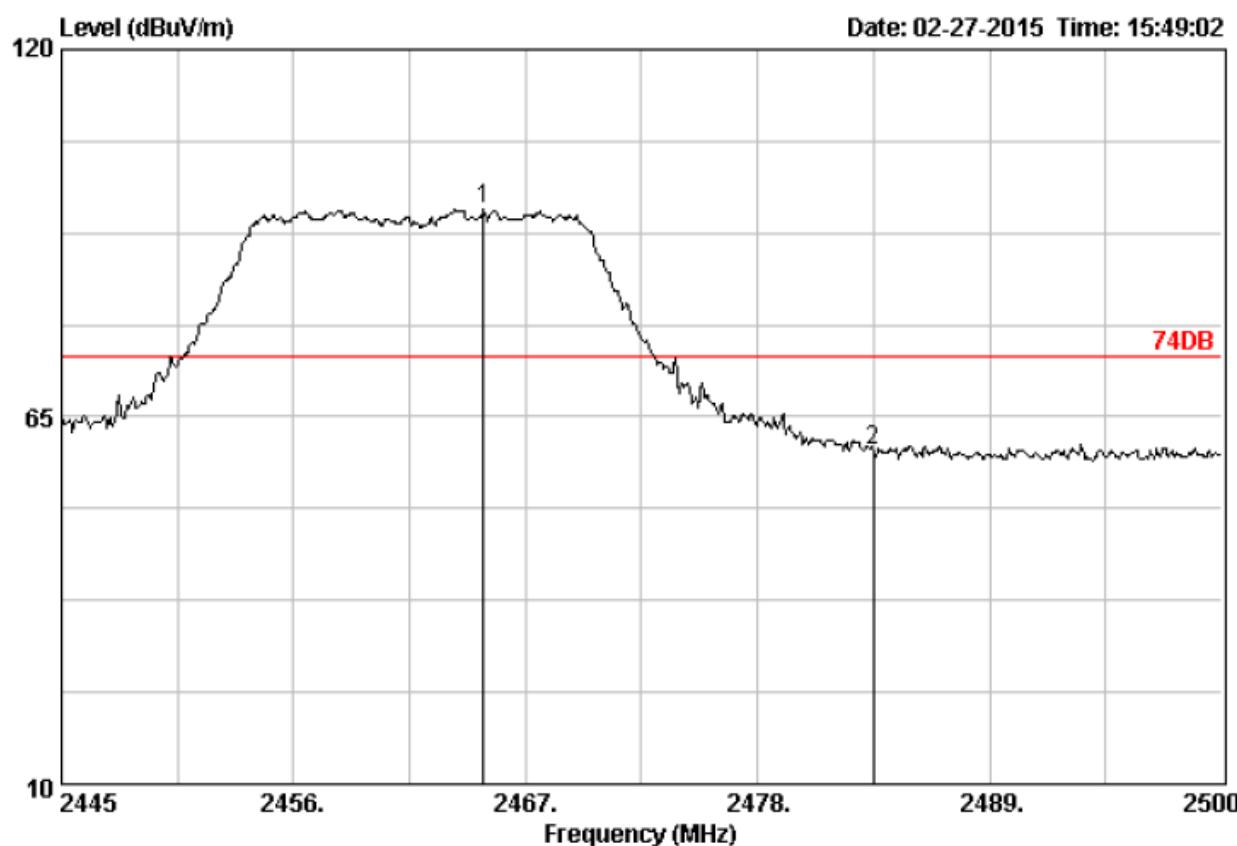


Site no. : 3m Chamber Data no. : 674
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2465.02	28.90	4.68	97.89	96.10	74.00	-22.10	Peak	
2 2483.50	28.93	4.70	61.82	60.07	74.00	13.93	Peak	

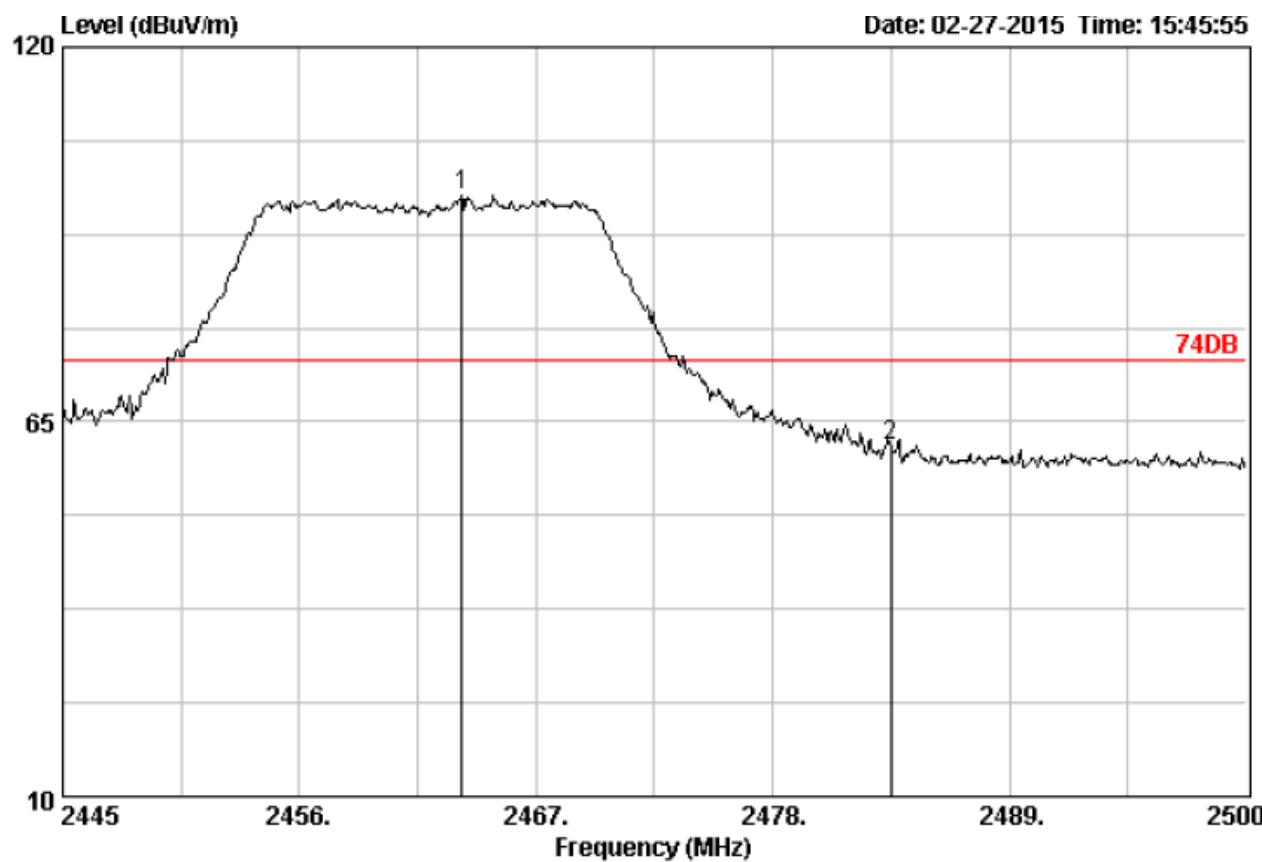


Site no. : 3m Chamber Data no. : 673
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
<hr/>							
1 2463.54	28.90	4.68	100.09	98.30	74.00	-24.30	Peak
2 2483.50	28.93	4.70	63.08	61.33	74.00	12.67	Peak

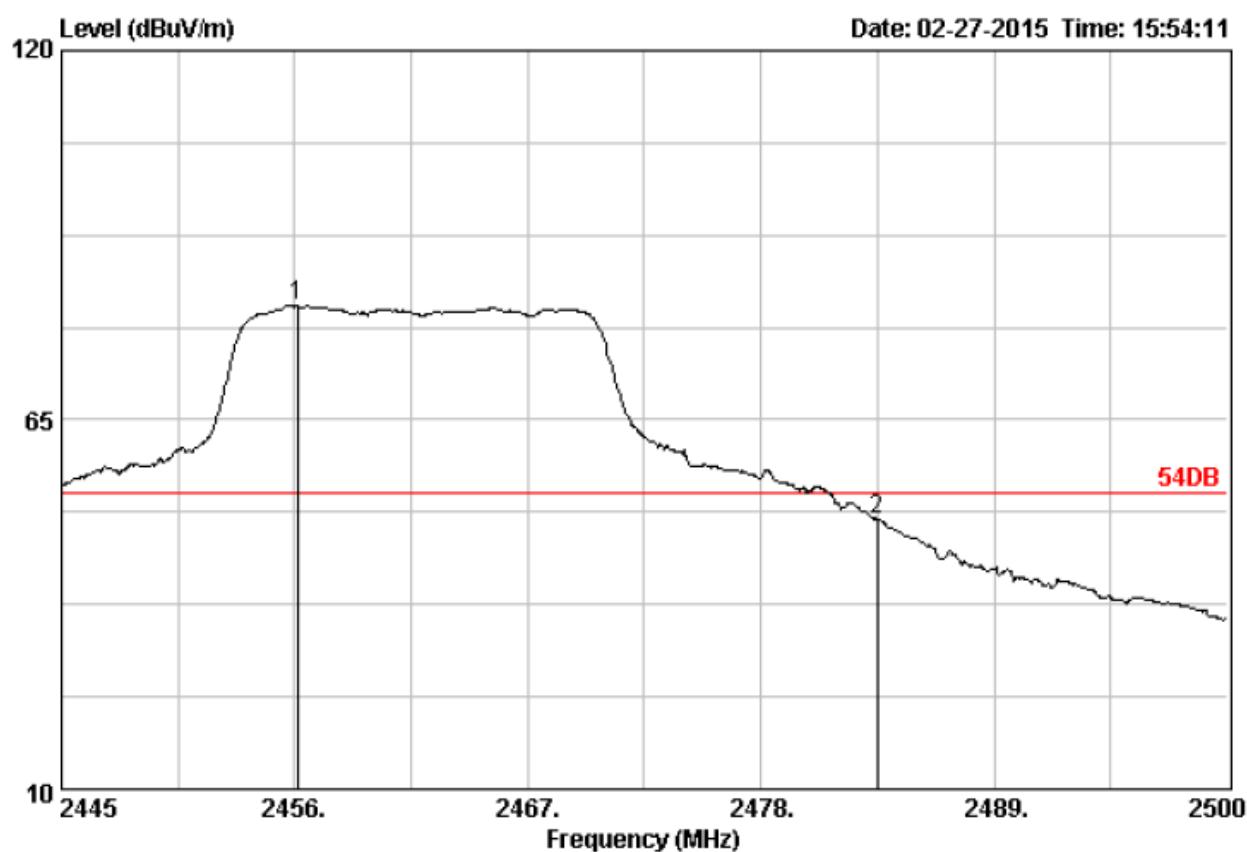

Site no. : 3m Chamber Data no. : 675
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2456.11	28.90	4.68	83.85	82.06	54.00	-28.06	Average	
2 2483.50	28.93	4.70	52.04	50.29	54.00	3.71	Average	

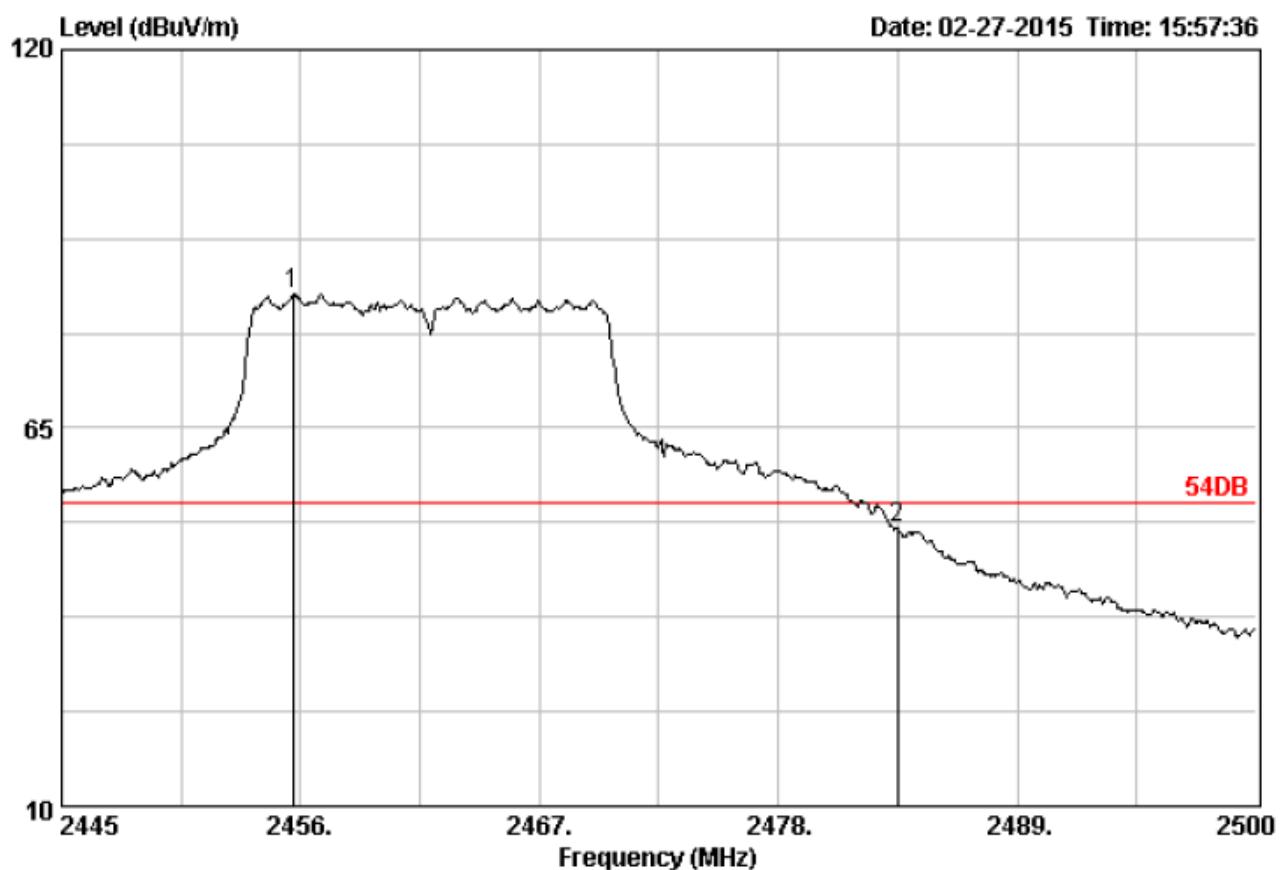


Site no. : 3m Chamber Data no. : 676
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2455.67	28.90	4.68	86.28	84.49	54.00	-30.49	Average	
2 2483.50	28.93	4.70	52.06	50.31	54.00	3.69	Average	

4.6. Power Spectral Density Measurement

TEST CONFIGURATION

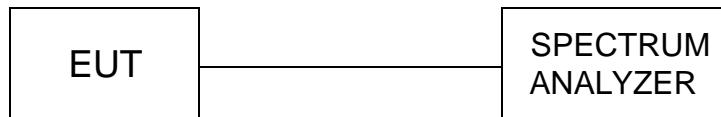

TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r02 for compliance to FCC 47CFR 15.247 and requirements.

Set RBW= 3 kHz, VBW \geq 10KHz, SPAN to 1.5 times greater than the EBW.,


LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST RESULTS

Product	:	Industrial Rugged Handheld Computer
Test Item	:	Power Spectral Density
Test Mode	:	Mode 1: Transmit by 802.11b


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	2412	-12.27	8	Pass
06	2437	-13.35	8	Pass
11	2462	-13.14	8	Pass

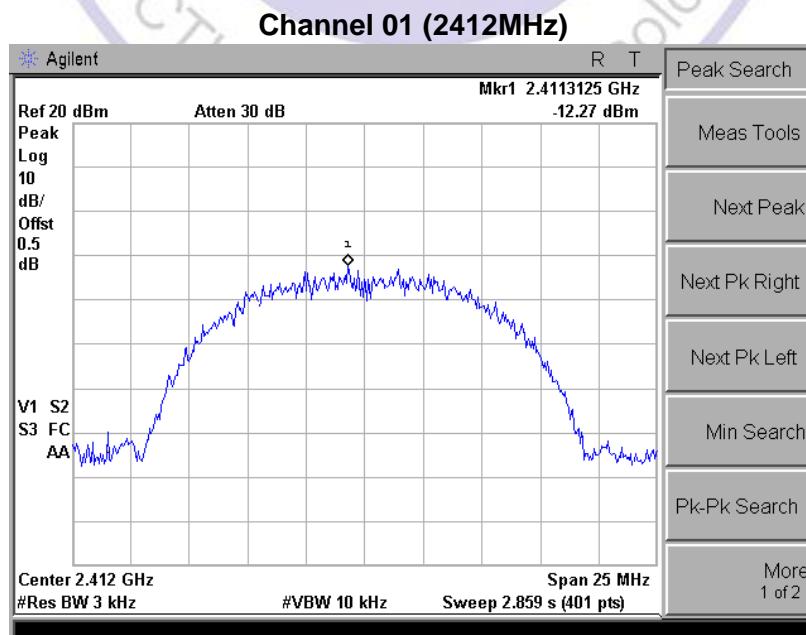

Channel 06 (2437MHz)

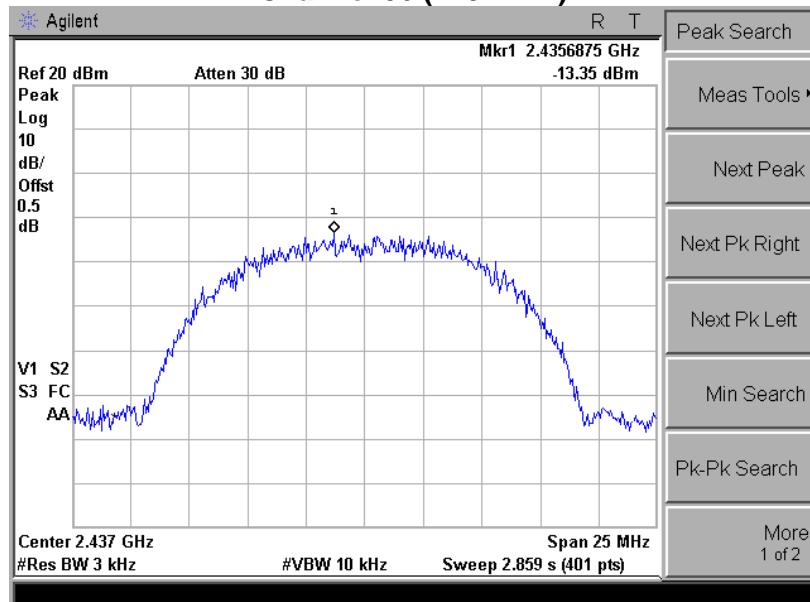


Channel 11 (2462MHz)

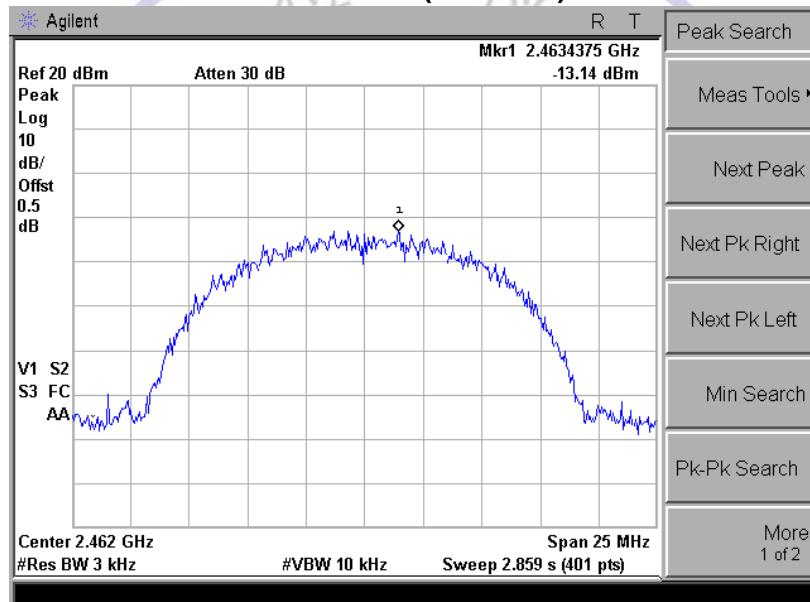


Product	:	Industrial Rugged Handheld Computer
Test Item	:	Power Spectral Density
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	2412	-20.91	8	Pass
06	2437	-20.68	8	Pass
11	2462	-20.39	8	Pass


Channel 01 (2412MHz)

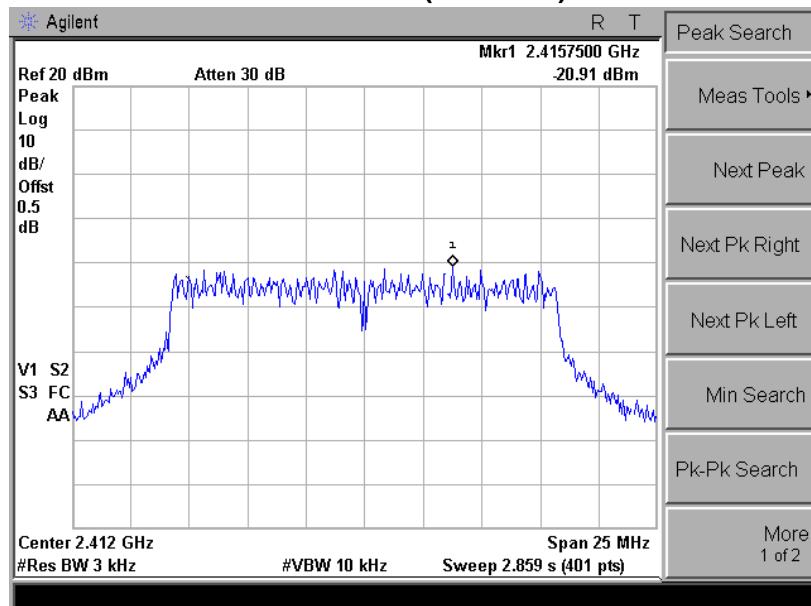

Channel 06 (2437MHz)

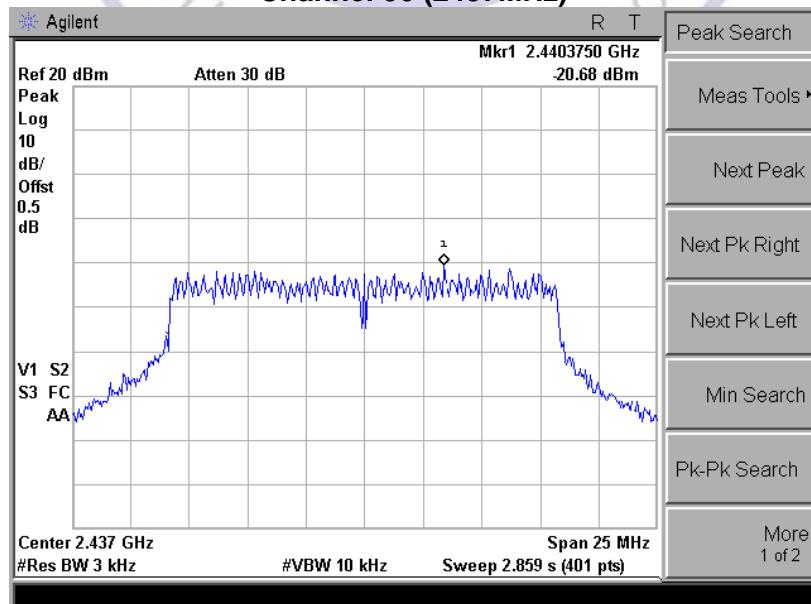


Channel 11 (2462MHz)

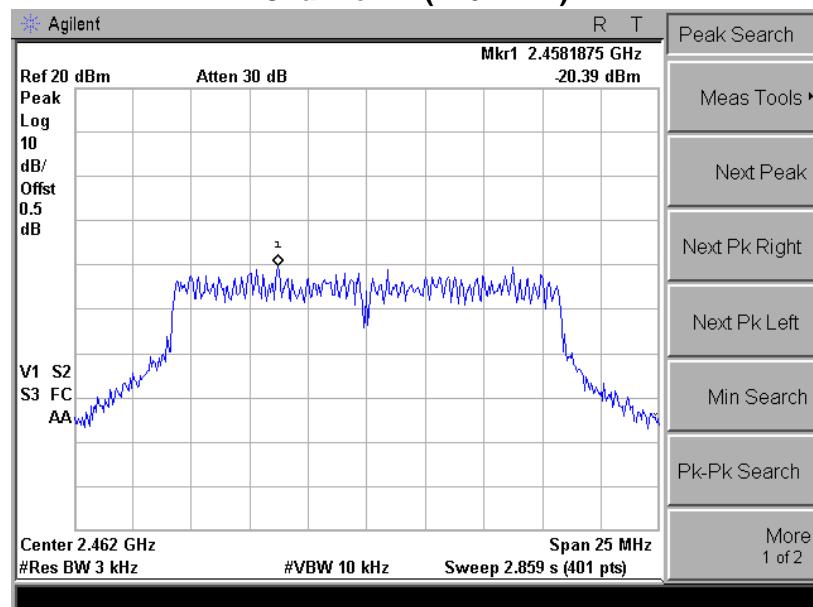

4.7. Spurious RF Conducted Emission

TEST CONFIGURATION

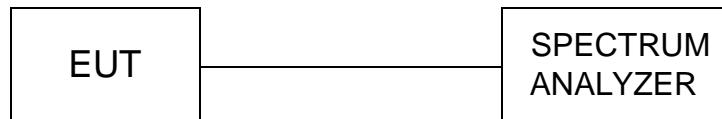

TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r02 for compliance to FCC 47CFR 15.247 requirements.

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength , and measure frequeny range from 30MHz to 26.5GHz.


LIMIT



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

TEST RESULTS



Product	:	Industrial Rugged Handheld Computer
Test Item	:	RF Antenna Conducted Spurious
Test Mode	:	Mode 1: Transmit by 802.11b

Channel 01 (2412MHz)



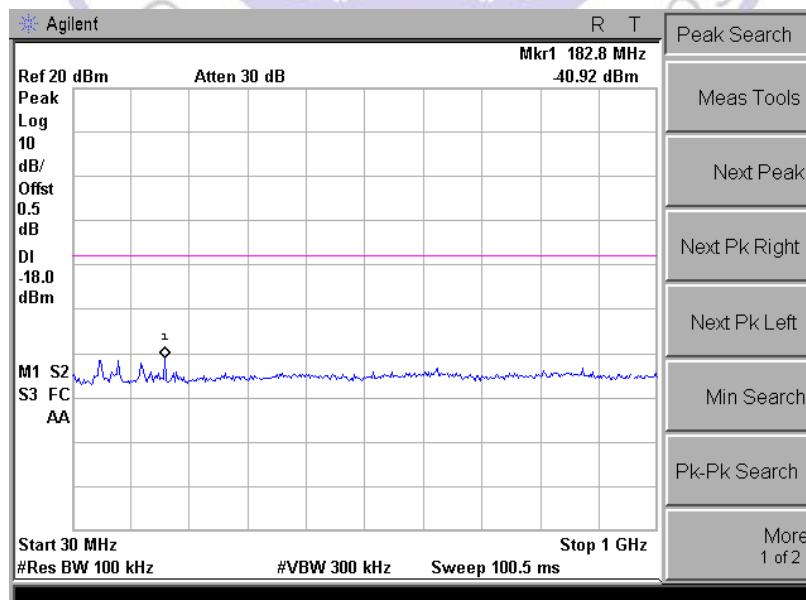


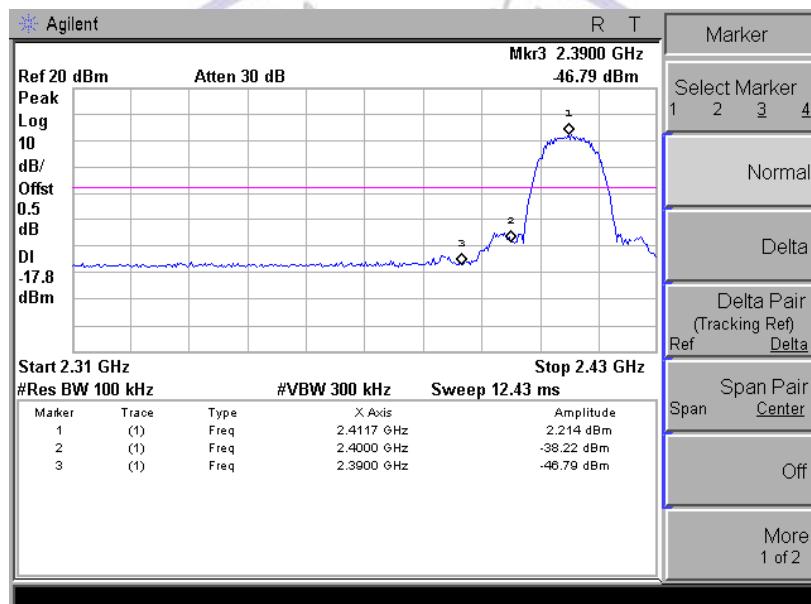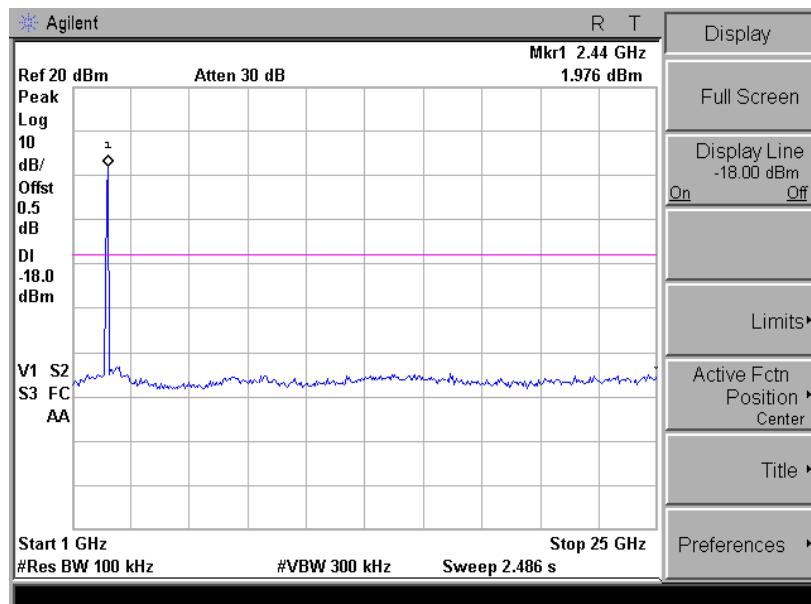

Channel 06 (2437MHz)

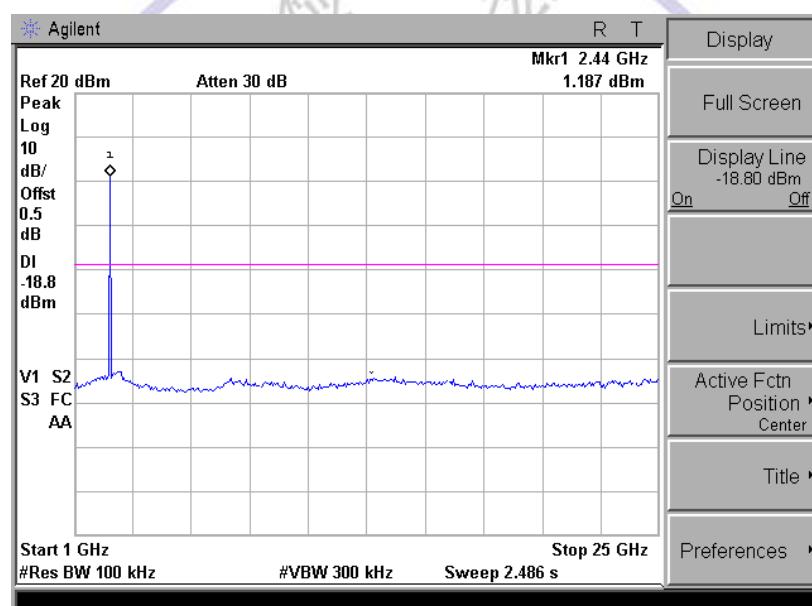
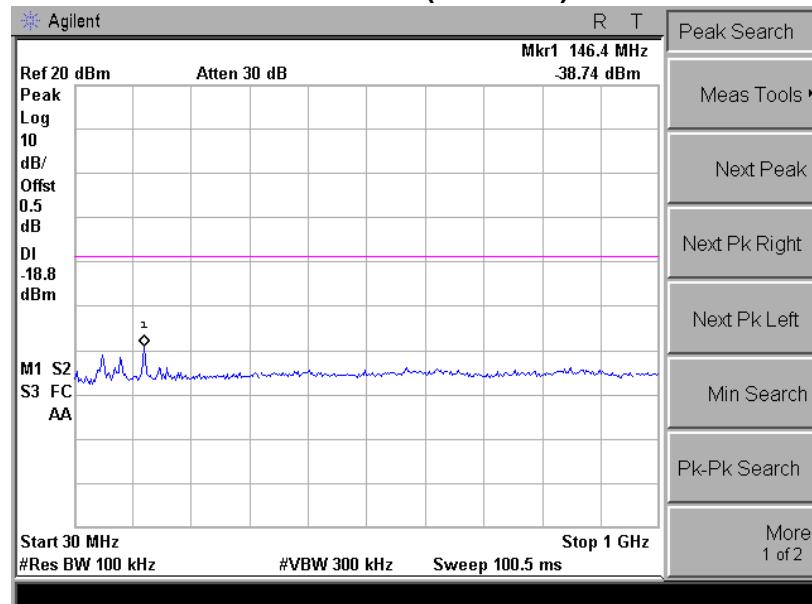



Channel 11 (2462MHz)

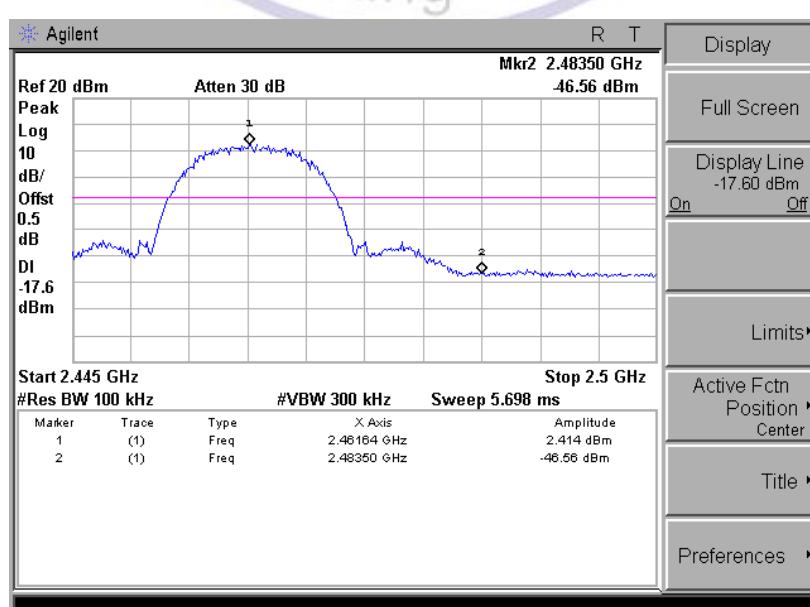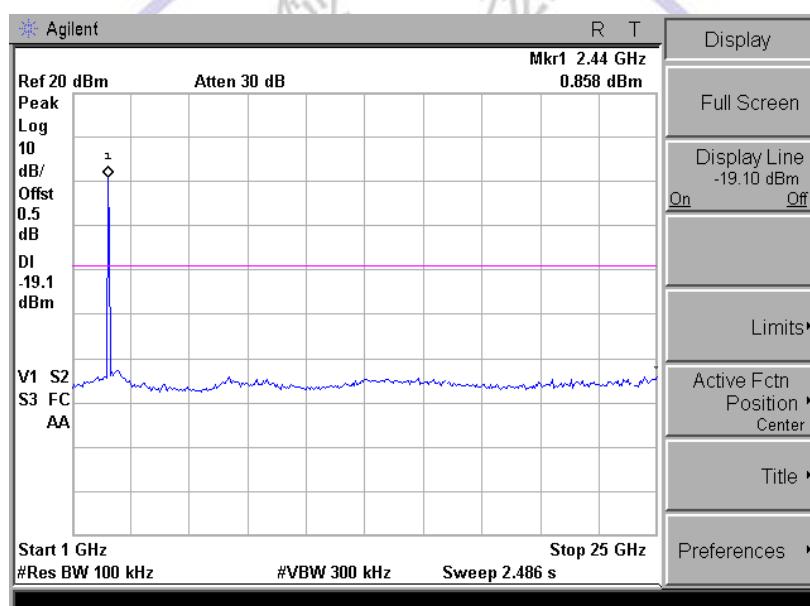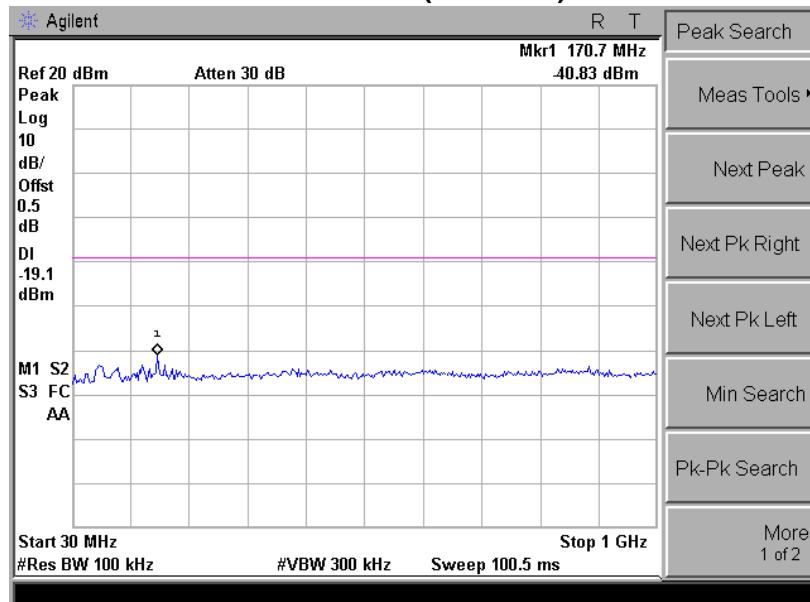



Product	:	Industrial Rugged Handheld Computer
Test Item	:	RF Antenna Conducted Spurious
Test Mode	:	Mode 2: Transmit by 802.11g

Channel 01 (2412MHz)


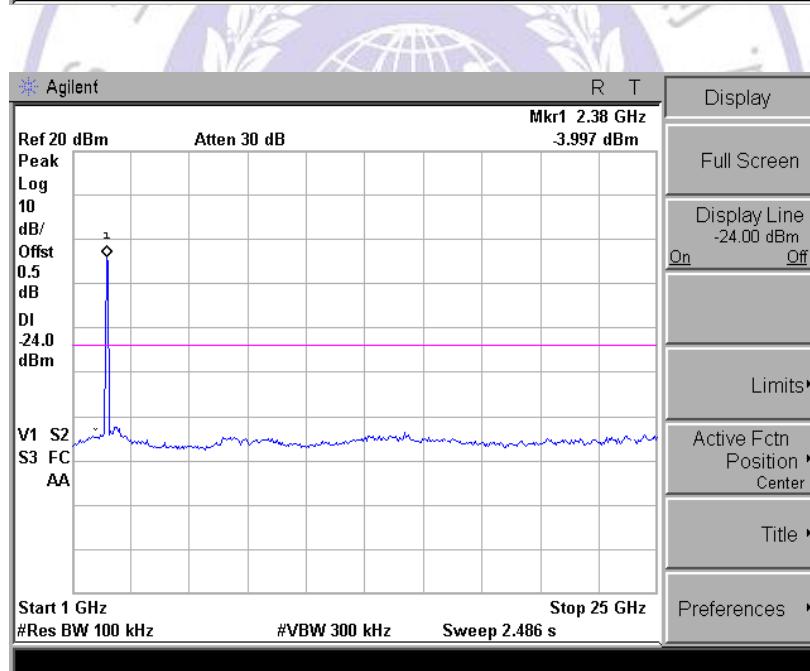
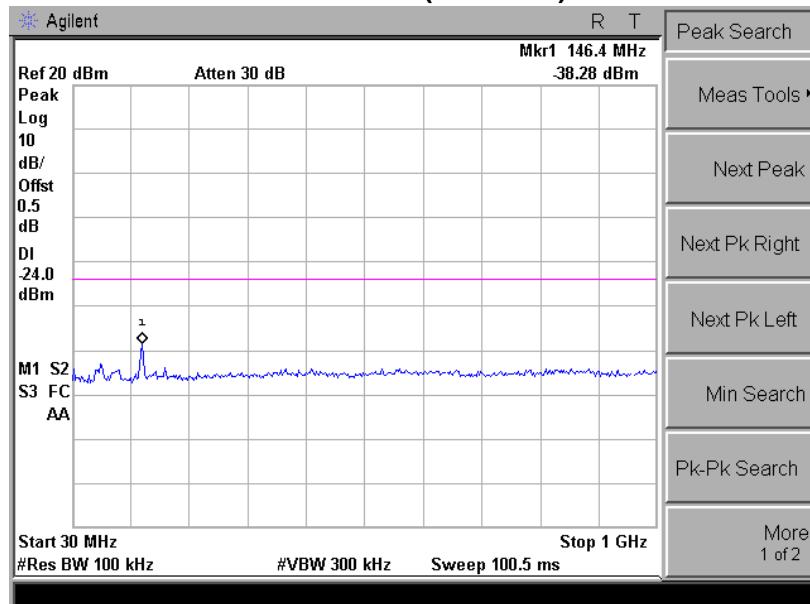


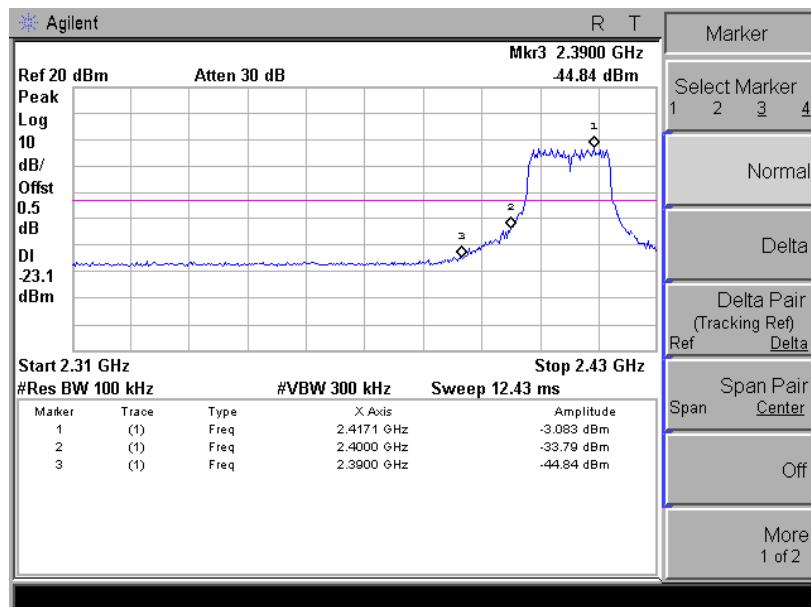

Channel 06 (2437MHz)

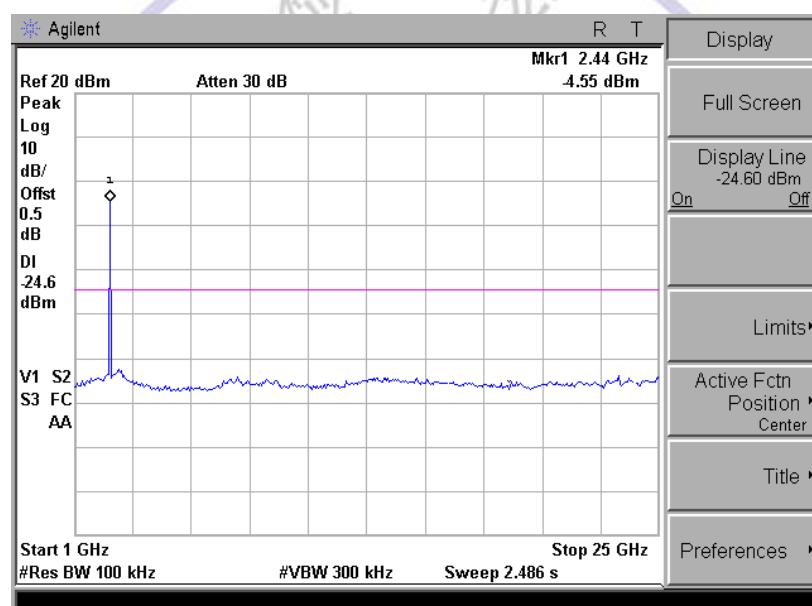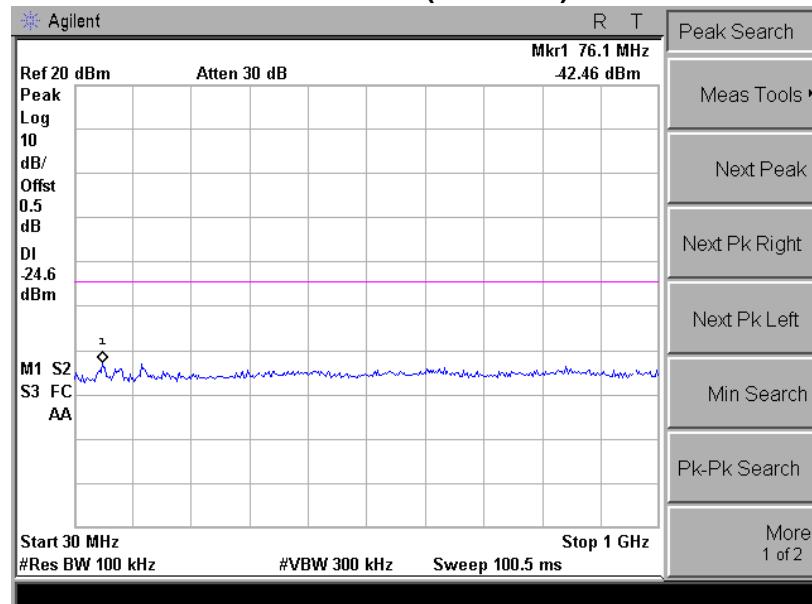

Channel 11 (2462MHz)

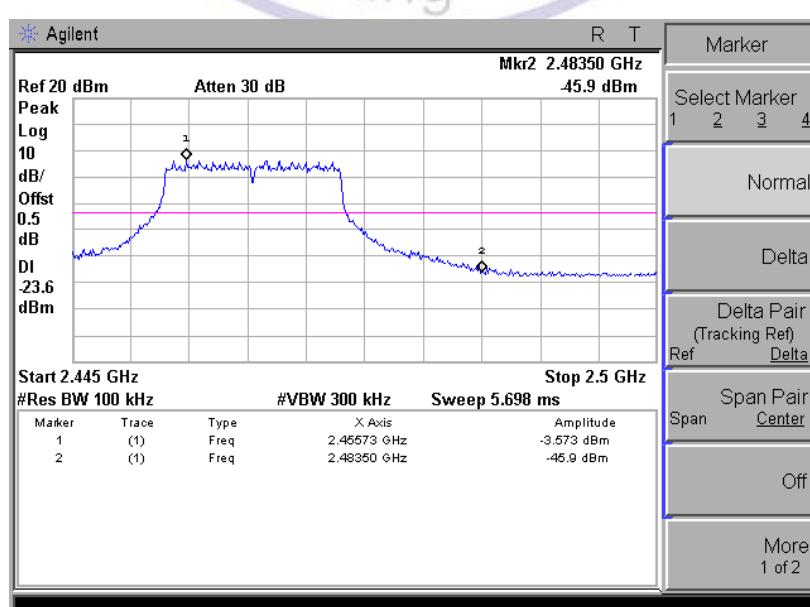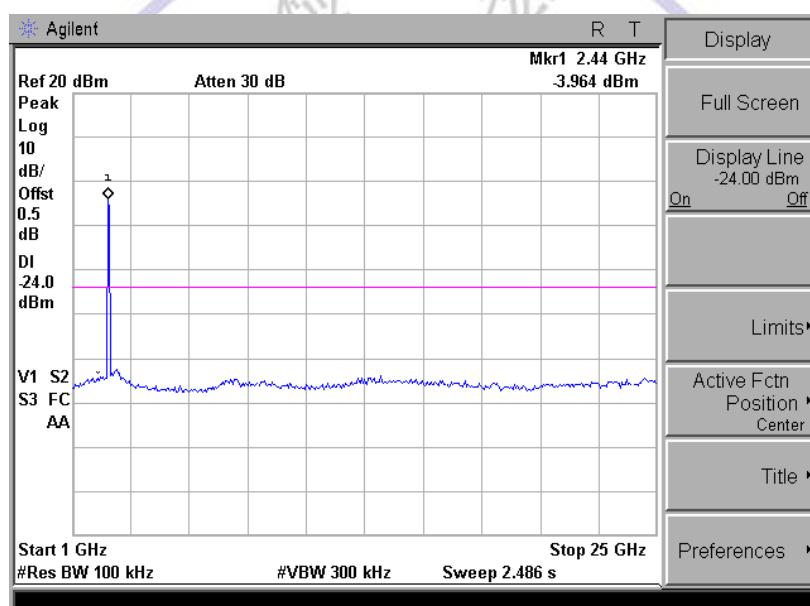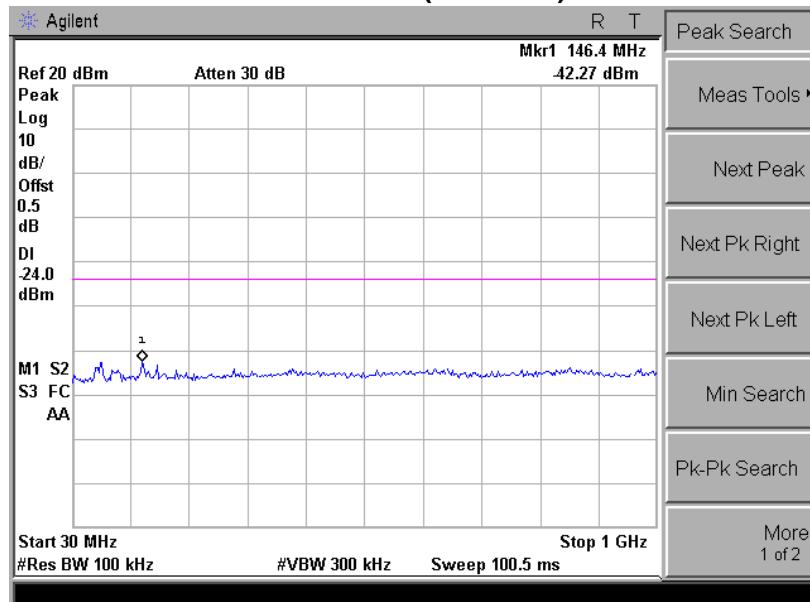

4.8. Antenna Requirement

STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

ANTENNA CONNECTED CONSTRUCTION

The directional gains of antenna used for transmitting is 1.0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

