



FCC PART 15, SUBPART F ISED C RSS-220, ISSUE 1, JULY 2018

TEST REPORT

For

Tesla, Inc.

3500 Deer Creek Road, Palo Alto, CA 94304, USA

**FCC ID: 2AEIM-2005551
IC: 20098-2005551**

Report Type: Original	Product Type: Automotive Part
Prepared By: Arturo Reyes Test Engineer	
Report Number: R2403121-519	
Report Date: 2024-04-19	
Reviewed By: Christian McCaig RF Lead Engineer	
<p>Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: +1 (408) 732-9162, Fax: +1 (408) 732-9164</p>	



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” (Rev.2)

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.2 Mechanical Description of EUT	5
1.3 Objective	5
1.4 Related Submittal(s)/Grant(s)	5
1.5 Test Methodology	5
1.6 Measurement Uncertainty	6
1.7 Test Facility Registrations	6
1.8 Test Facility Accreditations	6
2 System Test Configuration.....	9
2.1 Justification.....	9
2.2 EUT Exercise Software.....	9
2.3 Equipment Modifications.....	10
2.4 Remote Support Equipment.....	10
2.5 Power Supply	10
2.6 Interface Ports and Cabling.....	10
3 Summary of Test Results	11
4 FCC §15.203 & ISEDC RSS-220 §5.1(b), RSS-Gen §6.8 - Antenna Requirements.....	12
4.1 Applicable Standards	12
4.2 Antenna Description	13
5 FCC §2.1091, §1.1310(d) (3) & ISEDC RSS-102 - RF Exposure	14
5.1 Applicable Standards	14
5.2 MPE Prediction.....	15
5.3 MPE Results for the FCC	15
5.4 RF Exposure Evaluation Exemption for IC	15
6 FCC §15.209, §15.519(c), (d) & ISEDC RSS-220 §3.4, §5.3.1(d), (e), RSS-Gen §8.9, §8.10 - Radiated Emissions	16
6.1 Applicable Standards	16
6.2 Test Setup	19
6.3 Measurement Procedure.....	19
6.4 Corrected Amplitude and Margin Calculation.....	19
6.5 Test Setup Block Diagram.....	20
6.6 Test Equipment List and Details	22
6.7 Test Environmental Conditions	23
6.8 Test Results below 960 MHz.....	24
6.9 Test Results above 960 MHz	30
7 FCC §15.519(e), §15.521(e) & ISEDC RSS-220 §5.3.1(g) - Peak Fundamental Emission.....	59
7.1 Applicable Standards	59
7.2 Measurement Procedure.....	59
7.3 Test Setup Block Diagram.....	59
7.4 Test Equipment List and Details	60
7.5 Test Environmental Conditions	60
7.6 Test Results.....	61
8 FCC §15.503(d), §15.519(b) & ISEDC RSS-220 §5.1(a), RSS-Gen §6.7 -Emission Bandwidth.....	65
8.1 Applicable Standards	65
8.2 Measurement Procedure.....	65
8.3 Test Setup Block Diagram.....	65
8.4 Test Equipment List and Details	66
8.5 Test Environmental Conditions	66
8.6 Test Results.....	67
9 FCC §15.519(a) (1) & ISEDC RSS-220 §5.3.1(b) - Cease Transmission.....	71
9.1 Applicable Standards	71
9.2 Measurement Procedure.....	71
9.3 Test Setup Block Diagram.....	71
9.4 Test Equipment List and Details	72
9.5 Test Environmental Conditions	72
9.6 Test Results.....	73

10 Annex A (Normative) - Test Setup Photographs	74
11 Annex B (Normative) - EUT External Photographs.....	75
12 Annex C (Normative) - EUT Internal Photographs	76
13 Annex D (Normative) - A2LA Electrical Testing Certificate.....	77

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2403121-519	Original	2024-04-19

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test report was prepared on behalf of Tesla, Inc., and their product model: 2005551, FCC ID: 2AEIM-2005551, IC: 20098-2005551 or the “EUT” as referred to in this report. The EUT is an Automotive Part (Endpoint Device) with Ultra-Wide-band (UWB) operating in 6489.6-7987.2 MHz, Bluetooth Low Energy (BLE).

UWB Subclass as specified by RSS-220 §3.2: Hand-held Communication Devices.

The radio terminal has data port.

1.2 Mechanical Description of EUT

2005551 measures approximately 14.0 cm (Length) x 4.8 cm (Width) x 1.2 cm (Height).

The data gathered is from a sample provided by Tesla Motors, Inc. with serial number: 2005551-00-A.

1.3 Objective

This report was prepared on behalf of *Tesla Motors, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subpart and F of the Federal Communication Commission’s rules and ISED RSS-220 Issue 1, July 2018.

The objective was to determine compliance with FCC Part 15.519 and ISED RSS-220 rules for Peak Fundamental Emission, Antenna Requirements, UWB Bandwidth, Average Radiated Emissions, Radiated Spurious Emissions and Ceasing Transmission requirements.

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DTS, FCC ID: 2AEIM-2005551, IC: 20098-2005551

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 393761 D01 UWB FAQ v02: Ultra-Wideband (UWB) Devices Frequently Asked Questions.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.57\text{ dB}$
Power Spectral Density, conducted	$\pm 1.48\text{ dB}$
Unwanted Emissions, conducted	$\pm 1.57\text{ dB}$
All emissions, radiated	$\pm 4.0\text{ dB}$
AC power line Conducted Emission	$\pm 2.0\text{ dB}$
Temperature	$\pm 2\text{ }^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 1.0\%$
Time	$\pm 2\%$
Duty Cycle	$\pm 3\%$

1.7 Test Facility Registrations

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R.

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2017 by A2LA (Test Laboratory Accreditation Certificate Number 3297.01), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report.

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment

[including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.02) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment

- for Commercial Dishwashers (ver. 2.0)
- for Commercial Ice Machines (ver. 2.0)
- for Commercial Ovens (ver. 2.1)
- for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISEDC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

2.2 EUT Exercise Software

Python scripts were provided by Tesla Motors, Inc., and was verified to be compliant with the standard requirements being tested against. The following channel frequencies were selected for testing. All the modes were measured for fundamental field strength, and the corresponding power settings used are listed below.

Radio	Frequency (MHz)	Mode	Power Setting
UWB	6489.6 MHz (Channel 5)	4	-2
		11	-1.75
	6988.8 MHz (Channel 6)	4	-2
		11	-1.75
	7987.2 MHz (Channel 9)	4	-1.5
		11	-1.5

Note: Mode 4= SP0 Config 4
Mode 11 = SP3 Config 11

Please refer to the Operational Description for detailed description of the test modes.

2.3 Equipment Modifications

None

2.4 Remote Support Equipment

Manufacturer	Description	Model	S/N
HP	Laptop	Zbook Studio G3	CND823074L
PJRC	Teensy UART-CAN	Teensy-LC	-

2.5 Power Supply

Manufacturer	Description	Model	S/N
Volteq	DC Power Supply	HY5003D	160402343

2.6 Interface Ports and Cabling

Cable Description	Length (m)	To	From
Power Cables	< 1 m	EUT	DC Power Supply
USB Cable	< 1 m	PC	Teensy
Serial Cable	< 1 m	Teensy	EUT

3 Summary of Test Results

Results reported relate only to the product tested.

FCC and ISEDC Rules	Description of Test	Results
FCC §15.203 ISEDC RSS-220 §5.1(b), ISEDC RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207 ISEDC RSS-Gen §8.8	AC Line Conducted Emissions	N/A ¹
FCC §2.1091, §1.1310(d) (3) ISEDC RSS-102	RF Exposure	Compliant
FCC §2.1053, §15.205, §15.209, §15.519(c) ISEDC RSS-220 §3.4, 5.3.1(c) ISEDC RSS-Gen §8.9 & §8.10	Radiated Emissions	Compliant
FCC §15.503(d),§15.519(b) ISEDC RSS-220 §5.1(a) ISEDC RSS-Gen§6.7	Emission Bandwidth	Compliant
FCC §15.519(e) ISEDC RSS-220 §5.3.1(g)	Peak Fundamental Emission	Compliant
FCC §15.519(c), §15.519(d) ISEDC RSS-220 §5.3.1(d), §5.3.1(e)	Average Radiated Emissions	Compliant
FCC §15.519(a)(1) ISEDC RSS-220 §5.3.1(b)	Cease Transmission	Compliant

Note¹: Device is powered by car battery.

BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report. Information provided by the customer, e.g., antenna gain, can affect the validity of results

4 FCC §15.203 & ISED RSS-220 §5.1(b), RSS-Gen §6.8 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to ISED RSS-Gen §6.8: Transmitter Antenna

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

4.2 Antenna Description

External/Internal/Integral	Frequency (MHz)	Maximum Antenna Gain (dBi)	Antenna Type
Integral	6489.6	4.14	Metal IFA
Integral	6988.8	3.66	Metal IFA
Integral	7987.2	2.98	Metal IFA

The antenna is factory-installed and is not modifiable by users.

The antenna gain is information provided by the customer.

5 FCC §2.1091, §1.1310(d) (3) & ISED RSS-102 - RF Exposure

5.1 Applicable Standards

As per FCC §1.1310(d) (3), At operating frequencies above 6 GHz, the MPE limits listed in Table 1 in paragraph (e)(1) of this section shall be used in all cases to evaluate the environmental impact of human exposure to RF radiation as specified in §1.1307(b) of this part.

TABLE 1 TO §1.1310(E)(1)—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

f = frequency in MHz. * = Plane-wave equivalent power density.

According to ISED RSS-102 Issue 5 §2.5.2, Exemption Limits for Routine Evaluation- RF Exposure Evaluation,

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;

- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = \text{EIRP}/4\pi R^2$$

Where: S = power density

EIRP = Effective Isotropic Radiated Power

R = distance to the center of radiation of the antenna

5.3 MPE Results for the FCC

UWB Standalone

<u>Maximum EIRP at antenna input terminal (dBm):</u>	<u>-41.42</u>
<u>Maximum EIRP at antenna input terminal (mW):</u>	<u>0.0000721</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>7987.2</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.98</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.99</u>
<u>Power density of prediction frequency at 20 cm (mW/cm²):</u>	<u>1.435x10⁻⁸</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the FCC requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 1.435×10^{-8} mW/cm². Limit is 1.0 mW/cm².

Worst Case Co-location MPE Calculation: UWB and BLE

Radio	Max EIRP (dBm)	Evaluated Distance (cm)	Worst-Case Exposure Level [mW/cm ²]	Limit [mW/cm ²]	Worst-Case Ratios	Sum of Ratios	Limit
Worst Case							
BLE	5.99	20	0.000790 mW/cm ²	1.0 mW/cm ²	0.079%	0.079%	100%
UWB	-41.42	20	0.0000001435 mW/cm ²	1.0 mW/cm ²	0.00000143%		

5.4 RF Exposure Evaluation Exemption for IC

The conducted output power of this device is -41.42 dBm (0.0000721 mW), which is less than the exemption threshold, i.e., 5 W. Therefore, the RF exposure evaluation is exempt.

6 FCC §15.209, §15.519(c), (d) & ISED RSS-220 §3.4, §5.3.1(d), (e), RSS-Gen §8.9, §8.10 - Radiated Emissions

6.1 Applicable Standards

As per FCC §15.519(c), the radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209

As per FCC §15.35(b): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3332 – 3339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3345.8 – 3358	23.6 – 24.0
12.29 – 12.293	240 – 285	3600 – 4400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per ISEDC RSS-Gen §8.9, except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in the table below. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

General Field Strength Limits at Frequencies above 30 MHz

Frequency (MHz)	Field Strength (μ V/m at 3 meters)
30-88	100
88-216	150
216-960	200
Above 960	500

As per ISEDC RSS-220 §5.3.1(c), Radiated emissions at or below 960 MHz from a device shall not exceed the limits in section 3.4

As per ISEDC RSS-220 §3.4, Radiated emissions at or below 960 MHz for all subclasses of UWB device shall not exceed the following limits. Measurements of radiated emissions at and below 960 MHz are to be made using a CISPR quasi-peak detector. CISPR measurement bandwidth specifications are to be used

Radiated Emissions at or below 960 MHz			
Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)	E.I.R.P (dBmW)
0.009 - 0.490	2400/F (F in kHz)	300	$10\log(17.28/F^2)$ (F in kHz)
0.490 - 1.705	24000/F (F in kHz)	30	$10\log(17.28/F^2)$ (F in kHz)
1.705 - 30.0	30	30	-45.7
30 - 88	100	3	-55.2
88 - 216	150	3	-51.7
216 - 960	200	3	-49.2

According to FCC §15.519(c): (c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

According to ISED RSS-220 §5.3.1(d): Radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1MHz.

Frequency	EIRP
960-1610 MHz	-75.3 dBm
1.61-4.75 GHz	-70.0 dBm
4.75-10.6 GHz	-41.3 dBm
Above 10.6 GHz	-61.3 dBm

According to FCC §15.519(c): (d) In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

According to ISED RSS-220 §5.3.1(e): In addition to the limits specified in paragraph (d) of this section, radiated emissions shall not exceed the following average limits when measured using a resolution bandwidth greater than or equal to 1 kHz. The measurements shall demonstrate compliance with the stated limits at whatever resolution bandwidth is used.

Frequency	e.i.r.p. in a Resolution Bandwidth of no less than 1 kHz
1164-1240 MHz	-85.3 dBm
1559-1610 MHz	-85.3 dBm

6.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart F and ISEDC RSS-220 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

6.3 Measurement Procedure

The EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For radiated testing the EUT was set 1 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 960 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 960 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 960 MHz:

The measurements were based on ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices section 10.3: Radiated measurement procedure above 960MHz.

6.4 Corrected Amplitude and Margin Calculation

For emissions below 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Correction Factor to the S.A. Reading. The basic equation is as follows:

$$\text{CA} = \text{S.A. Reading} + \text{Correction Factor}$$

For example, a corrected amplitude of 40.3 dBuV/m = S.A. Reading (32.5 dBuV) + Correction Factor (7.8 dB/m)

The Correction Factor is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) together. This calculation is done in the measurement software, and reported in the test result section. The basic equation is as follows:

$$\text{Correction Factor} = \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For emission above 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$


For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$


6.5 Test Setup Block Diagram

Below 1GHz:

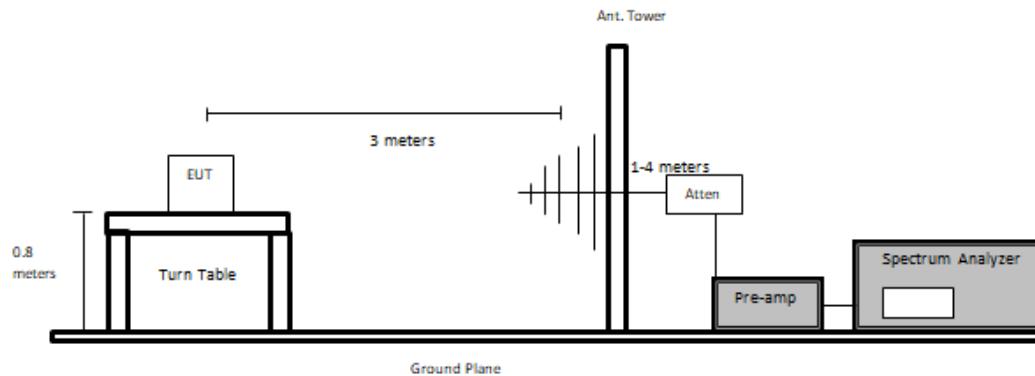


Above 1GHz:

At 3 meters:

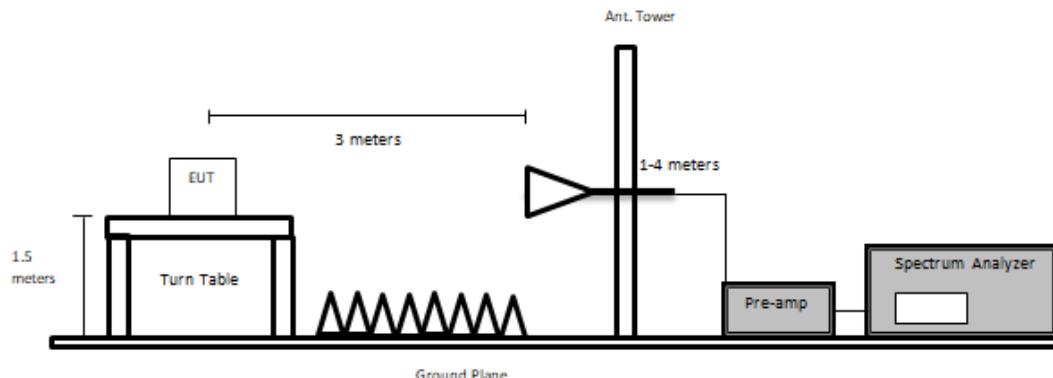

At 1 meter:

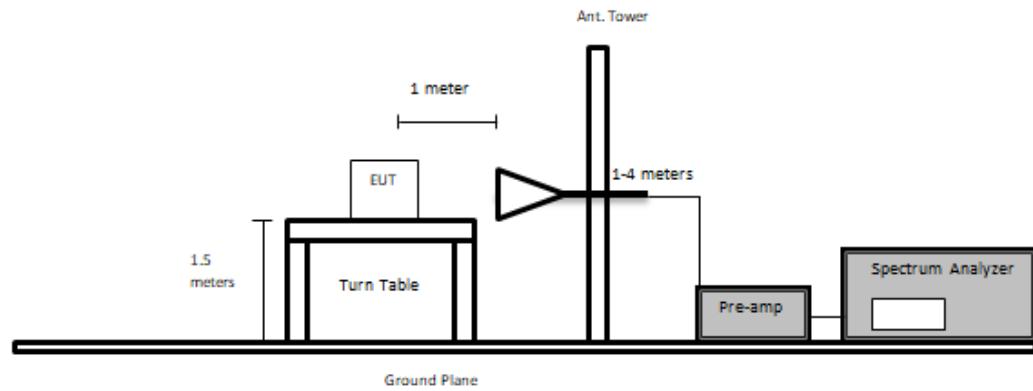

6.6 Test Equipment List and Details

Asset #	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
310	Rohde & Schwarz	EMI test receiver 9 KHZ to 3 GHZ	ESCI 1166.5950.03	100338	2023-05-11	1 year
316	Sonoma Instruments	Preamplifier	317	260406	2024-02-27	6 months
321	Sunol Sciences	Biconilog Antenna	JB3	A020106-2; 1504	2023-12-18	2 years
1186	Pasternack	Coaxial Cable, RG214	PE3062-1050CM	-	2023-10-03	6 months
1245	-	6dB Attenuator	PE7390-6	01182018A	2023-12-18	2 years
1246	HP	RF Limiter	11867A	01734	2023-04-13	1 year
1248	Pasternack	RG214 COAX Cable	PE3062	-	2023-10-04	6 months
1249	Time Microwave	LMR-400 Cable Dc-3 GHz	AE13684	2k80612-5 6fts	2023-10-09	6 months
624	Agilent	Spectrum Analyzer	E4446A	MY482502 38	2023-05-12	1 year
655	Rohde & Schwarz	Signal Analyzer	FSQ26	200749	2023-06-06	1 year
658	HP/ Agilant	Preamplifier	8449B OPT HO2	3008A0110 3	2023-12-01	6 months
784	ETS Lindgren	Horn Antenna with Preamp 1-18Ghz	3117 PA	203557	2022-08-25	2 years
1192	ETS Lindgren	Horn Antenna	3117	00218973	2022-09-29	2 years
1247	Uti flex	Micro - Coax	-	-	2023-12-01	6 months
1295	Carlisle	10m Ultra Low Loss Coaxial Cable	UFB142A-1-3937-200200	646398909 12-001	2023-10-31	6 months
1353	RFMW	2.92mm 10ft RF Cable DC to 40 GHz	P1CA-29M29M-F150-120	-	2024-01-24	1 year
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k 39-101203-UW	2023-06-02	1 year
90	Wisewave	Horn Antenna	ARH-4223-02	10555-01	2023-05-02	2 years
92	Wisewave	Horn Antenna	ARH-2823-02	10555-01	2022-03-17	2 years
827	AH Systems	Preamplifier	PAM 1840 VH	170	2023-11-08	6 months
1329	Pasternack	2.92mm short coaxial cable	PE360-12	-	2023-11-28	6 months
327	Sunol Sciences	System Controller	SC110V	122303-1	NR	NR
1075	Sunol Sciences	Boresight Tower	TLT3	050119-7	NR	NR
1388	Sunol Sciences	Flush Mount Turntable	FM	112005-2	NR	NR

Note¹: cables included in the test set-up will be checked each time before testing.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

6.7 Test Environmental Conditions

Temperature:	20-22 °C
Relative Humidity:	42-50 %
ATM Pressure:	102.7 kPa


The testing was performed by Will Hu on 2024-03-25 and by Arturo Reyes from 2024-03-08 to 2024-03-28 in 5 meter chamber 3.

6.8 Test Results below 960 MHz

Note: Pre-scans were performed on all shown configurations in order to determine worst-case results. Following this, a formal scan was performed on the worst-case detailed below


1) 30 MHz – 1 GHz Measured

Mode 4: 6489.6 MHz

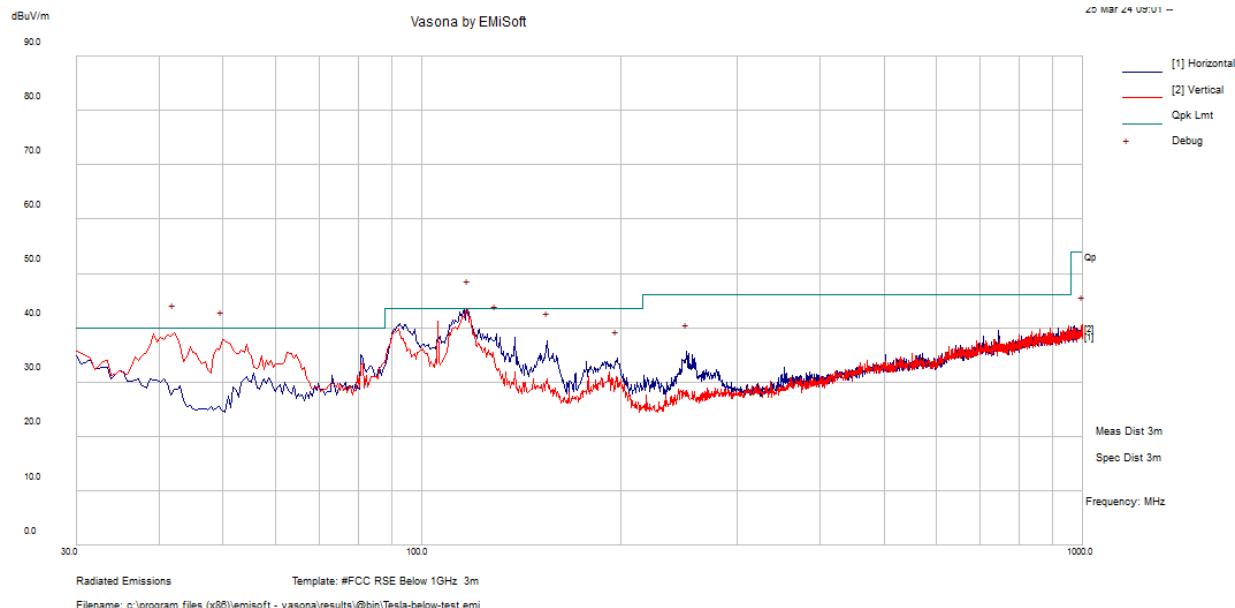

Freq. (MHz)	S.A. Reading (dB μ V)	Corr. Factor (dB/m)	Corrected Amp. (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)	Comment
117.19	43.43	-7.15	36.28	253	H	265	43.5	-7.22	QP
42.12	43.13	-9.24	33.89	105	V	72	40	-6.11	QP
50.06	43.79	-13.65	30.14	156	V	140	40	-9.86	QP
129.62	41.00	-6.78	34.22	148	H	193	43.5	-9.28	QP
154.76	39.39	-8.26	31.13	123	H	178	43.5	-12.37	QP
197.41	36.79	-7.97	28.82	152	H	210	43.5	-14.68	QP


Mode 4: 6988.8 MHz

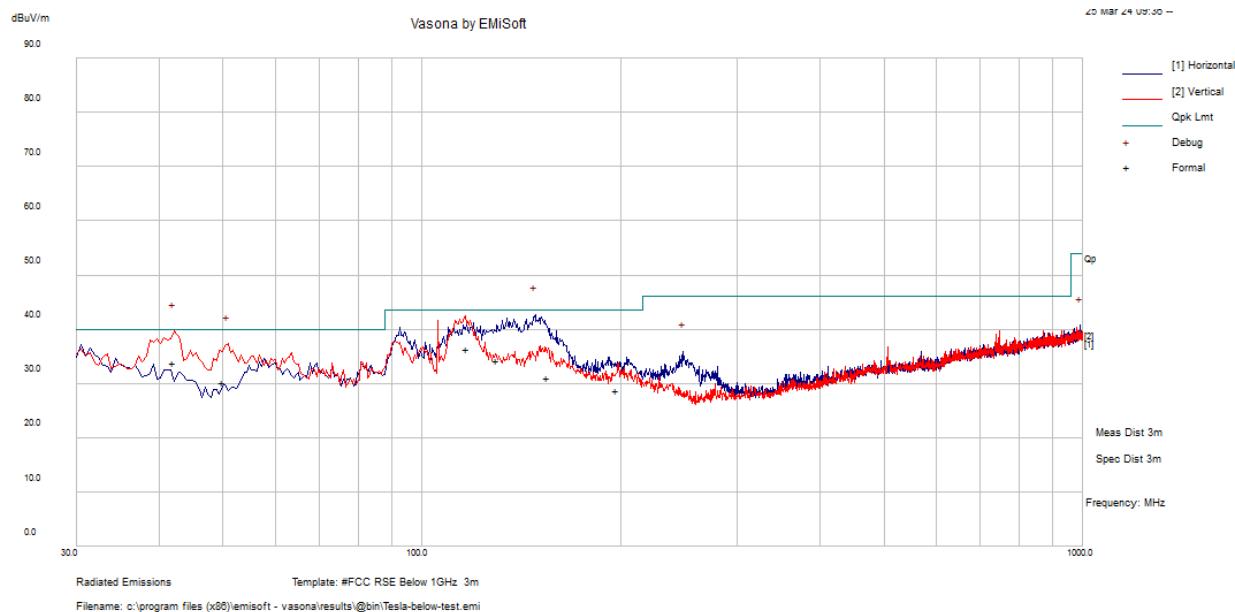

Freq. (MHz)	S.A. Reading (dB μ V)	Corr. Factor (dB/m)	Corrected Amp. (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)	Comment
42.13	48.85	-9.24	39.61	100	V	360	40	-0.39	Peak
148.34	50.83	-8.05	42.78	200	H	360	44	-0.72	Peak
50.86	51.05	-13.77	37.28	100	V	360	40	-2.72	Peak
248.25	44.52	-8.64	35.88	100	H	360	46	-10.12	Peak
991.76	35.35	5.33	40.68	100	H	360	54	-13.32	Peak
195.39	41.99	-8.22	33.77	200	H	360	43.5	-9.73	Peak


Note: Peak measurements are compared to the quasi-peak limit to show compliance.

Mode 4: 7987.2 MHz

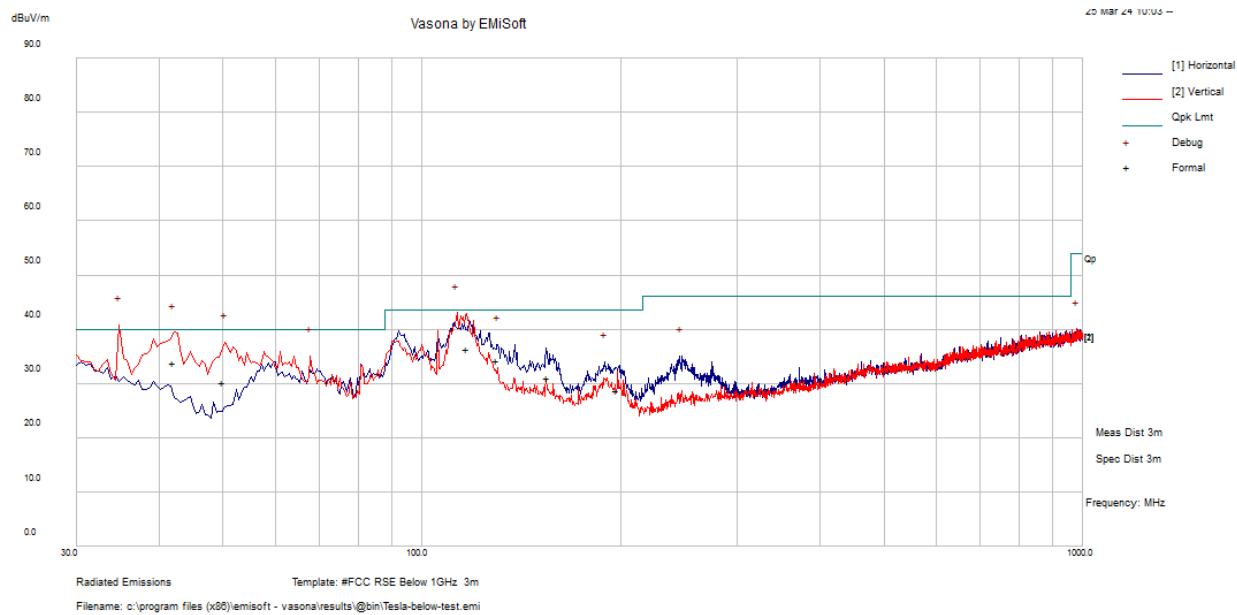

Freq. (MHz)	S.A. Reading (dB μ V)	Corr. Factor (dB/m)	Corrected Amp. (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)	Comment
34.94	30.39	-4.31	26.08	131	V	56	40	-13.92	QP
112.87	45.95	-7.71	38.24	109	V	106	44	-5.26	QP
42.34	41.60	-9.40	32.20	128	V	101	40	-7.80	QP
50.56	43.40	-13.72	29.68	120	V	183	40	-10.32	QP
67.70	38.82	-13.22	25.60	115	V	262	40	-14.40	QP
130.24	39.74	-6.82	32.92	161	H	175	43.5	-10.58	QP


Mode 11: 6489.6 MHz

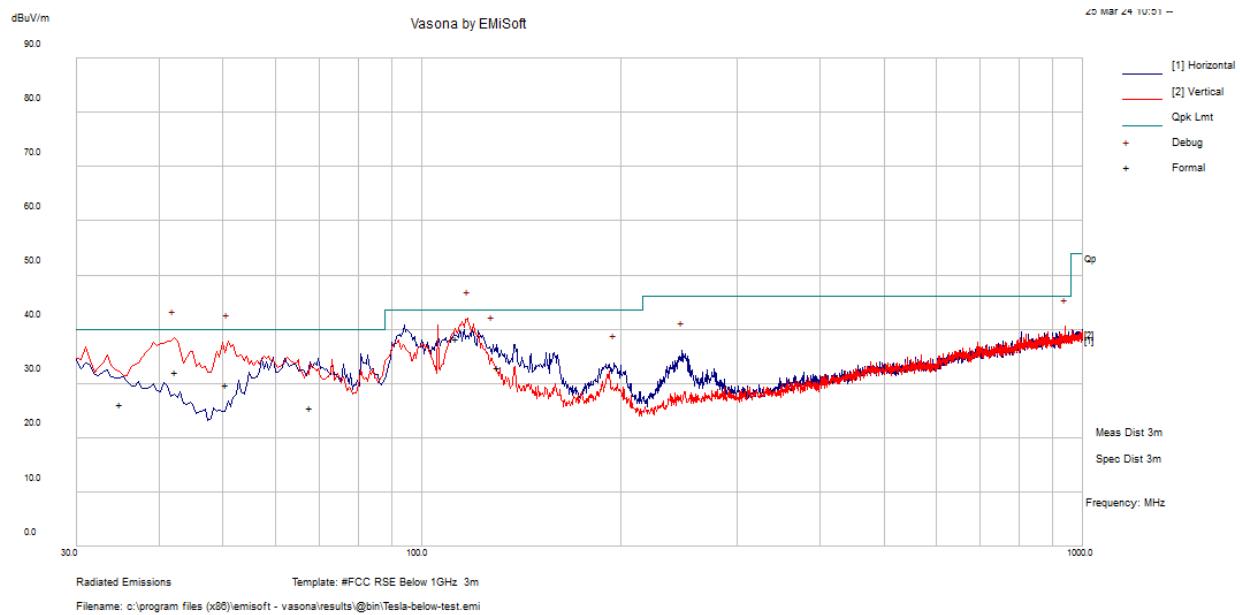

Freq. (MHz)	S.A. Reading (dB μ V)	Corr. Factor (dB/m)	Corrected Amp. (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)	Comment
117.30	49.09	-7.14	41.95	100	V	360	43.5	-1.55	Peak
42.13	47.58	-9.24	38.34	100	V	360	40	-1.66	Peak
50.86	51.49	-13.77	37.72	100	V	360	40	-2.28	Peak
939.86	35.95	4.51	40.46	100	V	360	46	-5.54	Peak
127.97	43.88	-6.72	37.16	200	H	360	43.5	-6.34	Peak
195.39	41.99	-8.22	33.77	200	H	360	43.5	-9.73	Peak


Note: Peak measurements are compared to the quasi-peak limit to show compliance.

Mode 11: 6988.8 MHz

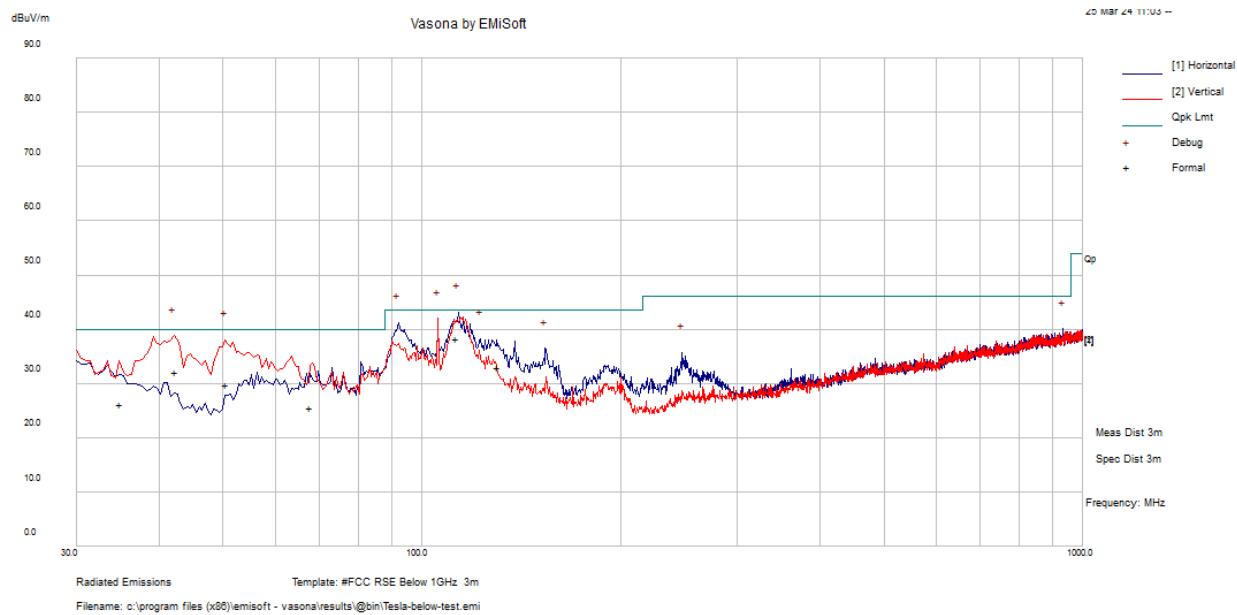

Freq. (MHz)	S.A. Reading (dB μ V)	Corr. Factor (dB/m)	Corrected Amp. (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)	Comment
42.28	39.37	-9.36	30.01	219	V	167	40.0	-9.99	QP
105.72	44.94	-8.77	36.17	107	V	101	44	-7.33	QP
50.53	44.68	-13.72	30.96	139	V	119	40	-9.04	QP
92.01	44.01	-12.46	31.55	229	H	163	43.5	-11.95	QP
122.62	41.30	-6.74	34.56	149	H	122	43.5	-8.94	QP
113.31	42.97	-7.65	35.32	117	V	107	43.5	-8.18	QP

Mode 11: 7987.2 MHz

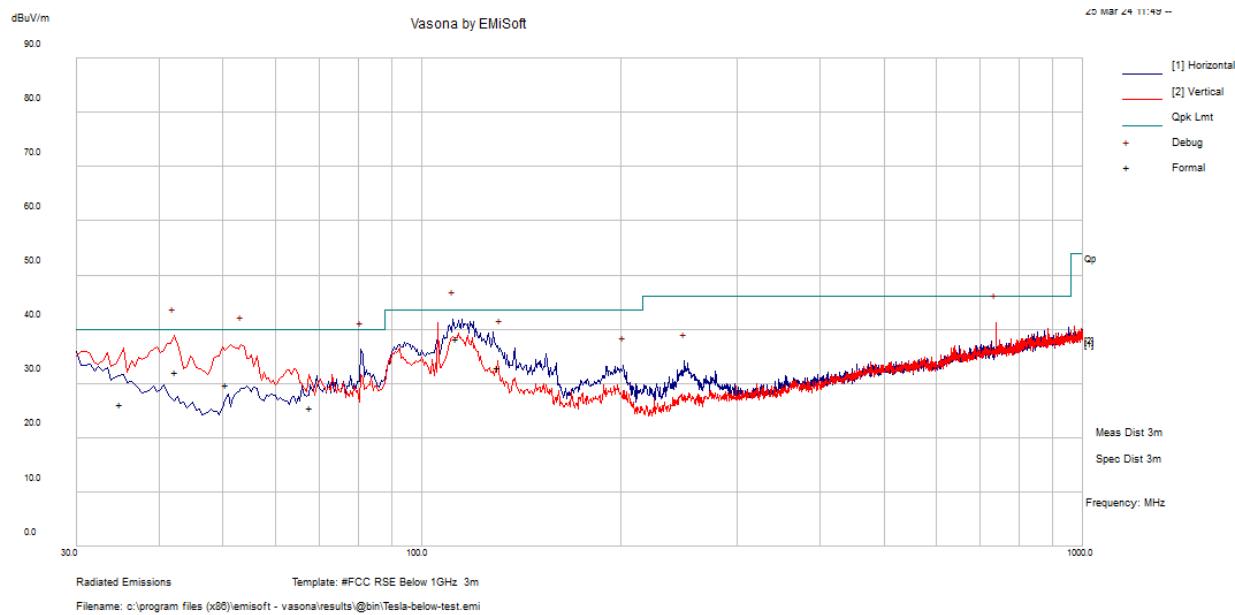

Freq. (MHz)	S.A. Reading (dB μ V)	Corr. Factor (dB/m)	Corrected Amp. (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)	Comment
42.13	48.02	-9.24	38.78	100	V	360	40.0	-1.22	Peak
111.48	49.79	-7.88	41.91	200	H	360	44	-1.59	Peak
53.28	51.31	-14.09	37.22	100	V	360	40	-2.78	Peak
80.93	50.17	-13.92	36.25	200	H	360	40.0	-3.75	Peak
738.59	39.07	2.17	41.24	100	V	360	46.0	-4.76	Peak
131.37	43.42	-6.90	36.52	200	H	360	43.5	-6.98	Peak

Note: Peak measurements are compared to the quasi-peak limit to show compliance.

6.9 Test Results above 960 MHz



Note: Measurements were performed at 3m distance.



Average Radiated Fundamental Field Strength



Channel Number	Channel Frequency (MHz)	Mode	PSA Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Pre Amp Gain (dB)	Corrected Field Strength (dB μ V/m at 3m)	EIRP (dBm) ¹	Limit (dBm)	Margin (dB)
5	6489.6	4	41.5	36.404	9.1838	36.6756	50.41	-44.89	-41.3	-3.59
		11	44.93	36.404	9.1838	36.6756	53.84	-41.46	-41.3	-0.16
6	6988.8	4	41.61	35.717	9.4925	36.7056	50.11	-45.19	-41.3	-3.89
		11	45.32	35.717	9.4925	36.7056	53.82	-41.48	-41.3	-0.18
9	7987.2	4	41.5	36.02	10.2093	36.4713	51.26	-44.04	-41.3	-2.74
		11	44.12	36.02	10.2093	36.4713	53.88	-41.42	-41.3	-0.12

Note¹: EIRP [dBm] = Field Strength [dB μ V/m at 3 meters] – 95.3.

Please refer to the following plots.

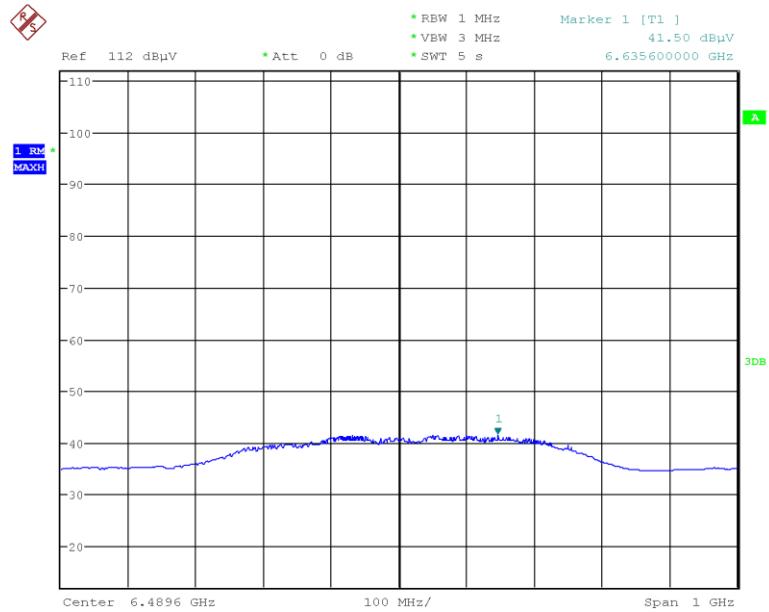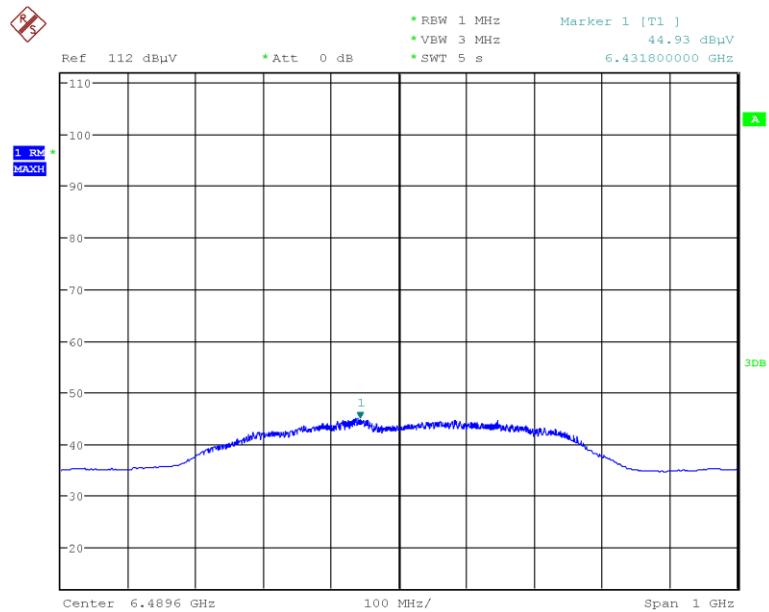Channel 5 (6489.6 MHz), Fundamental Average Measurements**Mode 4****Mode 11**

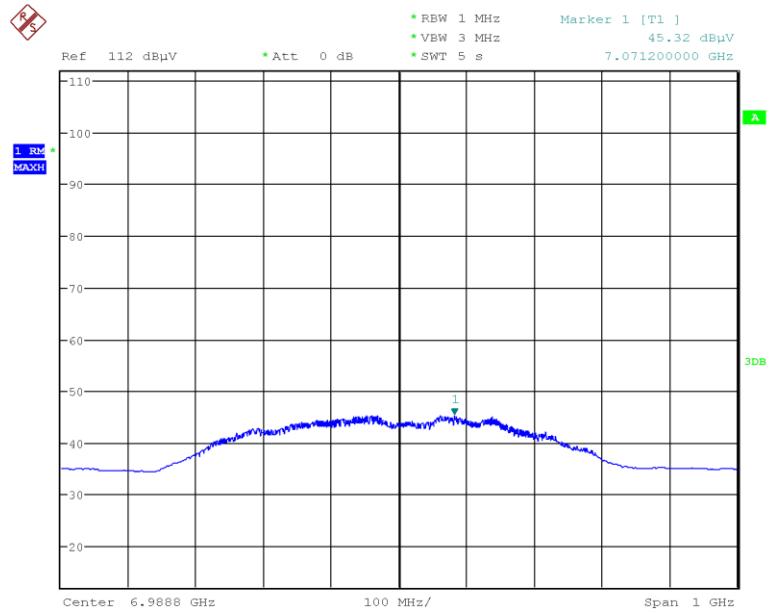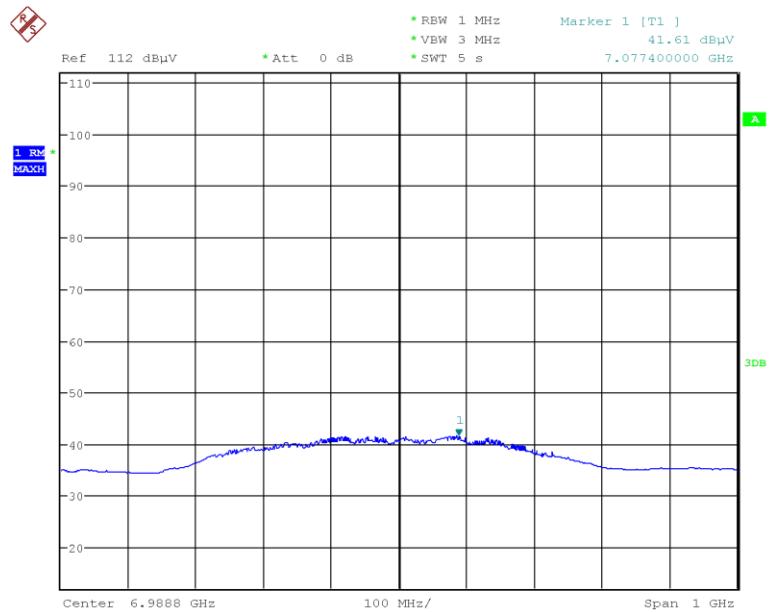Channel 6 (6988.8MHz), Fundamental Average Measurements**Mode 4****Mode 11**

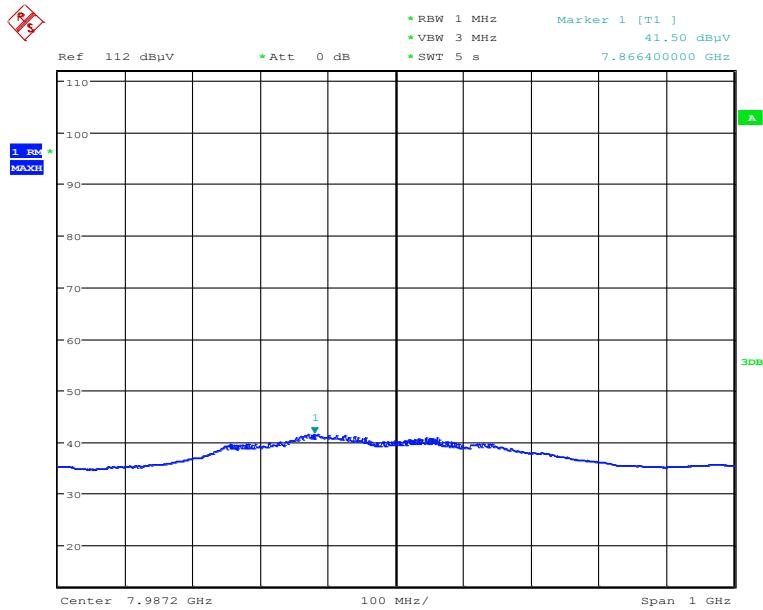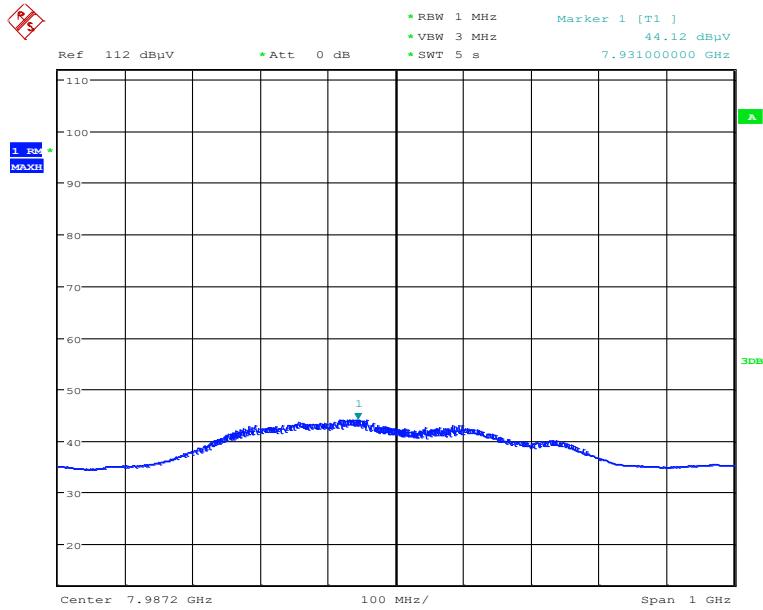Channel 9 (7987.2MHz), Fundamental Average Measurements**Mode 4****Mode 11**

Average Radiated Spurious Emissions: 960 MHz-26.5 GHz

Note: Measurement was performed at 1m distance. The stricter IC limit was used to demonstrate compliance.

Note: In radiated measurement screenshots from 960MHz to 26.5GHz, shown emissions account for equipment factors to show corrected values compared to applicable limits.

Note: Worst case polarization was used during testing.

Note: According to ANSI C63.10 Section 10.3.9, measured field strength in dB μ V/m was converted to EIRP in dBm to compare with the limit. The equation below was used,

$$\text{EIRP (dBm)} = \text{E (dB}\mu\text{V/m @3m)} - 95.3$$

Note: Distance correction factor was calculated which is added to the field strength at 1 meter to field strength at 3 meters.

$$\text{Distance Correction Factor} = 20 \times \log(1\text{m} / 3\text{m}) = -9.54 \text{ dB}$$


$$\text{Field Strength(@3m)} = \text{Field Strength(@ 1m)} + \text{Distance Correction Factor}$$

Mode 4: Channel 5 (6489.6 MHz)


Measured Emission Frequency (GHz)	Antenna Pol (H/V)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
25.0397	V	35.88	26.34	-68.96	-61.3	-7.66

Please refer to the following plots.

1 GHz-18 GHz

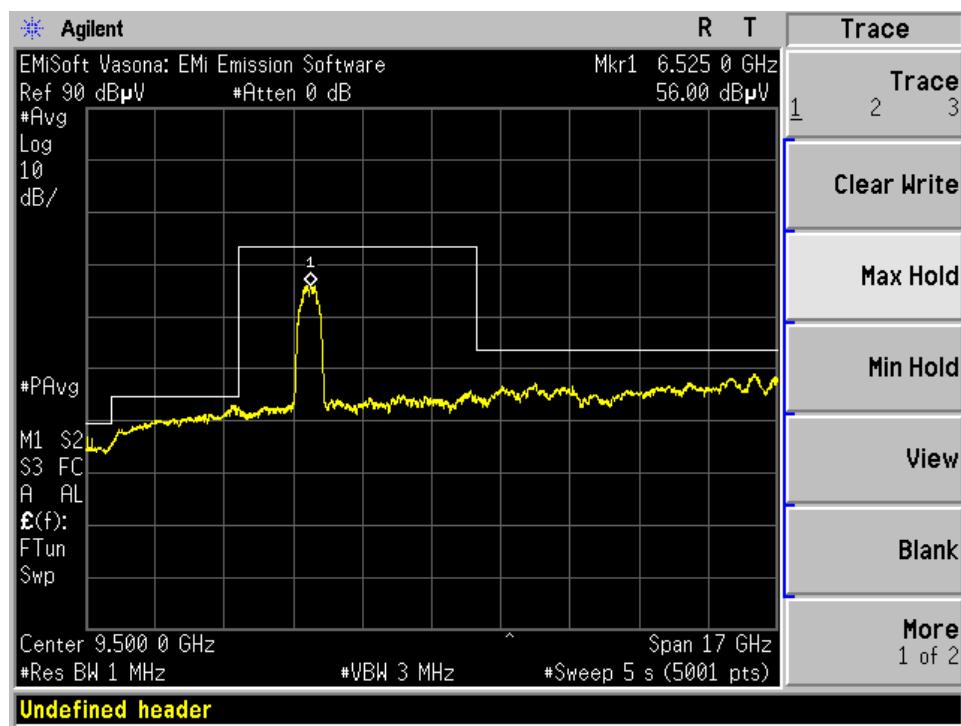


18 GHz-26.5 GHz

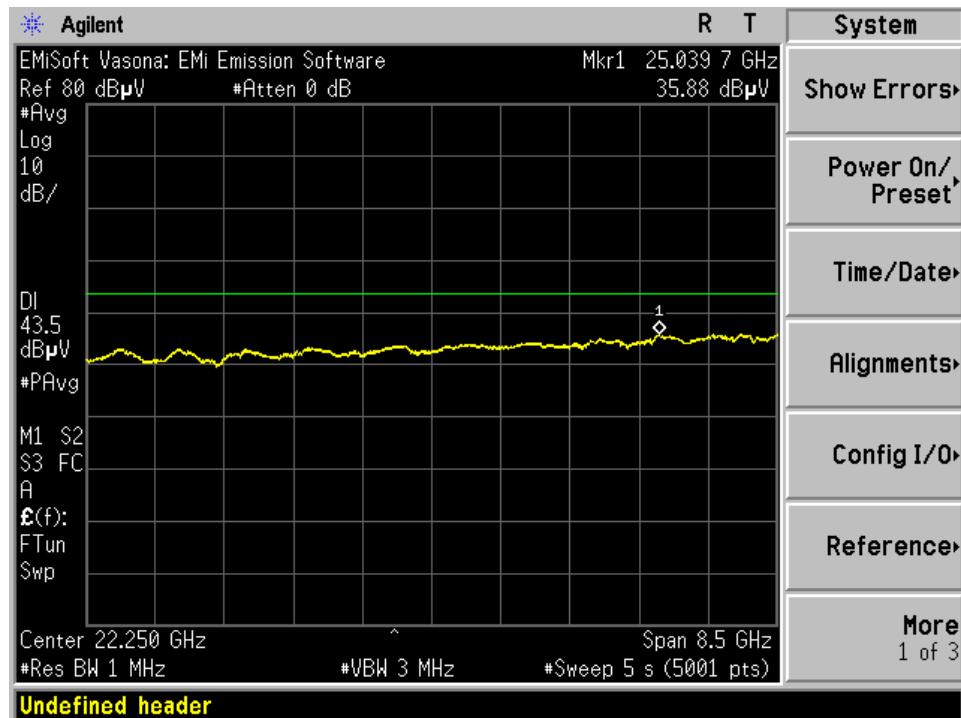


Mode 4: Channel 6 (6988.8 MHz)

Measured Emission Frequency (GHz)	Antenna Pol (H/V)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
26.0478	V	35.83	26.29	-69.01	-61.3	-7.71

1 GHz-18 GHz

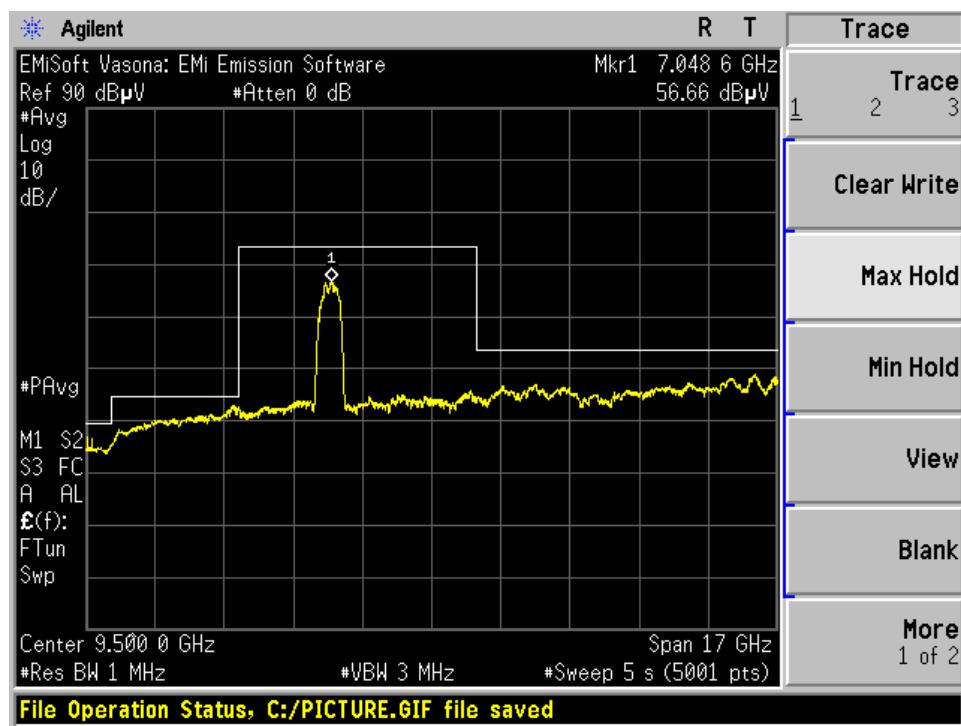

18 GHz-26.5 GHz

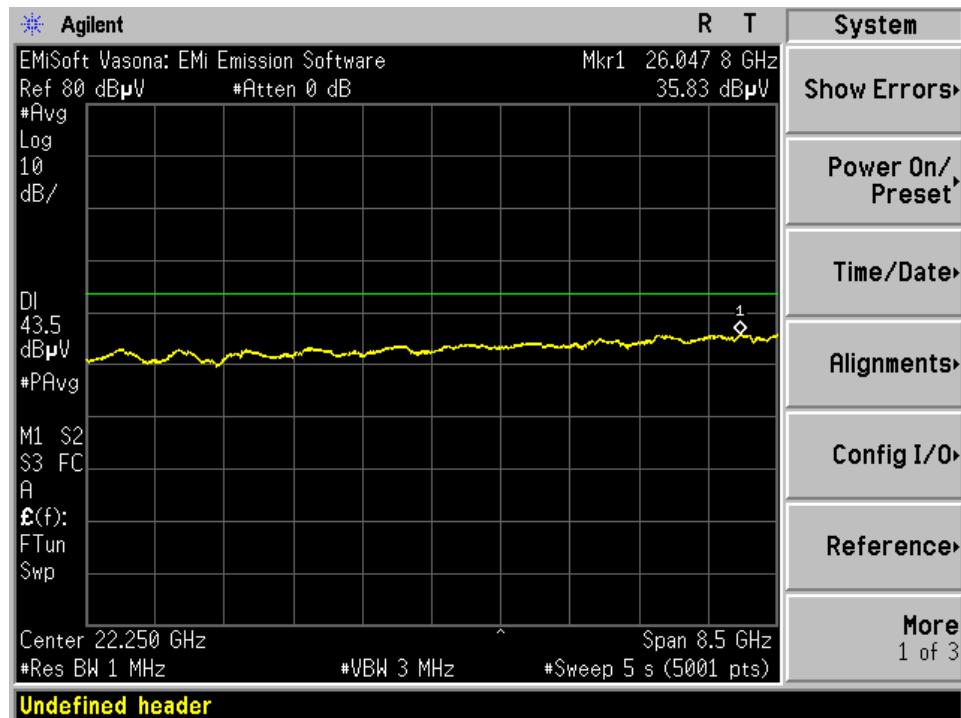


Mode 4: Channel 9 (7987.2 MHz)


Measured Emission Frequency (GHz)	Antenna Pol (H/V)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
26.0291	V	35.86	26.32	-68.98	-61.3	-7.68

Please refer to the following plots.

1 GHz-18 GHz

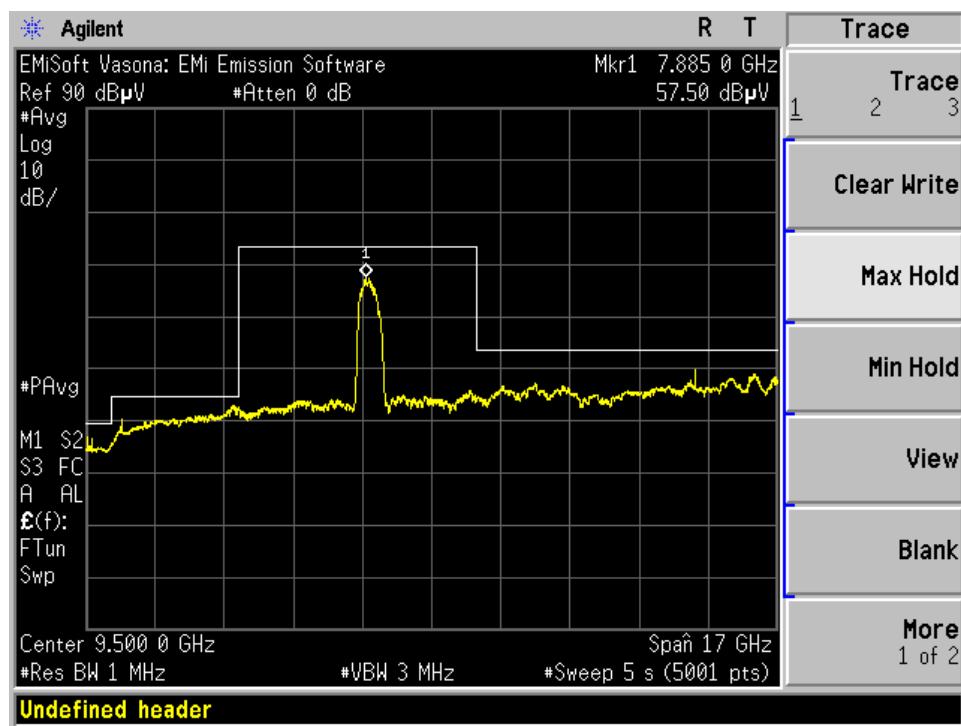

18 GHz-26.5 GHz

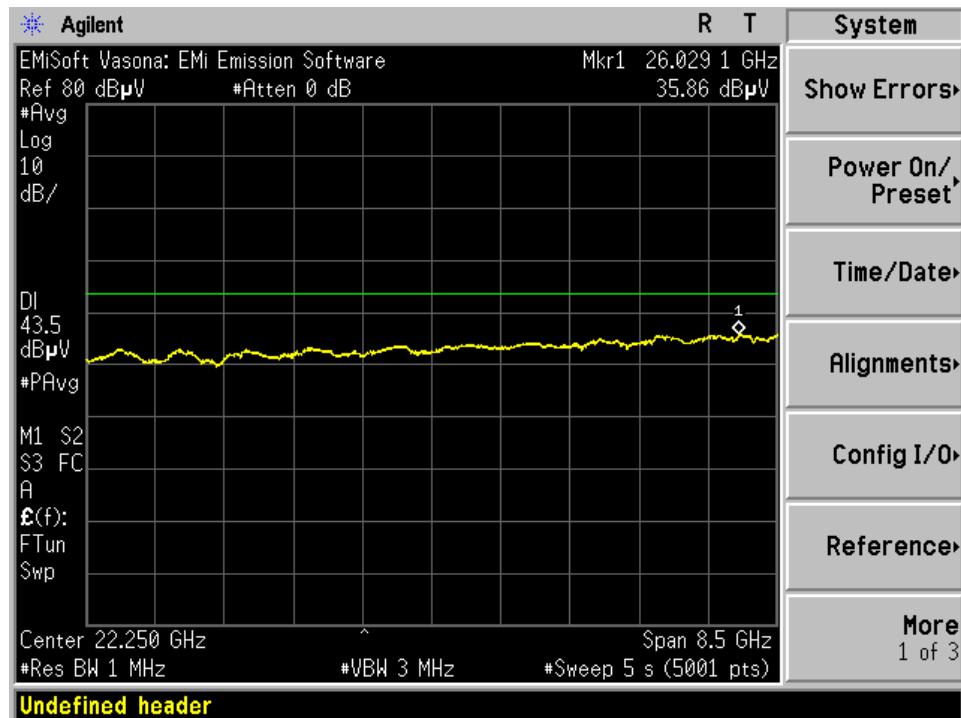


Mode 11: Channel 5 (6489.6 MHz)


Measured Emission Frequency (GHz)	Antenna Pol (H/V)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
26.041	V	35.9	26.36	-68.94	-61.3	-7.64

Please refer to the following plots.

1 GHz-18 GHz

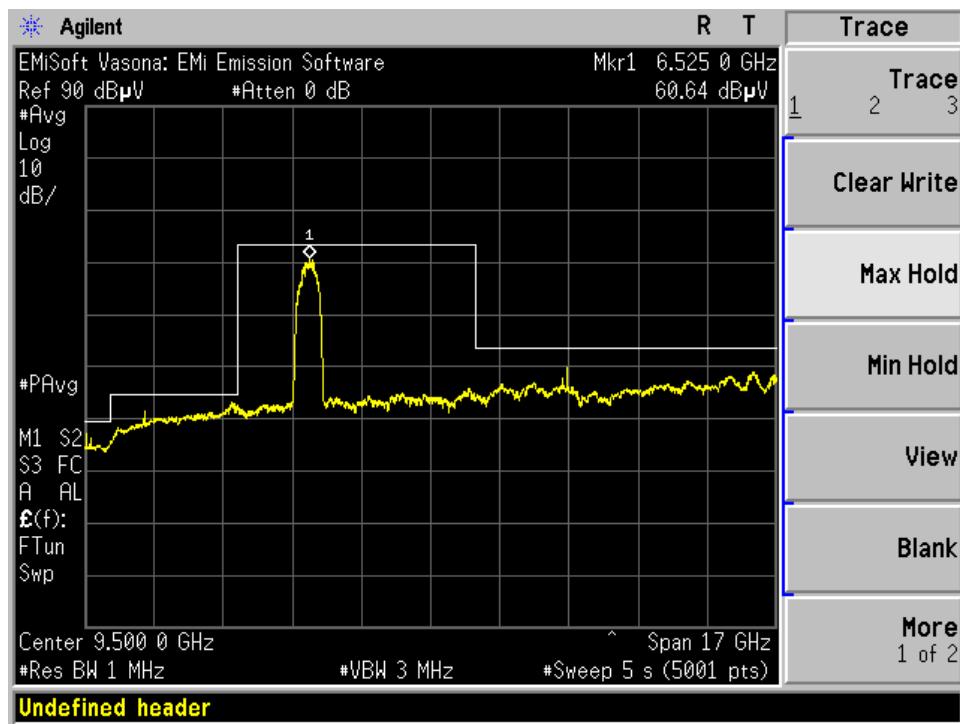

18 GHz-26.5 GHz

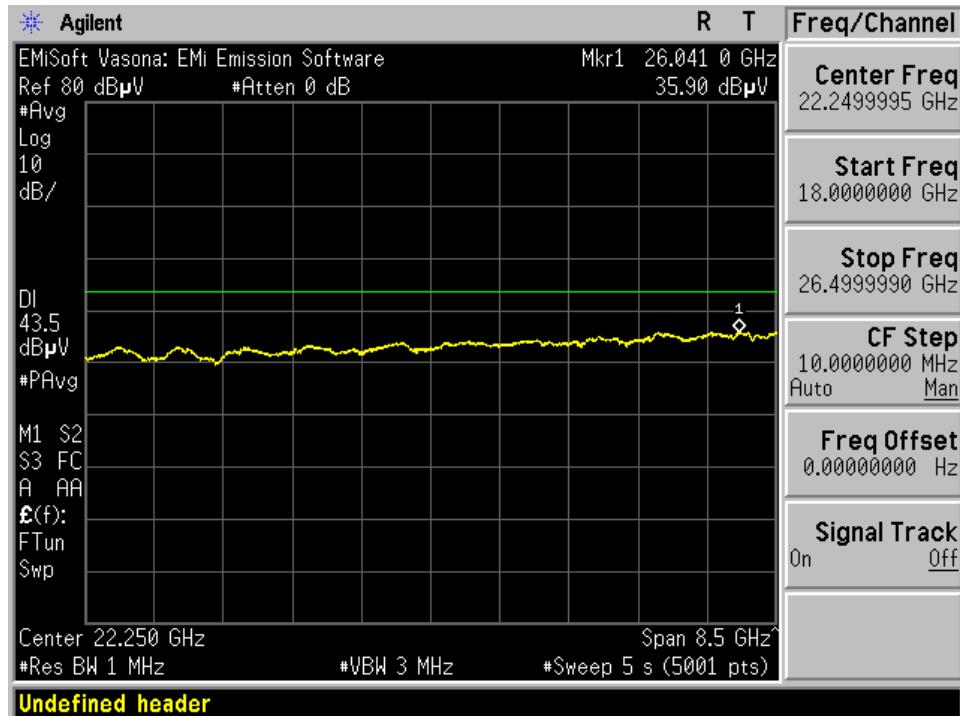


Mode 11: Channel 6 (6988.8 MHz)


Measured Emission Frequency (GHz)	Antenna Pol (H/V)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
26.0529	V	35.91	26.37	-68.93	-61.3	-7.63

Please refer to the following plots.

1 GHz-18 GHz

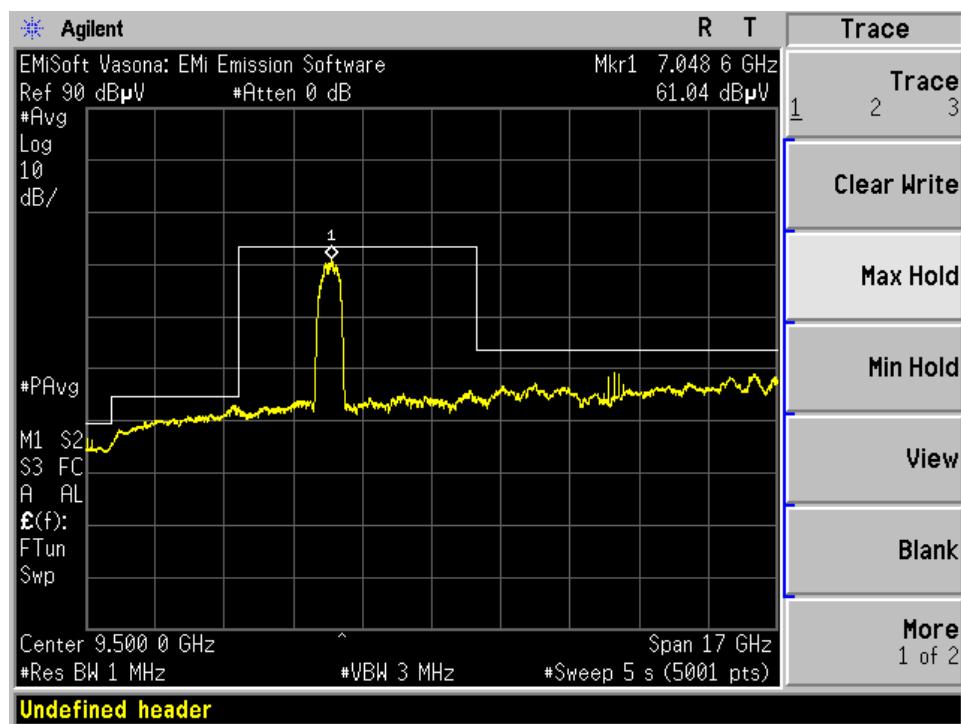

18 GHz-26.5 GHz

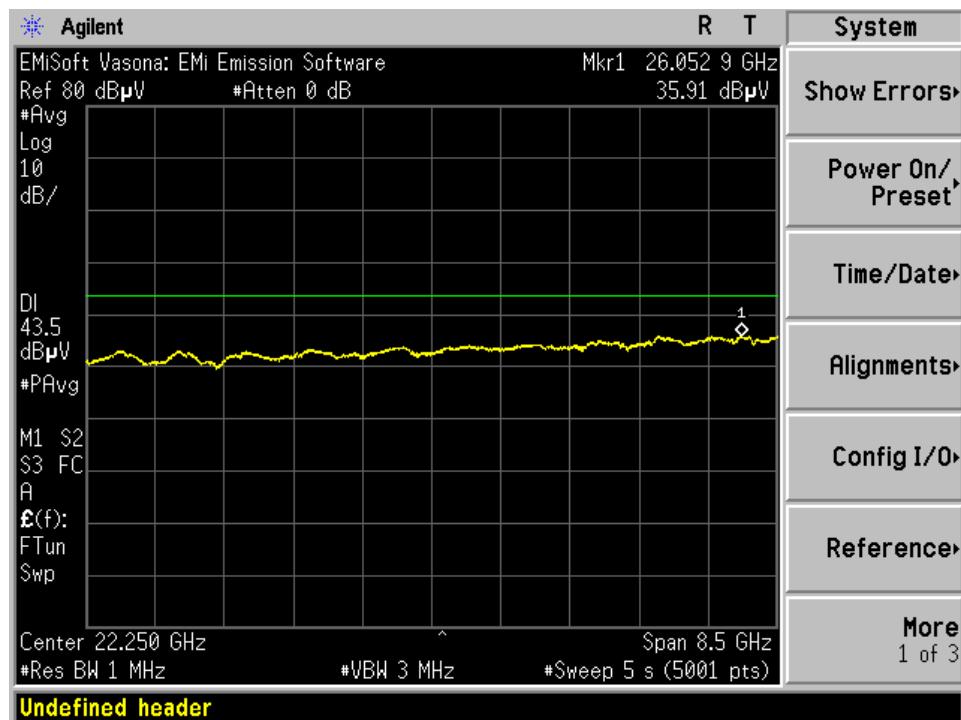


Mode 11: Channel 9 (7987.2 MHz)


Measured Emission Frequency (GHz)	Antenna Pol (H/V)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
26.0512	V	35.86	26.32	-68.98	-61.3	-7.68

Please refer to the following plots.

1 GHz-18 GHz

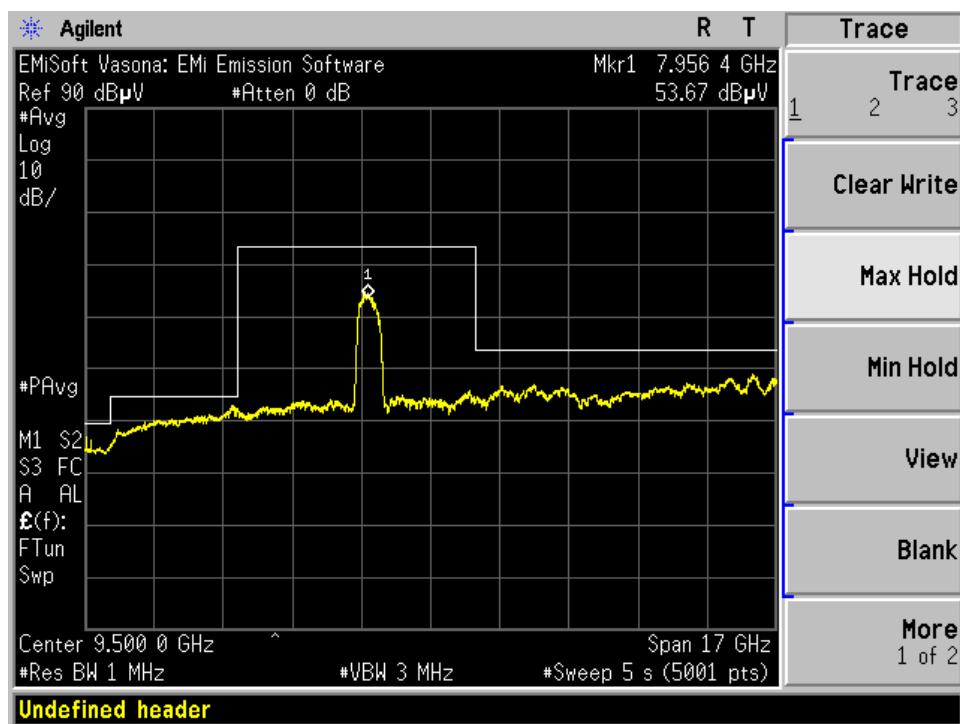

18 GHz-26.5 GHz

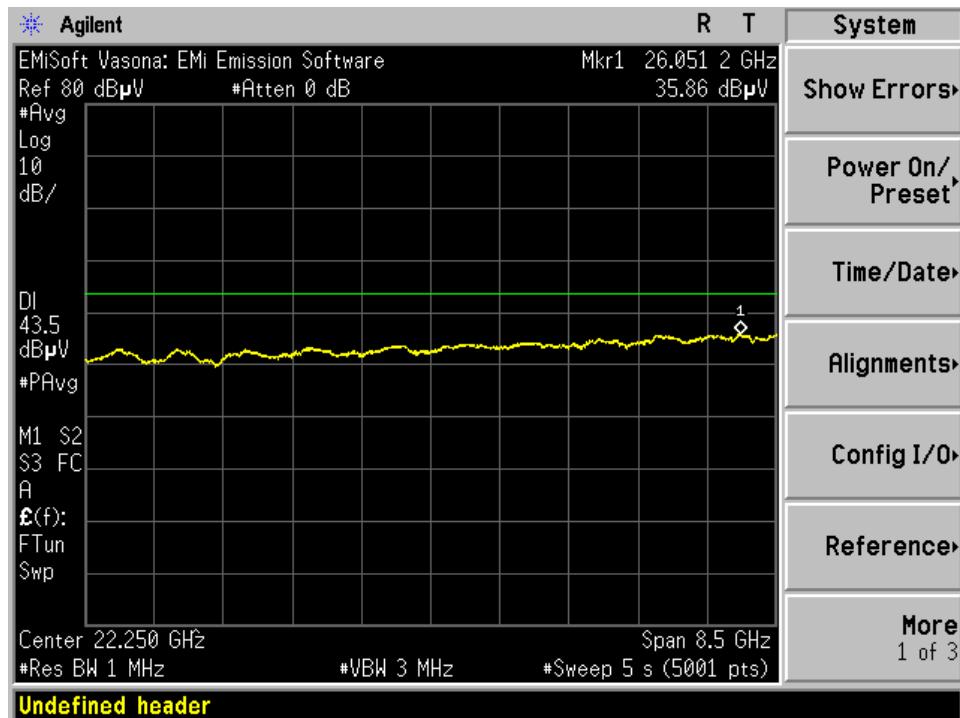

Average Radiated Spurious Emissions: 26.5-40 GHz

Note: Measurement was performed at 1m distance. The stricter IC limit was used to demonstrate compliance.

Note: Worst case polarization was used during testing.

Note: In radiated measurement screenshots from 26.5GHz to 40GHz, shown emissions do not account for equipment factors. In this case, highest emission was chosen and corrected value was calculated given equipment factors in order to compare to limit.

Note: According to ANSI C63.10 Section 10.3.9, measured field strength in $\text{dB}\mu\text{V}/\text{m}$ was converted to EIRP in dBm to compare with the limit. The equation below was used,

$$\text{EIRP (dBm)} = \text{E} (\text{dB}\mu\text{V}/\text{m} @ 3\text{m}) - 95.3$$

Note: Distance correction factor was calculated which is added to the field strength at 1 meter to field strength at 3 meters.


$$\text{Distance Correction Factor} = 20 \times \log(1\text{m} / 3\text{m}) = -9.54 \text{ dB}$$

$$\text{Field Strength (@3m)} = \text{Field Strength (@1m)} + \text{Distance Correction Factor}$$

Mode 4: Channel 5 (6489.6 MHz)

Measured Emission Frequency (GHz)	PSA Reading ($\text{dB}\mu\text{V}$)	Antenna Pol (H/V)	Antenna Factor (dB)	Cable Loss (dB)	Pre Amp Gain (dB)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$ at 1m)	Corrected Average Field Strength ($\text{dB}\mu\text{V}/\text{m}$ at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
36.9774	V	30.01	39.53	8.614	35.318	42.836	33.294	- 62.006	-61.3	-0.706

26.5-40 GHz

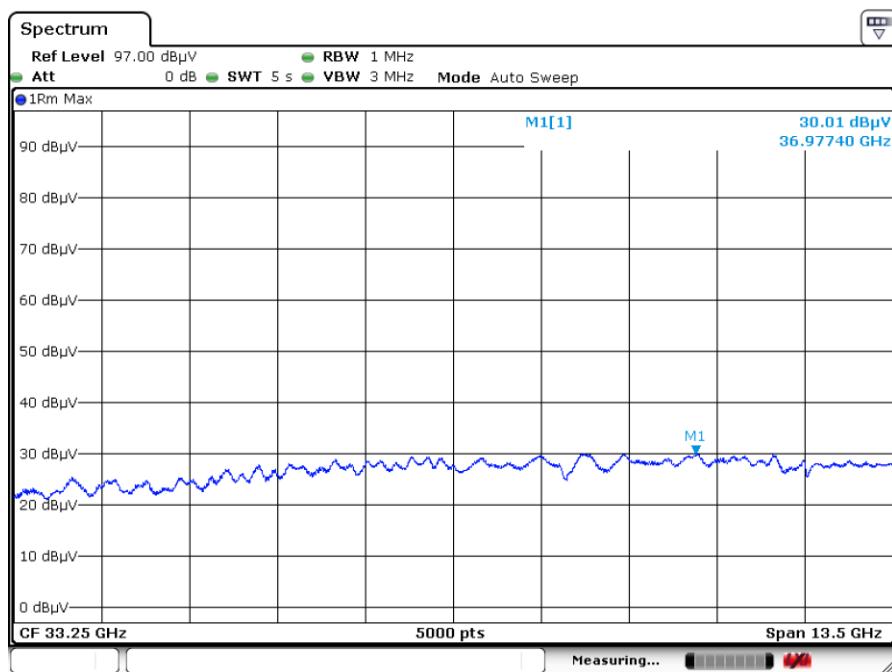


Date: 27.MAR.2024 18:42:23

Mode 4: Channel 6 (6988.8 MHz)

Measured Emission Frequency (GHz)	PSA Reading (dB μ V)	Antenna Pol (H/V)	Antenna Factor (dB)	Cable Loss (dB)	Pre Amp Gain (dB)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
35.2629	V	29.88	39.05	8.350	38.038	39.242	29.699	-65.601	-61.3	-4.301

26.5-40 GHz

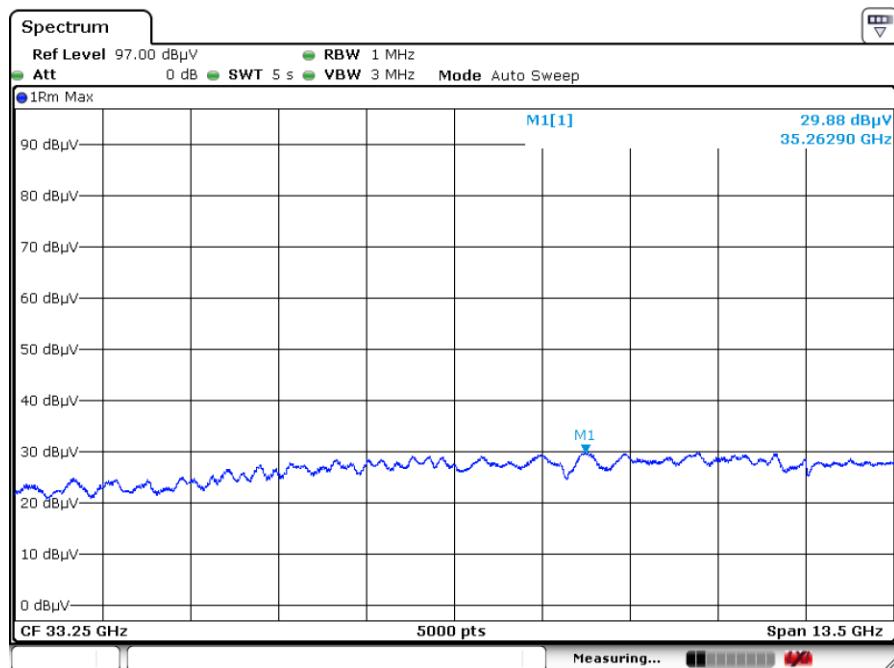


Date: 27.MAR.2024 18:49:04

Mode 4: Channel 9 (7987.2 MHz)

Measured Emission Frequency (GHz)	PSA Reading (dB μ V)	Antenna Pol (H/V)	Antenna Factor (dB)	Cable Loss (dB)	Pre Amp Gain (dB)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
36.9801	V	29.66	39.53	8.614	35.318	42.486	32.944	-62.356	-61.3	-1.056

26.5-40 GHz

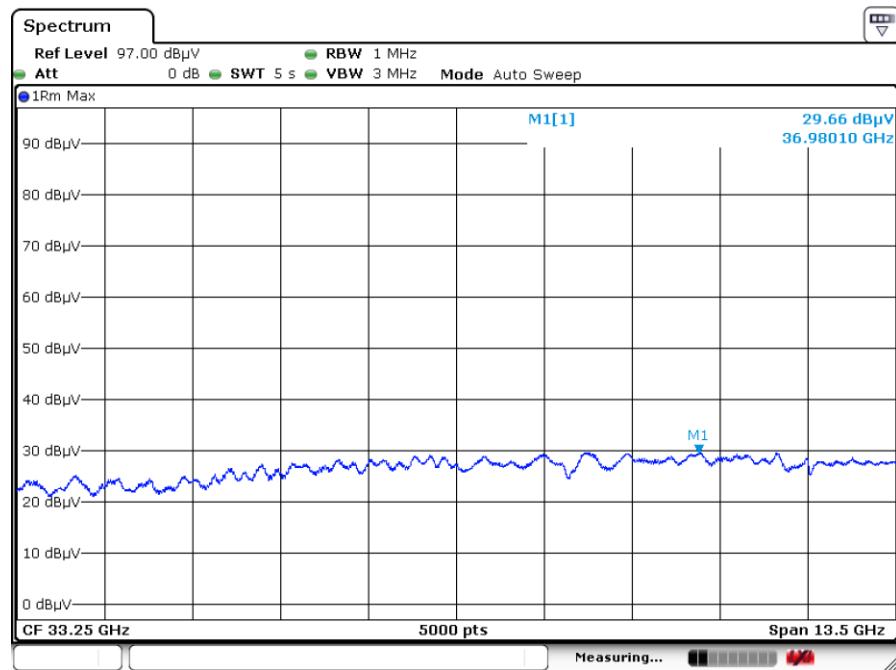


Date: 27.MAR.2024 18:51:49

Mode 11: Channel 5 (6489.6 MHz)

Measured Emission Frequency (GHz)	PSA Reading (dB μ V)	Antenna Pol (H/V)	Antenna Factor (dB)	Cable Loss (dB)	Pre Amp Gain (dB)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
35.2521	V	29.72	39.05	8.350	38.038	39.082	29.539	-65.761	-61.3	-4.461

26.5-40 GHz

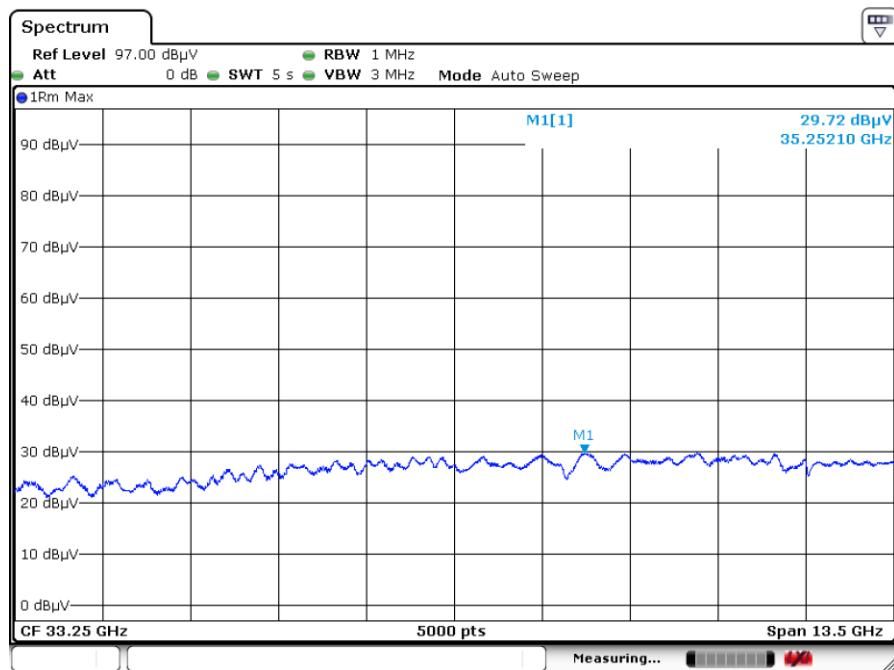


Date: 27.MAR.2024 18:56:48

Mode 11: Channel 6 (6988.8 MHz)

Measured Emission Frequency (GHz)	PSA Reading (dB μ V)	Antenna Pol (H/V)	Antenna Factor (dB)	Cable Loss (dB)	Pre Amp Gain (dB)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
36.9774	V	29.69	39.53	8.614	35.318	42.516	32.974	-62.326	-61.3	-1.026

26.5-40 GHz

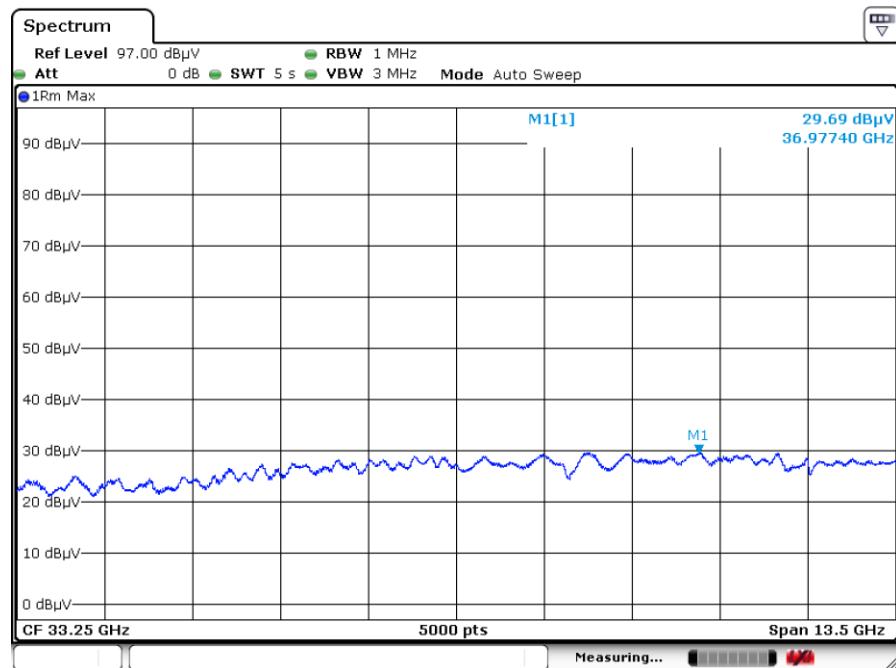


Date: 27.MAR.2024 18:58:07

Mode 11: Channel 9 (7987.2 MHz)

Measured Emission Frequency (GHz)	PSA Reading (dB μ V)	Antenna Pol (H/V)	Antenna Factor (dB)	Cable Loss (dB)	Pre Amp Gain (dB)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
35.2629	V	29.61	39.05	8.350	38.038	38.972	29.429	-65.871	-61.3	-4.571

26.5-40 GHz

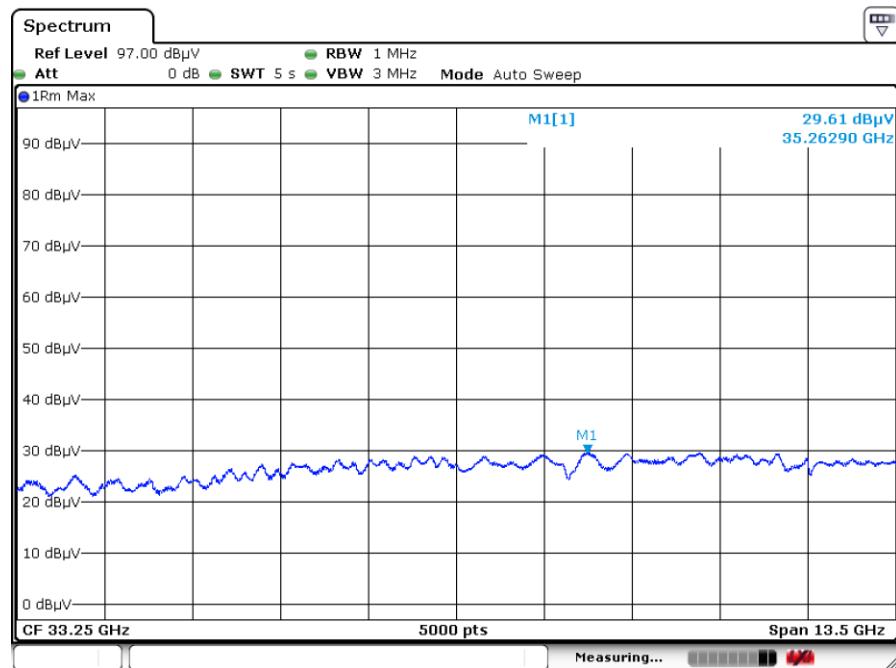

Date: 27.MAR.2024 19:00:53

Additional Radiated Average Spurious Emissions with RBW of 1 kHz

Note: In radiated measurement screenshots from 1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz, shown emissions account for equipment factors to show corrected values compared to applicable limits.

Note: Worst case polarization was used during testing.

Note: According to ANSI C63.10 Section 10.3.9, measured field strength in dB μ V/m was converted to EIRP in dBm to compare with the limit. The equation below was used,

$$\text{EIRP (dBm)} = \text{E (dB}\mu\text{V/m @ 3m)} - 95.3$$

Note: Distance correction factor was calculated which is added to the field strength at 1 meter to field strength at 3 meters.


$$\text{Distance Correction Factor} = 20 \times \log(1\text{m} / 3\text{m}) = -9.54 \text{ dB}$$

$$\text{Field Strength (@3m)} = \text{Field Strength (@1m)} + \text{Distance Correction Factor}$$


Channel	Frequency Range (MHz)	Antenna Pol. (H/V)	Highest Emission Frequency (MHz)	Highest Emission (dB μ V/m at 1 meter)	Corrected Value (dB μ V/m at 3 meters)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Mode 4								
5	1164-1240	V	1180.0056	16.91	7.37	-87.93	-85.3	-2.63
	1559-1610	V	1584.0002	13.22	3.68	-91.62	-85.3	-6.32
6	1164-1240	V	1229.9984	18.04	8.50	-86.80	-85.3	-1.50
	1559-1610	V	1584.0002	13.73	4.19	-91.11	-85.3	-5.81
9	1164-1240	V	1229.9984	17.86	8.32	-86.98	-85.3	-1.68
	1559-1610	V	1584.0002	13.81	4.27	-91.03	-85.3	-5.73
Mode 11								
5	1164-1240	V	1229.9984	18.51	8.97	-86.33	-85.3	-1.03
	1559-1610	V	1584.0002	13.03	3.49	-91.81	-85.3	-6.51
6	1164-1240	V	1229.9984	17.29	7.75	-87.55	-85.3	-2.25
	1559-1610	V	1583.99	14.68	5.14	-90.16	-85.3	-4.86
9	1164-1240	V	1229.9984	17.95	8.41	-86.89	-85.3	-1.59
	1559-1610	V	1584.0002	13.59	4.05	-91.25	-85.3	-5.95

Mode 4: Channel 5

1164 MHz-1240 MHz

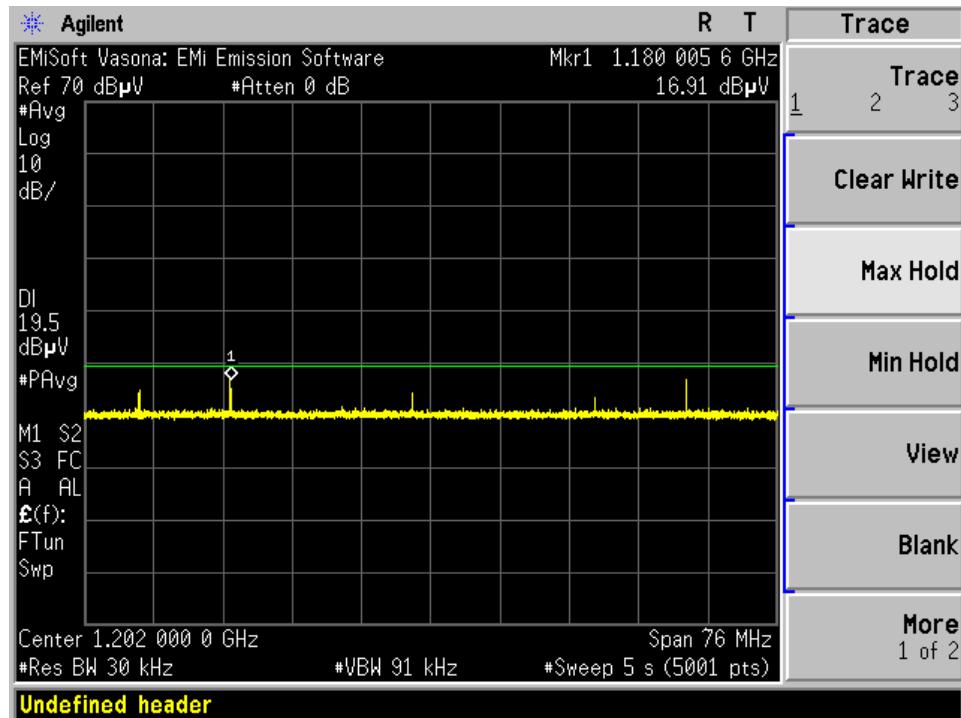


1559 MHz-1610 MHz

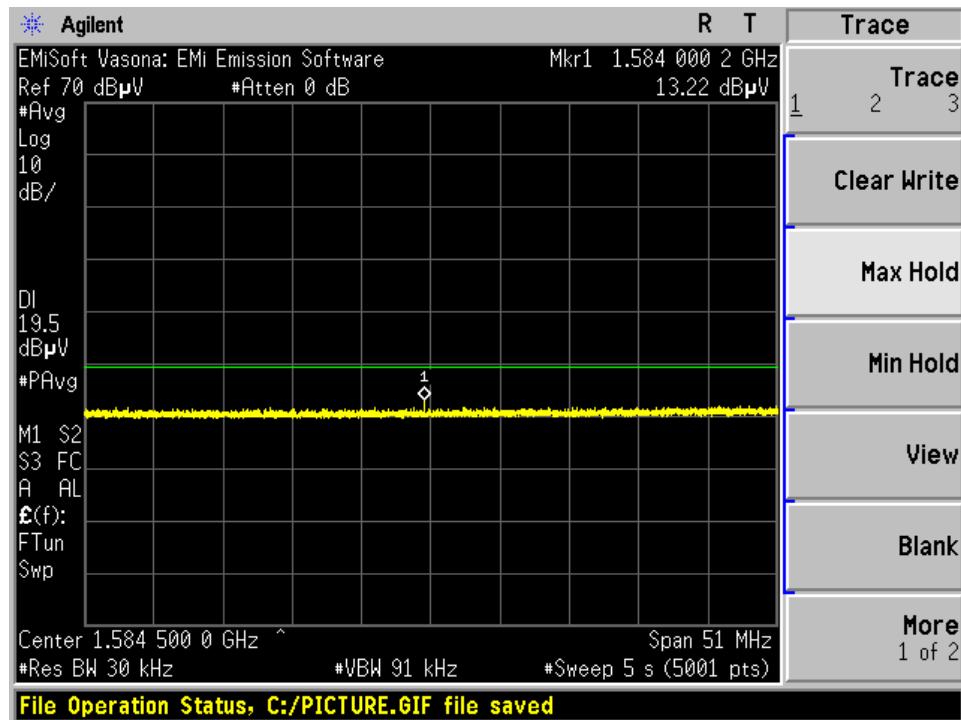


Mode 4: Channel 6

1164 MHz-1240 MHz

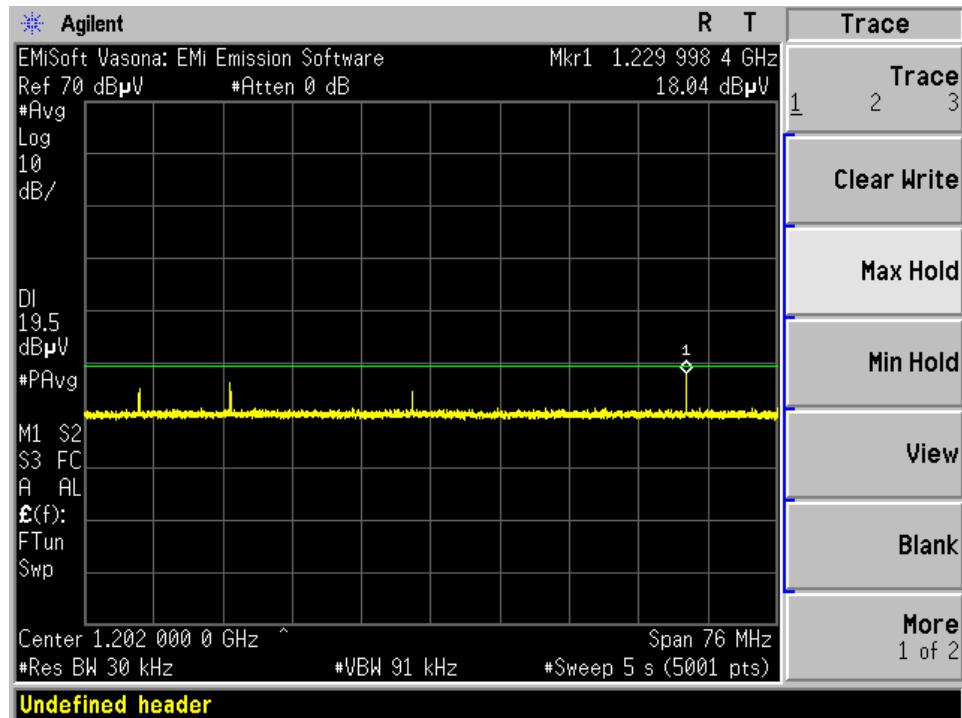


1559 MHz-1610 MHz

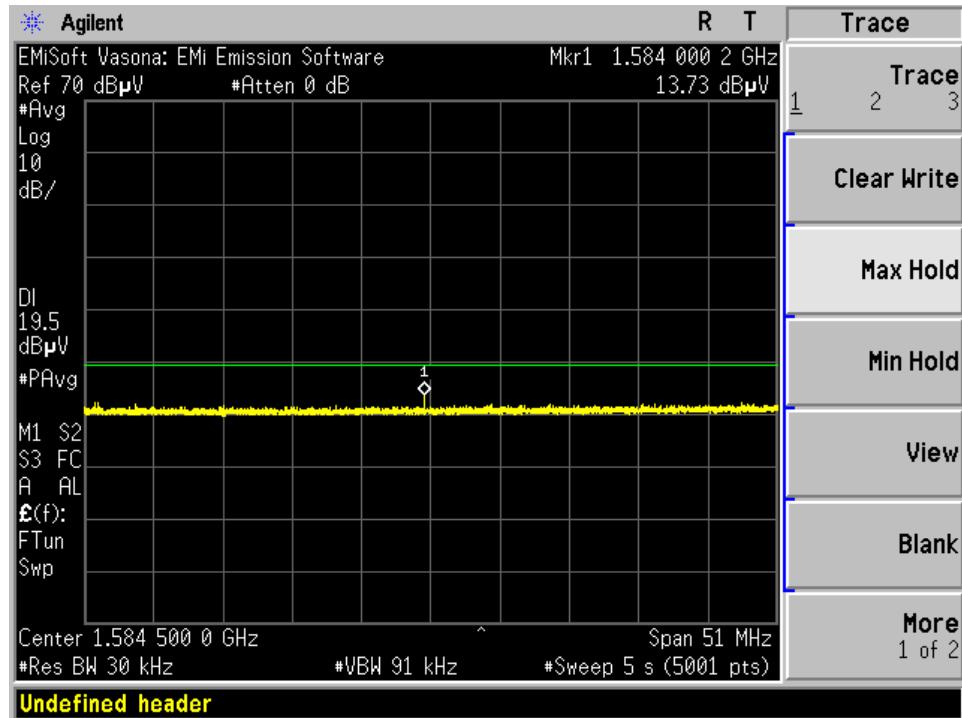


Mode 4: Channel 9

1164 MHz-1240 MHz

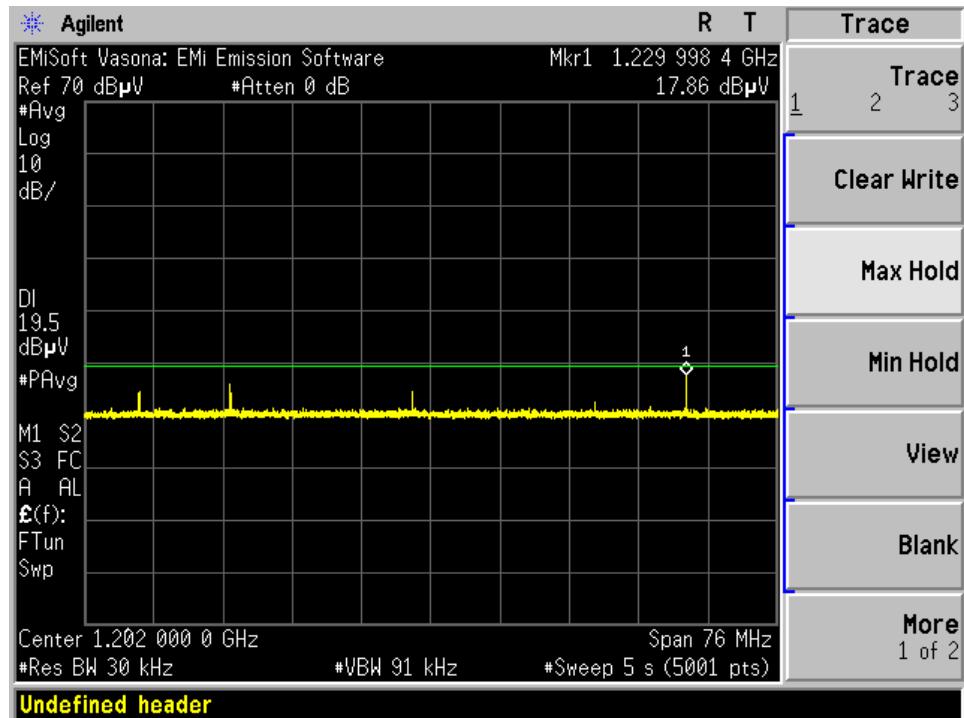


1559 MHz-1610 MHz

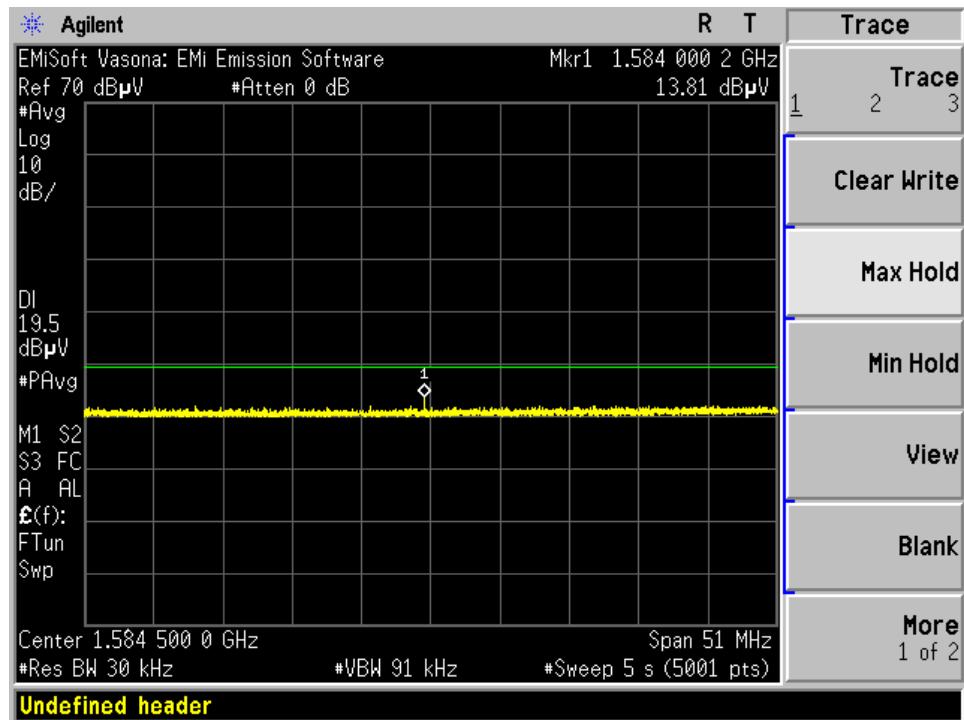


Mode 11: Channel 5

1164 MHz-1240 MHz

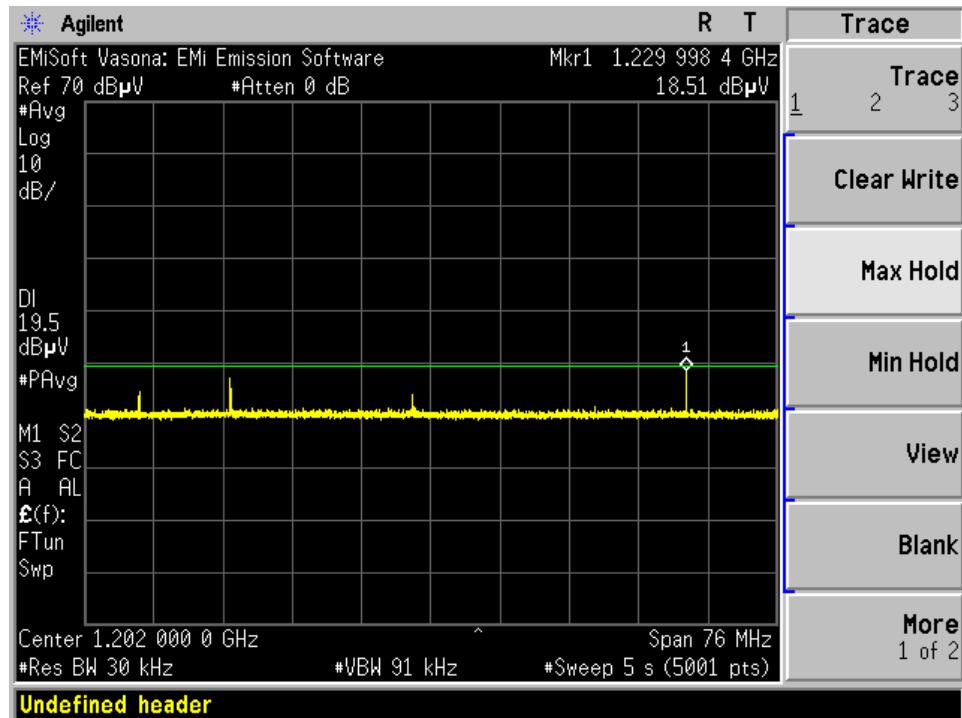


1559 MHz-1610 MHz

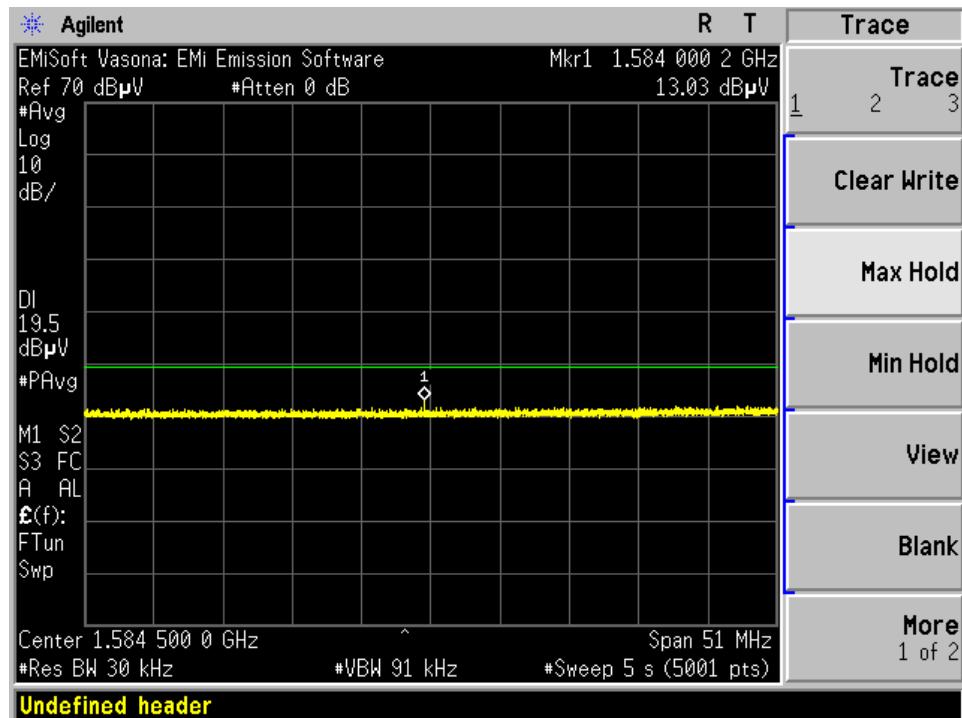


Mode 11: Channel 6

1164 MHz-1240 MHz

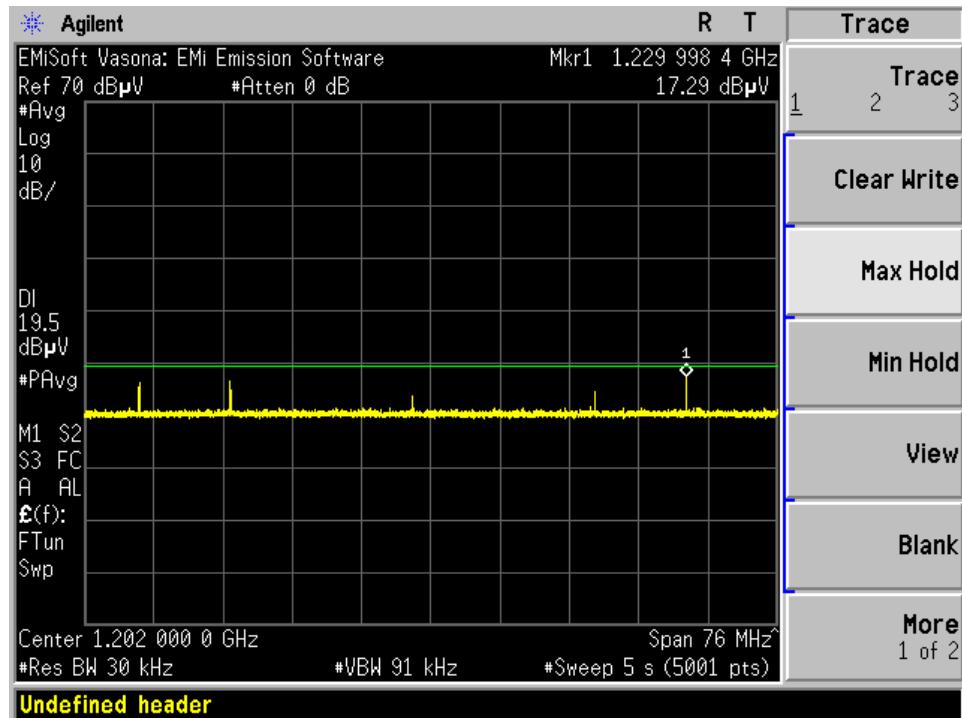


1559 MHz-1610 MHz

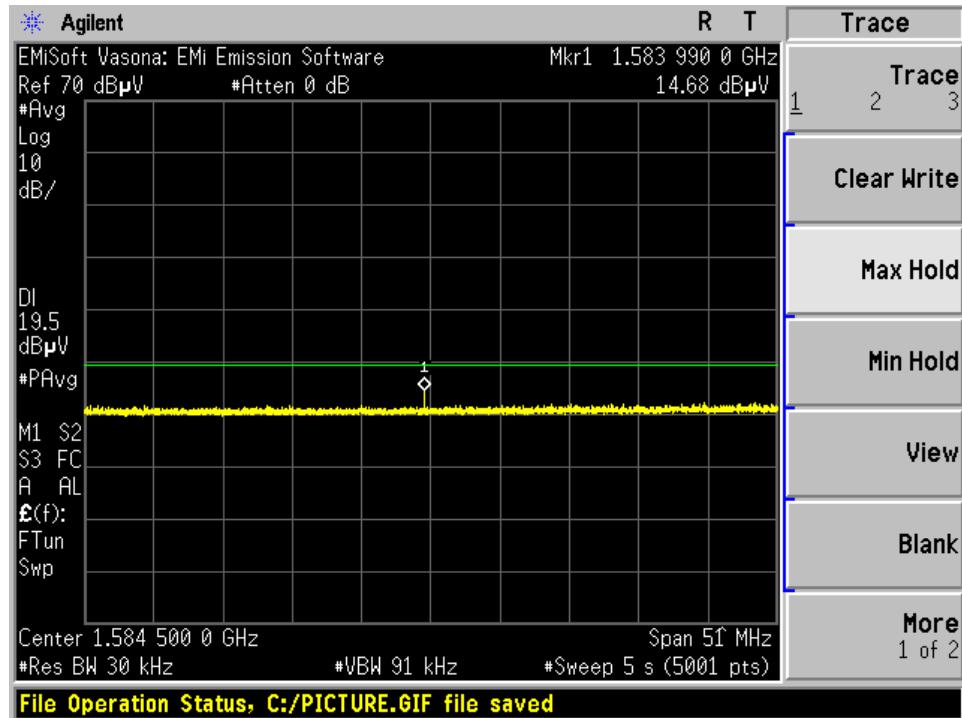


Mode 11: Channel 9

1164 MHz-1240 MHz

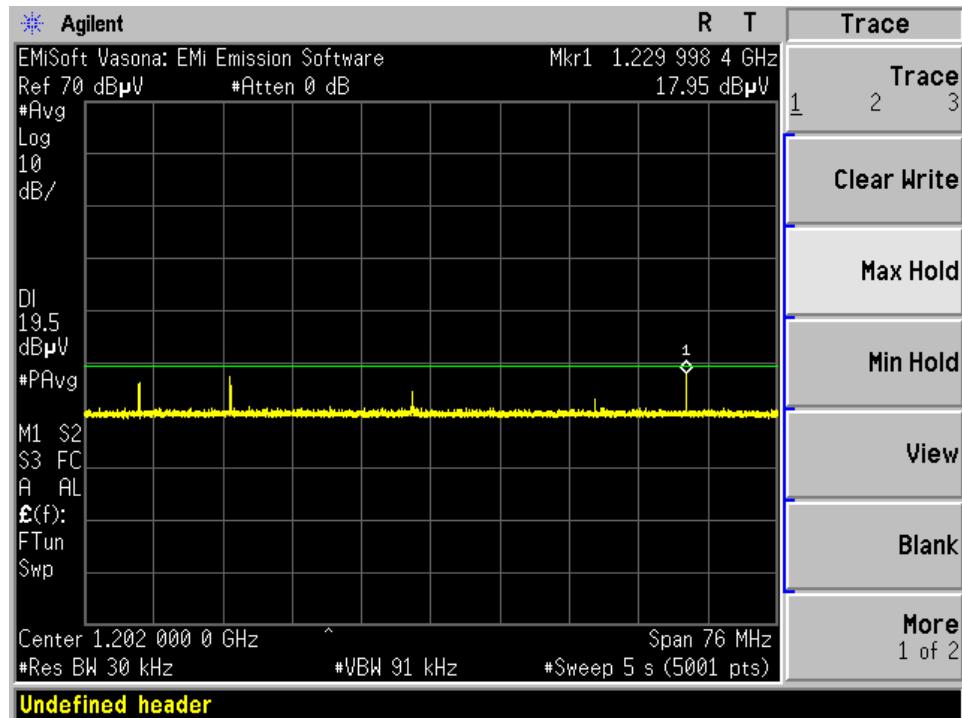

1559 MHz-1610 MHz

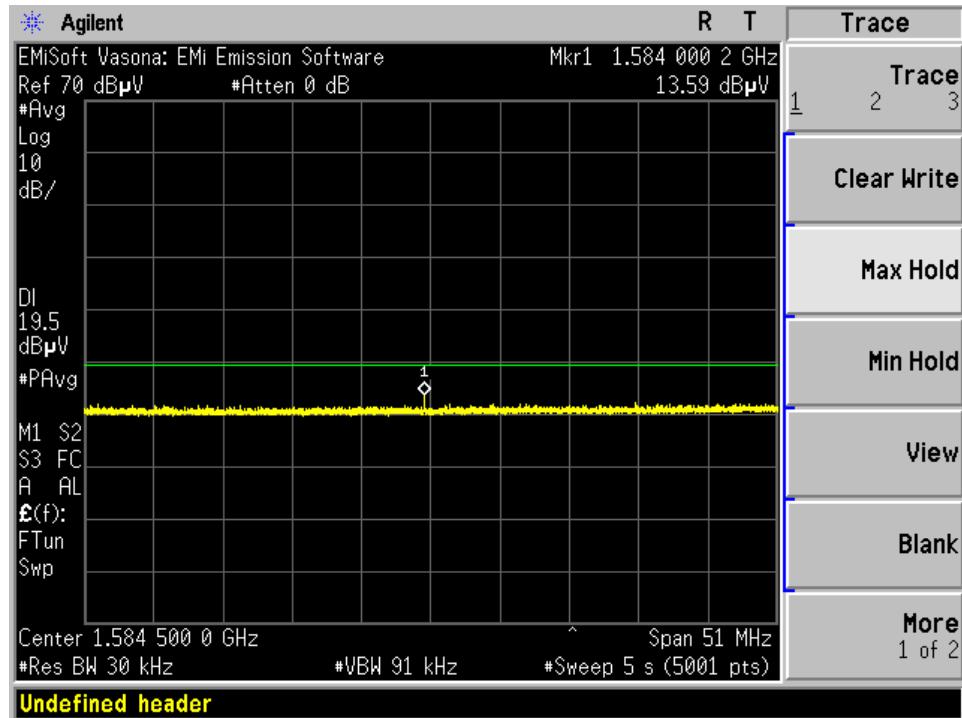

7 FCC §15.519(e), §15.521(e) & ISEDC RSS-220 §5.3.1(g) - Peak Fundamental Emission

7.1 Applicable Standards

According to FCC §15.519(e): There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

According to FCC §15.521(e): The frequency at which the highest radiated emission occurs, f_M , must be contained within the UWB bandwidth.

According to ISEDC RSS-220 §5.3.1(g): The peak level of the transmissions shall not exceed the peak equivalent of the average limit contained within any 50 MHz bandwidth, as defined in section 4 of the Annex

According to ISEDC RSS-220 Annex 4(c): Peak measurements shall be made in addition to average measurements. Transmissions shall not exceed 0 dBm e.i.r.p. in any 50 MHz bandwidth when the average limit is -41.3 dBm/MHz.

According to FCC §15.521(g): When a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in this subpart. This resolution bandwidth shall not be lower than 1 MHz or greater than 50 MHz, and the measurement shall be centered on the frequency at which the highest radiated emission occurs, f_M . If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be $20 \log (RBW/50) \text{ dBm}$ where RBW is the resolution bandwidth in megahertz that is employed. This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.3$. If RBW is greater than 3 MHz, the application for certification filed with the Commission must contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing.


7.2 Measurement Procedure

The measurements were based on ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices section 10.3: Radiated measurement procedure above 960MHz.

7.3 Test Setup Block Diagram

Above 1GHz:

At 3 meters:

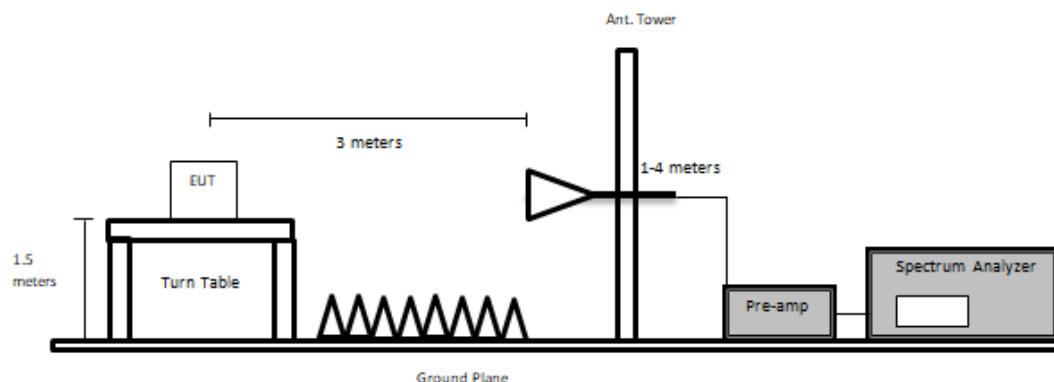

7.4 Test Equipment List and Details

Asset #	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
655	Rohde & Schwarz	Spectrum Analyzer	FSQ26	200749	2023-06-06	1 year
658	HP/ Agilent	Preamplifier	8449B OPT HO2	3008A011 03	2023-12-01	6 months
1192	ETS Lindgren	Horn Antenna	3117	00218973	2022-09-29	2 years
1247	Uti flex	Micro - Coax	-	-	2023-12-01	6 months
1295	Carlisle	10m Ultra Low Loss Coaxial Cable	UFB142A-1-3937-200200	64639890 912-001	2023-10-31	6 months
327	Sunol Sciences	System Controller	SC110V	122303-1	NR	NR
1075	Sunol Sciences	Boresight Tower	TLT3	050119-7	NR	NR
1388	Sunol Sciences	Flush Mount Turntable	FM	112005-2	NR	NR

Note¹: cables included in the test set-up will be checked each time before testing.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

7.5 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Arturo Reyes from 2024-03-08 to 2024-03-14 in 5 meter chamber 3.

7.6 Test Results

Measurements were taken at 3 meters.



Channel Number	Channel Frequency (MHz)	Mode	PSA Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Pre Amp Gain (dB)	Corrected Field Strength (dB μ V/m at 3m)	Limit ¹ (dB μ V/m at 3m)	Margin (dB)
5	6489.6	4	78.24	36.404	9.1838	36.676	87.152	87.34	-0.188
		11	73.75	36.404	9.1838	36.676	82.662	87.34	-4.678
6	6988.8	4	78.51	35.717	9.4925	36.706	87.014	87.34	-0.326
		11	74.19	35.717	9.4925	36.706	82.694	87.34	-4.646
9	7987.2	4	77.39	36.02	10.2093	36.471	87.148	87.34	-0.192
		11	72.96	36.02	10.2093	36.471	82.718	87.34	-4.622



Note¹: Radiated Peak limit determined using a 20 MHz measurement BW. (i.e. $20 * \log(20/50) = -7.96$ dB), then adding 95.3 dB for field strength at 3 meters as instructed to in FCC §15.521(g)



Channel Number	Channel Frequency (MHz)	Mode	f _M (MHz)	Range of UWB BW ² (MHz)	Result
5	6489.6	4	6492.2	6204.6 – 6783.6	Pass
		11	6426.6	6215.6 – 6775.6	Pass
6	6988.8	4	6990	6698.8 – 7258.8	Pass
		11	7051.2	6696.8 – 7265.8	Pass
9	7987.2	4	7867.2	7691.2 – 8254.2	Pass
		11	7926.2	7686.2 – 8254.2	Pass

Note²: please refer to Section 8.6 of this report for the UWB bandwidth measurement result.

Please refer to the following plots.

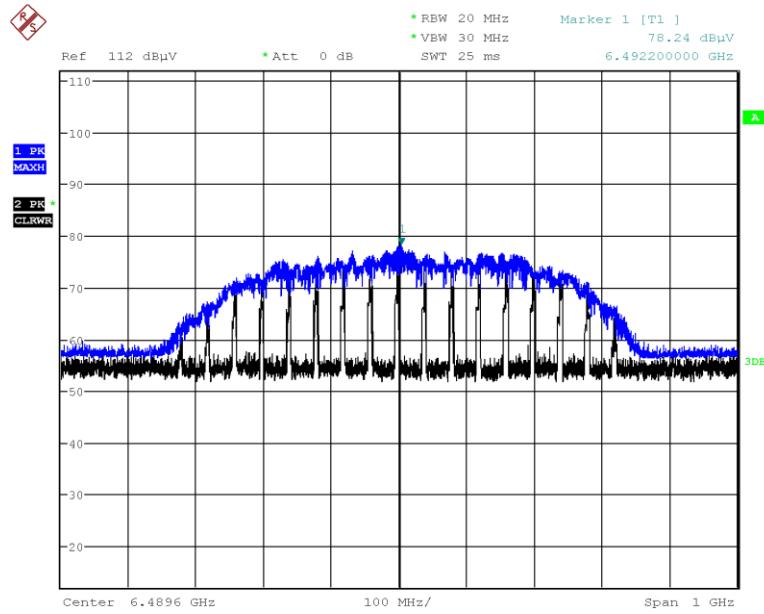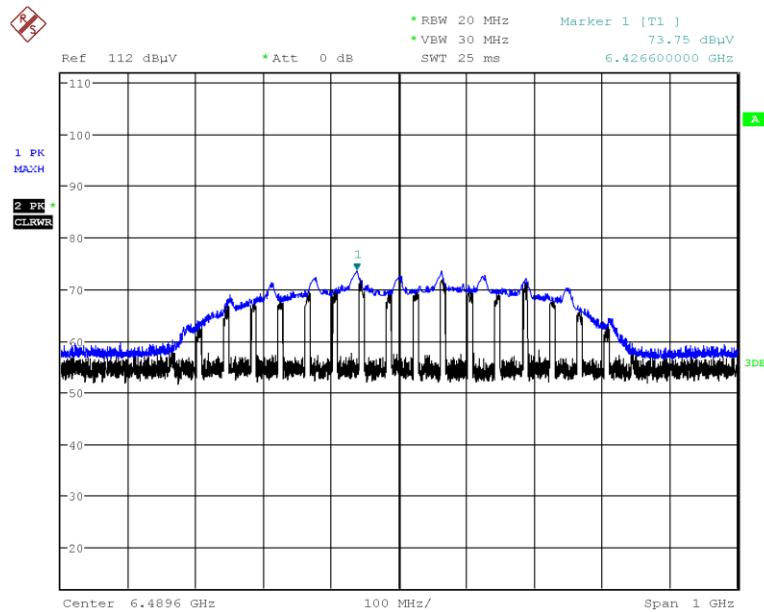Channel 5 (6489.6 MHz), Fundamental Peak Measurements**Mode 4****Mode 11**

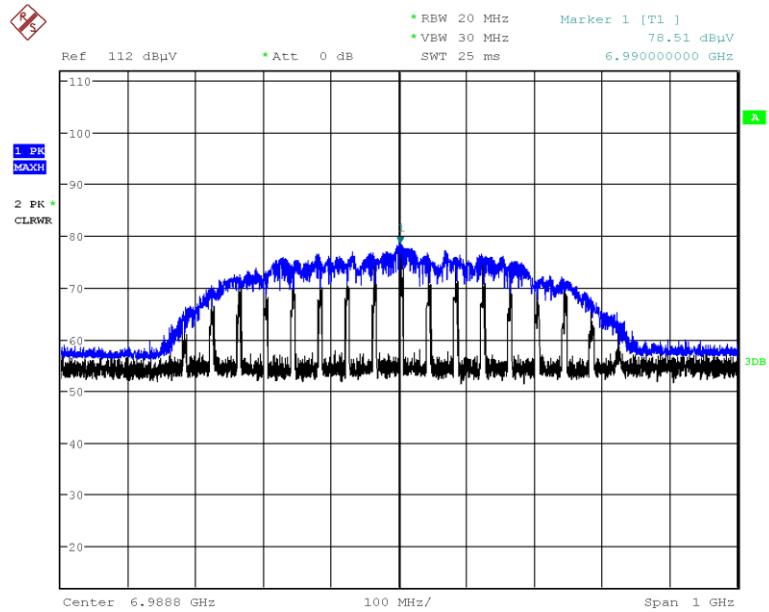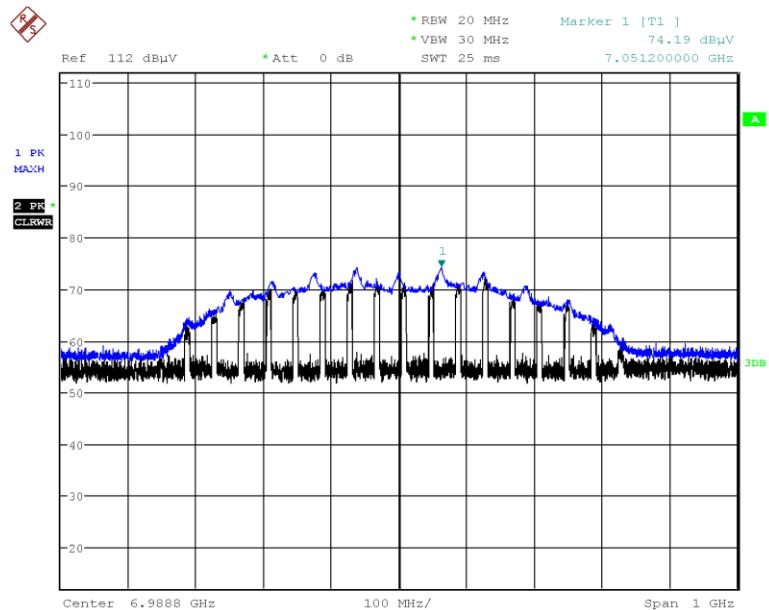Channel 6 (6988.8MHz), Fundamental Peak Measurements**Mode 4****Mode 11**

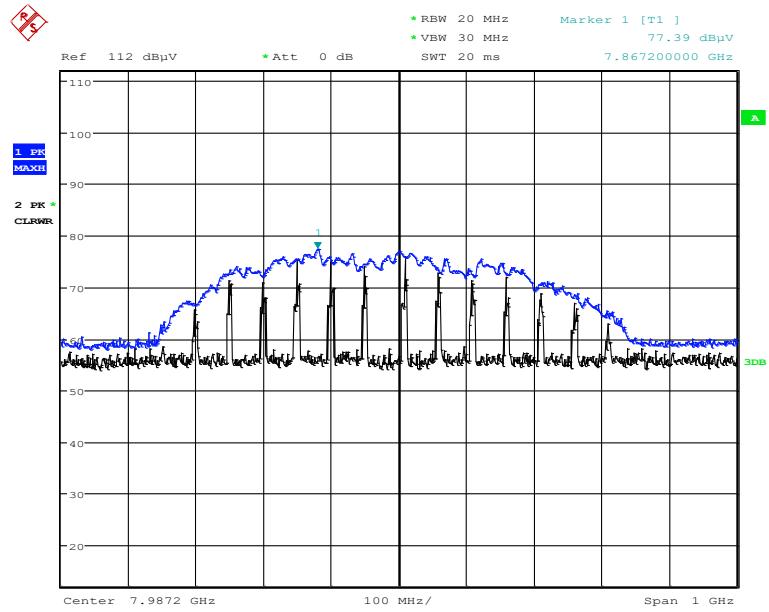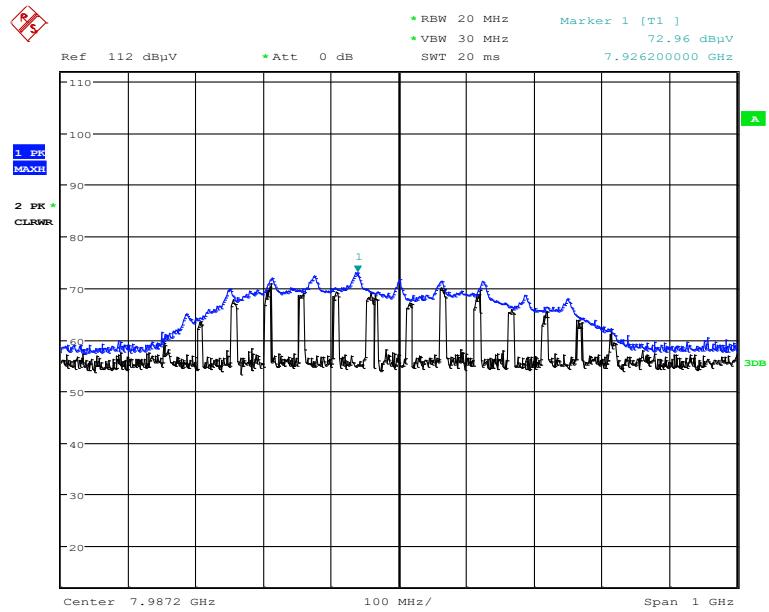Channel 9 (7987.2 MHz), Fundamental Peak Measurements**Mode 4****Mode 11**

8 FCC §15.503(d), §15.519(b) & ISEDC RSS-220 §5.1(a), RSS-Gen §6.7 -Emission Bandwidth

8.1 Applicable Standards

According to ECFR §15.503(a), For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna.

According to ECFR §15.519(b) and ISEDC RSS-220 §5.1(a), the UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

According to ECFR §15.503(b) and ISEDC RSS-220 §5.1(a), An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

According to ISEDC RSS-Gen§6.7, The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.


8.2 Measurement Procedure

The UWB bandwidth measurements were based on ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices section 10.1: Evaluation of -10dB bandwidth.

8.3 Test Setup Block Diagram

Above 1GHz:

At 3 meters:

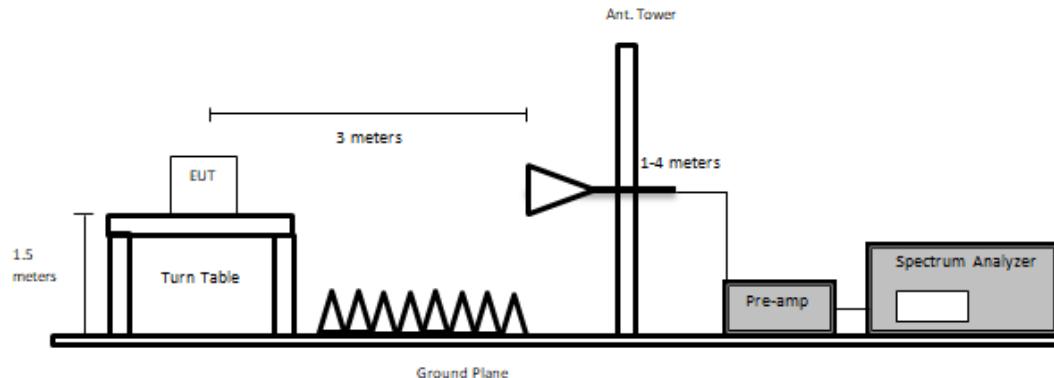

8.4 Test Equipment List and Details

Asset #	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
655	Rohde & Schwarz	Spectrum Analyzer	FSQ26	200749	2023-06-06	1 year
658	HP/ Agilent	Preamplifier	8449B OPT HO2	3008A011 03	2023-12-01	6 months
1192	ETS Lindgren	Horn Antenna	3117	00218973	2022-09-29	2 years
1247	Uti flex	Micro - Coax	-	-	2023-12-01	6 months
1295	Carlisle	10m Ultra Low Loss Coaxial Cable	UFB142A-1-3937-200200	64639890 912-001	2023-10-31	6 months
327	Sunol Sciences	System Controller	SC110V	122303-1	NR	NR
1075	Sunol Sciences	Boresight Tower	TLT3	050119-7	NR	NR
1388	Sunol Sciences	Flush Mount Turntable	FM	112005-2	NR	NR

Note¹: cables included in the test set-up will be checked each time before testing.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

8.5 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa



The testing was performed by Arturo Reyes on 2024-03-26 at 5 meter chamber 3.



8.6 Test Results



10 dB Bandwidth

Channel	Frequency (MHz)	Mode	10 dB BW (MHz)	10 dB BW limit (MHz)	10 dB BW within 3100MHz-10600MHz
5	6489.6	4	579	>500	Pass
		11	560	>500	Pass
6	6988.8	4	560	>500	Pass
		11	569	>500	Pass
9	7987.2	4	563	>500	Pass
		11	568	>500	Pass

Please refer to the following plots.

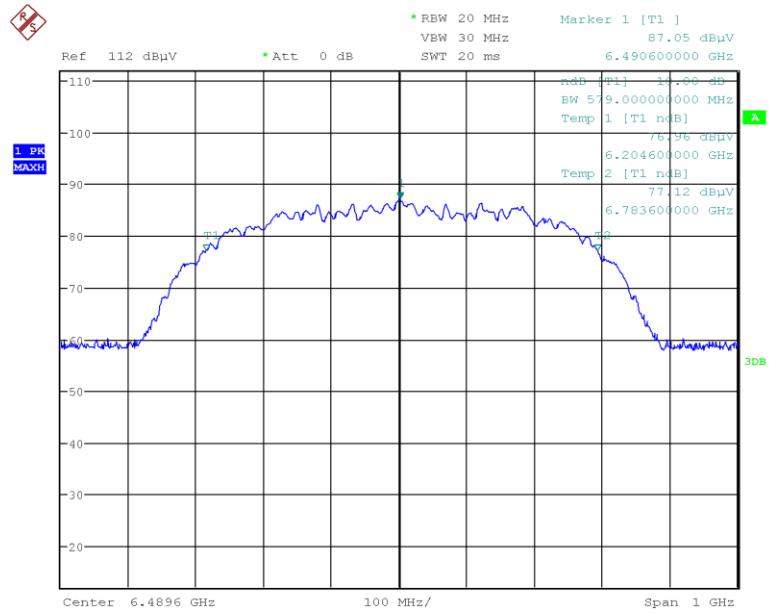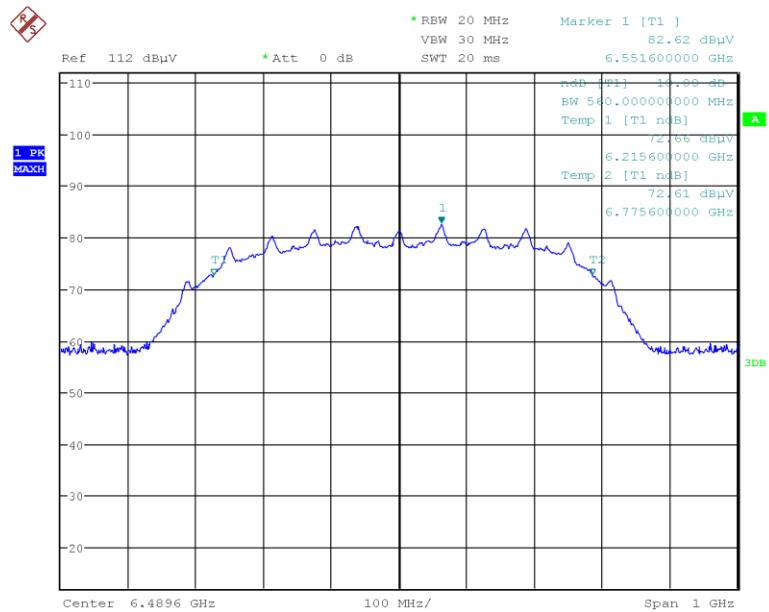Channel 5 (6489.6 MHz), 10dB Bandwidth**Mode 4****Mode 11**

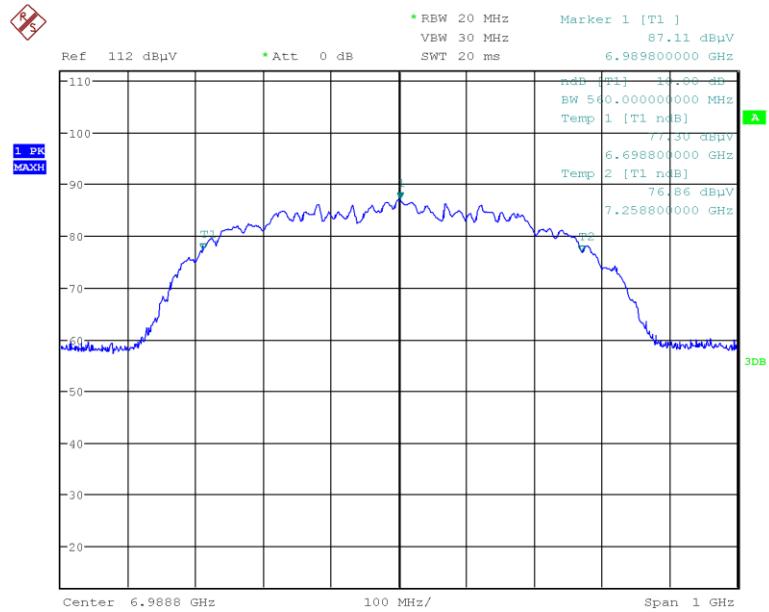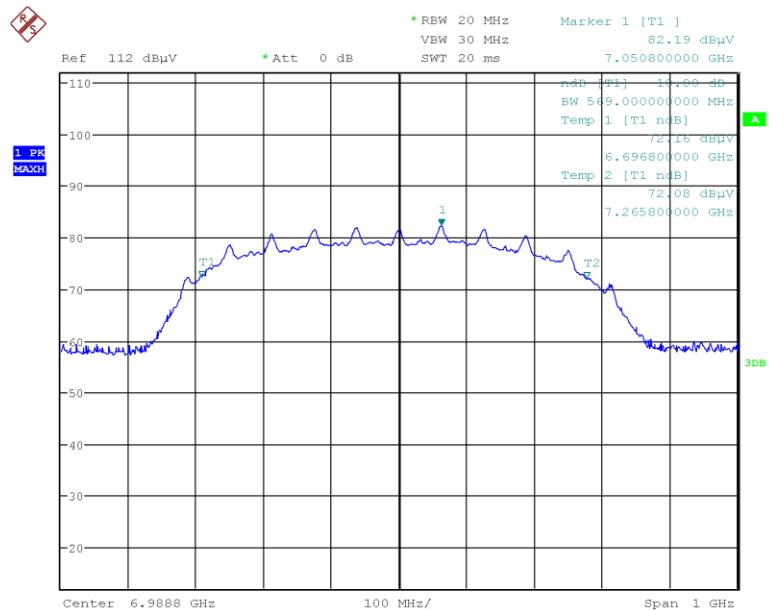Channel 6 (6988.8 MHz), 10dB Bandwidth**Mode 4****Mode 11**

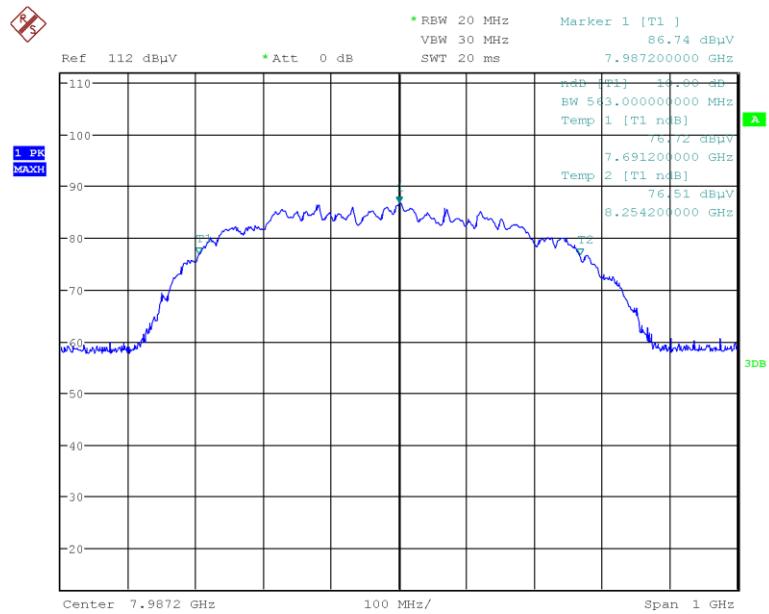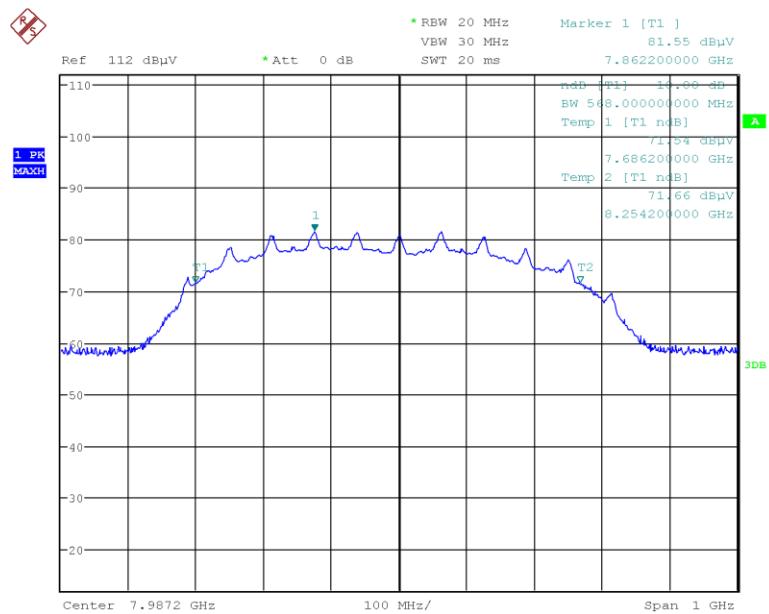Channel 9 (7987.2 MHz), 10dB Bandwidth**Mode 4****Mode 11**

9 FCC §15.519(a) (1) & ISEDC RSS-220 §5.3.1(b) - Cease Transmission

9.1 Applicable Standards

According to FCC §15.519(a)(1) and RSS-220 §5.3.1(b): A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.


9.2 Measurement Procedure

A support UWB radio device was paired with the EUT for this testing. Transmission was monitored over a 20 second period. Both EUT and support equipment were switched on and paired for UWB ranging from the transmission off state. The support equipment was then powered off, and the transmission time from EUT was monitored and recorded. The first marker marks the time the support equipment was switched off, and the second marker marks the time the EUT stopped transmission.

9.3 Test Setup Block Diagram

Above 1GHz:

At 3 meters:

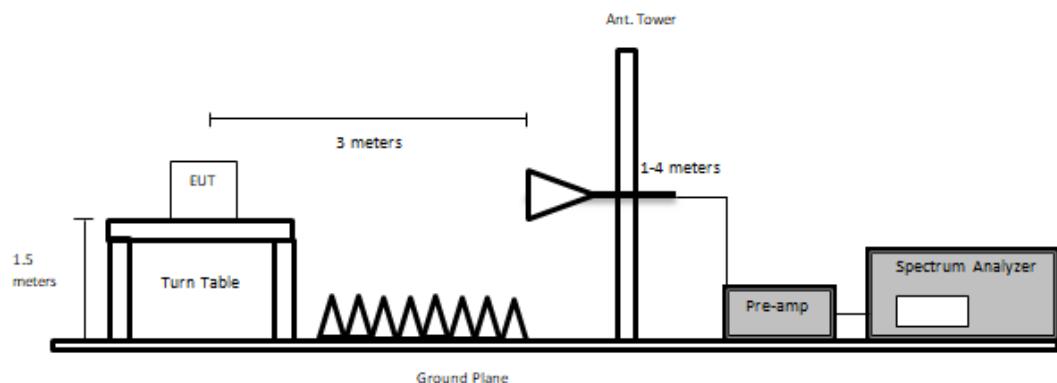

9.4 Test Equipment List and Details

Asset #	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
655	Rohde & Schwarz	Spectrum Analyzer	FSQ26	200749	2023-06-06	1 year
1192	ETS Lindgren	Horn Antenna	3117	00218973	2022-09-29	2 years
-	-	RF cable	-	-	Each time ¹	N/A
327	Sunol Sciences	System Controller	SC110V	122303-1	NR	NR
1075	Sunol Sciences	Boresight Tower	TLT3	050119-7	NR	NR
1388	Sunol Sciences	Flush Mount Turntable	FM	112005-2	NR	NR

Note¹: cables included in the test set-up will be checked each time before testing.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.


9.5 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Arturo Reyes on 2024-03-26 at 5 meter chamber 3.

9.6 Test Results

Transmission Time (Seconds)	Limit (Seconds)
4.596923	< 10

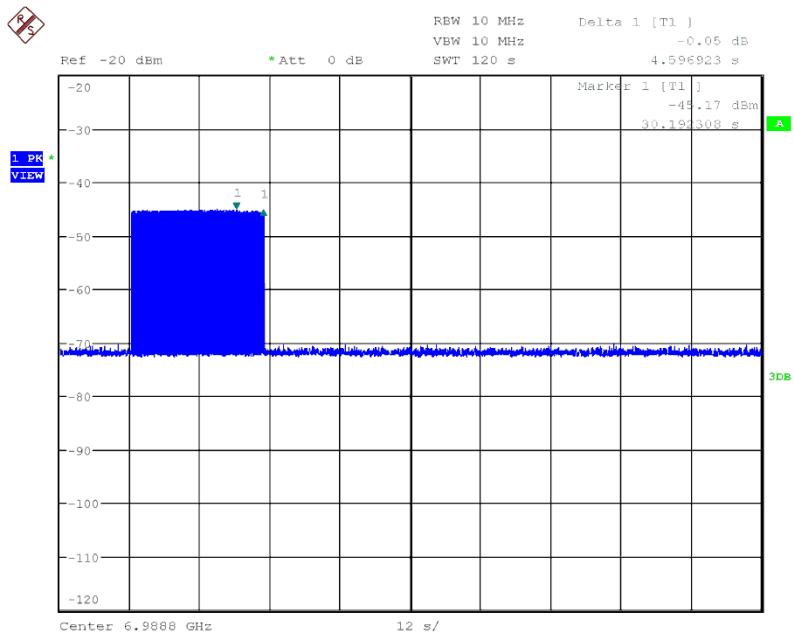

Note: The cease of transmission function operates the same way on all channels of this device. Therefore, only channel 6 was selected for testing.

10 Annex A (Normative) - Test Setup Photographs

Please refer to the attachment.

11 Annex B (Normative) - EUT External Photographs

Please refer to the attachment.

12 Annex C (Normative) - EUT Internal Photographs

Please refer to the attachment.

13 Annex D (Normative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIACE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222

- Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 21st day of December 2022.

A handwritten signature in blue ink, appearing to read "Trace McInturff".

Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---