



FCC TEST REPORT
FOR

GSM GLOBE.COM INC
MOBILE PHONE
Test Model: CONDOR

Prepared for : GSM GLOBE.COM INC
Address : 10286 SW 22nd pl. Davie Florida 33324 United States

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei,
Tel : Shajing Street, Baoan District, Shenzhen, 518000, China
Fax : (+86)755-82591330
Web : (+86)755-82591332
Mail : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 03, 2025
Number of tested samples : 2
Sample No. : A2503260251, A2503260252
Serial number : Prototype
Date of Test : April 03, 2025 ~ April 16, 2025
Date of Report : April 17, 2025



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



FCC TEST REPORT
FCC CFR 47 PART 15 C(15.247)

Report Reference No. : LCSA03265073EA

Date of Issue : April 17, 2025

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Testing Location/ Procedure : Full application of Harmonised standards Partial application of Harmonised standards Other standard testing method

Applicant's Name : GSM GLOBE.COM INC

Address : 10286 SW 22nd pl. Davie Florida 33324 United States

Test Specification

Standard : FCC CFR 47 PART 15 C(15.247)

Test Report Form No. : TRF-4-E-148 A/0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description : MOBILE PHONE

Trade Mark : RAYO MOVIL

Test Model : CONDOR

Ratings : Input: DC 5.0V, 500mA
For AC Adapter Input: AC 110-240V, 50/60Hz, 0.12A
Adapter Output: DC 5.0V, 500mA
DC 3.7V by Rechargeable Li-ion Battery, 1400mAh

Result : PASS

Compiled by:

Nadia Zhou/ Administrator

Supervised by:

Jack Liu/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



FCC -- TEST REPORT

| | |
|----------------------------------|---------------------------------|
| Test Report No. : LCSA03265073EA | April 17, 2025 Date of issue |
|----------------------------------|---------------------------------|

| |
|--|
| Test Model..... : CONDOR |
| EUT..... : MOBILE PHONE |
| Applicant..... : GSM GLOBE.COM INC |
| Address..... : 10286 SW 22nd pl. Davie Florida 33324 United States |
| Telephone..... : / |
| Fax..... : / |
| Manufacturer..... : GSM GLOBE.COM INC |
| Address..... : 10286 SW 22nd pl. Davie Florida 33324 United States |
| Telephone..... : / |
| Fax..... : / |
| Factory..... : / |
| Address..... : / |
| Telephone..... : / |
| Fax..... : / |

| | |
|-------------|------|
| Test Result | PASS |
|-------------|------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Revision History

| Report Version | Issue Date | Revision Content | Revised By |
|----------------|----------------|------------------|------------|
| 000 | April 17, 2025 | Initial Issue | --- |
| | | | |
| | | | |



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TABLE OF CONTENTS

| Description | Page |
|--|-----------|
| 1. GENERAL INFORMATION | 6 |
| 1.1 Description of Device (EUT) | 6 |
| 1.2 Support equipment List..... | 7 |
| 1.3 External I/O Cable | 7 |
| 1.4 Description of Test Facility | 7 |
| 1.5 Statement of the Measurement Uncertainty..... | 7 |
| 1.6 Measurement Uncertainty | 8 |
| 1.7 Description of Test Modes | 8 |
| 2. TEST METHODOLOGY | 9 |
| 2.1 EUT Configuration..... | 9 |
| 2.2 EUT Exercise | 9 |
| 2.3 General Test Procedures | 9 |
| 2.4. Test Sample | 9 |
| 3. SYSTEM TEST CONFIGURATION | 10 |
| 3.1 Justification..... | 10 |
| 3.2 EUT Exercise Software | 10 |
| 3.3 Special Accessories | 10 |
| 3.4 Block Diagram/Schematics | 10 |
| 3.5 Equipment Modifications | 10 |
| 3.6 Test Setup | 10 |
| 4. SUMMARY OF TEST RESULTS | 11 |
| 5. SUMMARY OF TEST EQUIPMENT | 12 |
| 6. MEASUREMENT RESULTS | 13 |
| 6.1. Frequency Separation and 20 dB Bandwidth | 13 |
| 6.2. Peak Power | 14 |
| 6.3. Time of Occupancy (Dwell Time)..... | 15 |
| 6.4. Number of Hopping Frequency | 16 |
| 6.5. Band Edges Measurements and Conducted Spurious Emissions Test | 17 |
| 6.6. Radiated Emissions Measurement..... | 18 |
| 6.7. AC Power Line Conducted Emissions | 29 |
| 6.8. On Time and Duty Cycle | 32 |
| 6.9. Emissions in Restricted Bands..... | 33 |
| 6.10. Pseudorandom Frequency Hopping Sequence | 35 |
| 6.11. Antenna Requirement | 36 |
| 7. TEST SETUP PHOTOGRAPHS OF EUT | 37 |
| 8. EXTERIOR PHOTOGRAPHS OF THE EUT | 37 |
| 9. INTERIOR PHOTOGRAPHS OF THE EUT | 37 |





1. GENERAL INFORMATION

1.1 Description of Device (EUT)

| | |
|---------------------|--|
| EUT | : MOBILE PHONE |
| Test Model | : CONDOR |
| Ratings | : Input: DC 5.0V, 500mA For AC Adapter Input: AC 110-240V, 50/60Hz, 0.12A Adapter Output: DC 5.0V, 500mA DC 3.7V by Rechargeable Li-ion Battery, 1400mAh |
| Hardware Version | : KF999_MBPCB_V1.2 |
| Software Version | : / |
| Bluetooth | : |
| Frequency Range | : 2402MHz~2480MHz |
| Channel Number | : 79 channels for Bluetooth V3.0 (DSS) |
| Channel Spacing | : 1MHz for Bluetooth V3.0 (DSS) |
| Modulation Type | : GFSK, π/4-DQPSK, 8-DPSK for Bluetooth V3.0 (DSS) |
| Bluetooth Version | : V3.0 |
| Antenna Description | : Internal Antenna, 1.67dBi(Max.) |
| 2G | : |
| Support Band | : <input checked="" type="checkbox"/> GSM 900 (EU-Band) <input checked="" type="checkbox"/> DCS 1800 (EU-Band) <input checked="" type="checkbox"/> GSM 850 (U.S.-Band) <input checked="" type="checkbox"/> PCS 1900 (U.S.-Band) |
| Release Version | : R99 |
| GPRS Class | : Class 12 |
| EGPRS Class | : / |
| Type Of Modulation | : GMSK for GSM/GPRS |
| Antenna Description | : Internal Antenna -1.6dBi (max.) For GSM 850 -1.0dBi (max.) For PCS 1900 |
| 3G | : |
| Support Band | : <input checked="" type="checkbox"/> WCDMA Band II (U.S.-Band) <input checked="" type="checkbox"/> WCDMA Band V (U.S.-Band) |
| Release Version | : R9 |
| Type Of Modulation | : QPSK,16QAM |
| Antenna Description | : Internal Antenna -1.0dBi (max.) For WCDMA Band II -1.6dBi (max.) For WCDMA Band V |
| FM function | : Support and only RX |
| Extreme temp. | : -30°C to +50°C |
| Tolerance | |
| Extreme vol. Limits | : 3.1VDC to 4.2VDC (nominal: 3.7VDC) |

Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.





1.2 Support equipment List

| Manufacturer | Description | Model | Serial Number | Certificate |
|---|-------------|--------|---------------|-------------|
| Shenzhen Baoshengyuan Technology co., Ltd | CHARGER | CONDOR | --- | FCC |

1.3 External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------------------------|
| Type-C USB Port | 1 | Cable: 0.8m, unshielded |
| Headset Port | 1 | Cable: 0.8m, unshielded |

1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10:2013 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.





1.6 Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty | Note |
|--------------------------------|-----------------|-------------|------|
| Radiation Uncertainty | 9KHz~30MHz | ±3.10dB | (1) |
| | 30MHz~200MHz | ±2.96dB | (1) |
| | 200MHz~1000MHz | ±3.10dB | (1) |
| | 1GHz~26.5GHz | ±3.80dB | (1) |
| | 26.5GHz~40GHz | ±3.90dB | (1) |
| Conduction Uncertainty | 150kHz~30MHz | ±1.63dB | (1) |
| Power disturbance | 30MHz~300MHz | ±1.60dB | (1) |
| Output power | 1GHz~40GHz | ±0.57dB | (1) |
| Occupied Channel Bandwidth | 1GHz~40GHz | ±5% | (1) |
| Conducted RF Spurious Emission | 9kHz~40GHz | ±1.80dB | (1) |
| Emissions in Restricted Bands | 1GHz~40GHz | ±2.47dB | (1) |
| Dewll time | 1GHz~40GHz | 2.3% | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With basic data rate feature, the data rates can be up to 1 Mb/s by modulating the RF carrier using GFSK techniques. The EUT works in the X-axis, Y-axis, Z-axis. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

| Mode of Operations | Frequency Range (MHz) | Data Rate (Mbps) |
|------------------------|-----------------------|------------------|
| BT | 2402 | 1/2/3 |
| | 2441 | 1/2/3 |
| | 2480 | 1/2/3 |
| For Conducted Emission | | |
| Test Mode | TX Mode/Hopping Mode | |
| For Radiated Emission | | |
| Test Mode | TX Mode/Hopping Mode | |

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was determined to be TX (3Mbps-Middle Channel).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was determined to be TX (3Mbps-Middle Channel).

Pre-test AC conducted emission at charge from 1Mbps-Low Channel mode, recorded worst case.

Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worst case.

AC conducted emission pre-test at power adapter modes, recorded worst case;





2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207, 15.209 and 15.247.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the normal operating mode for Hopping Numbers and Dwell Time test and a continuous transmits mode for other tests.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.1.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.4 of ANSI C63.10-2013

2.4. Test Sample

The application provides 2 samples to meet requirement;

| Sample Number | Description |
|-----------------------|---------------------------------------|
| Sample 1(A2503260251) | Engineer sample – continuous transmit |
| Sample 2(A2503260252) | Normal sample – Intermittent transmit |





3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a continuous transmits condition.

3.2 EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software provided by application.

3.3 Special Accessories

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| -- | -- | -- | -- | -- |

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.





4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C | | | | |
|---|--|----------------------|-----------|--------------------------------|
| FCC Rules | Description of Test | Test Sample | Result | Remark |
| §15.247(a) | 20dB Bandwidth | Sample 1 | Compliant | Appendix A.1 |
| §15.247(b)(1) | Maximum Peak Conducted Output Power | Sample 1 | Compliant | Appendix A.2 |
| §15.247(a)(1) | Frequency Separation | Sample 1 | Compliant | Appendix A.3 |
| §15.247(a)(1) | Time Of Occupancy (Dwell Time) | Sample 1 | Compliant | Appendix A.4 |
| §15.247(a)(1) | Number Of Hopping Frequency | Sample 1 | Compliant | Appendix A.5 |
| §15.209(a) | Radiated Spurious Emissions | Sample 1 Sample 2 | Compliant | Note 1 |
| §15.247(d) | Band Edges Measurements and Conducted Spurious Emissions | Sample 1 | Compliant | Appendix A.6 Appendix A.7 |
| / | On Time and Duty Cycle | Sample 1 | / | Only reported; Appendix A.8 |
| §15.205 | Emissions at Restricted Band | Sample 1 | Compliant | Appendix A.9 |
| §15.207(a) | AC Mains Conducted Emissions | Sample 2 | Compliant | Note 1 |
| §15.203 | Antenna Requirements | Sample 1 | Compliant | Note 1 |
| §15.247(i)§1.1310 §15.247(i)§2.1093 | RF Exposure | N/A | Compliant | Note 2 |

Remark:

1. Note 1 – Test results inside test report;
2. Note 2 – Test results in other test report (SAR Report);





5. SUMMARY OF TEST EQUIPMENT

| Item | Equipment | Manufacturer | Model No. | Serial No. | Cal Date | Due Date |
|------|--------------------------|----------------|-------------|-----------------|------------|------------|
| 1 | Power Meter | R&S | NRVS | 100444 | 2024-06-06 | 2025-06-05 |
| 2 | Power Sensor | R&S | NRV-Z81 | 100458 | 2024-06-06 | 2025-06-05 |
| 3 | Power Sensor | R&S | NRV-Z32 | 10057 | 2024-06-06 | 2025-06-05 |
| 4 | Test Software | Tonscend | JS1120-2 | / | N/A | N/A |
| 5 | RF Control Unit | Tonscend | JS0806-2 | N/A | 2024-11-08 | 2025-11-07 |
| 6 | MXA Signal Analyzer | Agilent | N9020A | MY50510140 | 2024-10-08 | 2025-10-07 |
| 7 | DC Power Supply | Agilent | E3642A | N/A | 2024-10-08 | 2025-10-07 |
| 8 | EMI Test Software | AUDIX | E3 | / | N/A | N/A |
| 9 | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 2024-06-06 | 2025-06-05 |
| 10 | Positioning Controller | Max-Full | MF7802BS | MF780208586 | N/A | N/A |
| 11 | Active Loop Antenna | SCHWARZBECK | FMZB 1519B | 00005 | 2024-07-13 | 2027-07-12 |
| 12 | By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 2024-08-03 | 2027-08-02 |
| 13 | Horn Antenna | SCHWARZBECK | BBHA 9120D | 9120D-1925 | 2024-07-13 | 2027-07-12 |
| 14 | Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | 791 | 2024-07-13 | 2027-07-12 |
| 15 | Broadband Preamplifier | SCHWARZBECK | BBV9719 | 9719-025 | 2024-07-30 | 2025-07-29 |
| 16 | EMI Test Receiver | R&S | ESR 7 | 101181 | 2024-06-06 | 2025-06-05 |
| 17 | RS SPECTRUM ANALYZER | R&S | FSP40 | 100503 | 2024-06-06 | 2025-06-05 |
| 18 | Low-frequency amplifier | SchwarzZBECK | BBV9745 | 00253 | 2024-10-08 | 2025-10-07 |
| 19 | High-frequency amplifier | JS Denki Pte | PA0118-43 | JSPA21009 | 2024-10-08 | 2025-10-07 |
| 20 | 6dB Attenuator | / | 100W/6dB | 1172040 | 2024-06-06 | 2025-06-05 |
| 21 | 3dB Attenuator | / | 2N-3dB | / | 2024-10-08 | 2025-10-07 |
| 22 | EMI Test Receiver | R&S | ESPI | 101940 | 2024-06-06 | 2025-06-05 |
| 23 | Artificial Mains | R&S | ENV216 | 101288 | 2024-06-06 | 2025-06-05 |
| 24 | 10dB Attenuator | SCHWARZBECK | MTS-IMP-136 | 261115-001-0032 | 2024-06-06 | 2025-06-05 |
| 25 | EMI Test Software | Farad | EZ | / | N/A | N/A |
| 26 | Antenna Mast | Max-Full | MFA-515BSN | 1308572 | N/A | N/A |
| 27 | Pulse Limiter | R&S | ESH3-Z2 | 102750-NB | 2024-06-06 | 2025-06-05 |




6. MEASUREMENT RESULTS

6.1. Frequency Separation and 20 dB Bandwidth

6.1.1 Limit

According to §15.247(a), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.1.2 Block Diagram of Test Setup

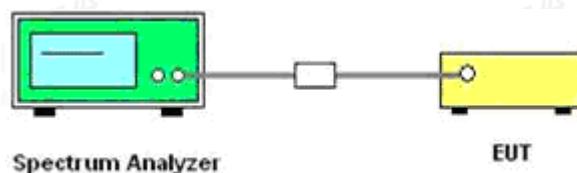

6.1.3 Test Procedure

Frequency separation test procedure :

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = middle of hopping channel.
- 4). Set the Spectrum Analyzer as RBW = 30 kHz, VBW = 100 kHz, Span = wide enough to capture the peaks of two adjacent channels, Sweep = auto.
- 5). Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

20dB bandwidth test procedure :

- 1). Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
- 2). RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW.
- 3). Detector function = peak.
- 4). Trace = max hold.

6.1.4 Test Results

6.1.4.1 20dB Bandwidth

PASS

Please refer to Appendix A.1

Remark:

1. Test results including cable loss;
2. Measured 20dB Bandwidth at difference Packet Type for each mode and recorded worst case for each mode.
3. Worst case data at DH5 for GFSK, 2DH5 for $\pi/4$ -DQPSK, 3DH5 for 8-DPSK modulation type;

6.1.4.2 Frequency Separation


PASS

Please refer to Appendix A.3



6.2. Peak Power

6.2.1 Block Diagram of Test Setup

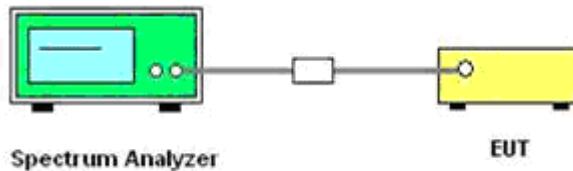

6.2.2 Limit

According to §15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

6.2.3 Test Procedure

The transmitter output is connected to the spectrum.

6.2.4. Test Procedures

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW \geq RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

6.2.5 Test Results

PASS

Please refer to Appendix A.2

Remark:

1. *Test results including cable loss;*
2. *Measured output power at difference Packet Type for each mode and recorded worst case for each mode.*




6.3. Time of Occupancy (Dwell Time)

6.3.1 Limit

According to §15.247(a)(1), Frequency hopping systems operating in the 2400MHz- 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

6.3.2 Block Diagram of Test Setup

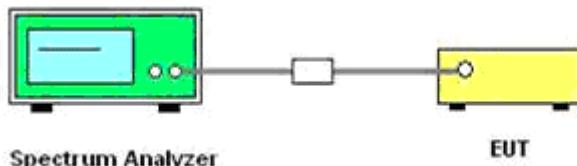

6.3.3 Test Procedure

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = operating frequency.
- 4). Set the Spectrum Analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.
- 5). Repeat above procedures until all frequency measured was complete.

6.3.4 Test Results

The Dwell Time=Burst Width*Total Hops.

PASS

Please refer to Appendix A.4

Remark:

1. Test results including cable loss;
2. Measured at difference Packet Type for each mode and recorded worst case for each mode.






6.4. Number of Hopping Frequency

6.4.1 Limit

According to §15.247(a)(1), Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

6.4.2 Block Diagram of Test Setup

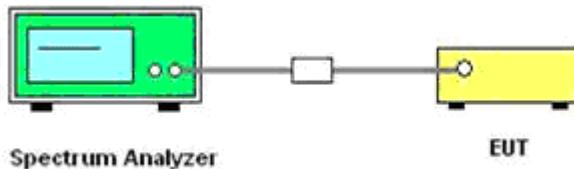

6.4.3 Test Procedure

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4). Set the Spectrum Analyzer as RBW=100KHz, VBW=300KHz.
- 5). Max hold, view and count how many channel in the band.

6.4.4 Test Results

PASS

Please refer to Appendix A.5

Remark:

1. Test results including cable loss;
2. Measured number of hopping channels at difference Packet Type for each mode and recorded worst case for each mode.
3. Worst case data at DH5 for GFSK, 2DH5 for $\pi/4$ -DQPSK, 3DH5 for 8-DPSK modulation type;



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




6.5. Band Edges Measurements and Conducted Spurious Emissions Test

6.5.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

6.5.2 Block Diagram of Test Setup

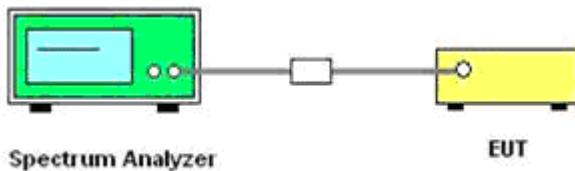

6.5.3 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.

Measurements are made over the 30 MHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels

6.5.4 Test Results of Conducted Spurious Emissions

No non-compliance noted. Only record the worst test result in this report. The test data refer to the following page.

PASS

Please refer to Appendix A.6 for Band Edges Measurements.

Please refer to Appendix A.7 for Conducted Spurious Emission.

Remark:

1. Test results including cable loss;
2. Measured at difference Packet Type for each mode and recorded worst case for each mode.
3. Worst case data at DH5 for GFSK, 2DH5 for $\pi/4$ -DQPSK, 3DH5 for 8-DPSK modulation type;





6.6. Radiated Emissions Measurement

6.6.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293. | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2\) |
| 13.36-13.41 | | | |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

6.6.2. Measuring Instruments and Setting

Please refer to of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.





| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10 th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/T kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/T kHz for Average |

| Receiver Parameter | Setting |
|------------------------|--|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP |

6.6.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 4 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

6.6.4. Test Setup Layout



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

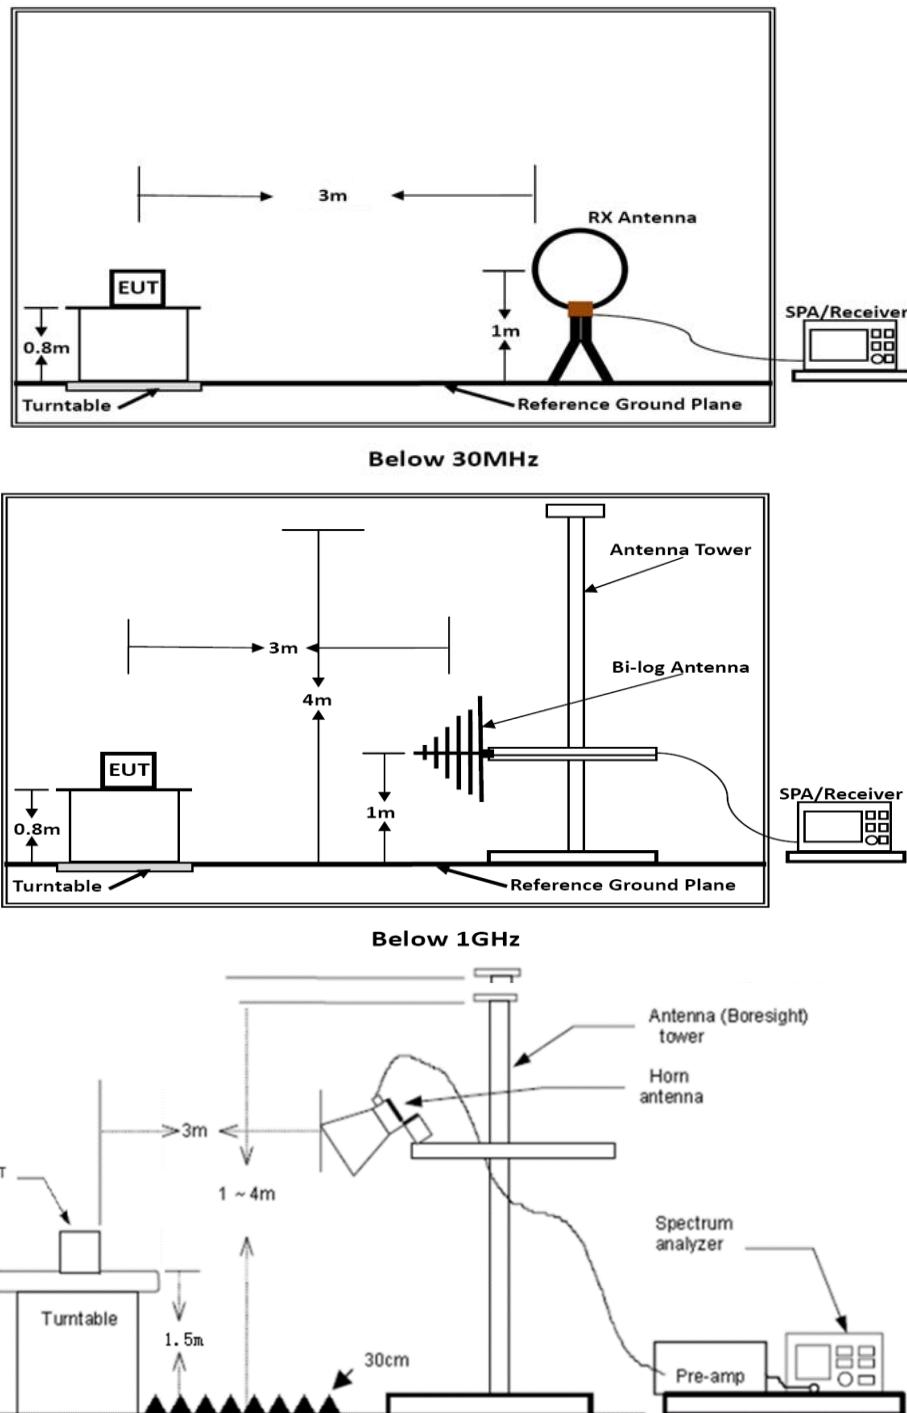

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



6.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.6.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS (\text{dBuV/m}) = RA (\text{dBuV}) + AF (\text{dB/m}) + CL (\text{dB}) - AG (\text{dB})$$

| | |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude | AG = Amplifier Gain |
| AF = Antenna Factor | |

6.6.7. Results of Radiated Emissions (9 KHz~30MHz)

| | | | |
|---------------|---------|----------------|-------|
| Temperature | 23.8 °C | Humidity | 52.1% |
| Test Engineer | Jay Luo | Configurations | BT |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark |
|-------------|--------------|-----------------|-------------------|----------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor.

6.6.8. Results of Radiated Emissions (30 MHz~1000 MHz)


| | | | |
|---------------|---------|----------------|-------|
| Temperature | 23.8 °C | Humidity | 52.1% |
| Test Engineer | Jay Luo | Configurations | BT |

PASS.

The test data please refer to following page.




Horizontal

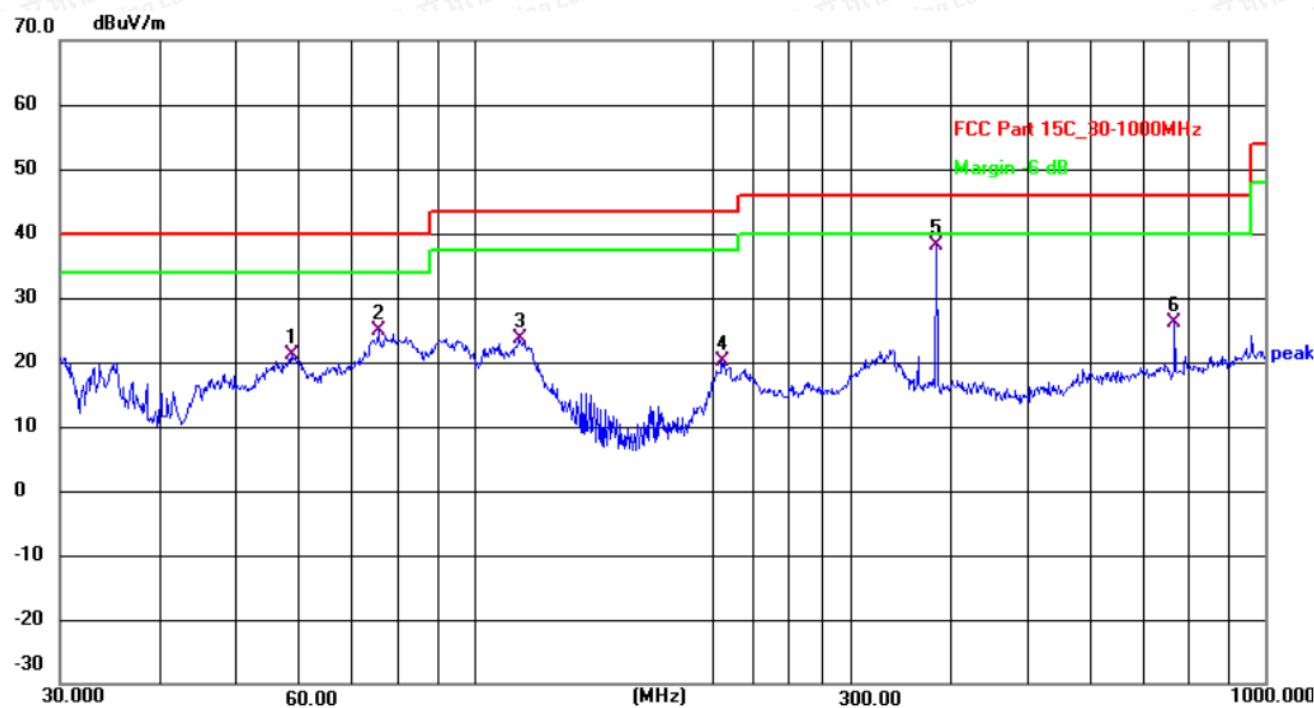

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 58.8185 | 37.45 | -16.40 | 21.05 | 40.00 | -18.95 | QP |
| 2 | 75.7114 | 44.42 | -19.59 | 24.83 | 40.00 | -15.17 | QP |
| 3 | 114.1138 | 41.73 | -18.09 | 23.64 | 43.50 | -19.86 | QP |
| 4 | 205.6751 | 38.38 | -18.34 | 20.04 | 43.50 | -23.46 | QP |
| 5 | 383.9318 | 51.72 | -13.66 | 38.06 | 46.00 | -7.94 | QP |
| 6 | 768.7481 | 35.42 | -9.39 | 26.03 | 46.00 | -19.97 | QP |



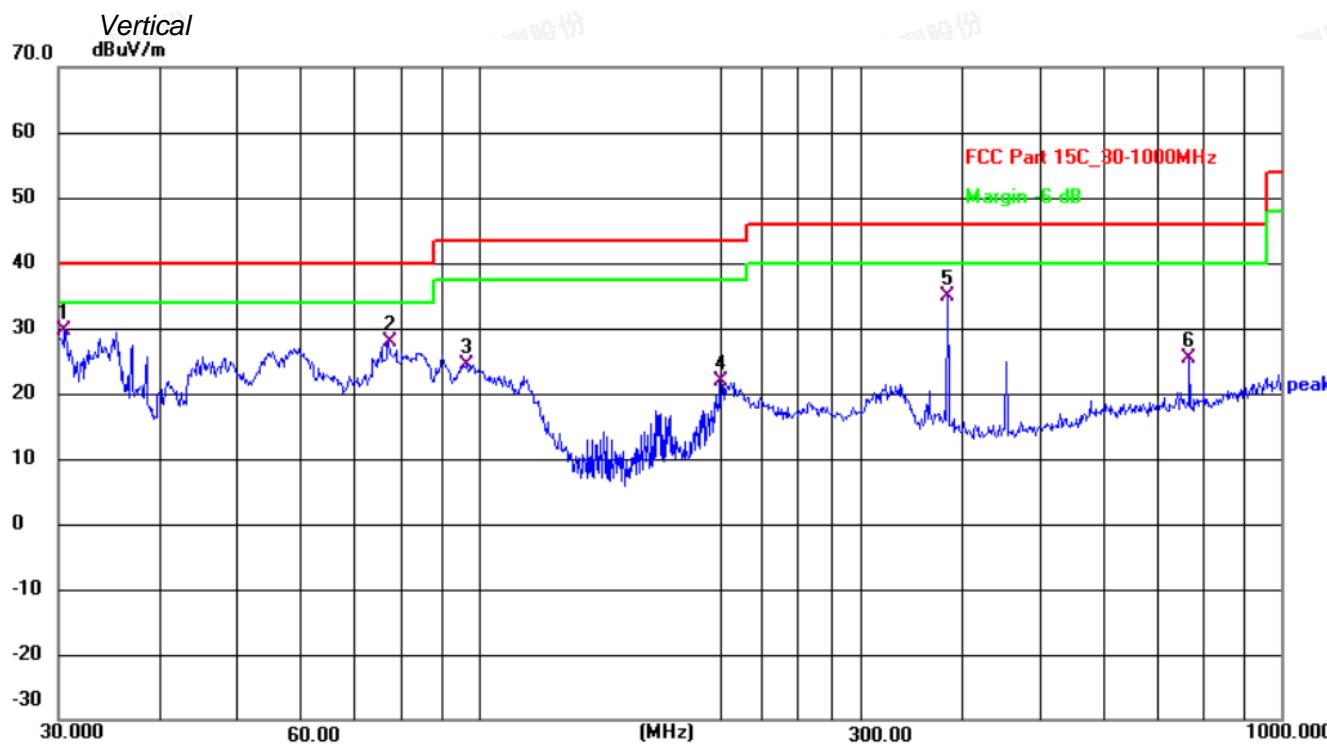

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 30.5306 | 47.96 | -18.39 | 29.57 | 40.00 | -10.43 | QP |
| 2 | 77.3212 | 47.66 | -19.77 | 27.89 | 40.00 | -12.11 | QP |
| 3 | 96.7749 | 42.89 | -18.41 | 24.48 | 43.50 | -19.02 | QP |
| 4 | 199.9856 | 39.20 | -17.39 | 21.81 | 43.50 | -21.69 | QP |
| 5 | 383.9318 | 49.48 | -14.63 | 34.85 | 46.00 | -11.15 | QP |
| 6 | 768.7481 | 35.61 | -10.14 | 25.47 | 46.00 | -20.53 | QP |

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (3Mbps-Middle Channel).
- 2). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3). Level = Reading + Factor, Margin = Level-Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor.





6.6.9. Results of Radiated Emissions (1 GHz~26.5GHz)

Note: All the modes have been tested and recorded worst mode in the report.

The worst test result for GFSK, Channel 0 / 2402 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.00 | 53.31 | 33.06 | 35.04 | 3.94 | 55.27 | 74.00 | -18.73 | Peak | Horizontal |
| 4804.00 | 45.89 | 33.06 | 35.04 | 3.94 | 47.85 | 54.00 | -6.15 | Average | Horizontal |
| 4804.00 | 55.80 | 33.06 | 35.04 | 3.94 | 57.76 | 74.00 | -16.24 | Peak | Vertical |
| 4804.00 | 45.29 | 33.06 | 35.04 | 3.94 | 47.25 | 54.00 | -6.75 | Average | Vertical |

The worst test result for GFSK, Channel 39 / 2441 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4882.00 | 54.37 | 33.16 | 35.15 | 3.96 | 56.34 | 74.00 | -17.66 | Peak | Horizontal |
| 4882.00 | 40.38 | 33.16 | 35.15 | 3.96 | 42.35 | 54.00 | -11.65 | Average | Horizontal |
| 4882.00 | 58.79 | 33.16 | 35.15 | 3.96 | 60.76 | 74.00 | -13.24 | Peak | Vertical |
| 4882.00 | 43.13 | 33.16 | 35.15 | 3.96 | 45.10 | 54.00 | -8.90 | Average | Vertical |

The worst test result for GFSK, Channel 78 / 2480 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4960.00 | 60.27 | 33.26 | 35.14 | 3.98 | 62.37 | 74.00 | -11.63 | Peak | Horizontal |
| 4960.00 | 43.96 | 33.26 | 35.14 | 3.98 | 46.06 | 54.00 | -7.94 | Average | Horizontal |
| 4960.00 | 57.63 | 33.26 | 35.14 | 3.98 | 59.73 | 74.00 | -14.27 | Peak | Vertical |
| 4960.00 | 41.11 | 33.26 | 35.14 | 3.98 | 43.21 | 54.00 | -10.79 | Average | Vertical |

The worst test result for $\pi/4$ -DQPSK, Channel 0 / 2402 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.00 | 54.51 | 33.06 | 35.04 | 3.94 | 56.47 | 74.00 | -17.53 | Peak | Horizontal |
| 4804.00 | 42.37 | 33.06 | 35.04 | 3.94 | 44.33 | 54.00 | -9.67 | Average | Horizontal |
| 4804.00 | 55.74 | 33.06 | 35.04 | 3.94 | 57.70 | 74.00 | -16.30 | Peak | Vertical |
| 4804.00 | 40.12 | 33.06 | 35.04 | 3.94 | 42.08 | 54.00 | -11.92 | Average | Vertical |

The worst test result for $\pi/4$ -DQPSK, Channel 39 / 2441 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4882.00 | 59.33 | 33.16 | 35.15 | 3.96 | 61.30 | 74.00 | -12.70 | Peak | Horizontal |
| 4882.00 | 41.46 | 33.16 | 35.15 | 3.96 | 43.43 | 54.00 | -10.57 | Average | Horizontal |
| 4882.00 | 60.48 | 33.16 | 35.15 | 3.96 | 62.45 | 74.00 | -11.55 | Peak | Vertical |
| 4882.00 | 41.11 | 33.16 | 35.15 | 3.96 | 43.08 | 54.00 | -10.92 | Average | Vertical |



The worst test result for $\pi/4$ -DQPSK, Channel 78 / 2480 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4960.00 | 54.56 | 33.26 | 35.14 | 3.98 | 56.66 | 74.00 | -17.34 | Peak | Horizontal |
| 4960.00 | 40.55 | 33.26 | 35.14 | 3.98 | 42.65 | 54.00 | -11.35 | Average | Horizontal |
| 4960.00 | 55.95 | 33.26 | 35.14 | 3.98 | 58.05 | 74.00 | -15.95 | Peak | Vertical |
| 4960.00 | 41.46 | 33.26 | 35.14 | 3.98 | 43.56 | 54.00 | -10.44 | Average | Vertical |

The worst test result for 8-DPSK, Channel 0 / 2402 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.00 | 56.07 | 33.06 | 35.04 | 3.94 | 58.03 | 74.00 | -15.97 | Peak | Horizontal |
| 4804.00 | 41.03 | 33.06 | 35.04 | 3.94 | 42.99 | 54.00 | -11.01 | Average | Horizontal |
| 4804.00 | 54.59 | 33.06 | 35.04 | 3.94 | 56.55 | 74.00 | -17.45 | Peak | Vertical |
| 4804.00 | 43.05 | 33.06 | 35.04 | 3.94 | 45.01 | 54.00 | -8.99 | Average | Vertical |

The worst test result for 8-DPSK, Channel 39 / 2441 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4882.00 | 59.34 | 33.16 | 35.15 | 3.96 | 61.31 | 74.00 | -12.69 | Peak | Horizontal |
| 4882.00 | 41.18 | 33.16 | 35.15 | 3.96 | 43.15 | 54.00 | -10.85 | Average | Horizontal |
| 4882.00 | 53.60 | 33.16 | 35.15 | 3.96 | 55.57 | 74.00 | -18.43 | Peak | Vertical |
| 4882.00 | 42.10 | 33.16 | 35.15 | 3.96 | 44.07 | 54.00 | -9.93 | Average | Vertical |

The worst test result for 8-DPSK, Channel 78 / 2480 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4960.00 | 58.10 | 33.26 | 35.14 | 3.98 | 60.20 | 74.00 | -13.80 | Peak | Horizontal |
| 4960.00 | 43.65 | 33.26 | 35.14 | 3.98 | 45.75 | 54.00 | -8.25 | Average | Horizontal |
| 4960.00 | 54.49 | 33.26 | 35.14 | 3.98 | 56.59 | 74.00 | -17.41 | Peak | Vertical |
| 4960.00 | 45.96 | 33.26 | 35.14 | 3.98 | 48.06 | 54.00 | -5.94 | Average | Vertical |

Notes:

- 1). Measuring frequencies from 9 KHz~10th harmonic or 26.5GHz (which is less), at least have 20dB margin found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4). Measured Level = Reading Level + Factor, Margin = Measured Level – Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

