

# TEST REPORT

**FCC ID: 2AEKLHD901**

**Product: Car DVD player**

**Model No.: HD901**

**Additional Model No.: H901**

**Trade Mark: N/A**

**Report No.: TCT150414E004**

**Issued Date: Apr. 27, 2015**

Issued for:

**Shenzhen Forzen Technology Co.,Ltd  
Forzen Technology Park, Fuyuan No.2 Rd, Fuyong, Bao'an district,  
Shenzhen, China**

Issued By:

**Shenzhen Tongce Testing Lab.  
1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China  
TEL: +86-755-27673339  
FAX: +86-755-27673332**

**Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.**

**This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.**


## TABLE OF CONTENTS

1. Test Certification .....	3
2. Test Result Summary .....	4
3. EUT Description .....	5
4. Genera Information .....	6
4.1. Test Environment and Mode .....	6
4.2. Description of Support Units .....	6
5. Facilities and Accreditations .....	7
5.1. Facilities .....	7
5.2. Location .....	7
5.3. Measurement Uncertainty .....	7
6. Test Results and Measurement Data .....	8
6.1. Antenna Requirement .....	8
6.2. Conducted Emission .....	9
6.3. Radiated Emission Measurement .....	10
6.4. 20dB Occupied Bandwidth .....	15

## 1. Test Certification

<b>Product:</b>	Car DVD player
<b>Model No.:</b>	HD901
<b>Additional Model No.:</b>	H901
<b>Applicant:</b>	Shenzhen Forzen Technology Co.,Ltd
<b>Address:</b>	Forzen Technology Park, Fuyuan No.2 Rd, Fuyong, Bao'an district, Shenzhen, China
<b>Manufacturer:</b>	Shenzhen Forzen Technology Co.,Ltd
<b>Address:</b>	Forzen Technology Park, Fuyuan No.2 Rd, Fuyong, Bao'an district, Shenzhen, China
<b>Date of Test:</b>	Apr. 15 – Apr. 24, 2015
<b>Applicable Standards:</b>	FCC CFR Title 47 Part 15 Subpart C Section 15.239

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Tested By:****Date:** Apr. 24, 2015**Reviewed By:**  
Sky

Joe Zhou

**Date:** Apr. 27, 2015**Approved By:**  
Tomsin

Tomsin

**Date:** Apr. 27, 2015

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	N/A
Field strength of the fundamental signal	§15.239 (b)	PASS
Spurious emissions	§15.239 (b) (c)/ §15.209	PASS
Occupied Bandwidth	§15.215 (c)	PASS

**Note:**

1. PASS: *Test item meets the requirement.*
2. Fail: *Test item does not meet the requirement.*
3. N/A: *Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

### 3. EUT Description

<b>Product Name:</b>	Car DVD player
<b>Model :</b>	HD90
<b>Additional Model:</b>	H901
<b>Trade Mark:</b>	N/A
<b>Operation Frequency:</b>	88.1-88.7MHz
<b>Channel Separation:</b>	200 kHz
<b>Number of Channel:</b>	4
<b>Modulation Technology:</b>	FM
<b>Antenna Type:</b>	Internal Antenna
<b>Antenna Gain:</b>	1dBi
<b>Power Supply:</b>	DC12V
<b>Model difference :</b>	All models above are identical in interior structure, electrical circuits and components, and just differ in look and model for the marketing requirement.

#### Operation Frequency Each of Channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	88.1MHz	4	88.7MHz				
2	88.3MHz						
3	88.5MHz						

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	88.1MHz
The middle channel	88.3MHz
The Highest channel	88.7MHz

## 4. General Information

### 4.1. Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting mode by select channel and modulation
<p>The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

### 4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

#### Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 5. Facilities and Accreditations

### 5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

### 5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142

### 5.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

## 6. Test Results and Measurement Data

### 6.1. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
-----------------------	-------------------------------------

#### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(c) (1)(i) requirement:

(i) Systems operating in the 88.1-88.7 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:	
----------------	--

The FM antenna is an internal antenna which permanently attached, and the best case gain of the antenna is 1dBi.

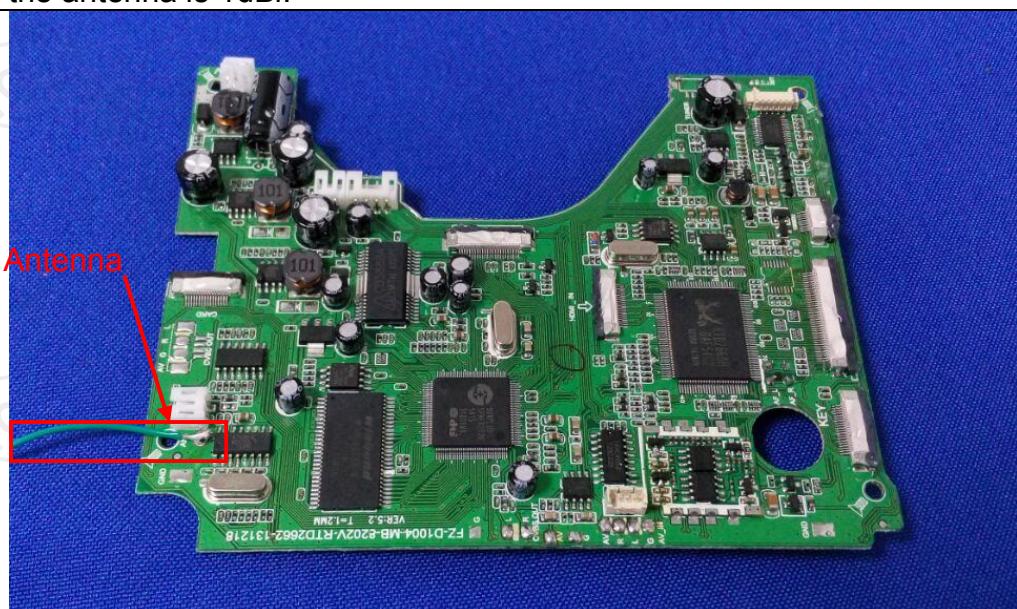

## 6.2. Conducted Emission



### 6.2.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.4:2009														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p>Reference Plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
<b>Test Mode:</b>	Refer to section 4.1 for details														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2009 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	N/A														
<b>Remark:</b>	The EUT is powered by car's power DC 12V, so not applicable.														

## 6.3. Radiated Emission Measurement

### 6.3.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.239 and 15.209																												
<b>Test Method:</b>	ANSI C63.4: 2009 and ANSI C63.10:2013																												
<b>Frequency Range:</b>	9 kHz to 1 GHz																												
<b>Antenna Polarization:</b>	Horizontal & Vertical																												
<b>Receiver Setup:</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value				
Frequency	Detector	RBW	VBW	Remark																									
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																									
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																									
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																									
<b>Limit(Field strength of the fundamental signal):</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>88-108MHz</td> <td>48</td> <td>Average Value</td> </tr> <tr> <td></td> <td>68</td> <td>Peak Value</td> </tr> </tbody> </table> <p><b>Note:</b> Fcc part15.239 (b) The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.</p>					Frequency	Limit (dBuV/m @3m)	Remark	88-108MHz	48	Average Value		68	Peak Value															
Frequency	Limit (dBuV/m @3m)	Remark																											
88-108MHz	48	Average Value																											
	68	Peak Value																											
<b>Limit(Spurious Emissions):</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>30</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>30</td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table>					Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	30	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																											
0.009-0.490	2400/F(KHz)	30																											
0.490-1.705	24000/F(KHz)	30																											
1.705-30	30	30																											
30-88	100	3																											
88-216	150	3																											
216-960	200	3																											
Above 960	500	3																											
<b>Limit (band edge) :</b>	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.																												
	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and</li> </ol>																												

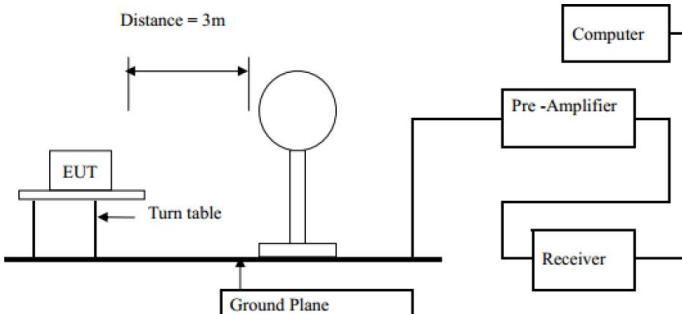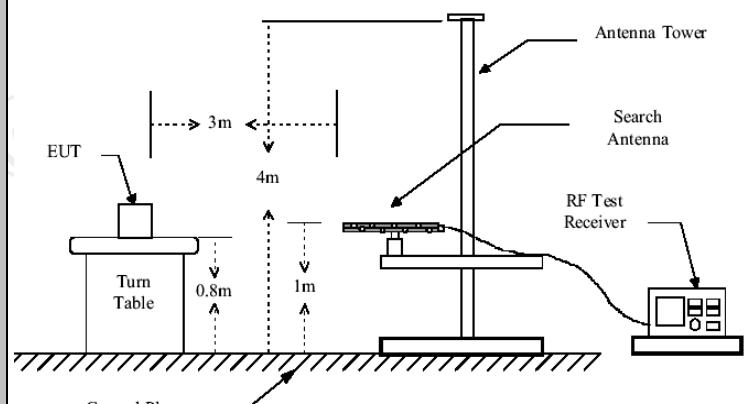	<p>vertical polarizations of the antenna are set to make the measurement.</p> <p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>
<b>Test setup:</b>	<p>For radiated emissions below 30MHz</p>  <p>30MHz to 1GHz</p> 
<b>Test Mode:</b>	Refer to section 4.1 for details
<b>Test results:</b>	PASS

### 6.3.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep.16 , 2015
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Sep.16 , 2015
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep.16 , 2015
Pre-amplifier	HP	8447D	2727A05017	Sep.16 , 2015
Loop antenna	ZHINAN	ZN30900A	12024	Dec.14 , 2015
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep.16 , 2015
Coax cable	TCT	N/A	N/A	Sep.15 , 2015
Coax cable	TCT	N/A	N/A	Sep.15 , 2015
Coax cable	TCT	N/A	N/A	Sep.15 , 2015
Coax cable	TCT	N/A	N/A	Sep.15 , 2015
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

### 6.3.3. Test Data

#### Field Strength of Fundamental

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Limits PK/AV (dBuV/m)	Margin (dB)
88.10	42.58(AV)	H	48	5.42
88.10	60.35(PK)	H	68	7.65
88.10	42.56(AV)	V	48	5.44
88.10	60.12(PK)	V	68	7.88

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Limits PK/AV (dBuV/m)	Margin (dB)
88.30	43.32(AV)	H	48	4.68
88.30	61.65(PK)	H	68	6.35
88.30	44.72(AV)	V	48	3.28
88.30	61.35(PK)	V	68	6.65

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Limits PK/AV (dBuV/m)	Margin (dB)
88.70	44.69(AV)	H	48	3.31
88.70	60.75(PK)	H	68	7.25
88.70	43.58(AV)	V	48	4.42
88.70	60.62(PK)	V	68	7.38

#### Spurious Emissions

#### Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Limit@3m (dB $\mu$ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

**88.10MHz**

Frequency (MHz)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Detector	Direction(H/V)
60.24	29.16	40.00	QP	H
176.20	40.51	43.50	QP	H
264.30	42.88	46.00	QP	H
60.16	28.45	40.00	QP	V
176.20	38.13	43.50	QP	V
264.30	43.27	46.00	QP	V

**88.30MHz**

Frequency (MHz)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Detector	Direction(H/V)
62.25	29.88	40.00	QP	H
176.6	41.42	43.50	QP	H
264.9	43.39	46.00	QP	H
61.26	29.04	40.00	QP	V
176.6	37.17	43.50	QP	V
264.9	43.95	46.00	QP	V

**88.70MHz**


Frequency (MHz)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Detector	Direction(H/V)
63.25	30.26	40.00	QP	H
177.4	41.34	43.50	QP	H
266.1	43.13	46.00	QP	H
63.58	33.48	40.00	QP	V
177.4	39.44	43.50	QP	V
266.1	41.69	46.00	QP	V

**Note** : 1) QP= Quasi-peak

2) Emission Level = Reading Level + Antenna Factor + Cable Loss.

## 6.4. 20dB Occupied Bandwidth

### 6.4.1. Test Specification
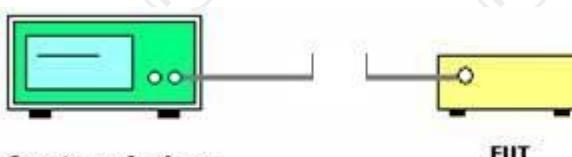
<b>Test Requirement:</b>	FCC Part15 C Section 15.215(c)
<b>Test Method:</b>	ANSI C63.4: 2009
<b>Limit:</b>	200kHz
	<ol style="list-style-type: none"> <li>1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW <math>\geq</math> 1% of the 20 dB bandwidth; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>4. Measure and record the results in the test report.</li> </ol>
<b>Test setup:</b>	 <p><b>Spectrum Analyzer</b>      <b>EUT</b></p>
<b>Test Mode:</b>	Refer to section 4.1 for details
<b>Test results:</b>	PASS

### 6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 15, 2015


**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**6.4.3. Test data**

Test Channel	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
Lowest	152.24	200	PASS
Middle	150.64	200	PASS
Highest	152.24	200	PASS


**Test plots as follows:**

### Lowest channel

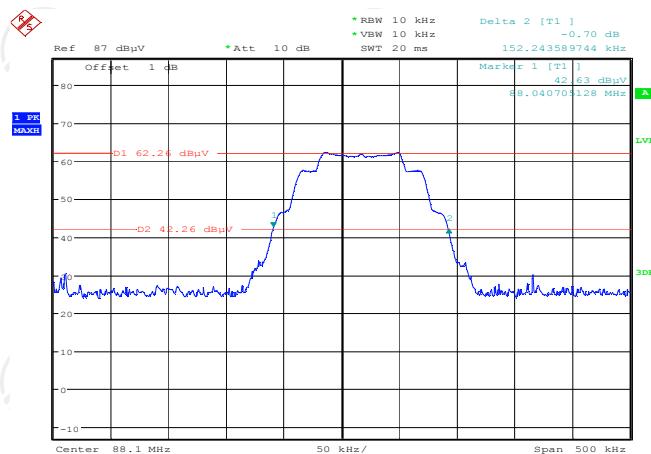


Date: 16.APR.2015 16:36:33

### Middle channel

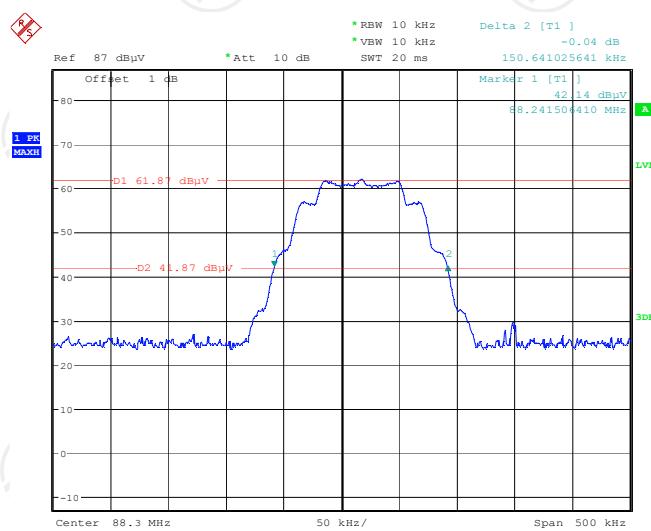

Date: 16.APR.2015 16:38:40

### Highest channel

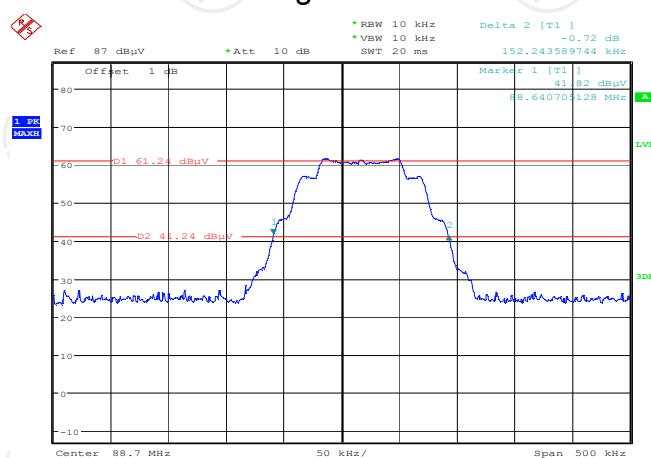

Date: 16.APR.2015 16:44:38

\*\*\*\*\***END OF REPORT**\*\*\*\*\*