

Shenzhen CTL Testing Technology Co., Ltd. Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 15 SUBPART C TEST REPORT

Report Reference No...... CTL1503060561-WF

Compiled by

(position+printed name+signature)..: File administrators Happy Guo

Happy Gui

Name of the organization performing

the tests

Test Engineer Nice Nong

lice Nong

(position+printed name+signature)..:

Approved by

(position+printed name+signature)..: Manager Tracy Qi

Date of issue...... Apr. 02, 2015

Test Firm...... Shenzhen CTL Testing Technology Co., Ltd.

Address...... Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road,

Nanshan, Shenzhen 518055 China.

Applicant's name...... Shenzhen Keyston Technology Co., Ltd

Town, Bao'an District, Shenzhen City, China

Test specification:

Standard FCC Part 15.249: Operation within the bands 920-928 MHz, 2400-

2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

TRF Originator...... Shenzhen CTL Testing Technology Co., Ltd.

Master TRF...... Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Ultrathin Bluetooth Keyboard

Trade Mark Keyston

Models/Type reference KST-193, KST-193TP, KST-193TPF, KST-228, KST-228TP,

KST-228TPF, KST-2281TP, KST-228-2TP, KST-111, KST-112, KST-121, KST-122, KST-131, KST-132, KST-133, KST-134, KST-135, KST-136, KST-137, KST-161, KST-231, KST-241, KST-331, KST-332, KST-411, KST-412, KST-413, KST-414, KST-415, KST-416, KST-431, KST-432, KST-433, KST-434,

44681, 44683

Modulation: FHSS

Work Frequency...... 2402 MHz~2480 MHz

Antenna Type..... internal

FCC ID 2AELOKST-193TPF

Result..... Positive

TEST REPORT

Test Report No. :	CTL1503060561-WF	Apr. 02, 2015
	C1E1303000301-W1	Date of issue

Equipment under Test : Ultrathin Bluetooth Keyboard

Model /Type : KST-193TPF

Listed Models : KST-193, KST-193TP, KST-228, KST-228TP, KST-228TPF,

KST-2281TP,KST-228-2TP, KST-111, KST-112, KST-121, KST-122,

Report No.: CTL1503060561-WF

KST-131, KST-132, KST-133,KST-134, KST-135, KST-136, KST-137, KST-161, KST-231, KST-241, KST-331,KST-332, KST-411, KST-412, KST-413, KST-414, KST-415, KST-416, KST-431, KST-432, KST-433, KST-434, 44681, 44683

Difference Description Only the color and model's name is different

Applicant : Shenzhen Keyston Technology Co.,Ltd

Address : 2/F, Building D West, No. 21 Nanling Road, Xinqiao Village, Shajing

Town, Bao'an District, Shenzhen City, China

Manufacturer Shenzhen Keyston Technology Co.,Ltd

Address 2/F, Building D West, No. 21 Nanling Road, Xinqiao Village, Shajing

Town, Bao'an District, Shenzhen City, China

Test Result according to the standards on page 4:	Positive	
---	----------	--

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Report No.: CTL1503060561-WF

Contents

2.2. Equipment Under Test 5 2.3. Short description of the Equipment under Test (EUT) 5 2.4. EUT operation mode 6 2.5. EUT configuration 6 2.6. Related Submittal(s) / Grant (s) 6 2.7. Modifications 6 3. TEST ENVIRONMENT 7 3.1. Address of the test laboratory 7 3.2. Test Facility 7 3.3. Environmental conditions 7 3.4. Configuration of Tested System 7 3.5. Statement of the measurement uncertainty 8 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 10 4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 13 4.5. Occupied Bandwidth Measurement 30 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42	<u>1.</u>	TEST STANDARDS	4
2.1. General Remarks 5 Equipment Under Test 5 2.2. Equipment Under Test 5 5 2.3. Short description of the Equipment under Test (EUT) 5 5 2.4. EUT operation mode 6 6 2.5. EUT configuration 6 6 6 2.7. Modifications 6 6 6 6 6 6 6 6 6	2.	SUMMARY	5
2.2. Equipment Under Test 5 2.3. Short description of the Equipment under Test (EUT) 5 2.4. EUT operation mode 6 2.5. EUT configuration 6 2.6. Related Submittal(s) / Grant (s) 6 2.7. Modifications 6 3. TEST ENVIRONMENT 7 3.1. Address of the test laboratory 7 3.2. Test Facility 7 3.3. Environmental conditions 7 3.4. Configuration of Tested System 7 3.5. Statement of the measurement uncertainty 8 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 10 4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT			
2.3. Short description of the Equipment under Test (EUT) 5 2.4. EUT operation mode 6 2.5. EUT configuration 6 2.6. Related Submittal(s) / Grant (s) 6 2.7. Modifications 6 3. TEST ENVIRONMENT 7 3.1. Address of the test laboratory 7 3.2. Test Facility 7 3.3. Environmental conditions 7 3.4. Configuration of Tested System 7 3.5. Statement of the measurement uncertainty 8 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 10 4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 13 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42		General Remarks	5
2.4. EUT operation mode 6 2.5. EUT configuration 6 2.6. Related Submittal(s) / Grant (s) 6 2.7. Modifications 6 3. TEST ENVIRONMENT. 7 3.1. Address of the test laboratory 7 3.2. Test Facility 7 3.3. Environmental conditions 7 3.4. Configuration of Tested System 7 3.5. Statement of the measurement uncertainty 8 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 10 4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42			
2.5. EUT configuration 6 2.6. Related Submittal(s) / Grant (s) 6 2.7. Modifications 6 3. TEST ENVIRONMENT 7 3.1. Address of the test laboratory 7 3.2. Test Facility 7 3.3. Environmental conditions 7 3.4. Configuration of Tested System 7 3.5. Statement of the measurement uncertainty 8 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 10 4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42			5
2.6. Related Submittal(s) / Grant (s) 6 2.7. Modifications 6 3. TEST ENVIRONMENT 7 3.1. Address of the test laboratory 7 3.2. Test Facility 7 3.3. Environmental conditions 7 3.4. Configuration of Tested System 7 3.5. Statement of the measurement uncertainty 8 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 10 4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42			6
2.7. Modifications 6 3. TEST ENVIRONMENT			
3.1. Address of the test laboratory 7 3.2. Test Facility 7 3.3. Environmental conditions 7 3.4. Configuration of Tested System 7 3.5. Statement of the measurement uncertainty 8 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 10 4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42			6
3.1. Address of the test laboratory 3.2. Test Facility 3.3. Environmental conditions 3.4. Configuration of Tested System 3.5. Statement of the measurement uncertainty 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 4.2. Fundamental Emissions 4.3. Transmitter Radiated Unwanted Emissions 13 4.4. Band Edge Measurement 30 Occupied Bandwidth Measurement 31 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42	2.7.	Modifications	6
3.1. Address of the test laboratory 3.2. Test Facility 3.3. Environmental conditions 3.4. Configuration of Tested System 3.5. Statement of the measurement uncertainty 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 4.2. Fundamental Emissions 4.3. Transmitter Radiated Unwanted Emissions 13 4.4. Band Edge Measurement 30 Occupied Bandwidth Measurement 31 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42	2	TEST ENVIRONMENT	7
3.2. Test Facility 3.3. Environmental conditions 3.4. Configuration of Tested System 7 3.5. Statement of the measurement uncertainty 8 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS	<u>s.</u>	TEST ENVIRONMENT	<u>/</u>
3.2. Test Facility 3.3. Environmental conditions 3.4. Configuration of Tested System 7 3.5. Statement of the measurement uncertainty 8 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS		14 14	
3.3. Environmental conditions 3.4. Configuration of Tested System 3.5. Statement of the measurement uncertainty 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS			7
3.4. Configuration of Tested System 3.5. Statement of the measurement uncertainty 3.6. Equipments Used during the Test 4. TEST CONDITIONS AND RESULTS			7
3.5. Statement of the measurement uncertainty 3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS			7
3.6. Equipments Used during the Test 9 4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 10 4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42			7
4. TEST CONDITIONS AND RESULTS 10 4.1. Conducted Emissions Test 10 4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42			_
4.1. Conducted Emissions Test 4.2. Fundamental Emissions 4.3. Transmitter Radiated Unwanted Emissions 4.4. Band Edge Measurement 4.5. Occupied Bandwidth Measurement 30 5. ANTENNA REQUIREMENT 41 TEST SETUP PHOTOS OF THE EUT 42	3.6.	Equipments Used during the Test	9
4.1. Conducted Emissions Test 4.2. Fundamental Emissions 4.3. Transmitter Radiated Unwanted Emissions 4.4. Band Edge Measurement 4.5. Occupied Bandwidth Measurement 30 5. ANTENNA REQUIREMENT 41 TEST SETUP PHOTOS OF THE EUT 42			
4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42	<u>4.</u>	TEST CONDITIONS AND RESULTS	10
4.2. Fundamental Emissions 13 4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42			
4.3. Transmitter Radiated Unwanted Emissions 14 4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT			
4.4. Band Edge Measurement 30 4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT 41 6. TEST SETUP PHOTOS OF THE EUT 42			. •
4.5. Occupied Bandwidth Measurement 39 5. ANTENNA REQUIREMENT			
5. ANTENNA REQUIREMENT			
6. TEST SETUP PHOTOS OF THE EUT	4.5.	Occupied Bandwidth Measurement	39
6. TEST SETUP PHOTOS OF THE EUT			
1119	<u>5.</u>	ANTENNA REQUIREMENT	<u> 4 1</u>
1119		0,	
1119		y y	
1119	6	TEST SETUP PHOTOS OF THE FUT	12
7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT44	<u> </u>	ILUI GETOF FILOTOG OF THE EUT	<u> 4 Z</u>
7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT44			
7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT44			
	7.	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	4 4

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.249: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

ANSI C63.4-2009



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Mar. 26, 2015

Testing commenced on : Mar. 26, 2015

Testing concluded on : Apr. 03, 2015

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : ■ 120V / 60 Hz o 115V / 60Hz

o 12 V DC o 24 V DC

Other (specified in blank below)

DC 3.7V from battery

2.3. Short description of the Equipment under Test (EUT)

The EUT is a Ultrathin Bluetooth Keyboard work at 2402~2480 MHz support Bluetooth 3.0. Channel List:

Channel List:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Modulation: 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps(8DPSK)

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

V1.0 Page 6 of 48 Report No.: CTL1503060561-WF

2.4. EUT operation mode

Test Mode(TM)	Description	Remark
TM1	Bottom Channel Transmitting	1
TM2	Middle Channel Transmitting	1
TM3	Top Channel Transmitting	1
TM4	Charging and keeping TX	USB power by PC

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of Y axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

Remark: All modes GFSK, 8DPSK and Pi/4 DQPSK are tested, only the worst case mode (GFSK)

Remark: All modes GFSK, 8DPSK and Pi/4 DQPSK are tested, only the worst case mode (GFSK 1Mbps) is reported .

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

o - supplied by the manufacturer

supplied by the lab

Notebook PC (FCC DoC approved) Manufacturer: DELL

Model No.: PP18L

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AELOKST-193TPF filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

Technolo

2.7. Modifications

No modifications were implemented to meet testing criteria.

CZ Testing

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd. Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3. Environmental conditions

During the measurement the e	nvironmental conditions were within the li	sted ranges:
Temperature:	15-35 ° C	10
Humidity:	30-60 %	A E
Atmospheric pressure:	950-1050mbar	

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System



3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Report No.: CTL1503060561-WF

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~26.5GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2014/07/12	2015/07/11
EMI Test Receiver	R&S	ESCI	103710	2014/07/10	2015/07/09
Spectrum Analyzer	Agilent	E4407B	MY45108355	2014/07/06	2015/07/05
Controller	EM Electronics	Controller EM 1000	N/A	2014/07/06	2015/07/05
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2014/07/12	2015/07/11
Horn Antenna	SCHWARZBECK	BBHA9170	1562	2014/07/12	2015/07/11
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2014/07/12	2015/07/11
LISN	R&S	ENV216	101316	2014/07/10	2015/07/09
LISN	SCHWARZBECK	NSLK8127	8127687	2014/07/10	2015/07/09
Microwave Preamplifier	HP to	8349B	3155A00882	2014/07/10	2015/07/09
Amplifier	HP	8447D	3113A07663	2014/07/10	2015/07/09
Transient Limiter	Com-Power	LIT-153	532226	2014/07/10	2015/07/09
Radio Communication Tester	R&S	CMU200	3655A03522	2014/07/06	2015/07/05
Temperature/Humidity Meter	zhicheng	ZC1-2	22522	2014/07/10	2015/07/09
SIGNAL GENERATOR	HP	8647A	3200A00852	2014/07/10	2015/07/09
Wideband Peak Power Meter	Anritsu	ML2495A	220.23.35	2014/07/06	2015/07/05
Climate Chamber	ESPEC	EL-10KA	A20120523	2014/07/06	2015/07/05
High-Pass Filter	K&L	9SH10- 2700/X12750 -O/O	19100	2014/07/06	2015/07/05
High-Pass Filter	K&L 703	41H10- 1375/U12750 -O/O	SChi.	2014/07/06	2015/07/05

V1.0 Page 10 of 48 Report No.: CTL1503060561-WF

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

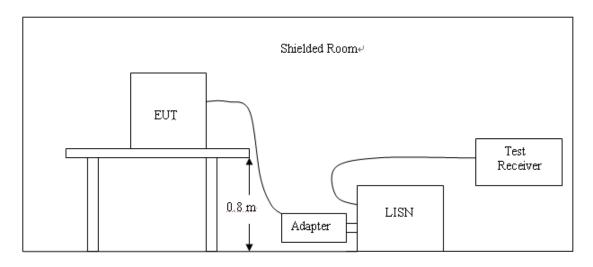

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

The RBW/VBW for 150KHz to 30MHz: 9KHz

Test mode: TM4

V1.0 Page 11 of 48 Report No.: CTL1503060561-WF

CONDUCTED POWER LINE EMISSION LIMIT

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

F=========	Maximum RF Line Voltage (dBμV)					
Frequency (MHz)	CLAS	SS A	CLASS B			
(141112)	Q.P.	Ave.	Q.P.	Ave.		
0.15 - 0.50	79	66	66-56*	56-46*		
0.50 - 5.00	73	60	56	46		
5.00 - 30.0	73	60	60	50		


^{*} Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

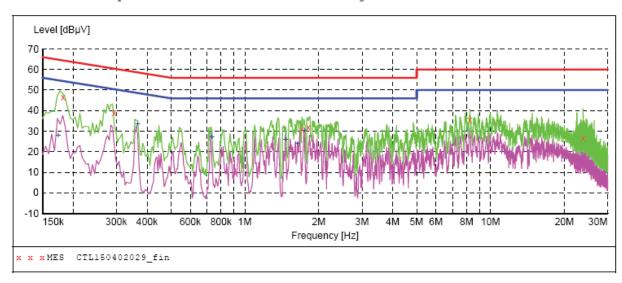

MEASUREMENT RESULT: "CTL150402029_fin"


4/2/2015	10:55	MA						
Frequ	ency	Level	Transd	Limit	Margin	Detector	Line	PΕ
	MHz	dΒμV	dB	dΒμV	dB			
0.18	2000	46.60	10.2	64	17.8	QP	N	GND
0.29	4000	38.80	10.2	60	21.6	QP	N	GND
1.70	6000	31.00	10.3	56	25.0	QP	N	GND
1.81	4000	31.90	10.3	56	24.1	QP	N	GND
8.24	6000	35.40	10.5	60	24.6	QP	N	GND
23.82	8000	26.60	11.1	60	33.4	QP	N	GND

MEASUREMENT RESULT: "CTL150402029_fin2"

4/2/2015 10:5 Frequency MHz		Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
			'				
0.174000	27.80	10.2	55	27.0	AV	N	GND
0.366000	33.60	10.2	49	15.0	AV	N	GND
0.734000	27.20	10.2	46	18.8	AV	N	GND
1.466000	25.80	10.3	46	20.2	AV	N	GND
1.640000	24.10	10.3	46	21.9	AV	N	GND
1.748000	30.20	10.3	46	15.8	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

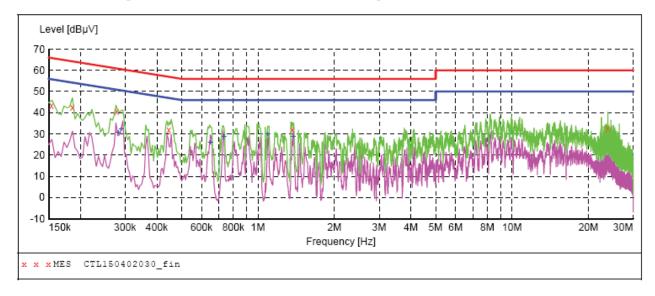

MEASUREMENT RESULT: "CTL150402030 fin"

4/2/2015 Frequ			Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.15	4000	43.30	10.2	66	22.5	QP	L1	GND
0.18	6000	42.70	10.2	64	21.5	QP	L1	GND
0.27	8000	40.50	10.2	61	20.4	QP	L1	GND
0.44	6000	31.90	10.2	57	25.0	QP	L1	GND
1.36	4000	31.80	10.3	56	24.2	QP	L1	GND
23.82	8000	32.60	11.1	60	27.4	QP	L1	GND


MEASUREMENT RESULT: "CTL150402030_fin2"

4/2/2015 10: Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.282000	30.50	10.2	51	20.3	AV	L1	GND
0.290000	32.10	10.2	51	18.4	AV	L1	GND
0.650000	25.80	10.2	46	20.2	AV	L1	GND
0.734000	28.80	10.2	46	17.2	AV	L1	GND
1.094000	29.70	10.3	46	16.3	AV	L1	GND
1.376000	28.50	10.3	46	17.5	AV	L1	GND

V1.0 Page 13 of 48 Report No.: CTL1503060561-WF

4.2. Fundamental Emissions

TEST CONFIGURATION

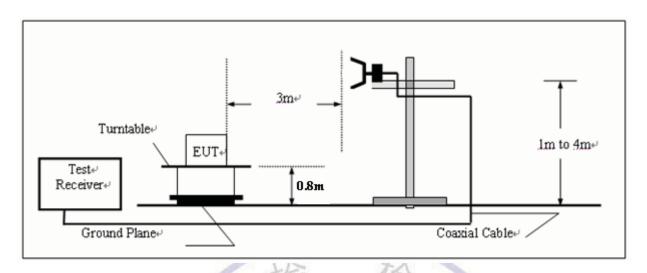

Fundamental Emissions Limit

2400-2483.5 MHz Band: 94 dBuV/m (average)

Peak limit= Average limit + 20dB=114dBuV/m

RBW=1MHz, VBW=3MHz, Peak detector for Peak emissions measurement.

RBW=1MHz, VBW=10Hz, Peak detector for Average emissions measurement.

TEST RESULTS

	Field Strength of Fundamental Emissions Result										
Modulation	Frequency	Max.Fundamental	Margin	Limit	Туре						
Mode	(MHz)	(dBuV/m)@3m	(dB)	(dBuV/m)@3m							
GFSK	2402	92.27	21.73	114	peak						
GFSK	2402	76.48	17.52	94	average						
GFSK	2441	91.80	22.2	114	peak						
GFSK	2441	75.54	18.46	94	average						
GFSK	2480	92.39	21.61	114	peak						
GFSK	2480	75.92	18.08	94	average						


Note: Measurement worst emissions of receive antenna polarization: Vertical.

V1.0 Page 14 of 48 Report No.: CTL1503060561-WF


4.3. Transmitter Radiated Unwanted Emissions

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

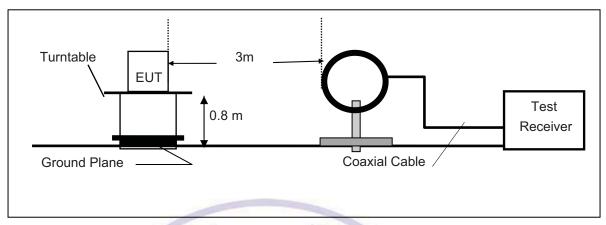

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

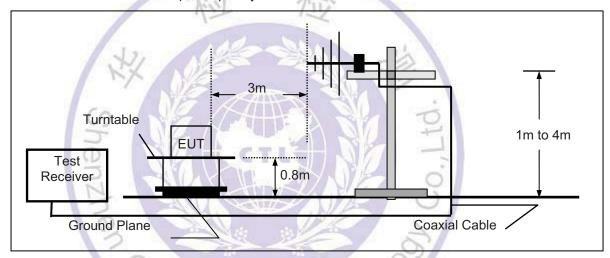

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

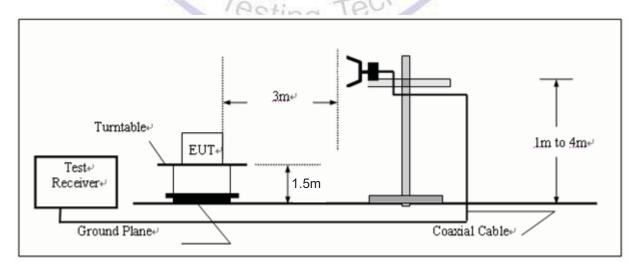

V1.0 Page 15 of 48 Report No.: CTL1503060561-WF

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (μV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.
- 7. Based on the Frequency Generator in the device include 24MHz. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

Three axes are chosen for pretest, the Y axis is the worst mode for final test. For battery operated equipment, the equipment tests shall be performed using a new battery.

V1.0 Page 16 of 48 Report No.: CTL1503060561-WF


TEST RESULTS

All the test modes (TM1, TM2, TM3 and TM4) completed for test. The worst case of Radiated Emission is TM1; the test data of this mode was reported.

Below 1GHz Test Results:

SWEEP TABLE: "test (30M-1G)"

NEER IRDUL. Short Description: Field Strength Start Stop Detector Meas. IF Transducer Frequency Frequency Time Bandw. 30.0 MHz 1.0 GHz 300.0 ms 120 kHz MaxPeak JB1

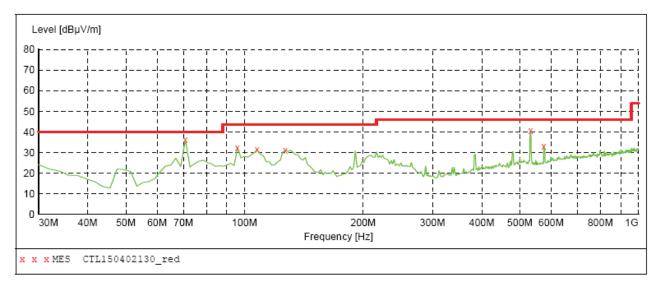

MEASUREMENT RESULT: "CTL150402130 red"

4/2/2015 2:31PM											
Frequency MHz	Level dBµV/m		Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization			
70.740000	36.10	8.4	40.0	3.9		0.0	0.00	VERTICAL			
95.960000	32.30	10.6	43.5	11.2		0.0	0.00	VERTICAL			
107.600000	31.50	13.3	43.5	12.0		0.0	0.00	VERTICAL			
127.000000	31.20	15.0	43.5	12.3		0.0	0.00	VERTICAL			
532.460000	40.50	20.6	46.0	5.5		0.0	0.00	VERTICAL			
575.140000	33.20	21.4	46.0	12.8		0.0	0.00	VERTICAL			

Remark:


Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz (1) was verified, and no any emission was found except system noise floor.

- 411114

- * denotes emission frequency which appearing within the Restricted Bands specified in (2)provision of 15.205, then the general radiated emission limits in 15.209 apply.
- The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz (3) for measuring above 1 GHz, below 30MHz was 10KHz.

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength Start Stop Detector Meas. Transducer Frequency Frequency Time Bandw.

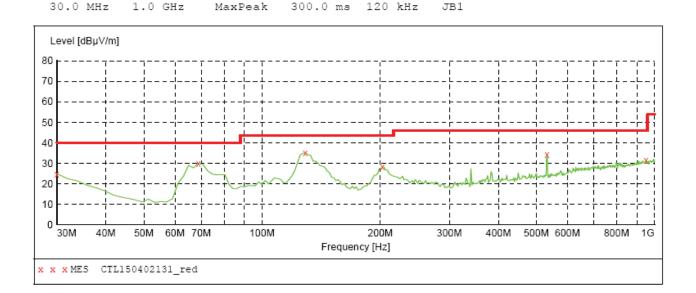

MEASUREMENT RESULT: "CTL150402131 red"

4/2	/2	015	2:	32PM
	_			-

-, -,								
Frequency MHz	Level dBµV/m		Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.80	21.1	40.0	15.2		0.0	0.00	HORIZONTAL
68.800000	30.00	8.4	40.0	10.0		0.0	0.00	HORIZONTAL
128.940000	35.10	14.9	43.5	8.4		0.0	0.00	HORIZONTAL
202.660000	28.20	14.4	43.5	15.3		0.0	0.00	HORIZONTAL
532.460000	34.30	20.6	46.0	11.7		0.0	0.00	HORIZONTAL
951.500000	31.60	26.7	46.0	14.4		0.0	0.00	HORIZONTAL

Remark:


- Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz (1) was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz (3)for measuring above 1 GHz, below 30MHz was 10KHz.

Page 18 of 48 Report No.: CTL1503060561-WF

V1.0

Above 1 GHz Test Results:

Bottom Channel (2402MHz):

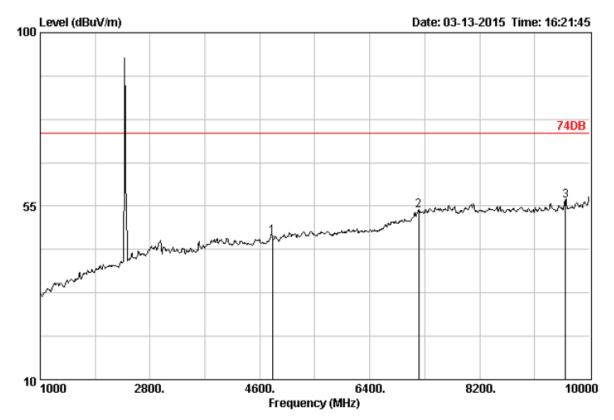


Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

Limit : 74DB Env. / Ins. : 23*C/54%

Engineer EUT Power M/N Test Mode Data no. : 712

Ant. pol. : HORIZONTAL

		Ant.	Cable		Emission	n		
	Freq.	Factor		_	Level (dBuV/m)	Limits	Margin (dB)	Remark
1	4804.00	33.48	6.91	41.10	47.15	74.00	26.85	Peak
2	7206.00	36.92	9.18	42.81	53.88	74.00	20.12	Peak
3	9608.00	38.53	10.97	42.83	56.34	74.00	17.66	Peak

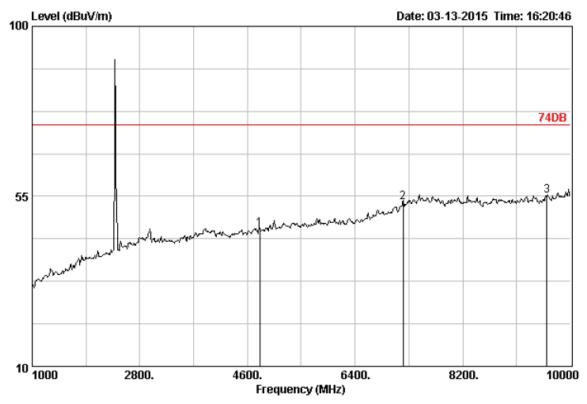

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118


Limit : 74DB Env. / Ins. : 23*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

Data no. : 711 Ant. pol. : VERTICAL

		Ant.	Cable		Emission	n		
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)	
1	4804.00	33.48	6.91	40.41	46.46	74.00	27.54	Peak
2	7206.00	36.92	9.18	42.38	53.45	74.00	20.55	Peak
3	9608.00	38.53	10.97	41.69	55.20	74.00	18.80	Peak



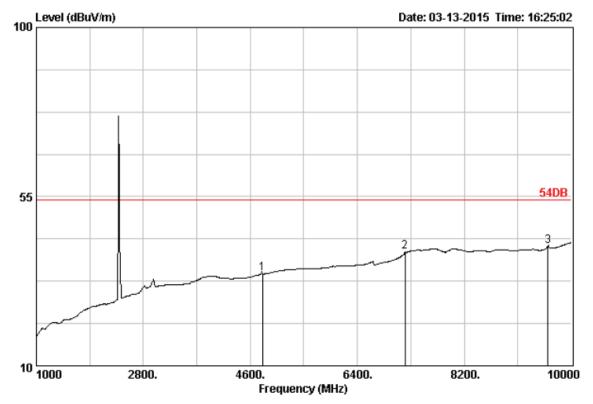


Site no. : 3m Chamber Data no. : 713

Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL

Site no. : 3m Chamber
Dis. / Ant. : 3m DRH-118
Limit : 54DB
Env. / Ins. : 23*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

		Ant.	Cable		Emission	n		
	Freq.	Factor		_		Limits	_	Remark
	(MHz)	(dB)	(dB)	(aBuv)	(dBuV/m)	(dBuv/m	(dB)	
	4804 00	22 40	6.91	28.63	34.68	54.00	19.32	hrenese
1	4804.00	33.40	0.91	20.03	34.00	34.00	19.32	Average
2	7206.00	36.92	9.18	29.18	40.25	54.00	13.75	Average
3	9608.00	38.53	10.97	28.33	41.84	54.00	12.16	Average

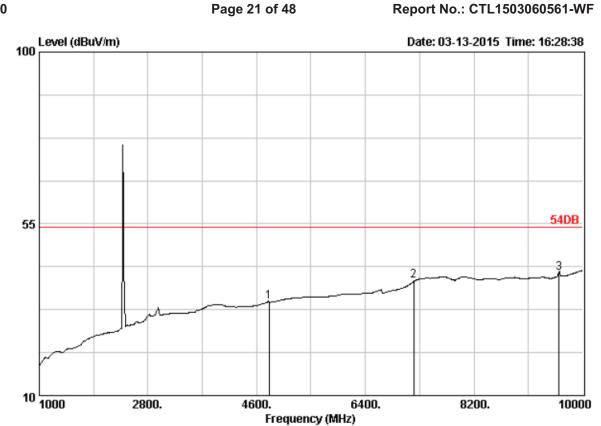

Data no. : 714

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL

: 54DB Limit Env. / Ins. : 23*C/54%


Engineer EUT Power M/N Test Mode

		Ant.	Cable		Emission	ı		
	Freq. (MHz)	Factor (dB)	Loss (dB)		Level (dBuV/m)	Limits (dBuV/m	Margin (dB)	Remark
1	4804.00	33.48	6.91	28.56	34.61	54.00	19.39	Average
2	7206.00	36.92	9.18	29.04	40.11	54.00	13.89	Average
3	9608.00	38.53	10.97	28.63	42.14	54.00	11.86	Average

Page 22 of 48 Report No.: CTL1503060561-WF

Middle Channel (2441 MHz):

V1.0

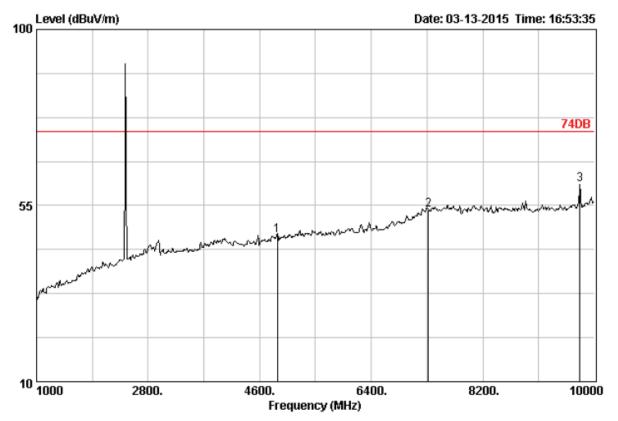

Site no. : 3m Chamber


Dis. / Ant. : 3m DRH-118

Limit : 74DB Env. / Ins. : 23*C/54%

Engineer : EUT : Power : M/N : Test Mode : Data no. : 716

Ant. pol. : HORIZONTAL

		Ant.	Cable		Emissior	n		
	Freq.			_		Limits	_	Remark
	(MHz)	(dB)	(ав)	(abuv)	(dBuV/m)	(авиу/т	(dB)	
1	4882.00	33.60	6.95	41.21	47.46	74.00	26.54	Peak
2	7323.00	37.46	9.23	42.23	53.92	74.00	20.08	Peak
3	9766.00	38.67	11.04	46.23	60.27	74.00	13.73	Peak

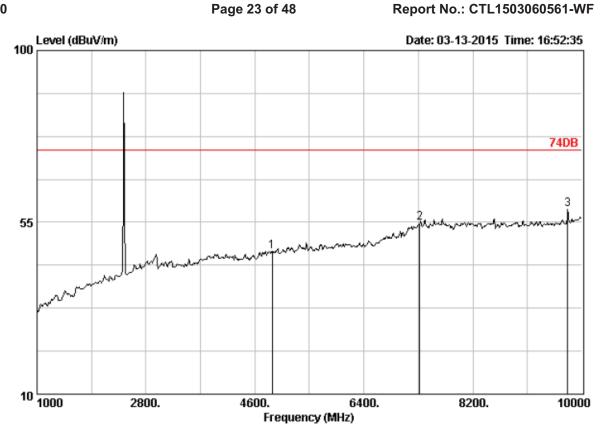

Data no. : 715

Ant. pol. : VERTICAL


Site no. : 3m Chamber

Dis. / Ant. : 3m DRH-118 Limit : 74DB

Env. / Ins. : 23*C/54% Engineer

EUT Power M/N Test Mode :

		Ant.	Cable						
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark	
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)		
1	4882.00	33.60	6.95	41.02	47.27	74.00	26.73	Peak	
2	7323.00	37.46	9.23	43.28	54.97	74.00	19.03	Peak	
3	9764.00	38.67	11.04	44.24	58.27	74.00	15.73	Peak	

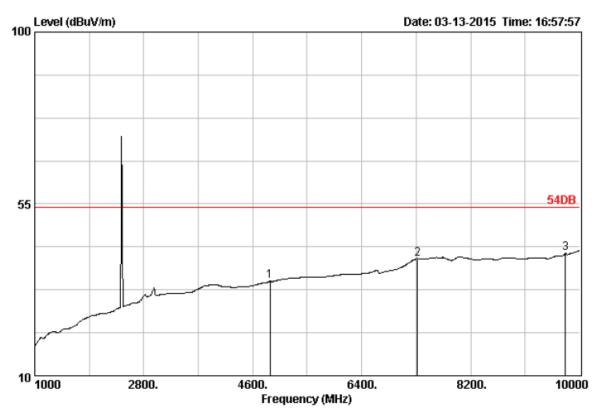


Site no. : 3m Chamber Data no. : 717

Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL

Limit : 54DB Env. / Ins. : 23*C/54%

Engineer : EUT : Power : M/N : Test Mode :

		Ant.	Cable		Emission	1		
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)	
1	4882.00	33.60	6.95	28.49	34.74	54.00	19.26	Average
2	7323.00	37.46	9.23	28.97	40.66	54.00	13.34	Average
3	9764.00	38.67	11.04	28.15	42.18	54.00	11.82	Average

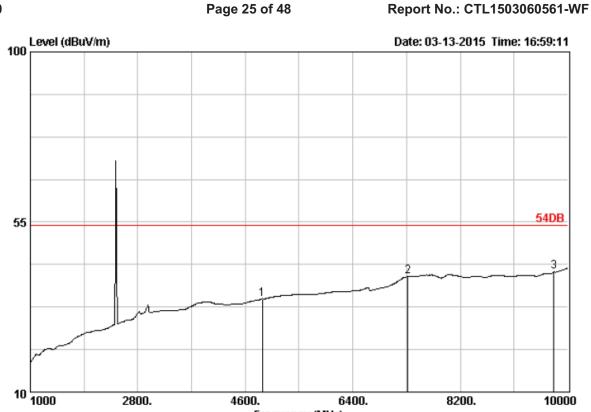

Frequency (MHz)


Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

Limit : 54DB Env. / Ins. : 23*C/54%

Engineer EUT : Power : M/N : Test Mode : Data no. : 718 Ant. pol. : VERTICAL

		Ant.	Cable		Emission	ı		
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)	
1	4882.00	33.60	6.95	28.42	34.67	54.00	19.33	Average
2	7323.00	37.46	9.23	28.94	40.63	54.00	13.37	Average
3	9764.00	38.67	11.04	27.93	41.96	54.00	12.04	Average

Top Channel (2480MHz):

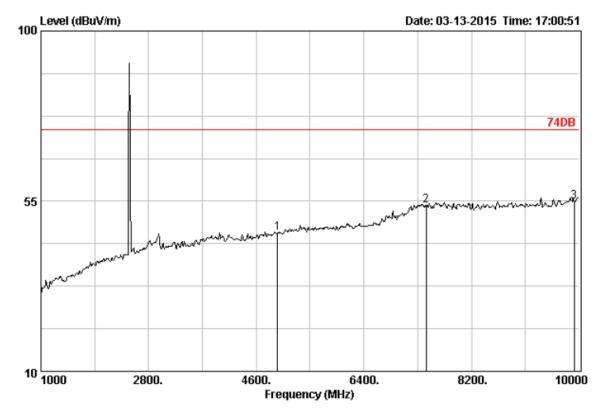

Site no. : 3m Chamber

Dis. / Ant. : 3m DRH-118


Limit : 74DB Env. / Ins. : 23*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

Data no. : 719

Ant. pol. : HORIZONTAL

		Ant.	Cable		Emission	ı		
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)	
1	4960.00	33.86	7.01	39.87	46.49	74.00	27.51	Peak
2	7440.00	37.64	9.28	41.87	53.82	74.00	20.18	Peak
3	9920.00	38.90	11.10	40.25	54.88	74.00	19.12	Peak

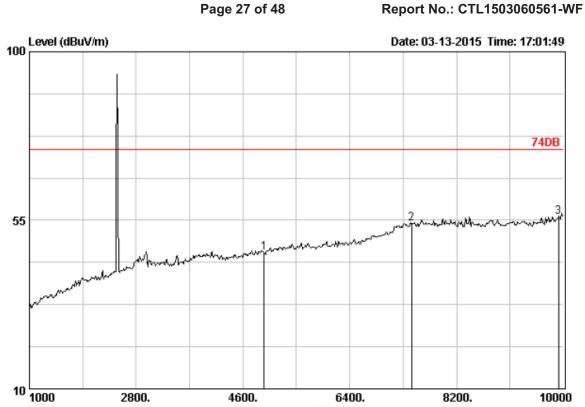

Frequency (MHz)

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

2800.

Limit : 74DB Env. / Ins. : 23*C/54%

Engineer EUT Power : M/NTest Mode : Data no. : 720 Ant. pol. : VERTICAL


8200.

10000

6400.

	Freq.	Ant. Factor (dB)		Reading	Emission Level (dBuV/m)	Limits	Margin (dB)	Remark
1	4960.00	37.64	7.01	39.64	46.26	74.00	27.74	Peak
2	7440.00		9.28	42.15	54.10	74.00	19.90	Peak
3	9920.00		11.10	41.24	55.87	74.00	18.13	Peak

4600.

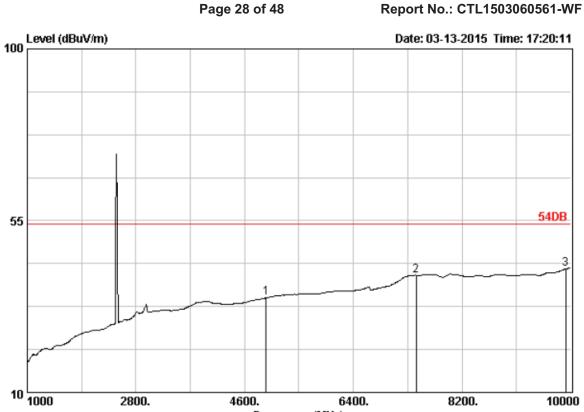

Frequency (MHz)

6400.

8200.

10000

Site no. : 3m Chamber Data no. : 721

2800.

Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL


4600.

Limit : 54DB Env. / Ins. : 23*C/54%

Engineer EUT Power M/N Test Mode

		Ant.	Cable		Emission	ı		
	Freq. (MHz)	Factor (dB)	Loss (dB)	_	Level (dBuV/m)		Margin (dB)	Remark
1	4960.00	33.86	7.01	28.18	34.80	54.00	19.20	Average
2	7440.00	37.64	9.28	28.74	40.69	54.00	13.31	Average
3	9920.00	38.90	11.10	27.71	42.34	54.00	11.66	Average



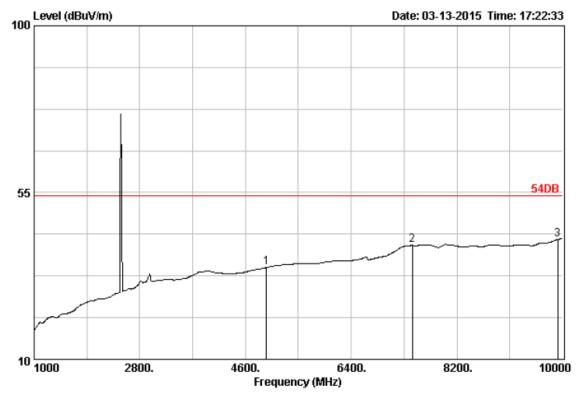

Site no. : 3m Chamber

Dis. / Ant. : 3m DRH-118

Limit : 54DB Env. / Ins. : 23*C/54%

Engineer : EUT : Power : M/N : Test Mode : Data no. : 722 Ant. pol. : VERTICAL

		Ant.	Cable		Emission	n		
	Freq. (MHz)	Factor	Loss (dB)	_	Level		Margin (dB)	Remark
	(HHZ)							
1	4960.00	33.86	7.01	28.24	34.86	54.00	19.14	Average
2	7440.00	37.64	9.28	28.78	40.73	54.00	13.27	Average
3	9920.00	38.90	11.10	27.75	42.38	54.00	11.62	Average

Note: above 10GHz up to 25GHz was verified, and no any emission was found except system noise floor.

V1.0 Page 30 of 48 Report No.: CTL1503060561-WF

4.4. Band Edge Measurement

TEST CONFIGURATION


Same as Section 4.2

TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1 MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. Peak detector is used for both.

LIMIT


FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

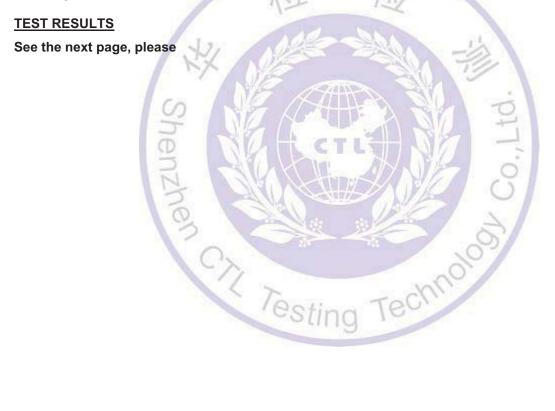

Radiated Test:

Operation Mode: TX on Bot Channel

Polarity: Hor.

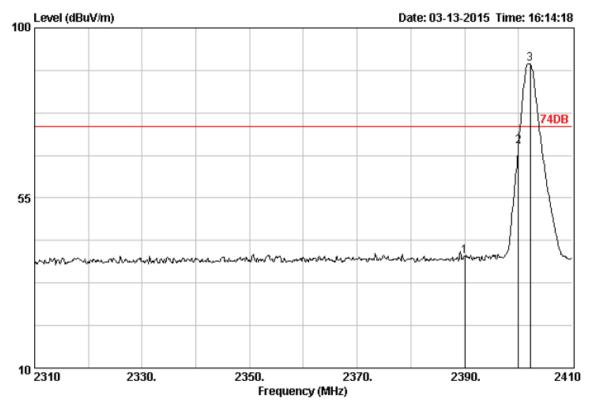

Data no. : 708

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL

Limit : 74DB Env. / Ins. : 23*C/54%

Engineer EUT Power M/NTest Mode :

		Ant.	Cable		Emission	ı		
	Freq. (MHz)			_	Level (dBuV/m)	Limits (dBuV/m	Margin (dB)	Remark
1	2390.00	28.78	4.61	41.59	39.62	74.00	34.38	Peak
2	2400.00	28.78	4.61	70.60	68.63	74.00	5.37	Peak



Frequency (MHz)

2370.

2390.

2410

Site no. : 3m Chamber Data no. : 710

2330.

Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL

2350.

Limit : 54DB Env. / Ins. : 23*C/54%


Engineer EUT Power : M/N Test Mode

		Ant.	Cable		Emission	ı		
	Freq. (MHz)	Factor (dB)		_	Level (dBuV/m)	Limits (dBuV/m	Margin (dB)	Remark
1	2390.00	28.78	4.61	27.73	25.76	54.00	28.24	Average
2	2400.00	28.78	4.61	52.25	50.28	54.00	3.72	Average

Report No.: CTL1503060561-WF

Operation Mode: TX on Bot Channel

Polarity: Ver.

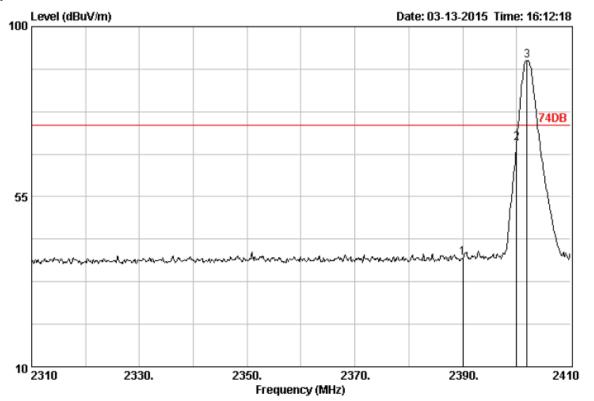


Site no. : 3m Chamber Data no. : 707

Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL

Limit : 74DB Env. / Ins. : 23*C/54%

Engineer : EUT : Power : M/N : Test Mode :

		Ant.	Cable		Emissior	ı		
	Freq. (MHz)	Factor (dB)		_	Level (dBuV/m)	Limits (dBuV/m	Margin (dB)	Remark
1	2390.00	28.78	4.61	40.77	38.80	74.00	35.20	Peak
2	2400.00	28.78	4.61	71.08	69.11	74.00	4.89	Peak

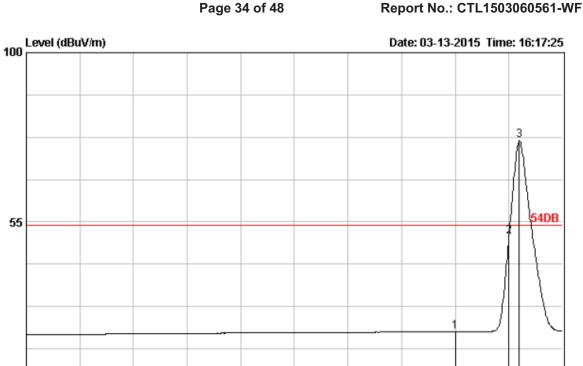

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

2330.

: 54DB Env. / Ins. : 23*C/54%

10 2310

Engineer EUT Power M/N Test Mode

55

Data no. : 709 Ant. pol. : VERTICAL

2390.

2410

2370.

		Ant.	Cable		Emission	ı			
	Freq.	Factor		_		Limits	Margin	Remark	
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)		
1	2390.00	28.78	4.61	27.73	25.76	54.00	28.24	Average	
2	2400.00	28.78	4.61	53.00	51.03	54.00	2.97	Average	

2350.


Frequency (MHz)

Note: The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

Page 35 of 48 Report No.: CTL1503060561-WF

Operation Mode: TX on Top Channel

Polarity: Hor.

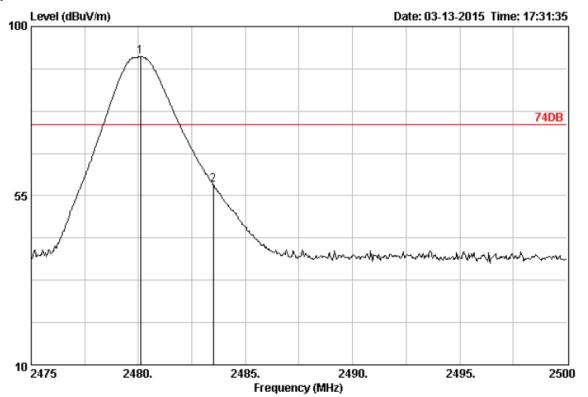

Site no. : 3m Chamber

Dis. / Ant. : 3m DRH-118


Limit : 74DB Env. / Ins. : 23*C/54%

Engineer EUT Power : M/NTest Mode : Data no. : 726

Ant. pol. : HORIZONTAL

		Ant.	Cable		Emission	n		
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)	
2	2483.50	28.93	4.70	59.61	57.86	74.00	16.14	Peak



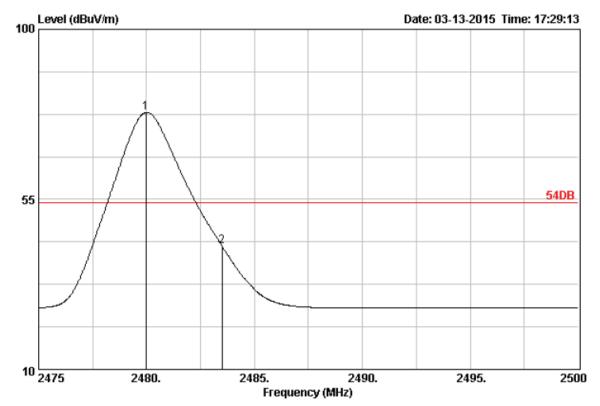

Site no. : 3m Chamber

Dis. / Ant. : 3m DRH-118

Limit : 54DB Env. / Ins. : 23*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

Data no. : 724


Ant. pol. : HORIZONTAL

		Ant.	Cable		Emission	n		
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)	
2	2483.50	28.93	4.70	44.28	42.53	54.00	11.47	Average

Operation Mode: TX on Top Channel

Report No.: CTL1503060561-WF Page 37 of 48

Polarity: Ver.

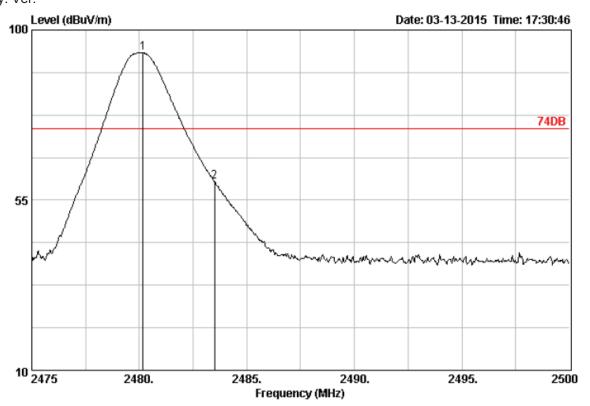

Site no. : 3m Chamber Data no. : 725


Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL

Limit : 74DB Env. / Ins. : 23*C/54%

Engineer EUT Power M/NTest Mode

	Ant.	Cable		Emissior	ı		
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)	

2483.50 28.93 4.70 61.56 59.81 74.00 14.19 Peak

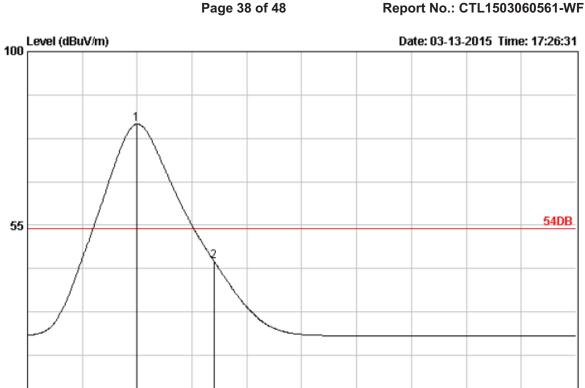

Frequency (MHz)

Site no. : 3m Chamber

2480.

Dis. / Ant. : 3m DRH-118

Limit : 54DB Env. / Ins. : 23*C/54%

Engineer EUT Power M/NTest Mode Data no. : 723

2490.

Ant. pol. : VERTICAL

2495.

2500

		Ant.	Cable		Emission	ı		
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m	(dB)	
2	2483.50	28.93	4.70	47.45	45.70	54.00	8.30	Average

2485.

Note: The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.


4.5. Occupied Bandwidth Measurement

Measurement Procedure

- 1. Set EUT as keeping TX mode
- 2. RBW ≥ 1% of the 20 dB bandwidth, VBW≥RBW.
- 3. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.


Measurement Results

2402MHz

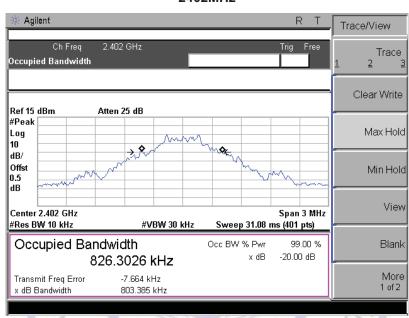

20dB Bandwidth: 803.385 KHz


2441MHz

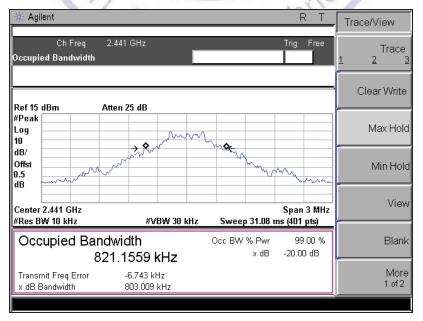

20dB Bandwidth: 803.009 KHz

Report No.: CTL1503060561-WF

2480MHz

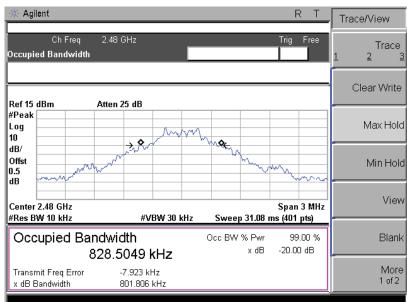



V1.0 Page 41 of 48 Report No.: CTL1503060561-WF

5. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 0 dBi.



6. Test Setup Photos of the EUT

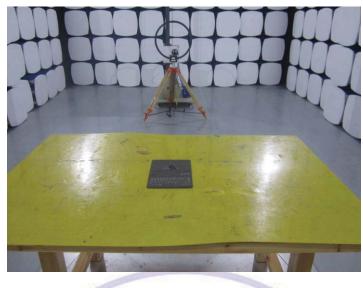









7. External and Internal Photos of the EUT

External Photos of EUT
















Report No.: CTL1503060561-WF

Internal Photos of EUT

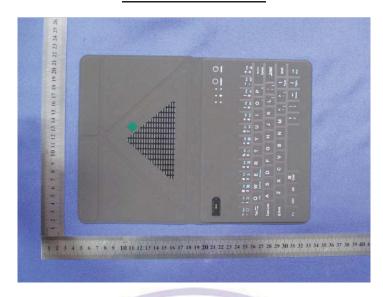

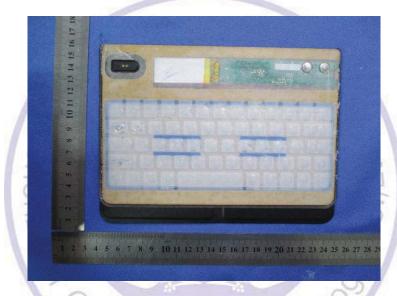



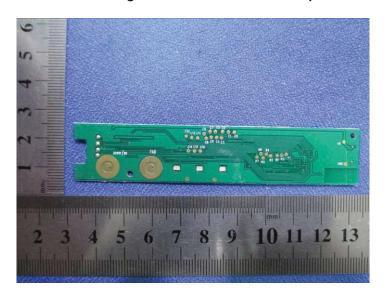



.....End of Report.....