



FCC- TEST REPORT

Report Number : **68.910.14.009.01** Date of Issue: Jul 10, 2015

Model : **PL1M-00U098**

Product Type : Apps Controlled automatic watch winder with LED light and door lock

Applicant : SPIN-R LTD.

Address : BLK A, 9/F GOODVIEW IND BLDG, 11 KIN FAT STREET,

TUEN MUN, Hong Kong

Production Facility : Dongguan Yijue Express Package Limited

Address : Ma Ti Gang No.1 Industrial Zone, Da Lin Shan District, Dongguan

City, Guangdong, PEOPLE'S REPUBLIC OF CHINA

Test Result : **■ Positive** Negative

Total pages including Appendices : 26

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems test configuration	9
9	Technical Requirement	10
9.1	Conducted Emission	10
9.2	Conducted peak output power	13
9.3	6dB bandwidth	14
9.4	Power spectral density	16
9.5	Spurious RF conducted emissions	17
9.6	Band edge	21
9.7	Spurious radiated emissions for transmitter	23
10	Test Equipment List	25
11	System Measurement Uncertainty	26



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

Telephone: 86 755 8828 6998
Fax: 86 755 828 5299



3 Description of the Equipment under Test

Description of the Equipment Under Test

Product: Apps Controlled automatic watch winder with LED light and door lock

Model no.: PL1M-00U098

FCC ID: 2AEO9U098

Options and accessories: SPIN-R

Rating: 3.7VDC (Supplied by Lithium rechargeable battery)
7.5VDC (Supplied by adapter)
Adapter input: 100-240VAC, 50-60Hz
Adapter output: 7.5VDC, 2A)

RF Transmission Frequency: 2402-2480MHz

No. of Operated Channel: 40

Modulation: GFSK

Antenna Type: PCB Antenna

Antenna Gain: 0dBi

Description of the EUT: The Equipment Under Test (EUT) is a Apps Controlled automatic watch winder with LED light and door lock with Bluetooth function operating at 2.4GHz



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-14 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB558074 D01 DTS Meas Guidance v03r02 and ANSI C63.10 (2013).



5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C		Pages	Test Site	Test Result		
Test Condition				Pass	Fail	N/A
§15.207 Conducted emission AC power port	10	Site 1	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
§15.247 (b) (1) Conducted peak output power	13	Site 1	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
§15.247(a)(1) 20dB bandwidth	---	---	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>			
§15.247(a)(1) Carrier frequency separation	---	---	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>			
§15.247(a)(1)(iii) Number of hopping frequencies	---	---	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>			
§15.247(a)(1)(iii) Dwell Time	---	---	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>			
§15.247(a)(2) 6dB bandwidth	14	Site 1	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
§15.247(e) Power spectral density	16	Site 1	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
§15.247(d) Spurious RF conducted emissions	17	Site 1	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
§15.247(d) Band edge	21	Site 1	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
§15.247(d) & §15.209 Spurious radiated emissions for transmitter	23	Site 1	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
§15.203 Antenna requirement	See note 1		<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a permanently PCB Antenna, which gain is 0dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.



6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AEO9U098, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C.

SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: Nov 12, 2014

Testing Start Date: Nov 13, 2014

Testing End Date: Jul 08, 2015

- Jiangsu TÜV Product Service Ltd. – Shenzhen Branch -

Reviewed by:

Phoebe Hu
EMC Project Manager

Prepared by:


Calvin Weng
EMC Project Engineer

Tested by:


Leon Zhang
EMC Test Engineer

7 Test Setups


7.1 AC Power Line Conducted Emission test setups

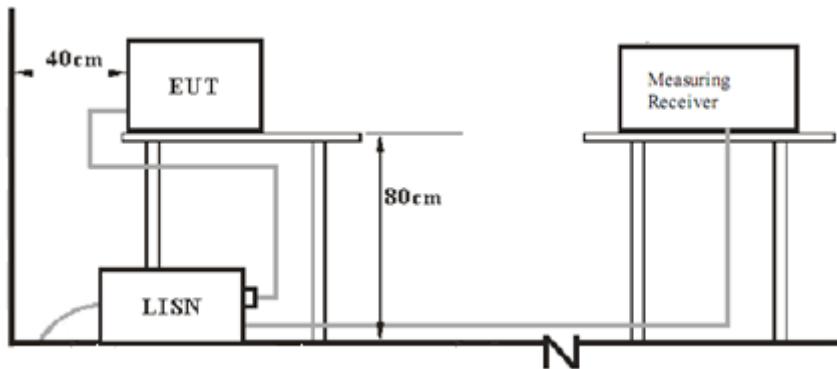

7.2 Radiated test setups

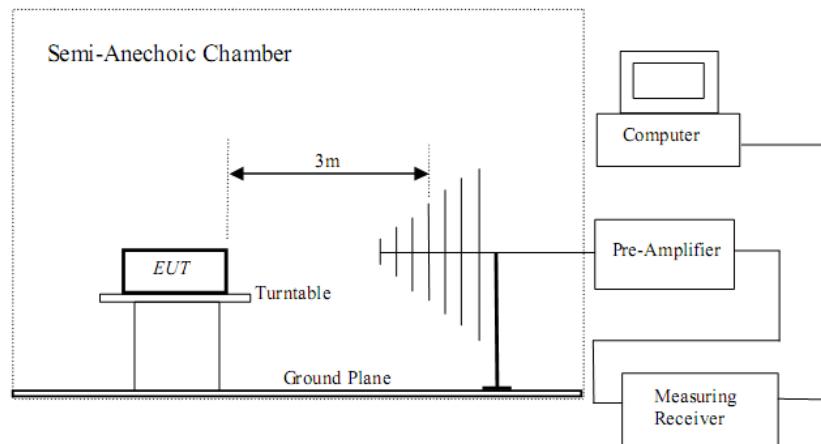

7.3 Conducted RF test setups





8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
---	---	---	---

Test software: N/A.

The system was configured to channel 0, 19, and 39 for the test.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


Limit

According to §15.207, conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency


Product Type : Apps Controlled automatic watch winder with LED light and door lock
 M/N : PL1M-00U098
 Operating Condition : Charging + BT transmitting
 Test Specification : Line
 Comment : AC 120V/60Hz

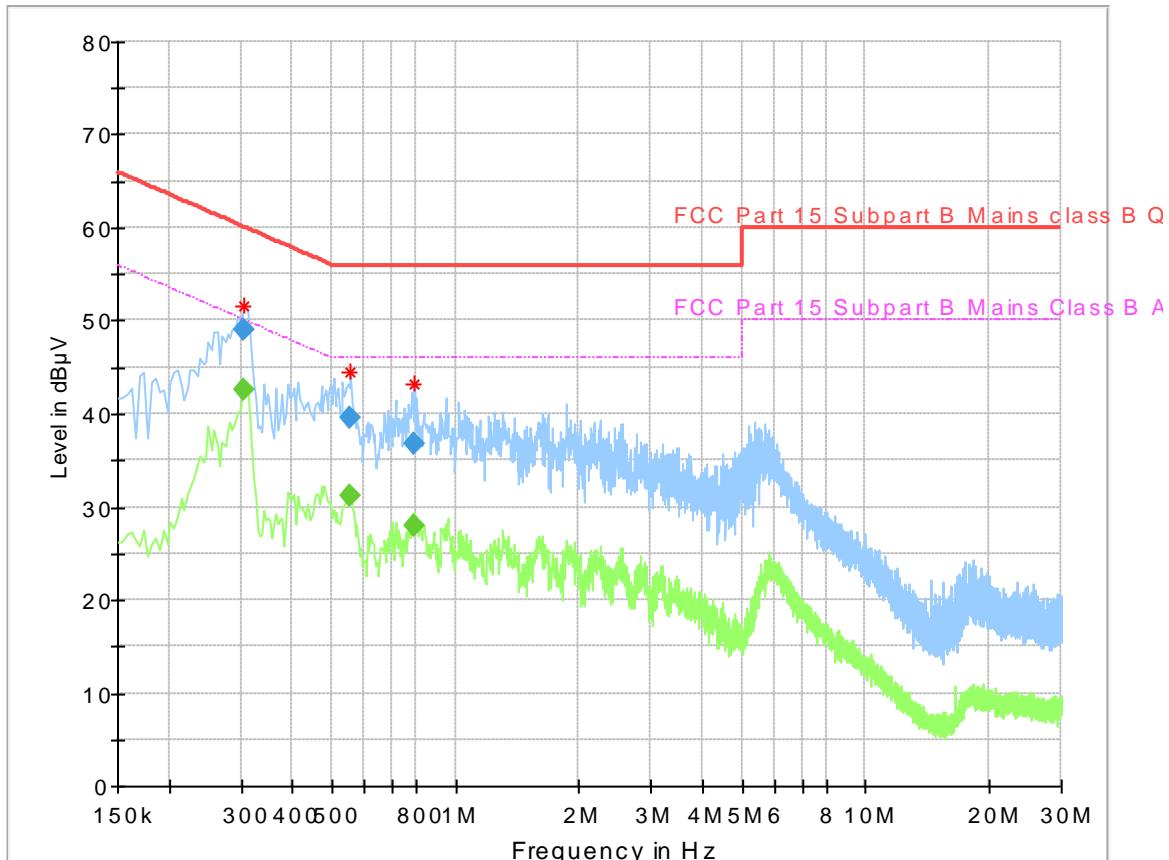

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.305500	---	42.62	50.09	7.47	L1	10.2
0.305500	49.05	---	60.09	11.04	L1	10.2
0.553500	---	31.10	46.00	14.90	L1	10.1
0.553500	39.49	---	56.00	16.51	L1	10.1
0.793500	---	28.03	46.00	17.97	L1	9.9
0.793500	36.71	---	56.00	19.29	L1	9.9

Product Type : Apps Controlled automatic watch winder with LED light and door lock
 M/N : PL1M-00U098
 Operating Condition : Charging + BT transmitting
 Test Specification : Neutral
 Comment : AC 120V/60Hz

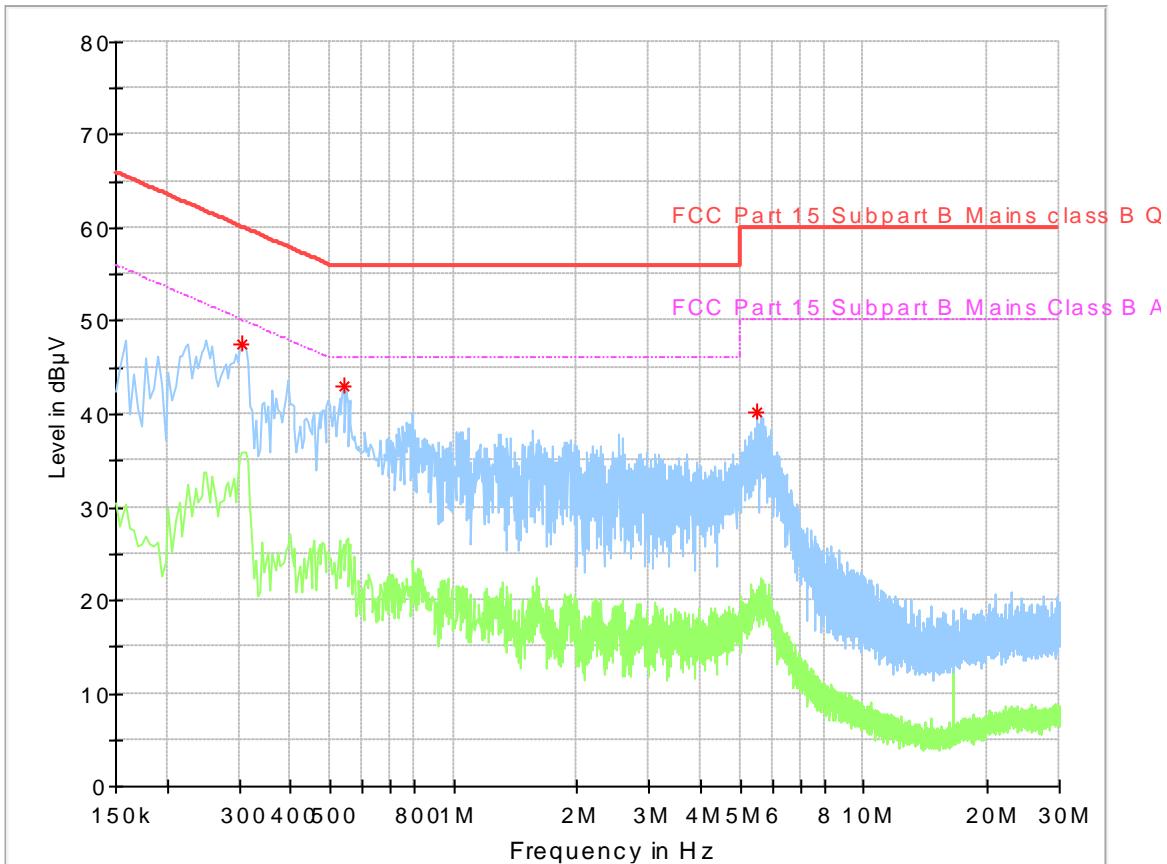

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.306000	47.60	60.08	12.47	N	10.1
0.538000	43.10	56.00	12.90	N	10.0
5.474000	40.32	60.00	19.68	N	9.8

9.2 Conducted peak output power

Test Method

1. Use the following spectrum analyzer settings:
RBW > the 6 dB bandwidth of the emission being measured, VBW \geq 3RBW, Span \geq 3RBW
Sweep = auto, Detector function = peak, Trace = max hold.
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

Limits

According to §15.247 (b) (1), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30

Test result as below table

Frequency MHz	Conducted Peak Output Power dBm	Result
Top channel 2402MHz	-7.18	Pass
Middle channel 2440MHz	-7.72	Pass
Bottom channel 2480MHz	-8.17	Pass

9.3 6dB bandwidth

Test Method

1. Use the following spectrum analyzer settings:
RBW=100K, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit


Limit [kHz]

≥ 500

Test result


Frequency MHz	6dB bandwidth kHz	Result
Top channel 2402MHz	903.0	Pass
Middle channel 2440MHz	898.7	Pass
Bottom channel 2480MHz	907.4	Pass

2402MHz

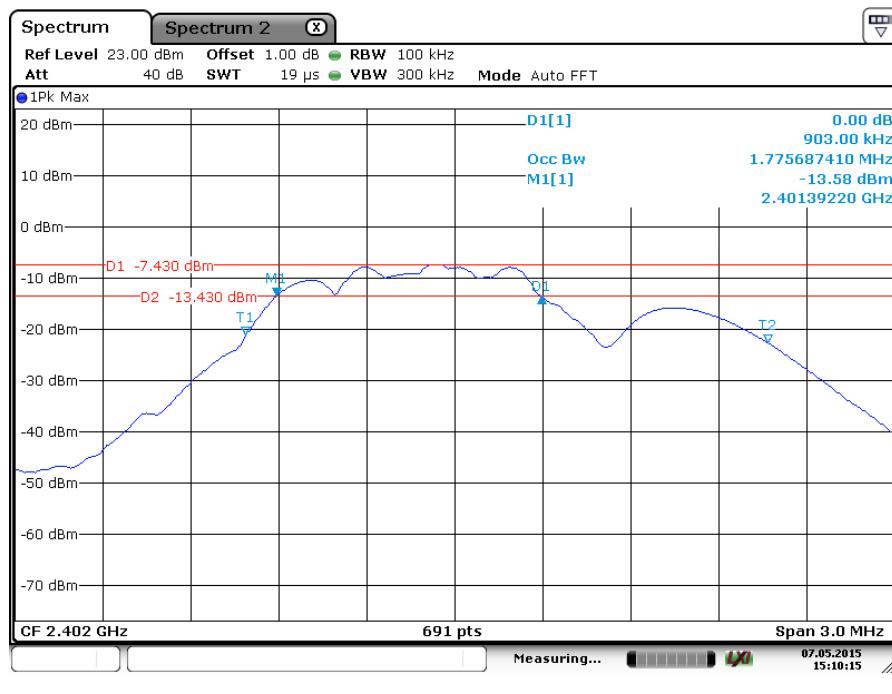




2440MHz

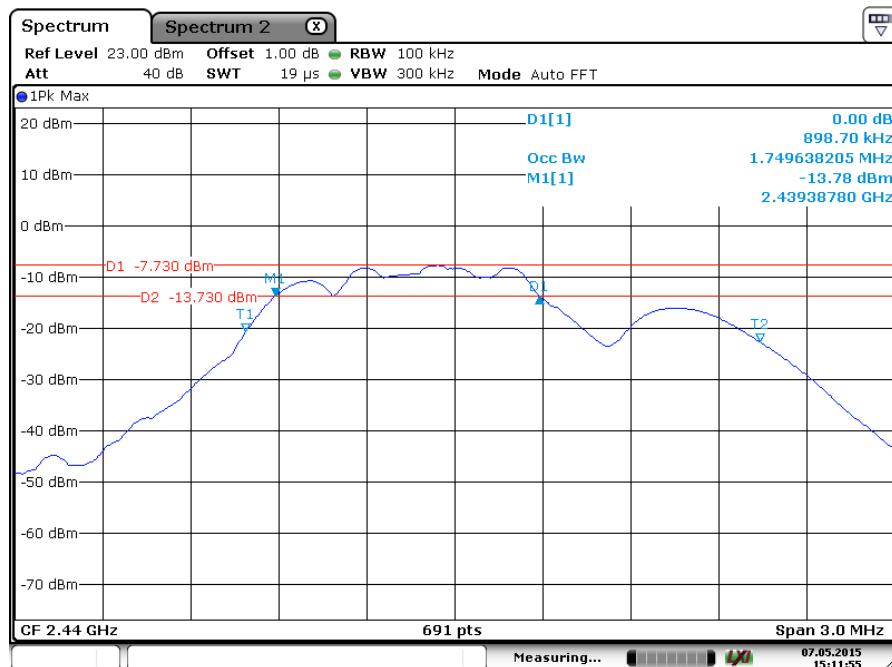

Date: 7 MAY 2015 15:11:55

2480MHz

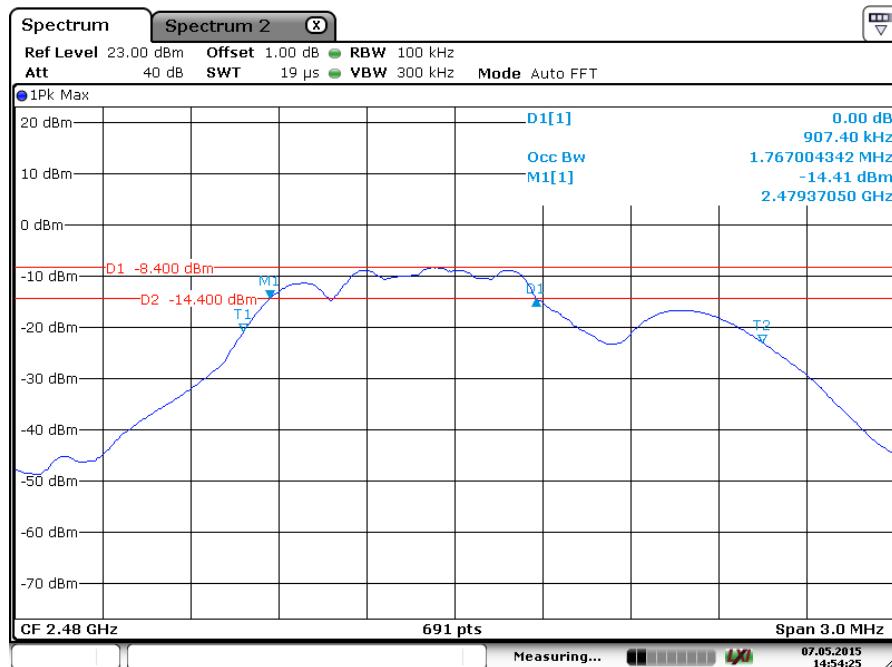

Date: 7 MAY 2015 14:54:25

9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency.
RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm]

≤8

Test result

Frequency MHz	Power spectral density dBm	Result
Top channel 2402MHz	-20.29	Pass
Middle channel 2440MHz	-20.74	Pass
Bottom channel 2480MHz	-21.49	Pass

9.5 Spurious RF conducted emissions

Test Method

1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW \geq 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.


Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20




Spurious RF conducted emissions

2402MHz

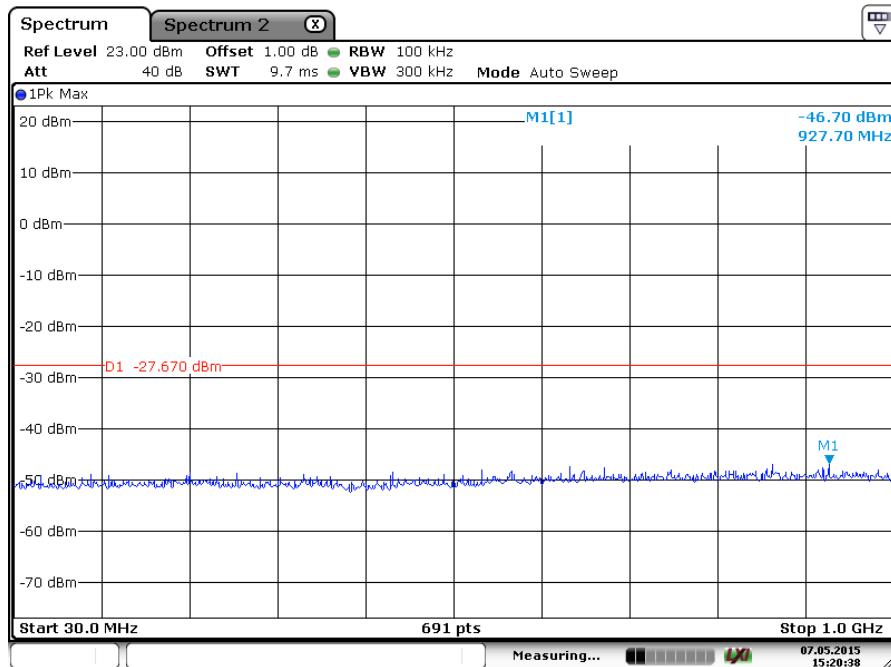


Date: 7 MAY 2015 15:20:38

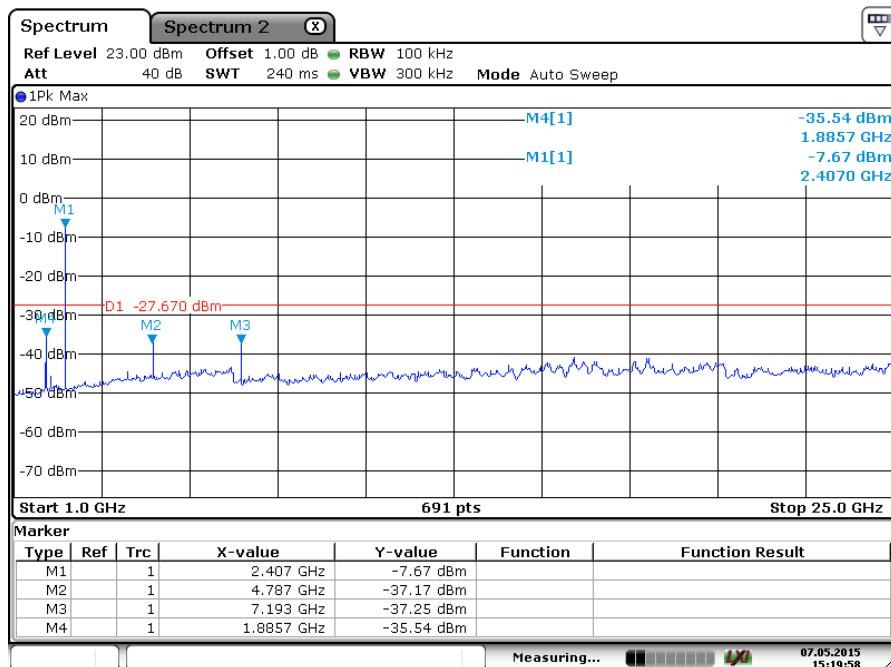


Date: 7 MAY 2015 15:19:58



2440MHz

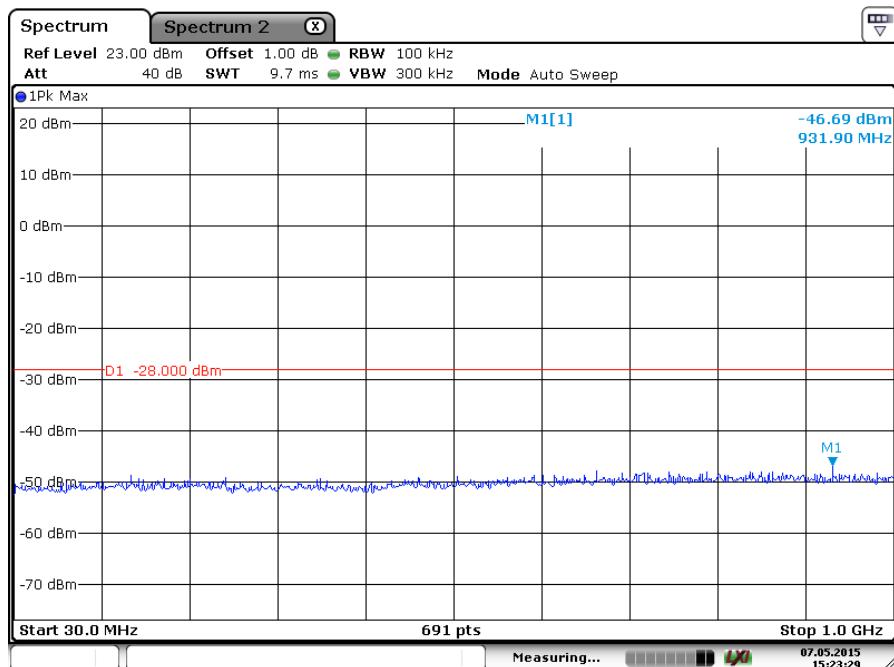


Date: 7 MAY 2015 15:23:29

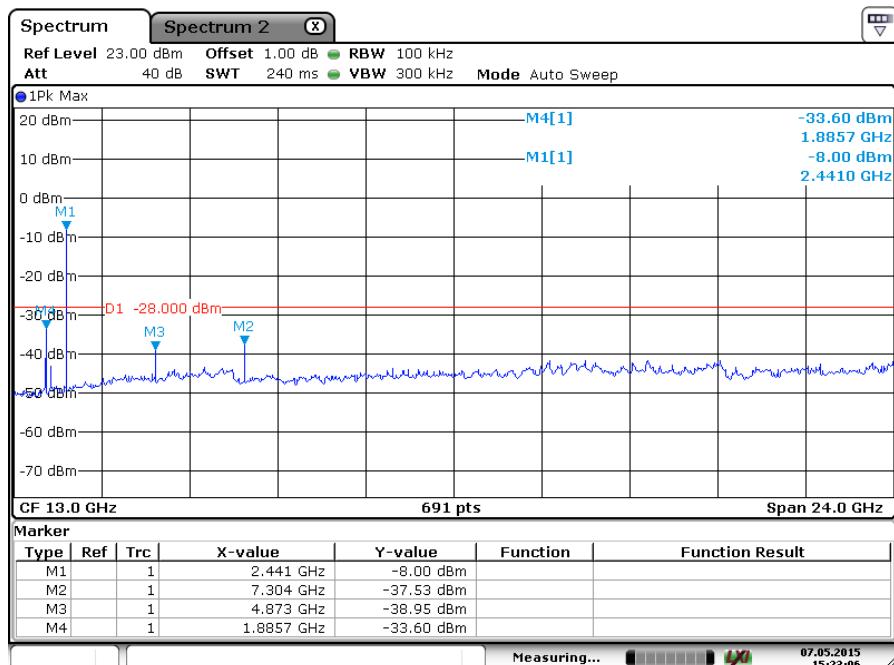


Date: 7 MAY 2015 15:23:06



2480MHz

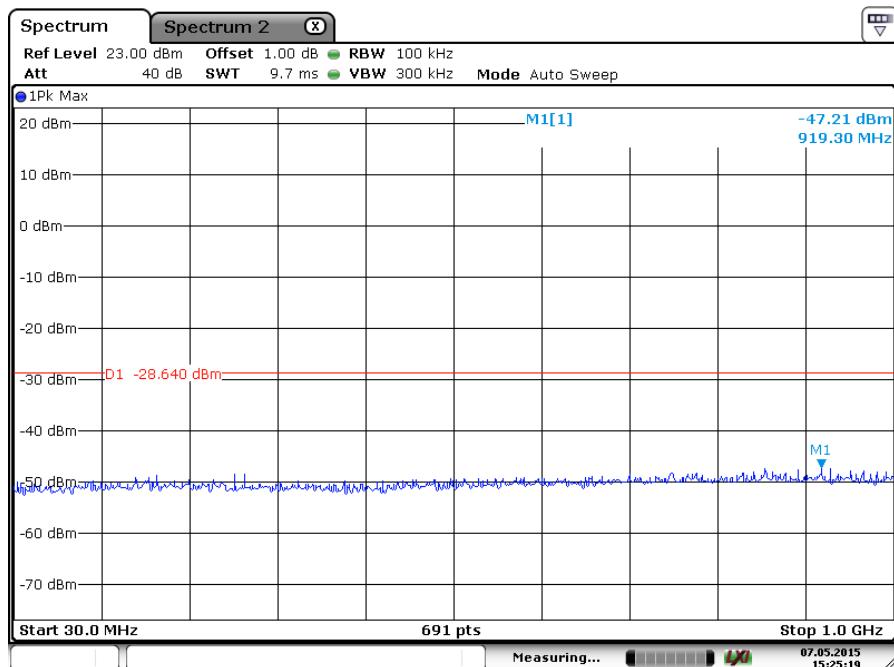

Date: 7 MAY 2015 15:25:19

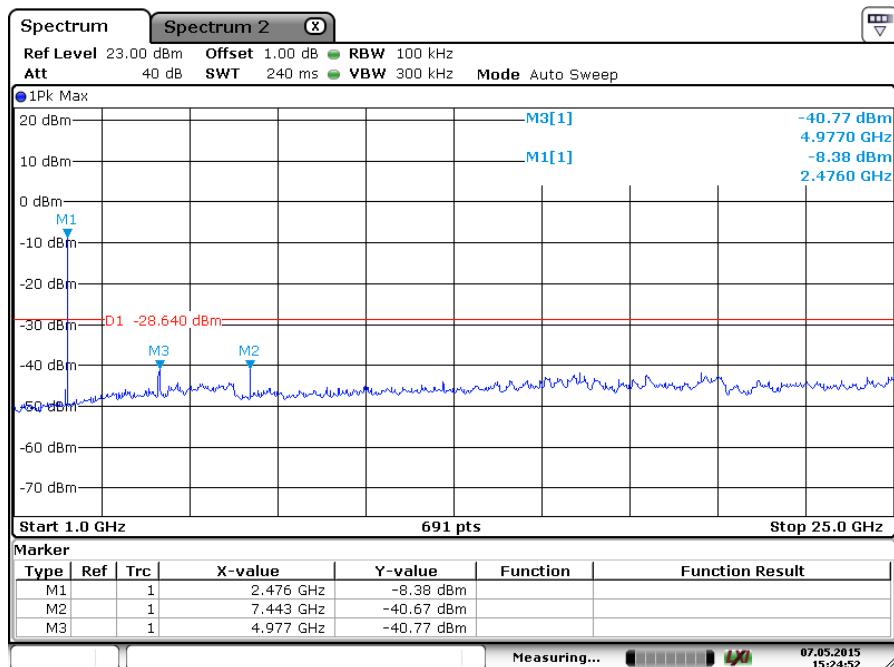

Date: 7 MAY 2015 15:24:52



9.6 Band edge


Test Method


- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20

Test result

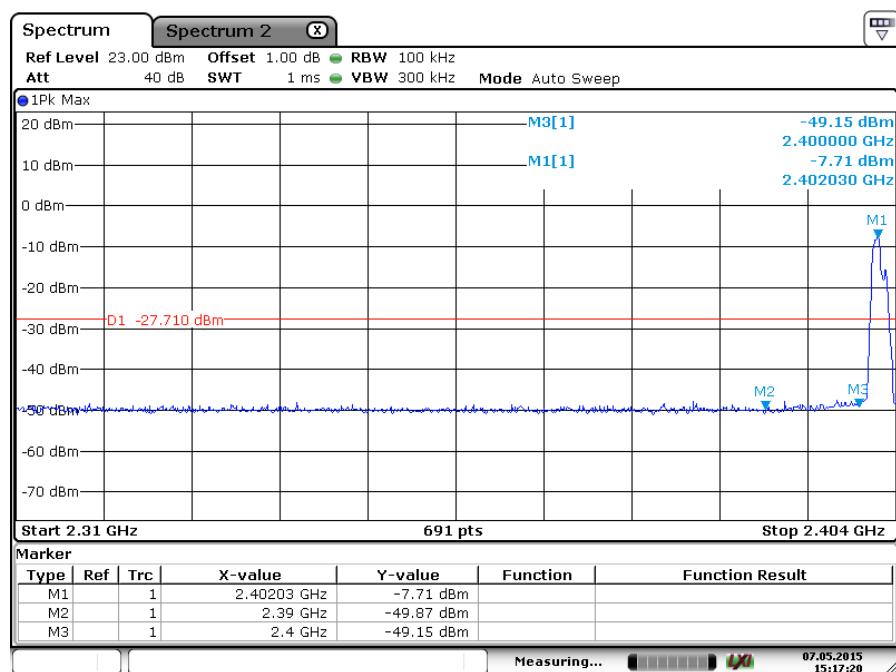

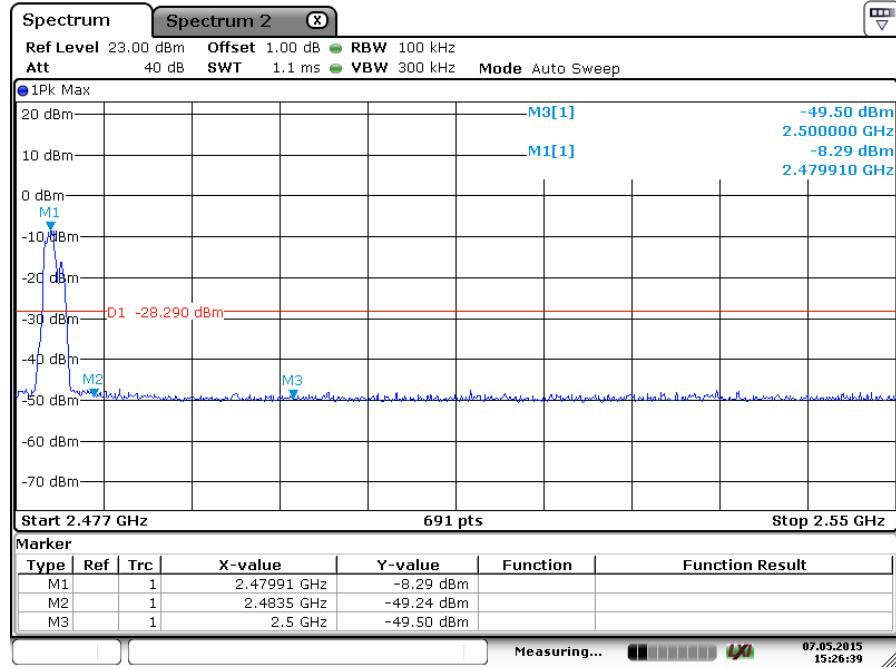

9.7 Spurious radiated emissions for transmitter

Test Method

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
3. Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured, RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{ GHz}$, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Follow the guidelines in ANSI C63.4-2009 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{duty cycle}/100\text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Limit

According to part 15.247(d), the radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dB μ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

2402MHz

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dB _u V/m		dB _u V/m		
40	21.69	Horizontal	40	QP	Pass
40	37.28	Vertical	40	QP	Pass
4804	59.13	Horizontal	74	PK	Pass
4804	38.24	Horizontal	54	AV	Pass
4804	58.44	Vertical	74	PK	Pass
4804	37.96	Vertical	54	AV	Pass

2440MHz

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dB _u V/m		dB _u V/m		
4880	55.10	Horizontal	74	PK	Pass
4880	34.27	Horizontal	54	AV	Pass
4880	51.34	Vertical	74	PK	Pass
4880	33.12	Vertical	54	AV	Pass

2480MHz

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dB _u V/m		dB _u V/m		
4960	58.46	Horizontal	74	PK	Pass
4960	35.36	Horizontal	54	AV	Pass
4960	54.64	Vertical	74	PK	Pass
4960	34.31	Vertical	54	AV	Pass

Remark:

- (1) QP Emission Level= Antenna Factor +Cable Loss + Reading
 PK Emission Level= Antenna Factor +Cable Loss - Amp. Factor + Reading
 AV Emission Level= PK Emission Level+20log (dutycycle) or set the RBW/VBW to be 1MHz/10Hz to read the level.
- (2) Data of measurement within 30-1000MHz frequency range shown “--” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (3) “**” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

10 Test Equipment List

List of Test Instruments

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE	
CE	EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2015-8-17	<input checked="" type="checkbox"/>
	LISN	Rohde & Schwarz	ENV4200	100249	2015-8-17	<input checked="" type="checkbox"/>
	LISN	Rohde & Schwarz	ENV216	100326	2015-8-17	<input type="checkbox"/>
	ISN	Rohde & Schwarz	ENY81	100177	2015-8-17	<input type="checkbox"/>
	ISN	Rohde & Schwarz	ENY81-CAT6	101664	2015-8-17	<input type="checkbox"/>
	High Voltage Probe	Rohde & Schwarz	TK9420(VT9 420)	9420-58	2015-8-17	<input type="checkbox"/>
	RF Current probe	Rohde & Schwarz	EZ-17	100816	2015-8-17	<input type="checkbox"/>
C	Signal Analyzer	Rohde & Schwarz	FSV40	101030	2015-8-17	<input checked="" type="checkbox"/>
RE	EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2015-8-17	<input checked="" type="checkbox"/>
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2017-8-17	<input checked="" type="checkbox"/>
	Horn Antenna	Rohde & Schwarz	HF907	102294	2017-8-17	<input checked="" type="checkbox"/>
	Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2015-8-17	<input checked="" type="checkbox"/>
	Pre-amplifier	Rohde & Schwarz	SCU 40A	100432	2015-8-17	<input checked="" type="checkbox"/>
	3m Semi-anechoic chamber	TDK	9X6X6	----	2019-5-29	<input checked="" type="checkbox"/>

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge



11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty

Items	Extended Uncertainty
Radiation emission	U=4.32dB (30MHz-25GHz)
Output power test	0.94 dB
Power density test	2.10 dB
Bandwidth	1x10-9