

FCC - TEST REPORT

Report Number	:	6895025131801	Date of Issue:	2025-08-21
Model	:	S50, S50 Pro, S50 C, S50 Lite, S50R, S70, S90, S10, S30, S23G		
Product Type	:	Laser Distance Meter		
Applicant	:	Shenzhen Mileseey Technology Co., Ltd.		
Address	:	No.3601 Block A, Tanglang Town Plaza West, Fuguang Community, Taoyuan Street, Nanshan District, Shenzhen 518055, China		
Manufacturer	:	Shenzhen Mileseey Technology Co., Ltd.		
Address	:	No.3601 Block A, Tanglang Town Plaza West, Fuguang Community, Taoyuan Street, Nanshan District, Shenzhen 518055, China		
Test Result	:	<input checked="" type="checkbox"/> Positive	<input type="checkbox"/> Negative	
Total pages including Appendices	:	38		

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups.....	8
7.1	Radiated test setups.....	8
7.2	Conducted RF test setups	8
8	Systems test configuration.....	9
9	Technical Requirement.....	10
9.1	Conducted Output Power	10
9.2	6 dB Bandwidth	12
9.3	Power spectral density	14
9.4	Spurious RF conducted emissions.....	16
9.5	Band edge testing	20
9.6	Spurious radiated emissions for transmitter	23
10	Test Equipment List	36
11	System Measurement Uncertainty.....	38

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park,
Guankou Erlu, Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

3 Description of the Equipment Under Test

Product:	Laser Distance Meter
Model No.:	S50, S50 Pro, S50 C, S50 Lite, S50R, S70, S90, S10, S30, S23G
Model Differences:	All models have the same technical construction including circuit diagram, PCB layout, components and component layout. The difference lies only in the color and the marketing purpose of the different models. After evaluation, the main test model is S50.
FCC ID:	2AE0GS50
Software Version:	18
Hardware Version:	15
Options and accessories:	N/A
Ratings:	5VDC, 1A supplied by USB-C port or 2.4VDC supplied by 2pcs "AA" size rechargeable Ni-MH batteries or 3.0VDC supplied by 2pcs "AA" alkaline batteries
RF Transmission Frequency:	2402MHz-2480MHz (for BLE-1Mbps)
No. of Operated Channel:	40
Modulation:	GFSK
Antenna Type:	PCB antenna
Antenna Gain:	0.2dBi
Description of the EUT:	The EUT is a Laser Distance Meter, which supports BLE-1Mbps function, operates at 2402 – 2480MHz.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

NOTE 2: N/A means not applicable.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2024 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C		Test Site	Test Result			Test Environment
Test Condition	Pass		Fail	N/A		
§15.207	Conducted emission AC power port*	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	---
§15.247 (b) (3)	Conducted peak output power	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 24.2°C H: 46.8%
§15.247(a)(2)	6dB bandwidth	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 24.2°C H: 46.8%
§15.247(e)	Power spectral density	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 24.2°C H: 46.8%
§15.247(d)	Spurious RF conducted emissions	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 24.2°C H: 46.8%
§15.247(d)	Band edge	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 24.2°C H: 46.8%
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 22.5°C H: 47.4%
§15.203	Antenna requirement	See note 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	---

Note 1: N/A=Not Applicable.

Note 2: The EUT use a PCB antenna, which gain of antenna is 0.2dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

Note 3: T=Temperature, H=Humidity.

Note 4: * The EUT can't transmit and charge at the same time.

Note 5: All tests were conducted while the battery was in operation.

6 General Remarks

This submittal(s) (test report) is intended for FCC ID: 2AE0GS50 complies with Section 15.205, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

All models have the same technical construction including circuit diagram, PCB layout, components and component layout. The difference lies only in the color and the marketing purpose of the different models.

So model S50 is selected as the representative for all tests, other models are deemed to fulfill the requirements of standards.

SUMMARY:

All tests according to the regulations cited on page 5 were:

- Performed

- Not Performed

The Equipment under Test

- Fulfills the general approval requirements.

- Does not fulfill the general approval requirements.

Sample Received Date: 2025-07-27

Testing Start Date: 2025-07-27


Testing End Date: 2025-08-04

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch –


Reviewed by:


Prepared by:

Tested by:


John Zhi
Project Manager





Sanvin Zheng
Project Engineer


Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


9kHz - 30MHz

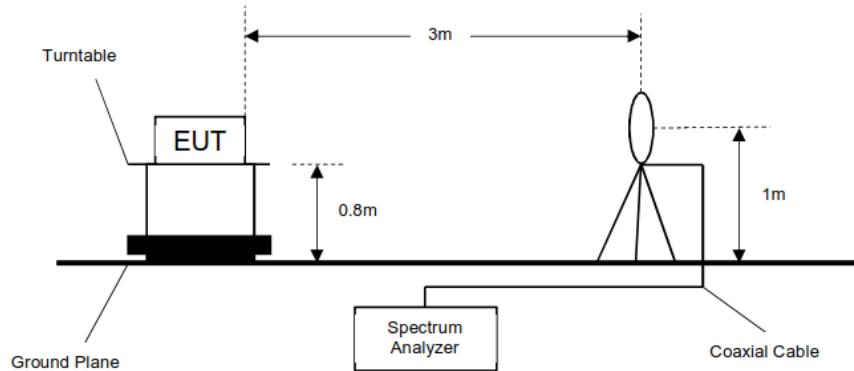


Below 1GHz

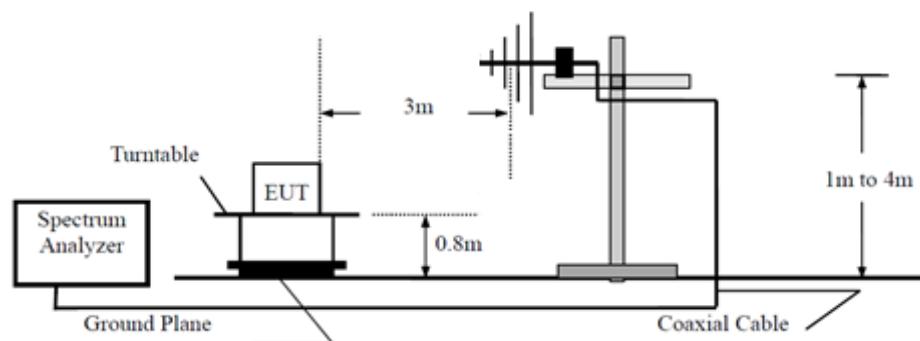

Above 1GHz

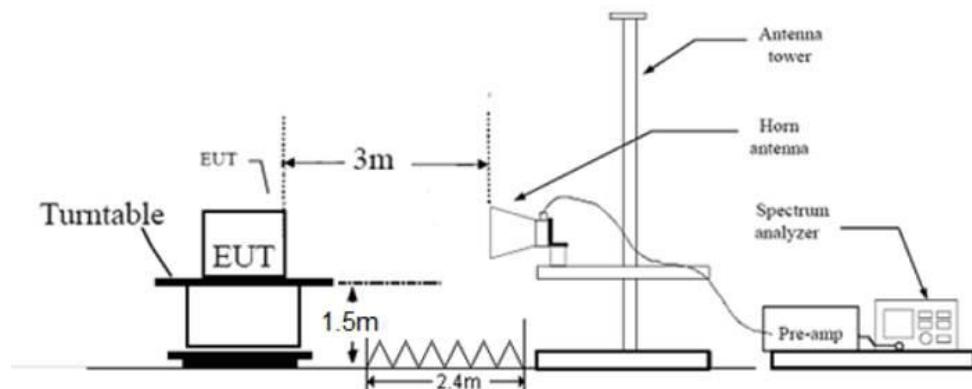

7.2 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	REMARK
Notebook	LENOVO	X220	---

Test software information:

Test Software Version	SmartSnippets_Toolbox_v5.0.24.4128	
Modulation	Setting TX Power	Packet Type
GFSK	1	PRBS9

The system was configured to non-hopping mode, testing channel 0, 19, 39.

9 Technical Requirement

9.1 Conducted Output Power

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 6dB bandwidth, centered on a channel need to test, RBW > the 6dB bandwidth of the emission being measured, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.


Limit

According to §15.247 (b) (3), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30

Test Results

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
BLE_1M	SISO	2402	-2.43	≤ 30	Pass
		2440	-2.85	≤ 30	Pass
		2480	-3.08	≤ 30	Pass

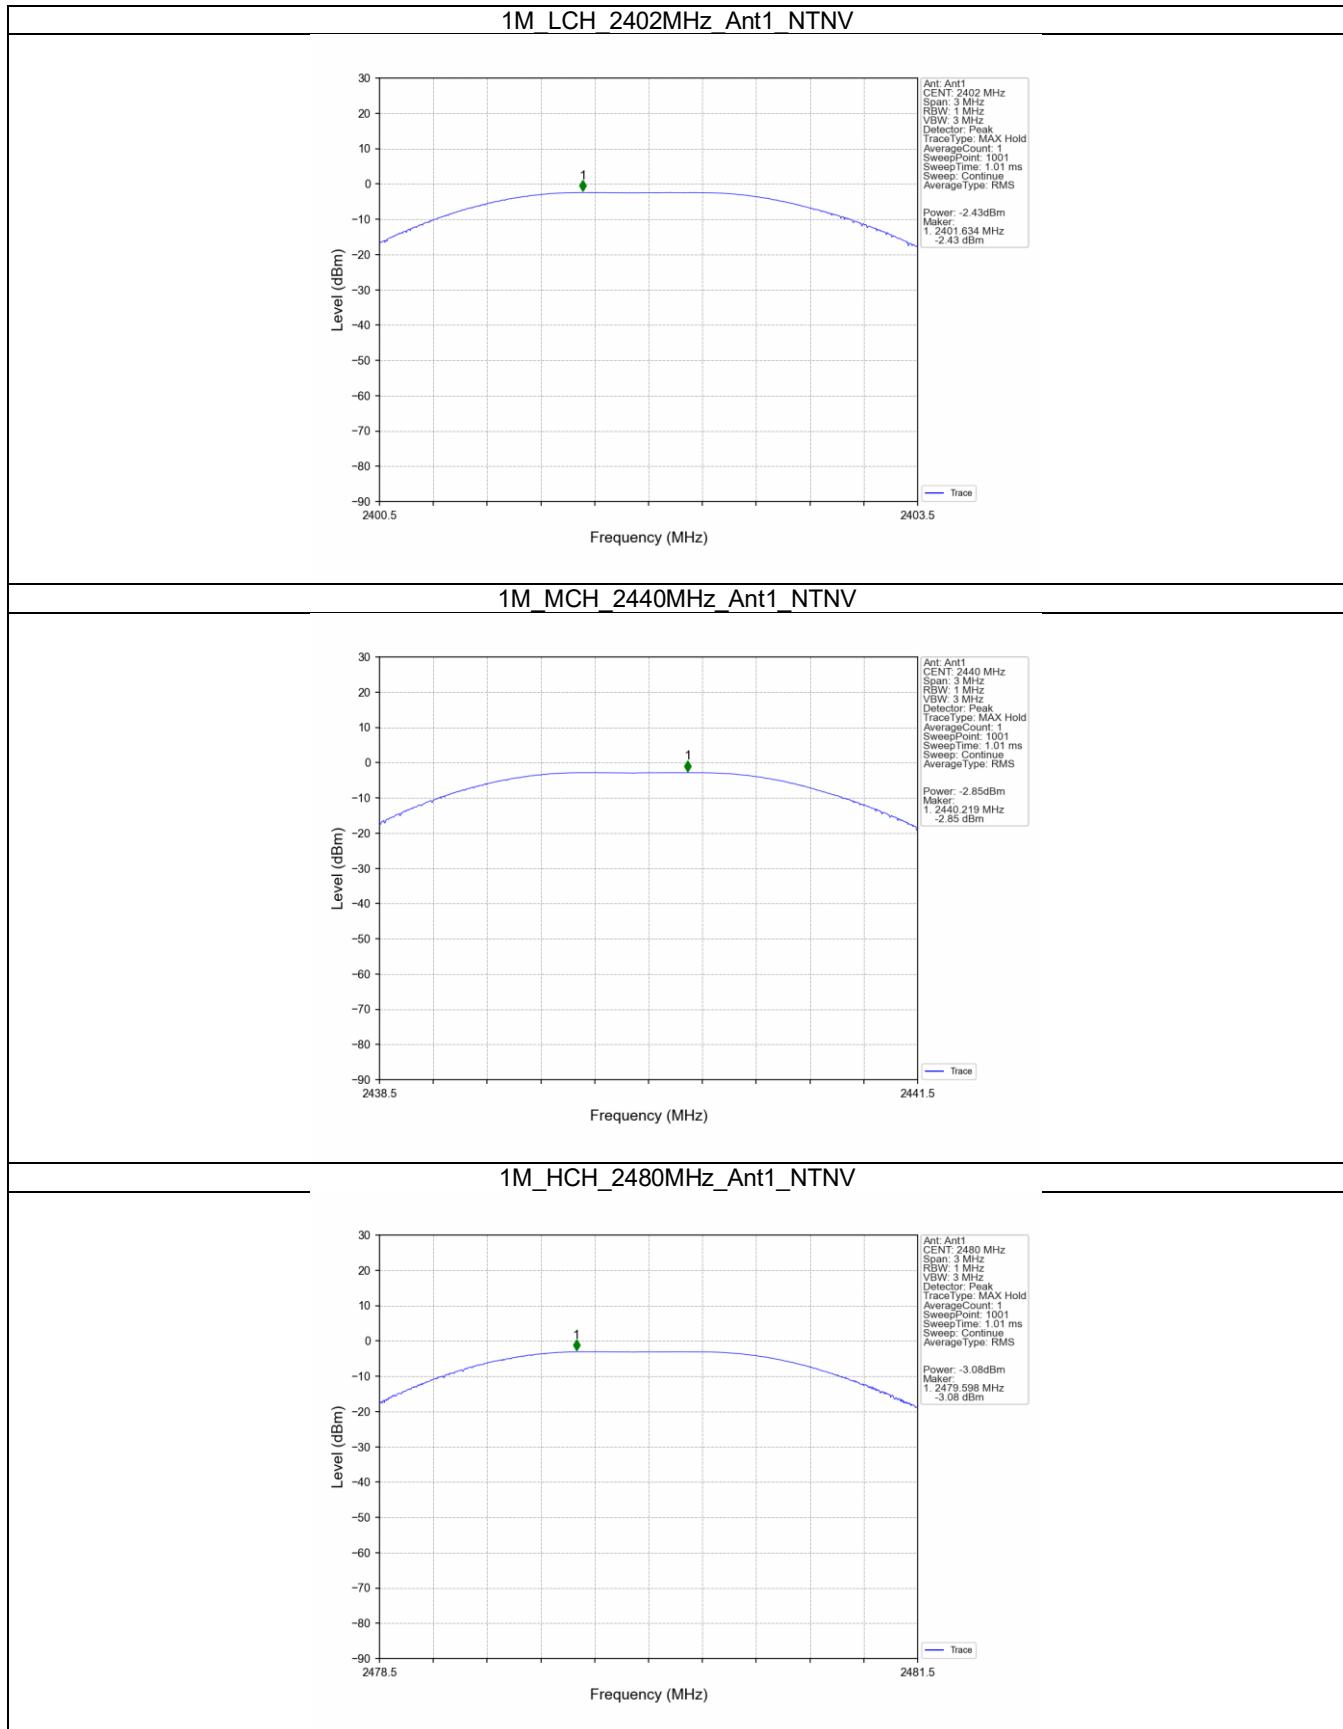

9.2 6 dB Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=1% to 5% of the occupied bandwidth but not less than 100kHz, VBW≥3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.


Limit

6dB bandwidth Limit [kHz]

≥500

Test result for 6 dB Bandwidth

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
BLE_1M	SISO	2402	1	0.781	>=0.5	Pass
		2440	1	0.779	>=0.5	Pass
		2480	1	0.799	>=0.5	Pass

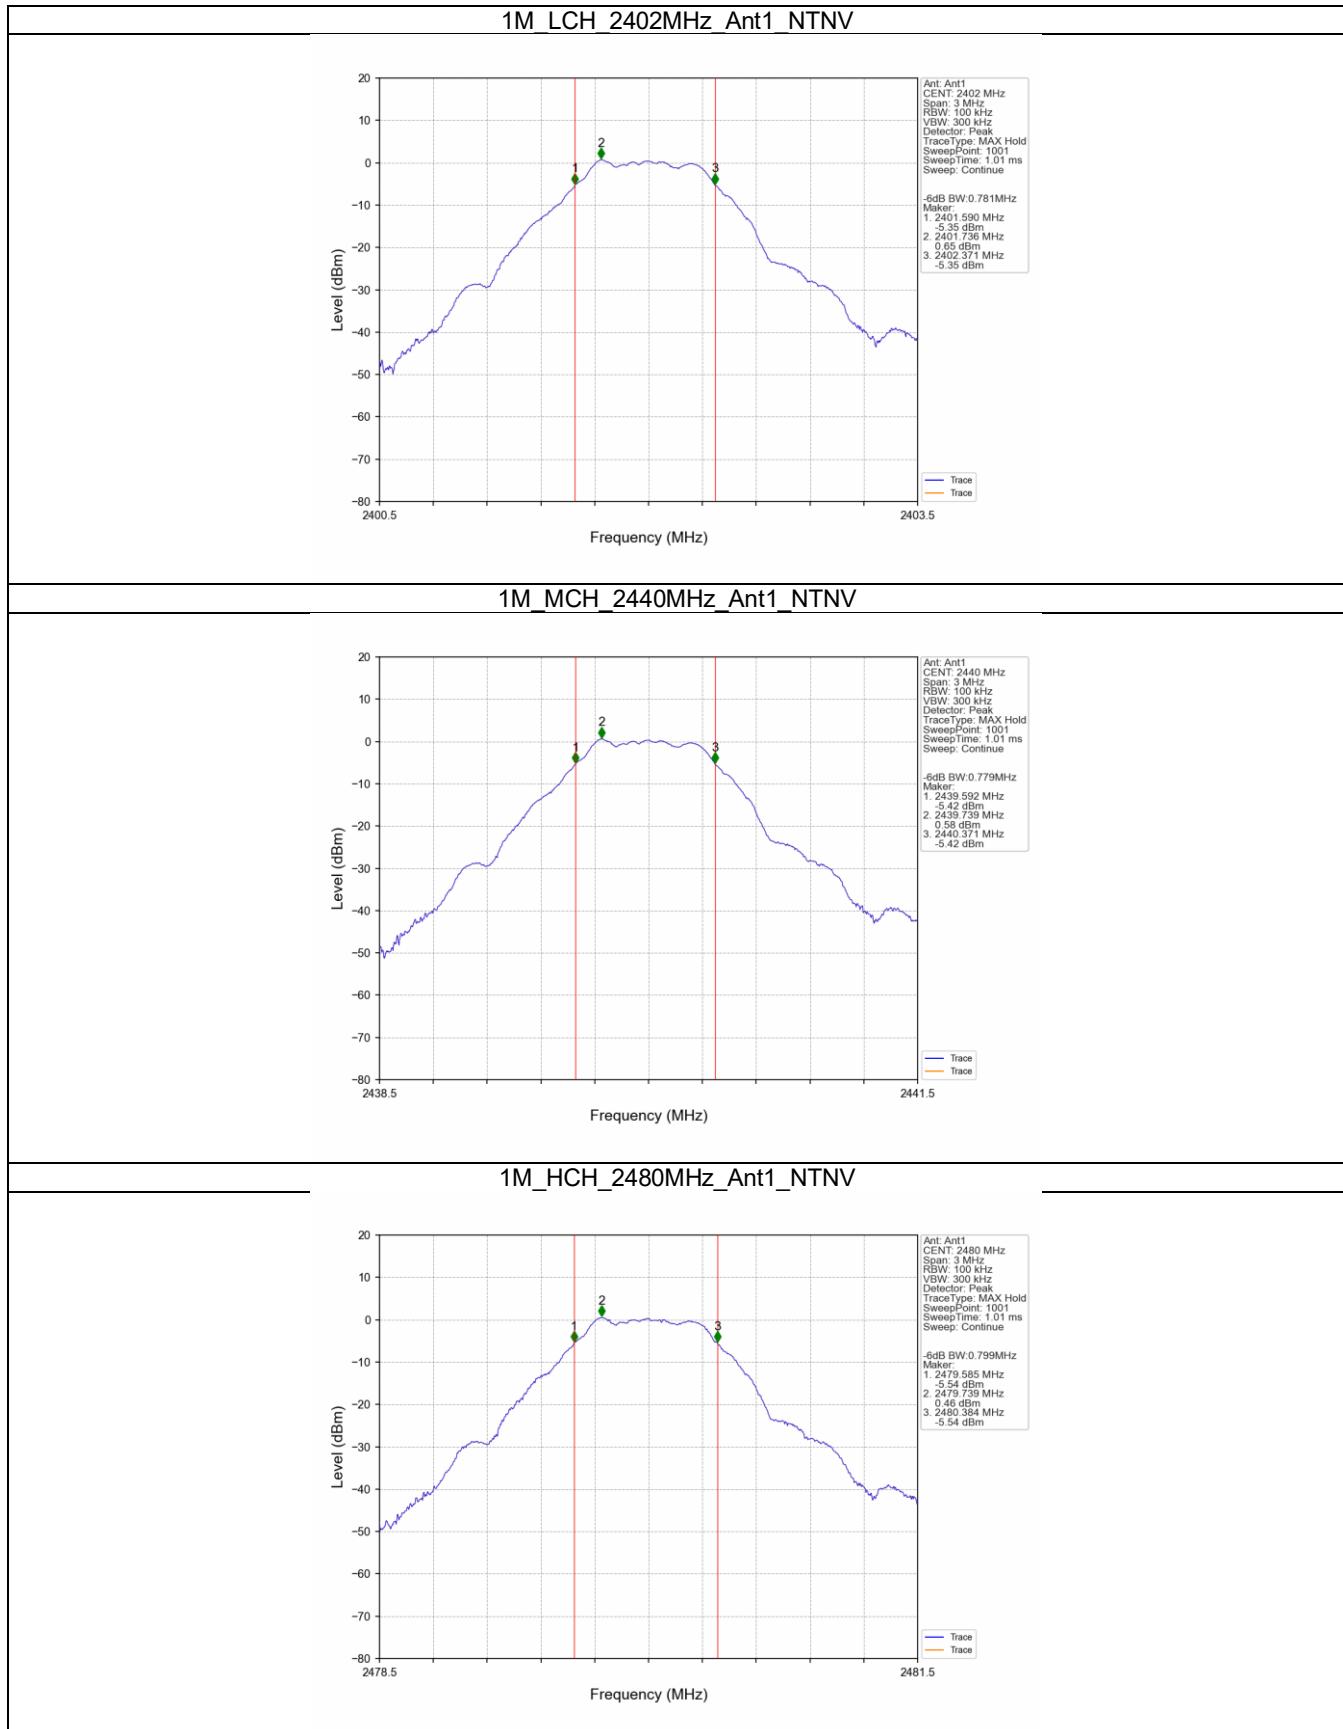

9.3 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW \geq 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.


Limit

Limit [dBm/3kHz]

≤ 8

Test Results

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
BLE_1M	SISO	2402	-18.87	≤ 8	Pass
		2440	-19.38	≤ 8	Pass
		2480	-19.48	≤ 8	Pass

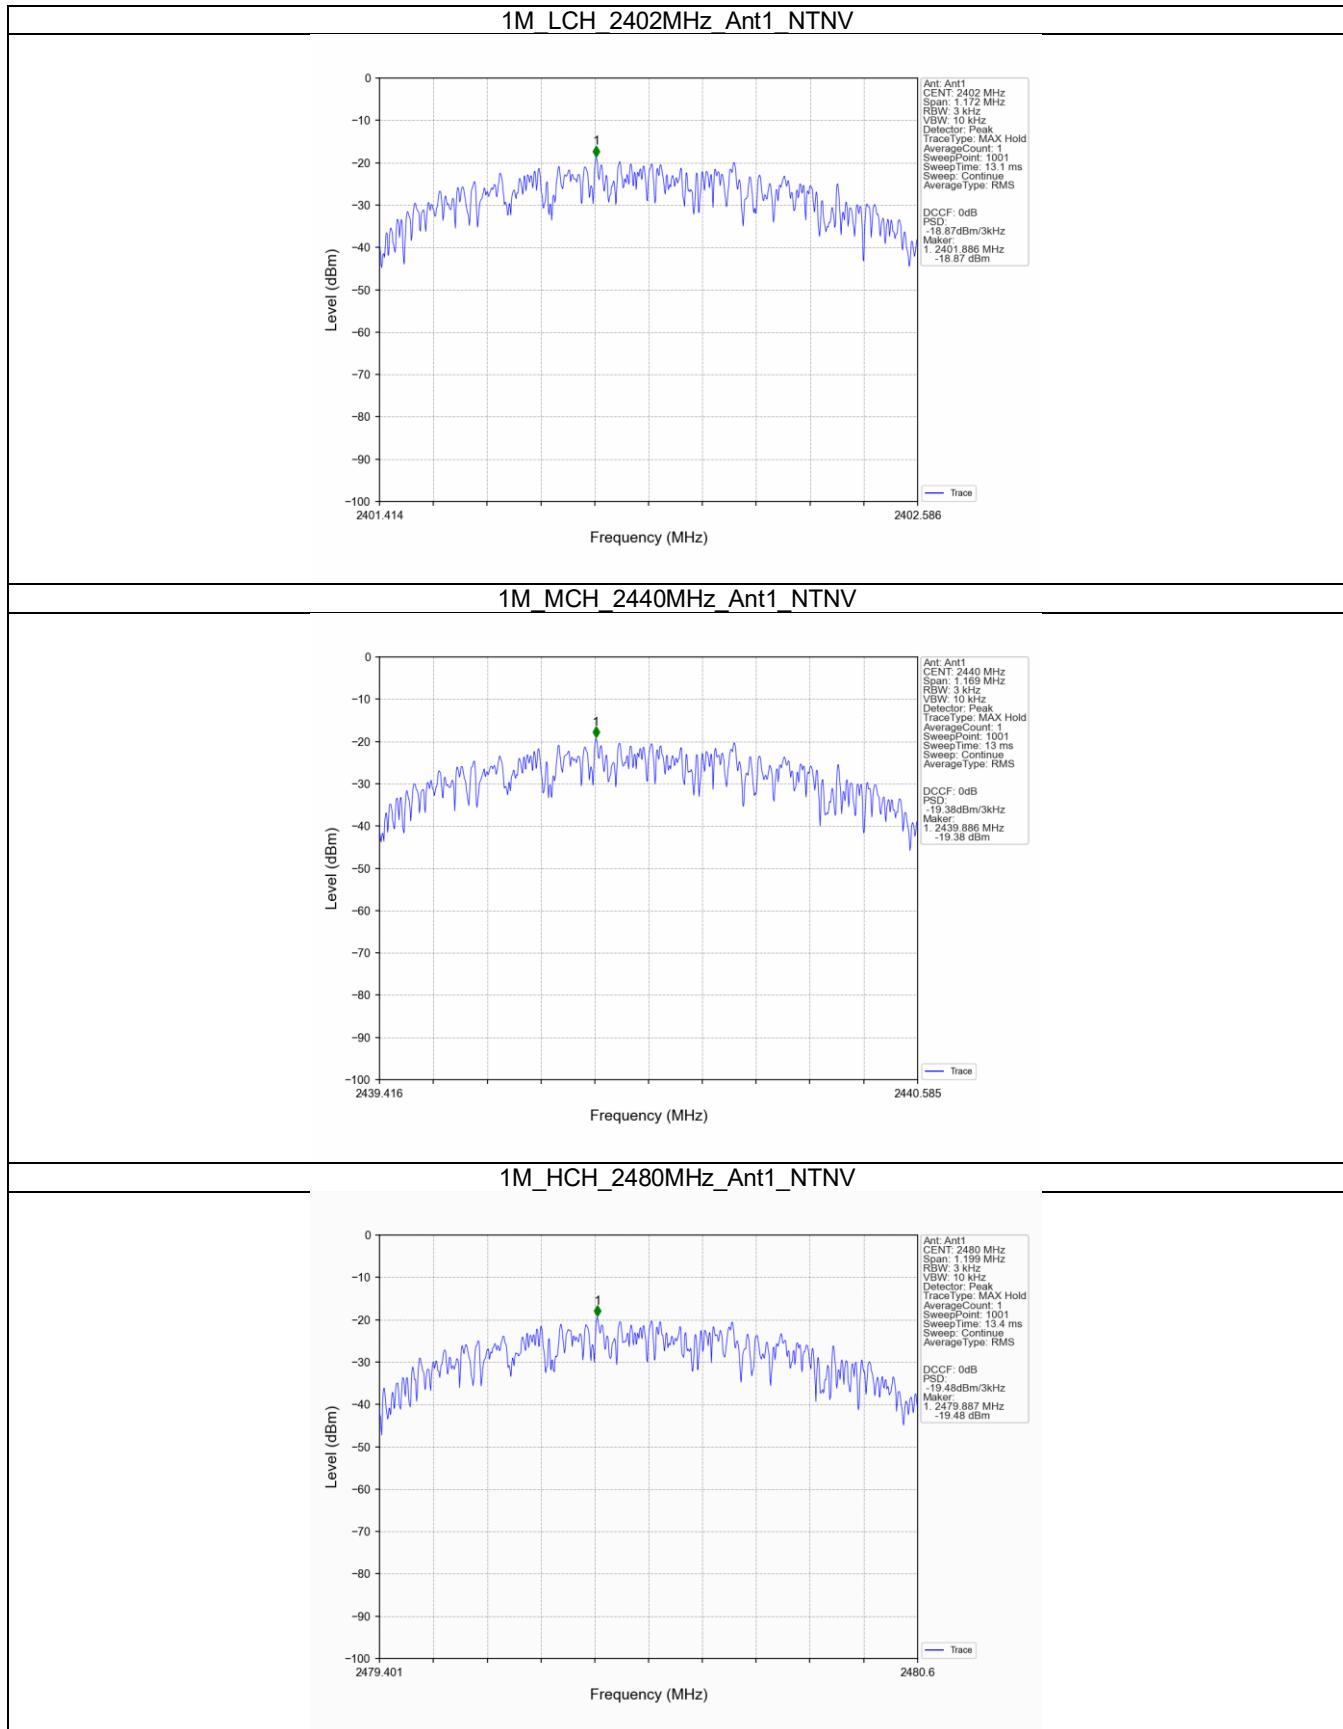

9.4 Spurious RF conducted emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.


Limit




Frequency Range MHz	Limit (dBc)
30-25000	-20


Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
BLE_1M	SISO	2402	1	0.64	-19.36	Pass
		2440	1	0.56	-19.44	Pass
		2480	1	0.46	-19.54	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

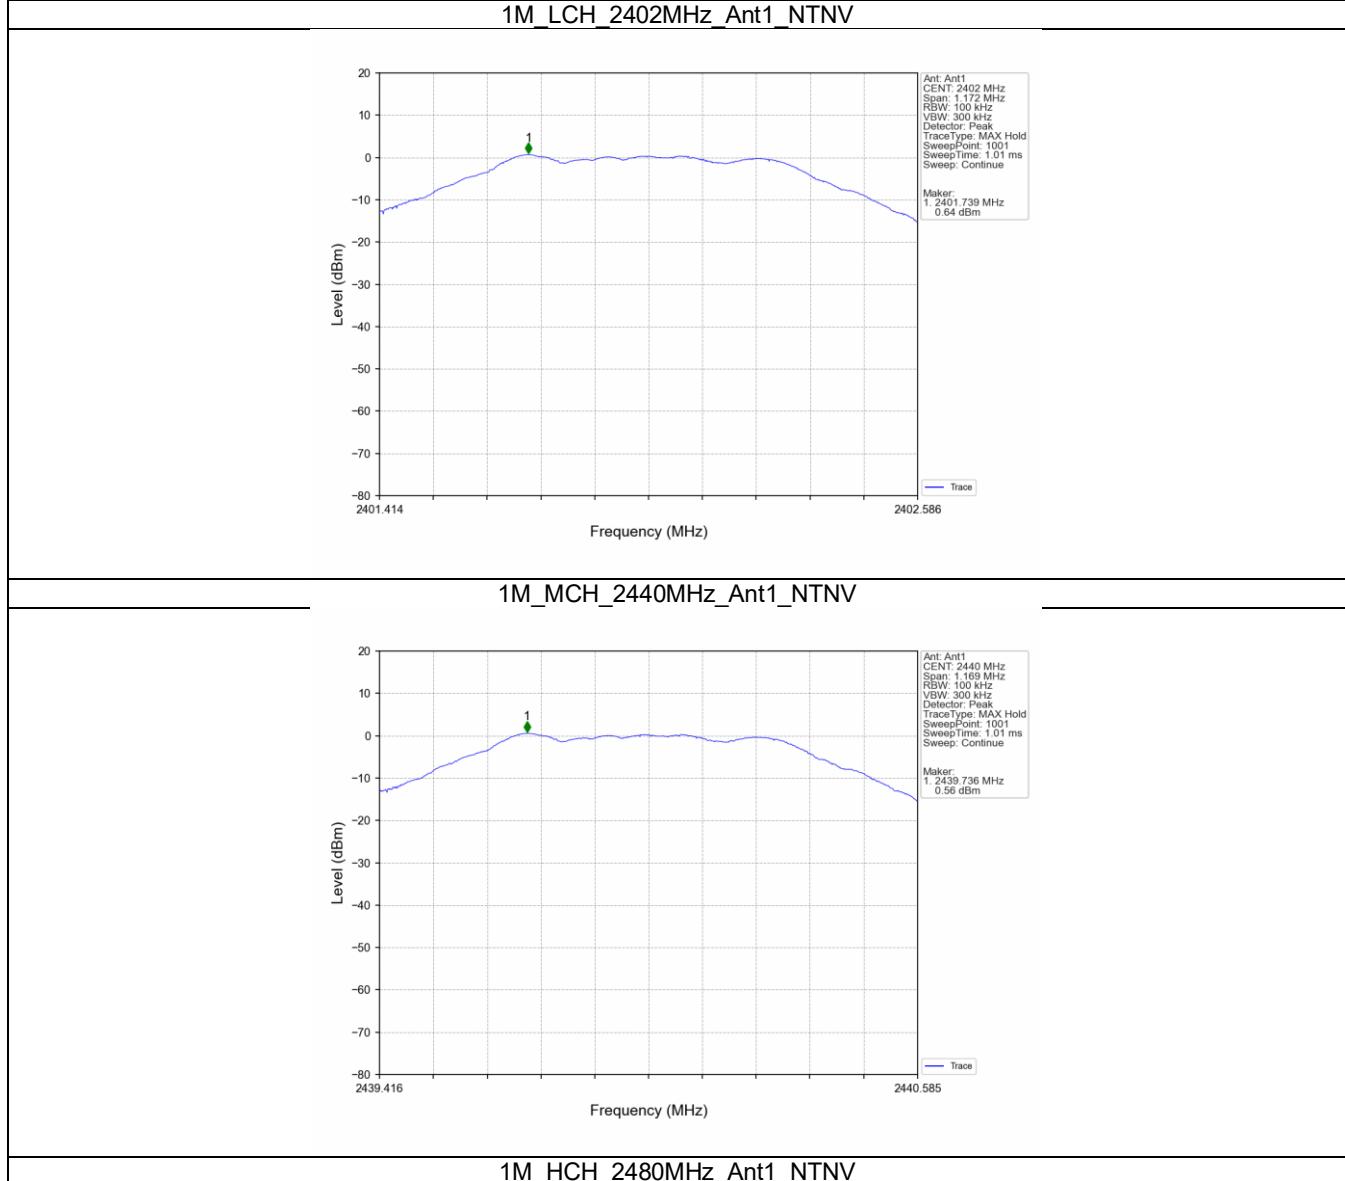

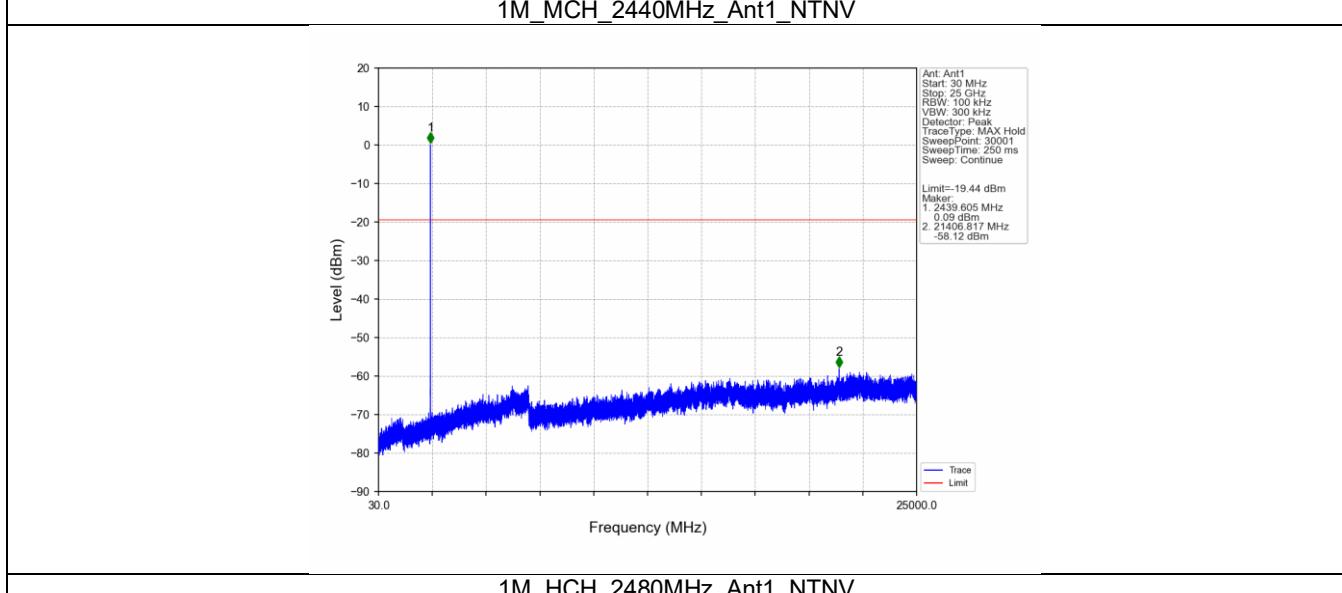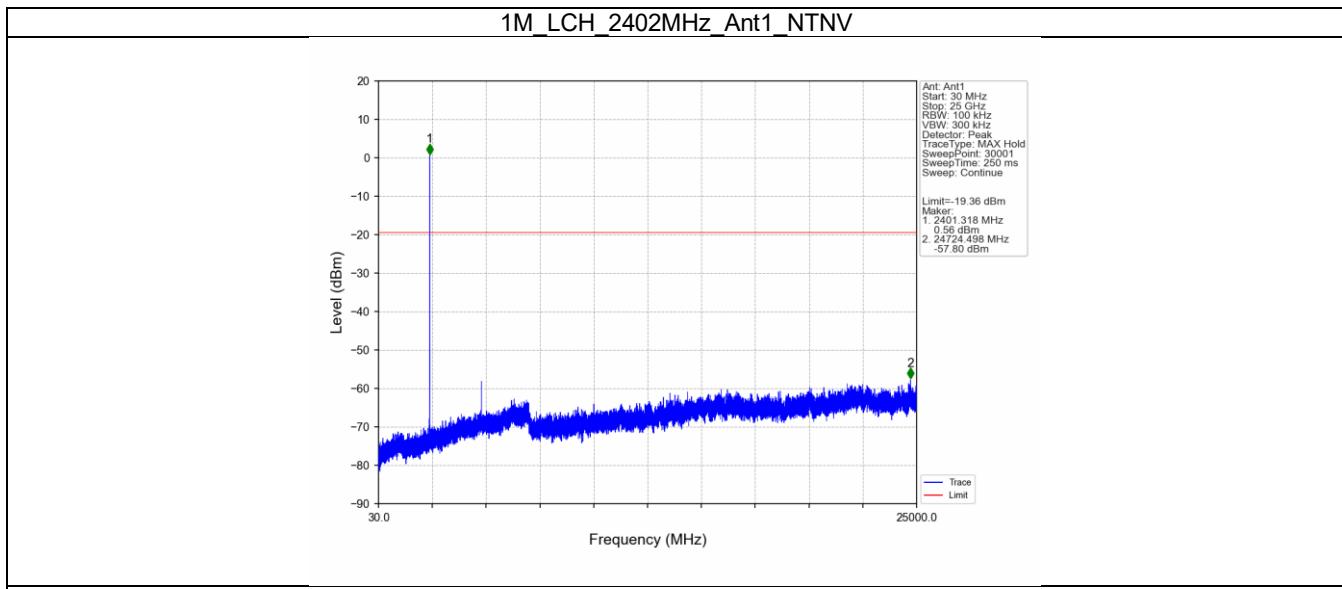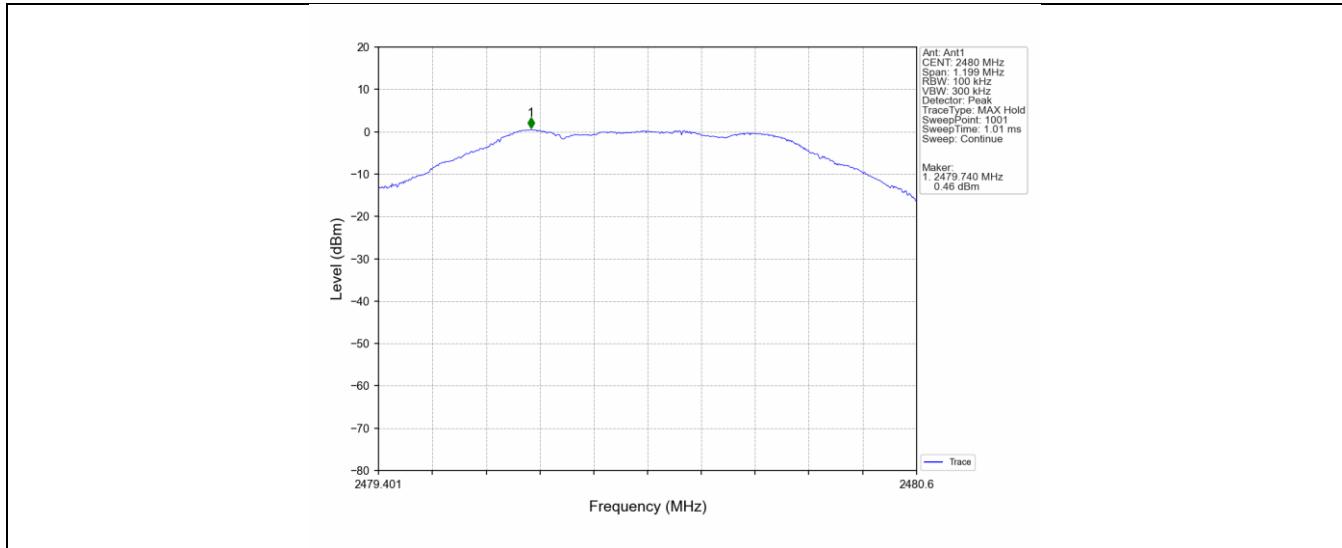

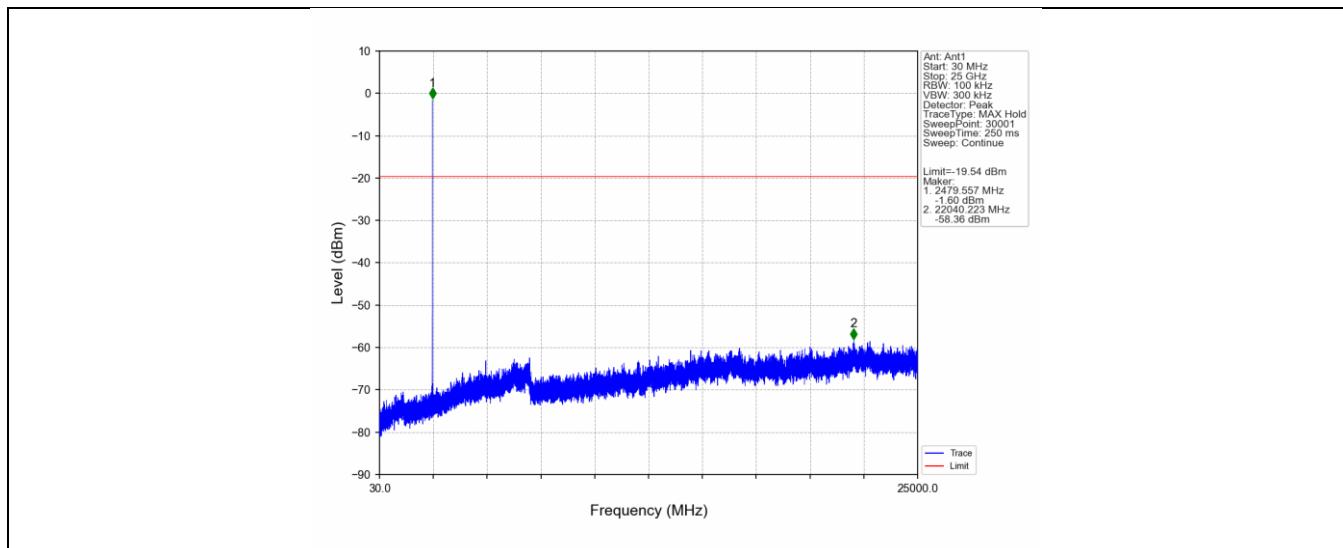

9.5 Band edge testing

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.

Limit




In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB.


Frequency Range MHz	Limit (dBc)
30-25000	-20

Test result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
BLE_1M	SISO	2402	1	0.64	-19.36	Pass
		2480	1	0.46	-19.54	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

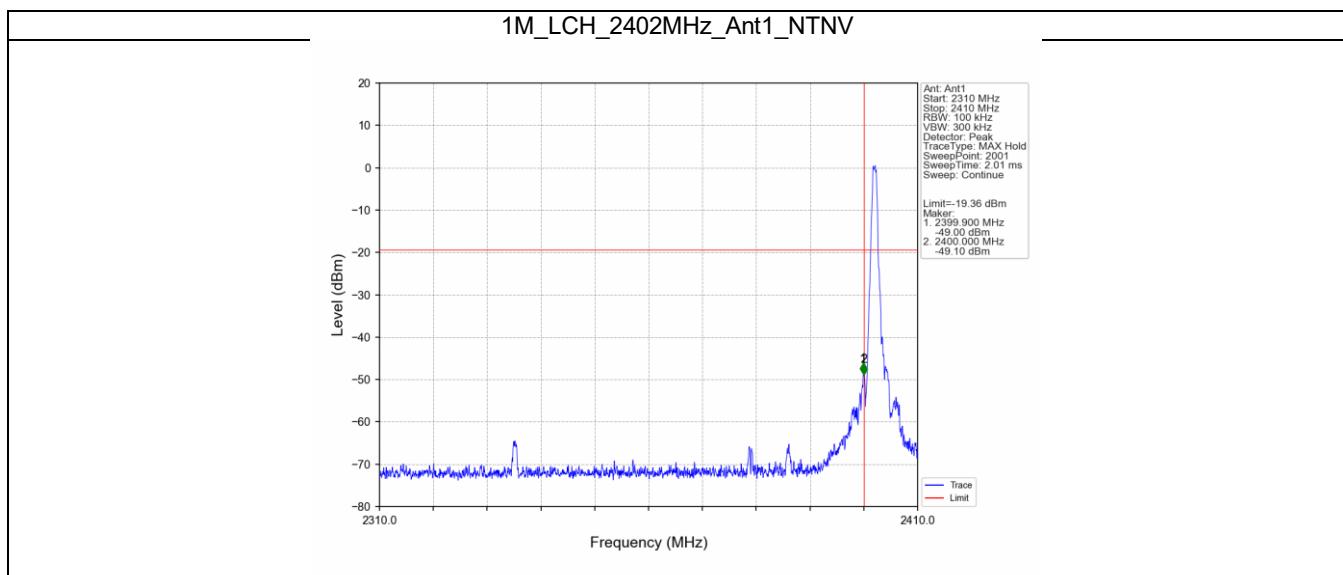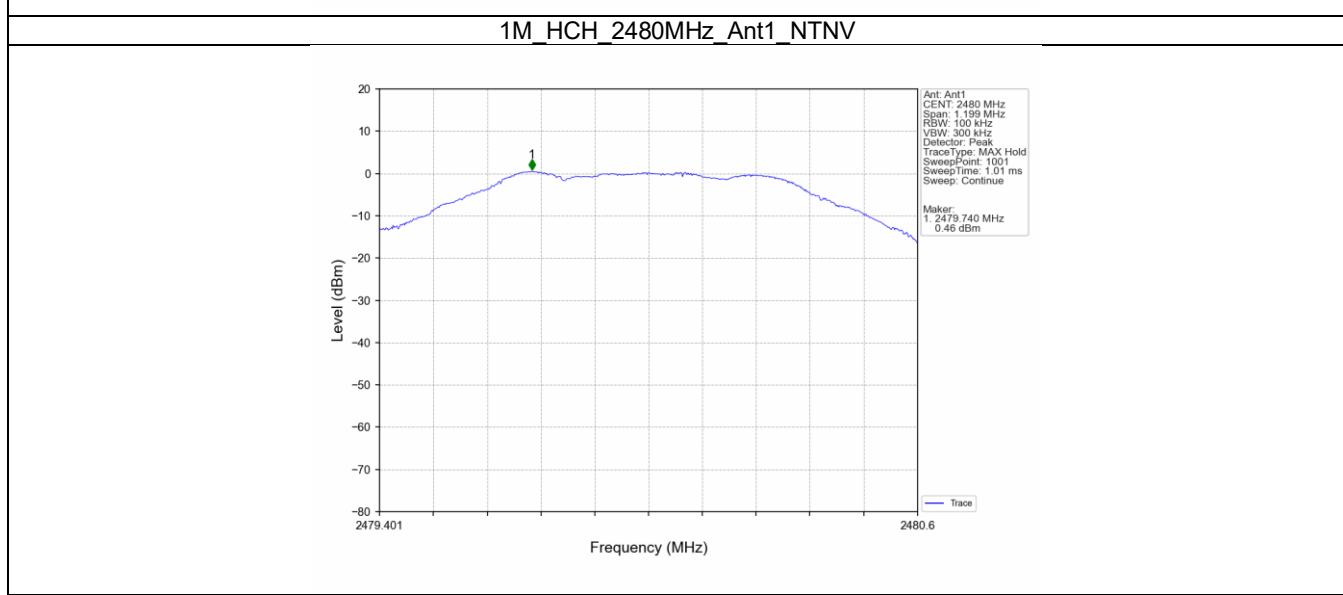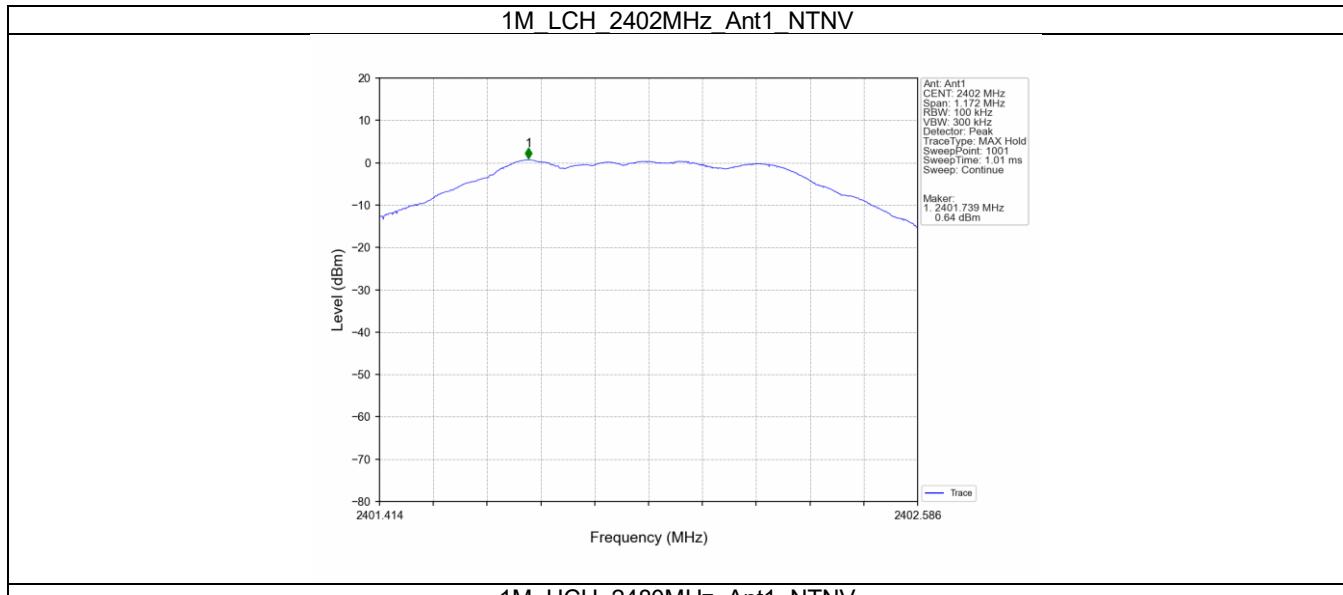

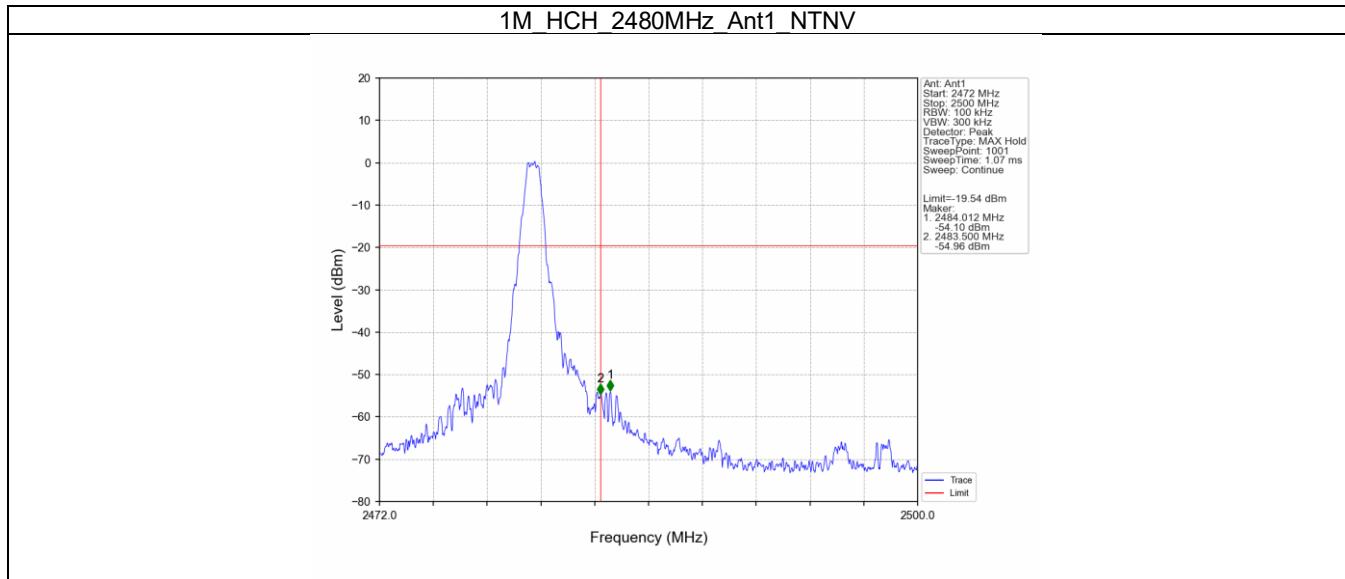

9.6 Spurious radiated emissions for transmitter

Test Method

1. The EUT was place on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:
 - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 KHz to 120KHz, VBW≥RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 2) For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW≥RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 3) Procedures for average unwanted emissions measurements above 1000 MHz
 - a) RBW = 1MHz.
 - b) VBW \ [3 × RBW].
 - c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
 - e) Sweep time = auto.
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission(AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

Frequency MHz	Field Strength μV/m	Field Strength dBμV/m	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit $3m(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 300m(\text{dB}\mu\text{V}/\text{m}) + 40\log(300m/3m)$ (Below 30MHz)

Note 2: Limit $3m(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 30m(\text{dB}\mu\text{V}/\text{m}) + 40\log(30m/3m)$ (Below 30MHz)


Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.


Transmitting spurious emission test result as below:

Spurious emission of 9kHz-30MHz

BLE_1Mbps_Low Channel (worst case)

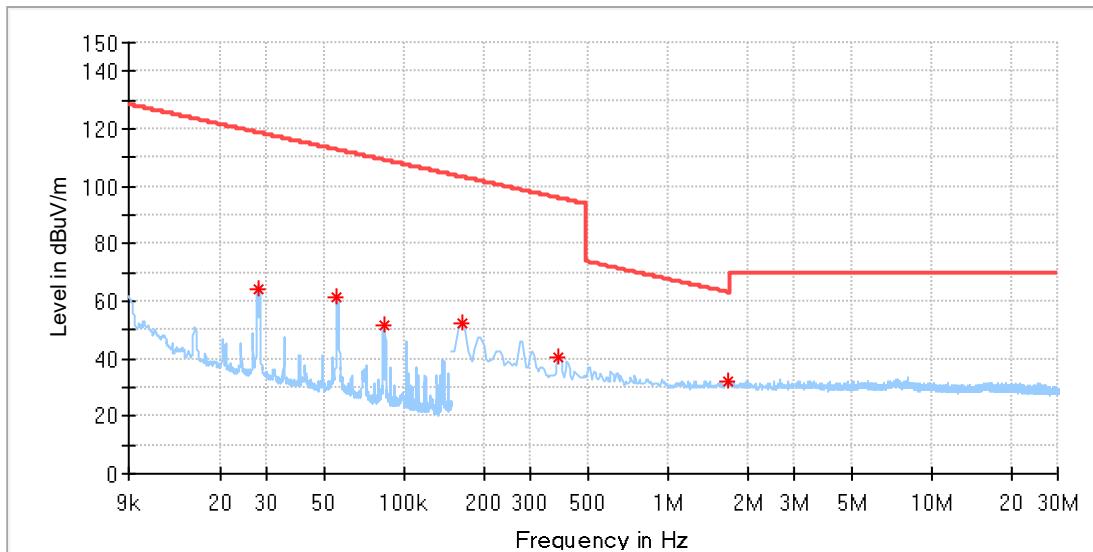


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.028176	63.96	118.59	54.63	H	105.0	19.88
0.055577	61.67	112.70	51.02	H	260.0	19.92
0.083401	51.39	109.17	57.78	H	105.0	19.92
0.164925	52.51	103.25	50.75	H	171.0	19.89
0.383825	40.16	95.92	55.76	H	63.0	19.90
1.692250	31.99	63.07	31.07	H	171.0	20.02

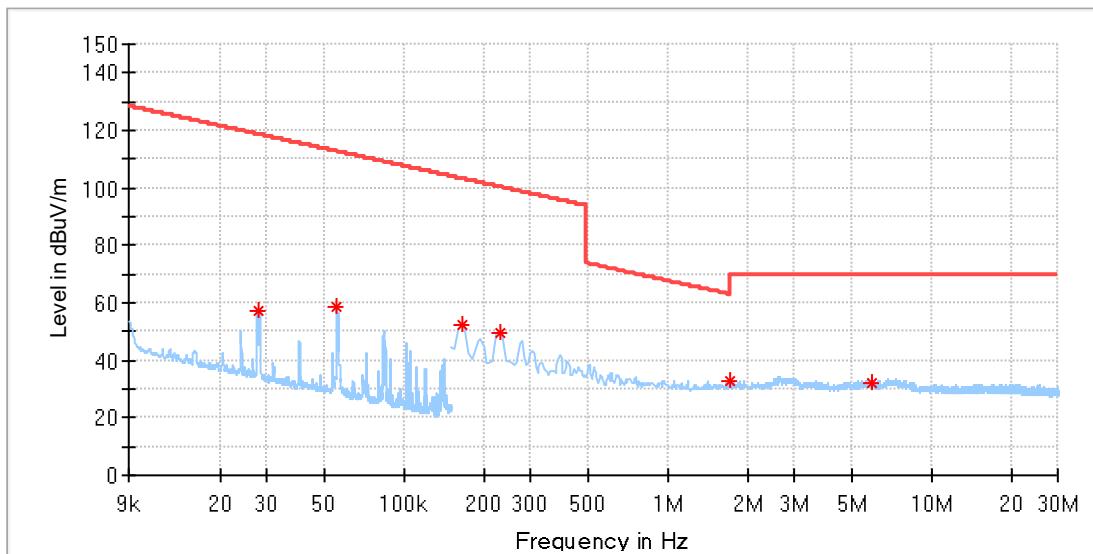


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.028176	56.91	118.59	61.68	V	96.0	19.88
0.055577	58.48	112.70	54.22	V	288.0	19.92
0.164925	52.51	103.25	50.75	V	103.0	19.89
0.229600	49.35	100.38	51.03	V	336.0	19.88
1.702200	32.99	63.01	30.03	V	289.0	20.02
5.955825	32.29	69.50	37.21	V	344.0	20.15

Spurious emission of 30MHz-1GHz

BLE_1Mbps_Low Channel (worst case)

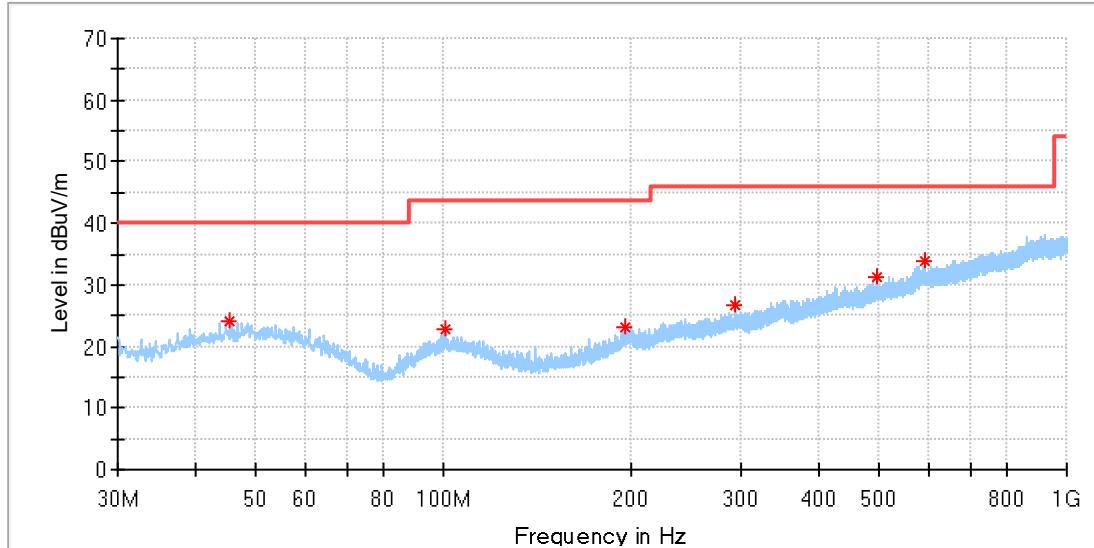


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.520000	24.09	40.00	15.91	100.0	H	167.0	20.65
100.931250	22.71	43.50	20.79	200.0	H	153.0	19.07
196.173125	23.26	43.50	20.24	200.0	H	153.0	19.33
293.961250	26.76	46.00	19.24	100.0	H	292.0	21.51
495.660625	31.10	46.00	14.90	100.0	H	65.0	25.96
590.781250	33.96	46.00	12.04	100.0	H	109.0	28.18

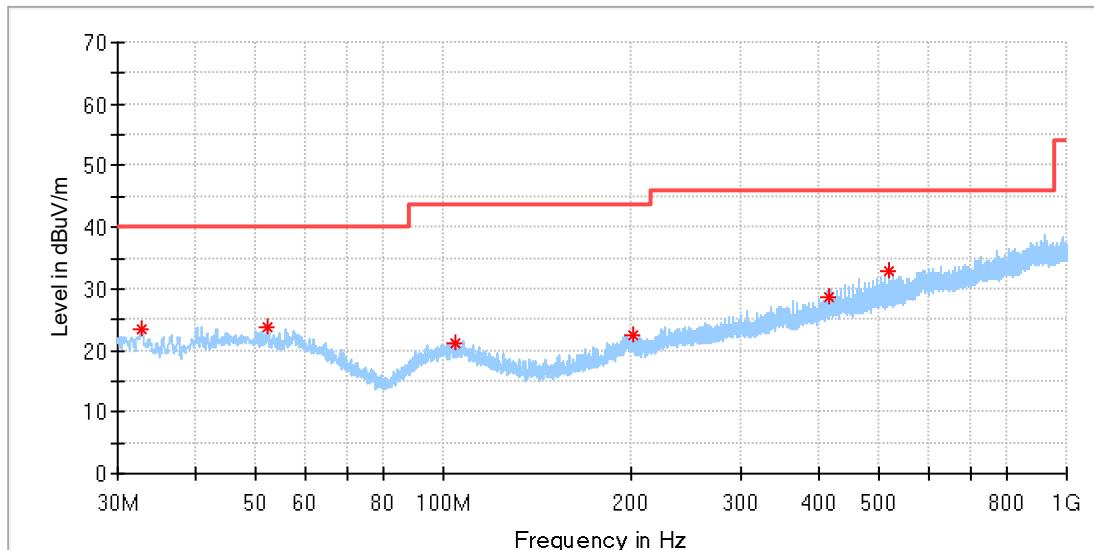


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.788750	23.39	40.00	16.61	100.0	V	138.0	16.20
52.188750	23.73	40.00	16.28	100.0	V	324.0	20.70
104.326250	21.07	43.50	22.43	100.0	V	0.0	18.97
200.841250	22.45	43.50	21.05	100.0	V	234.0	19.13
414.120000	28.64	46.00	17.36	100.0	V	0.0	24.55
517.970625	33.01	46.00	12.99	100.0	V	153.0	26.22

Spurious emission of 1GHz-18GHz
BLE_1Mbps_Low Channel: 2402MHz

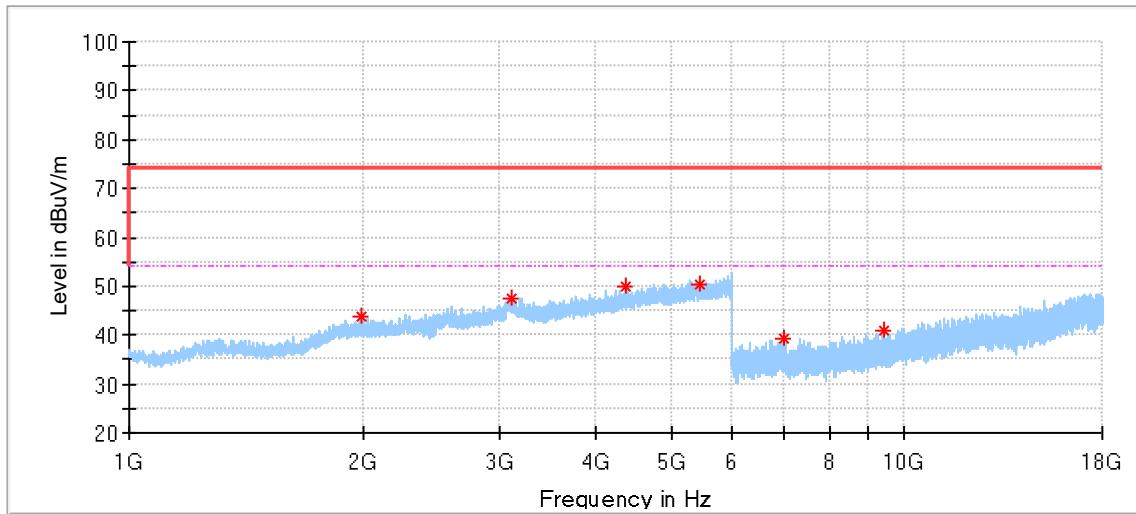


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1993.000000	43.69	74.00	30.31	150.0	H	152.0	-2.57
3113.500000	47.69	74.00	26.31	150.0	H	347.0	2.36
4374.500000	49.81	74.00	24.19	150.0	H	92.0	4.12
5449.500000	50.43	74.00	23.57	150.0	H	10.0	7.12
6989.000000	39.26	74.00	34.74	150.0	H	230.0	9.29
9385.500000	40.90	74.00	33.10	150.0	H	82.0	12.26

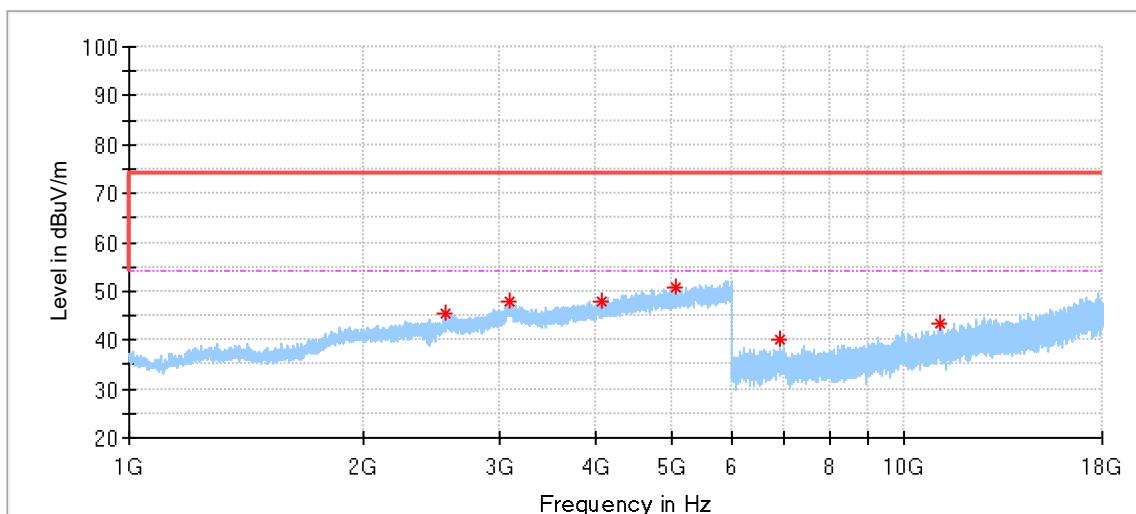


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2564.000000	45.36	74.00	28.64	150.0	V	221.0	-0.54
3094.000000	47.91	74.00	26.09	150.0	V	113.0	2.61
4066.000000	48.04	74.00	25.96	150.0	V	149.0	3.04
5061.500000	50.75	74.00	23.25	150.0	V	245.0	5.94
6915.000000	40.30	74.00	33.70	150.0	V	257.0	9.48
11148.500000	43.30	74.00	30.70	150.0	V	31.0	14.58

BLE_1Mbps_Middle Channel: 2440MHz

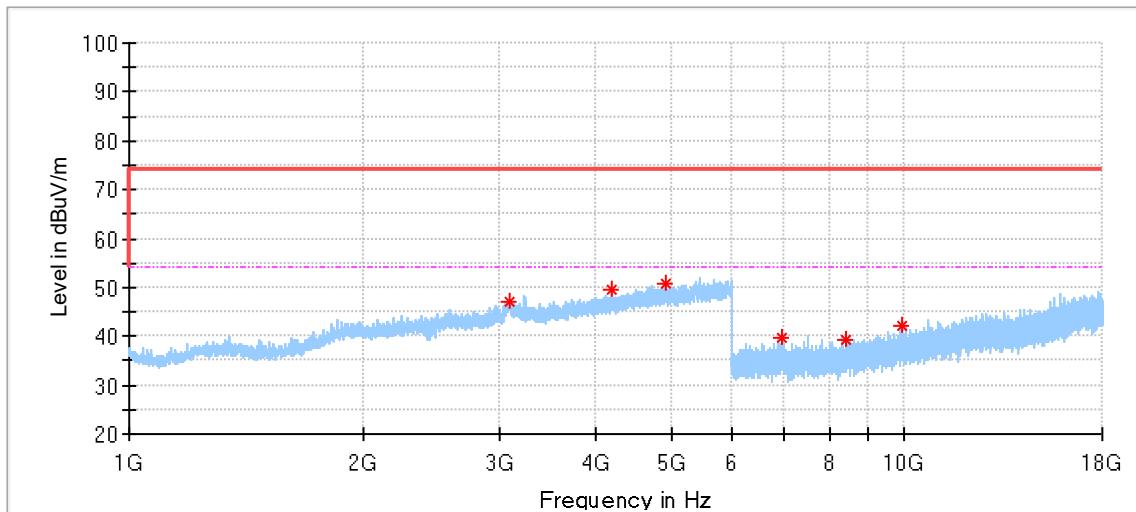


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3086.500000	47.24	74.00	26.76	150.0	H	165.0	2.42
4185.500000	49.44	74.00	24.56	150.0	H	213.0	3.39
4932.000000	50.76	74.00	23.24	150.0	H	213.0	5.88
6957.000000	39.76	74.00	34.24	150.0	H	257.0	9.56
8428.500000	39.31	74.00	34.69	150.0	H	257.0	10.66
9918.000000	42.08	74.00	31.92	150.0	H	135.0	13.02

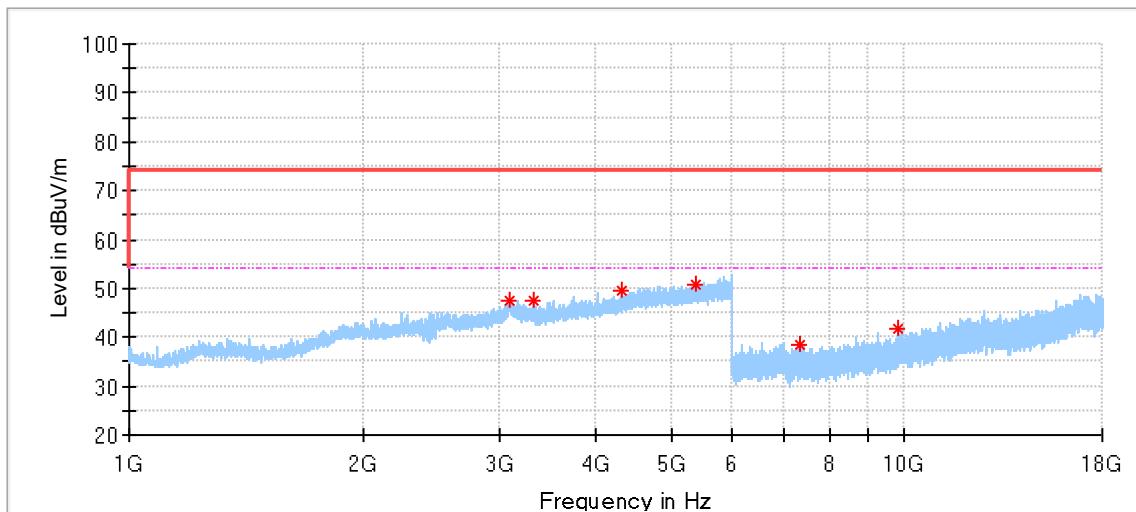


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3091.500000	47.69	74.00	26.31	150.0	V	4.0	2.55
3321.000000	47.64	74.00	26.36	150.0	V	11.0	1.15
4307.500000	49.71	74.00	24.29	150.0	V	237.0	4.08
5383.000000	50.82	74.00	23.18	150.0	V	70.0	7.18
7311.000000	38.55	74.00	35.45	150.0	V	259.0	9.57
9837.000000	41.63	74.00	32.37	150.0	V	259.0	12.95

BLE_1Mbps_High Channel: 2480MHz

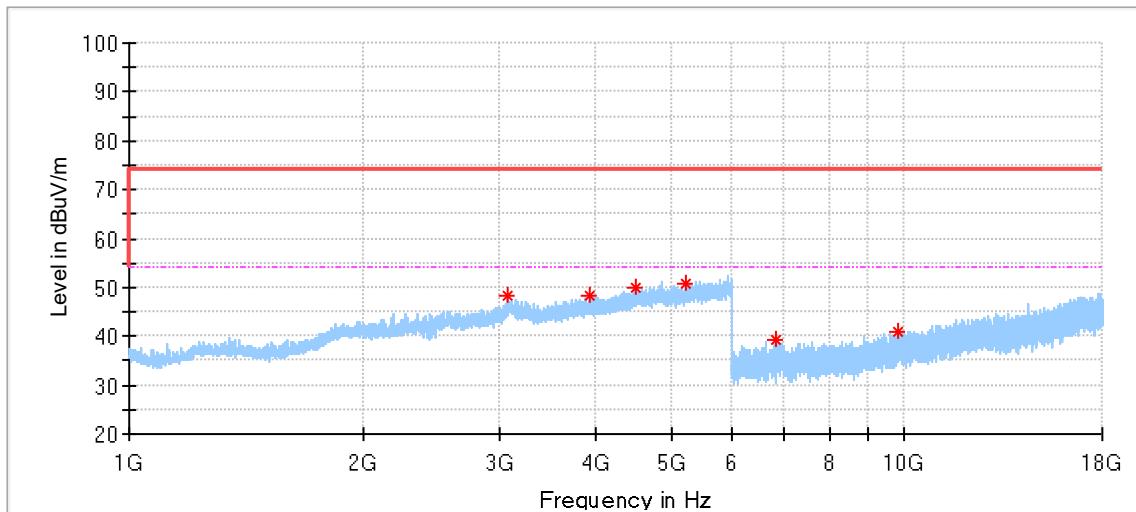


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3079.000000	48.16	74.00	25.84	150.0	H	197.0	2.22
3937.000000	48.23	74.00	25.77	150.0	H	53.0	2.81
4514.500000	49.98	74.00	24.02	150.0	H	197.0	4.93
5220.000000	50.73	74.00	23.27	150.0	H	161.0	6.42
6835.000000	39.19	74.00	34.81	150.0	H	108.0	9.18
9796.500000	41.12	74.00	32.88	150.0	H	255.0	12.85

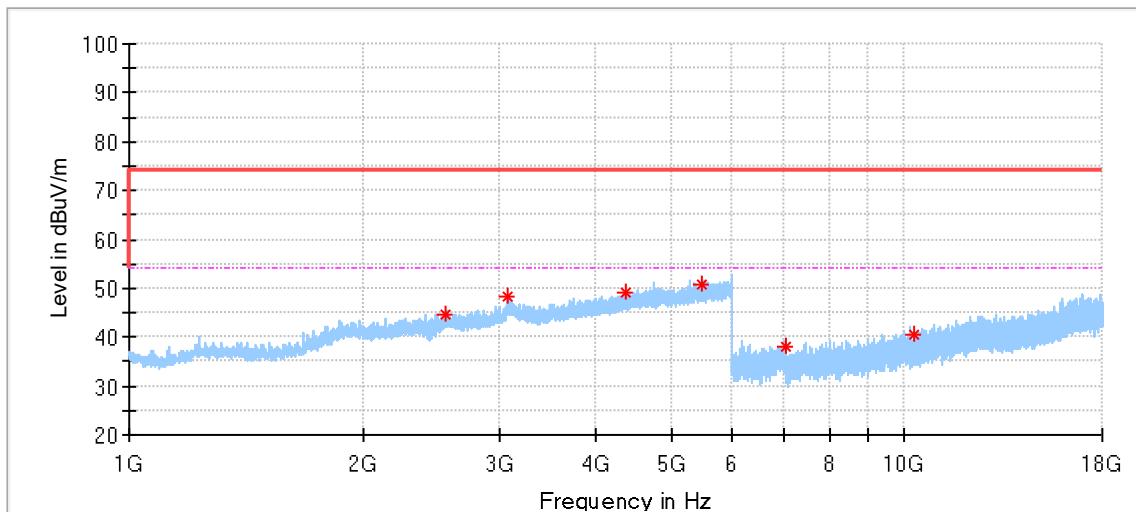


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2561.500000	44.63	74.00	29.37	150.0	V	200.0	-0.56
3070.000000	48.16	74.00	25.84	150.0	V	356.0	1.91
4358.000000	48.93	74.00	25.07	150.0	V	68.0	4.09
5495.000000	50.80	74.00	23.20	150.0	V	212.0	7.15
7041.000000	37.90	74.00	36.10	150.0	V	353.0	8.92
10294.000000	40.56	74.00	33.44	150.0	V	282.0	13.42

Spurious emission of 18GHz-25GHz
BLE_1Mbps_Low Channel: 2402MHz

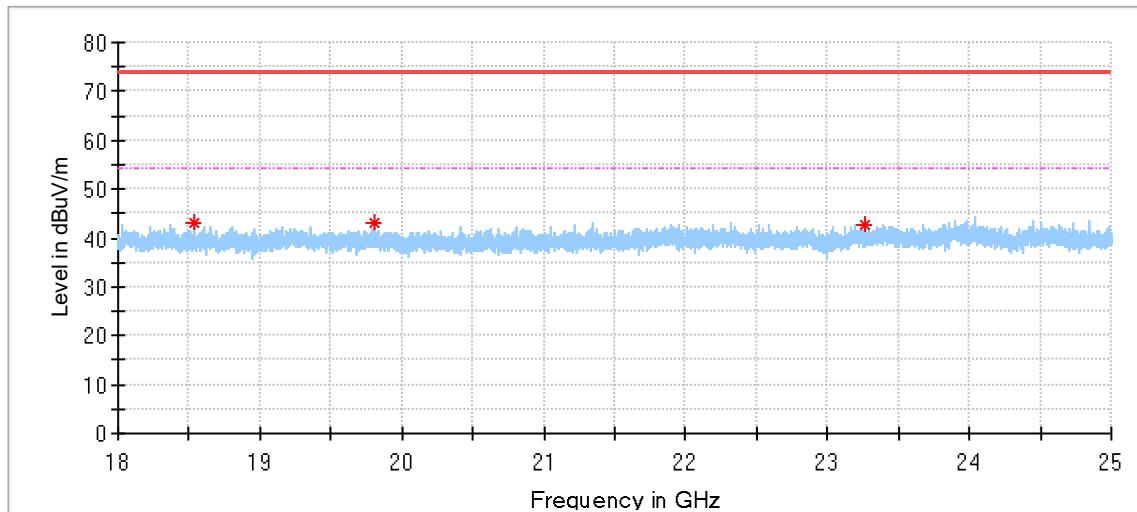


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18532.125000	42.97	74.00	31.03	150.0	H	0.0	-4.50
19800.562500	43.24	74.00	30.76	150.0	H	219.0	-3.33
23260.750000	42.80	74.00	31.20	150.0	H	295.0	0.16

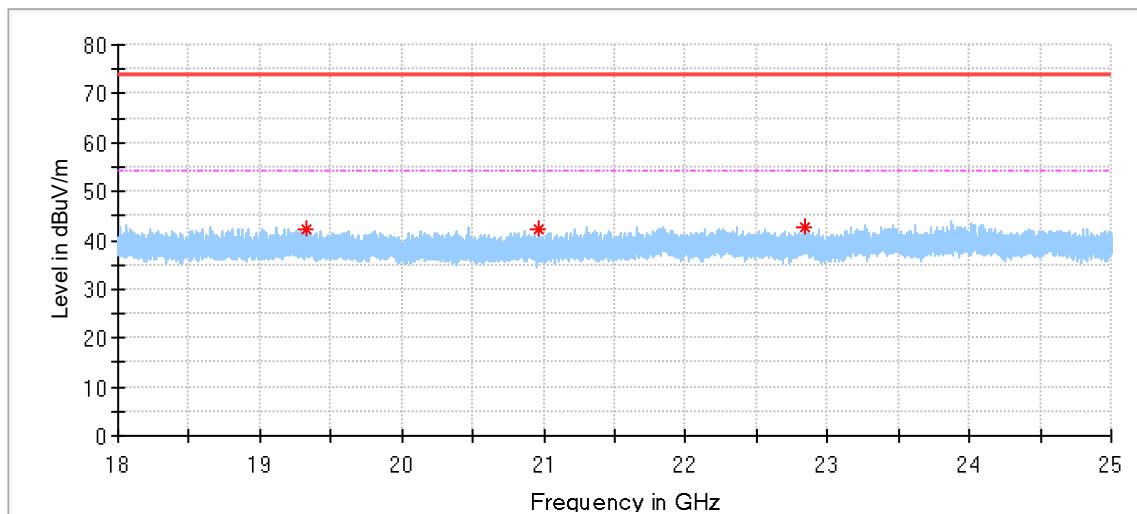


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19322.781250	42.07	74.00	31.93	150.0	V	5.0	-3.78
20958.812500	42.13	74.00	31.87	150.0	V	140.0	-1.92
22837.000000	42.60	74.00	31.40	150.0	V	238.0	-0.15

BLE_1Mbps_Middle Channel: 2440MHz

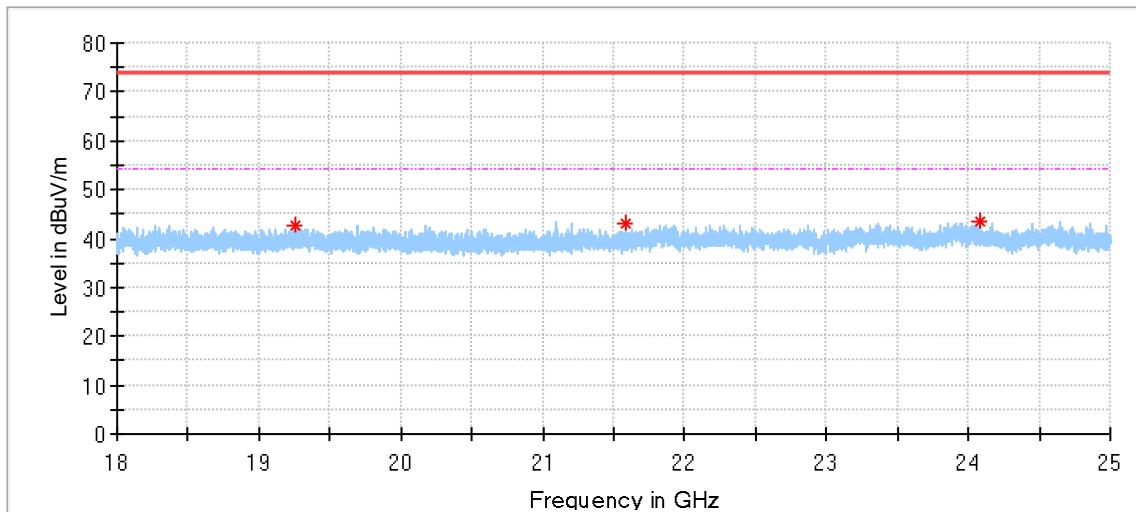


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19254.687500	42.85	74.00	31.15	150.0	H	138.0	-3.87
21586.687500	43.24	74.00	30.76	150.0	H	77.0	-1.11
24085.062500	43.55	74.00	30.45	150.0	H	213.0	0.64

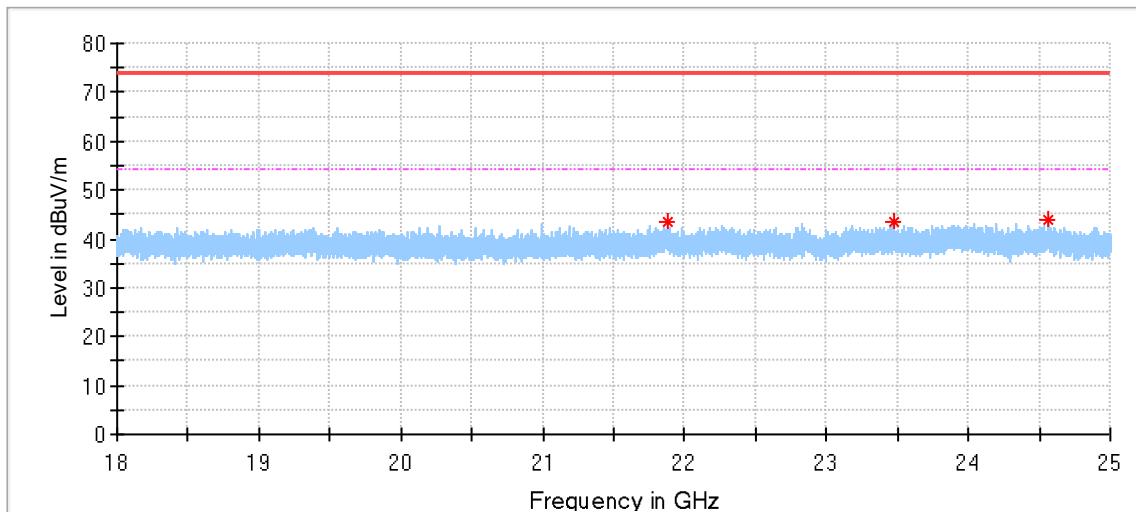


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
21876.468750	43.39	74.00	30.61	150.0	V	176.0	-0.74
24563.593750	43.81	74.00	30.19	150.0	V	249.0	0.44
23476.625000	43.32	74.00	30.68	150.0	V	281.0	0.26

BLE_1Mbps_High Channel: 2480MHz

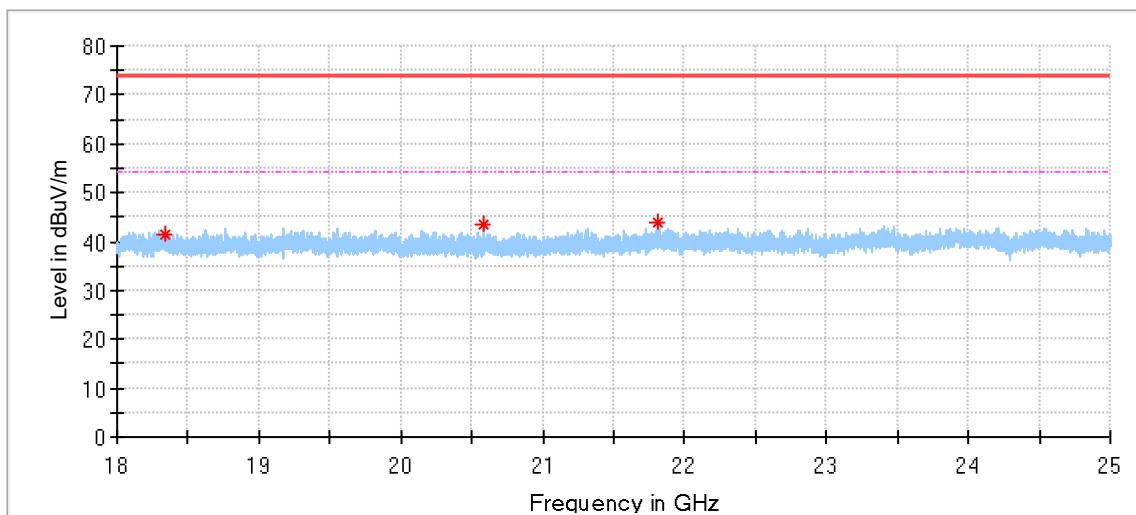


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18332.062500	41.35	74.00	32.65	150.0	H	320.0	-4.60
20579.500000	43.40	74.00	30.60	150.0	H	0.0	-2.52
21814.250000	43.94	74.00	30.06	150.0	H	290.0	-0.82

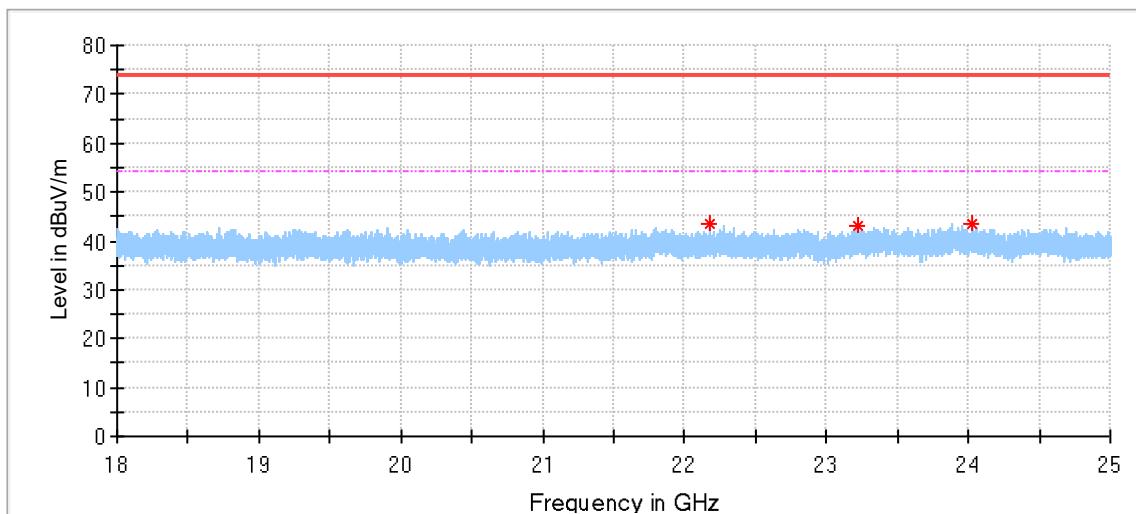


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23214.781250	42.96	74.00	31.04	150.0	V	0.0	0.13
22171.343750	43.30	74.00	30.70	150.0	V	296.0	-0.34
24030.500000	43.39	74.00	30.61	150.0	V	296.0	0.67

Restricted-band band-edge

BLE_1M_Low Channel:

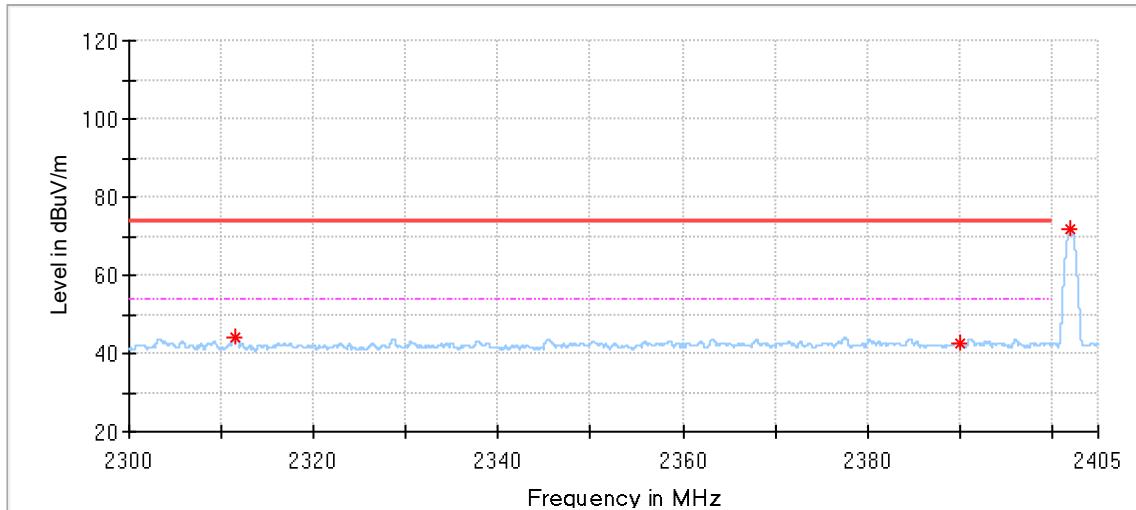


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2311.487000	44.21	74.00	29.79	150.0	H	289.0	-2.20
2390.016500	42.40	74.00	31.60	150.0	H	0.0	-1.92
2401.944500	72.00	---	---	150.0	H	42.0	-1.73

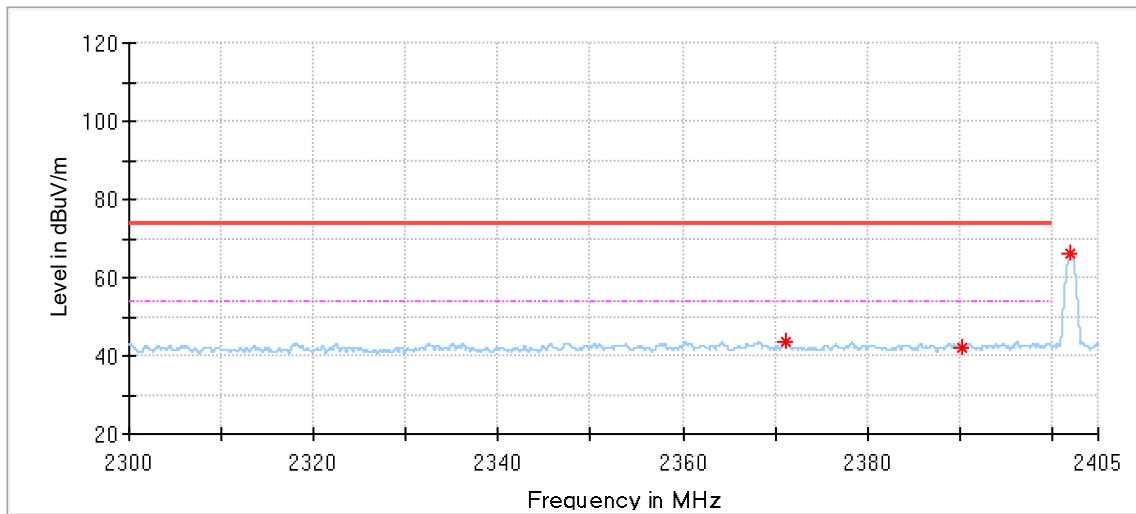


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2371.064000	43.73	74.00	30.27	150.0	V	225.0	-2.21
2390.205500	42.17	74.00	31.83	150.0	V	195.0	-1.92
2401.955000	66.40	---	---	150.0	V	225.0	-1.73

BLE_1M_High Channel:

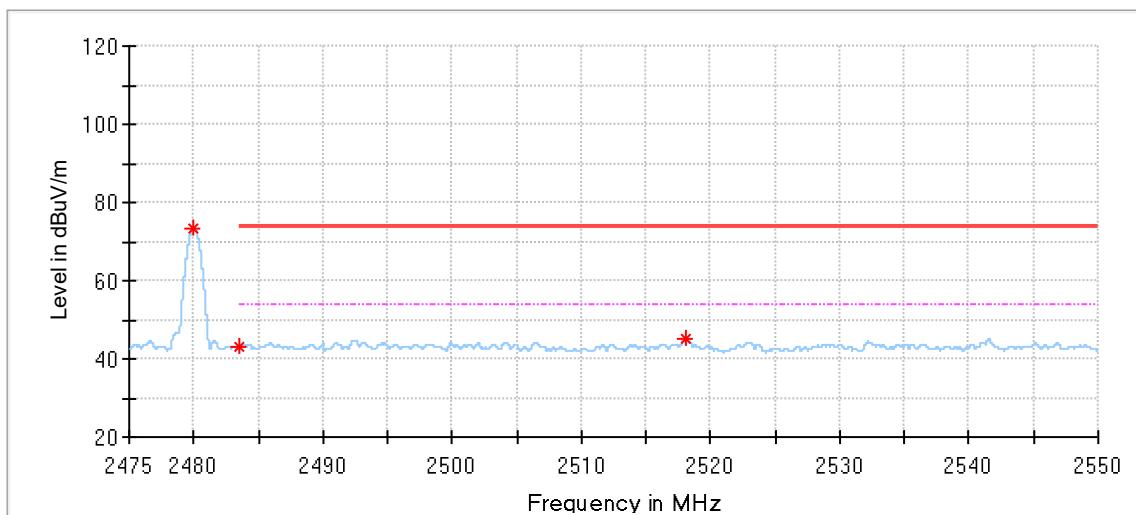

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.942500	73.40	---	---	150.0	H	42.0	-1.44
2483.557500	43.04	74.00	30.96	150.0	H	110.0	-1.45
2518.095000	45.09	74.00	28.91	150.0	H	127.0	-1.43

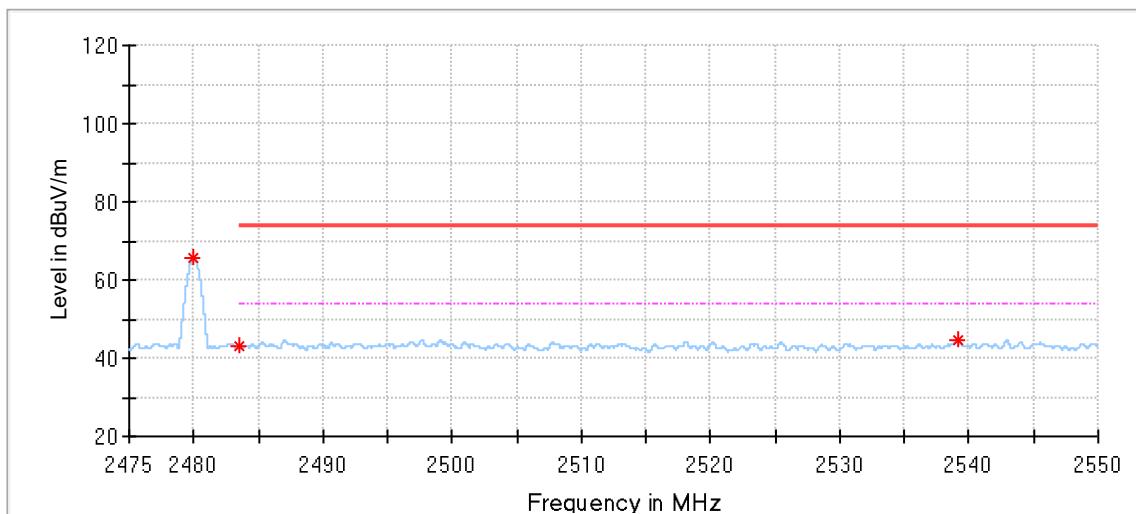

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.942500	65.44	---	---	150.0	V	217.0	-1.44
2483.505000	43.06	74.00	30.94	150.0	V	338.0	-1.45
2539.095000	44.66	74.00	29.34	150.0	V	99.0	-1.15

Remark:

- (1) MaxPeak= Reading Level + Correction Factor
- (2) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)
- (3) For 9kHz-30MHz and 30MHz-1GHz, all modes were tested, and only the modes with the worst data (BLE_2402MHz) were represented in the report.

10 Test Equipment List

Radiated Emission Test (9kHz-30MHz) (SAC-3 #1)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2026-4-25
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2026-7-17
Cable	HUBER-SUHNER	RG214	68-4-90-14-001-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test (30MHz-1GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2026-4-25
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2026-2-11
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2026-4-19
Cable	OUQIAO	18DLB5-NMNM-7000	68-4-90-19-006-A22	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission Test (1GHz-18GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2026-4-25
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2026-3-10
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2026-4-19
Cable	OUQIAO	18DLB5-NMNM-7000	68-4-90-19-006-A22	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission Test (18GHz-40GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2026-4-25
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2026-6-19
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2026-7-7
Cable	JUNFLON	MWX241	68-4-90-19-006-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF Test System(FCC Part15 C)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2026-4-18
RF Meas. and Switch Matrix Unit	TST PASS	TSCB3023R2	68-4-93-23-001	2811685c	1	2026-4-18
Cable	JUNFLON	J12J103539	68-4-90-19-003-A20	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A21	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A22	----	----	----
Test software	TST PASS	TST PASS	68-4-93-23-001-A03	Version 2.0	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15

Remark: N/A means not applicable.

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.69dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.79dB; Vertical: 5.86dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.37dB; Vertical: 5.37dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) above 18000MHz	Horizontal: 5.29dB; Vertical: 5.29dB;
Uncertainty for RF Conducted Measurement power	1.12dB
Uncertainty Evaluation for PSD and OOB Conducted measurement	1.05dB

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4.

--- END OF REPORT---