

TEST REPORT

Reference No...... : WTD22D05093690W001
FCC ID : 2AEPBLACKG-2
Applicant..... : COLOMBIANA DE COMERCIO S.A.
Address..... : Car. 43E No 8-71, Medellin, Colombia
Manufacturer : COOSEA GROUP (HK) COMPANY LIMITED LIMITED
Address..... : UNIT 5-6, 16F., MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIM SHA TSUI KL, HONG KONG
Product..... : CELLPHONE
Model(s) : Black G 2
Brand Name..... : Kalley
Standards..... : FCC CFR47 Part 15.247
Date of Receipt sample : 2022-05-13
Date of Test : 2022-05-13 to 2022-06-17
Date of Issue..... : 2022-06-17
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:



Daniel Liu

Daniel Liu / Designated Reviewer

2 Contents

| | Page |
|---|-------------|
| 1 COVER PAGE | 1 |
| 2 CONTENTS | 2 |
| 3 REVISION HISTORY | 4 |
| 4 GENERAL INFORMATION | 5 |
| 4.1 GENERAL DESCRIPTION OF E.U.T. | 5 |
| 4.2 DETAILS OF E.U.T. | 5 |
| 4.3 CHANNEL LIST | 6 |
| 4.4 TEST MODE | 6 |
| 4.5 TEST FACILITY | 7 |
| 5 TEST SUMMARY | 8 |
| 6 EQUIPMENT USED DURING TEST | 9 |
| 6.1 EQUIPMENTS LIST | 9 |
| 6.2 DESCRIPTION OF SUPPORT UNITS | 10 |
| 6.3 MEASUREMENT UNCERTAINTY | 10 |
| 7 CONDUCTED EMISSION | 11 |
| 7.1 E.U.T. OPERATION | 11 |
| 7.2 EUT SETUP | 11 |
| 7.3 MEASUREMENT DESCRIPTION | 11 |
| 7.4 CONDUCTED EMISSION TEST RESULT | 12 |
| 8 RADIATED SPURIOUS EMISSIONS | 14 |
| 8.1 EUT OPERATION..... | 14 |
| 8.2 TEST SETUP | 15 |
| 8.3 SPECTRUM ANALYZER SETUP | 16 |
| 8.4 TEST PROCEDURE | 17 |
| 8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION | 17 |
| 8.6 SUMMARY OF TEST RESULTS | 18 |
| 9 CONDUCTED SPURIOUS EMISSIONS | 21 |
| 9.1 TEST PROCEDURE | 21 |
| 9.2 TEST RESULT | 22 |
| 10 BAND EDGE MEASUREMENT | 32 |
| 10.1 TEST PROCEDURE..... | 32 |
| 10.2 TEST RESULT | 33 |
| 11 20 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT | 39 |
| 11.1 TEST PROCEDURE..... | 39 |
| 11.2 TEST RESULT | 39 |
| 12 MAXIMUM PEAK OUTPUT POWER | 45 |
| 12.1 TEST PROCEDURE..... | 45 |
| 12.2 TEST RESULT | 46 |
| 13 HOPPING CHANNEL SEPARATION | 52 |
| 13.1 TEST PROCEDURE..... | 52 |
| 13.2 TEST RESULT | 53 |
| 14 NUMBER OF HOPPING FREQUENCY | 59 |
| 14.1 TEST PROCEDURE..... | 59 |

| | | |
|-----------|---|-----------|
| 14.2 | TEST RESULT | 60 |
| 15 | DWELL TIME | 62 |
| 15.1 | TEST PROCEDURE..... | 62 |
| 15.2 | TEST RESULT | 62 |
| 16 | ANTENNA REQUIREMENT | 68 |
| 17 | RF EXPOSURE..... | 69 |
| 18 | PHOTOGRAPHS OF TEST SETUP AND EUT..... | 70 |

3 Revision History

| Test report No. | Date of Receipt sample | Date of Test | Date of Issue | Purpose | Comment | Approved |
|------------------------|------------------------|--------------------------------|---------------|----------|---------|----------|
| WTD22D05093690 W001 | 2022-05-13 | 2022-05-13 to 2022-06-17 | 2022-06-17 | Original | - | Valid |

4 General Information

4.1 General Description of E.U.T.

| | |
|---------------------------------------|---|
| Product: | CELLPHONE |
| Model(s): | Black G 2 |
| GSM Band(s): | GSM 850/900/1800/1900MHz |
| GPRS/EGPRS Class: | 12 |
| WCDMA Band(s): | FDD Band II/V |
| LTE Band(s): | FDD Band 4/7 |
| Wi-Fi Specification: | 2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac(HT20/40/80) |
| Bluetooth Version: | Bluetooth 5.0+ EDR |
| GPS: | Support |
| Hardware Version: | KS7Q_01 |
| Software Version: | K6532Q3KL.GB.FHD.S.F2FTRHFZG3PQLFTYFB.0506_1423.V2.01 |
| Highest frequency (Exclude Radio): | 1.3GHz |
| Storage Location: | Internal Storage |

4.2 Details of E.U.T.

| | |
|-----------------------|---|
| Operation Frequency: | Bluetooth: 2402~2480MHz |
| Max. RF output power: | Bluetooth: 7.89dBm |
| Type of Modulation: | Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK |
| Antenna installation: | Bluetooth: internal permanent antenna |
| Antenna Gain: | Bluetooth: -1.2dBi |
| Ratings: | Battery DC 3.87V, 5000mAh DC 5.0V $\overline{=}$ 2.0A charging from adapter (Adapter Input: 100-240V~50/60Hz 0.35A) |
| Adapter: | Manufacturer: Guangdong Beicom Electronics Co. Ltd. Model No.: U312E0A050200 |

4.3 Channel List

Normal

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 0 | 2402 | 1 | 2403 | 2 | 2404 | 3 | 2405 |
| 4 | 2406 | 5 | 2407 | 6 | 2408 | 7 | 2409 |
| 8 | 2410 | 9 | 2411 | 10 | 2412 | 11 | 2413 |
| 12 | 2414 | 13 | 2415 | 14 | 2416 | 15 | 2417 |
| 16 | 2418 | 17 | 2419 | 18 | 2420 | 19 | 2421 |
| 20 | 2422 | 21 | 2423 | 22 | 2424 | 23 | 2425 |
| 24 | 2426 | 25 | 2427 | 26 | 2428 | 27 | 2429 |
| 28 | 2430 | 29 | 2431 | 30 | 2432 | 31 | 2433 |
| 32 | 2434 | 33 | 2435 | 34 | 2436 | 35 | 2437 |
| 36 | 2438 | 37 | 2439 | 38 | 2440 | 39 | 2441 |
| 40 | 2442 | 41 | 2443 | 42 | 2444 | 43 | 2445 |
| 44 | 2446 | 45 | 2447 | 46 | 2448 | 47 | 2449 |
| 48 | 2450 | 49 | 2451 | 50 | 2452 | 51 | 2453 |
| 52 | 2454 | 53 | 2455 | 54 | 2456 | 55 | 2457 |
| 56 | 2458 | 57 | 2459 | 58 | 2460 | 59 | 2461 |
| 60 | 2462 | 61 | 2463 | 62 | 2464 | 63 | 2465 |
| 64 | 2466 | 65 | 2467 | 66 | 2468 | 67 | 2469 |
| 68 | 2470 | 69 | 2471 | 70 | 2472 | 71 | 2473 |
| 72 | 2474 | 73 | 2475 | 74 | 2476 | 75 | 2477 |
| 76 | 2478 | 77 | 2479 | 78 | 2480 | - | - |

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

| Test mode | Low channel | Middle channel | High channel |
|--------------|-------------|----------------|--------------|
| Transmitting | 2402MHz | 2441MHz | 2480MHz |

4.5 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Test Summary

| Test Items | Test Requirement | Result |
|---|----------------------------------|----------|
| Radiated Spurious Emissions | 15.205(a) 15.209 15.247(d) | PASS |
| Conducted Spurious emissions | 15.247(d) | PASS |
| Band edge | 15.247(d) 15.205(a) | PASS |
| Conducted Emission | 15.207 | PASS |
| 20 dB Bandwidth and 99% Bandwidth | 15.247(a)(1) | PASS |
| Maximum Peak Output Power | 15.247(b)(1) | PASS |
| Frequency Separation | 15.247(a)(1) | PASS |
| Number of Hopping Frequency | 15.247(a)(1)(iii) | PASS |
| Dwell time | 15.247(a)(1)(iii) | PASS |
| Antenna Requirement | 15.203 | Complies |
| Maximum Permissible Exposure (Exposure of Humans to RF Fields) | 1.1307(b)(1) | PASS |

6 Equipment Used during Test

6.1 Equipments List

| Conducted Emissions Test Site 1# | | | | | | |
|---|----------------------------|----------------------|--------------|------------|-----------------------|----------------------|
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1. | EMI Test Receiver | R&S | ESCI | 100947 | 2021-07-26 | 2022-07-25 |
| 2. | LISN | R&S | ENV216 | 100115 | 2021-07-26 | 2022-07-25 |
| 3. | Cable | Top | TYPE16(3.5M) | - | 2021-07-26 | 2022-07-25 |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 1# | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1 | Spectrum Analyzer | R&S | FSP30 | 100091 | 2022-04-28 | 2023-04-27 |
| 2 | Amplifier | Agilent | 8447D | 2944A10178 | 2021-07-26 | 2022-07-25 |
| 3 | Trilog Broadband Antenna | SCHWARZBECK | VULB9163 | 336 | 2021-08-23 | 2022-08-22 |
| 4 | Coaxial Cable (below 1GHz) | Top | TYPE16(13M) | - | 2022-04-28 | 2023-04-27 |
| 5 | Broad-band Horn Antenna | SCHWARZBECK | BBHA 9120 D | 667 | 2022-04-28 | 2023-04-27 |
| 6 | Broad-band Horn Antenna | SCHWARZBECK | BBHA 9170 | 335 | 2021-07-30 | 2022-07-29 |
| 7 | Broadband Preamplifier | COMPLIANCE DIRECTION | PAP-1G18 | 2004 | 2022-04-28 | 2023-04-27 |
| 8 | Coaxial Cable (above 1GHz) | ZT26-NJ-NJ-8M/FA | 1GHz-18GHz | NA | 2021-07-26 | 2022-07-25 |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 2# | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No | Last Calibration Date | Calibration Due Date |
| 1 | Test Receiver | R&S | ESCI | 101296 | 2022-04-28 | 2023-04-27 |
| 2 | Trilog Broadband Antenna | SCHWARZBECK | VULB9160 | 9160-3325 | 2021-10-31 | 2022-10-30 |
| 3 | Active Loop Antenna | Com-Power Corp. | AL-130R | 10160007 | 2022-05-02 | 2023-05-01 |
| 4 | Amplifier | ANRITSU | MH648A | M43381 | 2022-04-28 | 2023-04-27 |
| 5 | Cable | HUBER+SUHNER | CBL2 | 525178 | 2022-04-28 | 2023-04-27 |
| RF Conducted Testing | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1. | Spectrum Analyzer | R&S | FSP40 | 100501 | 2021-07-26 | 2022-07-25 |
| 2. | EXA Signal Analyzer | Malaysia Keysight | N9010A | MY50520207 | 2022-04-28 | 2023-04-27 |

6.2 Description of Support Units

| Equipment | Manufacturer | Model No. | Series No. |
|-----------|--------------|-----------|------------|
| / | / | / | / |

6.3 Measurement Uncertainty

| Parameter | Uncertainty |
|---|---|
| Conducted Emission | ± 3.64 dB(AC mains 150KHz~30MHz) |
| Radiated Spurious Emissions | ± 5.08 dB (Bilog antenna 30M~1000MHz) |
| | ± 4.99 dB (Horn antenna 1000M~25000MHz) |
| Radio Frequency | ± 1 x 10 ⁻⁷ Hz |
| RF Power | ± 0.42 dB |
| Dwell time | 1.0% |
| Conducted Spurious Emissions | ± 2.76 dB (9kHz~26500MHz) |
| Confidence interval: 95%. Confidence factor:k=2 | |

7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207
 Test Method: ANSI C63.10:2013
 Test Result: PASS
 Frequency Range: 150kHz to 30MHz
 Class/Severity: Class B

Limit:

| Frequency (MHz) | Limit (dB μ V) | |
|-----------------|--------------------|----------|
| | Quasi peak | Average |
| 0.15 to .5 | 66 to 56* | 56 to 46 |
| 0.5 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

7.1 E.U.T. Operation

Operating Environment :


Temperature: 22.8 °C
 Humidity: 52.6 % RH
 Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013.

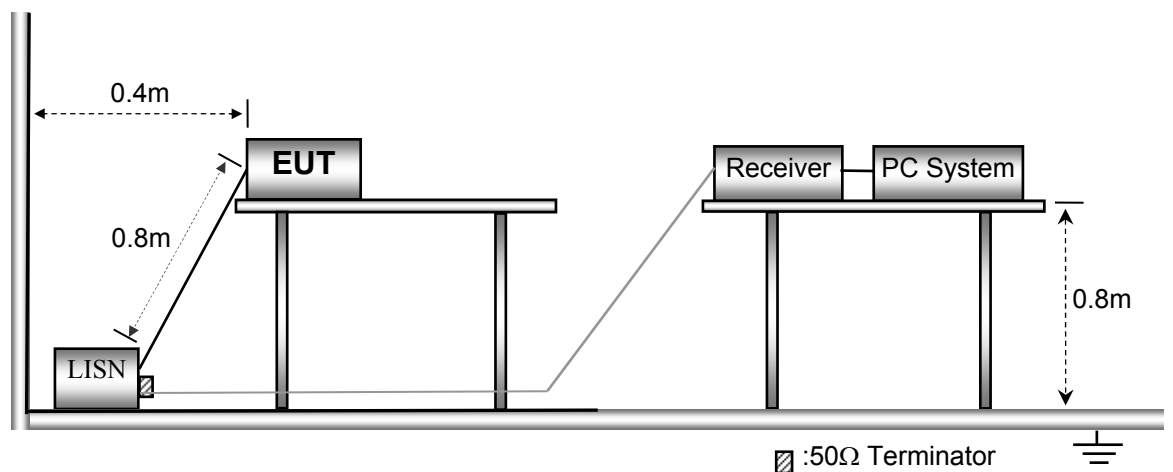


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


Remark: only the worst data (GFSK modulation Low channel mode) were reported

Live line:

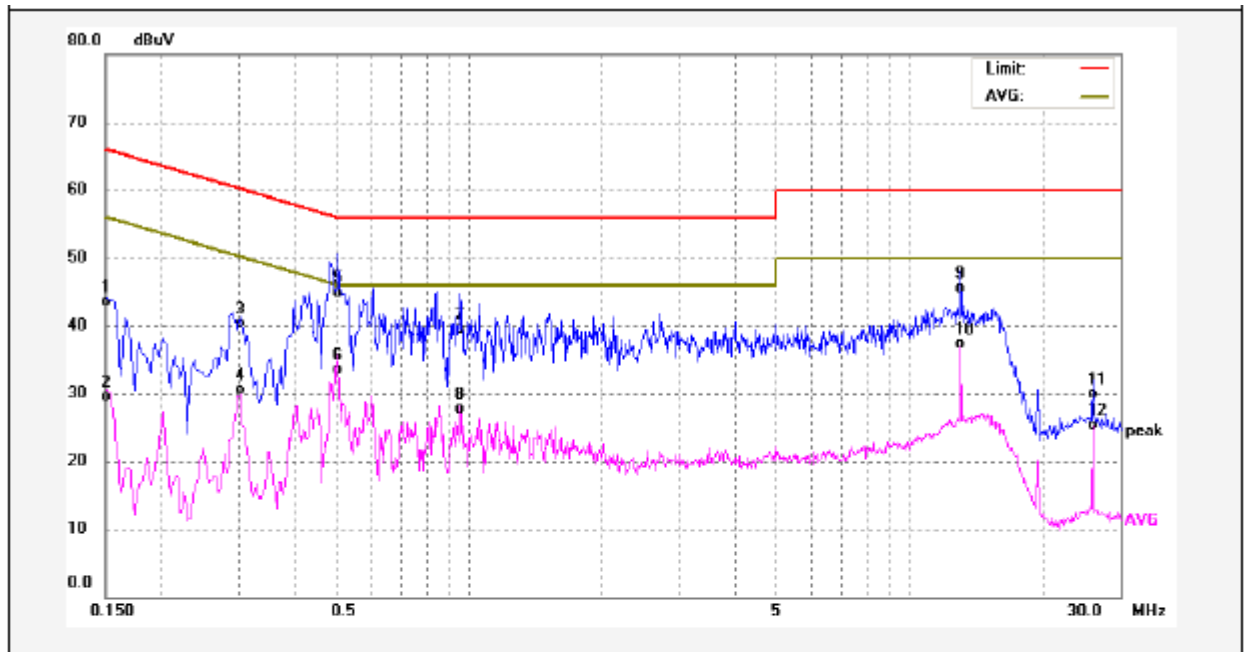

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1 | 0.1500 | 33.20 | 10.26 | 43.46 | 65.99 | -22.53 | QP | |
| 2 | 0.1500 | 19.21 | 10.26 | 29.47 | 55.99 | -26.52 | AVG | |
| 3 | 0.3019 | 30.18 | 10.21 | 40.39 | 60.19 | -19.80 | QP | |
| 4 | 0.3019 | 20.33 | 10.21 | 30.54 | 50.19 | -19.65 | AVG | |
| 5 | 0.5060 | 34.69 | 10.19 | 44.88 | 56.00 | -11.12 | QP | |
| 6 | 0.5060 | 23.39 | 10.19 | 33.58 | 46.00 | -12.42 | AVG | |
| 7 | 0.9579 | 29.26 | 10.30 | 39.56 | 56.00 | -16.44 | QP | |
| 8 | 0.9579 | 17.50 | 10.30 | 27.80 | 46.00 | -18.20 | AVG | |
| 9 | 13.0018 | 34.89 | 10.62 | 45.51 | 60.00 | -14.49 | QP | |
| 10 | 13.0018 | 26.71 | 10.62 | 37.33 | 50.00 | -12.67 | AVG | |
| 11 | 26.0019 | 19.43 | 10.50 | 29.93 | 60.00 | -30.07 | QP | |
| 12 | 26.0019 | 14.88 | 10.50 | 25.38 | 50.00 | -24.62 | AVG | |

Neutral line:

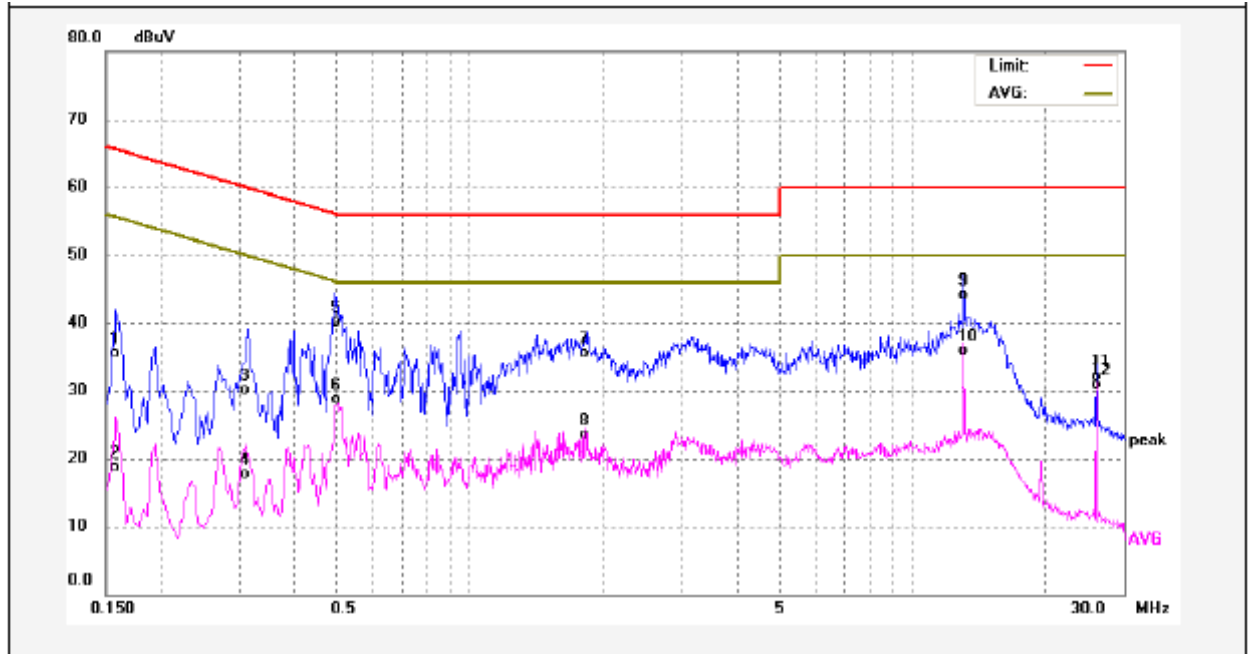

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1 | 0.1580 | 25.24 | 10.25 | 35.49 | 65.56 | -30.07 | QP | |
| 2 | 0.1580 | 8.38 | 10.25 | 18.63 | 55.56 | -36.93 | AVG | |
| 3 | 0.3100 | 19.89 | 10.21 | 30.10 | 59.97 | -29.87 | QP | |
| 4 | 0.3100 | 7.49 | 10.21 | 17.70 | 49.97 | -32.27 | AVG | |
| 5 | 0.5020 | 29.99 | 10.19 | 40.18 | 56.00 | -15.82 | QP | |
| 6 | 0.5020 | 18.56 | 10.19 | 28.75 | 46.00 | -17.25 | AVG | |
| 7 | 1.8140 | 25.28 | 10.31 | 35.59 | 56.00 | -20.41 | QP | |
| 8 | 1.8140 | 13.17 | 10.31 | 23.48 | 46.00 | -22.52 | AVG | |
| 9 | 13.0020 | 33.40 | 10.62 | 44.02 | 60.00 | -15.98 | QP | |
| 10 | 13.0020 | 25.38 | 10.62 | 36.00 | 50.00 | -14.00 | AVG | |
| 11 | 26.0020 | 21.61 | 10.50 | 32.11 | 60.00 | -27.89 | QP | |
| 12 | 26.0020 | 20.43 | 10.50 | 30.93 | 50.00 | -19.07 | AVG | |

8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.205 &15.209 & 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Measurement Distance: 3m

Limit:

| Frequency (MHz) | Field Strength | | Field Strength Limit at 3m Measurement Dist | |
|--------------------|-----------------------|-----------------|---|---------------------------------------|
| | uV/m | Distance (m) | uV/m | dBuV/m |
| 0.009 ~ 0.490 | $2400/F(\text{kHz})$ | 300 | $10000 * 2400/F(\text{kHz})$ | $20\log^{(2400/F(\text{kHz}))} + 80$ |
| 0.490 ~ 1.705 | $24000/F(\text{kHz})$ | 30 | $100 * 24000/F(\text{kHz})$ | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30 | 30 | 30 | $100 * 30$ | $20\log^{(30)} + 40$ |
| 30 ~ 88 | 100 | 3 | 100 | $20\log^{(100)}$ |
| 88 ~ 216 | 150 | 3 | 150 | $20\log^{(150)}$ |
| 216 ~ 960 | 200 | 3 | 200 | $20\log^{(200)}$ |
| Above 960 | 500 | 3 | 500 | $20\log^{(500)}$ |

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

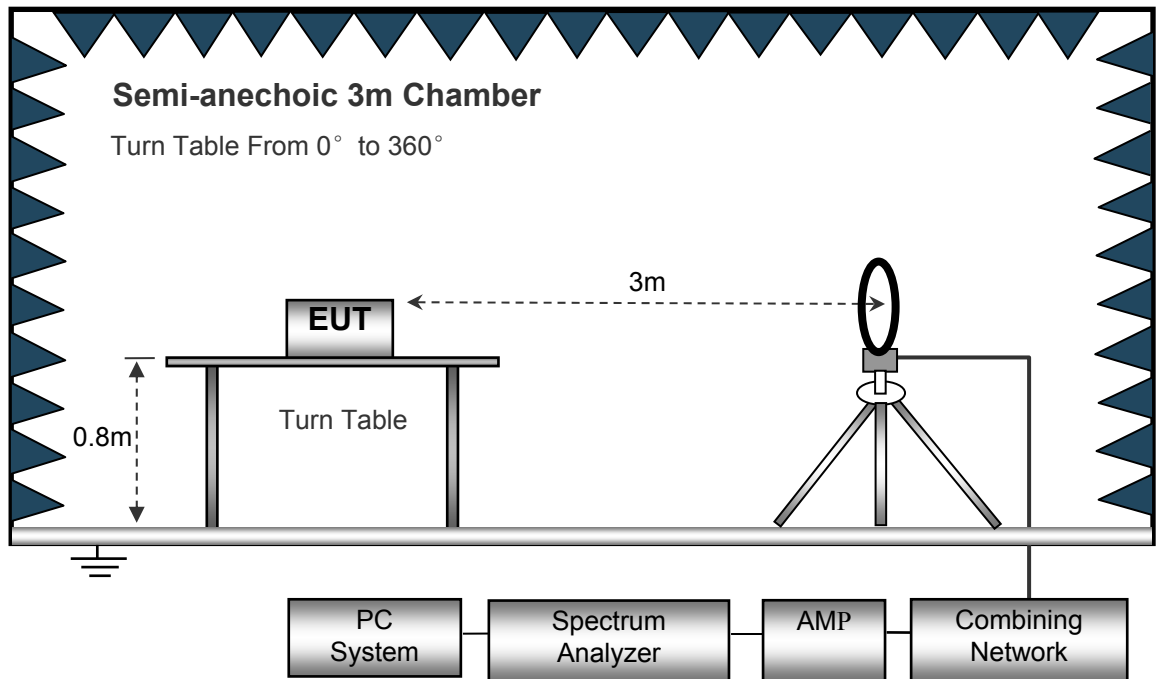

The test setup for emission measurement from 30 MHz to 1 GHz.

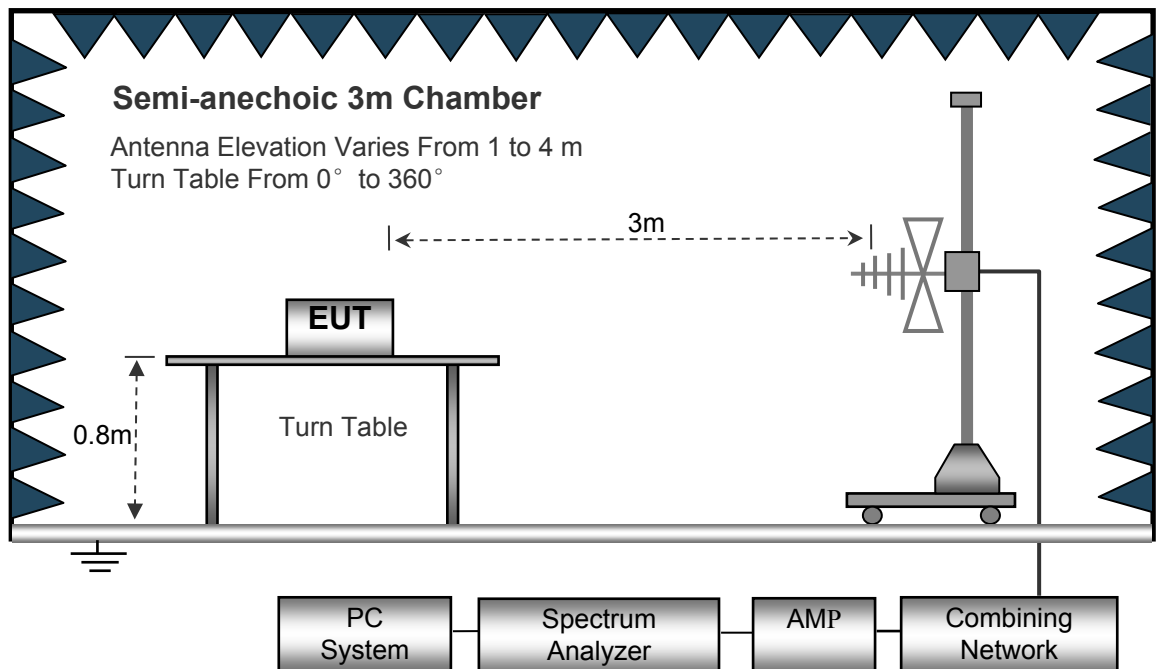

The test setup for emission measurement above 1 GHz.

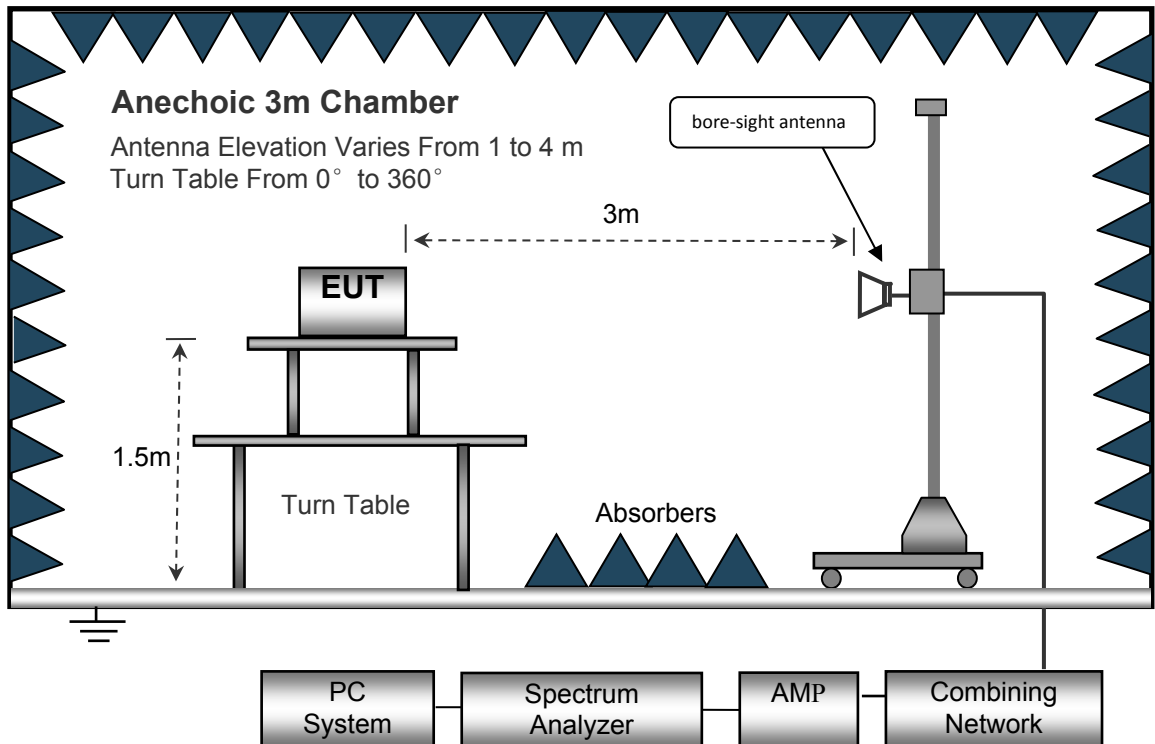

8.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed Auto
- IF Bandwidth..... 10kHz
- Video Bandwidth..... 10kHz
- Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 100kHz
- Video Bandwidth..... 300kHz

Above 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 3MHz
- Detector Ave.
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency: 9KHz~30MHz

Remark: only the worst data (GFSK modulation Low channel mode) were reported

| Frequency (MHz) | Measurement results dB μ V @3m | Detector PK/QP | Correct factor dB/m | Extrapolation factor dB | Measurement results (calculated) dB μ V/m @30m | Limits dB μ V/m @30m | Margin dB |
|--------------------|------------------------------------|----------------|---------------------|-------------------------|--|--------------------------|-----------|
| 6.021 | 24.86 | QP | 21.84 | 40.00 | 6.70 | 29.54 | -22.84 |
| 15.730 | 25.38 | QP | 21.35 | 40.00 | 6.73 | 29.54 | -22.81 |
| 25.680 | 25.68 | QP | 20.67 | 40.00 | 6.35 | 29.54 | -23.19 |

Test Frequency: 30MHz ~ 8GHz

Remark: only the worst data (GFSK modulation mode) were reported.

| Frequency (MHz) | Receiver Reading (dB μ V) | Detector (PK/QP/Ave) | Turn table Angle Degree | RX Antenna | | Corrected Factor (dB) | Corrected Amplitude (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------|----------------------------------|-------------------------|----------------------------|---------------|----------------|--------------------------|---------------------------------------|-------------------------|----------------|
| | | | | Height (m) | Polar (H/V) | | | | |
| GFSK Low Channel | | | | | | | | | |
| 268.32 | 36.68 | QP | 59 | 1.1 | H | -13.35 | 23.33 | 46.00 | -22.67 |
| 268.32 | 41.55 | QP | 329 | 1.6 | V | -13.35 | 28.20 | 46.00 | -17.80 |
| 4804.00 | 44.75 | PK | 306 | 1.5 | V | -1.06 | 43.69 | 74.00 | -30.31 |
| 4804.00 | 42.50 | Ave | 306 | 1.5 | V | -1.06 | 41.44 | 54.00 | -12.56 |
| 7206.00 | 41.06 | PK | 357 | 1.2 | H | 1.33 | 42.39 | 74.00 | -31.61 |
| 7206.00 | 34.24 | Ave | 357 | 1.2 | H | 1.33 | 35.57 | 54.00 | -18.43 |
| 2347.81 | 46.77 | PK | 288 | 1.3 | V | -13.19 | 33.58 | 74.00 | -40.42 |
| 2347.81 | 38.96 | Ave | 288 | 1.3 | V | -13.19 | 25.77 | 54.00 | -28.23 |
| 2350.53 | 42.87 | PK | 200 | 1.2 | H | -13.14 | 29.73 | 74.00 | -44.27 |
| 2350.53 | 36.57 | Ave | 200 | 1.2 | H | -13.14 | 23.43 | 54.00 | -30.57 |
| 2485.36 | 42.04 | PK | 317 | 1.8 | V | -13.08 | 28.96 | 74.00 | -45.04 |
| 2485.36 | 37.48 | Ave | 317 | 1.8 | V | -13.08 | 24.40 | 54.00 | -29.60 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | Limit | Margin |
|---------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|----------------|--------|
| | | | | Height | Polar | | | | |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| GFSK Middle Channel | | | | | | | | | |
| 268.32 | 36.76 | QP | 66 | 1.3 | H | -13.35 | 23.41 | 46.00 | -22.59 |
| 268.32 | 42.17 | QP | 210 | 1.7 | V | -13.35 | 28.82 | 46.00 | -17.18 |
| 4882.00 | 43.99 | PK | 270 | 1.7 | V | -0.62 | 43.37 | 74.00 | -30.63 |
| 4882.00 | 43.23 | Ave | 270 | 1.7 | V | -0.62 | 42.61 | 54.00 | -11.39 |
| 7323.00 | 39.95 | PK | 73 | 1.1 | H | 2.21 | 42.16 | 74.00 | -31.84 |
| 7323.00 | 33.80 | Ave | 73 | 1.1 | H | 2.21 | 36.01 | 54.00 | -17.99 |
| 2328.20 | 45.67 | PK | 124 | 1.5 | V | -13.19 | 32.48 | 74.00 | -41.52 |
| 2328.20 | 37.53 | Ave | 124 | 1.5 | V | -13.19 | 24.34 | 54.00 | -29.66 |
| 2360.14 | 44.03 | PK | 5 | 1.1 | H | -13.14 | 30.89 | 74.00 | -43.11 |
| 2360.14 | 37.68 | Ave | 5 | 1.1 | H | -13.14 | 24.54 | 54.00 | -29.46 |
| 2494.29 | 43.70 | PK | 162 | 1.2 | V | -13.08 | 30.62 | 74.00 | -43.38 |
| 2494.29 | 38.88 | Ave | 162 | 1.2 | V | -13.08 | 25.80 | 54.00 | -28.20 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | Limit | Margin |
|-------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|----------------|--------|
| | | | | Height | Polar | | | | |
| (MHz) | (dB μ V) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) |
| GFSK High Channel | | | | | | | | | |
| 268.32 | 35.63 | QP | 183 | 2.0 | H | -13.35 | 22.28 | 46.00 | -23.72 |
| 268.32 | 42.51 | QP | 23 | 1.3 | V | -13.35 | 29.16 | 46.00 | -16.84 |
| 4960.00 | 44.16 | PK | 177 | 1.2 | V | -0.24 | 43.92 | 74.00 | -30.08 |
| 4960.00 | 42.48 | Ave | 177 | 1.2 | V | -0.24 | 42.24 | 54.00 | -11.76 |
| 7440.00 | 38.55 | PK | 108 | 1.3 | H | 2.84 | 41.39 | 74.00 | -32.61 |
| 7440.00 | 35.29 | Ave | 108 | 1.3 | H | 2.84 | 38.13 | 54.00 | -15.87 |
| 2328.50 | 45.58 | PK | 58 | 1.5 | V | -13.19 | 32.39 | 74.00 | -41.61 |
| 2328.50 | 38.47 | Ave | 58 | 1.5 | V | -13.19 | 25.28 | 54.00 | -28.72 |
| 2375.09 | 42.16 | PK | 210 | 1.9 | H | -13.14 | 29.02 | 74.00 | -44.98 |
| 2375.09 | 38.60 | Ave | 210 | 1.9 | H | -13.14 | 25.46 | 54.00 | -28.54 |
| 2497.25 | 43.97 | PK | 212 | 1.3 | V | -13.08 | 30.89 | 74.00 | -43.11 |
| 2497.25 | 36.76 | Ave | 212 | 1.3 | V | -13.08 | 23.68 | 54.00 | -30.32 |

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not recorded

9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

9.2 Test Result


9KHz - 30MHz

GFSK


Low Channel

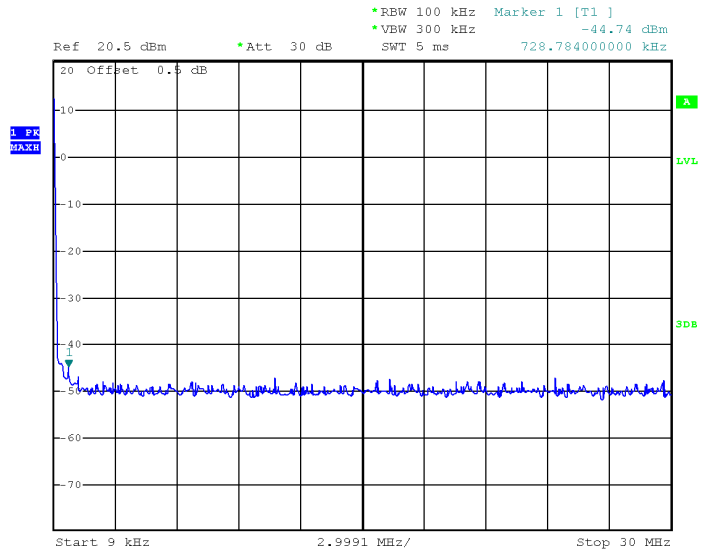

Middle Channel

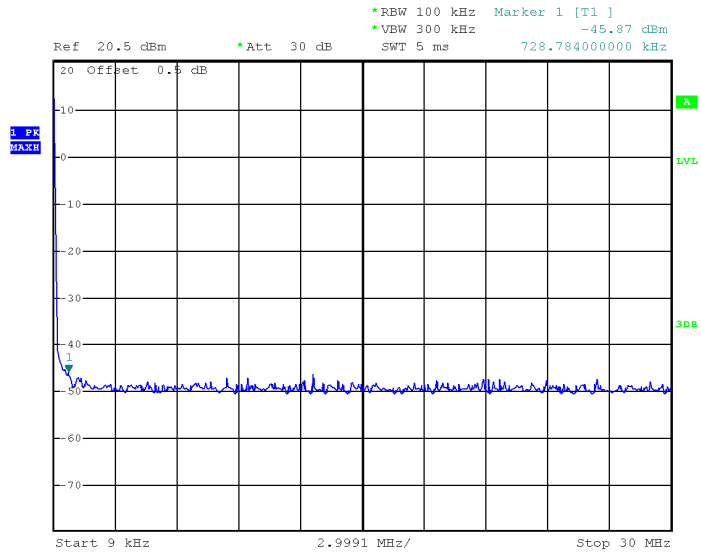


High Channel

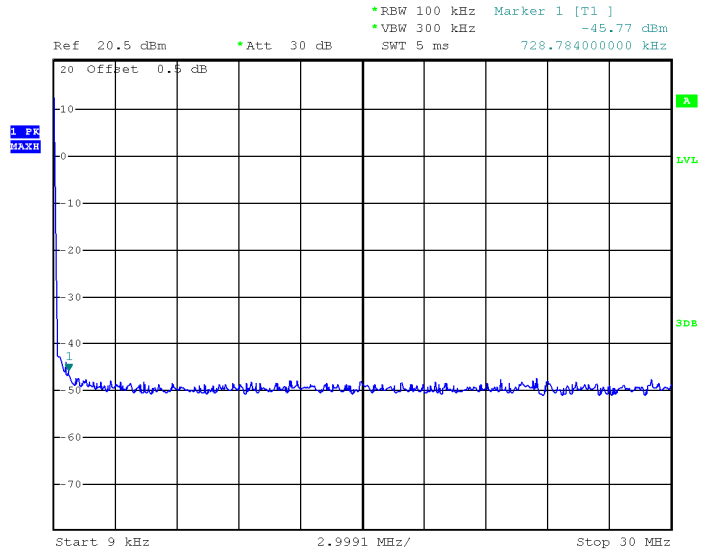


Pi/4DQPSK


Low Channel

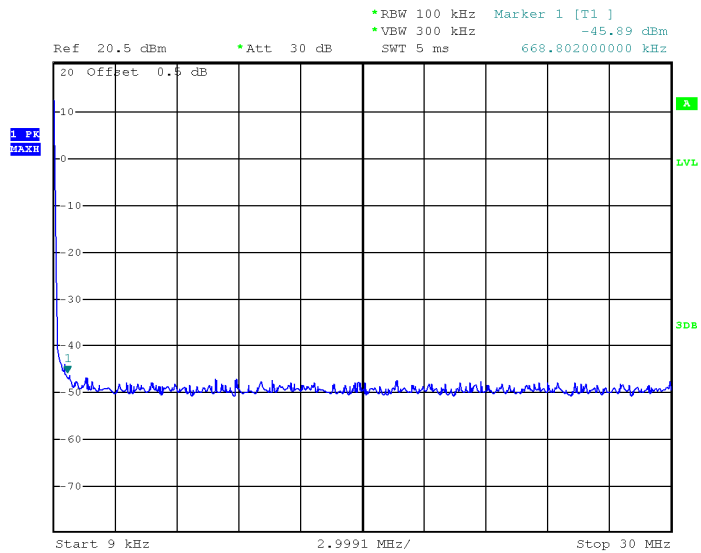

Middle Channel

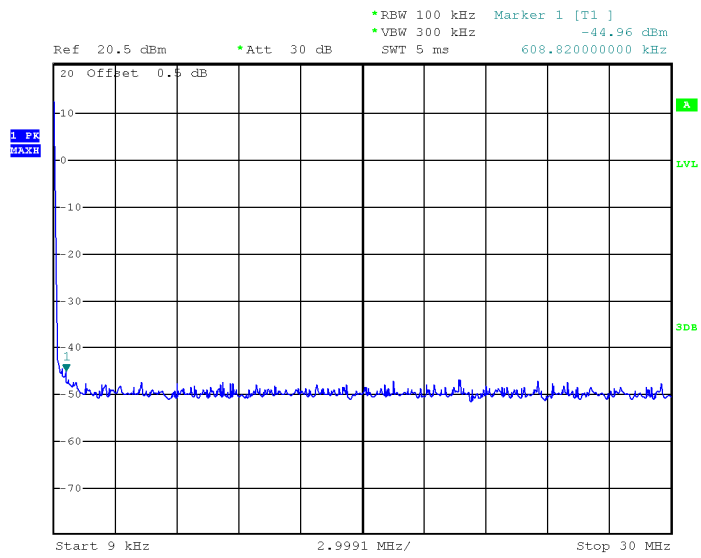


High Channel

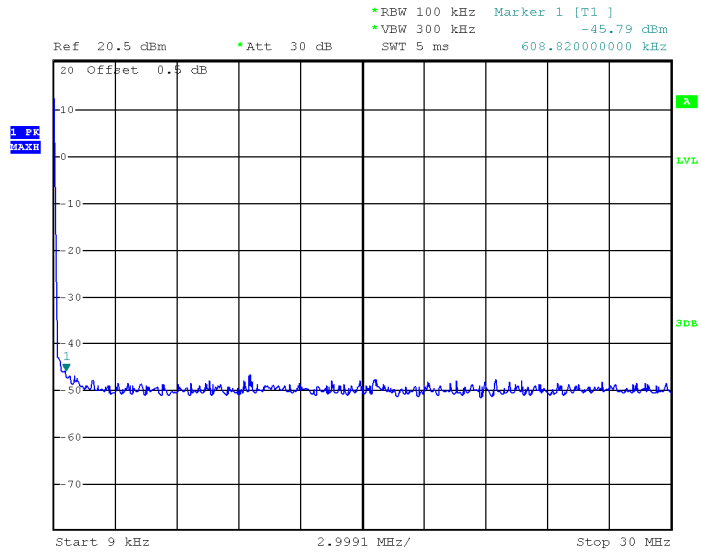


8DPSK


Low Channel

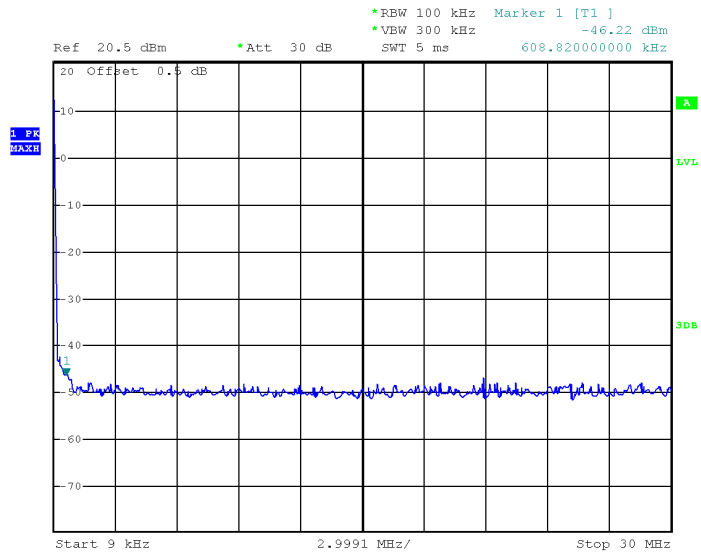

Middle Channel

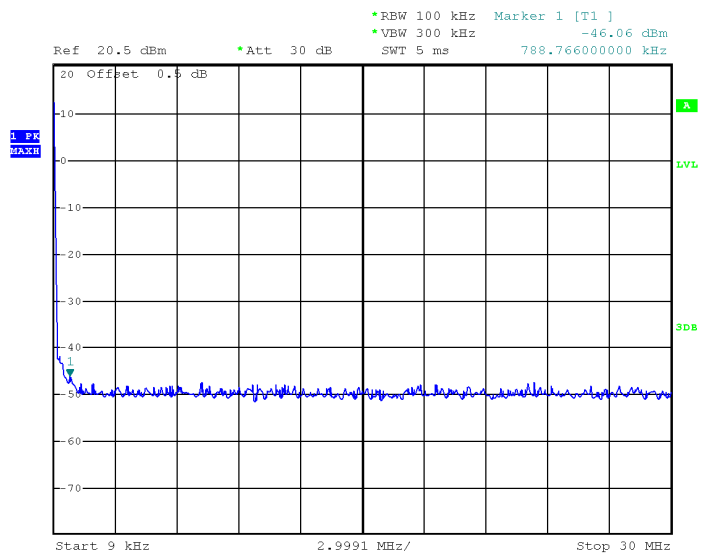


High Channel

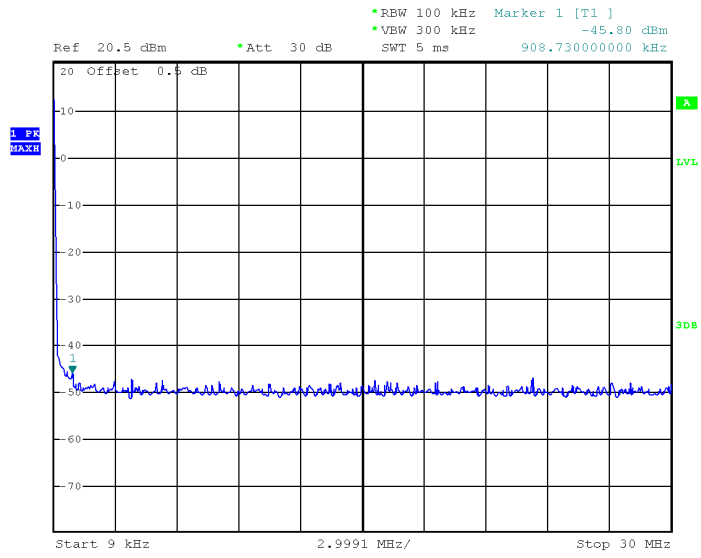


30MHz – 25GHz GFSK Low Channel

Fundamental

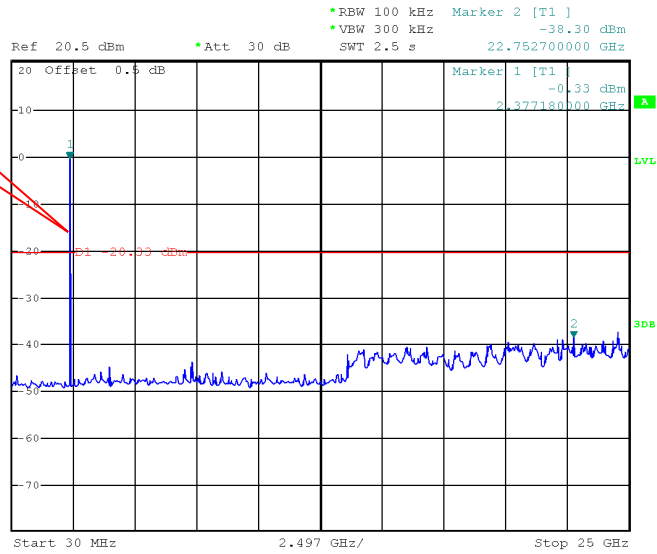


GFSK Middle Channel

Fundamental

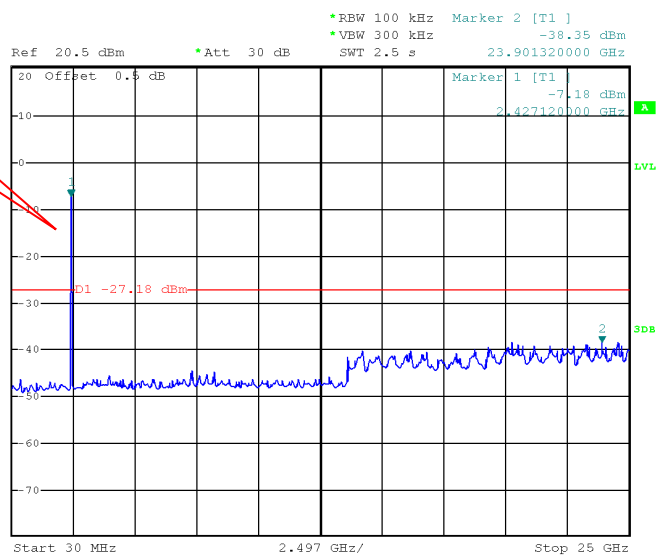


GFSK High Channel

Fundamental

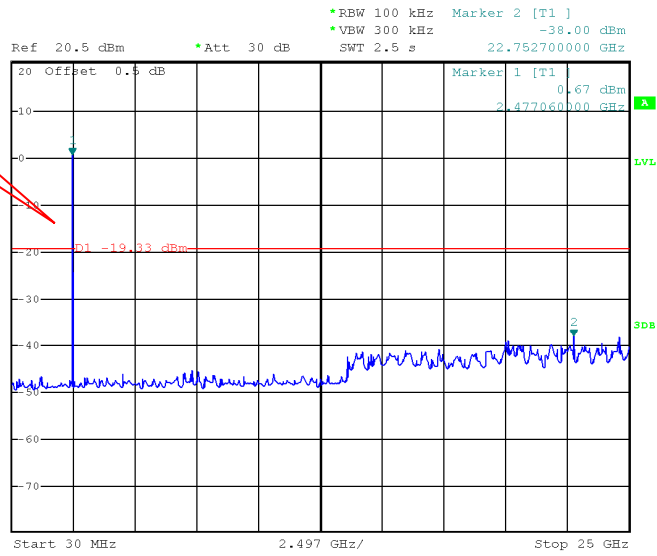


Pi/4 DQPSK Low Channel

Fundamental

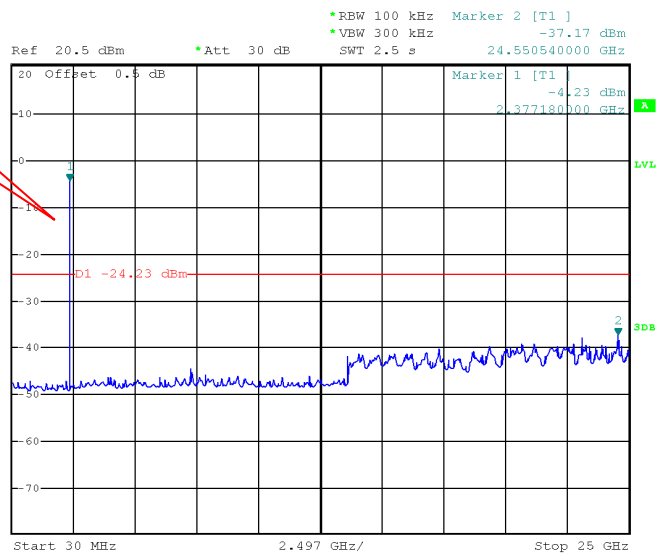


Pi/4 DQPSK Middle Channel

Fundamental

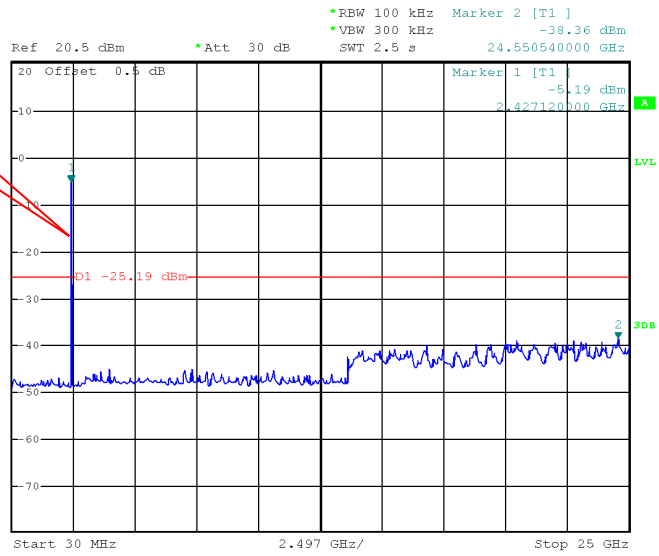


Pi/4 DQPSK High Channel

Fundamental

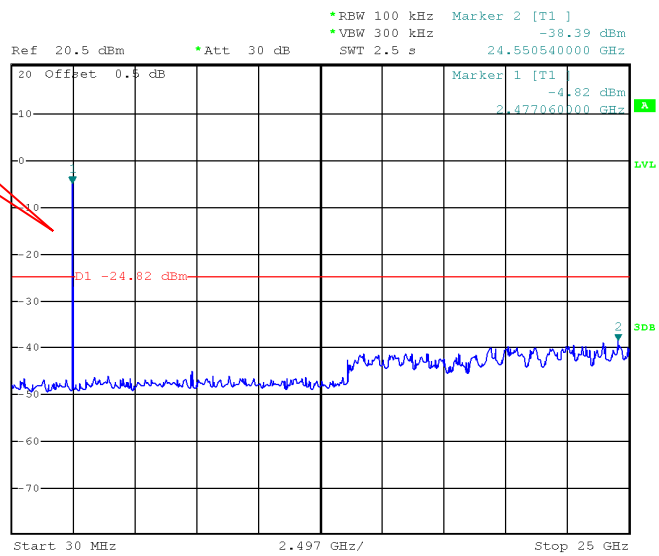


8DPSK Low Channel

Fundamental

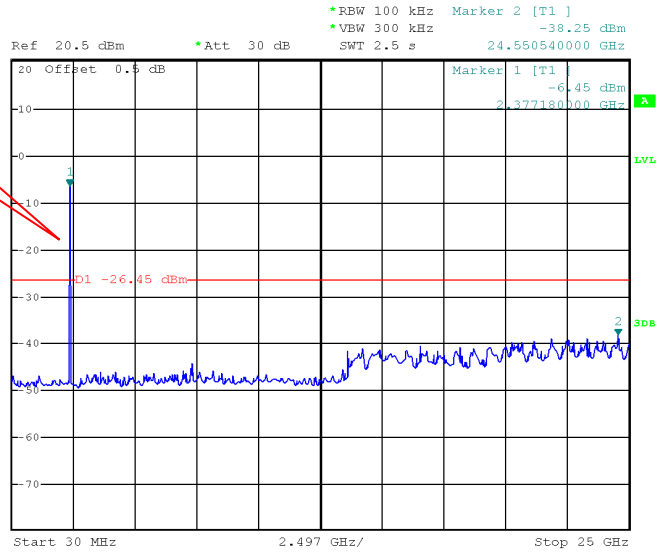


8DPSK Middle Channel

Fundamental

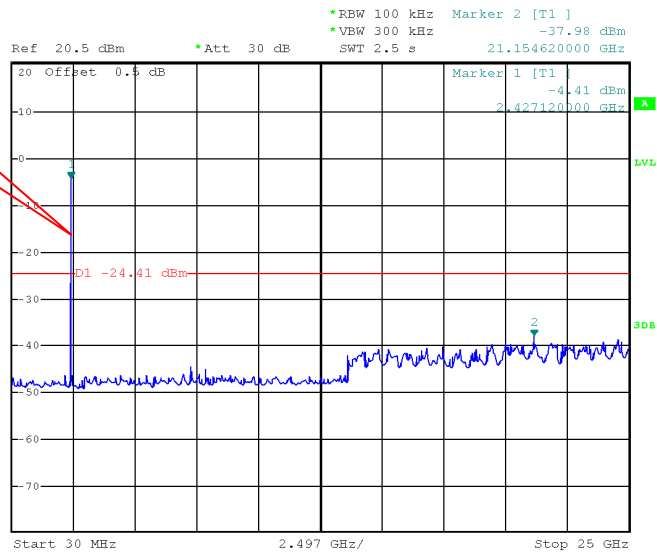

8DPSK High Channel

Fundamental

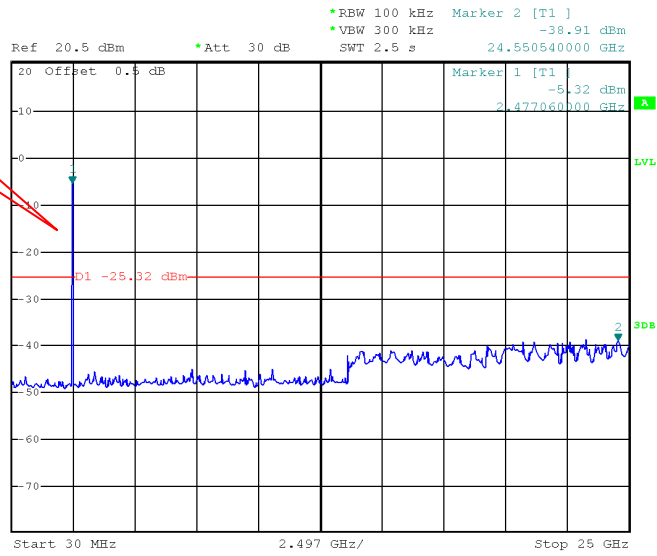



10 Band Edge Measurement

| | |
|-------------------|---|
| Test Requirement: | Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). |
| Test Method: | ANSI C63.10: 2013 |
| Test Limit: | Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
| Test Mode: | Transmitting |


10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


10.2 Test Result

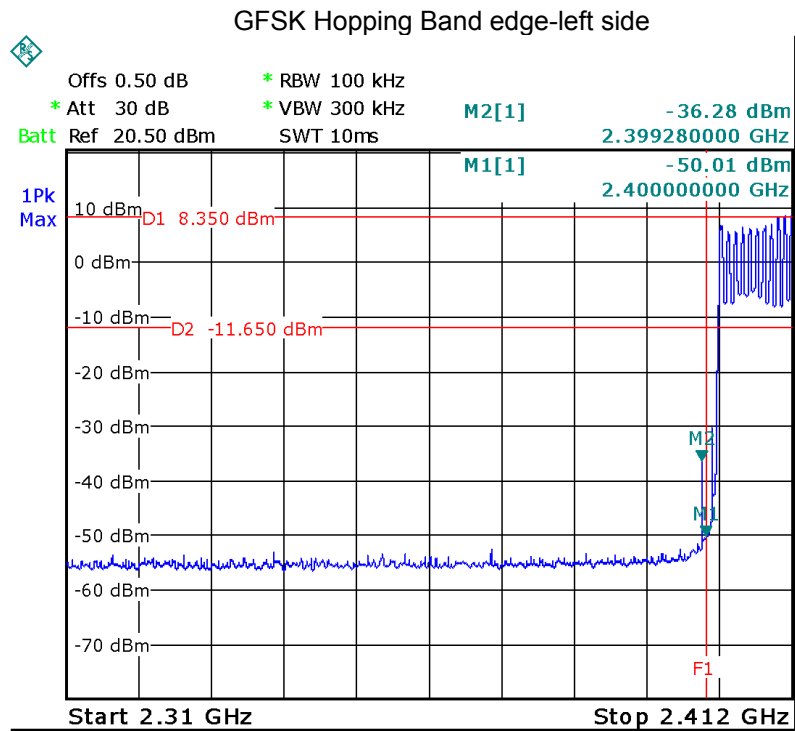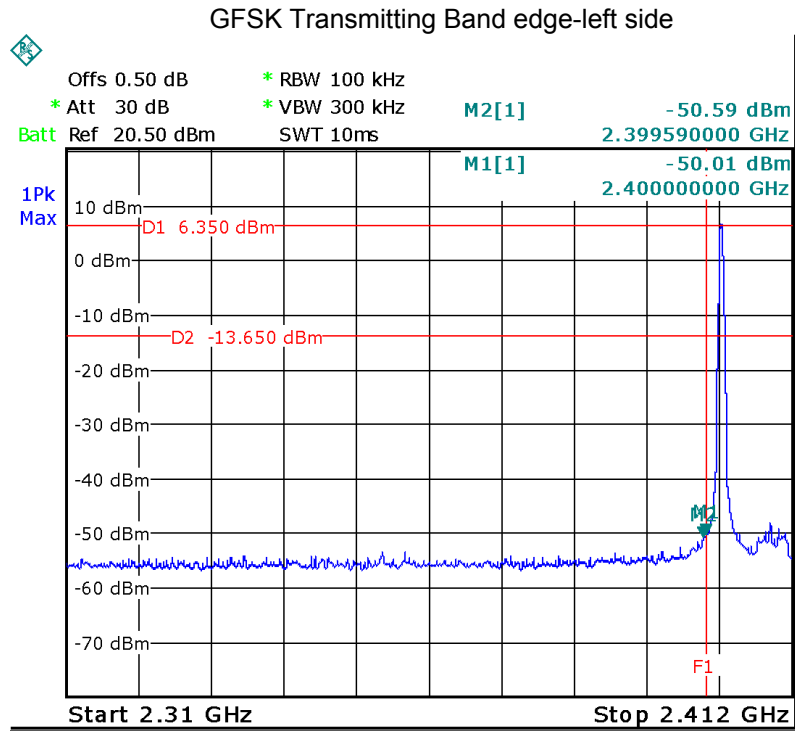


GFSK Transmitting Band edge-right side

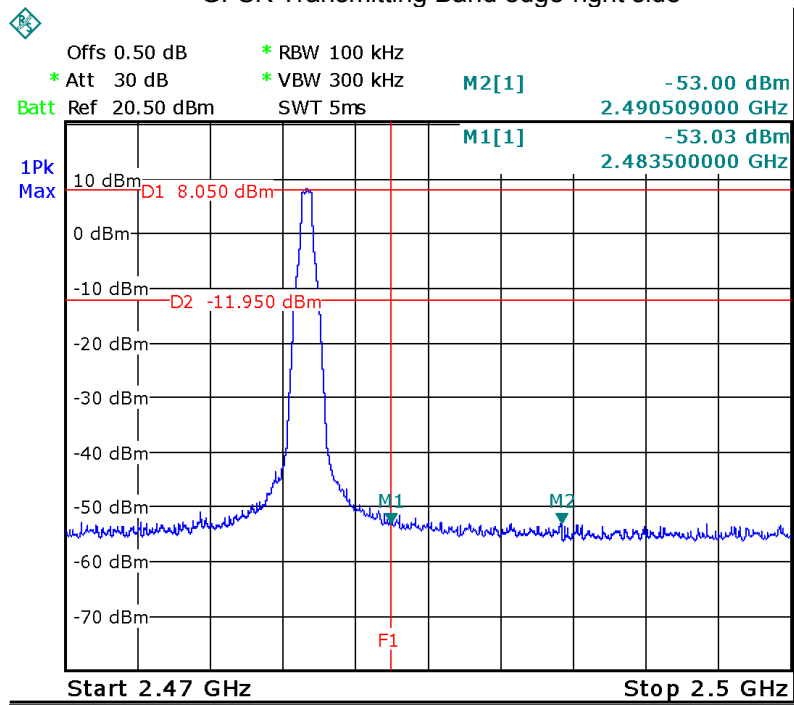


GFSK Hopping Band edge-right side

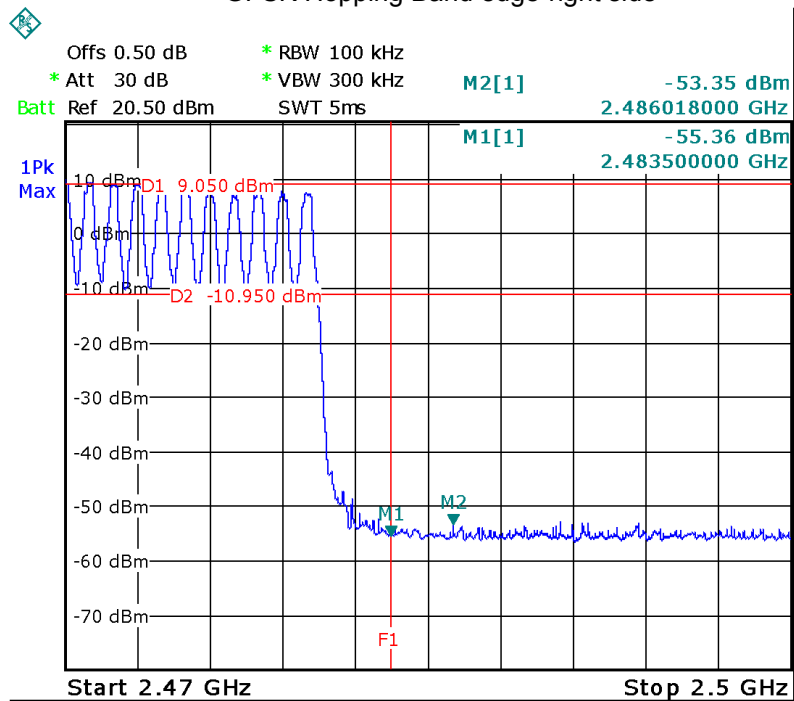


Pi/4 DQPSK Transmitting Band edge-left side

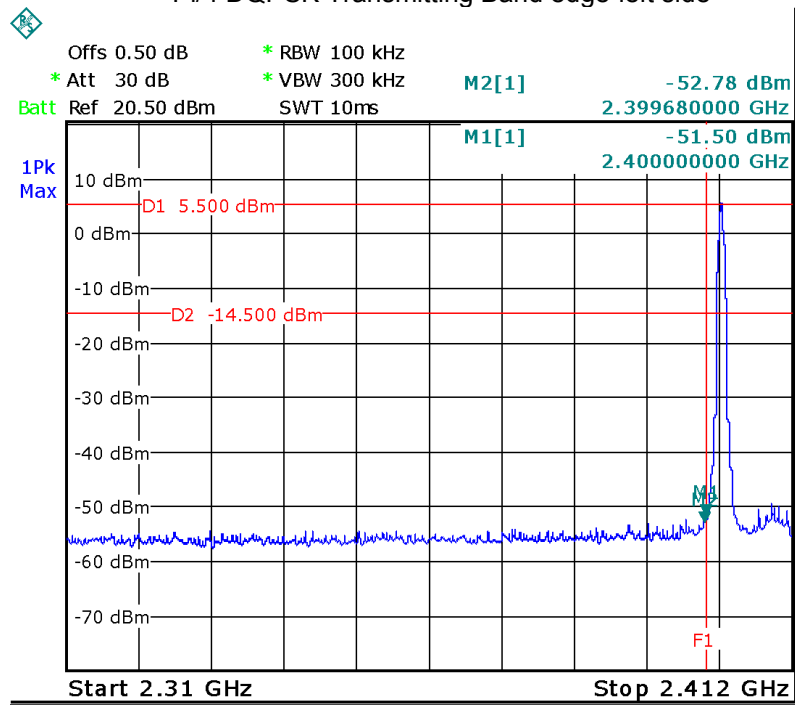


Pi/4 DQPSK Hopping Band edge-left side

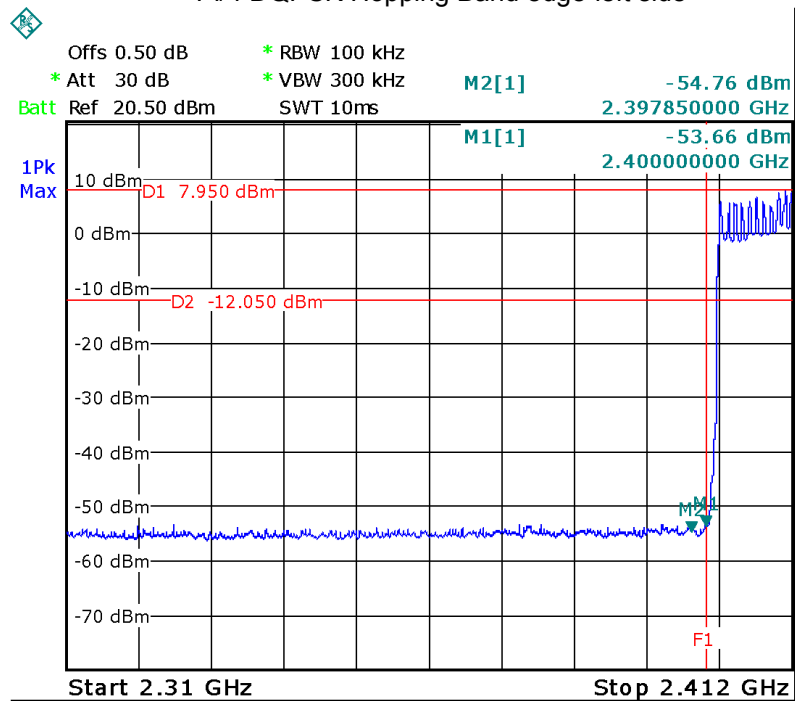


Pi/4 DQPSK Transmitting Band edge-right side

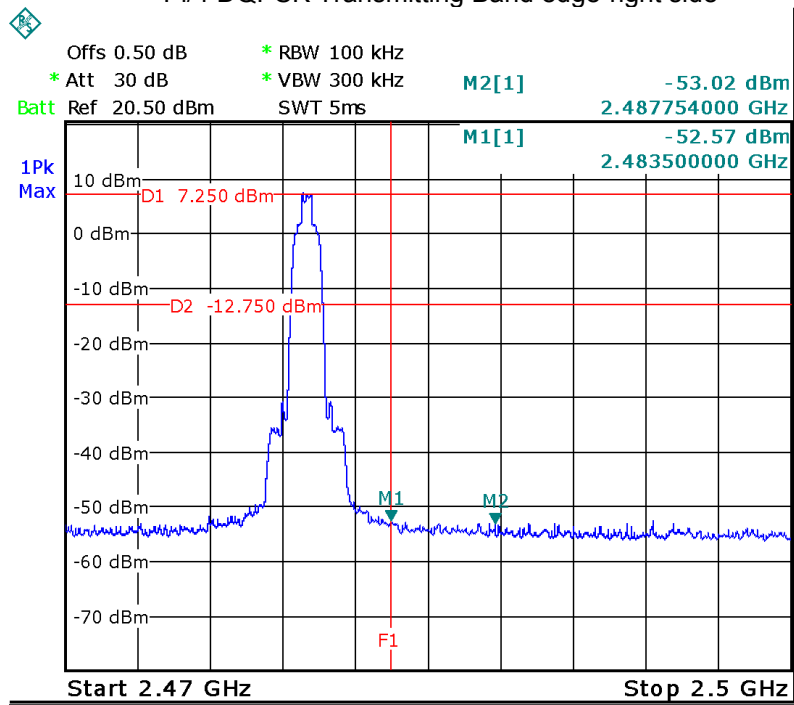


Pi/4 DQPSK Hopping Band edge-right side

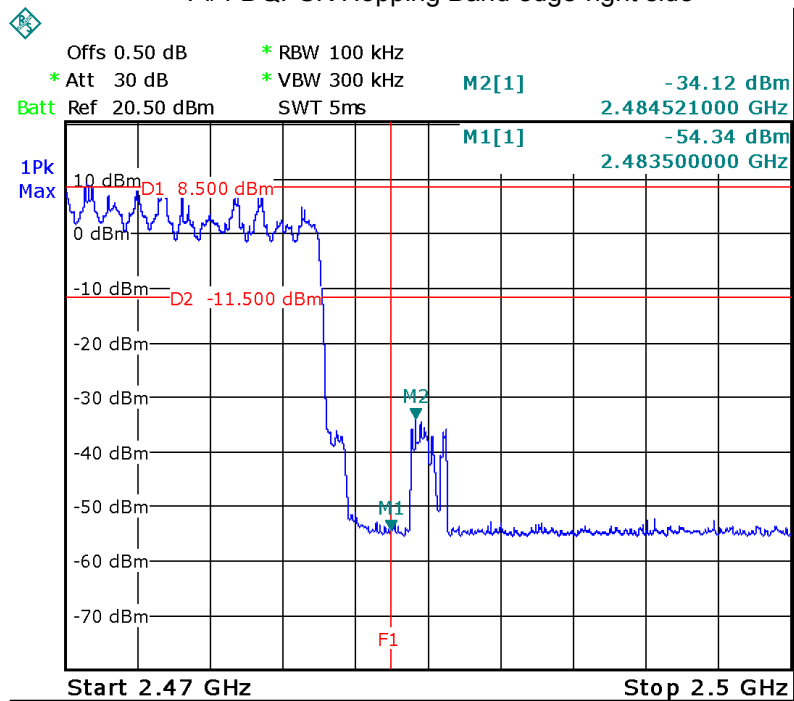

8DPSK Transmitting Band edge-right side

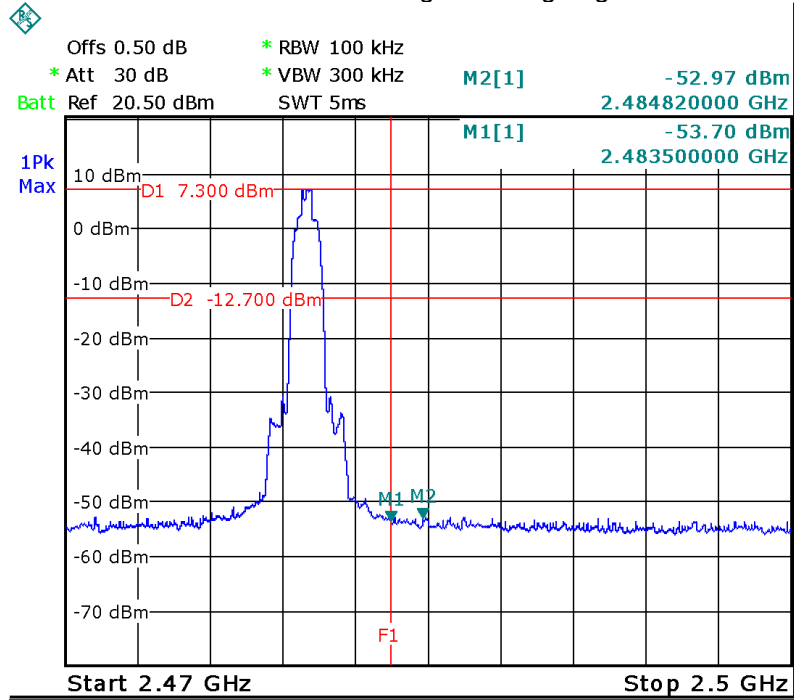

8DPSK Hopping Band edge-right side

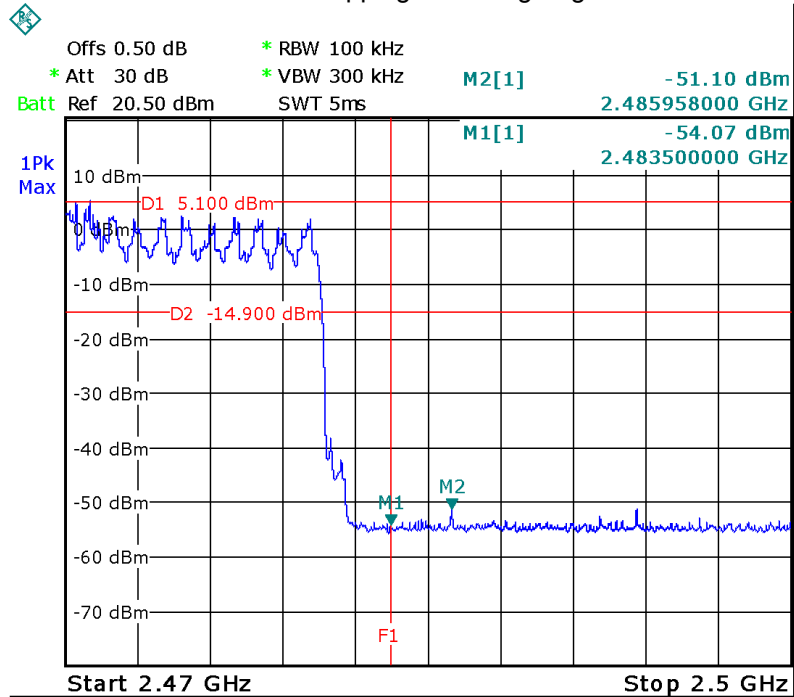

11 20 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz


11.2 Test Result

| Modulation | Test Channel | 20 dB Bandwidth MHz | 99% Bandwidth MHz |
|------------|--------------|------------------------|----------------------|
| GFSK | Low | 0.846 | 0.745 |
| GFSK | Middle | 0.845 | 0.747 |
| GFSK | High | 0.855 | 0.749 |
| Pi/4 DQPSK | Low | 1.274 | 1.157 |
| Pi/4 DQPSK | Middle | 1.269 | 1.155 |
| Pi/4 DQPSK | High | 1.267 | 1.146 |
| 8DPSK | Low | 1.270 | 1.152 |
| 8DPSK | Middle | 1.276 | 1.152 |
| 8DPSK | High | 1.258 | 1.152 |


Test plots

Bandwidth


GFSK Low Channel

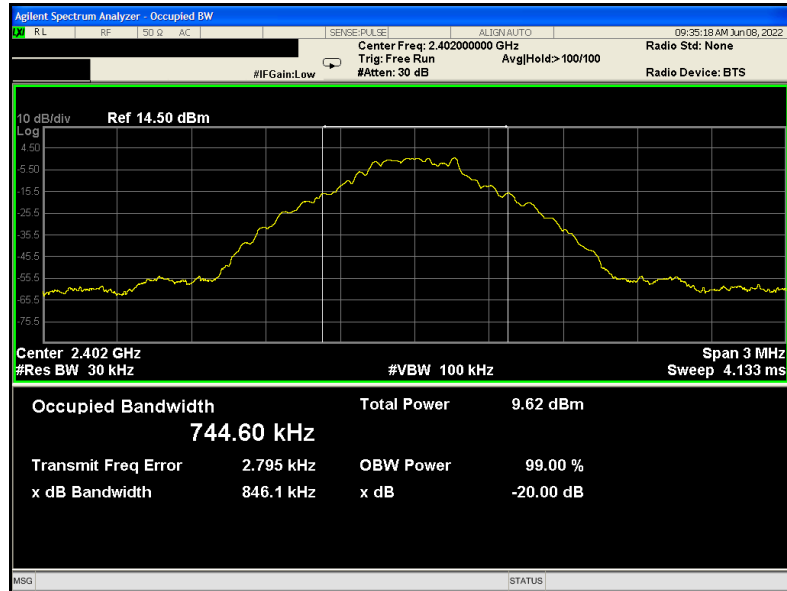


GFSK Middle Channel

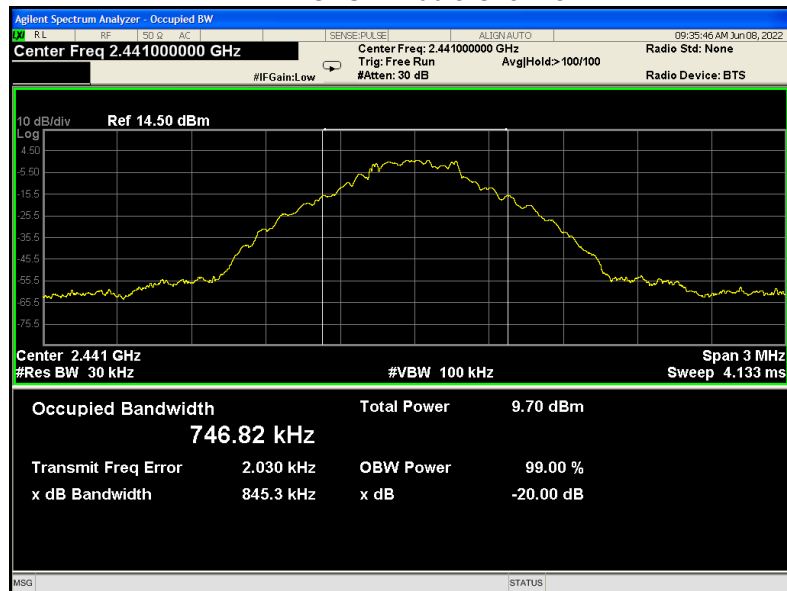


GFSK High Channel

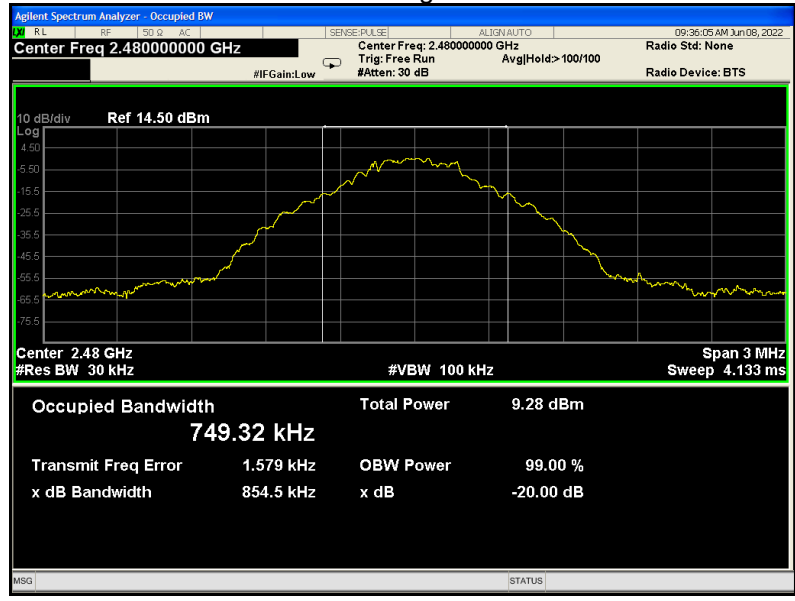


Pi/4 DQPSK Low Channel

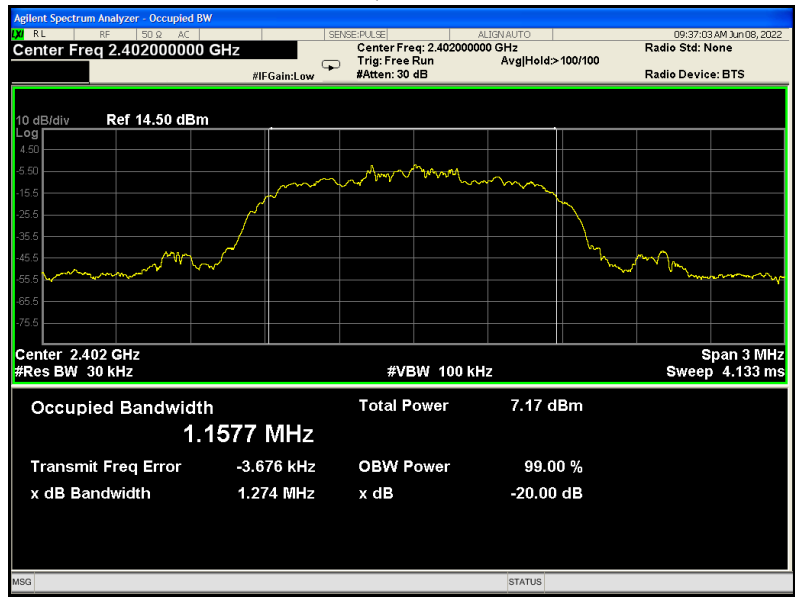


Pi/4 DQPSK Middle Channel

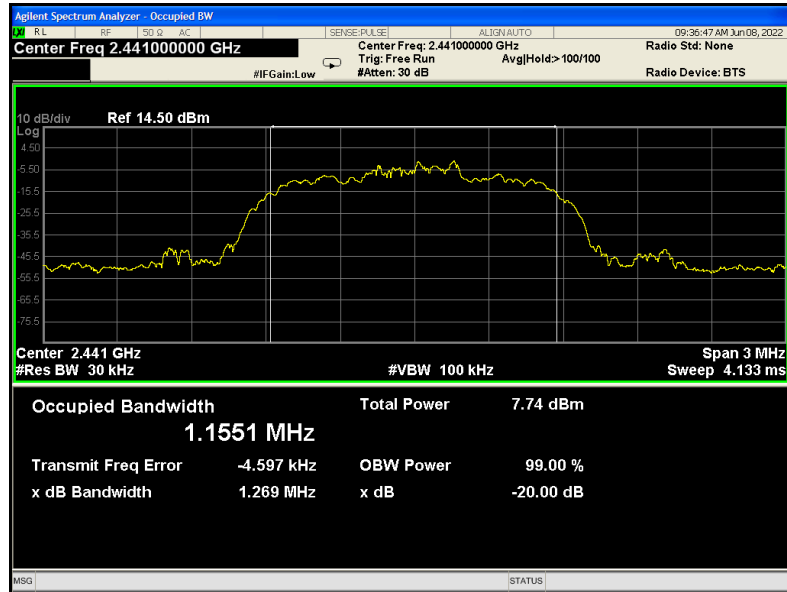


Pi/4 DQPSK High Channel

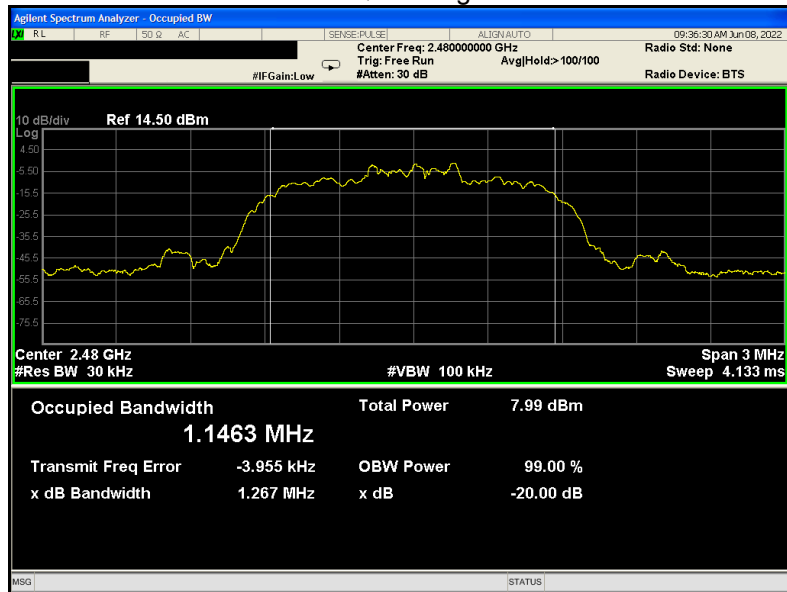


8DPSK Low Channel

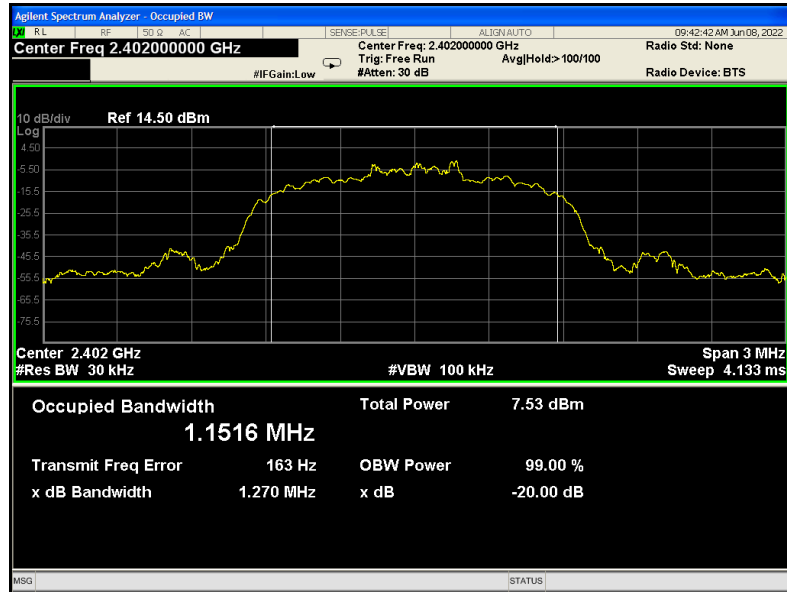

8DPSK Middle Channel

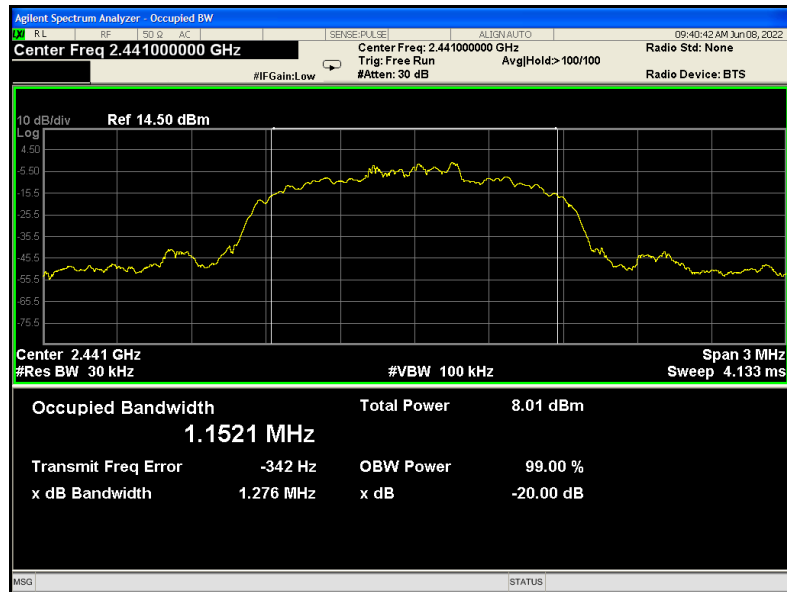

8DPSK High Channel

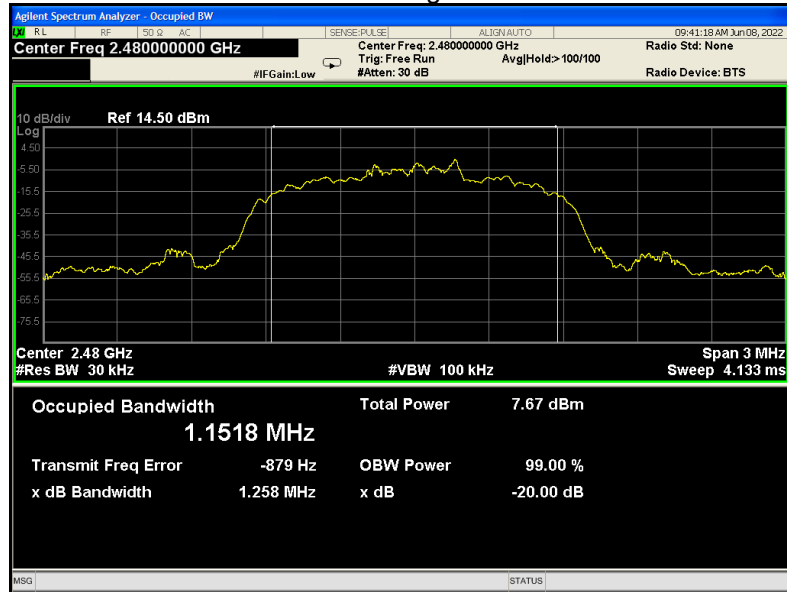

12 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Limit: Regulation 15.247 (a)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater 0.125 watts..

Test mode: Test in fixing frequency transmitting mode.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW \geq 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
 - b) Allow trace to stabilize.
 - c) Use the marker-to-peak function to set the marker to the peak of the emission.
 - d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
 - e) A plot of the test results and setup description shall be included in the test report.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

12.2 Test Result


| Modulation | Test Channel | Output Power (dBm) | Limit (dBm) |
|------------|--------------|--------------------|-------------|
| GFSK | Low | 6.63 | 30 |
| GFSK | Middle | 6.30 | 30 |
| GFSK | High | 5.52 | 30 |
| Pi/4 DQPSK | Low | 5.93 | 21 |
| Pi/4 DQPSK | Middle | 5.60 | 21 |
| Pi/4 DQPSK | High | 7.89 | 21 |
| 8DPSK | Low | 5.81 | 21 |
| 8DPSK | Middle | 5.52 | 21 |
| 8DPSK | High | 7.80 | 21 |



Test plots



GFSK Low Channel

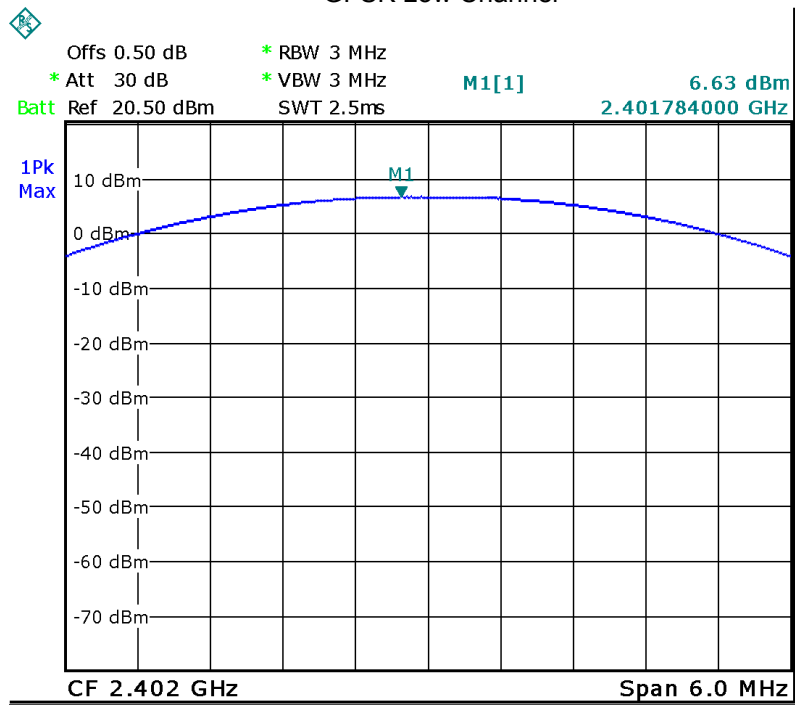


GFSK Middle Channel

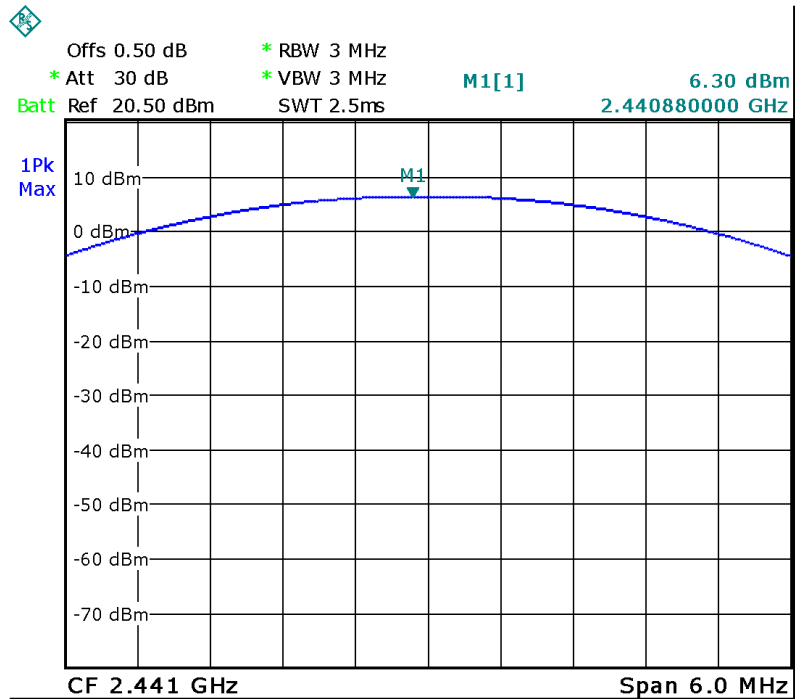

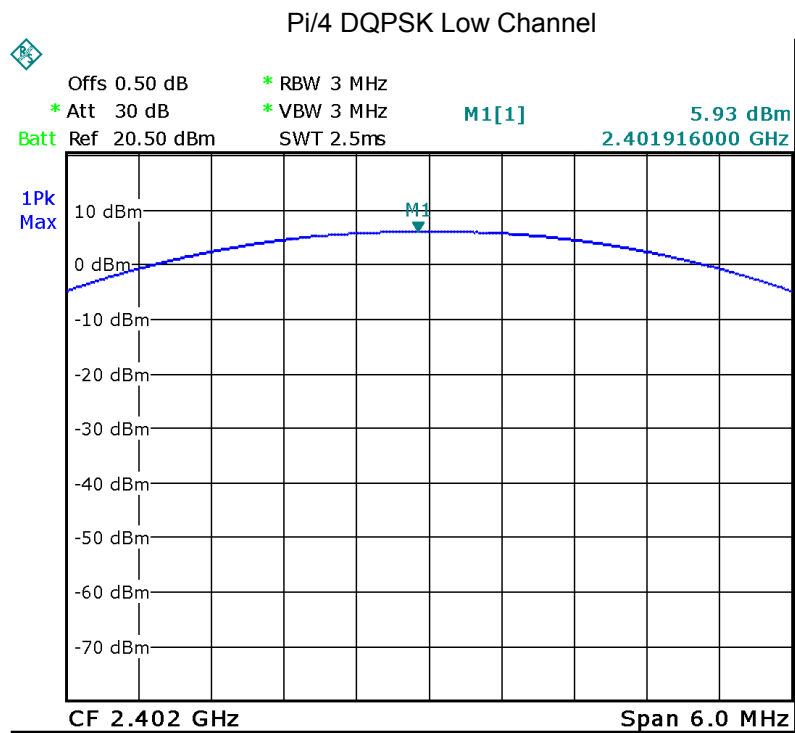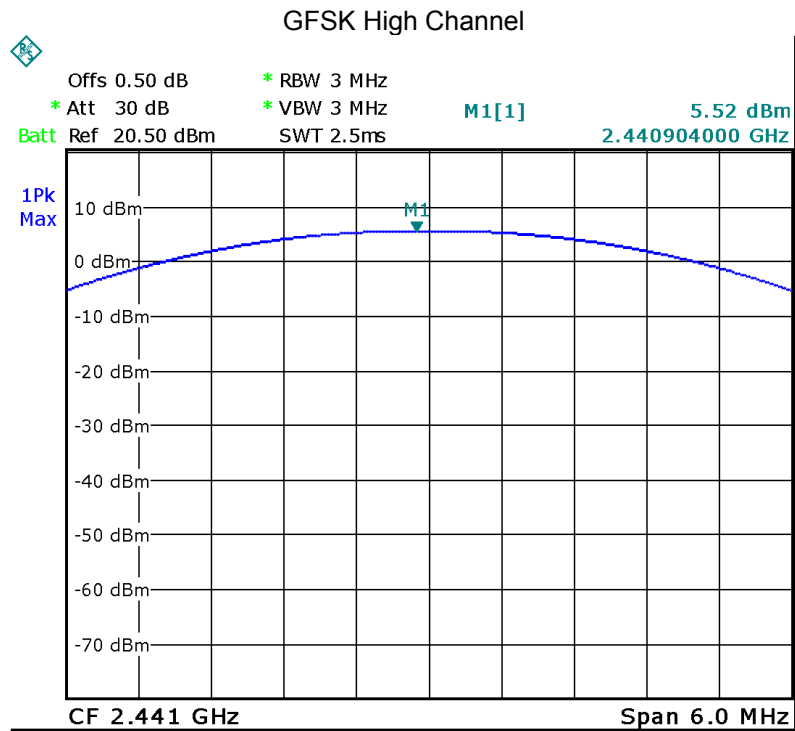


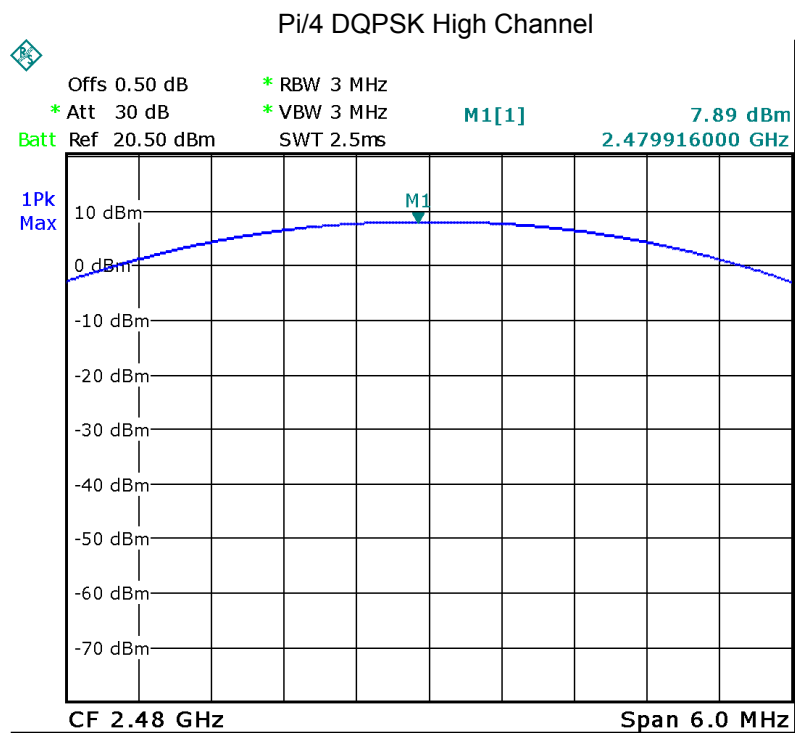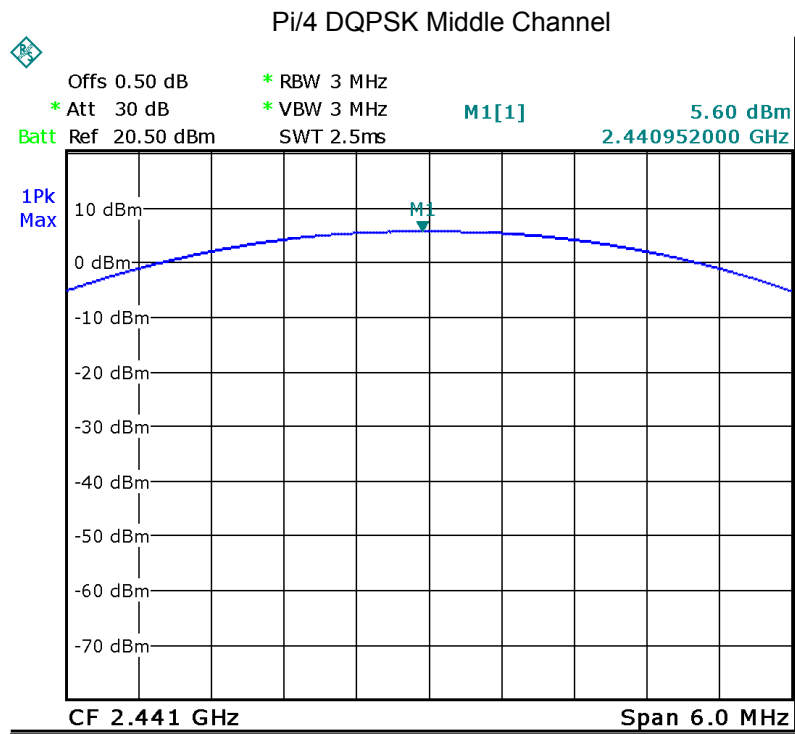


8DPSK Low Channel

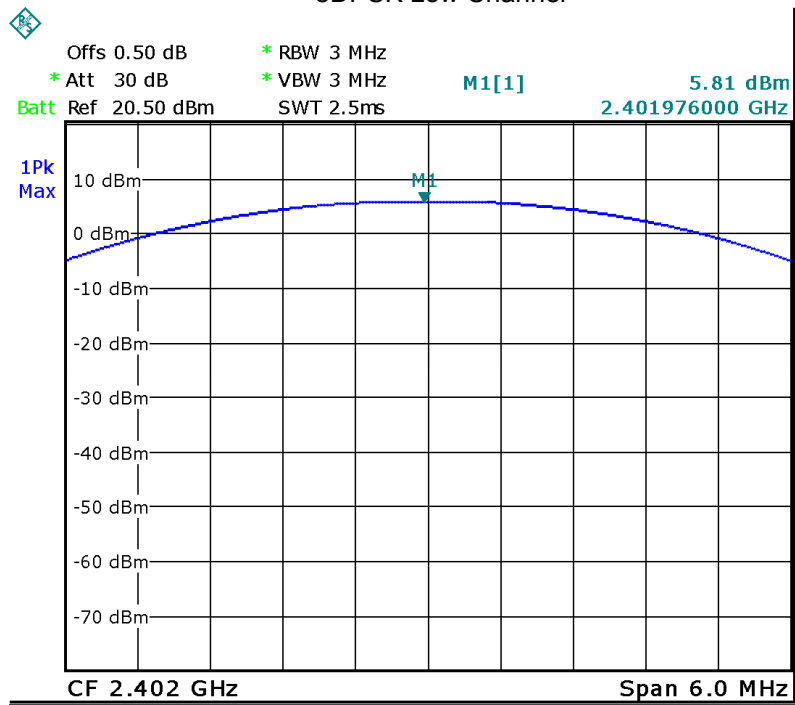

8DPSK Middle Channel

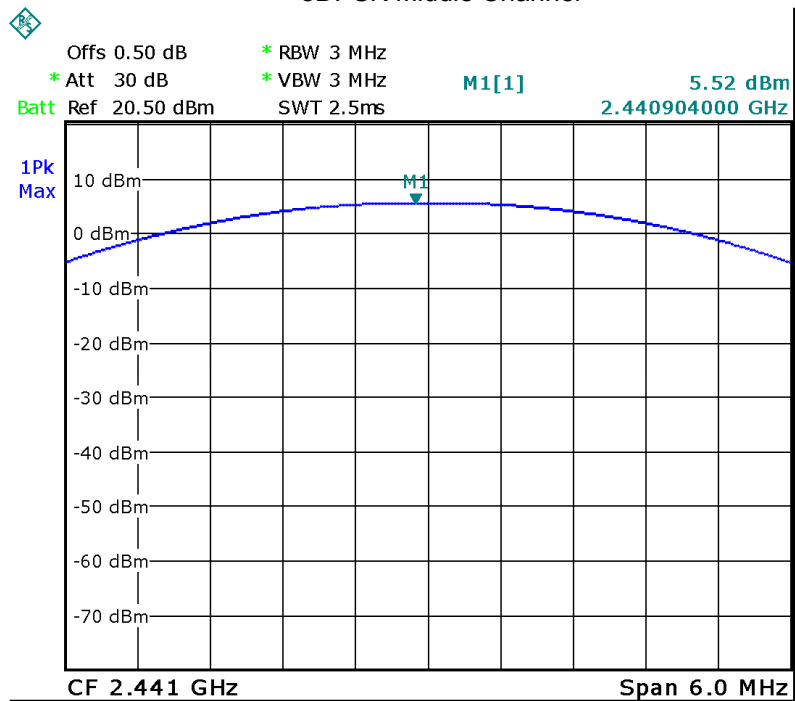

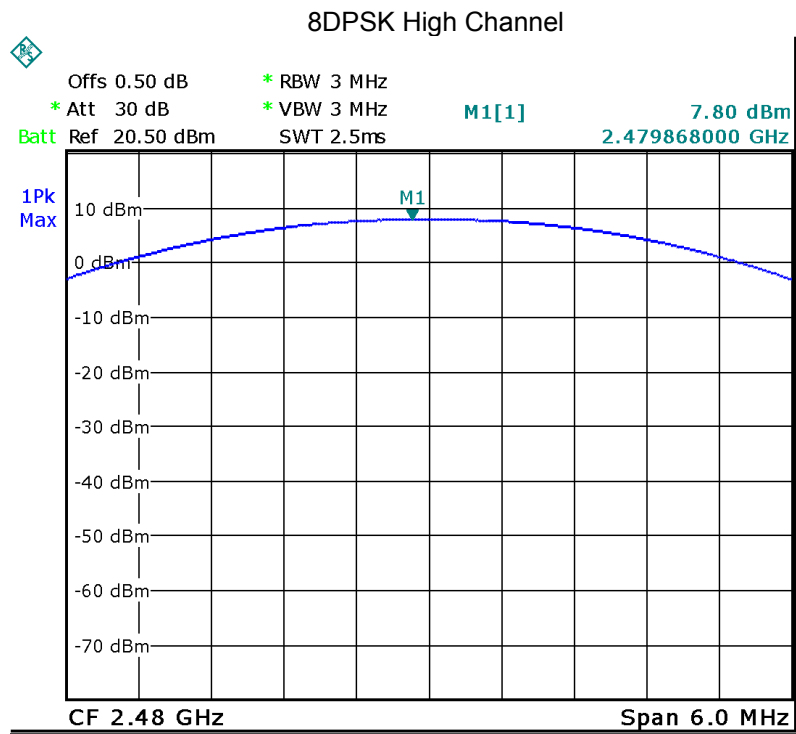

13 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with power no greater than 0.125W.

Test Mode: Test in hopping transmitting operating mode.

13.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) Span: Wide enough to capture the peaks of two adjacent channels.
 - b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
 - c) Video (or average) bandwidth (VBW) \geq RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
 - g) Allow the trace to stabilize.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

13.2 Test Result


| Modulation | Test Channel | Test Result MHz | 20dB Bandwidth MHz | Limits (2/3 20dB Bandwidth) MHz |
|---------------|--------------|--------------------|-----------------------|------------------------------------|
| GFSK | Low | 1.000 | 0.846 | 0.564 |
| GFSK | Middle | 1.000 | 0.845 | 0.563 |
| GFSK | High | 1.000 | 0.855 | 0.570 |
| $\pi/4$ DQPSK | Low | 1.000 | 1.274 | 0.849 |
| $\pi/4$ DQPSK | Middle | 1.000 | 1.269 | 0.846 |
| $\pi/4$ DQPSK | High | 1.000 | 1.267 | 0.845 |
| 8DPSK | Low | 1.000 | 1.270 | 0.847 |
| 8DPSK | Middle | 1.000 | 1.276 | 0.851 |
| 8DPSK | High | 1.000 | 1.258 | 0.839 |



Test plots



GFSK Low Channel

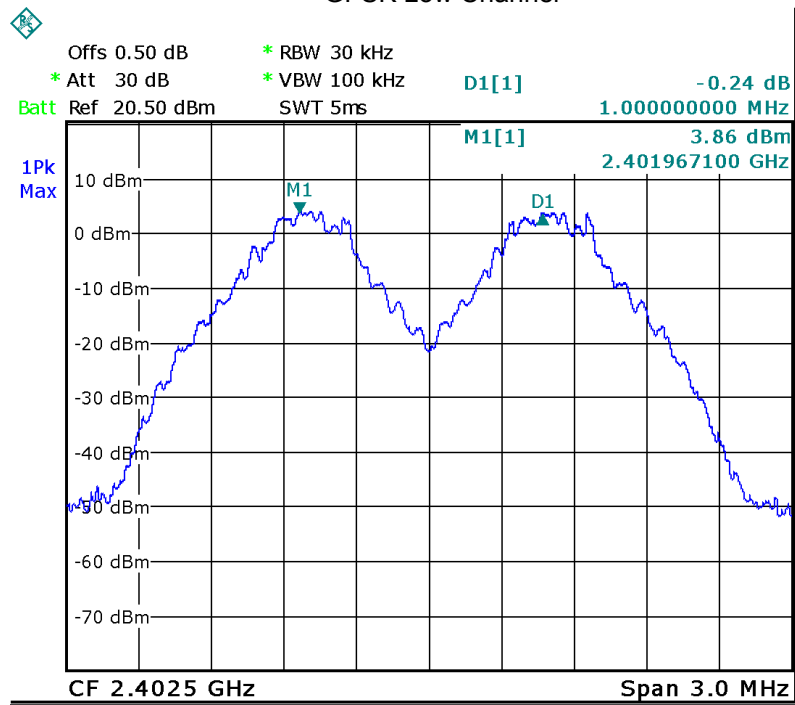


GFSK Middle Channel

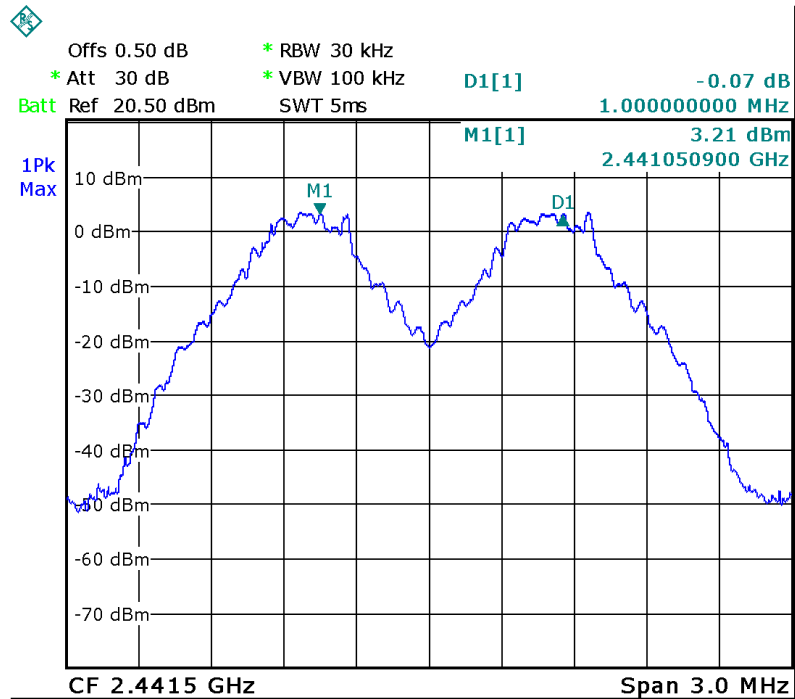

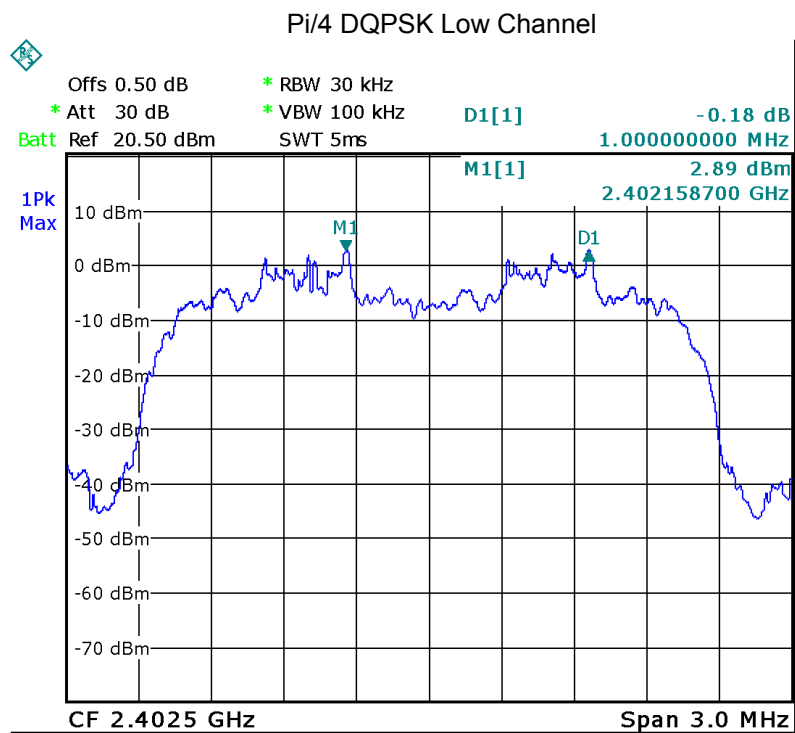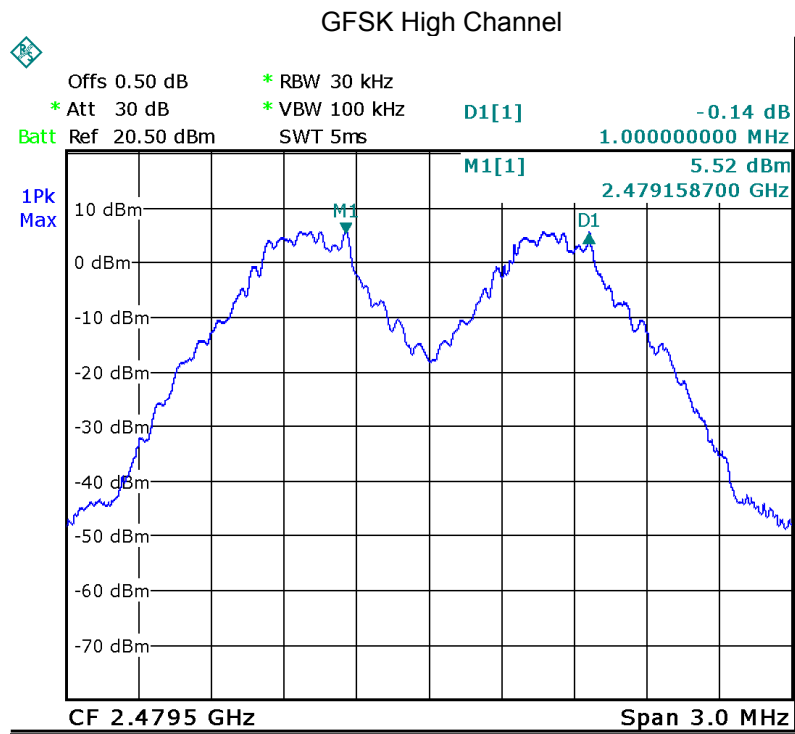


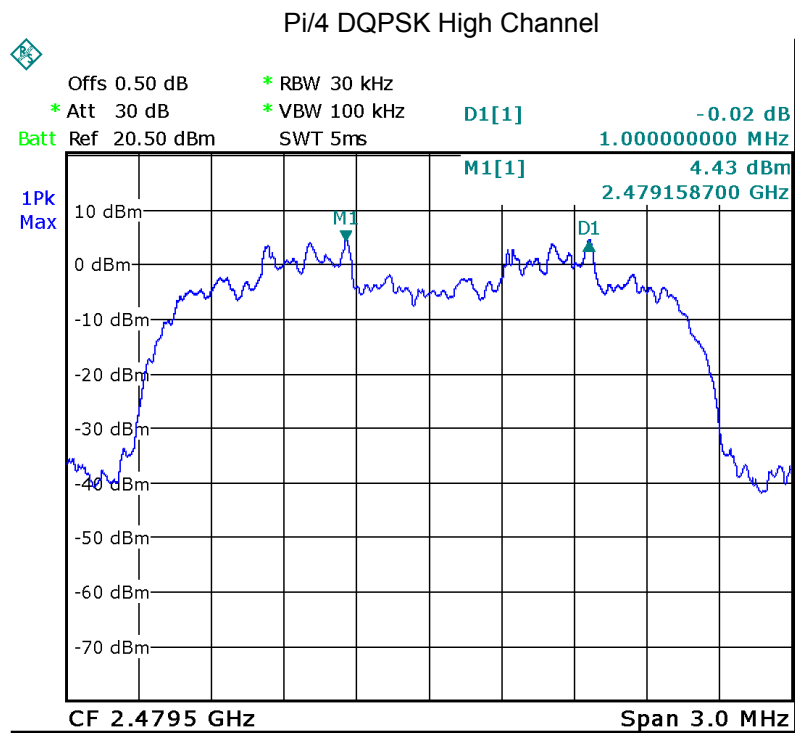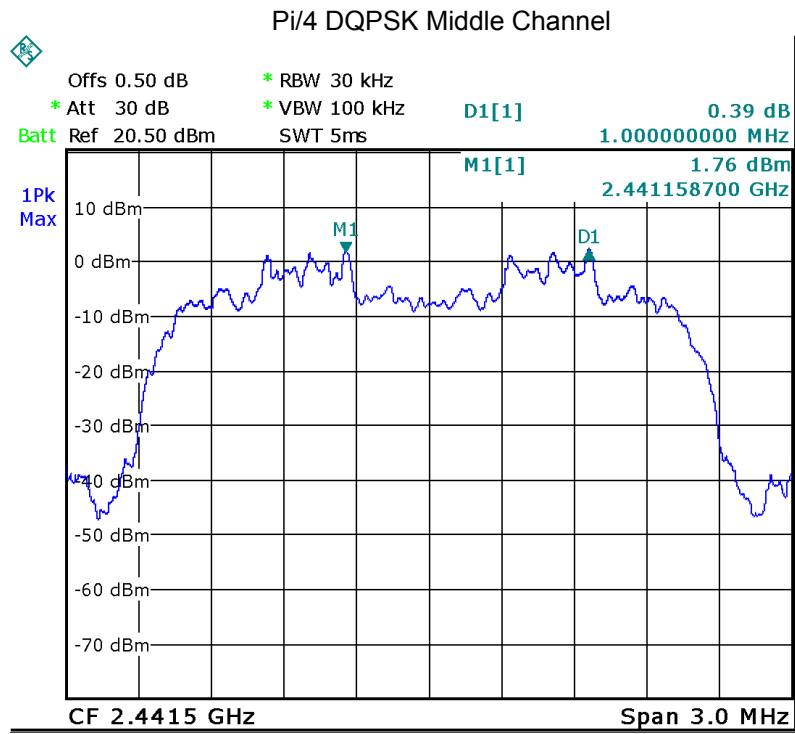


8DPSK Low Channel

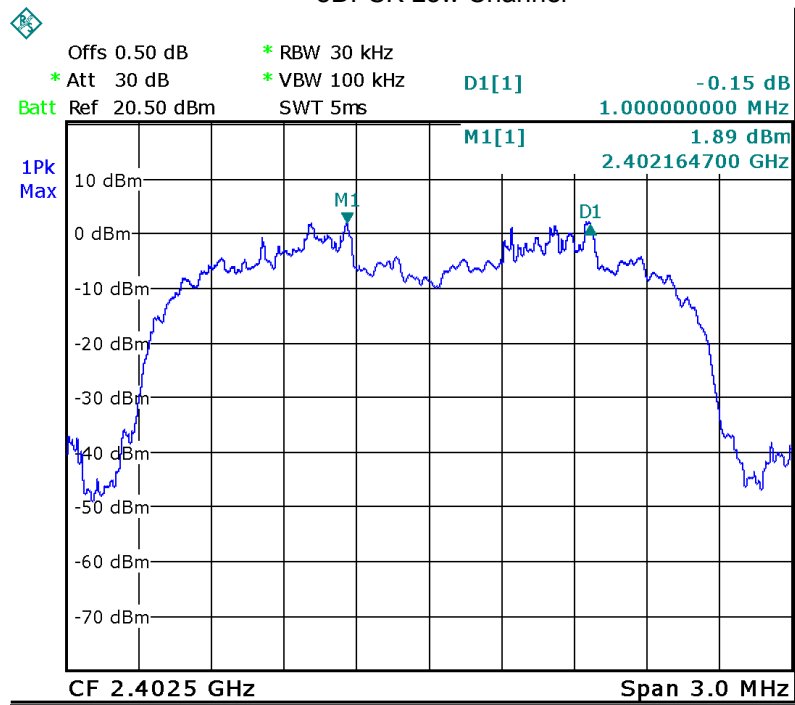

8DPSK Middle Channel

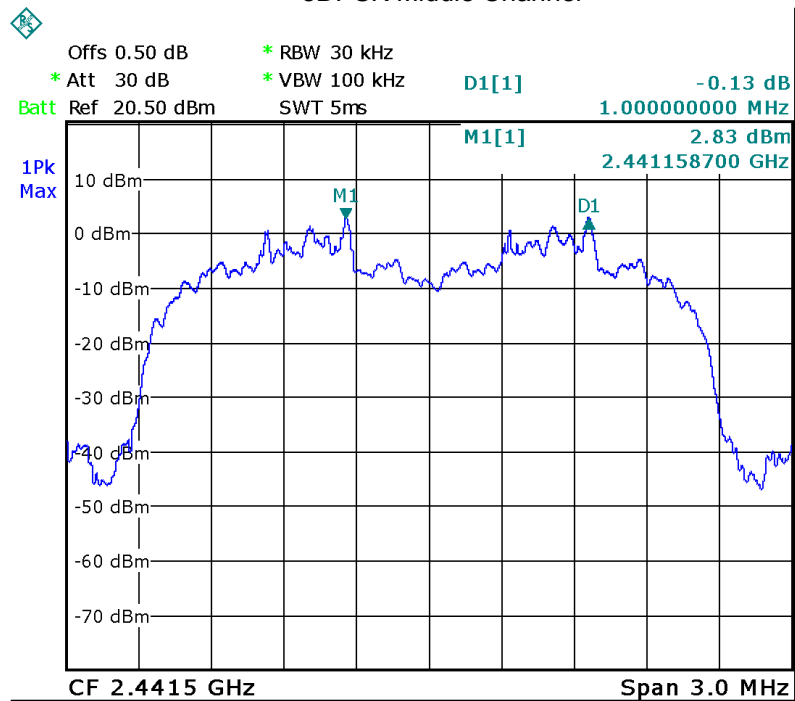

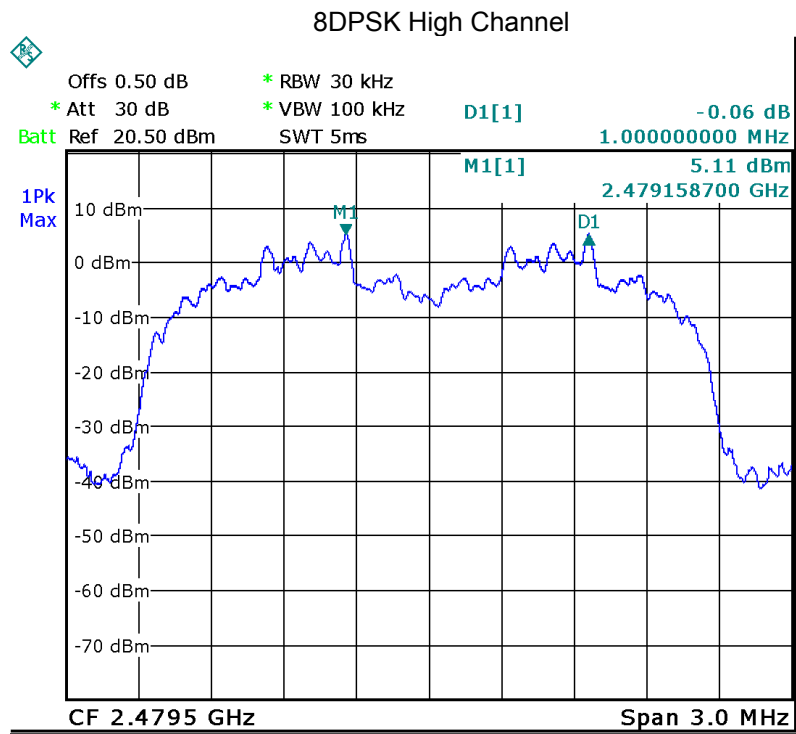

14 Number of Hopping Frequency

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Limit: Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Mode: Test in hopping transmitting operating mode.

14.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
 - b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
 - c) VBW \geq RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
 - g) Allow the trace to stabilize..
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



14.2 Test Result

Test Plots:

79 Channels in total

GFSK

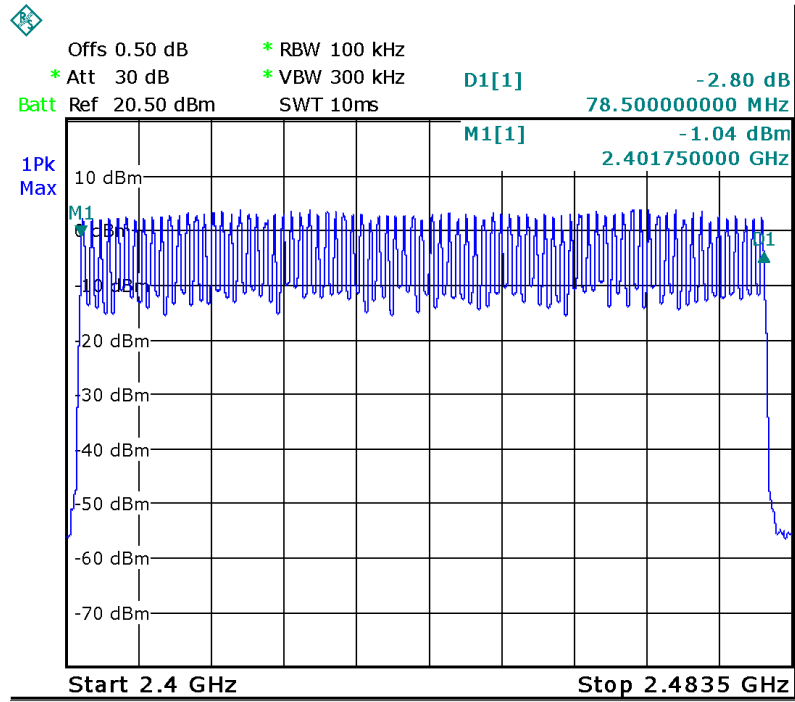

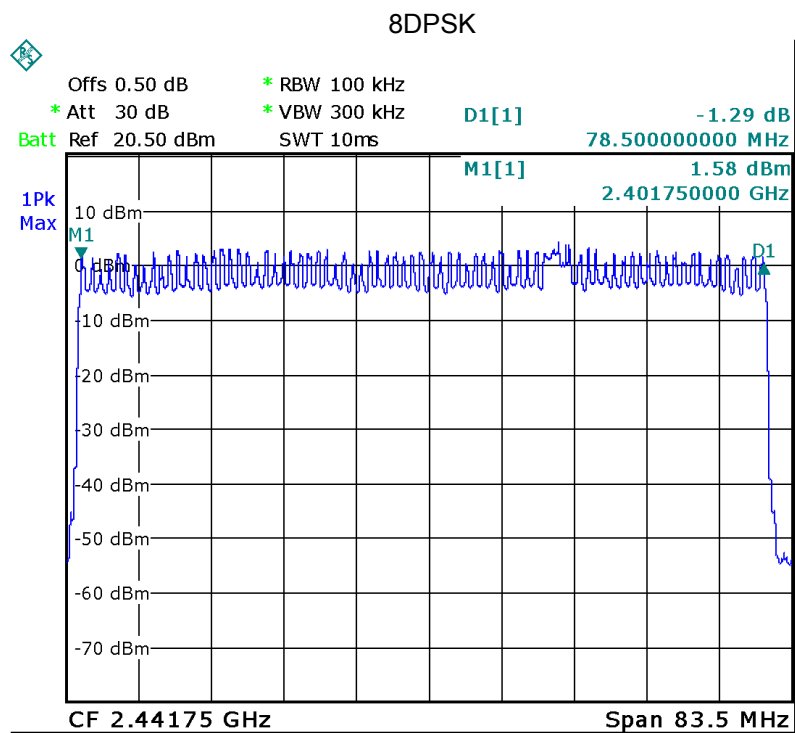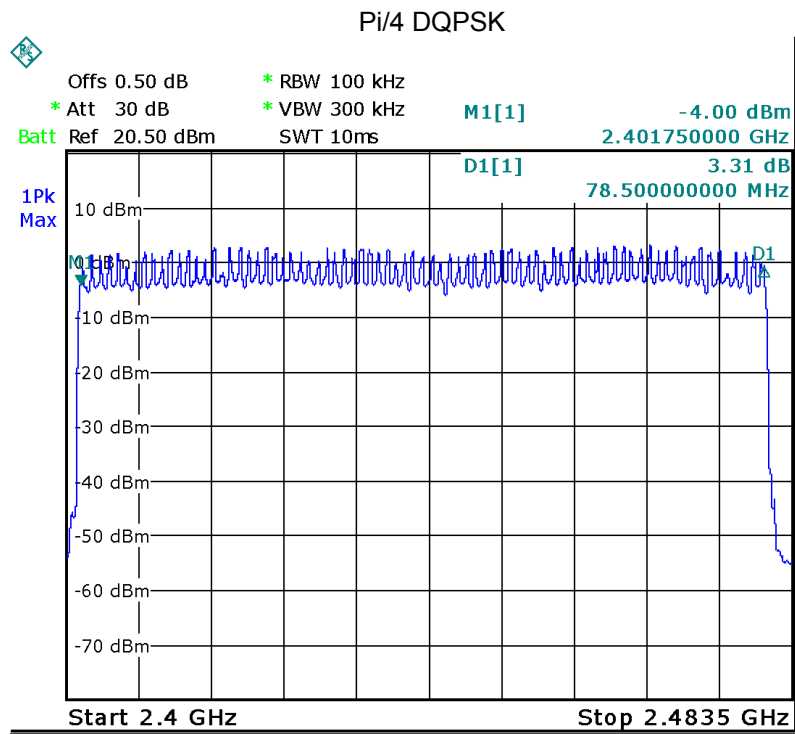

15 Dwell Time

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Limit: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Mode: Test in hopping transmitting operating mode.

15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

15.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


| Data Packet | Dwell Time(s) |
|---------------------------------------|------------------------------------|
| DH5 | $1600/79/6*0.4*79*(MkrDelta)/1000$ |
| DH3 | $1600/79/4*0.4*79*(MkrDelta)/1000$ |
| DH1 | $1600/79/2*0.4*79*(MkrDelta)/1000$ |
| Remark: Mkr Delta is once pulse time. | |

| Modulation | Data Packet | Channel | pulse time(ms) | Dwell Time(s) | Limits(s) |
|------------|-------------|---------|----------------|---------------|-----------|
| GFSK | DH5 | Low | 2.880 | 0.307 | 0.4 |
| | | middle | 2.880 | 0.307 | 0.4 |
| | | High | 2.860 | 0.305 | 0.4 |
| Pi/4DQPSK | DH5 | Low | 2.880 | 0.307 | 0.4 |
| | | middle | 2.860 | 0.305 | 0.4 |
| | | High | 2.880 | 0.307 | 0.4 |
| 8DPSK | DH5 | Low | 2.860 | 0.305 | 0.4 |
| | | middle | 2.880 | 0.307 | 0.4 |
| | | High | 2.880 | 0.307 | 0.4 |


Remark: Only the worst-case mode DH5 is recorded.

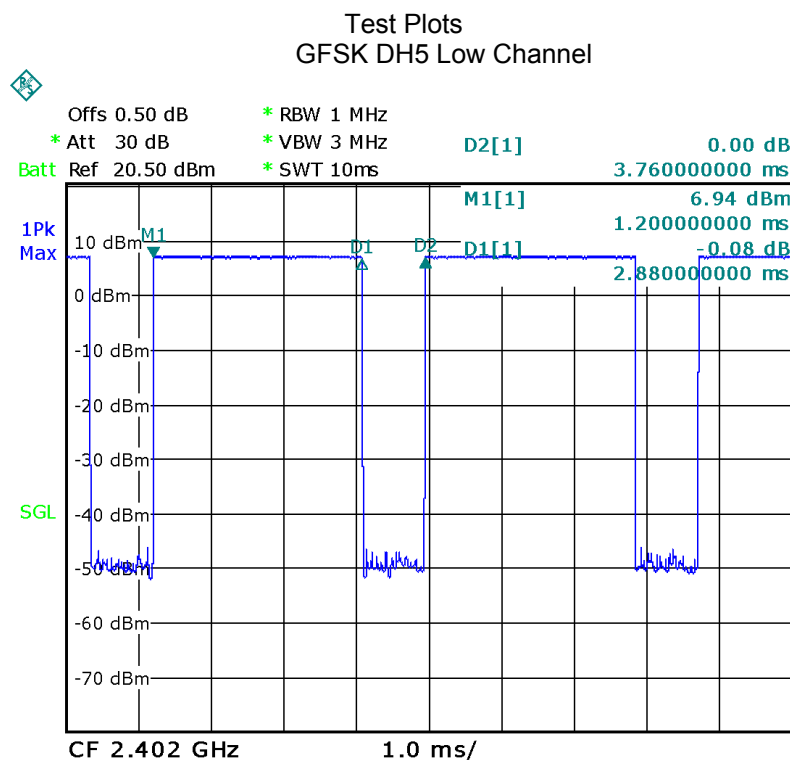


GFSK DH5 Middle Channel

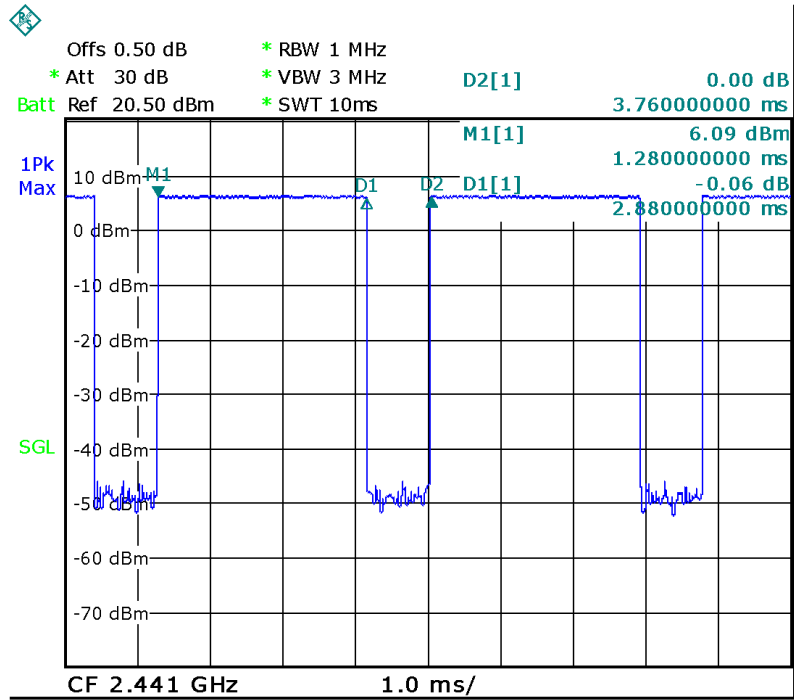


GFSK DH5 High Channel

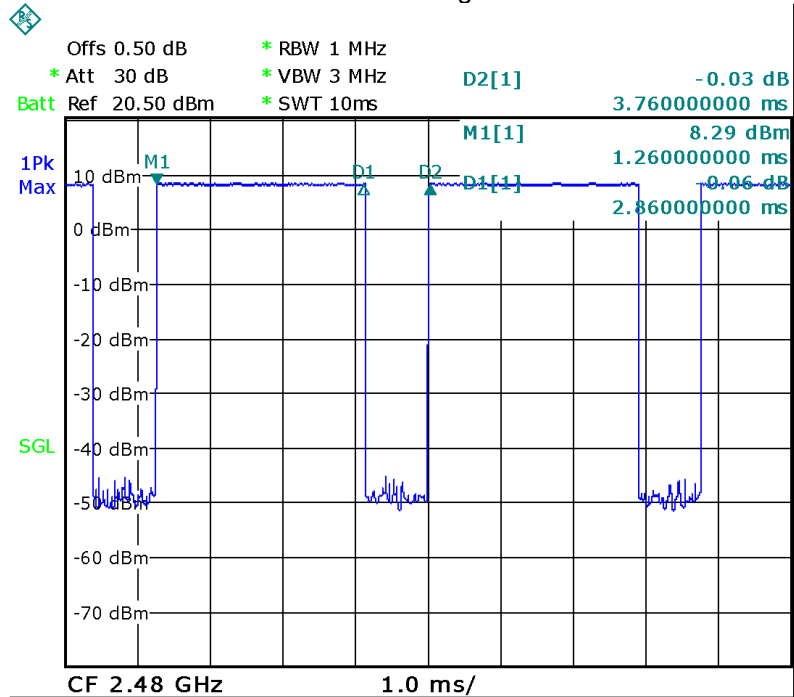


Pi/4DQPSK DH5 Low Channel

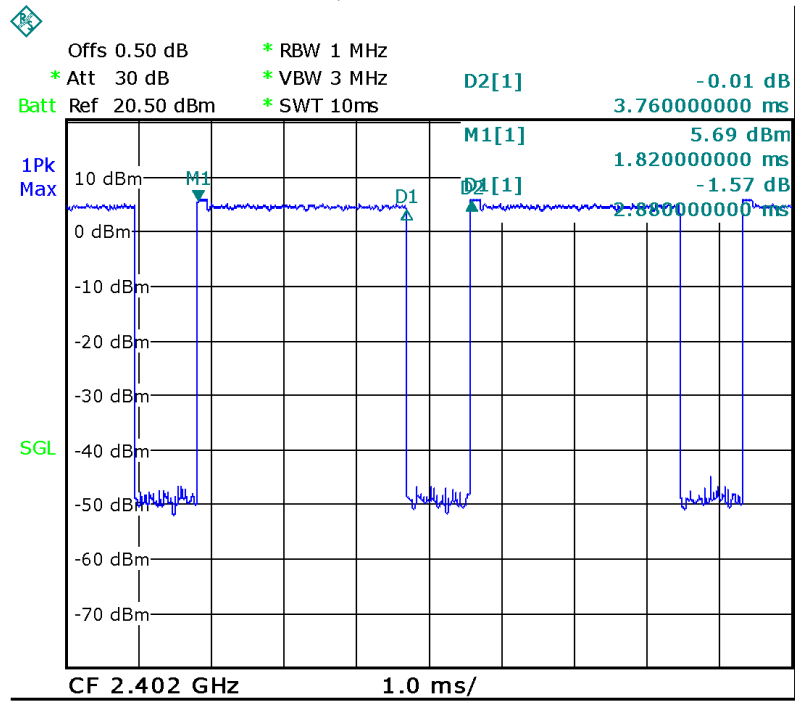


Pi/4DQPSK DH5 Middle Channel

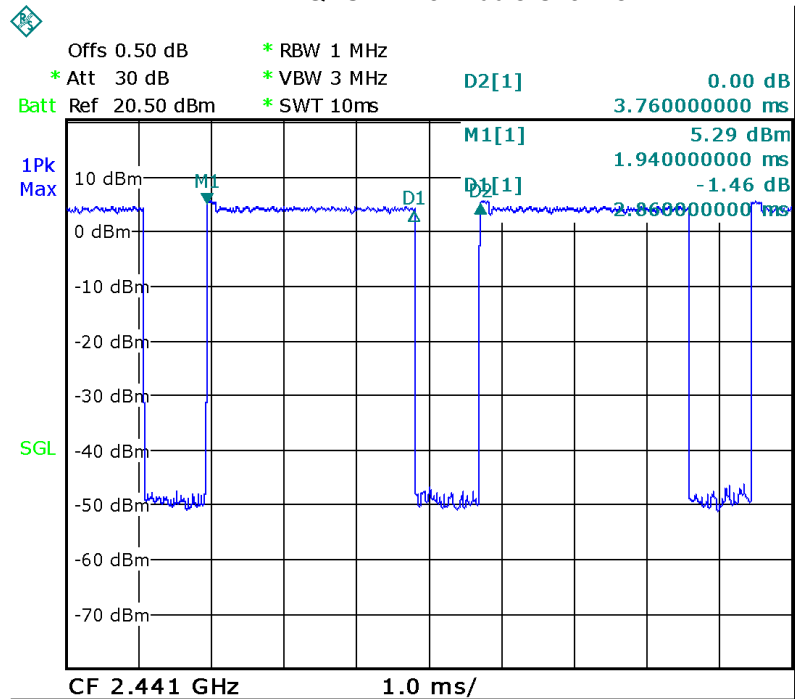


Pi/4DQPSK DH5 High Channel

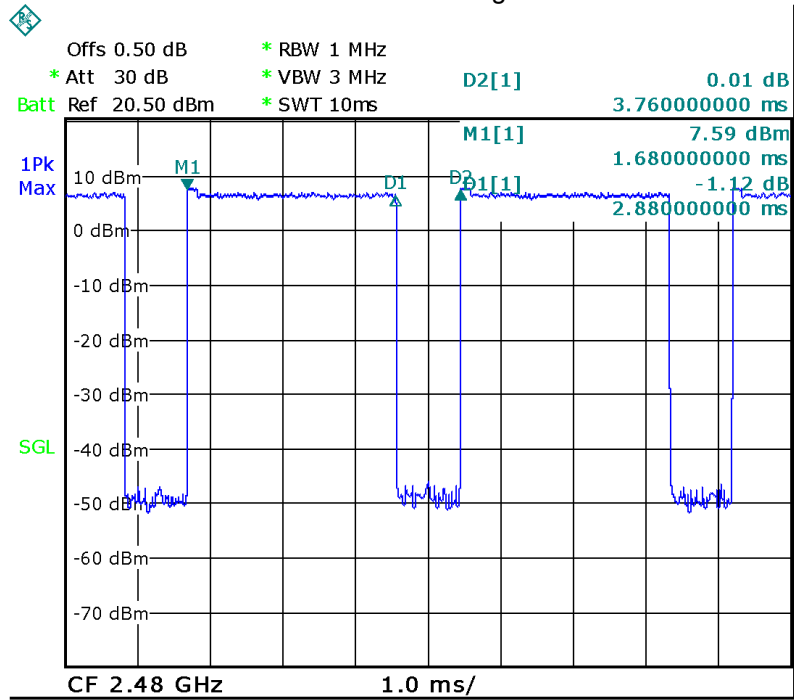


8DPSK DH5 Low Channel

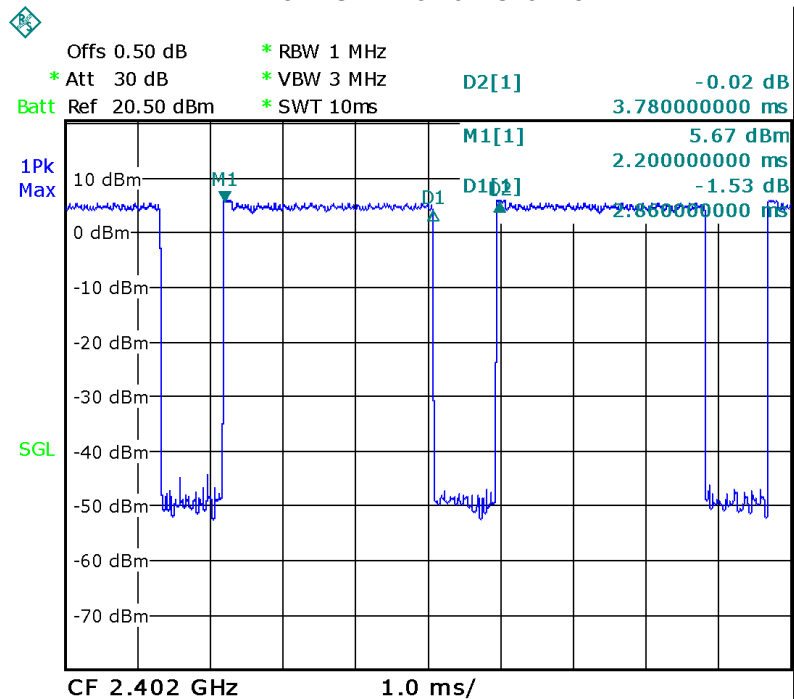

8DPSK DH5 Middle Channel

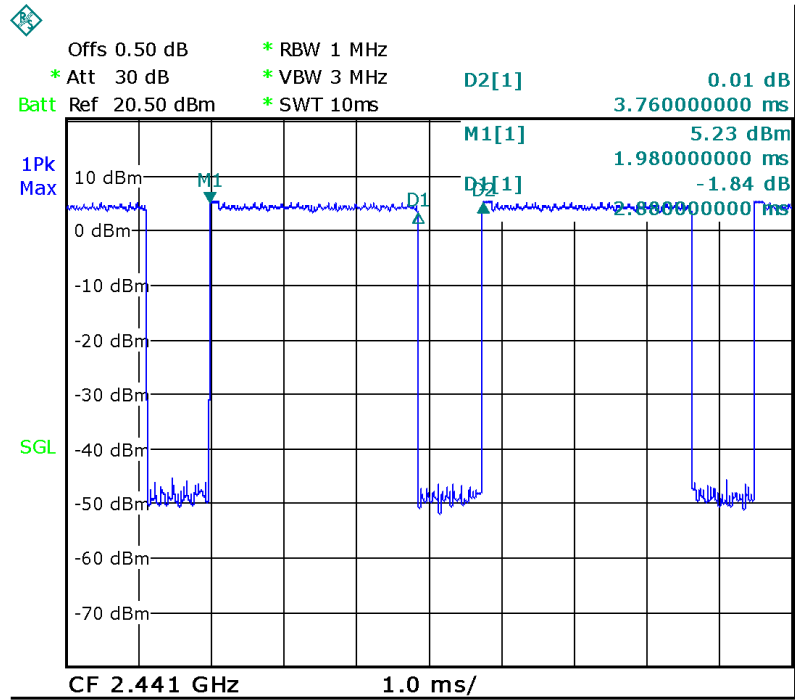

8DPSK DH5 High Channel

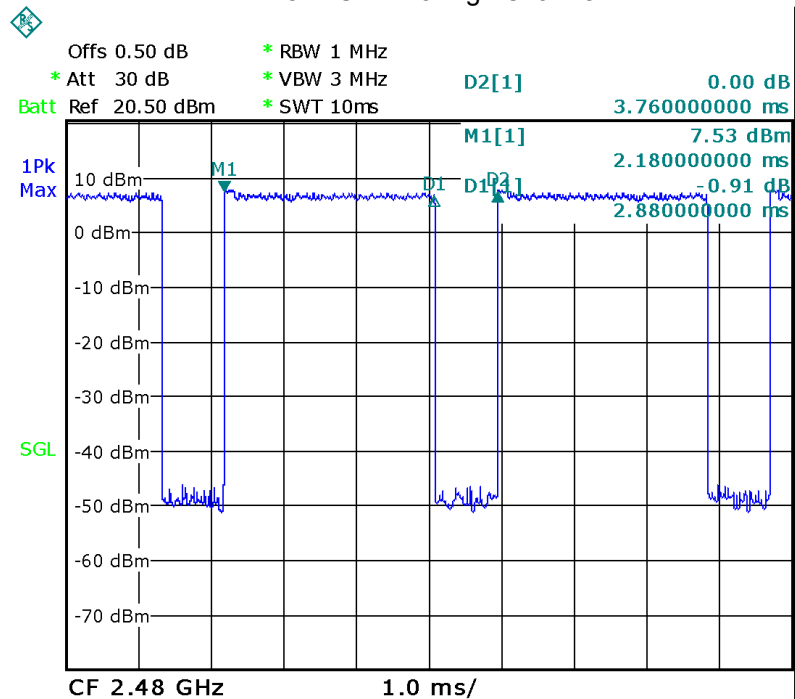

16 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna, fulfil the requirement of this section.

17 RF Exposure

Remark: refer to SAR test report: WTD22X05093708W.

18 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-Black G 2-Photos.

=====**End of Report**=====