

Report No.: 150428038GZU-002
Issued: 2015-5-21

TEST REPORT

Applicant Name & : Packo Gift Co.,Ltd
Address : ROOM 1101A, 11TH FLSUN CHEONG INDUSTRIAL BLDG 2-4 CHEUNG
YEE ST, CHEUNG SHA WAN KOWLOON HONG KONG

Sample Description

Product : String Lights
FCC ID : 2AEQI00245832541234
Model No. : PELI-XXX/YY ("XXX" means number of lights from "100-1200", "YY" means number of parallel circuits from "10-120")
Electrical Rating : AC 120V/60Hz

Date Received : 28 April 2015

Date Test Conducted : 29 April 2015 – 21 May 2015

Test standards : FCC Part 15: 2014 Subpart B

Test Result : Pass

Conclusion : The submitted samples complied with the above rules/standards.

Remark : None.

*****End of Page*****

Prepared and Checked By:



Sky Zhu
Engineer
Intertek Guangzhou

Approved By:



Helen Ma
Team Leader
Intertek Guangzhou
21 May 2015

Date

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538

CONTENT

TEST REPORT	1
CONTENT	2
1 TEST RESULTS SUMMARY	3
2 TEST RESULTS CONCLUSION	4
3 LABORATORY MEASUREMENTS	5
4 TEST RESULTS	6
4.1 CONDUCTED DISTURBANCE VOLTAGE AT MAINS PORTS.....	6
4.1.1 <i>Used Test Equipment</i>	6
4.1.2 <i>Block Diagram of Test Setup</i>	6
4.1.3 <i>Test Setup and Procedure</i>	6
4.1.4 <i>Limit</i>	7
4.1.5 <i>Test Data</i>	8
4.1.6 <i>Emission Curve</i>	9
4.1.7 <i>Measurement Uncertainty</i>	10
4.2 RADIATED EMISSION (30 MHZ-1000 MHZ).....	10
4.2.1 <i>Used Test Equipment</i>	10
4.2.2 <i>Block Diagram of Test Setup</i>	10
4.2.3 <i>Test Setup and Procedure</i>	11
4.2.4 <i>Limit</i>	11
4.2.5 <i>Test Data</i>	12
4.2.6 <i>Test Curve</i>	13
4.2.7 <i>Measurement uncertainty</i>	14
4.3 RADIATED EMISSION ABOVE 1 GHZ.....	14
4.3.1 <i>Used Test Equipment</i>	14
4.3.2 <i>Block Diagram of Test Setup</i>	15
4.3.3 <i>Test Setup and Procedure</i>	16
4.3.4 <i>Limit</i>	16
4.3.5 <i>Test Data</i>	17
4.3.6 <i>Test Curve</i>	18
4.3.7 <i>Measurement uncertainty</i>	18

1**TEST RESULTS SUMMARY****Classification of EUT: Class B**

Test Item	Standard	Result
Conducted disturbance voltage at mains ports	FCC Part 15: 2014, Subpart B	Pass
Radiated emission (30 MHz–1 GHz)	FCC Part 15: 2014, Subpart B	Pass
Radiated emission (Above 1 GHz)	FCC Part 15: 2014, Subpart B	Pass
Remark: Reference publication is used for methods of measurement: ANSI C63.4:2009		

Remark: 1. The symbol “N/A” in above table means Not Applicable.**2. When determining the test results, measurement uncertainty of tests has been considered.**

2**Test Results Conclusion**
(with Justification)

RE: EMC Testing Pursuant to FCC Part 15, Subpart B Performed on the String Lights, Models: PELI-XXX/YY("XXX" means number of lights from "100-1200", "YY" means number of parallel circuits from "10-120").

All models are identical except the number of lights.

We selected PELI-1200/120 for full test can cover other models.

We tested the Color Changing Accent Light, Model: PELI-1200/120, to determine if it was in compliance with the relevant FCC rules as marked on the Test Results Summary. We found that the unit met the requirement of FCC Part 15, Subpart B when tested as received. The worst case's test data was presented in this test report.

An un-modulated CW signal at the operating frequency of the EUT is supplied to the EUT for all measurements.

The receiver type of the EUT is super heterodyne.

Conclusion:

The sample as received complied with the FCC Part 15 requirement.

The production units are required to conform to the initial sample as received when the units are placed on the market.

3**LABORATORY MEASUREMENTS****Configuration Information**

Equipment Under Test (EUT):	String Lights
Model:	PELI-1200/120
Serial No.	Not Labeled
Support Equipment:	N/A
Rated Voltage:	120V/60Hz
Condition of Environment:	Temperature : 22~28°C Relative Humidity: 35~60% Atmosphere Pressure 86~106kPa

Notes:

1. The EMI measurements had been made in the operating mode producing the largest emission in the frequency band being investigated consistent with normal applications.
An attempt had been made to maximize the emission by varying the configuration of the EUT.

2. Test Sites:

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

All tests were performed at:

Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City,
GETDD Guangzhou, China

Except Radiated Disturbance was performed at:

Room 101, Block A, No.11 Jing Ye San Street, Yu Shu Industrial Park, Guangzhou Science City,
GETDD Guangzhou

4 TEST RESULTS


4.1 Conducted Disturbance Voltage at mains ports

Test Result: Pass

4.1.1 Used Test Equipment

Equipment No.	Equipment	Model	Manufacturer	Cal.Date	Due Date
EM004-04	EMC shield Room	8m×3m×3m	Zhongyu	2015-2-10	2016-2-10
EM080-05	EMI receiver	ESCI	R&S	2014-8-4	2015-8-4
EM006-05	LISN	ENV216	R&S	2014-12-12	2015-12-12
EM084-02	SIGNAL Generator	SML02	R&S	2015-6-9	2016-6-9

4.1.2 Block Diagram of Test Setup

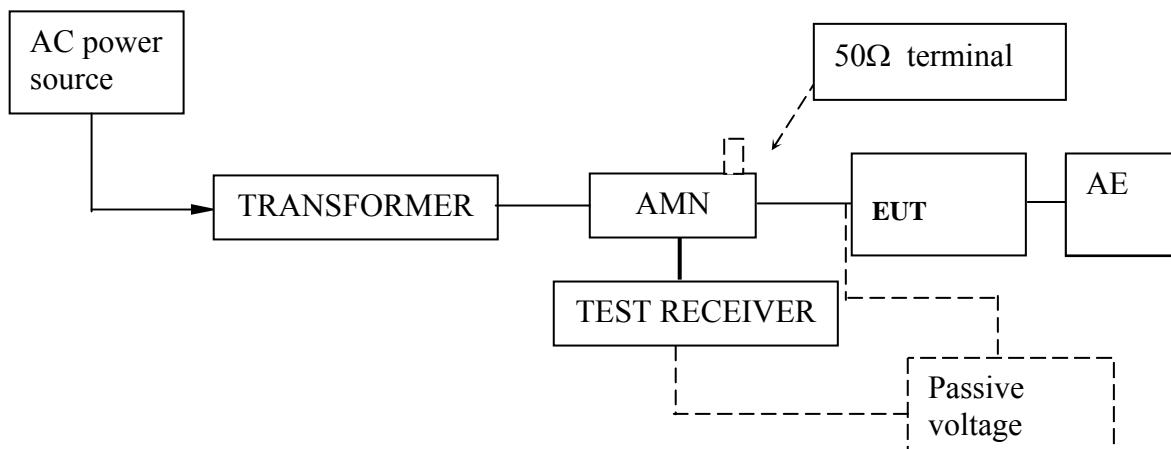

4.1.3 Test Setup and Procedure

Test was performed according to ANSI C63.4: 2009. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance. Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane(Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

4.1.4 Limit

Class B

Frequency range MHz	AC mains terminals dB (uV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The lower limit is applicable at the transition frequency.

4.1.5 Test Data**At main terminal: Pass****Test Voltage: AC120 V, 60 Hz****Tested Wire: Live****Operation Mode: Receiving mode**


EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15QP			
Trace2:	FCC15AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB
1 Quasi Peak	234 kHz	47.10 L1	-15.20	
2 Average	234 kHz	36.54 L1	-15.76	
1 Quasi Peak	294 kHz	35.66 L1	-24.74	
1 Quasi Peak	1.498 MHz	33.68 L1	-22.31	
2 Average	2.098 MHz	21.31 L1	-24.68	
1 Quasi Peak	3.546 MHz	33.36 L1	-22.63	
2 Average	6.078 MHz	32.41 L1	-17.59	
1 Quasi Peak	6.082 MHz	42.85 L1	-17.15	
2 Average	6.41 MHz	34.57 L1	-15.42	
1 Quasi Peak	6.422 MHz	44.69 L1	-15.30	
1 Quasi Peak	10.746 MHz	39.41 L1	-20.58	
2 Average	10.854 MHz	31.46 L1	-18.53	

Tested Wire: Neutral**Operation Mode: Receiving mode**


EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15QP			
Trace2:	FCC15AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB
2 Average	234 kHz	43.84 L1	-8.45	
1 Quasi Peak	230 kHz	49.97 L1	-12.47	
1 Quasi Peak	6.406 MHz	45.64 L1	-14.35	
2 Average	6.362 MHz	35.53 L1	-14.46	
1 Quasi Peak	6.102 MHz	44.40 L1	-15.59	
2 Average	6.114 MHz	33.84 L1	-16.15	
2 Average	10.478 MHz	30.80 L1	-19.19	
1 Quasi Peak	10.434 MHz	39.22 L1	-20.77	
1 Quasi Peak	3.19 MHz	35.06 L1	-20.93	
1 Quasi Peak	290 kHz	37.95 L1	-22.57	
2 Average	418 kHz	23.48 L1	-24.00	
2 Average	478 kHz	22.11 L1	-24.26	

4.1.6 Emission Curve

Tested Wire: Live

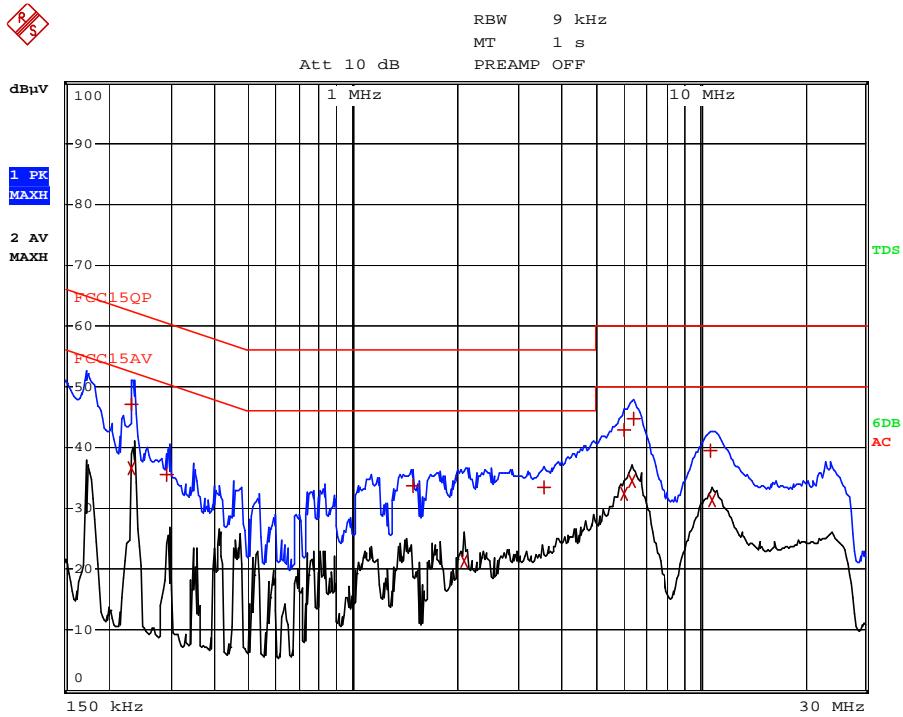

Tested Wire: Neutral

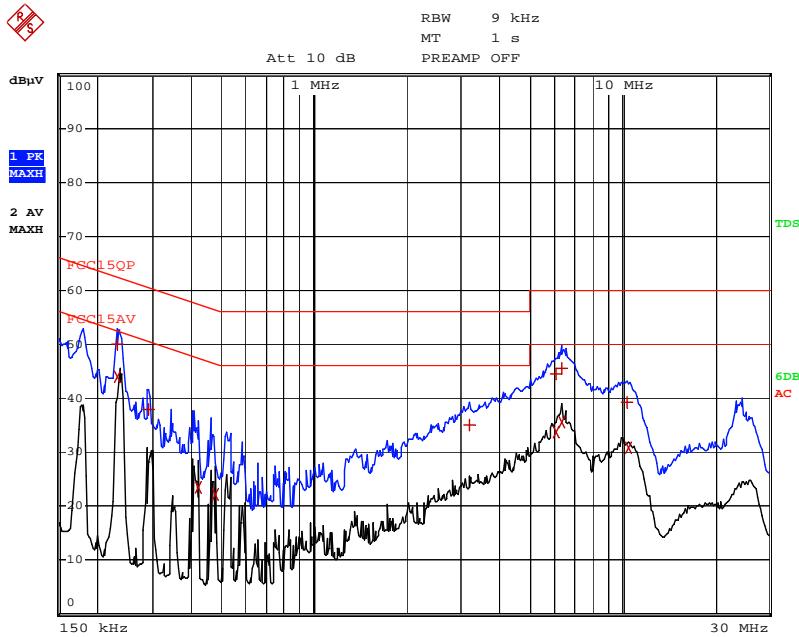


Date: 19.MAY.2015 11:42:39

4.1.7 Measurement Uncertainty

Uncertainty: 2.58 dB at a level of confidence of 95%

4.2 Radiated Emission (30 MHz -1000 MHz)**Test Result: Pass****4.2.1 Used Test Equipment**

Equipment No.	Equipment	Model	Manufacturer	Cal.Date	Due Date
EM030-01	3m Semi-Anechoic Chamber	9×6×6 m3	ETS•LINDGR EN	2015-5-3	2016-5-3
EM030-02	Control room for 3m Semi-Anechoic Chamber	4×4×3 m3	ETS•LINDGR EN	2015-5-3	2016-5-3
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2015-6-9	2016-6-9
EM033-01	TRILOG Super Broadband test Antenna (30 MHz-3 GHz)	VULB 9163	SCHWARZB ECK	2014-8-30	2015-8-30
EM031-02-01	Coaxial cable	/	R&S	2015-6-9	2016-6-9
EM084-02	SIGNAL Generator	SML02	R&S	2015-6-9	2016-6-9

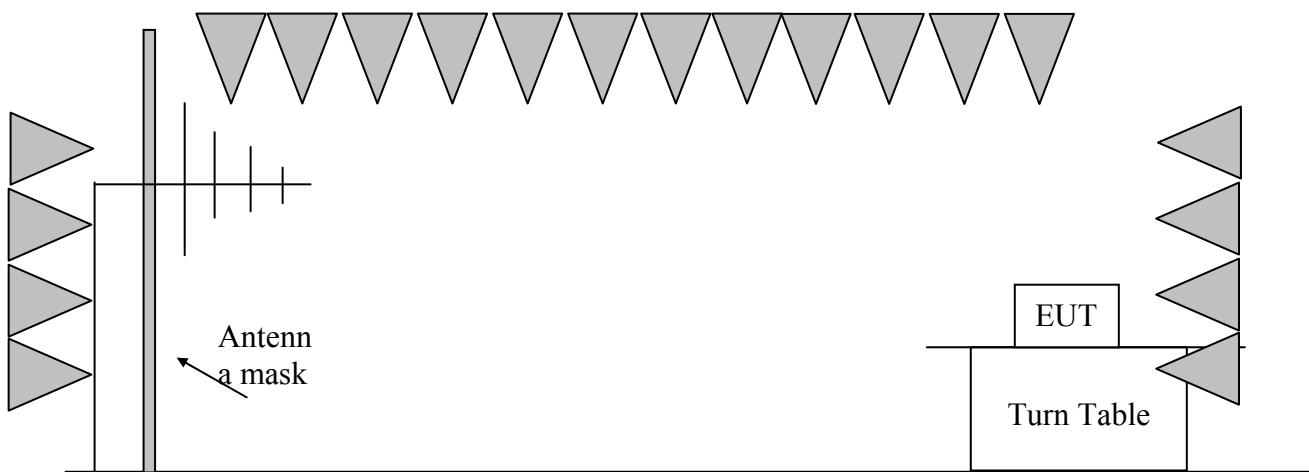4.2.2 Block Diagram of Test Setup

4.2.3 Test Setup and Procedure

The measurement was applied in a 3 m semi-anechoic chamber. The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mask. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

Broadband antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2009 requirement during radiated test. The bandwidth setting on R&S Test Receiver was 120 kHz. The frequency range from 30MHz to 1000MHz was checked

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper Frequency of Radiated Measurement
Below 1.705 MHz	30MHz
1.705 MHz – 108 MHz	1 GHz
108 MHz – 500 MHz	2 GHz
500 MHz – 1 GHz	5 GHz
Above 1 GHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower.
At transitional frequencies the lower limit applies.	

Remark: Radiated Emission was performed from 30 MHz to 1 GHz.

4.2.4 Limit

Class B limit at 3m test distance:



Frequency range MHz	Quasi-peak limits dB (μV/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
960 to 1000	54
At transitional frequencies the lower limit applies.	

4.2.5 Test Data**Test Voltage: AC120 V, 60 Hz****Receiver mode****Horizontal**

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector Function
49.70	8.70	12.10	20.80	40.00	-19.20	QP
100.50	7.90	13.60	21.50	43.50	-22.00	QP
700.80	16.20	15.40	31.60	46.00	-14.40	QP

Vertical

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector Function
32.16	22.40	12.30	34.70	40.00	-5.30	QP
40.72	18.60	13.60	32.20	40.00	-7.80	QP
99.96	15.50	13.00	28.50	43.50	-15.00	QP

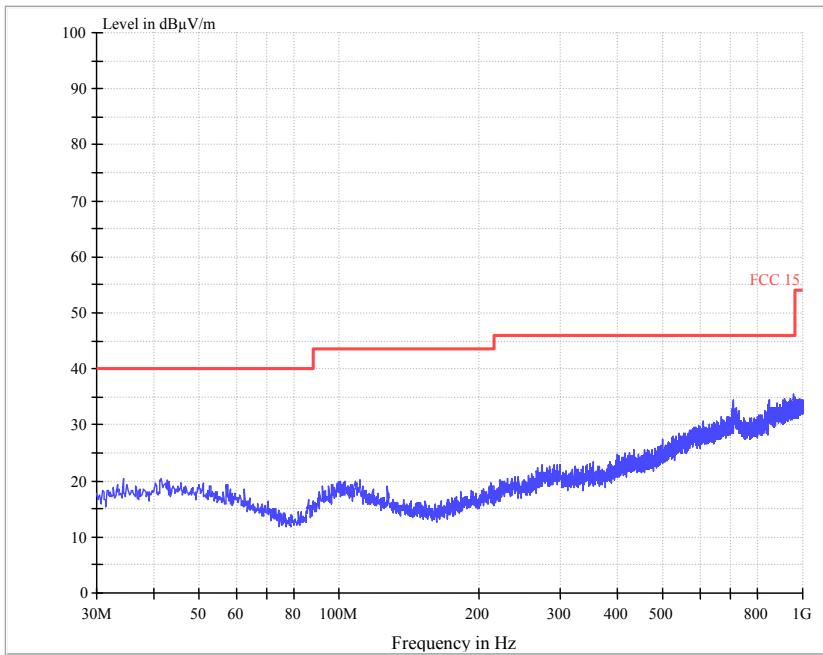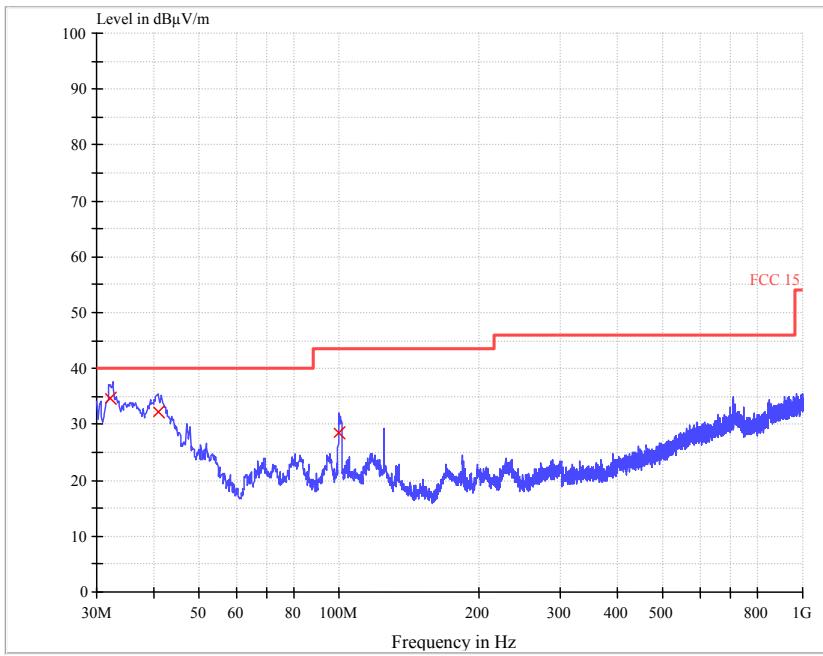4.2.6 Test Curve**Receiver function:****Horizontal:****Vertical**


4.2.7 Measurement uncertainty

Uncertainty: 4.87 dB in the frequency range of 30-1000 MHz at a level of confidence of 95%

4.3 Radiated Emission above 1 GHz**Test Result: Pass****4.3.1 Used Test Equipment**

Equipment No.	Equipment	Model	Manufacturer	Cal.Date	Due Date
EM030-01	3m Semi-Anechoic Chamber	9×6×6 m3	ETS•LINDGR EN	2015-5-3	2016-5-3
EM030-02	Control room for 3m Semi-Anechoic Chamber	4×4×3 m3	ETS•LINDGR EN	2015-5-3	2016-5-3
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2015-6-9	2016-6-9
EM033-01	TRILOG Super Broadband test Antenna (30 MHz-3 GHz)	VULB 9163	SCHWARZB ECK	2014-8-30	2015-8-30
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2015-6-9	2016-6-9
EM033-02	Double-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)	R&S HF907	EM033-02	2015-5-30	2016-5-30
EM031-02-01	Coaxial cable	/	R&S	2015-6-9	2016-6-9
EM084-02	SIGNAL Generator	SML02	R&S	2015-6-9	2016-6-9

4.3.2 Block Diagram of Test Setup

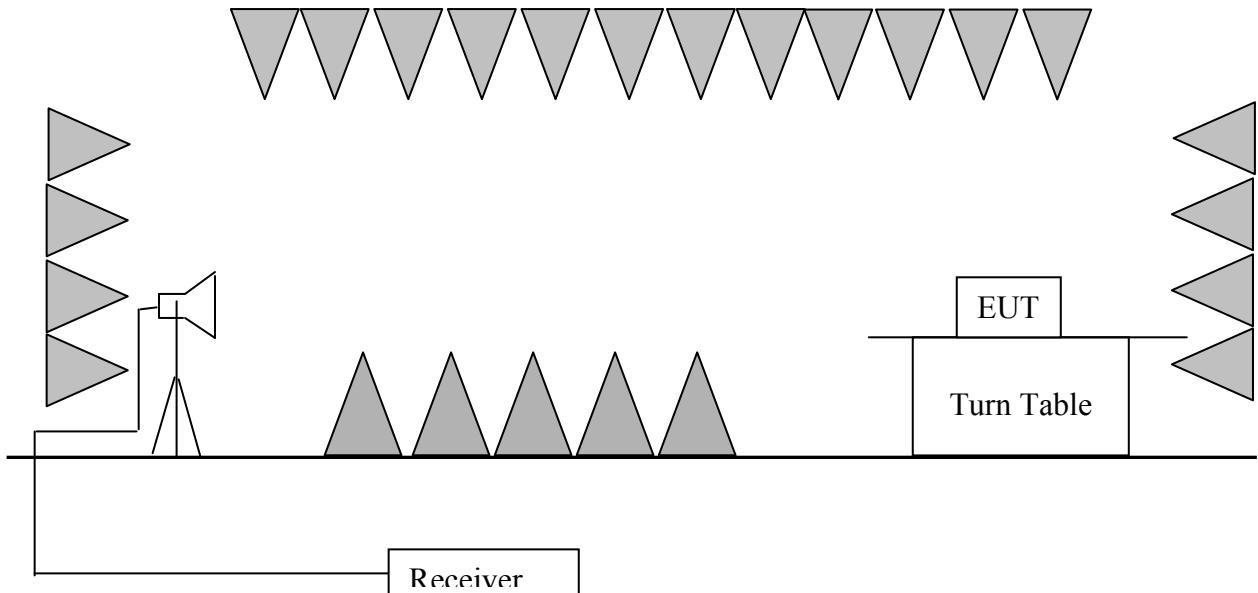

4.3.3 Test Setup and Procedure

The measurement was applied in a semi-anechoic chamber with absorbing material placed on the ground. The EUT were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turntable varied every 30 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna pole. The antenna was set as same as the height of the radiation centre of the EUT.

Horn antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated during radiated test.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest Frequency Generated or Used in Device	Upper Frequency of Radiated Measurement
Below 1.705 MHz	30MHz
1.705 MHz – 108 MHz	1 GHz
108 MHz – 500 MHz	2 GHz
500 MHz – 1 GHz	5 GHz
Above 1 GHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower.
At transitional frequencies the lower limit applies.	

Remark: Radiated Emission was performed from 1 GHz to 2 GHz since the highest frequency generated from the EUT was 433 MHz.

4.3.4 Limit

Class B limit at 3m test distance:

Frequency range MHz	Linear Average Detector dB (μ V/m)	Peak Detector dB (μ V/m)
> 1000	54	74
At transitional frequencies the lower limit applies.		

4.3.5 Test Data

Receiver mode

Horizontal

Frequency (GHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector Function
1.36	46.20	-12.60	33.60	54.00	-20.40	Peak
1.59	44.80	-10.30	34.50	54.00	-19.50	Peak
1.78	43.30	-8.10	35.20	54.00	-18.80	Peak


Vertical

Frequency (GHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector Function
1.36	45.50	-12.60	32.90	54.00	-21.10	Peak
1.66	44.00	-10.20	33.80	54.00	-20.20	Peak
1.88	43.40	-8.00	35.40	54.00	-18.60	Peak


Remark: The measured PK value is below AV limit so the result is pass.

4.3.6 Test Curve

Horizontal

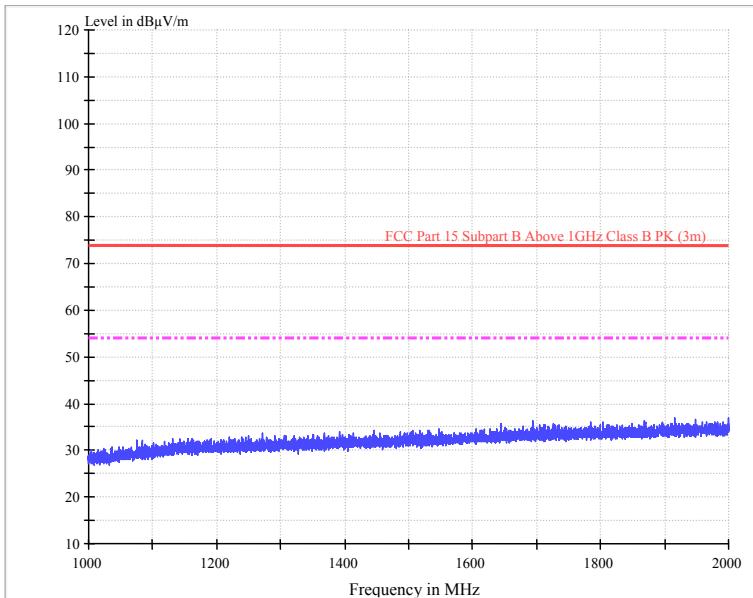

Vertical

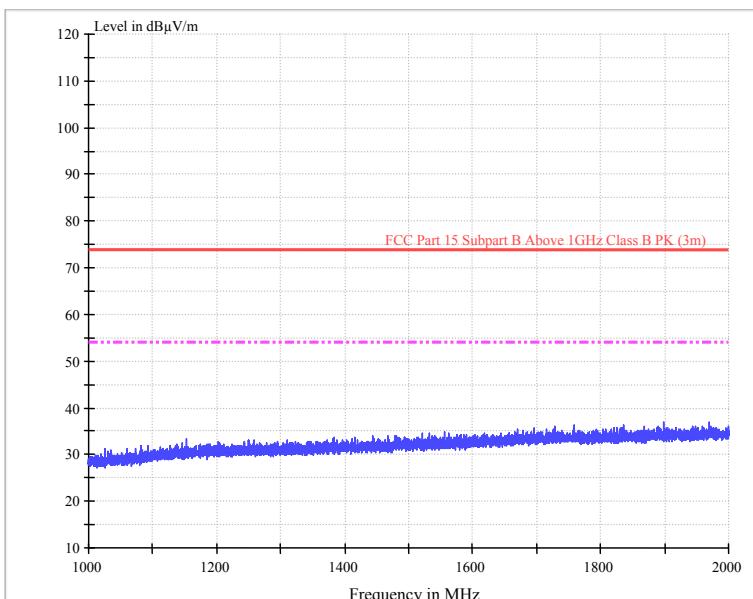**4.3.7 Measurement uncertainty**

Measurement uncertainty is under consideration according to CISPR 16-4-2:2003.