



## FCC PART 15 SUBPART C MEASURMENT AND TEST REPORT

For

Huizhou Desay SV Automotive Co., Ltd.

103, Hechang 5th Road West, Zhongkai National Hi-tech Industrial  
Development Zone, Huizhou, Guangdong, P.R. China

E.U.T.: Driving Video Recorder

Model Name: MN9015, MN9014E, MN9014, MN9014B

Brand Name: N/A

FCC ID: 2AEQTMN9014E

Report Number: NTC1608088F

Test Date(s): August 13, 2016 to September 06, 2016

Report Date(s): September 06, 2016

Prepared by

Dongguan Nore Testing Center Co., Ltd.

Building D, Gaosheng Science and Technology Park, Hongtu Road,  
Nancheng District, Dongguan City, Guangdong, China

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

  
Rose Hu / Engineer

Approved & Authorized Signer



  
Sunm Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST .....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	6
1.3 TEST METHODOLOGY .....	6
1.4 EQUIPMENT MODIFICATIONS .....	6
1.5 SUPPORT DEVICE .....	6
1.6 TEST FACILITY AND LOCATION.....	7
1.7 SUMMARY OF TEST RESULTS.....	8
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>9</b>
2.1 EUT CONFIGURATION.....	9
2.2 SPECIAL ACCESSORIES.....	9
2.3 DESCRIPTION OF TEST MODES .....	9
2.4 EUT EXERCISE .....	9
<b>3. MAX. CONDUCTED OUTPUT POWER.....</b>	<b>10</b>
3.1 MEASUREMENT PROCEDURE .....	10
3.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	10
3.3 MEASUREMENT RESULTS.....	10
<b>4. 6DB BANDWIDTH.....</b>	<b>11</b>
4.1 MEASUREMENT PROCEDURE .....	11
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	11
4.3 MEASUREMENT RESULTS.....	11
<b>5. POWER SPECTRAL DENSITY.....</b>	<b>13</b>
5.1 MEASUREMENT PROCEDURE .....	13
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
5.3 MEASUREMENT RESULTS.....	13
<b>6. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>15</b>
6.1 REQUIREMENT AND MEASUREMENT PROCEDURE.....	15
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	15
6.3 MEASUREMENT RESULTS.....	15
<b>7. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS.....</b>	<b>17</b>
7.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	17
7.2 MEASUREMENT PROCEDURE .....	18
7.3 LIMIT.....	19
7.4 MEASUREMENT RESULTS .....	19

---

<b>8. ANTENNA APPLICATION .....</b>	<b>25</b>
8.1 ANTENNA REQUIREMENT .....	25
8.2 MEASUREMENT RESULTS.....	25
<b>9. TEST EQUIPMENT LIST.....</b>	<b>26</b>

## Revision History of This Test Report

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test

This device is a Driving video recorder, it's powered by DC 12V come from battery. For more details features, please refer to User's Manual.

Manufacturer & Factory : Same as the applicant.  
Power Supply : DC 12V battery  
Test voltage : DC 12V battery  
Model name : MN9015, MN9014E, MN9014, MN9014B  
(All test were carried on model MN9015 and MN9014E )  
Model difference Description : These models have the same circuitry, electrical mechanical, PCB Layout and physical construction. Their difference in model name, appearance of enclosure and the button board due to trading purpose.  
Hardware version : V1.0  
Software version : V1.0  
Serial number : N/A  
Note : None

#### Technical parameters

##### For WIFI Function

Frequency Range : 2437MHz  
Modulation : OFDM  
Number of Channel : 1 for 802.11g  
Date Rate : 6~54Mbps  
Antenna Type : FPC  
Antenna Gain : 2.0dBi

Test SW version	REALTEK 11n Dual MAC 9xD USB WLAN NIC Massproduction Kit
-----------------	---

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AEQTMN9014E** filing to comply with Section 15.247 of the FCC Part 15 (2016), Subpart C Rule.

## 1.3 Test Methodology

The radiated emission measurement was performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters. All other measurements were made in accordance with the procedures in 47 CFR part 2.

## 1.4 Equipment Modifications

Not available for this EUT intended for grant.

## 1.5 Support Device

Notebook PC	:	Manufacturer: IBM Corporation M/N: R50e P/N: 1834KDC
Adapter	:	Manufacturer: IBM Corporation M/N: 08K8210

## 1.6 Test Facility and Location

Listed by FCC, July 03, 2014  
The Certificate Registration Number is 665078.  
Listed by Industry Canada, June 18, 2014  
The Certificate Registration Number is 9743A.

Dongguan NTC Co., Ltd.  
(Full Name: Dongguan Nore Testing Center Co., Ltd.)  
Building D, Gaosheng Science and Technology Park, Hongtu Road,  
Nancheng District, Dongguan City, Guangdong, China  
(Full Name: Building D, Gaosheng Science & Technology Park,  
Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

## 1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.207 (a)	AC Power Conducted Emission	±1.06dB	N/A <sup>Note</sup>
§15.247(b)(3)	Max. Conducted Output Power	±1.06dB	Compliant
§15.247(a)(2)	6dB Bandwidth	±1.42 x10 <sup>-4</sup> %	Compliant
§15.247(e)	Power Spectral Density	±1.06dB	Compliance
§15.247(d)	Band Edge and Conducted Spurious Emissions	±1.70dB & ±2.51dB	Compliance
§15.247(d),§15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	±3.70dB	Compliance
§15.203	Antenna Requirement	±0.60dB	Compliance

Note: 1. The EUT has been tested as an independent unit. And Continual transmitting in maximum power (the fully-charged battery is used during the measurement)

2. Due to this EUT is powered by battery only, the AC Power Conducted Emission is not applicable.

---

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 Special Accessories

Not available for this EUT intended for grant.

### 2.3 Description of test modes

The EUT has been tested under continuous operating condition. Test program used to control the EUT staying in continuous transmitting mode.

### 2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### 3. Max. Conducted Output Power

#### 3.1 Measurement Procedure

Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### 3.2 Test SET-UP (Block Diagram of Configuration)



#### 3.3 Measurement Results

**Pass**

Please refer to following table.

Temperature :	24 °C	Humidity :	50 %
Test By:	Sance	Test Date :	August 31, 2016
Test Result:	PASS		

Frequency MHz	Data Rate Mbps	Peak Output Power dBm	Limit dBm
IEEE 802.11g Mode (OFDM, Antenna Gain=2dBi)			
2437	6	8.03	30

## 4. 6dB Bandwidth


### 4.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v03r02):

1. For 6dB bandwidth, Set the RBW = 100KHz.
2. Set the VBW  $\geq$  3 x RBW
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 4.2 Test SET-UP (Block Diagram of Configuration)




### 4.3 Measurement Results

**Pass**

Please refer to following table and plot.

Temperature :	24 °C	Humidity :	50 %
Test By:	Sance	Test Date :	August 31, 2016
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	Limit
IEEE 802.11g Mode (OFDM)			
2437	6	16.44	>500KHz

**6dB Bandwidth  
802.11g**

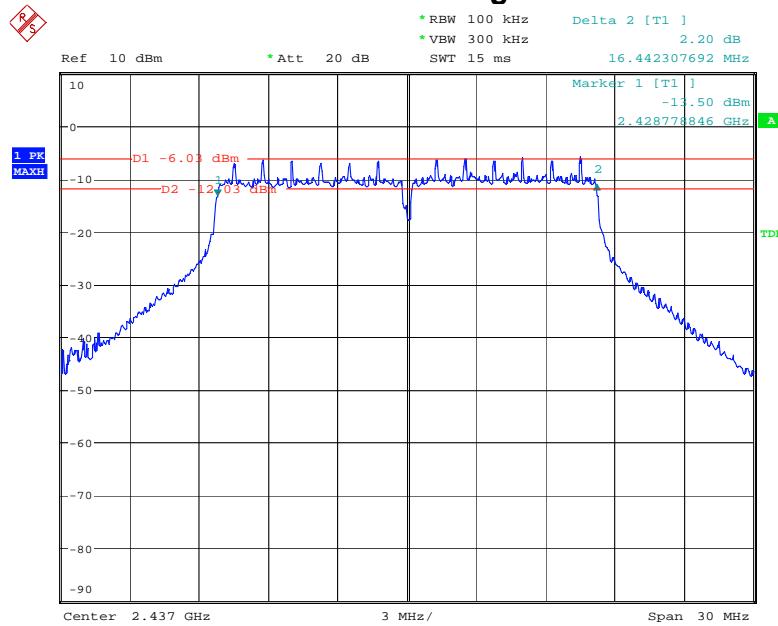

Date: 31.AUG.2016 10:16:20

## 5. Power Spectral Density


### 5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v03r02):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.2 Test SET-UP (Block Diagram of Configuration)



### 5.3 Measurement Results


**Pass**

Please refer to following table and plot.

Temperature :	24 °C	Humidity :	50 %
Test By:	Sance	Test Date :	August 31, 2016
Test Result:	PASS		

Frequency MHz	Data Rate Mbps	PSD dBm/3kHz	Limit dBm/3kHz
IEEE 802.11g Mode (OFDM)			
2437	6	-20.00	8

## 802.11g

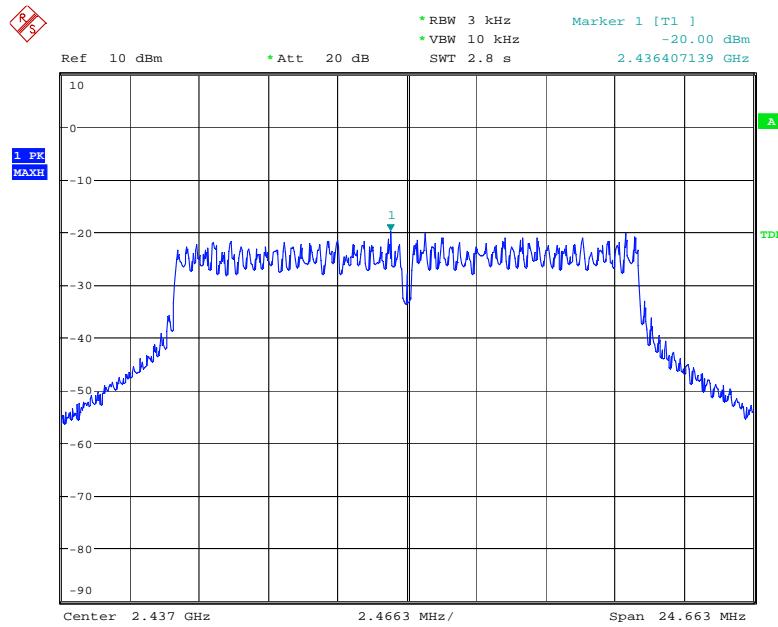

Date: 31.AUG.2016 10:18:13

## 6. Band Edge and Conducted Spurious Emissions

### 6.1 Requirement and Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

For 30MHz to 1GHz:

Sept the spectrum analyzer as: RBW=120kHz, VBW=300kHz, Detector=Quasi-Peak

For Above 1GHz:


Set the spectrum analyzer as: RBW=1MHz, VBW=3MHz, Detector=Peak.

Set the spectrum analyzer as: RBW=1MHz, VBW=10Hz, Detector=Peak.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

### 6.2 Test SET-UP (Block Diagram of Configuration)



### 6.3 Measurement Results

The test plots showed that all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below tables and plots.


Spurious Emission in restricted band:

Operation Mode: TX      Test Date : August 20, 2016  
 Frequency Range: Above 1GHz      Temperature : 24 °C  
 Test Result: PASS      Humidity : 50 %  
 Measured Distance: 3m      Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2390.000	H	44.12	32.78	8.05	52.17	40.83	74.00	54.00	-21.83	-13.17
2390.000	V	45.76	33.14	8.05	53.81	41.19	74.00	54.00	-20.19	-12.81
2483.500	H	39.57	27.53	14.15	53.72	41.68	74.00	54.00	-20.28	-12.32
2483.500	V	40.47	28.58	14.15	54.62	42.73	74.00	54.00	-19.38	-11.27

**Note:** (1) All Readings are Peak Value and AV.  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss  
 (3) Measurement uncertainty : ±3.7dB

### Conducted Spurious Emissions

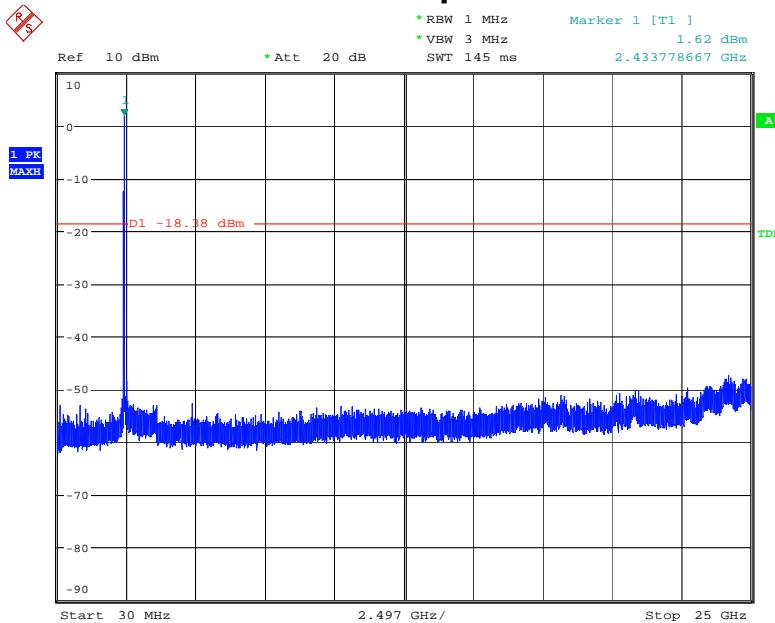


Date: 31.AUG.2016 10:19:40

**Note: Sweep points=30001pts**


## 7. Radiated Spurious Emissions and Restricted Bands

### 7.1 Test SET-UP (Block Diagram of Configuration)

#### 7.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

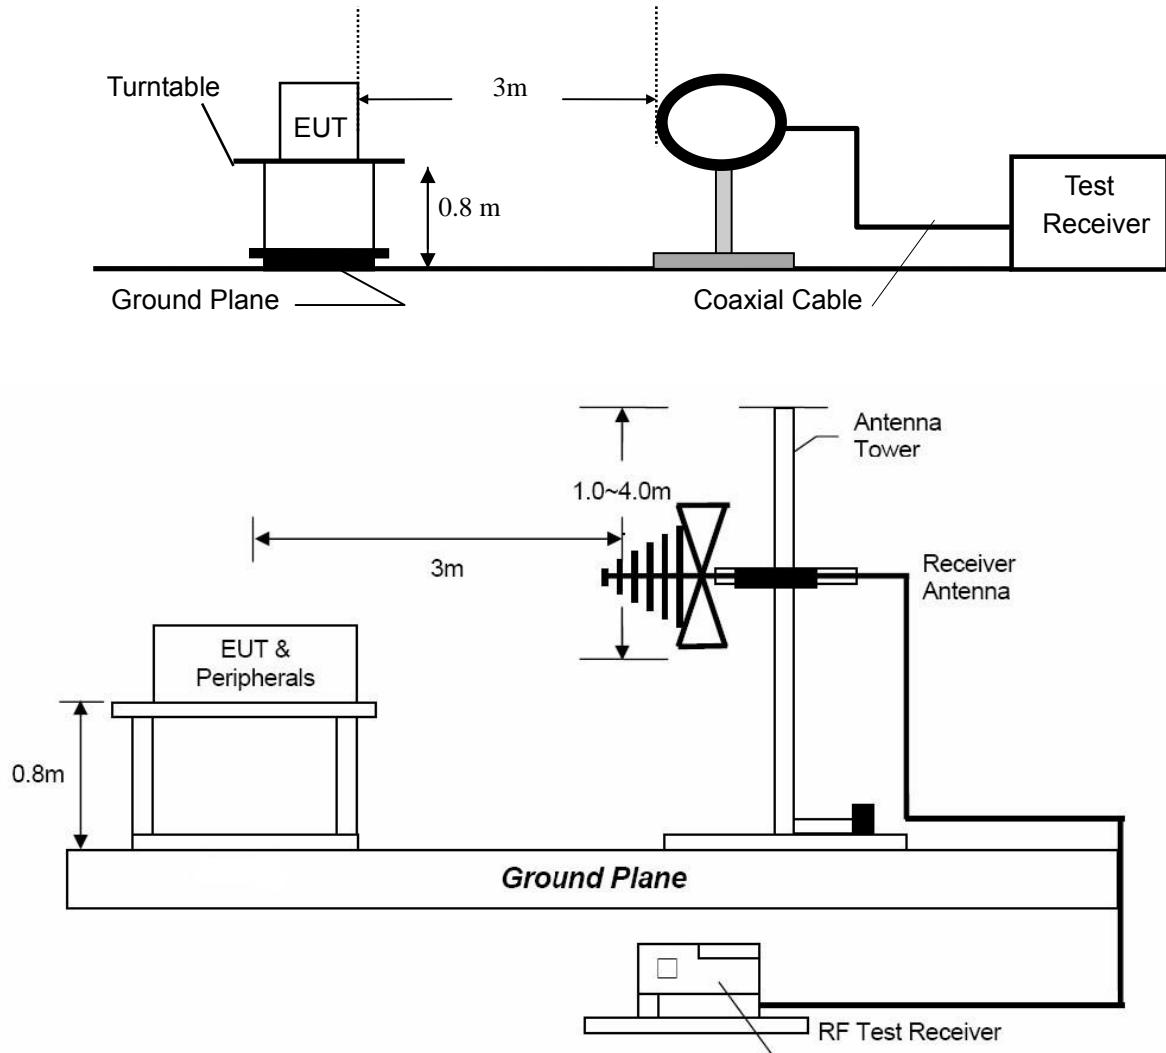

### 7.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

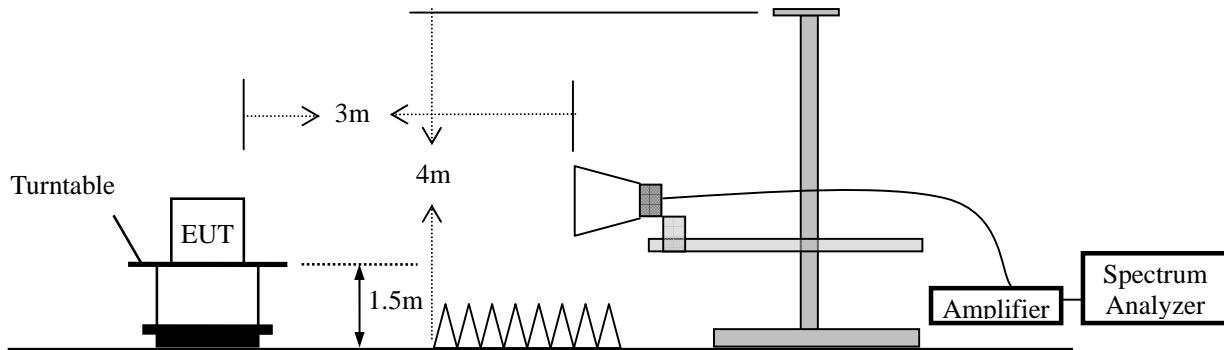

## 7.2 Measurement Procedure

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:  
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

### 7.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		µV/m
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark : (1) Emission level (dB) $\mu$ V = 20 log Emission level  $\mu$ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

(5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

### 7.4 Measurement Results


Please refer to following plots.



**Dongguan NTC Co., Ltd.**  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2016-8-26 12:07:12

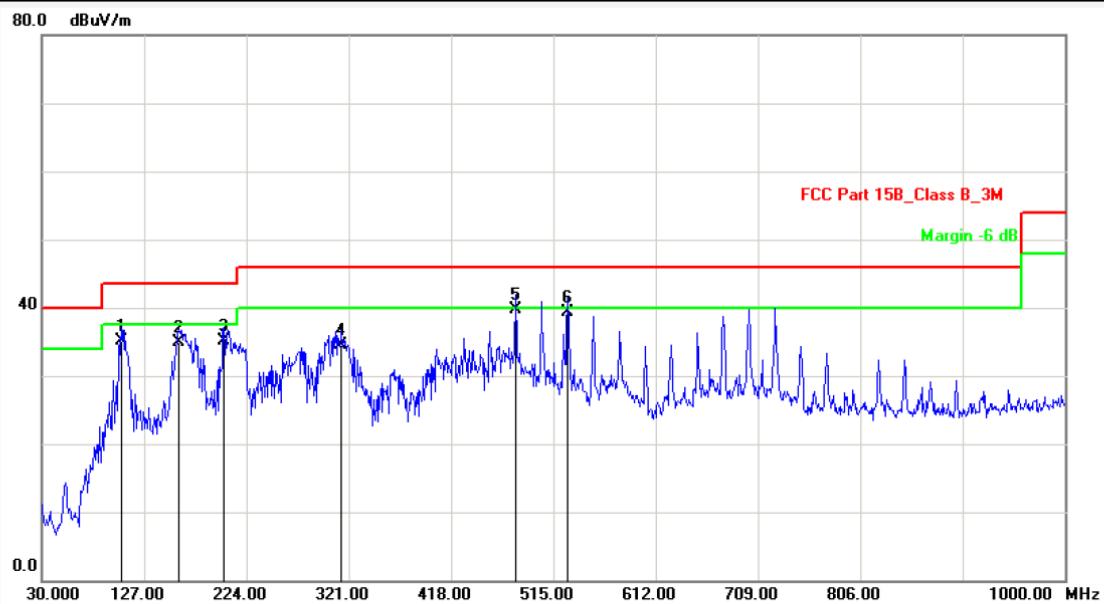

Report No.: MN9015

Test Standard: FCC Part 15B\_Class B\_3M

Test Distance: 3m

Test item: Radiation Emission

Ant. Polarization: Horizontal

Applicant: Desay SV Automotive

Temp.(C)/Hum.(%): 22(C) / 54 %

Product: Driving Video Recorder

Power Rating: DC 12V

Model No.: MN9015

Test Engineer: Chilam

Test Mode: WIFI Mode

Remark: 802.11g


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	105.6600	-11.97	47.02	35.05	43.50	-8.45	QP			P	
2	159.9800	-15.16	50.05	34.89	43.50	-8.61	QP			P	
3	202.6600	-13.38	48.40	35.02	43.50	-8.48	QP			P	
4	314.2099	-10.09	44.69	34.60	46.00	-11.40	QP			P	
5	479.1100	-7.24	47.04	39.80	46.00	-6.20	QP			P	
6	528.5800	-6.70	46.10	39.40	46.00	-6.60	QP			P	



**Dongguan NTC Co., Ltd.**  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2016-8-26 12:14:32

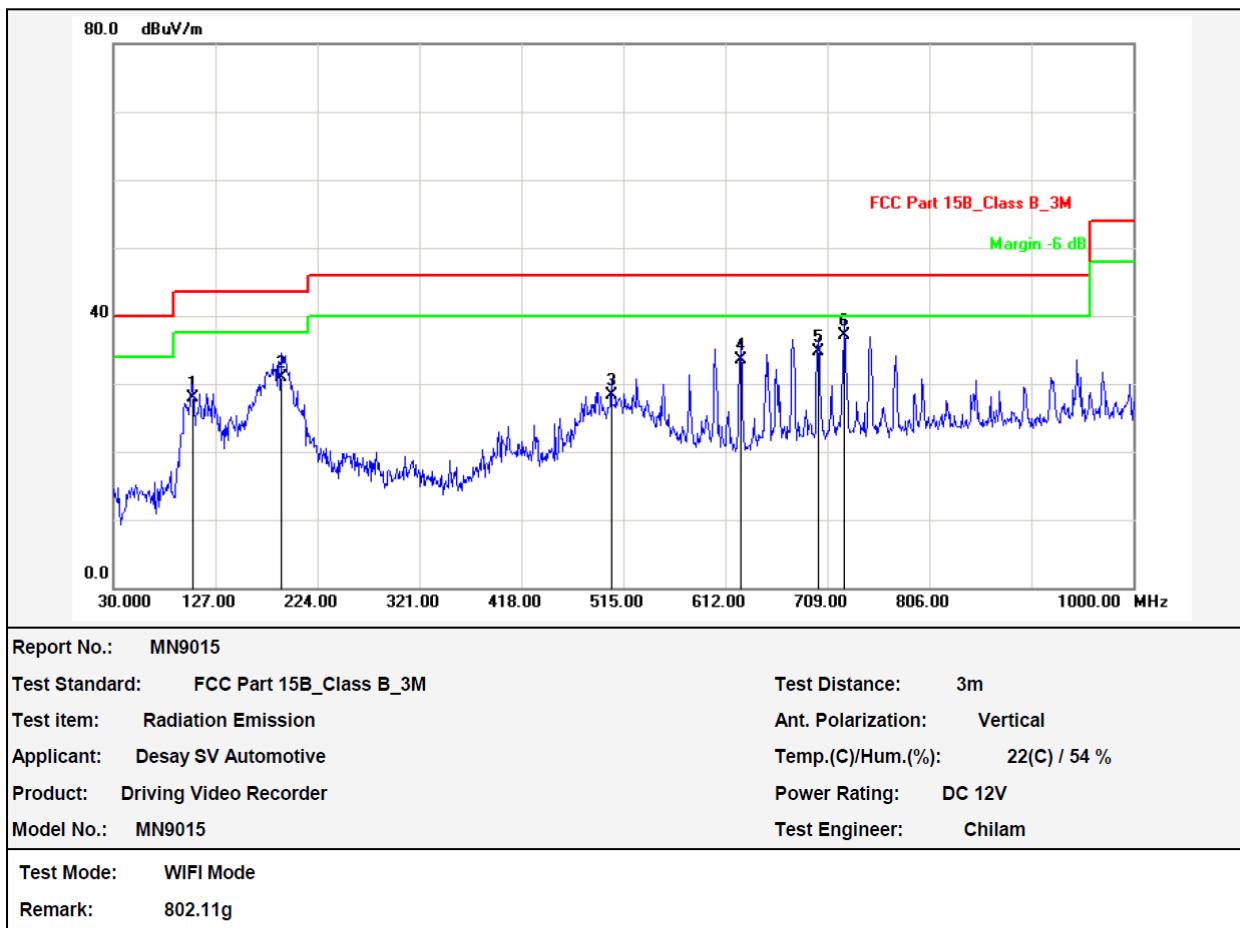


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	105.6598	-15.97	43.87	27.90	43.50	-15.60	QP			P	
2	190.0500	-16.57	47.47	30.90	43.50	-12.60	QP			P	
3	503.3600	-8.75	37.15	28.40	46.00	-17.60	QP			P	
4	626.5498	-6.77	40.37	33.60	46.00	-12.40	QP			P	
5	700.2698	-3.84	38.54	34.70	46.00	-11.30	QP			P	
6	725.4900	-3.17	40.37	37.20	46.00	-8.80	QP			P	



**Dongguan NTC Co., Ltd.**  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2016-8-26 10:20:49

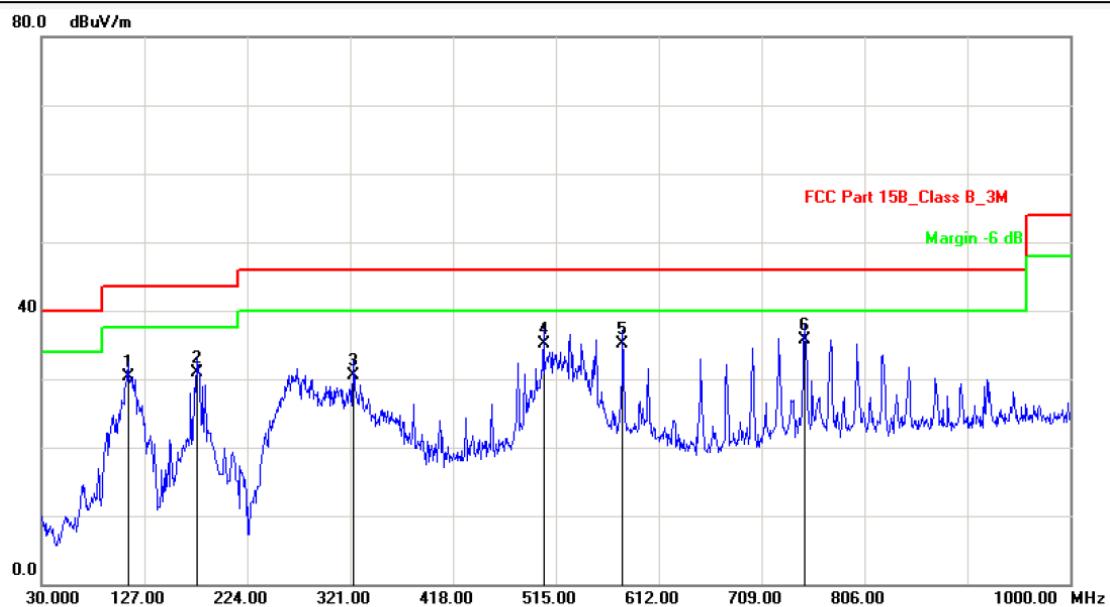

Report No.: MN9014E

Test Standard: FCC Part 15B\_Class B\_3M

Test Distance: 3m

Test item: Radiation Emission

Ant. Polarization: Horizontal

Applicant: Desay SV Automotive

Temp.(C)/Hum.(%): 22(C) / 54 %

Product: Driving Video Recorder

Power Rating: DC 12V

Model No.: MN9014E

Test Engineer: Chilam

Test Mode: WIFI Mode

Remark: 802.11g


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	111.4800	-12.42	42.82	30.40	43.50	-13.10	QP			P	
2	176.4700	-14.40	45.30	30.90	43.50	-12.60	QP			P	
3	323.9100	-9.81	40.41	30.60	46.00	-15.40	QP			P	
4	503.3600	-6.75	41.95	35.20	46.00	-10.80	QP			P	
5	578.0500	-5.63	40.73	35.10	46.00	-10.90	QP			P	
6	749.7400	-2.59	38.39	35.80	46.00	-10.20	QP			P	



**Dongguan NTC Co., Ltd.**  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2016-8-26 10:12:11

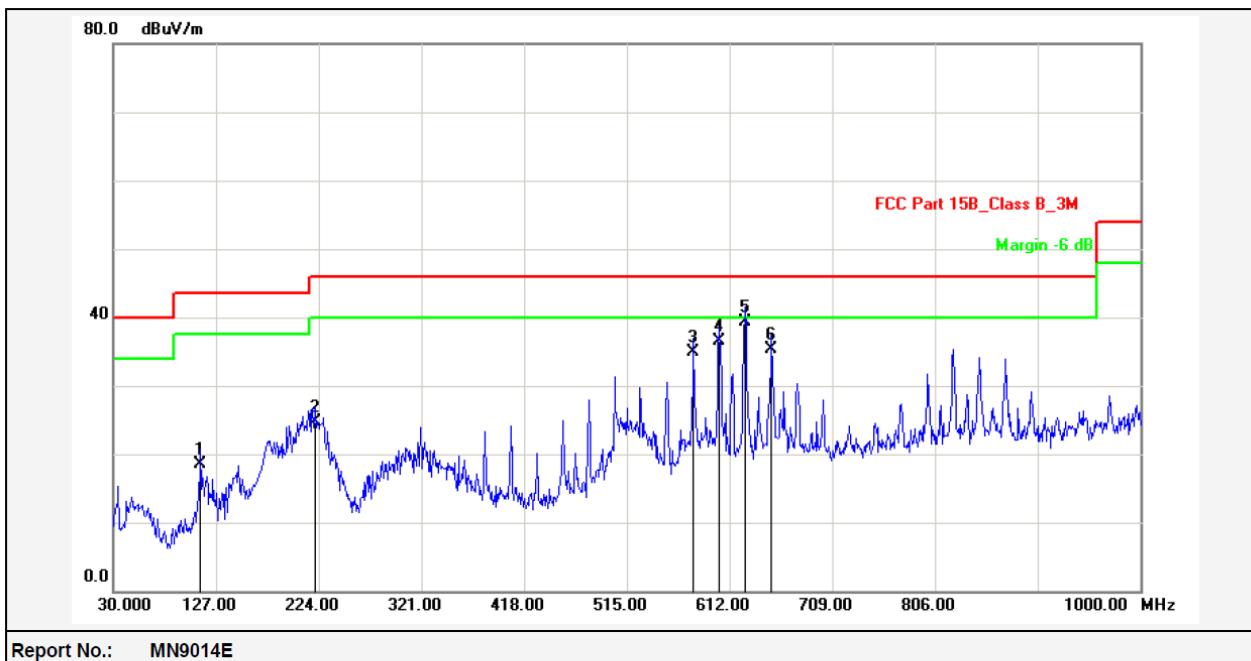

Report No.:	MN9014E	Test Standard:	FCC Part 15B_Class B_3M	Test Distance:	3m
Test item:	Radiation Emission			Ant. Polarization:	Vertical
Applicant:	Desay SV Automotive			Temp.(C)/Hum.(%):	22(C) / 54 %
Product:	Driving Video Recorder			Power Rating:	DC 12V
Model No.:	MN9014E			Test Engineer:	Chilam
Test Mode:	WIFI Mode				
Remark:	802.11g				

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	112.4500	-16.08	34.68	18.60	43.50	-24.90	QP			P	
2	220.1200	-15.97	40.77	24.80	46.00	-21.20	QP			P	
3	578.0500	-7.63	42.53	34.90	46.00	-11.10	QP			P	
4	602.3000	-7.00	43.50	36.50	46.00	-9.50	QP			P	
5	626.5500	-6.77	46.17	39.40	46.00	-6.60	QP			P	
6	651.7700	-5.52	40.92	35.40	46.00	-10.60	QP			P	

Modulation: 802.11g  
 Frequency Range: 1-25GHz Test Date : August 26, 2016  
 Test Result: PASS Temperature : 22 °C  
 Measured Distance: 3m Humidity : 54 %  
 Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4874	V	39.75	28.49	14.37	54.12	42.86	74.00	54.00	-19.88	-11.14
7311	V	40.33	27.88	18.33	58.66	46.21	74.00	54.00	-15.34	-7.79
---										
4874	H	43.15	31.00	14.37	57.52	45.37	74.00	54.00	-16.48	-8.63
7311	H	38.05	25.96	18.33	56.38	44.29	74.00	54.00	-17.62	-9.71
---										

Other harmonics emissions are lower than 10dB below the allowable limit.

**Note:**

- (1) All Readings are Peak Value and AV.
- (2) Emission Level= Reading Level + Factor
- (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
- (4) Data of measurement within this frequency range shown “ --- ” in the table  
 above means the reading of emissions are attenuated more than 10dB  
 below the permissible limits.
- (5) Measurement uncertainty :  $\pm 3.7\text{dB}$ .
- (6) Horn antenna used for the emission over 1000MHz.

## 8. Antenna Application

### 8.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 8.2 Measurement Results

The antenna is FPC antenna (inside of the enclosure) and no consideration of replacement, and the best case gain of the antenna is 2.0dBi. So, the antenna is consider meet the requirement.

## 9. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Mar. 07, 2016	Mar. 07, 2017
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Apr. 25, 2016	Apr. 25, 2017
Positioning Controller	UC	UC 3000	N/A	0~360°, 1-4m	N/A	N/A
Color Monitor	SUNSPO	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 07, 2015	Nov. 06, 2016
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Mar. 07, 2016	Mar. 07, 2017
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Mar. 06, 2016	Mar. 05, 2017
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Mar. 07, 2016	Mar. 07, 2017
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.23, 2015	Oct.22, 2016
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Mar. 07, 2016	Mar. 07, 2017
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.10, 2015	Oct.09, 2016
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Mar. 07, 2016	Mar. 07, 2017
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Mar. 07, 2016	Mar. 07, 2017
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Nov. 05, 2015	Nov. 04, 2016
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Nov. 05, 2015	Nov. 04, 2016

---End---