



Valued Quality. Delivered.

**Issuing Laboratory:**

**Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## TEST REPORT

**Report No.: 15050260HKG-002R1**

**Royal Regent Products (H.K.) Limited**

Application  
For  
Certification  
(Original Grant)  
**(FCC ID: 2AES5-1504TDS03166R)**  
**(IC: 20291-031661504C )**

Transceiver

This report supersedes previous report with report number(s) 15050260HKG-002 dated June 03, 2015.

Prepared and Checked by:

Wong Kwok Yeung, Kenneth  
Lead Engineer

Approved by:

Chan Chi Hung, Terry  
Senior Supervisor  
Date: June 11, 2015

- Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.
- This report shall not be reproduced, except in full.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**GENERAL INFORMATION**

Grantee:	Royal Regent Products (H.K.) Limited
Grantee Address:	Flat C, 12/F., Ford Glory Plaza, 37-39 Wing Hong Street, Cheung Sha Wan Street, Kowloon, Hong Kong.
Contact Person:	Mr. Wong Kin On
Tel:	(852) 2425-0720
Fax:	(852) 2424-3407
e-mail:	kowong@royalregenthk.com
Manufacturer:	Royal Regent Products (H.K.) Limited
Manufacturer Address:	Flat C, 12/F., Ford Glory Plaza, 37-39 Wing Hong Street, Cheung Sha Wan Street, Kowloon, Hong Kong.
Brand Name:	Disney
FCC Model:	Disney PG14 PRR1504-TDS03166
IC Model:	03166Ca
Type of EUT:	Transceiver
Description of EUT:	Elsa Light Up Costume with Cape connected by 2.4GHz
Serial Number:	N/A
FCC ID / IC:	2AES5-1504TDS03166R / 20291-031661504C
Date of Sample Submitted:	May 05, 2015
Date of Test:	May 05, 2015 to June 03, 2015
Report No.:	15050260HKG-002(R1)
Report Date:	June 11, 2015
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

## Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**SUMMARY OF TEST RESULT**

TEST SPECIFICATION	REFERENCE	RESULTS
Radiated Emission	15.209 /	Pass
Radiated Emission on the Bandedge	RSS-210 A2.9	

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2014 Edition

RSS-210 Issue 8, December 2010

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.  
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

---

Report No.: 15050260HKG-002R1  
FCC ID: 2AES5-1504TDS03166R  
IC: 20291-031661504C

ii

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etslsemko.com](http://www.hk.intertek-etslsemko.com)

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## Table of Contents

<b>1.0</b>	<b><u>General Description</u></b>	1
1.1	Product Description	1
1.2	Related Submittal(s) Grants	1
1.3	Test Methodology	1
1.4	Test Facility	1
<b>2.0</b>	<b><u>System Test Configuration</u></b>	2
2.1	Justification	2
2.2	EUT Exercising Software	2
2.3	Special Accessories	2
2.4	Measurement Uncertainty	2
<b>3.0</b>	<b><u>Emission Results</u></b>	3
3.1	Field Strength Calculation	3
3.2	Radiated Emission Configuration Photograph	4
3.3	Radiated Emission Data	4
<b>4.0</b>	<b><u>Equipment Photographs</u></b>	8
<b>5.0</b>	<b><u>Product Labelling</u></b>	8
<b>6.0</b>	<b><u>Technical Specifications</u></b>	8
<b>7.0</b>	<b><u>Instruction Manual</u></b>	8
<b>8.0</b>	<b><u>Miscellaneous Information</u></b>	9
8.2	Discussion of Pulse Desensitization	10
8.3	Calculation of Average Factor	10
8.4	Emissions Test Procedures	12
8.5	Occupied Bandwidth	15
<b>9.0</b>	<b><u>Equipment List</u></b>	16

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 1.0 General Description

### 1.1 Product Description

The Equipment Under Test (EUT) is a 2.4GHz Transceiver (Cape Unit) for a Dress operating at 2420 to 2478MHz with 1MHz channel spacing. The EUT is powered by 3X 1.5V AAA batteries. After switch on the EUT, The LED in the Cape and Dress will be twinkling when the dress detected movement.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

The Certification procedure of transceiver (Dress) for this transceiver (with FCC ID: 2AES5-1504TDS03166T) is being processed as the same time of this application.

### 1.3 Test Methodology

Radiated emission measurements was performed according to the procedures in ANSI C63.4 (2009). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

### 1.4 Test Facility

The 3m Chamber used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC and IC.

**Issuing Laboratory:****Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**2.0 System Test Configuration****2.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by new 3 X 1.5V AAA batteries.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

**2.2 EUT Exercising Software**

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

**2.3 Special Accessories**

There are no special accessories necessary for compliance of this product.

**2.4 Measurement Uncertainty**

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### 3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where      FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where      FS = Field Strength in dB $\mu$ V/m

RR = RA - AG - AV in dB $\mu$ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

**Issuing Laboratory:****Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**3.2 Radiated Emission Configuration Photograph**

The worst case in radiated emission was found at 7434 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

**3.3 Radiated Emission Data**

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 19.7 dB

## Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Royal Regent Products (H.K.) Limited

Date of Test: June 03, 2015

FCC Model: Disney PG14 PRR1504-TDS03166, IC Model: 03166Ca

Worst-Case Operating Mode: Transmission (Cape)

**Table 1**  
**Radiated Emissions**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 A2.9 Requirement**

## Lowest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2420.000	65.8	33	29.4	62.2	45	17.2	94.0	-76.8
H	2400.000	56.0	33	29.4	52.4	45	7.4	54.0	-46.6
<b>H</b>	<b>4840.000</b>	<b>50.4</b>	<b>33</b>	<b>34.9</b>	<b>52.3</b>	<b>45</b>	<b>7.3</b>	<b>54.0</b>	<b>-46.7</b>
<b>H</b>	<b>7260.000</b>	<b>48.7</b>	<b>33</b>	<b>37.9</b>	<b>53.6</b>	<b>45</b>	<b>8.6</b>	<b>54.0</b>	<b>-45.4</b>
H	9680.000	45.3	33	40.4	52.7	45	7.7	54.0	-46.3
<b>H</b>	<b>12100.000</b>	<b>45.9</b>	<b>33</b>	<b>40.5</b>	<b>53.4</b>	<b>45</b>	<b>8.4</b>	<b>54.0</b>	<b>-45.6</b>
H	14520.000	48.4	33	38.4	53.8	45	8.8	54.0	-45.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2420.000	65.8	33	29.4	62.2	114.0	-51.8
H	2400.000	56.0	33	29.4	52.4	74.0	-21.6
<b>H</b>	<b>4840.000</b>	<b>50.4</b>	<b>33</b>	<b>34.9</b>	<b>52.3</b>	<b>74.0</b>	<b>-21.7</b>
<b>H</b>	<b>7260.000</b>	<b>48.7</b>	<b>33</b>	<b>37.9</b>	<b>53.6</b>	<b>74.0</b>	<b>-20.4</b>
H	9680.000	45.3	33	40.4	52.7	74.0	-21.3
<b>H</b>	<b>12100.000</b>	<b>45.9</b>	<b>33</b>	<b>40.5</b>	<b>53.4</b>	<b>74.0</b>	<b>-20.6</b>
H	14520.000	48.4	33	38.4	53.8	74.0	-20.2

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Royal Regent Products (H.K.) Limited

Date of Test: June 03, 2015

FCC Model: Disney PG14 PRR1504-TDS03166, IC Model: 03166Ca

Worst-Case Operating Mode: Transmission (Cape)

**Table 2**  
**Radiated Emissions**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 A2.9 Requirement**

## Middle Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2449.000	65.9	33	29.4	62.3	45	17.3	94.0	-76.7
<b>H</b>	<b>4898.000</b>	<b>50.7</b>	<b>33</b>	<b>34.9</b>	<b>52.6</b>	<b>45</b>	<b>7.6</b>	<b>54.0</b>	<b>-46.4</b>
<b>H</b>	<b>7347.000</b>	<b>48.5</b>	<b>33</b>	<b>37.9</b>	<b>53.4</b>	<b>45</b>	<b>8.4</b>	<b>54.0</b>	<b>-45.6</b>
H	9796.000	45.8	33	40.4	53.2	45	8.2	54.0	-45.8
<b>H</b>	<b>12245.000</b>	<b>45.4</b>	<b>33</b>	<b>40.5</b>	<b>52.9</b>	<b>45</b>	<b>7.9</b>	<b>54.0</b>	<b>-46.1</b>
H	14694.000	48.3	33	38.4	53.7	45	8.7	54.0	-45.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2449.000	65.9	33	29.4	62.3	114.0	-51.7
<b>H</b>	<b>4898.000</b>	<b>50.7</b>	<b>33</b>	<b>34.9</b>	<b>52.6</b>	<b>74.0</b>	<b>-21.4</b>
<b>H</b>	<b>7347.000</b>	<b>48.5</b>	<b>33</b>	<b>37.9</b>	<b>53.4</b>	<b>74.0</b>	<b>-20.6</b>
H	9796.000	45.8	33	40.4	53.2	74.0	-20.8
<b>H</b>	<b>12245.000</b>	<b>45.4</b>	<b>33</b>	<b>40.5</b>	<b>52.9</b>	<b>74.0</b>	<b>-21.1</b>
H	14694.000	48.3	33	38.4	53.7	74.0	-20.3

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Royal Regent Products (H.K.) Limited

Date of Test: June 03, 2015

FCC Model: Disney PG14 PRR1504-TDS03166, IC Model: 03166Ca

Worst-Case Operating Mode: Transmission (Cape)

**Table 2**  
**Radiated Emissions**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 A2.9 Requirement**

## Highest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2478.000	66.0	33	29.4	62.4	45	17.4	94.0	-76.6
<b>H</b>	<b>2483.500</b>	<b>56.4</b>	<b>33</b>	<b>29.4</b>	<b>52.8</b>	<b>45</b>	<b>7.8</b>	<b>54.0</b>	<b>-46.2</b>
<b>H</b>	<b>4956.000</b>	<b>50.4</b>	<b>33</b>	<b>34.9</b>	<b>52.3</b>	<b>45</b>	<b>7.3</b>	<b>54.0</b>	<b>-46.7</b>
<b>H</b>	<b>7434.000</b>	<b>49.4</b>	<b>33</b>	<b>37.9</b>	<b>54.3</b>	<b>45</b>	<b>9.3</b>	<b>54.0</b>	<b>-44.7</b>
H	9912.000	46.2	33	40.4	53.6	45	8.6	54.0	-45.4
<b>H</b>	<b>12390.000</b>	<b>45.9</b>	<b>33</b>	<b>40.5</b>	<b>53.4</b>	<b>45</b>	<b>8.4</b>	<b>54.0</b>	<b>-45.6</b>
H	14868.000	48.6	33	38.4	54.0	45	9.0	54.0	-45.0

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2478.000	66.0	33	29.4	62.4	114.0	-51.6
<b>H</b>	<b>2483.500</b>	<b>56.4</b>	<b>33</b>	<b>29.4</b>	<b>52.8</b>	<b>74.0</b>	<b>-21.2</b>
<b>H</b>	<b>4956.000</b>	<b>50.4</b>	<b>33</b>	<b>34.9</b>	<b>52.3</b>	<b>74.0</b>	<b>-21.7</b>
<b>H</b>	<b>7434.000</b>	<b>49.4</b>	<b>33</b>	<b>37.9</b>	<b>54.3</b>	<b>74.0</b>	<b>-19.7</b>
H	9912.000	46.2	33	40.4	53.6	74.0	-20.4
<b>H</b>	<b>12390.000</b>	<b>45.9</b>	<b>33</b>	<b>40.5</b>	<b>53.4</b>	<b>74.0</b>	<b>-20.6</b>
H	14868.000	48.6	33	38.4	54.0	74.0	-20.0

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 4.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

## 5.0 Product Labelling

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

## 6.0 Technical Specifications

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

## 7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

**Issuing Laboratory:****Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**8.0 Miscellaneous Information**

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).

**8.1 Radiated Emission on the Bandedge**

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

**Lower bandedge**

The test data of lower bandedge emission is shown on above table 1 of page 5.

**Upper bandedge emission**

The test data of upper bandedge emission is shown on above table 3 of page 7.

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB $\mu$ V/m (Peak Limit) and 54 dB $\mu$ V/m (Average Limit).

**Issuing Laboratory:****Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**8.2 Discussion of Pulse Desensitization**

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 0.14ms for a digital “1” bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

**8.3 Calculation of Average Factor**

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 0.14ms

Effective period of the cycle =  $4 \times 0.14 = 0.56\text{ms}$

DC =  $0.56/100 = 0.0056$



Therefore, the averaging factor is found by  $20\log 0.0056 = -45.0\text{dB}$ .

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### Average Factor

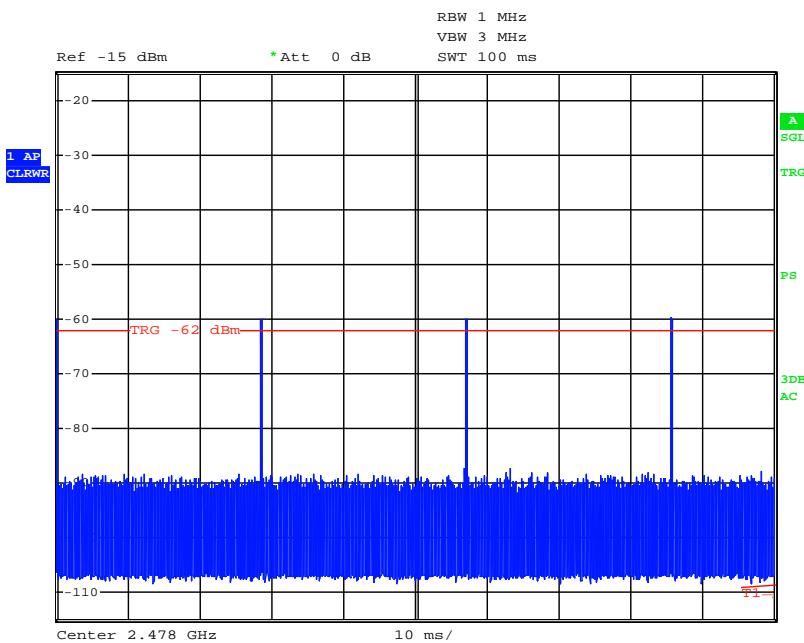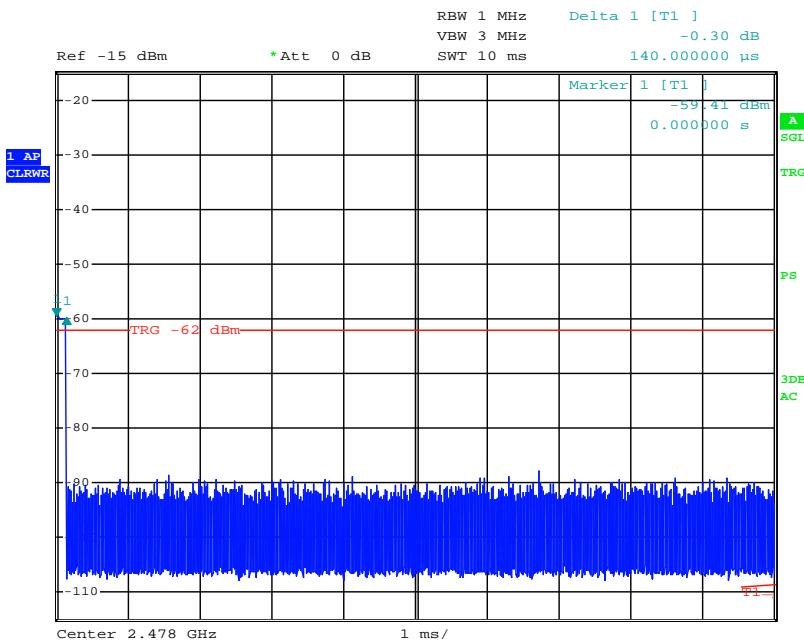

**Issuing Laboratory:****Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**8.4 Emissions Test Procedures**

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

**Issuing Laboratory:****Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**8.4 Emissions Test Procedures (cont'd)**

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.4 (2009).

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

Issuing Laboratory:


Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

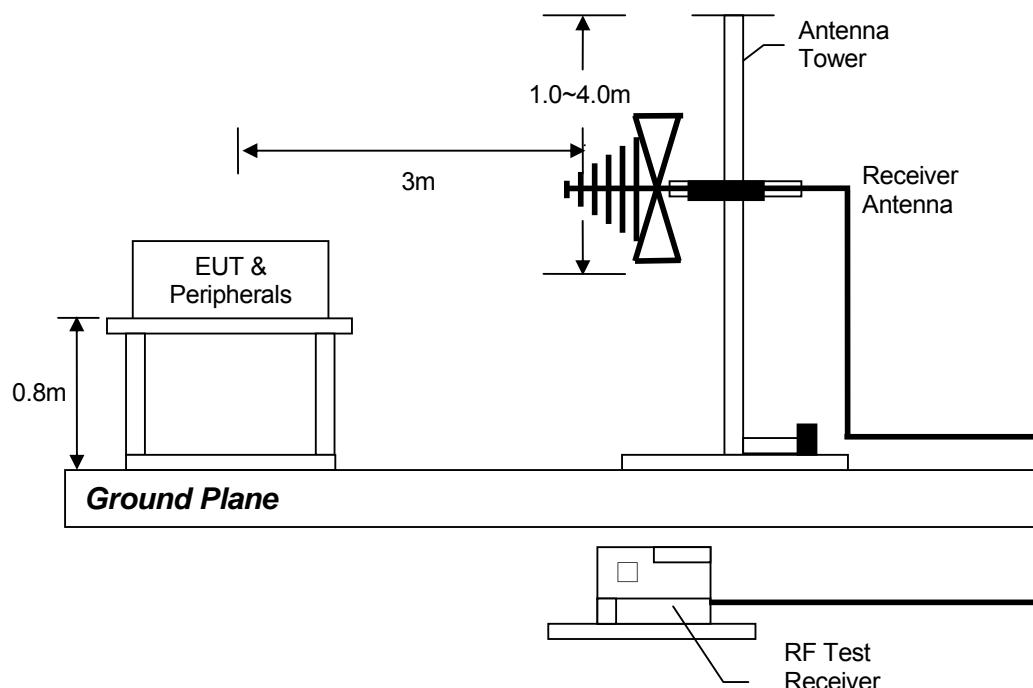

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HOKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




## 8.5 Occupied Bandwidth

### Occupied Bandwidth Results:

Bluetooth	Occupied Bandwidth (MHz)
Low Channel: 2420	2.328
Middle Channel: 2449	2.364
High Channel: 2478	2.148

The worst case is shown as below:

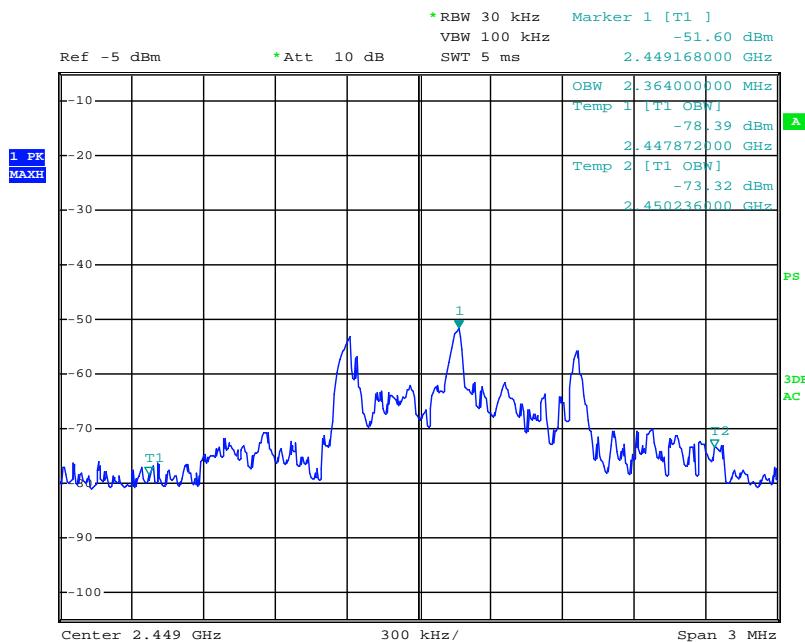

## Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**9.0 Equipment List**

## 1) Radiated Emissions Test

Equipment	Spectrum Analyzer	EMI Test Receiver	BiConiLog Antenna
Registration No.	EW-2466	EW-3095	EW-3061
Manufacturer	R&S	R&S	EMCO
Model No.	FSP30	ESCI	3412E
Calibration Date	Sep. 02, 2014	Oct. 16, 2014	Jul. 17, 2014
Calibration Due Date	Sep. 02, 2015	Oct. 16, 2015	Jul. 17, 2015

Equipment	Double Ridged Guide Antenna (1GHz - 18GHz)
Registration No.	EW-1133
Manufacturer	EMCO
Model No.	3115
Calibration Date	Apr. 30, 2014
Calibration Due Date	Oct 30, 2015

## 2) Average Factor Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2329
Manufacturer	R&S
Model No.	FSP3
Calibration Date	Jun. 19, 2014
Calibration Due Date	Jun. 19, 2015

**END OF TEST REPORT**