

# TEST REPORT

**Product Name** : Air Cleaner  
**Model Number** : 7411371000, 7412371000,  
                  7413352000  
**FCC ID** : 2AEX3-74XX

Prepared for : Blueair AB  
Address : Karlavägen 108, 115 26, Stockholm, Sweden

Prepared by : EMTEK (SHENZHEN) CO., LTD.  
Address : Building 69, Majialong Industry Zone, Nanshan District,  
                  Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

Report Number : ES200527035W  
Date(s) of Tests : Jun. 12, 2020 to Jun. 29, 2020  
Date of issue : Jun. 29, 2020

## Table of Contents

<b>TEST REPORT .....</b>	<b>1</b>
<b>TEL: (0755) 26954280 .....</b>	<b>1</b>
<b>1 EUT TECHNICAL DESCRIPTION .....</b>	<b>4</b>
<b>2 SUMMARY OF TEST RESULT .....</b>	<b>5</b>
<b>3 TEST METHODOLOGY .....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	6
3.2 MEASUREMENT EQUIPMENT USED .....	6
3.3 DESCRIPTION OF TEST MODES .....	7
<b>4 FACILITIES AND ACCREDITATIONS .....</b>	<b>8</b>
4.1 FACILITIES .....	8
4.2 LABORATORY ACCREDITATIONS AND LISTINGS .....	8
<b>5 TEST SYSTEM UNCERTAINTY .....</b>	<b>9</b>
<b>6 SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>10</b>
6.1 RADIO FREQUENCY TEST SETUP 1 .....	10
6.2 RADIO FREQUENCY TEST SETUP 2 .....	10
6.3 CONDUCTED EMISSION TEST SETUP .....	11
6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM .....	12
6.5 SUPPORT EQUIPMENT .....	12
<b>7 TEST REQUIREMENTS .....</b>	<b>13</b>
7.1 OCCUPIED BANDWIDTH .....	13
7.2 FREQUENCY STABILITY .....	15
7.3 RADIATED SPURIOUS EMISSION .....	17
7.4 CONDUCTED EMISSION TEST .....	30
<b>8 ANTENNA APPLICATION .....</b>	<b>33</b>
8.2 RESULT .....	33

## TEST RESULT CERTIFICATION

Applicant : Blueair AB  
 Address : Karlavägen 108, 115 26, Stockholm, Sweden  
 Manufacturer : Blueair AB  
 Address : Karlavägen 108, 115 26, Stockholm, Sweden  
 EUT : Air Cleaner  
 Model Name : 7411371000, 7412371000, 7413352000  
 Trademark : Blueair


Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J	PASS
FCC 47 CFR Part 15, Subpart C	

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.225.

The test results of this report relate only to the tested sample identified in this report.


Date of Test : Jun. 12, 2020 to Jun. 29, 2020



Qiang Wang /Editor

Prepared by :

Joe Xia /Supervisor



Reviewer :

Joe Xia /Supervisor

Approve & Authorized Signer :

Lisa Wang/Manager



## 1 EUT TECHNICAL DESCRIPTION

Characteristics	Description
<b>Device Type:</b>	RFID
<b>Modulation:</b>	ASK modulation
<b>Operating Frequency Range(s):</b>	13.553-13.567MHz
<b>Channel Frequency:</b>	13.56MHz
<b>Number of Channels:</b>	1 channel
<b>Antenna Type :</b>	Induction coil antenna
<b>Power supply:</b>	AC 120V
<b>Temperature Range</b>	-20°C ~ +50°C

**Note:** for more details, please refer to the User's manual of the EUT.

## 2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
2.1049	Occupied Bandwidth	PASS	
15.225(e)	Frequency stability	PASS	
15.225(d) 15.209	Radiated Spurious Emissions	PASS	
15.207	Conducted Emission	PASS	
NOTE1: N/A (Not Applicable)			

### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AEX3-74XX filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.



### 3 TEST METHODOLOGY

#### 3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:  
 FCC 47 CFR Part 2, Subpart J  
 FCC 47 CFR Part 15, Subpart C

#### 3.2 MEASUREMENT EQUIPMENT USED

##### 3.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	Due. CAL
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2020	05/16/2021
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/17/2020	05/16/2021
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	N/A

##### 3.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	Due. CAL
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/17/2020	05/16/2021
Pre-Amplifier	HP	8447D	2944A07999	05/17/2020	05/16/2021
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2020	05/16/2021
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2020	05/16/2021
Cable	Schwarzbeck	AK9513	ACRX1	05/17/2020	05/16/2021
Cable	Rosenberger	N/A	FP2RX2	05/17/2020	05/16/2021
Cable	Schwarzbeck	AK9513	CRPX1	05/17/2020	05/16/2021
Cable	Schwarzbeck	AK9513	CRRX2	05/17/2020	05/16/2021

##### 3.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	Due. CAL
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2020	05/16/2021
Signal Analyzer	Agilent	N9010A	My53470879	05/17/2020	05/16/2021
Power meter	Anritsu	ML2495A	0824006	05/17/2020	05/16/2021
Power sensor	Anritsu	MA2411B	0738172	05/17/2020	05/16/2021

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### 3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application. The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting mode is programmed.



## 4 FACILITIES AND ACCREDITATIONS

### 4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### 4.2 LABORATORY ACCREDITATIONS AND LISTINGS

#### Site Description

EMC Lab.

: Accredited by CNAS, 2018.11.30  
The certificate is valid until 2022.10.28  
The Laboratory has been assessed and proved to be in compliance  
with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)  
The Certificate Registration Number is L2291

Accredited by FCC, August 09, 2018  
Designation Number: CN1204  
Test Firm Registration Number: 882943  
Accredited by A2LA, August 08, 2018  
The Certificate Registration Number is 4321.01

Accredited by Industry Canada, November 09, 2018  
The Certificate Registration Number is CN0008

Name of Firm

Site Location

: EMTEK(SHENZHEN) CO., LTD.  
: Building 69, Majialong Industry Zone,  
Nanshan District, Shenzhen, Guangdong, China

## 5 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%



## 6 SETUP OF EQUIPMENT UNDER TEST

### 6.1 RADIO FREQUENCY TEST SETUP 1

The component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 6.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.


#### Below 30MHz:

The EUT is placed on a turntable 0.1 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


#### Above 30MHz:

The EUT is placed on a turntable 0.1 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

#### (a) Radiated Emission Test Set-Up, Frequency Below 30MHz

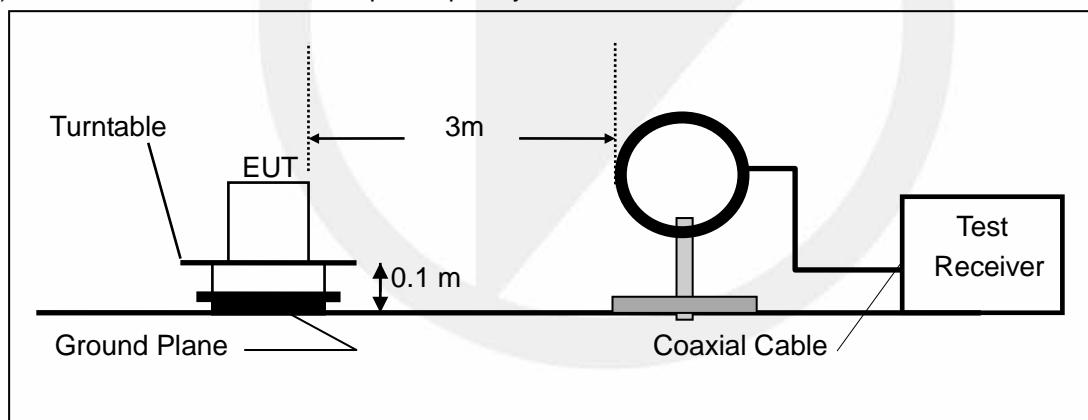

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

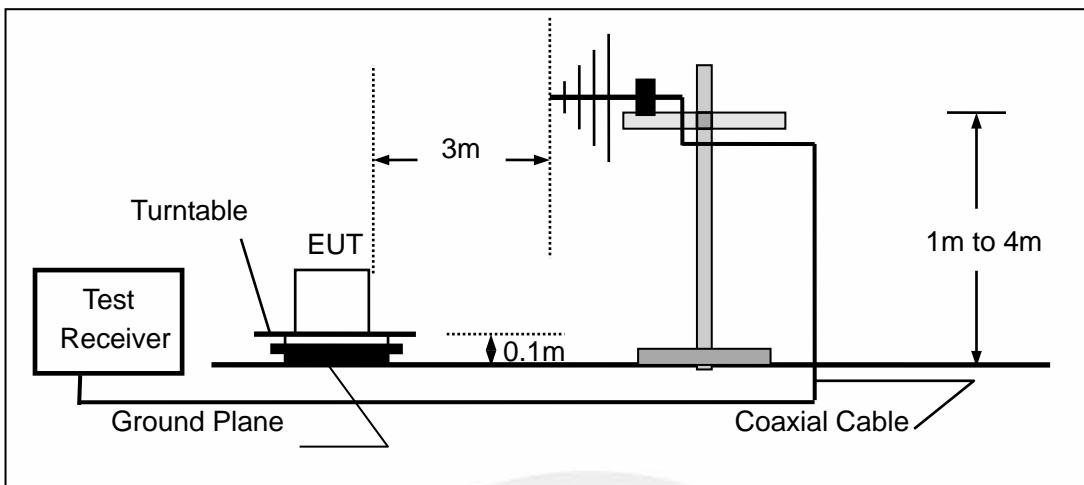


### 6.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.1 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

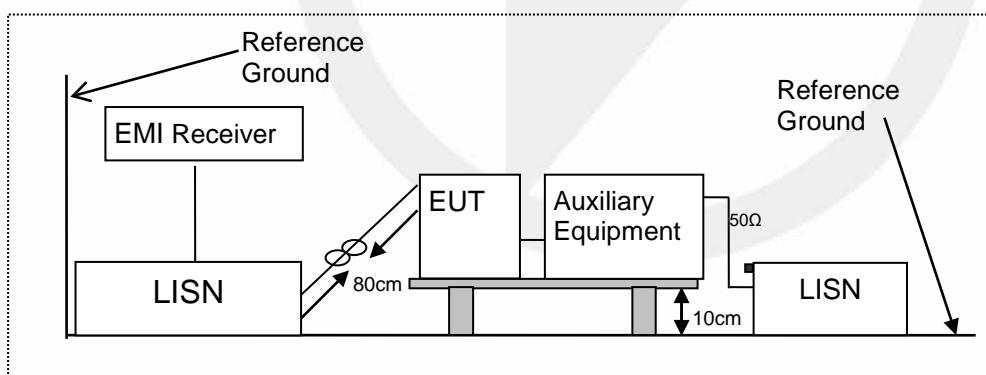

#### 6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

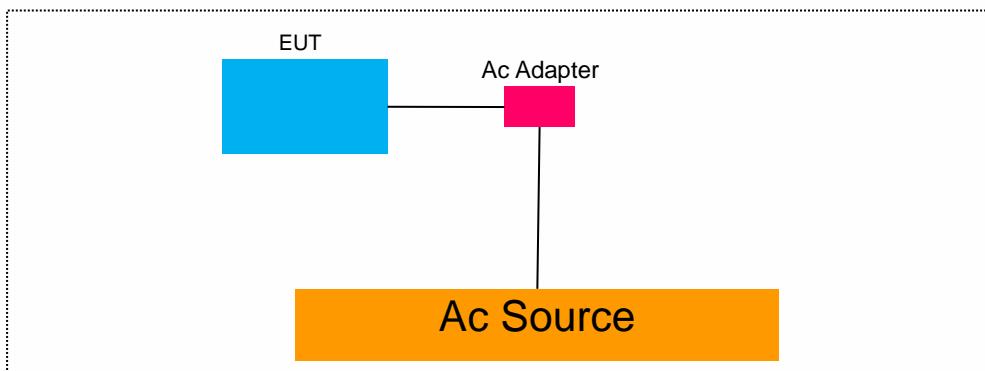

#### 6.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

##### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. Unless otherwise denoted as EUT in **『Remark』** column , device(s) used in tested system is a support equipment

## 7 TEST REQUIREMENTS

### 7.1 OCCUPIED BANDWIDTH

#### 7.1.1 Applicable Standard

According to FCC Part 2.1049

#### 7.1.2 Conformance Limit

No limit requirement.

#### 7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

#### 7.1.4 Test Procedure

The EUT was operating in transmit mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1% occupied bandwidth (30Hz).

Set the video bandwidth (VBW) =3 times RBW .

Set Span= approximately 2 to 3 times the occupied bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

#### 7.1.5 Test Results

Temperature :	25°C	Test Date :			
Humidity :	65 %	Test By:	XW		
Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (KHz)	Limit (kHz)	Verdict
ASK	0	13.56	0.339	N/A	PASS
Note: N/A (Not Applicable)					

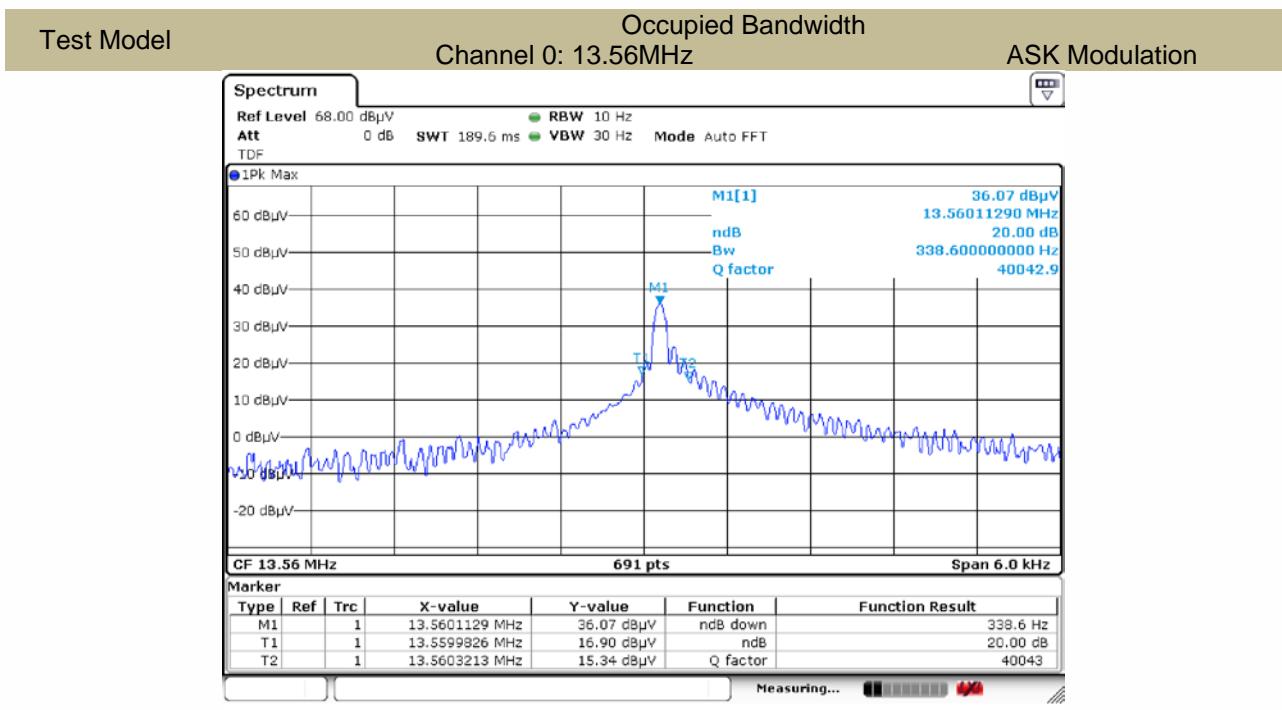

## 7.2 FREQUENCY STABILITY

### 7.2.1 Applicable Standard

According to FCC Part 2.1055

### 7.2.2 Conformance Limit

According to part 15.225(e), The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 7.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

### 7.2.4 Test Procedures

Connect the EUT to frequency analyzer via the antenna connector.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

### 7.2.5 Test Results

Operation Mode	Channel Number	Test Condition		Channel Frequency (MHz)	Freq.Dev. (Hz)	Deviation (ppm)	Limit (ppm)
		Voltage (V)	Temp (°C)				
ASK	CH0	Vnom	-20	13.561001	1001	73.83	100
			-10	13.561035	1035	76.32	100
			0	13.561036	1036	76.40	100
			10	13.561042	1042	76.81	100
			20	13.561033	1033	76.20	100
			30	13.561042	1042	76.84	100
			40	13.561037	1037	76.45	100
			50	13.561038	1038	76.58	100
		85% Vnom	20	13.561041	1041	76.78	100
		115% Vnom	20	13.561036	1036	76.43	100
VERDICT				PASS			

### 7.3 RADIATED SPURIOUS EMISSION

#### 7.3.1 Applicable Standard

According to FCC Part 15.225 and 15.209

#### 7.3.2 Conformance Limit

Field Strength of Fundamental Emissions and Spectrum Mask					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
<b>Fundamental</b>	15848	84.0	103.1	<b>124.0</b>	143.1
Quasi peak measurement of the fundamental.					

Spectrum Mask					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	<b>69.5</b>	88.6
13.110~13.410	106	40.5	59.6	<b>80.5</b>	99.6
13.410~13.553	334	50.5	69.6	<b>90.5</b>	109.6
13.553~13.567	15848	84.0	103.1	<b>124.0</b>	143.1
13.567~13.710	334	50.5	69.6	<b>90.5</b>	109.6
13.710~14.010	106	40.5	59.6	<b>80.5</b>	99.6
14.010~30.000	30	29.5	48.6	<b>69.5</b>	88.6

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	48.5 - 13.8	300
0.490-1.705	24000/F(KHz)	33.8 – 23.0	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### 7.3.3 Test Configuration

Test according to clause 6.2 radio frequency test setup 2

### 7.3.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.1m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for  $f < 1$  GHz(30MHz to 1GHz), 200Hz for  $f < 150$  KHz(9KHz to 150KHz), 9KHz for  $f < 30$  MHz(150KHz to 30KHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak


Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.


Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data. Repeat above procedures until all frequency measured was complete.

### 7.3.5 Test Results

■ Field Strength of Fundamental Emissions and Spectrum Mask

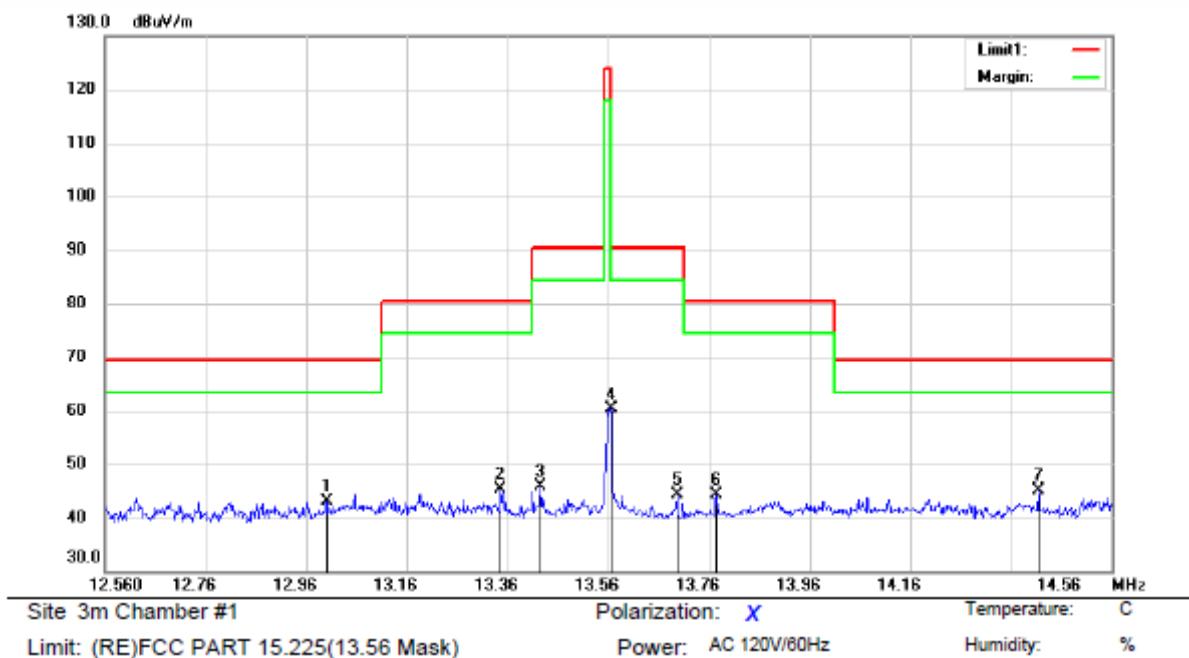


No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna Height cm	Table Degree	Comment
			Level dBuV	Factor dB	ment dBuV/m					
1		13.0000	53.36	-10.26	43.10	69.50	-26.40	QP		
2		13.3460	55.71	-10.30	45.41	80.50	-35.09	QP		
3		13.4240	56.25	-10.31	45.94	90.50	-44.56	QP		
4		13.5660	70.77	-10.33	60.44	124.00	-63.56	QP		
5		13.6960	54.70	-10.34	44.36	90.50	-46.14	QP		
6		13.7740	54.68	-10.35	44.33	80.50	-36.17	QP		
7	*	14.4140	55.58	-10.42	45.16	69.50	-24.34	QP		

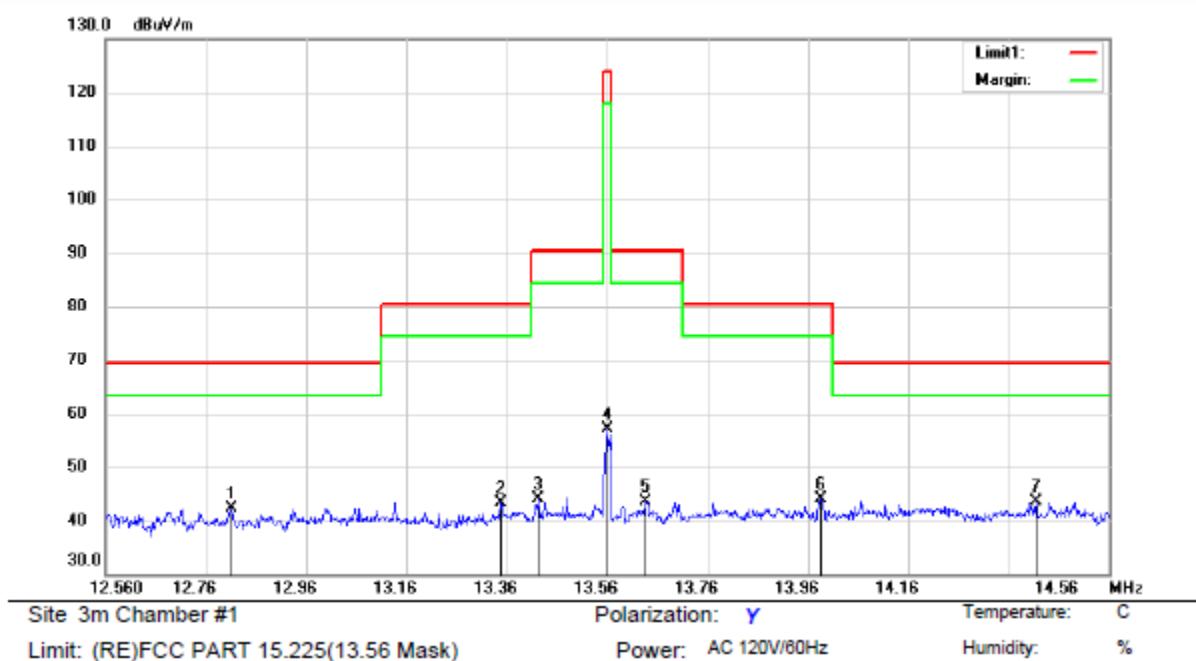

Mode: 13.56MHz

Note:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		12.8120	52.56	-10.24	42.32	69.50	-27.18	QP		
2		13.3480	53.56	-10.30	43.26	80.50	-37.24	QP		
3		13.4220	54.34	-10.31	44.03	90.50	-46.47	QP		
4		13.5600	67.55	-10.33	57.22	124.00	-66.78	QP		
5		13.6360	53.88	-10.34	43.54	90.50	-46.96	QP		
6		13.9840	54.62	-10.38	44.24	80.50	-36.26	QP		
7	*	14.4140	54.00	-10.42	43.58	69.50	-25.92	QP		

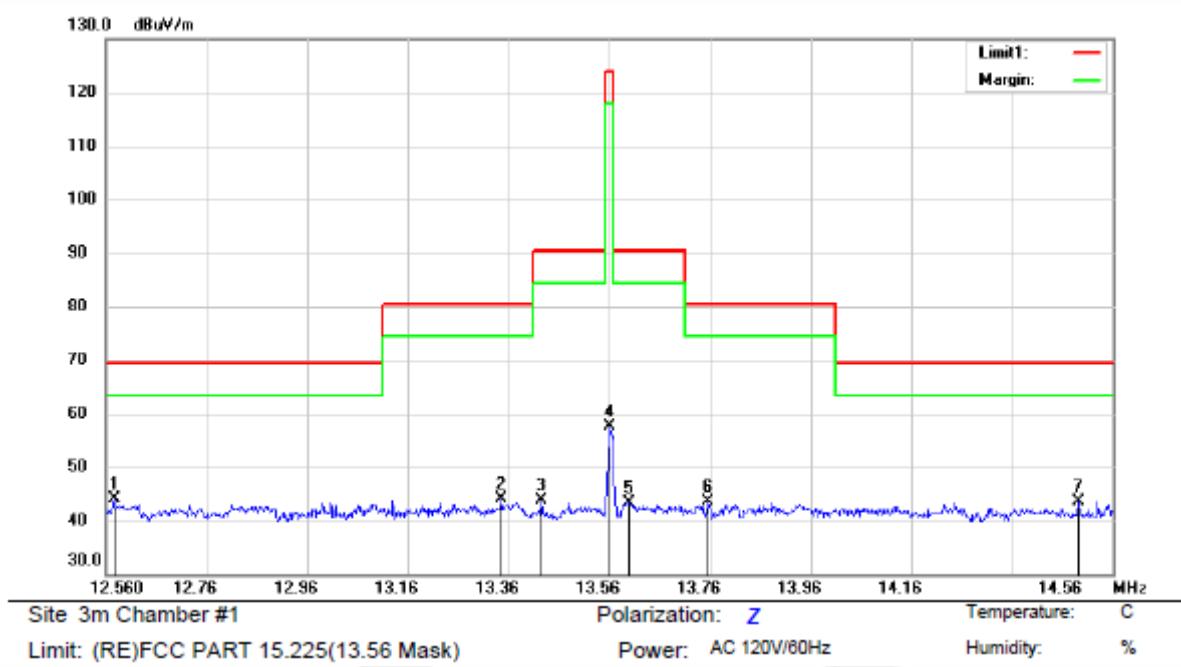

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	12.5760	54.25	-10.21	44.04	69.50	-25.46	QP			
2		13.3460	54.44	-10.30	44.14	80.50	-36.36	QP			
3		13.4260	54.19	-10.31	43.88	90.50	-46.62	QP			
4		13.5620	68.06	-10.33	57.73	124.00	-66.27	QP			
5		13.5980	53.80	-10.33	43.47	90.50	-47.03	QP			
6		13.7560	54.03	-10.35	43.68	80.50	-36.82	QP			
7		14.4920	54.11	-10.43	43.68	69.50	-25.82	QP			

■ Spurious Emission below 150kHz (9KHz to 150kHz)

All mode have been tested, and the worst result was report as below:

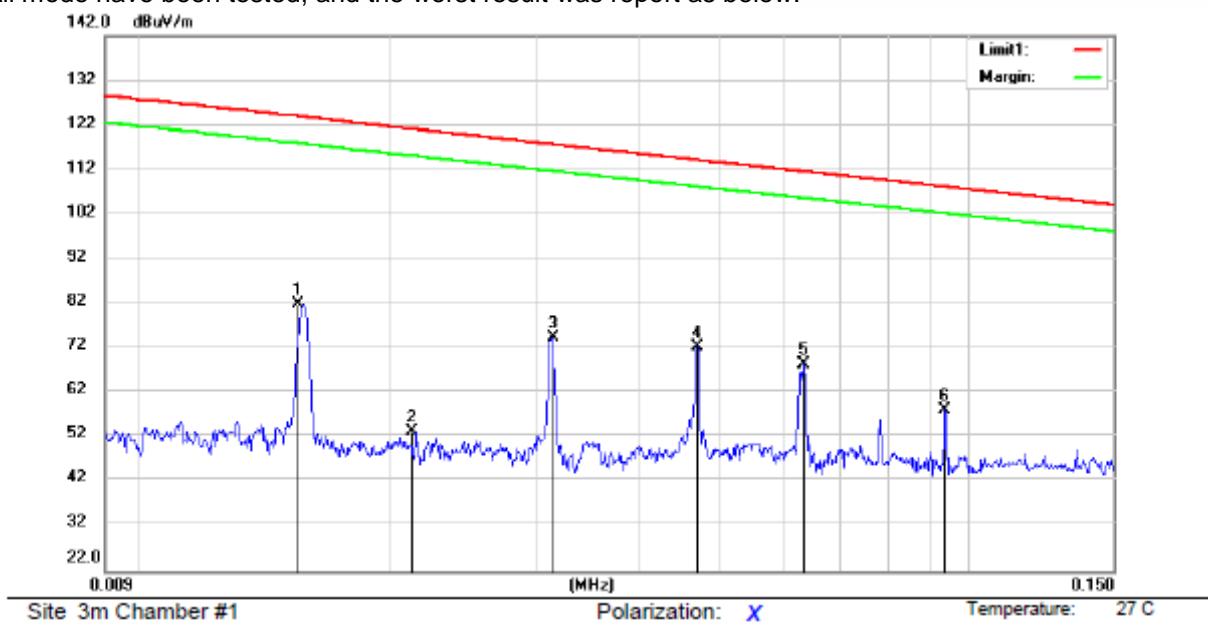

Site 3m Chamber #1

Polarization:

Temperature: 27 C

Limit: (RE)FCC PART 15.209(9K-30M)


Power: AC 120V/60Hz


Humidity: 43 %

Mode:13.56MHz


Note:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		0.0154	61.21	20.74	81.95	123.84	-41.89	QP			
2		0.0212	32.60	20.67	53.27	121.06	-67.79	QP			
3		0.0313	53.36	20.84	74.20	117.68	-43.48	QP			
4	*	0.0470	51.17	21.10	72.27	114.15	-41.88	QP			
5		0.0630	47.51	20.73	68.24	111.61	-43.37	QP			
6		0.0937	37.43	20.72	58.15	108.16	-50.01	QP			

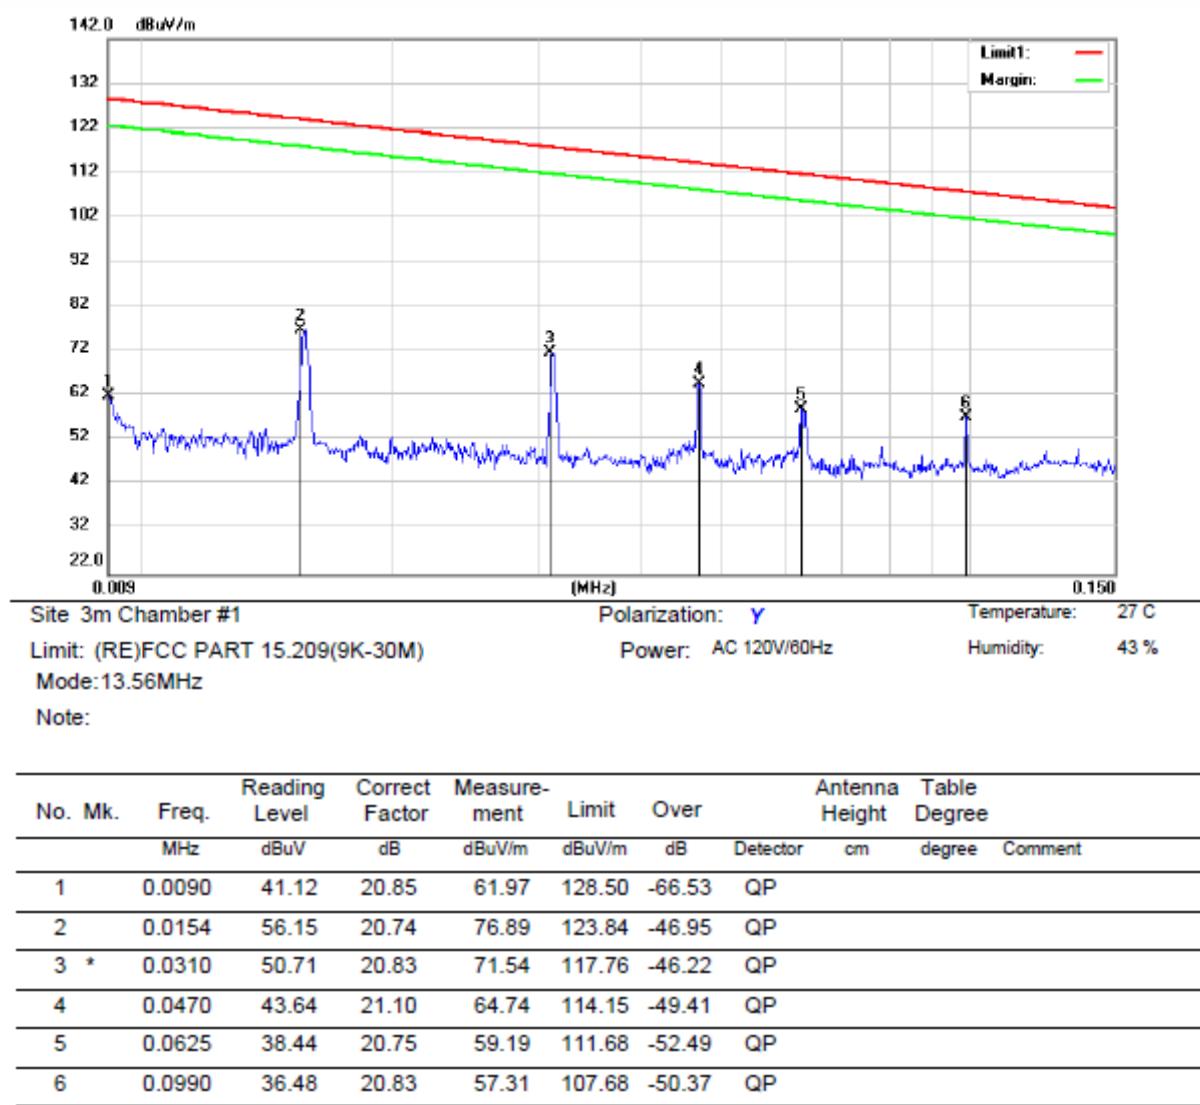

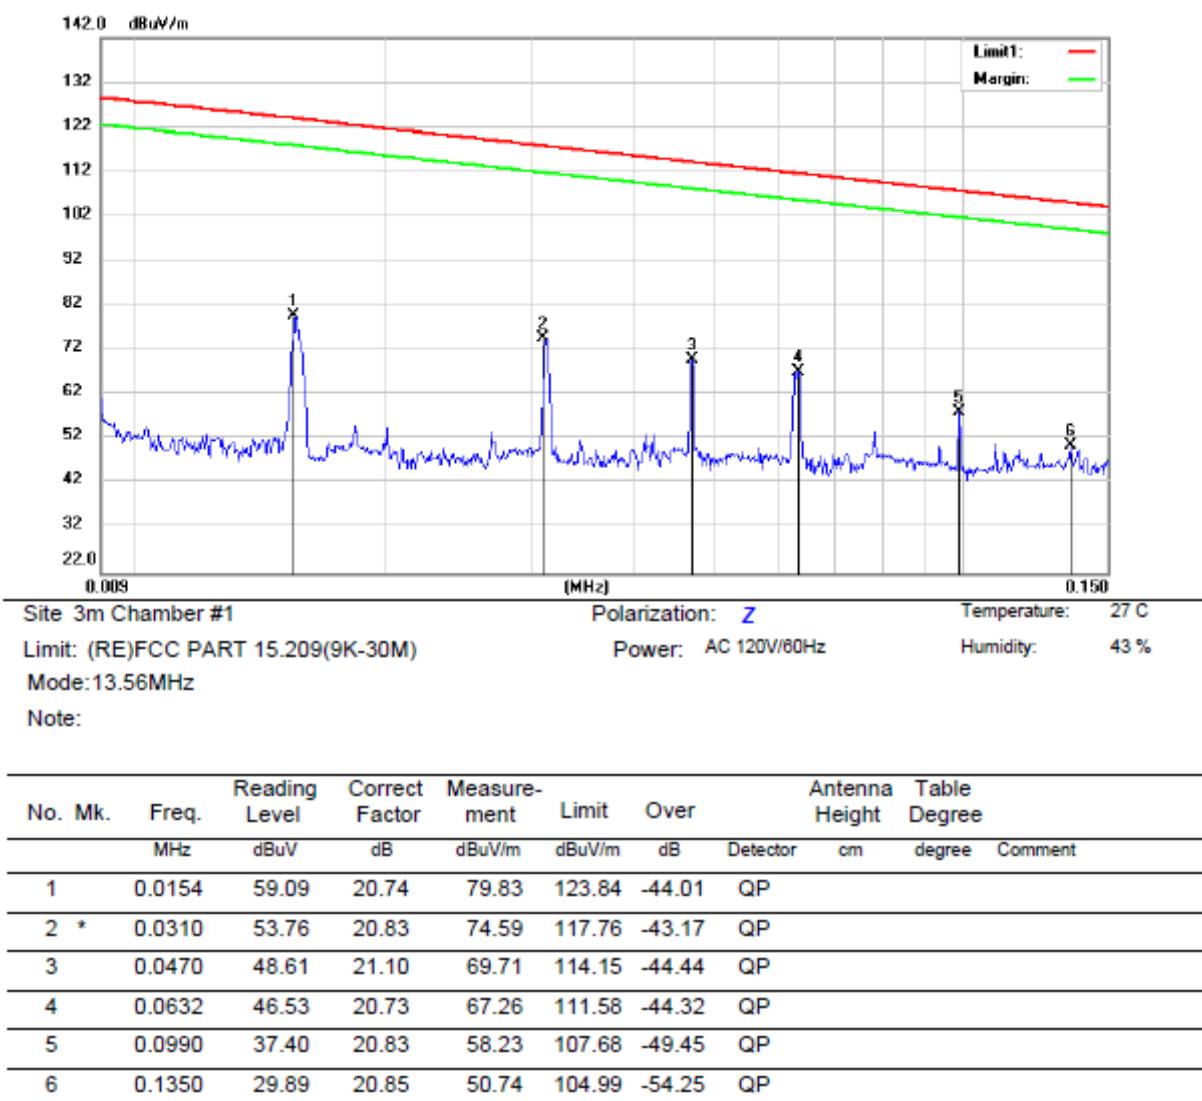


■ Spurious Emission below 30MHz (150KHz to 30MHz)  
 All mode have been tested, and the worst result was report as below:

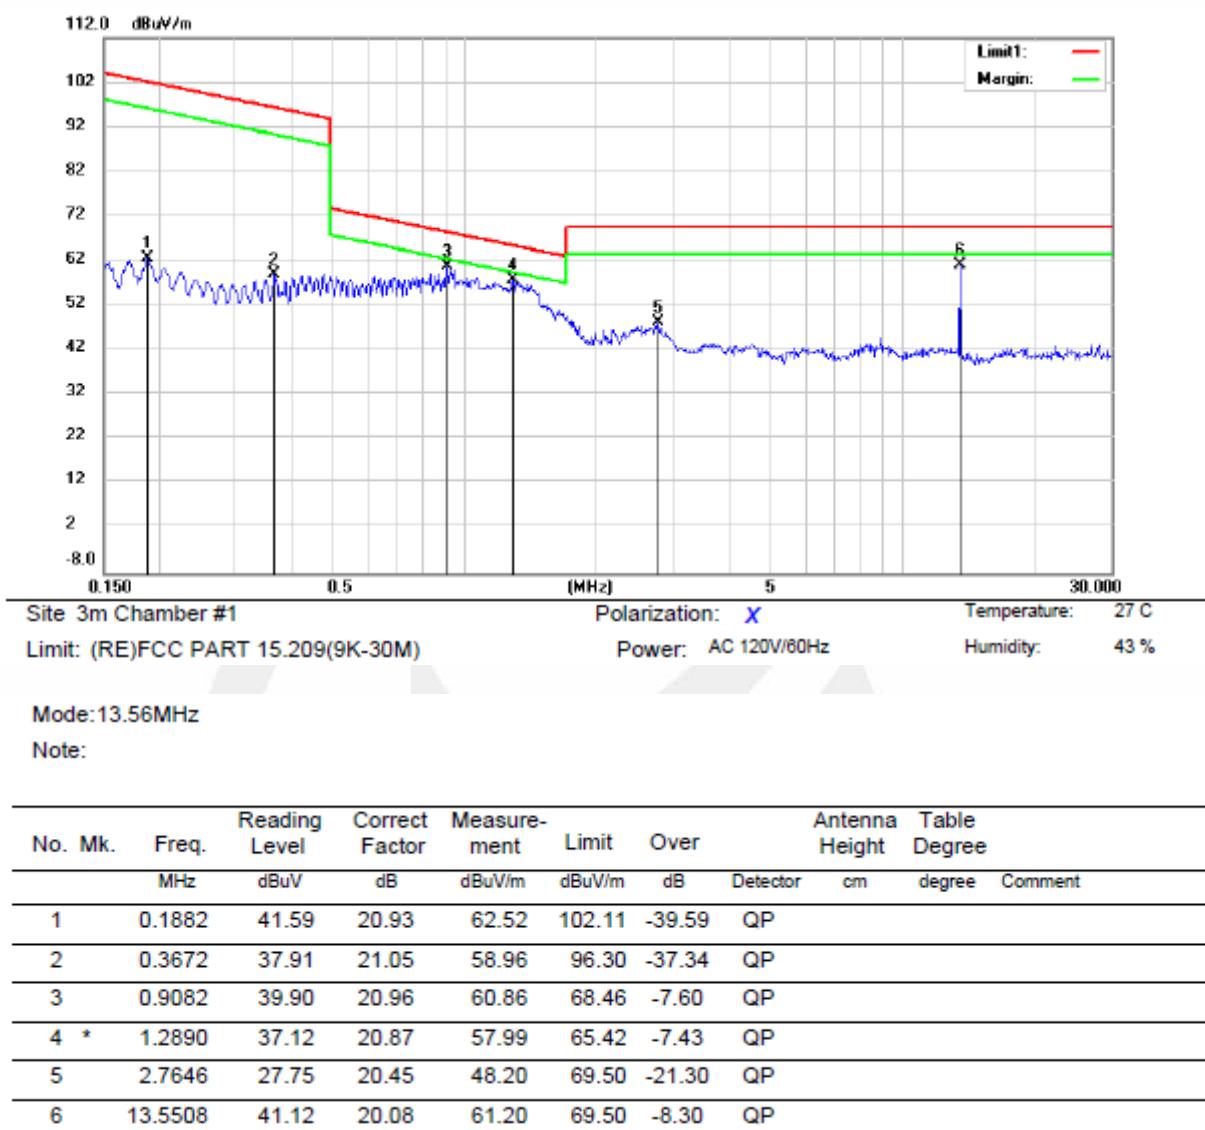


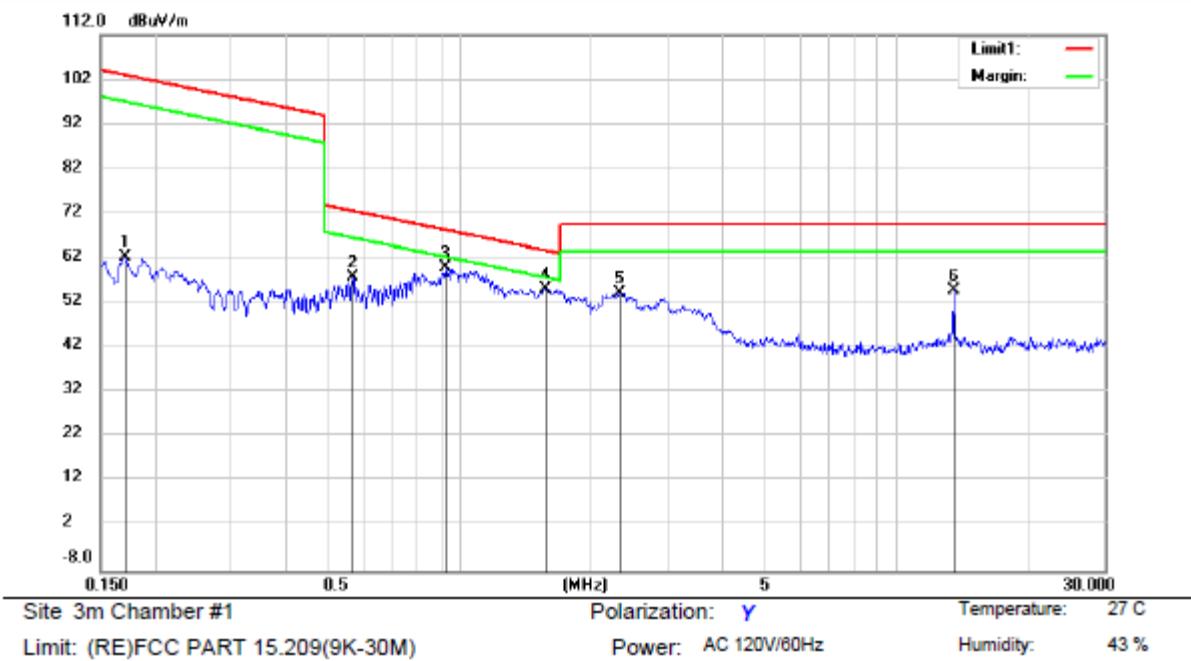


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		0.1703	41.43	20.89	62.32	102.97	-40.65	QP		
2		0.5670	36.95	21.03	57.98	72.54	-14.56	QP		
3	*	0.9233	38.88	20.96	59.84	68.31	-8.47	QP		
4		1.5683	34.40	20.80	55.20	63.72	-8.52	QP		
5		2.3090	33.71	20.58	54.29	69.50	-15.21	QP		
6		13.5508	34.62	20.08	54.70	69.50	-14.80	QP		

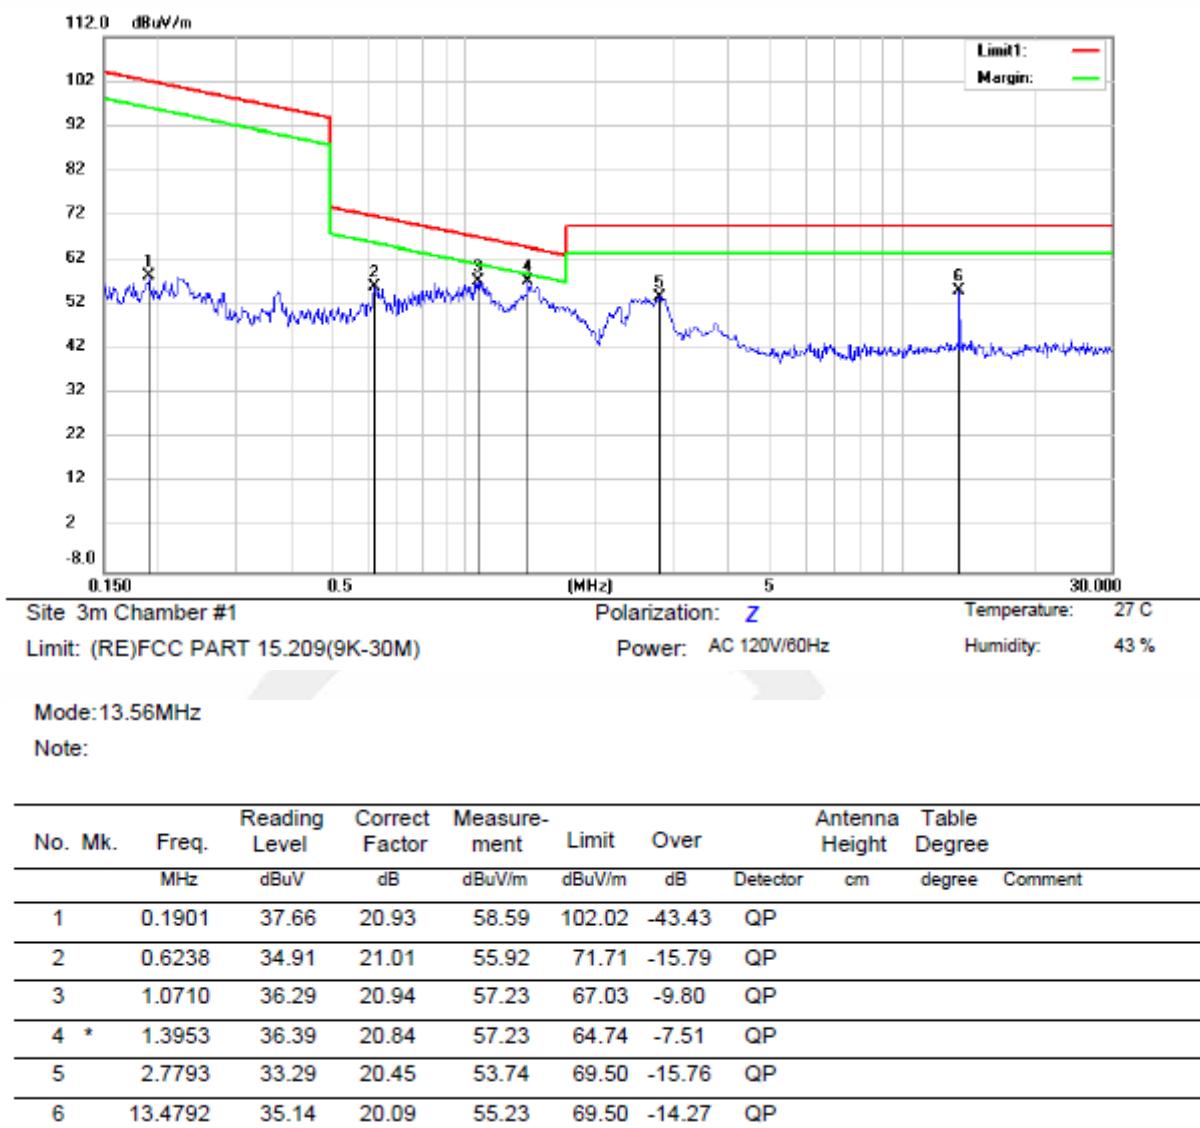

■ Spurious Emission Above 30MHz (30MHz to 1GHz)

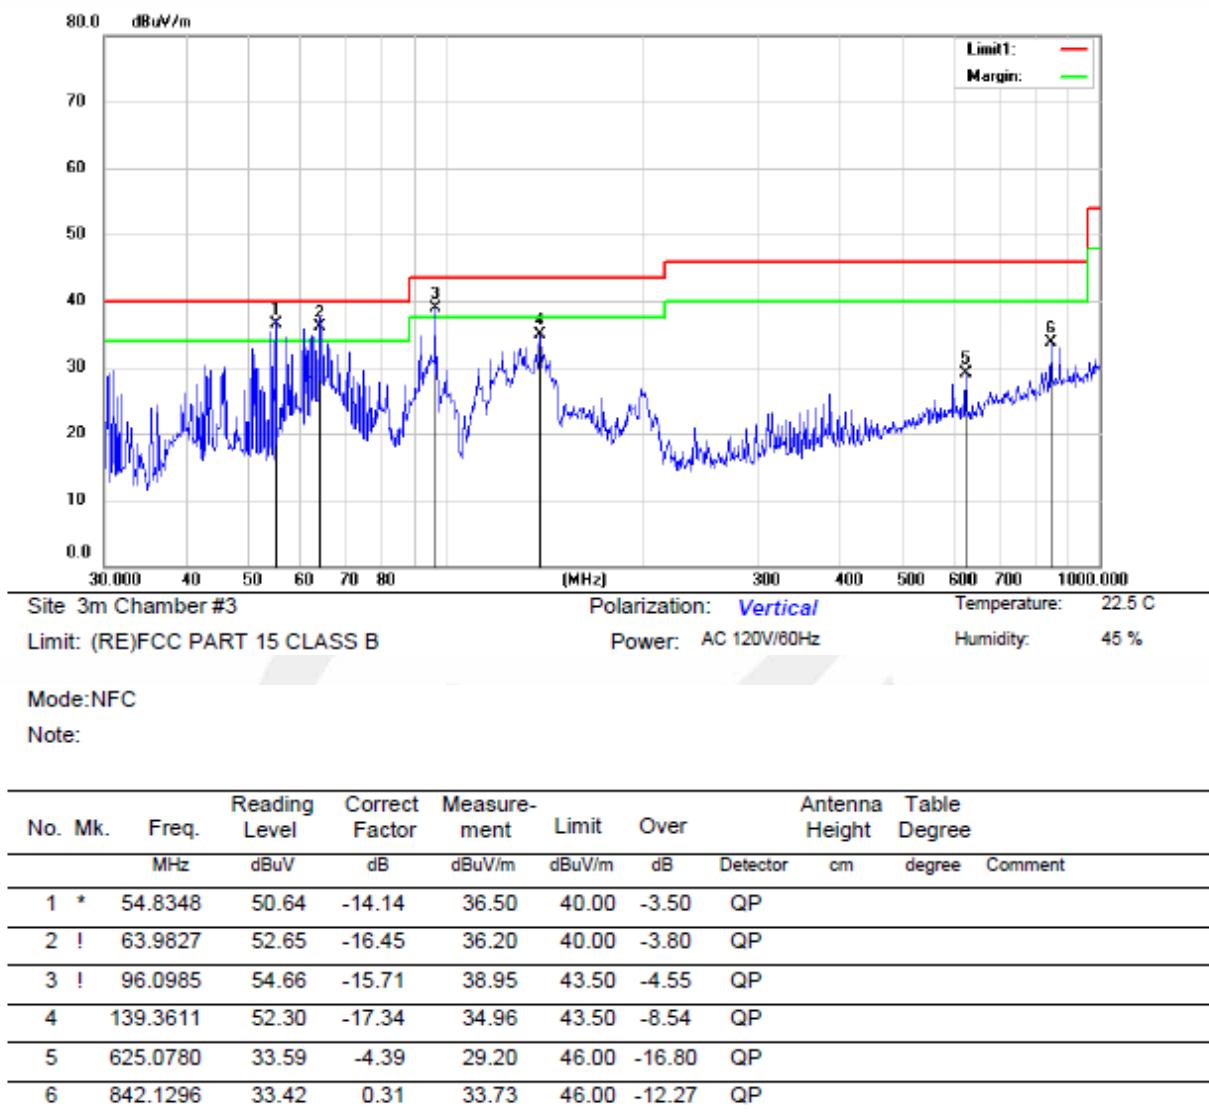

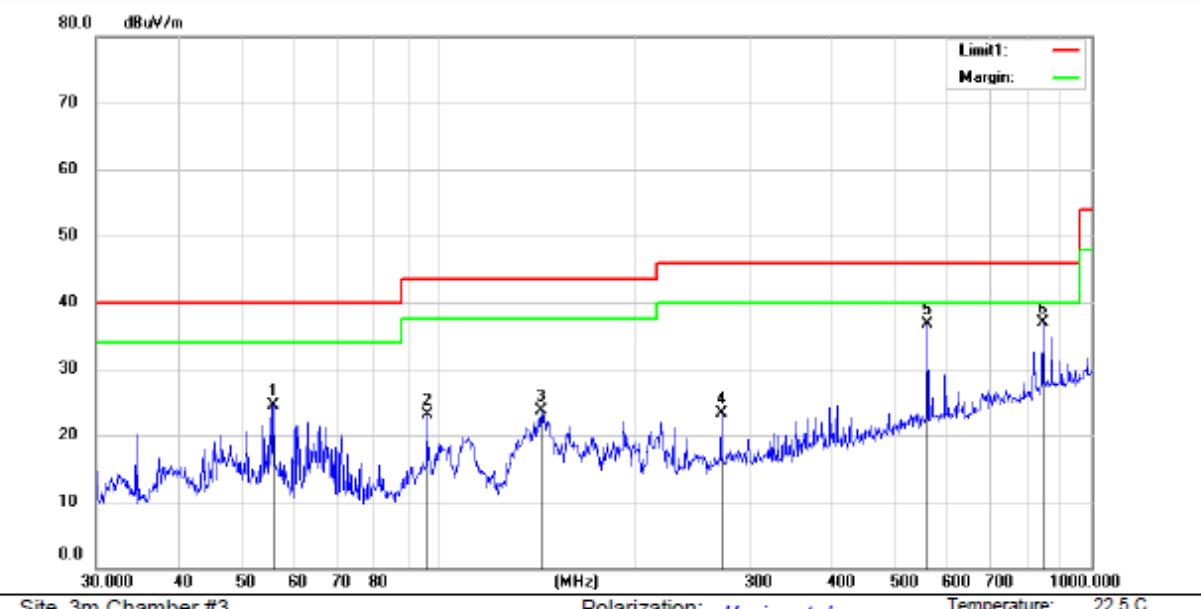

Mode:NFC

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		56.0007	39.15	-14.55	24.60	40.00	-15.40	QP			
2		96.0985	38.80	-15.71	23.09	43.50	-20.41	QP			
3		143.8295	41.32	-17.62	23.70	43.50	-19.80	QP			
4		271.3245	34.84	-11.51	23.33	46.00	-22.67	QP			
5		560.6928	41.53	-4.92	36.61	46.00	-9.39	QP			
6	*	842.1296	36.52	0.31	36.83	46.00	-9.17	QP			

## 7.4 CONDUCTED EMISSION TEST

### 7.4.1 Applicable Standard

According to FCC Part 15.207(a)

### 7.4.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 7.4.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

### 7.4.4 Test Procedure

The EUT was placed on a table which is 0.1m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

### 7.4.5 Test Results

Pass

The 120V &240V voltagehave been tested, and the worst result recorded was report as below:

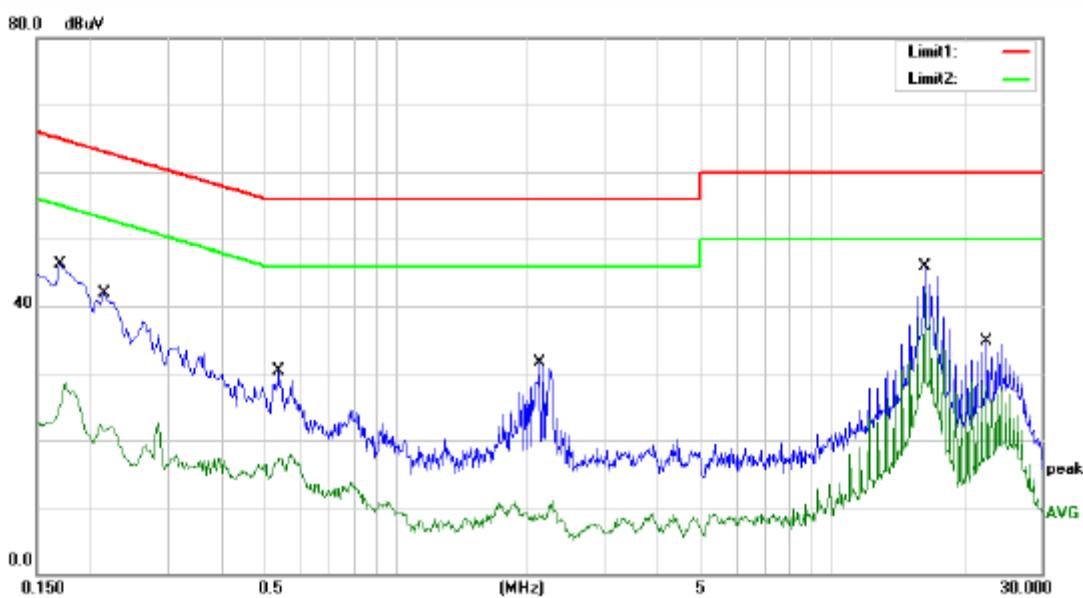

Site Conduction #2

 Phase: **N**

Temperature: 25.0

Limit: (CE)FCC PART 15 class B\_QP


Power: AC 120V/60Hz

Humidity: 49 %

Mode: NFC

Note:

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
			dBuV	dB	dBuV	dB			
1		0.1700	36.42	9.90	46.32	64.96	-18.64	QP	
2		0.1700	12.07	9.90	21.97	54.96	-32.99	AVG	
3		0.2140	32.02	9.90	41.92	63.05	-21.13	QP	
4		0.2140	18.76	9.90	28.66	53.05	-24.39	AVG	
5		0.5380	20.32	9.92	30.24	56.00	-25.76	QP	
6		0.5380	7.91	9.92	17.83	46.00	-28.17	AVG	
7		2.1300	21.64	9.94	31.58	56.00	-24.42	QP	
8		2.1300	1.08	9.94	11.02	46.00	-34.98	AVG	
9		16.1540	35.87	10.06	45.93	60.00	-14.07	QP	
10	*	16.1540	32.41	10.06	42.47	50.00	-7.53	AVG	
11		22.4980	24.56	10.18	34.74	60.00	-25.26	QP	
12		22.4980	18.25	10.18	28.43	50.00	-21.57	AVG	

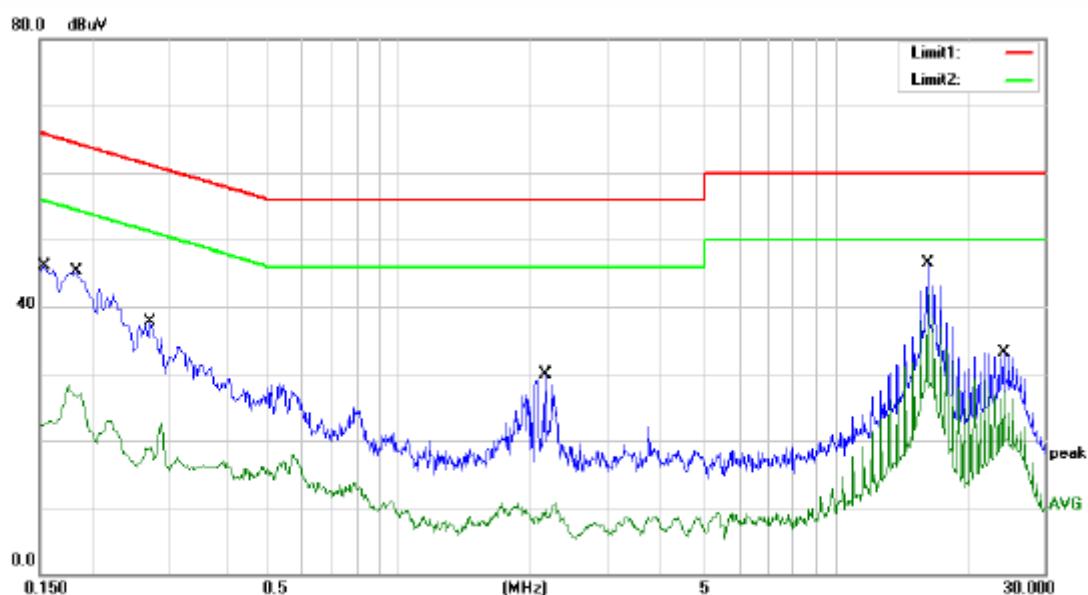

## Site Conduction #2

Phase: 11

Temperature: 25.0

Limit: (CE)FCC PART 15 class B QP

Power: AC 120V/60Hz

Humidity: 49 %

Mode: NFC

**Note:**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
							MHz	dBuV
1		0.1540	36.22	9.90	46.12	65.78	-19.66	QP
2		0.1540	13.00	9.90	22.90	55.78	-32.88	AVG
3		0.1820	35.41	9.90	45.31	64.39	-19.08	QP
4		0.1820	18.39	9.90	28.29	54.39	-26.10	AVG
5		0.2700	27.73	9.91	37.64	61.12	-23.48	QP
6		0.2700	12.75	9.91	22.66	51.12	-28.46	AVG
7		2.1660	19.86	9.94	29.80	56.00	-26.20	QP
8		2.1660	0.68	9.94	10.62	46.00	-35.38	AVG
9		16.1540	36.37	10.06	46.43	60.00	-13.57	QP
10	*	16.1540	32.44	10.06	42.50	50.00	-7.50	AVG
11		24.2300	22.87	10.25	33.12	60.00	-26.88	QP
12		24.2300	17.19	10.25	27.44	50.00	-22.56	AVG

## 8 ANTENNA APPLICATION

### 8.1.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 8.2 RESULT

The EUT's antenna is coil antenna, The antenna's gain is 0dBi and meets the requirement. and the antenna can't be replaced by the user, which in accordance to section 15.203.

\*\*\* End of Report \*\*\*