



Design. Create. Certify. *Connect.*

W66 N220 Commerce Court • Cedarburg, WI 53012 USA • Phone: 262.375.4400 • Fax: 262.375.4248 • www.lsr.com

ENGINEERING TEST REPORT # TR 315108 A

LSR Job #: C-2289

Compliance Testing of:

5-200-0081 Radio Module

Test Date(s):

August 15 and November 18, 19, 23, 24 2015

Prepared For:

Midmark Corporation

Attn: Maria Marenco

690 Knox Street, Suite 100

Torrance, CA 90502

This Test Report issued:

Adam Alger, EMC Engineer

Signature:

Date: 1-21-16

Quality Assurance by:

Michael Hintzke, EMC Engineer

Signature:

Date: 1-21-16

Report by:

Adam Alger, EMC Engineer

Signature:

Date: 1-7-16

This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Table of Contents

i.	Title Page	1
ii.	Table of Contents	2
iii.	LS Research, LLC in Review	3
1.0	Summary of Test Report.....	4
2.0	Test Facilities	4
3.0	Client Information.....	5
3.1	Equipment Under Test (EUT) Information.....	5
3.2	Product Information	5
3.3	Modifications Incorporated In the EUT for Compliance Purposes	5
3.4	Deviations & Exclusions from Test Specifications	5
3.5	Additional Information	5
4.0	Conditions of Test.....	6
5.0	Test Equipment	6
6.0	Conformance Summary	7
	Appendix A – Test Equipment	8
	Appendix B – Test Data.....	9
	B.1 – RF Conducted Emissions	9
	B.2 – Transmitter Radiated Emissions in Restricted Bands	22
	B.3 – AC Mains Conducted Emissions	31
	Appendix C - Uncertainty Summary	34
	Appendix D - References.....	35

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

LS Research, LLC in Review

As an EMC Testing Laboratory, our Accreditation and Assessments are recognized through the following:



TESTING CERT #1255.01

A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025: 2005 with Electrical (EMC) Scope of Accreditation
A2LA Certificate Number: 1255.01



Federal Communications Commission (FCC) – USA

Listing of 3 Meter Semi-Anechoic Chamber based on Title 47 CFR – Part 2.948
FCC Registration Number: 90756



Industry Canada

On file, 3 Meter Semi-Anechoic Chamber based on RSS-212 – Issue 1

File Number: IC 3088-A

On file, 3 and 10 Meter OATS based on RSS-212 – Issue 1

File Number: IC 3088



U. S. Conformity Assessment Body (CAB) Validation

Validated by the European Commission as a U. S. Competent Body operating under the U. S./EU, Mutual Recognition Agreement (MRA) operating under the European Union Electromagnetic Compatibility –Council Directive 2004/108/EC (formerly 89/336/EEC, Article 10.2).

Date of Validation: January 16, 2001

Validated by the European Commission as a U.S. Notified Body operating under the U.S. /EU, Mutual Recognition Agreement (MRA) operating under the European Union

Telecommunication Equipment – Council Directive 99/5/EC, Annex V.

Date of Validation: November 20, 2002

Notified Body Identification Number: 1243

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

1.0 Summary of Test Report

In 2015 the EUT, 5-200-0081 Radio Module, as provided by Midmark Corporation was tested and MEETS the following requirements:

FCC Requirement	IC Requirement	Test Requirements	Measurement Procedure	Compliance (Yes/No)
15.247 (a)(2)	RSS-247 Section 5.2 (1)	6 dB Bandwidth of a Digital Modulation System	ANSI C63.10-2013 Section 11.8	Yes
15.247(b) & 1.1310	RSS-247 Section 5.4 (4)	Maximum Output Power	ANSI C63.10-2013 Section 11.9	Yes
15.247 (e)	RSS-247 Section 5.2 (2)	Power Spectral Density of a Digital Modulation System	ANSI C63.10-2013 Section 11.10	Yes
15.247(d)	RSS-247 Section 5.5	RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	ANSI C63.10-2013 Section 11.11	Yes
15.247(c), 15.209 & 15.205	RSS-GEN Section 8.9, 8.10	Transmitter Radiated Emissions in Restricted Bands	ANSI C63.10-2013 Section 11.12 (6.3,6.5,6.6)	Yes
2.1055 (d)	RSS-GEN Section 6.11	Frequency Stability	ANSI C63.10-2013 Section 6.8	Yes
15.207	RSS-GEN Section 8.8	Power Line Conducted Emissions Measurements	ANSI C63.10-2013 Section 6.2	Yes

2.0 Test Facilities

All testing was performed at:

LS Research, LLC
W66 N220 Commerce Court
Cedarburg, Wisconsin, 53012 USA

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) to the requirements of ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted.

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

3.0 Client Information

Manufacturer Name:	Midmark Corporation
Address:	690 Knox Street, Suite 100 Torrance, CA 90502
Contact Person:	Maria Moreno

3.1 Equipment Under Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	5-200-0081 Radio Module
Model Number:	5-200-0081
Serial Number:	Eng. Sample
FCC ID:	2AF4M-5-200-0081
IC:	20691-52000081

3.2 Product Information

Bluetooth Low Energy module utilizing PCB trace antenna

3.3 Modifications Incorporated In the EUT for Compliance Purposes

None noted at time of test

3.4 Deviations & Exclusions from Test Specifications

None noted at time of test

3.5 Additional Information

EUT programmed for continuous transmit via FTDI to USB cable connected to laptop computer running TI Smart RF Studio 7 V2.0.0. Test channels; Low Channel (2402 MHz), Mid Channel (2440 MHz), and High Channel (2480 MHz).

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

4.0 Conditions of Test

Environmental:

Temperature: 20-25° C
Relative Humidity: 30-60%
Atmospheric Pressure: 86-106 kPa

Mains Voltage: 120VAC 60Hz

5.0 Test Equipment

All test equipment is calibrated by a calibration laboratory accredited by A2LA to the requirements of ISO 17025. For a complete list of test equipment and calibration dates, see Appendix A. Unless otherwise noted, resolution bandwidth of measuring instrument used during testing for given frequency range, see below.

Frequency Range	Resolution Bandwidth
9 kHz – 150 kHz	200 Hz
150 kHz – 30 MHz	9 kHz
30 MHz – 1000 MHz	120 kHz
Above 1000 MHz	1 MHz

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

6.0 Conformance Summary

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.247, 15.207, Industry Canada RSS-247, Issue 1 (2015), Annex 8, RSS-GEN Issue 4 (2014).

If some emissions are seen to be within 3 dB of their respective limits:

As these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Appendix A – Test Equipment



Date : 18-Nov-2015

Type Test : All

Job # : C-2289

Prepared By: Shane Dock / Adam Alger

Customer: Midmark

Quote #: 315108

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960085	N9038A MXE 26.5GHz Receiver	Agilent	N9038A	MY51210148	5/6/2015	5/6/2016	Active Calibration
2	AA 960150	Biconical Antenna	ETS	3110B	0003-3346	1/22/2015	1/22/2016	Active Calibration
3	AA 960163	Log Periodic Antenna	A.H. Systems, Inc	SAS-512-2	500	3/16/2015	3/16/2016	Active Calibration
4	AA 960158	Double Ridge Horn Antenna	ETS Lindgren	3117	109300	7/9/2015	7/9/2016	Active Calibration
5	AA 960153	2.4GHz High Pass Filter	KWM	HFF-L-14186	7272-04	4/15/2015	4/15/2016	Active Calibration
6	EE 960159	0.8 - 21GHz LNA	Mini-Circuits	ZVA-212X-S+	740411007	7/9/2015	7/9/2016	Active Calibration
7	EE 960146	Std. Gain Horn Ant. w/preamp	Adv. Micro / EMC	WLA622-4 / 3160-03	123001	8/19/2015	8/19/2016	Active Calibration
8	EE 960162	LISN - 15A	COM-POWER	LI-215A	191969	7/24/2015	7/24/2016	Active Calibration

Project Engineer: John Ziegler

Quality Assurance: Peter Feidin

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Appendix B – Test Data

B.1 – RF Conducted Emissions

Manufacturer	Midmark Corporation
Test Location	LS Research, LLC
Rule Part	FCC 15.247 IC RSS-247
General Measurement Procedure	ANSI C63.10 Section 6.7
General Description of Measurement	A direct measurement of the transmitted signal was performed at the antenna port of the EUT via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings thereby allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source.

Prepared For: Midmark Corporation

Name: 5-200-0081 Radio Module

Report: TR 315108

Model: 5-200-0081

LSR: C-2289

Serial: Eng. Sample

B.1.1 – RF Conducted – Fundamental Bandwidth

Manufacturer	Midmark Corporation
Date	9-15, 11-23 2015
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247 (a)(2) IC RSS-247 Section 5.2(1)
Specific Measurement Procedure	ANSI C63.10-2013 Section 11.8
Additional Description of Measurement	Peak detector used
Additional Notes	1. Continuous transmit modulated used for this test.

Table
Maximum Power


Frequency (MHz)	99% BW (MHz)	20 dB BW (MHz)	6 dB DTS BW (MHz)
2402	1.058	1.227	0.678
2440	1.061	1.218	0.686
2480	1.059	1.221	0.681

Minimum Power


Frequency (MHz)	99% BW (MHz)	20 dB BW (MHz)	6 dB DTS BW (MHz)
2402	1.072	1.213	0.688
2440	1.070	1.211	0.674
2480	1.075	1.225	0.696

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample


Plots – Max Power

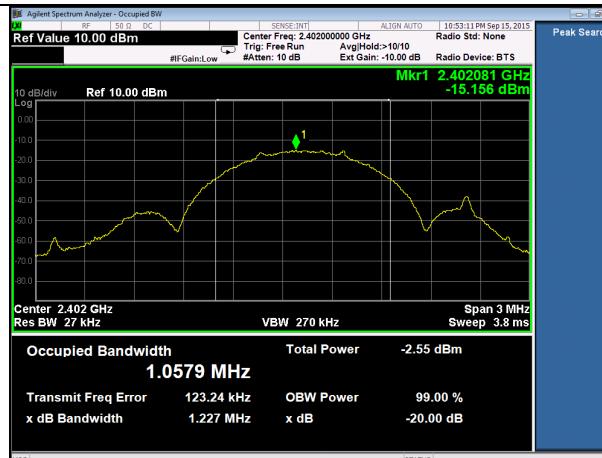

DTS BW – Low Channel

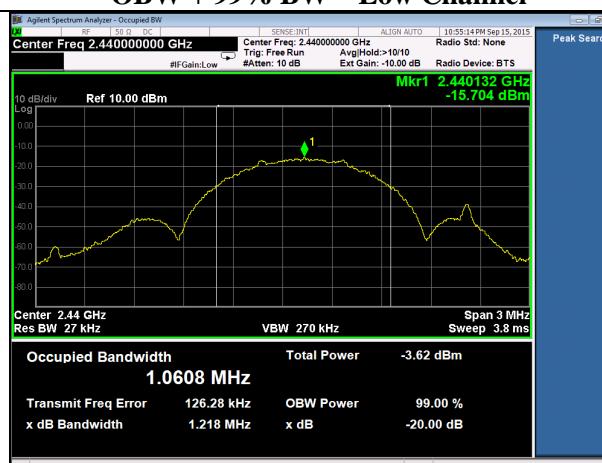

DTS BW – Mid Channel

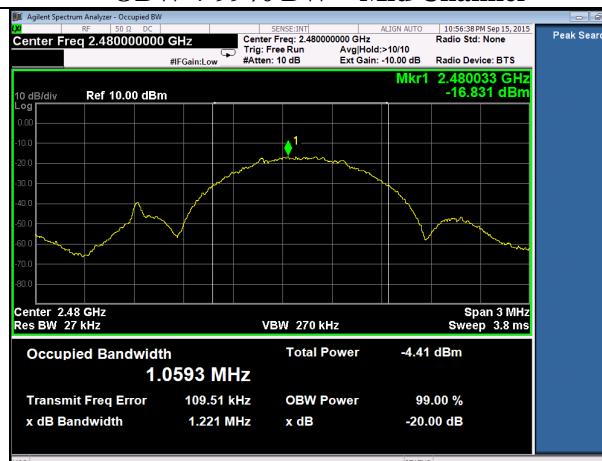

DTS BW – High Channel

QBW \pm 99% BW = High Channel

Prepared For: Midmark Corporation

Name: 5-200-0081 Radio Module


Report: TR 315108

Model: 5-200-0081

LSR: C-2289

Serial: Eng. Sample


Plots – Min Power

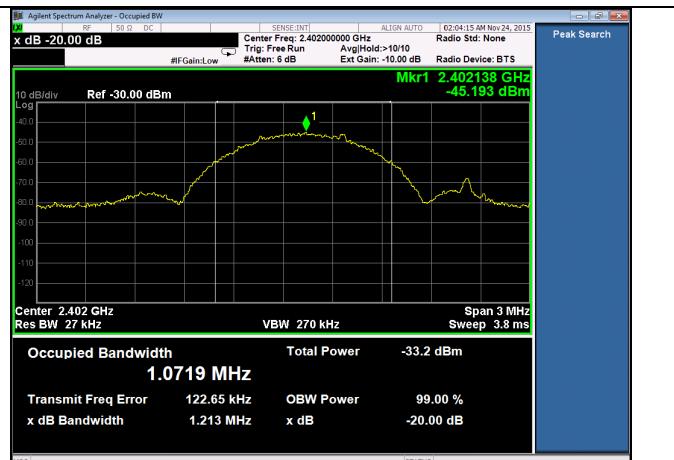

DTS BW – Low Channel



DTS BW – Mid Channel

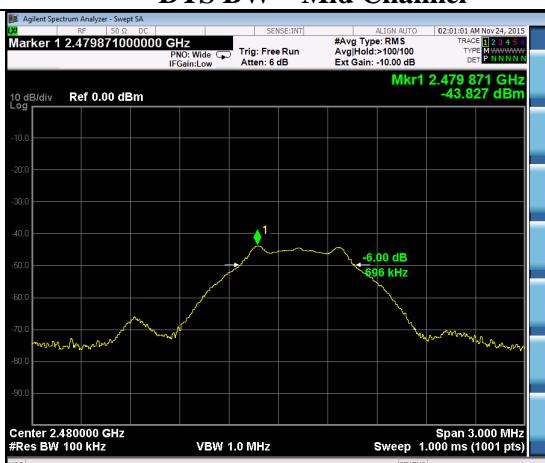

DTS BW – High Channel

OBW + 99% BW – High Channel

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

B.1.2 – RF Conducted – Fundamental Power and Spectral Density

Manufacturer	Midmark Corporation
Date	9-15, 11-23 2015
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247 (b) & (e) IC RSS-247 Section 5.4 (4) & 5.2 (2)
Specific Measurement Procedure	ANSI C63.10-2013 Section 11.9 and 11.10
Additional Description of Measurement	Peak Output Power and Peak PSD methods utilized for measurement 100 kHz resolution bandwidth used for Peak Power Spectral Density measurement
Additional Notes	1. Continuous transmit modulated used for this test. Sample Calculation: Margin (dB) = Limit – Measured Level

Table
Maximum Power

Frequency (MHz)	99% BW (MHz)	20 dB BW (MHz)	6 dB DTS BW (MHz)	PSD (dBm/100 kHz)	Power
2402	1.058	1.227	0.678	-12.55	-12.23
2440	1.061	1.218	0.686	-13.31	-12.90
2480	1.059	1.221	0.681	-14.08	-13.62

Minimum Power

Frequency (MHz)	99% BW (MHz)	20 dB BW (MHz)	6 dB DTS BW (MHz)	PSD (dBm/100 kHz)	Power
2402	1.072	1.213	0.688	-42.59	-41.15
2440	1.070	1.211	0.674	-43.02	-41.91
2480	1.075	1.225	0.696	-43.83	-42.49

PSD limit = 8 dBm / 3 kHz

Power limit = 30 dBm

Worst Case PSD / 100 kHz = -12.55 < 8 dBm = PASS


Worst Case Power = -12.23 < 30 dBm = PASS

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample


Plots – Max Power



Peak Output Power – Low Channel

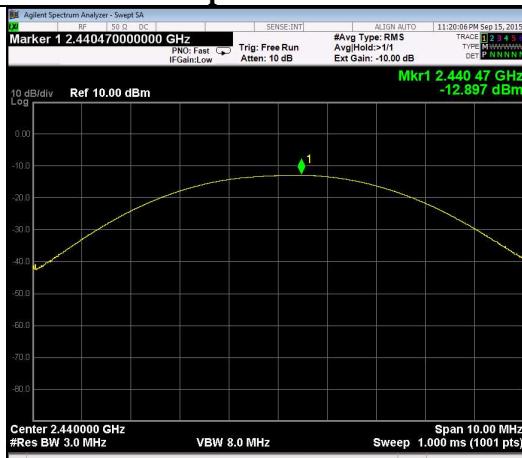

Peak Output Power – Mid Channel

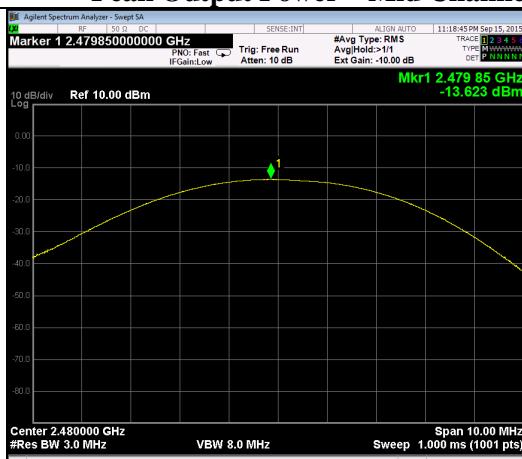

Peak Output Power – High Channel

PPSD – Low Channel

Prepared For: Midmark Corporation

Name: 5-200-0081 Radio Module

Report: TR 315108

Model: 5-200-0081

LSR: C-2289

Serial: Eng. Sample

Plots – Min Power



Peak Output Power – Low Channel



Peak Output Power – Mid Channel



Peak Output Power – High Channel

PPSD – Low Channel

Prepared For: Midmark Corporation

Report: TR 315108

LSR: C-2289

Name: 5-200-0081 Radio Module

Model: 5-200-0081

Serial: Eng. Sample

B.1.3 – RF Conducted – Spurious Emissions

Manufacturer	Midmark Corporation
Date	9-15, 11-23 2015
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247 (d) IC RSS-247 Section 5.5
Specific Measurement Procedure	ANSI C63.10-2013 Section 11.11
Additional Description of Measurement	Peak output power measurements therefore spurious emissions attenuated 20 dBc.
Additional Notes	<ol style="list-style-type: none">1. Continuous transmit modulated used for this test.2. See DTS BW plots for 100 kHz reference3. No spurious emissions found within 20 dB of limit

No emissions found within 20 dB of limit


Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Plots – Max Power




1-10 GHz – Low Channel

10-25 GHz – Low Channel

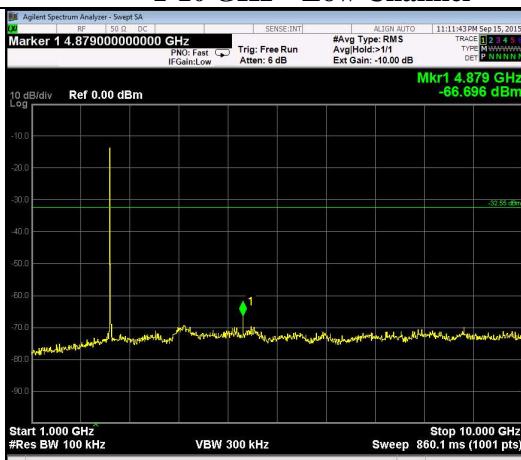

1-10 GHz – Mid Channel

10-25 GHz – Mid Channel

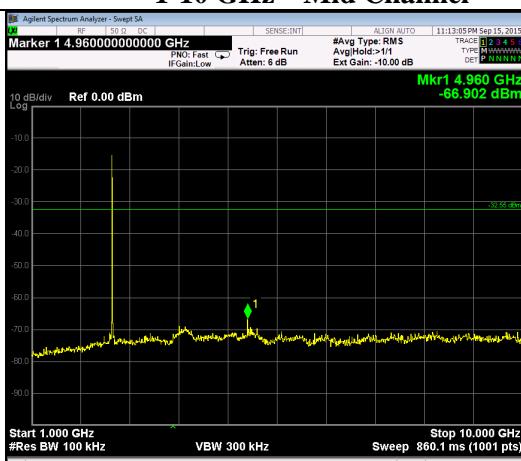

1-10 GHz – High Channel

10-25 GHz – High Channel

Prepared For: Midmark Corporation

Name: 5-200-0081 Radio Module


Report: TR 315108

Model: 5-200-0081



LSR: C-2289

Serial: Eng. Sample

Plots – Max Power


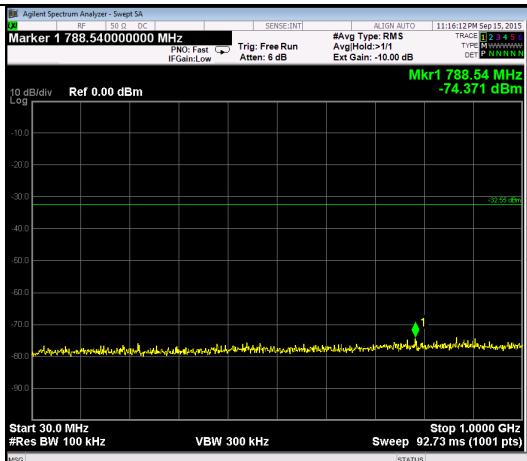


30-1000 MHz – Low Channel

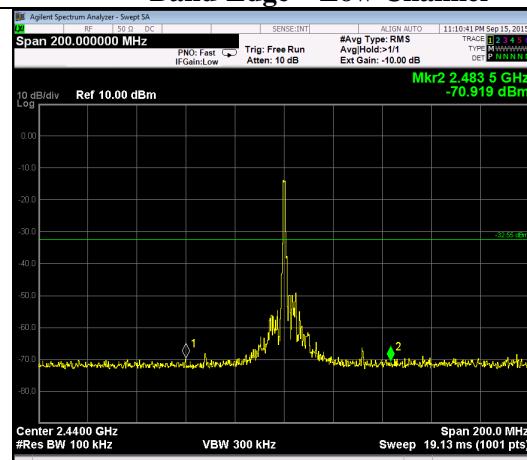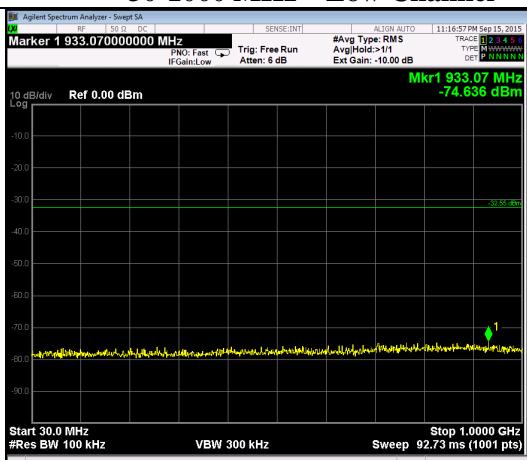

Band-Edge – Low Channel

30-1000 MHz – Mid Channel

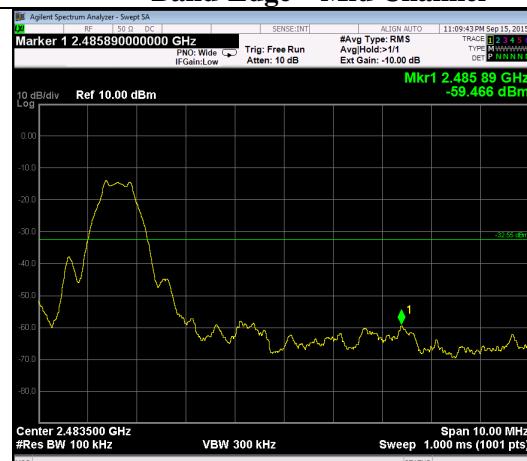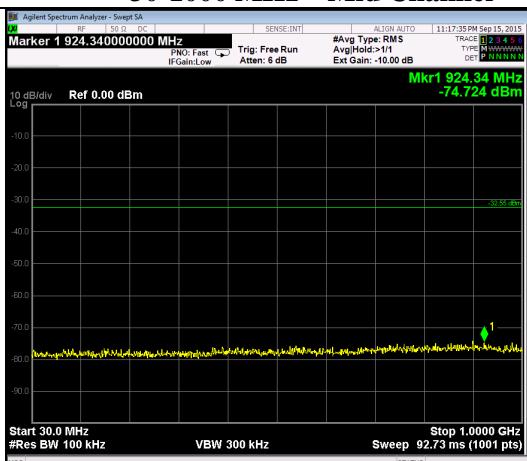

30-1000 MHz – High Channel



Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Plots – Min Power



1-10 GHz – Low Channel

10-25 GHz – Low Channel



1-10 GHz – Mid Channel

10-25 GHz – Mid Channel



1-10 GHz – High Channel

10-25 GHz – High Channel

Prepared For: Midmark Corporation

Name: 5-200-0081 Radio Module



Report: TR 315108

Model: 5-200-0081



LSR: C-2289

Serial: Eng. Sample



Plots – Min Power

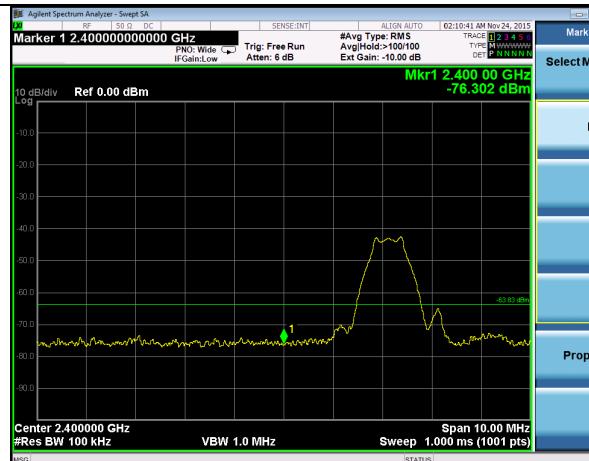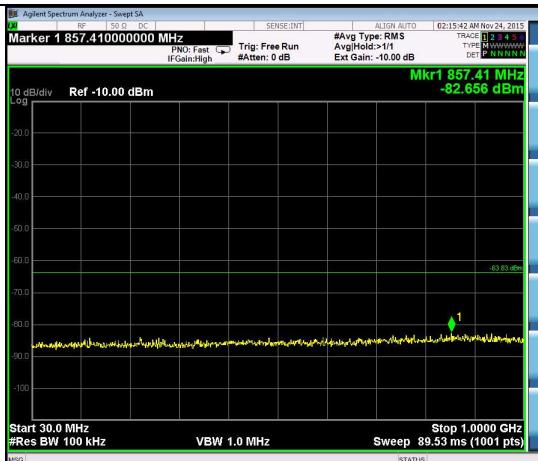

30-1000 MHz – Low Channel

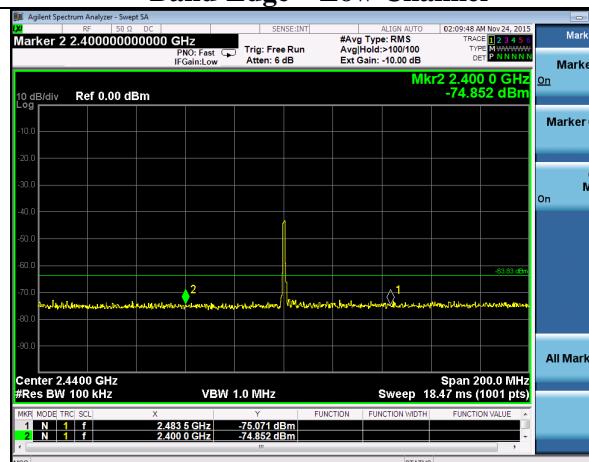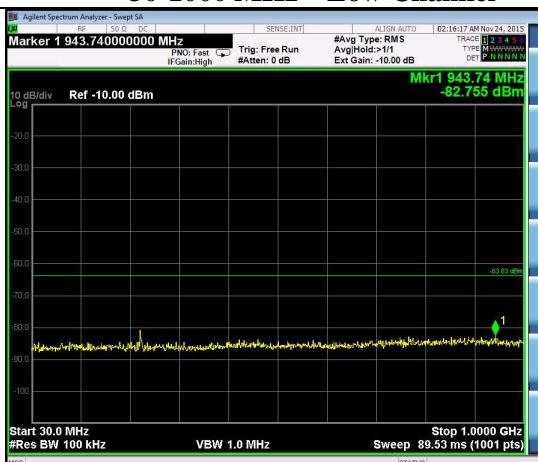

30-1000 MHz – Mid Channel

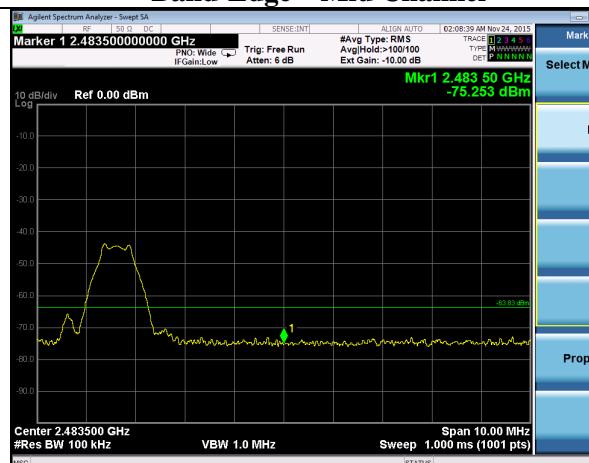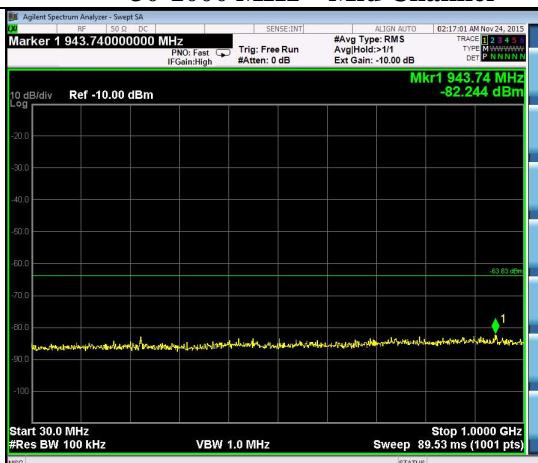

30-1000 MHz – High Channel

Band-Edge – High Channel

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

B.1.4 – RF Conducted – Frequency Stability

Manufacturer	Midmark Corporation
Date	9-15-15
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 2.1055 RSS-GEN Section 6.11
Specific Measurement Procedure	ANSI C63.10-2013 Section 6.8
Additional Description of Measurement	RF Conducted Measurement
Additional Notes	<p>The power and frequency stability of the device was examined as a function of the input voltage available to the EUT. A Spectrum Analyzer was used to measure the RF output power and frequency at the appropriate frequency markers. Power was supplied by an external bench-type DC power supply and was varied from the nominal.</p> <p>The power was then cycled On/Off to observe system response. No unusual response was observed, the emission characteristics were well behaved, and the system returned to the same state of operation as before the power cycle.</p> <p>Below is data showing stability of the fundamental frequency.</p> <p>Continuous transmit un-modulated used for this test. EUT operates at 5.0 VDC nominal</p>

Table

	4.25 VDC		5.0 VDC		5.75 VDC		FREQ DRIFT (Hz)
	POWER (dBm)	FREQUENCY (Hz)	POWER (dBm)	FREQUENCY (Hz)	POWER (dBm)	FREQUENCY (Hz)	
LOW CHANNEL	-12.521	2402113684	-12.518	2402113718	-12.530	2402113678	40
MID CHANNEL	-13.243	2440115493	-13.210	2440115503	-13.216	2440115557	64
HIGH CHANNEL	-14.006	2480117466	-13.997	2480117416	-13.985	2480117410	56

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

B.2 – Transmitter Radiated Emissions in Restricted Bands

Rule Part(s)	FCC: 15.247 / 15.205 / 15.209 IC: RSS-GEN Section 8.9,8.10					
Measurement Procedure	ANSI C63.10 – 2013 Section 11.12 (6.3,6.5,6.6)					
Test Location	LS Research, LLC - FCC Listed 3 meter Semi-Anechoic Chamber					
Test Distance	See data section					
EUT Placement	Above 1 GHz: 150 cm height non-conductive table above reference ground plane covered with absorbers Below 1 GHz: 80 cm height non-conductive table above reference ground plane					
Frequency Range of Measurement	Biconical: 30-300 MHz	Log Periodic Dipole Array: 300-1000 MHz	Double-Ridged Waveguide Horn: 1-18 GHz	Standard Gain Horn: 18-26GHz		
Measurement Detectors	30-1000MHz RBW: 120 kHz VBW: At least 300 kHz		1 - 40 GHz: RBW : 1MHz VBW: At least 3 (MHz) Peak 10 Hz Average			
Description of Measurement	1) The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are preformed. The data is gathered and reported as the corrected values. 2) The EUT is placed on a non-conductive pedestal <u>made of expanded polyethylene foam</u> centered on a turn-table in the test location with the antenna at the test distance from the EUT 3) Maximum radiated RF emissions are determined by rotation of azimuth and scanning the sense antenna between 1 and 4 meters in height using both horizontal and vertical antenna polarities. Maximized levels are manually noted at degree values of azimuth and at sense antenna height.					
Example Calculations	Reported Measurement data = Raw receiver measurement + Antenna Correction Factor + Cable factor (dB) - amplification factor (when applicable) + Additional factor (when applicable)					

Limits:

Frequency (MHz)	3 m Limit (μ V/m)	3 m Limit (dB μ V/m)	Type
30-88	100	40.0	Quasi-Peak
88-216	150	43.5	Quasi-Peak
216-960	200	46.0	Quasi-Peak
Above 960	500	54.0	Average (>1 GHz)

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

B.2.1 – Transmitter Band-Edge Restricted Band

Manufacturer	Midmark Corporation
Date	11-18, 11-23 2015
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247 / 15.205 / 15.209 IC RSS-247 / RSS-GEN
Measurement Procedure	ANSI C63.10-2013 Section 11.12
Test Distance	3 meter
EUT Placement	150 cm height non-conductive table centered on turn-table , absorbers covering ground plane
Detectors	Final Measurements: Peak / Max Hold, RBW 1 MHz, Average VBW 10Hz, Peak VBW 3 MHz
Additional Notes	1) EUT maximized in orientation, azimuth, and antenna height with maximum results reported.

Example Calculation:

Limit (dB μ V/m) – Reading (dB μ V/m) = Margin (dB)

Max Power

Average Table

EUT Channel	Frequency (MHz)	Average Reading (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)
Low	2389.5	45.0	54.0	9.0
High	2485.4	43.2	54.0	10.8

Peak Table

EUT Channel	Frequency (MHz)	Peak Reading (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)
Low	2369.1	57.0	74.0	17.0
High	2488.2	58.7	74.0	15.3


Min Power

Peak meets Average Limit


EUT Channel	Frequency (MHz)	Peak Reading (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
Low	2366.2	42.1	54.0	11.9
High	2495.1	42.9	54.0	11.1

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Plots – Max Power

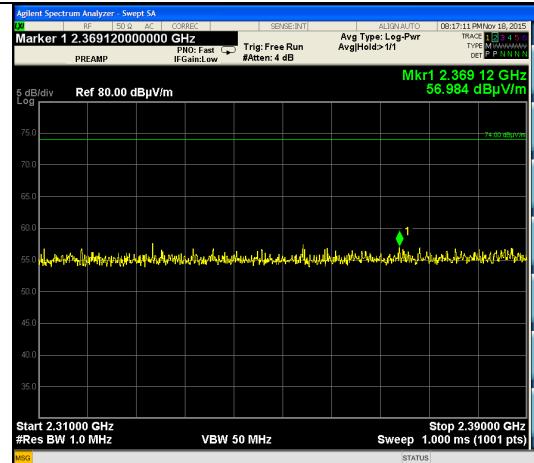



Lower Band-Edge – Low Ch. - Average

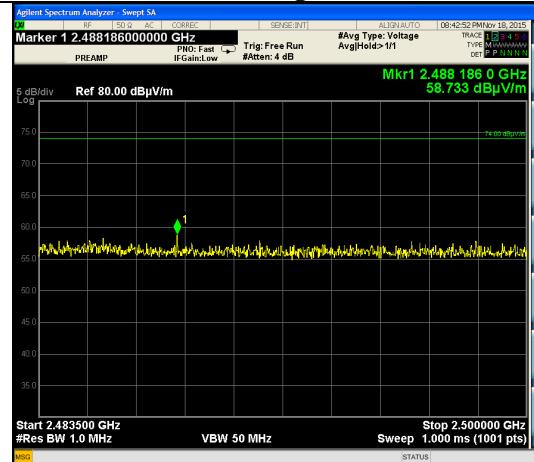

Upper Band-Edge – High Ch. - Average

Lower Band-Edge – Low Ch. - Peak

Min Power

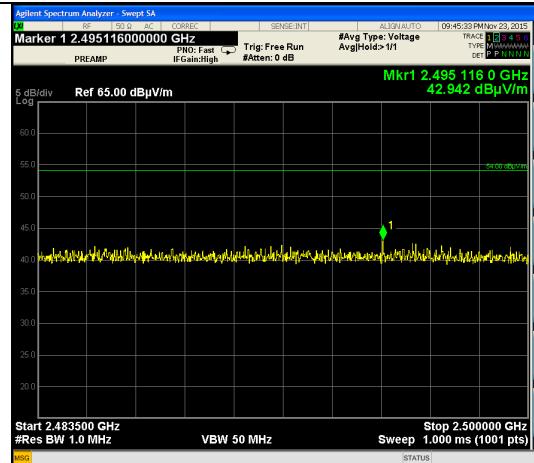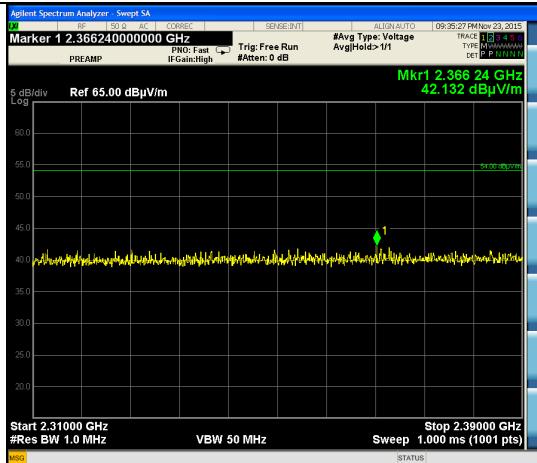

Lower Band-Edge – Low Ch. - Peak

Upper Band-Edge – High Ch. - Peak

Prepared For: Midmark Corporation

Name: 5-200-0081 Radio Module

Report: TR 315108

Model: 5-200-0081

LSR: C-2289

Serial: Eng. Sample

B.2.2 – Transmitter Radiated Spurious Emissions in Restricted Bands

Manufacturer	Midmark Corporation
Date	11-18, 11-23 2015
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247 / 15.205 / 15.209 IC RSS-247 / RSS-GEN
Measurement Procedure	ANSI C63.10-2013 Section 11.12
Test Distance	3 meter
EUT Placement	Above 1 GHz: 150 cm height non-conductive table centered on turn-table with absorbers covering ground plane Below 1 GHz: 80 cm height non-conductive table centered on turn-table
Detectors	Final Measurements: Peak / Max Hold, RBW 1 MHz, Average VBW 30Hz, Peak VBW 3 MHz
Additional Notes	1) EUT maximized in orientation, azimuth, and antenna height with maximum results reported.

Example Calculation:

$$\text{Limit (dB}\mu\text{V/m)} - \text{Reading (dB}\mu\text{V/m)} = \text{Margin (dB)}$$

Table
30-1000 MHz


Frequency (MHz)	Antenna Polarity	Azimuth (degree)	Height (cm)	Quasi-Peak Reading (dB μ V/m)	Quasi-Peak Limit (dB μ V/m)	Margin (dB)
70.68	Vertical	0	100	27.35	40.0	12.7
130.27	Vertical	0	100	27.91	43.5	15.6
167.77	Vertical	231	100	28.50	43.5	15.0
45.72	Vertical	0	100	24.02	40.0	16.0
100.26	Vertical	204	100	23.22	43.5	20.3
167.7	Horizontal	238	200	21.84	43.5	21.7

1-25 GHz

Frequency (MHz)	Height (cm)	Azimuth (degree)	Peak Reading (dB μ V/m)	Peak Limit (dB μ V/m)	Average Reading (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)	Peak Margin (dB)	Antenna Polarity	EUT orientation
4882.3	246.76	238	43.63	74	34.43	54	19.6	30.4	H	F
4882.0	142.42	256.25	43.93	74	35.55	54	18.5	30.1	V	F
4882.3	233.95	87.75	44.35	74	36.82	54	17.2	29.7	H	H
4882.1	234.90	82.5	44.01	74	35.25	54	18.8	30.0	V	H
4882.0	149.85	227	42.58	74	31.8	54	22.2	31.4	V	V
4882.1	150.04	231	43.26	74	33.96	54	20.0	30.7	H	V


Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Plots – Max Power

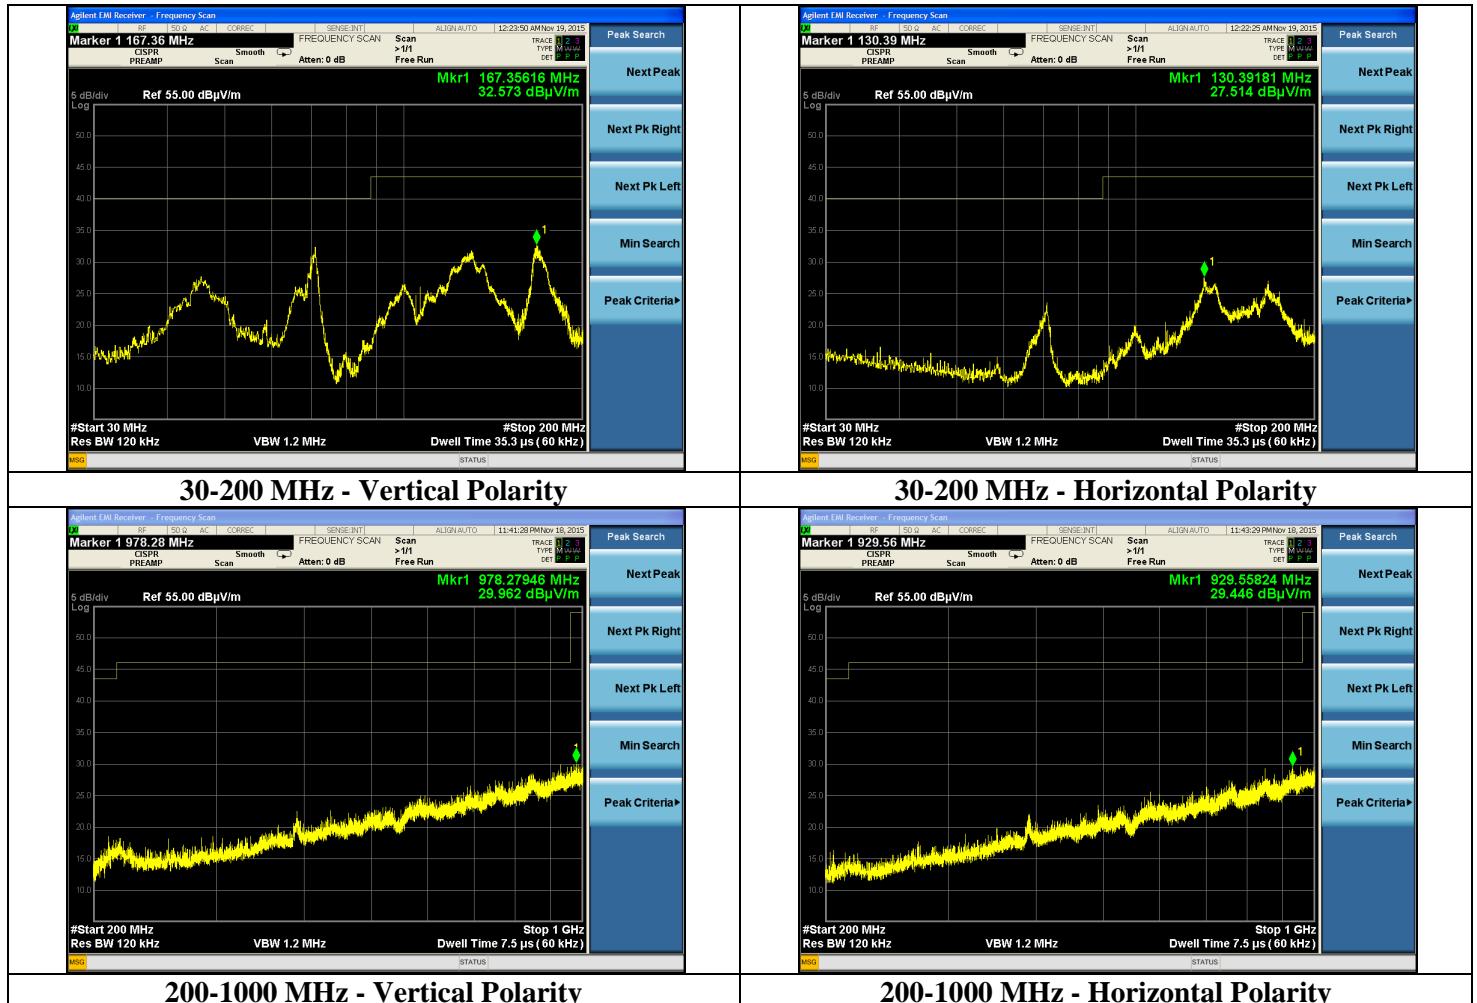

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample


Plots – Min Power

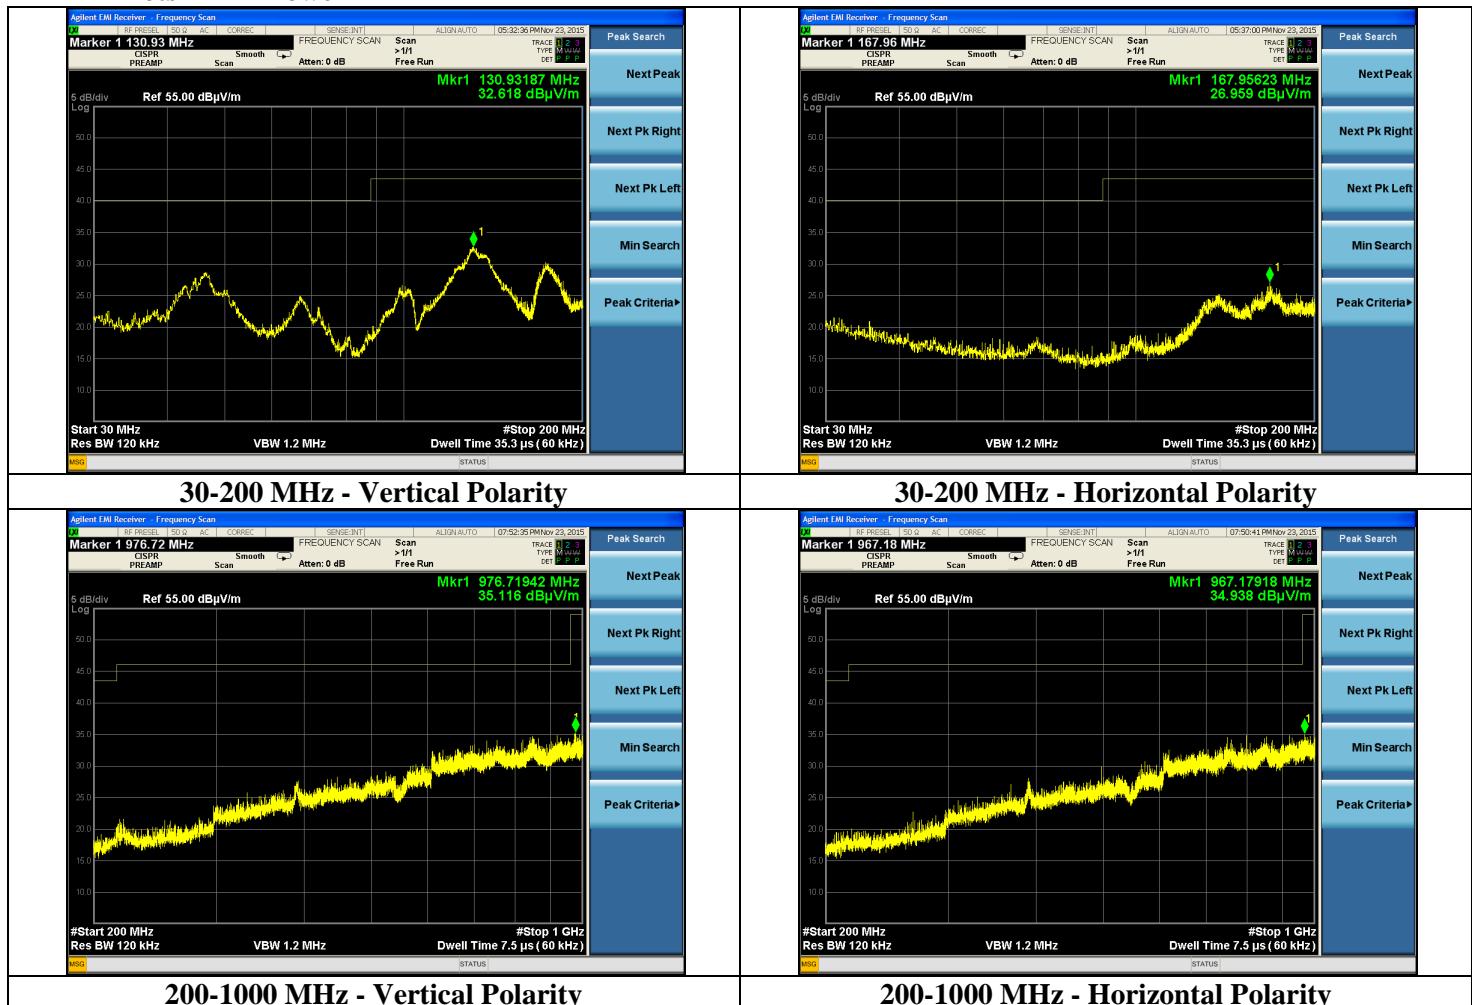



Note: Emissions seen likely not from transmitter but power supply.

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Plots – Max Power

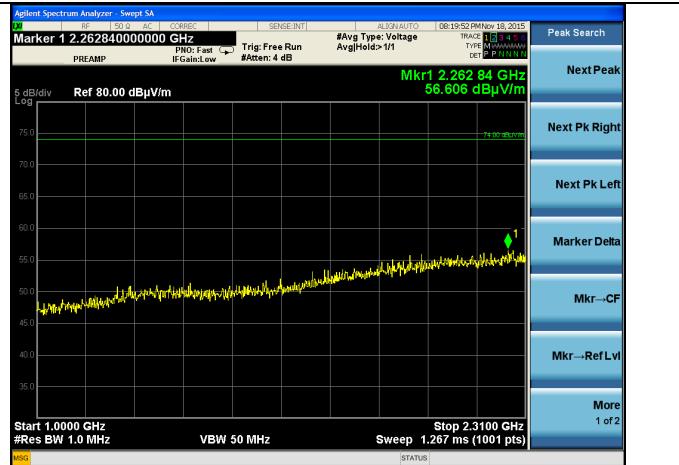

1.2-3.1 GHz – Average

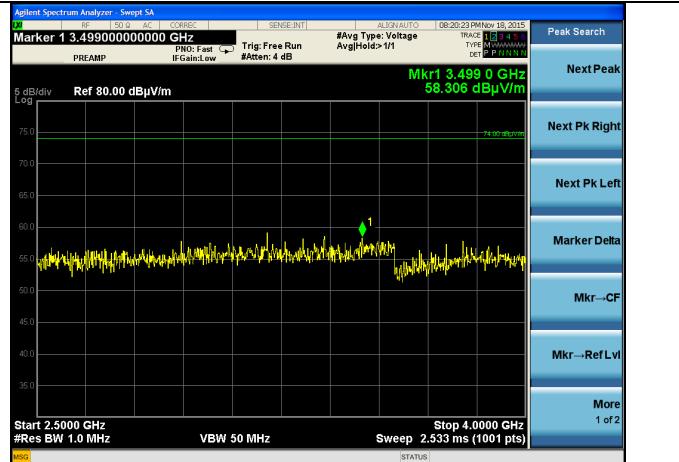
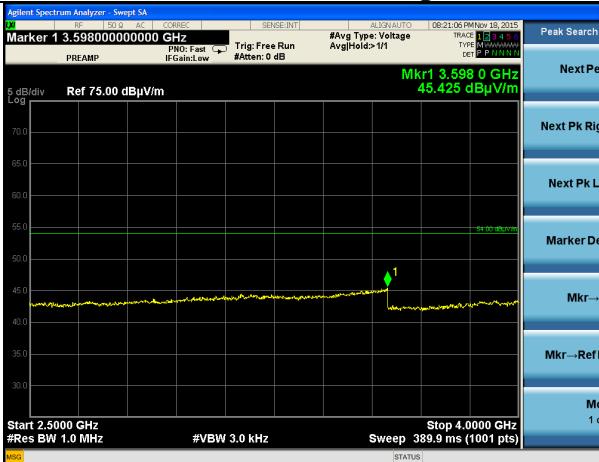


2.5-4 GHz – Average

1.2-3.1 GHz - Peak

2.5-4 GHz - Peak

Plots – Min Power

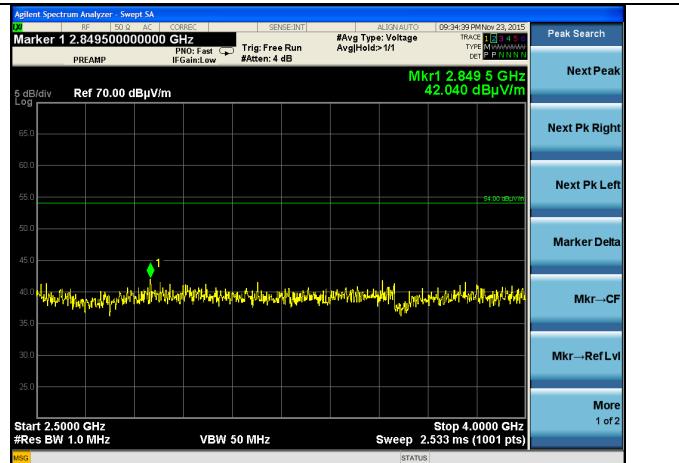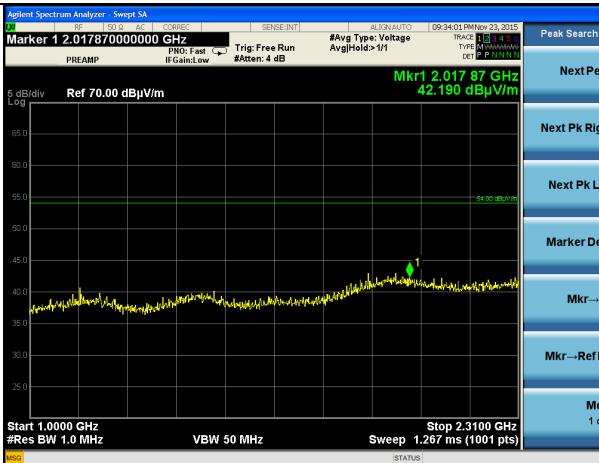

1.2-3.1 GHz – Peak

2.5-4 GHz - Peak

Prepared For: Midmark Corporation

Name: 5-200-0081 Radio Module

Report: TR 315108

Model: 5-200-0081

LSR: C-2289

Serial: Eng. Sample

Plots – Max Power



4-18 GHz – Low Ch




4-18 GHz – Mid Ch




4-18 GHz – High Ch

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Plots – Min Power

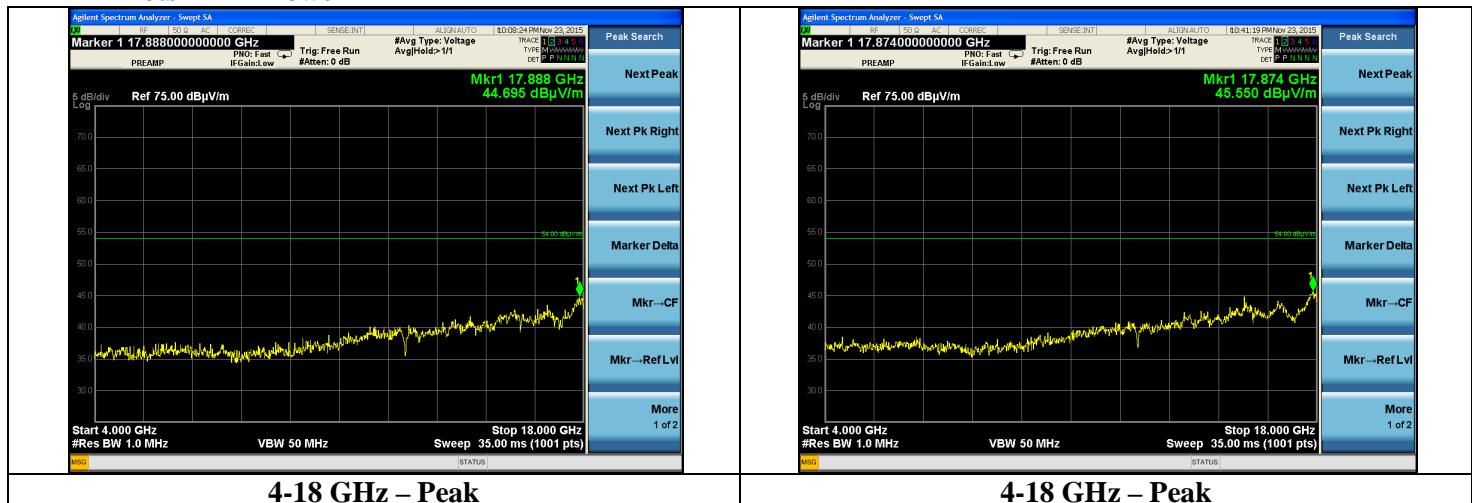

Note: All channels no emissions found

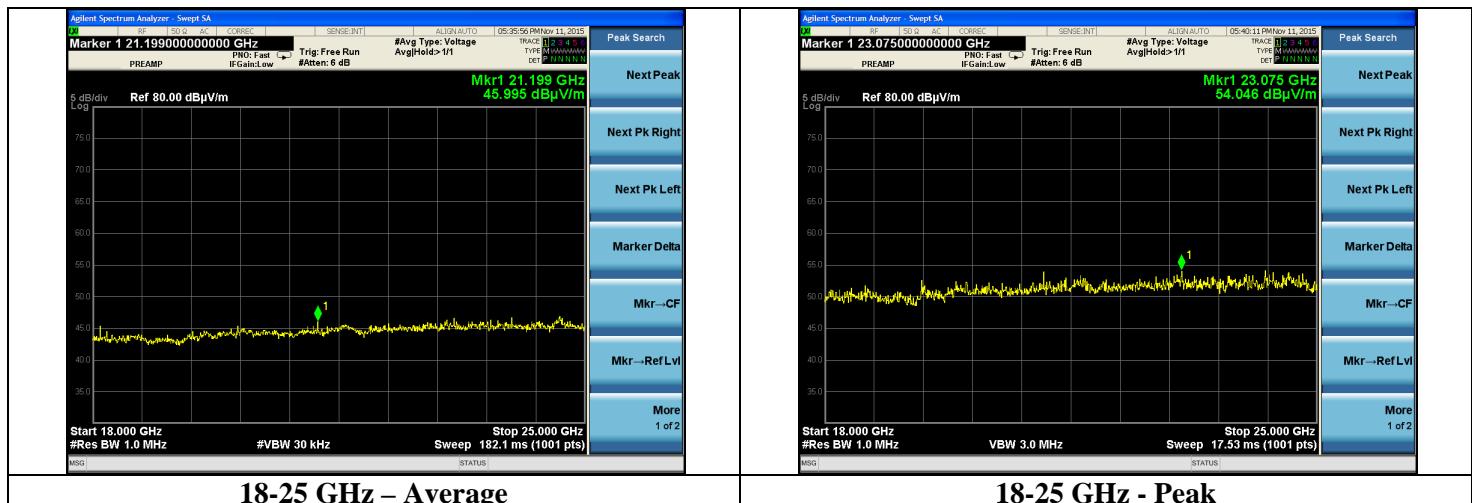

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

B.3 – AC Mains Conducted Emissions

Rule Part(s)	FCC: 15.207 IC: RSS-247 / RSS-GEN
Measurement Procedure	ANSI C63.4 - 2014 ANSI C63.10 – 2013
Test Location	LS Research, LLC – Conducted Emissions Area
Test Voltage	120 VAC 60 Hz
EUT Placement	80 cm height non-conductive table above reference ground plane
Frequency Range of Measurement	150 kHz – 30 MHz
Measurement Detectors	Peak, Quasi-Peak, Average RBW: 9 kHz VBW: At least 27 kHz
Description of Measurement	<p>1) The LISN, cable, limiter, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are preformed. The data is gathered and reported as the corrected values.</p> <p>2) The EUT is placed on a non-conductive pedestal at appropriate distance from ground planes and plugged into LISN. The LISN used has the ability to terminate the unused port with a 50Ω (ohm) load when switched to either L1 (line) or L2 (neutral).</p> <p>3) Maximum emissions are determined with peak detector and measurements at select points are made with quasi-peak and average detectors. Results are recorded and compared to limit.</p>
Example Calculations	Reported Measurement data = Raw receiver measurement + LISN Factor + Cable factor (dB) + Additional factor (when applicable)

Limits of Conducted Emissions at the AC Mains Ports:

Frequency Range (MHz)	Class B Limits (dB μ V)	
	Quasi-Peak	Average
0.150 -0.50 *	66-56	56-46
0.5 – 5.0	56	46
5.0 – 30	60	50

* The limit decreases linearly with the logarithm of the frequency in this range.

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

B.4.1 – AC Mains Conducted Emissions

Manufacturer	Midmark Corporation
Date	11-19, 11-23 2015
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	15.207 / RSS-GEN
Measurement Procedure	ANSI C63.4 - 2014 ANSI C63.10 - 2013 Section 6.2
Test Voltage	120 VAC 60 Hz
EUT Placement	80 cm height non-conductive table, 40 cm from vertical ground plane
Detectors	Peak; RBW 9 kHz Quasi-Peak and Average
Additional Notes	1) Tested in continuous transmit with no significant difference between operating channels.

Example Calculation:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Reading (dB}\mu\text{V)}$$

Table – Max Power

Frequency (MHz)	Line	Peak Reading (dB μ V)	Quasi-Peak Reading (dB μ V)	Average Reading (dB μ V)	Q-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	Average Limit (dB μ V)	Average Margin (dB)
0.574	1	55.6	54.1	44.8	56.0	1.9	46.0	1.2
0.565	1	55.8	51.6	37.6	56.0	4.4	46.0	8.4
0.577	1	54.9	52.9	43.1	56.0	3.1	46.0	2.9
0.555	1	52.1	47.9	33.7	56.0	8.1	46.0	12.3
0.523	1	47.3	45.7	36.6	56.0	10.3	46.0	9.4
1.909	1	42.4	40.1	29.4	56.0	15.9	46.0	16.6
0.573	2	46.3	43.2	32.9	56.0	12.8	46.0	13.1
0.577	2	45.4	43.1	32.9	56.0	12.9	46.0	13.1
0.537	2	44.2	37.4	24.7	56.0	18.6	46.0	21.3

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Plots – Max Power


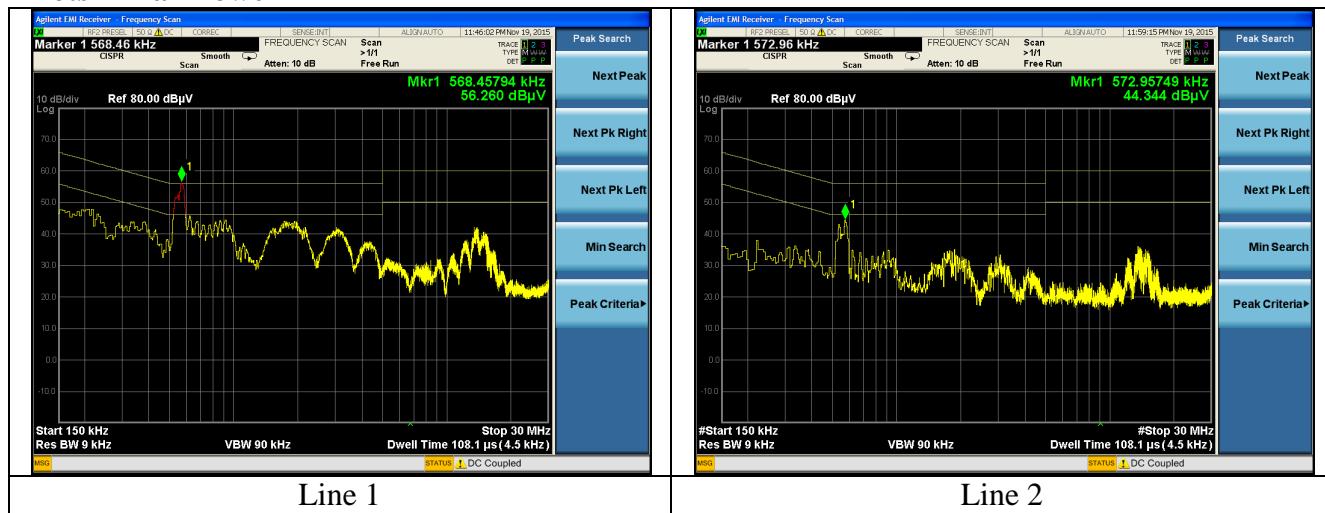


Table – Min Power

Frequency (MHz)	Line	Peak Reading (dBμV)	Quasi-Peak Reading (dBμV)	Average Reading (dBμV)	Q-Peak Limit (dBμV)	Quasi-Peak Margin (dB)	Average Limit (dBμV)	Average Margin (dB)
0.574	1	55.6	54.1	44.8	56.0	1.9	46.0	1.2
0.565	1	55.8	51.6	37.6	56.0	4.4	46.0	8.4
0.577	1	54.9	52.9	43.1	56.0	3.1	46.0	2.9
0.555	1	52.1	47.9	33.7	56.0	8.1	46.0	12.3
0.523	1	47.3	45.7	36.6	56.0	10.3	46.0	9.4
1.909	1	42.4	40.1	29.4	56.0	15.9	46.0	16.6
0.573	2	46.3	43.2	32.9	56.0	12.8	46.0	13.1
0.577	2	45.4	43.1	32.9	56.0	12.9	46.0	13.1
0.537	2	44.2	37.4	24.7	56.0	18.6	46.0	21.3

Plots – Min Power

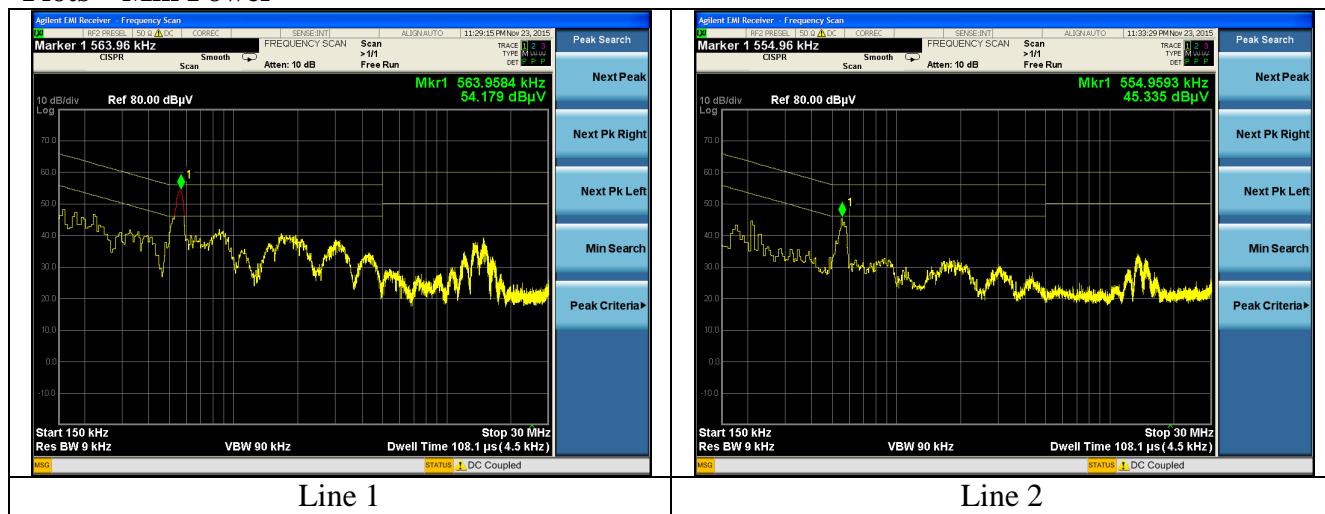

Prepared For: Midmark Corporation

Name: 5-200-0081 Radio Module

Report: TR 315108

Model: 5-200-0081

LSR: C-2289

Serial: Eng. Sample

Appendix C - Uncertainty Summary

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k=2.

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.82 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.88 dB
Radiated Emissions	3-Meter Chamber, Horn Antenna	4.85 dB
Absolute Conducted Emissions	Agilent PSA/ESA Series	1.38 dB
AC Line Conducted Emissions	Shielded Room/EMCO LISN	3.20 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	2.05 Volts/Meter
Conducted Immunity	3 Volts level	2.33 V
EFT Burst, Surge, VDI	230 VAC	54.4 V
ESD Immunity	Discharge at 15kV	3200 V
Temperature/Humidity	Thermo-hygrometer	0.64°/ 2.88 %RH

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

Appendix D - References

Publication	Year	Title
FCC CFR Parts 0-15	2015	Code of Federal Regulations – Telecommunications
RSS-247 Issue 1	2015	Digital Transmissions Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS-GEN Issue 4	2014	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing Unlicensed Wireless Devices

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample

END OF REPORT

Date	Version	Comments	Person
1-7-16	V0	Initial Draft Release	Adam A
1-21-16	V1	Final Version	Adam A

Prepared For: Midmark Corporation	Name: 5-200-0081 Radio Module
Report: TR 315108	Model: 5-200-0081
LSR: C-2289	Serial: Eng. Sample