



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 Fax: +86-755-26636041

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.225

Report Reference No.: **CTL1509252818-WF-02**

Compiled by:  
( position+printed name+signature) **Jacky Chen**  
(File administrators)

Tested by:  
( position+printed name+signature) **Allen Wang**  
(Test Engineer)

Approved by:  
( position+printed name+signature) **Tracy Qi**  
(Manager)

*Jacky Chen*

*Allen Wang*

*Tracy Qi*

**Product Name**: Bluetooth headset

**Model/Type reference**: Gear2S

**List Model(s)**: Gear1

**Trade Mark**: Sonyxer

**FCC ID**: 2AF7V-GEAR2S

**Applicant's name**: **Shenzhen Jedel Electronics Co., Ltd.**

**Address of applicant**: 908,KB Digital Market, Shipai West Road,Tianhe District, Guangzhou, China

**Test Firm**: **Shenzhen CTL Testing Technology Co., Ltd.**

**Address of Test Firm**: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

**Test specification**:

**Standard**: **FCC Part 15.225: Operation within the band 13.110–14.010 MHz.**

**TRF Originator**: Shenzhen CTL Testing Technology Co., Ltd.

**Master TRF**: Dated 2011-01

**Date of Receipt**: Sep. 26, 2015

**Date of Test Date**: Sep. 26, 2015–Oct. 09, 2015

**Data of Issue**: Oct. 10, 2015

**Result**: Positive

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

Test Report No. :	CTL1509252818-WF-02	Oct. 10, 2015 Date of issue
-------------------	---------------------	--------------------------------

Equipment under Test : Bluetooth headset

Model /Type : Gear2S

Listed Models : Gear1

Applicant : **Shenzhen Jedel Electronics Co., Ltd.**

Address : 908,KB Digital Market, Shipai West Road,Tianhe District, Guangzhou, China

Manufacturer : **Shenzhen Jedel Electronics Co., Ltd.**

Address : Floor 4, Building A, No.221, Shajing Wanfengzhong Rd, Baoan District, Shenzhen, China

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.


It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## \*\* Modified History \*\*



**Table of Contents**

	Page
<b>1. SUMMARY.....</b>	<b>5</b>
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY .....	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
<b>2. GENERAL INFORMATION.....</b>	<b>7</b>
2.1. ENVIRONMENTAL CONDITIONS .....	7
2.2. GENERAL DESCRIPTION OF EUT .....	7
2.3. EQUIPMENTS USED DURING THE TEST .....	7
2.4. DESCRIPTION OF PERIPHERAL DURING TESTING .....	8
2.5. RELATED SUBMITTAL(S) / GRANT (S).....	8
2.6. MODIFICATIONS.....	8
<b>3. TEST CONDITIONS AND RESULTS .....</b>	<b>9</b>
3.1. CONDUCTED EMISSION (AC MAIN) .....	9
3.2. RADIATED EMISSION .....	12
3.3. 20DB BANDWIDTH.....	15
3.4. FREQUENCY STABILITY TEST DATA.....	16
<b>4. EUT TEST PHOTO .....</b>	<b>18</b>
<b>5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>	<b>19</b>

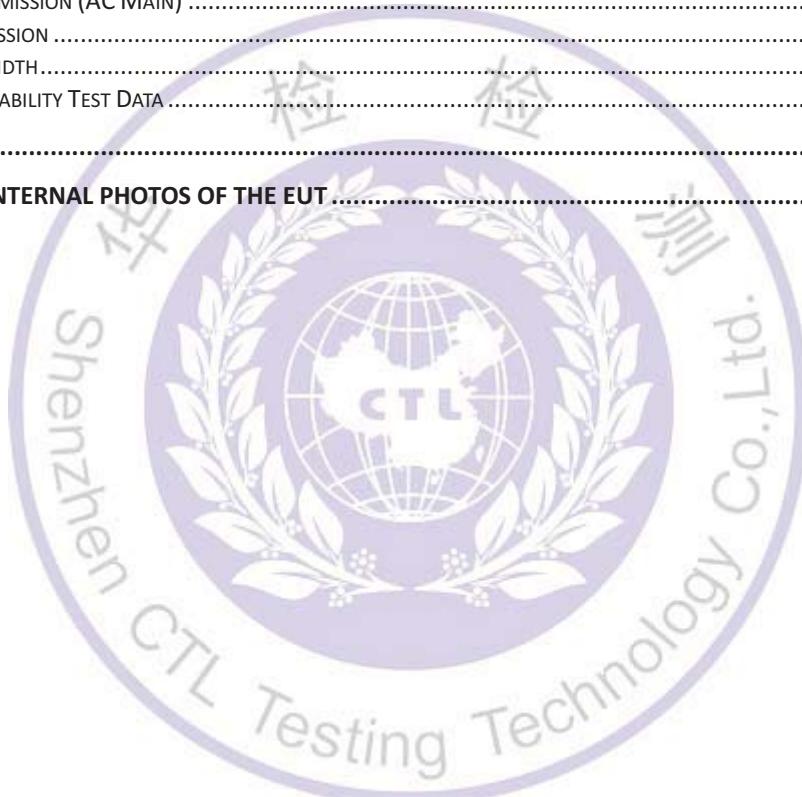

## 1. SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.225](#): Operation within the band 13.110–14.010 MHz

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2014](#): –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

### 1.2. Test Description

FCC PART 15 .225		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 2.1049	20dB Bandwidth	PASS
FCC Part 15.225(a) (b) (c)	In-band Emissions	PASS
FCC Part 15.225(d)/15.207	Out-of-band Emissions	PASS
FCC Part 15.225(e)	Frequency Stability Tolerance	PASS

Remark: The measurement uncertainty is not included in the test result.



## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

#### FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

## 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance 0.15~30MHz	±3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2. General Description of EUT

Product Name:	Bluetooth headset
Model/Type reference:	Gear2S
Power supply:	DC 3.7V from battery
<b>NFC</b>	
Operation frequency:	13.56MHz
Modulation :	ASK
No. of Channel :	1
Antenna type:	Loop Antenna

Note: For more details, please refer to the user's manual of the EUT.

### 2.3. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2015/05/20	2016/05/19

High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2015/05/20	2016/05/19
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-10M	10m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
RF Cable	Megalon	RF-A303	N/A	2015/06/02	2016/06/01

The calibration interval was one year

## 2.4. Description of Peripheral during Testing


No.	Product	Manufacturer	Model	Certification
1	Notebook PC	DELL	D630	FCC DOC

## 2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AF7V-GEAR2S filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.

## 2.6. Modifications

No modifications were implemented to meet testing criteria.

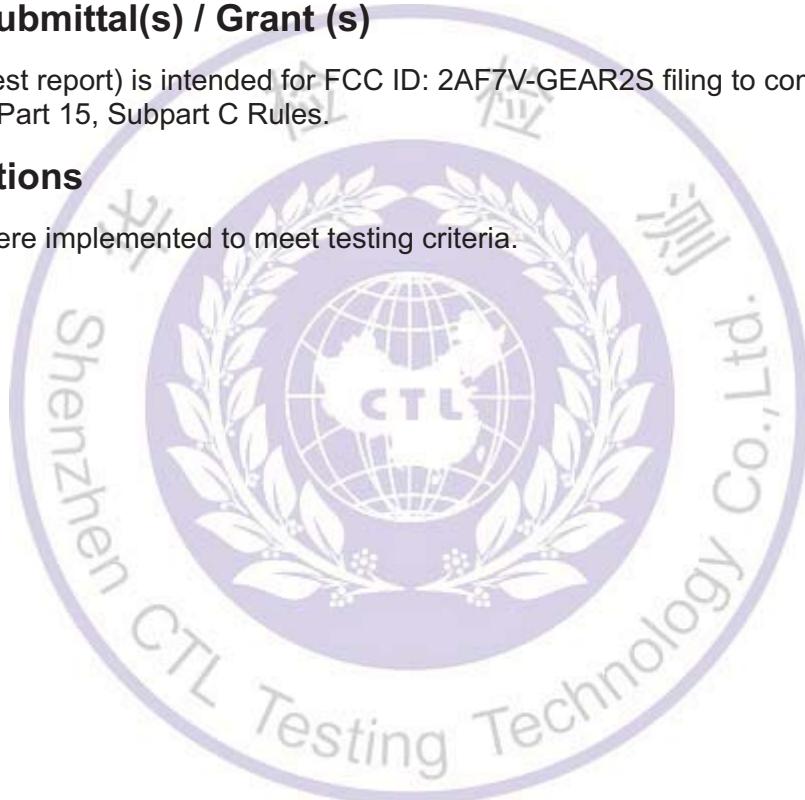

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emission (AC Main)


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.


##### TEST CONFIGURATION

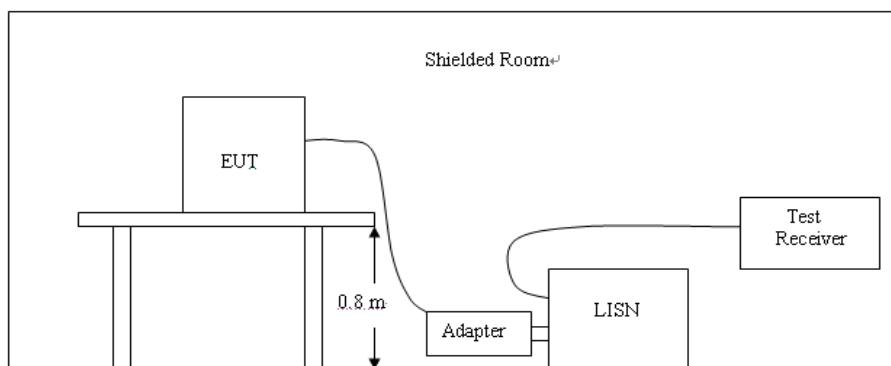

##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a flood stand system; a wooden table with a height of 0.1 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

##### TEST RESULTS

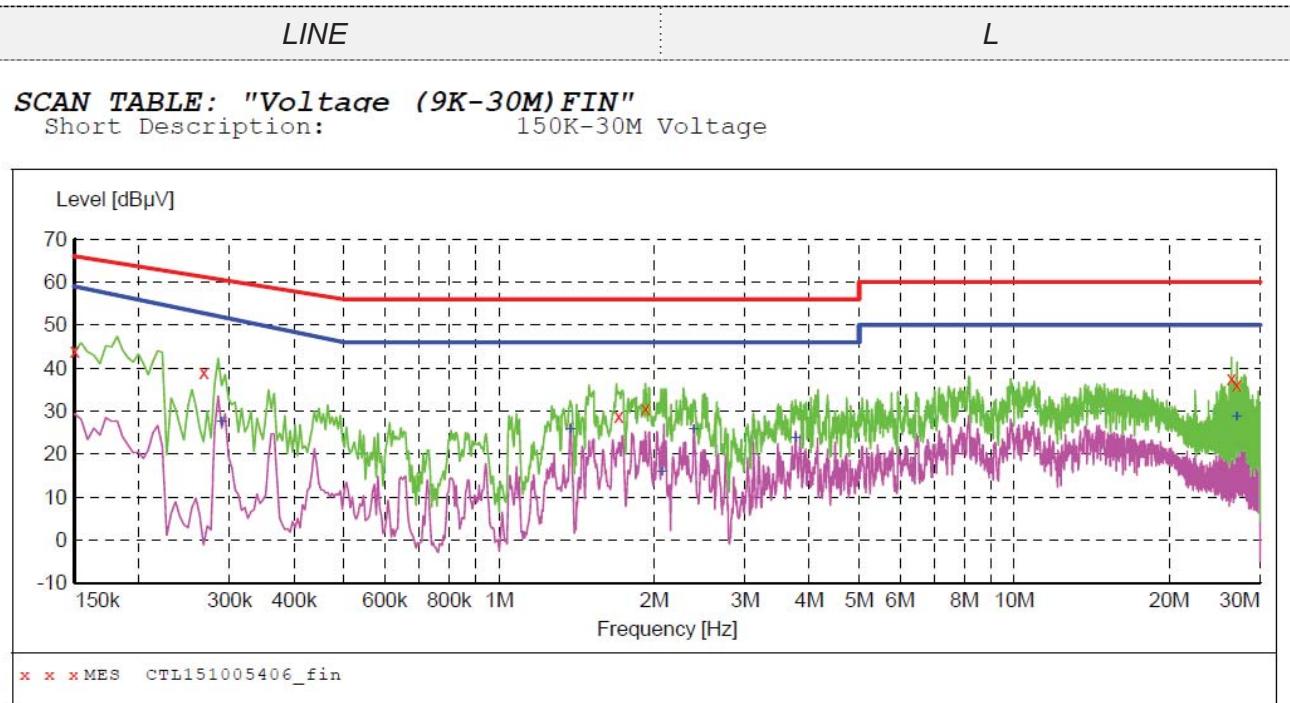

#### **MEASUREMENT RESULT: "CTL151005406\_fin"**

10/5/2015 2:29PM


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.150001	44.10	10.2	66	21.9	QP	L1	GND
0.267001	39.00	10.2	61	22.2	QP	L1	GND
1.707001	28.80	10.3	56	27.2	QP	L1	GND
1.923001	30.60	10.3	56	25.4	QP	L1	GND
26.412001	37.70	11.2	60	22.3	QP	L1	GND
27.073501	36.20	11.2	60	23.8	QP	L1	GND

#### **MEASUREMENT RESULT: "CTL151005406\_fin2"**

10/5/2015 2:29PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.289501	27.40	10.2	52	24.5	AV	L1	GND
1.374001	25.70	10.3	46	20.3	AV	L1	GND
2.071501	15.70	10.4	46	30.3	AV	L1	GND
2.386501	25.60	10.4	46	20.4	AV	L1	GND
3.763501	23.50	10.4	46	22.5	AV	L1	GND
27.015001	28.60	11.2	50	21.4	AV	L1	GND

**SCAN TABLE: "Voltage (9K-30M) FIN"**  
 Short Description: 150K-30M Voltage

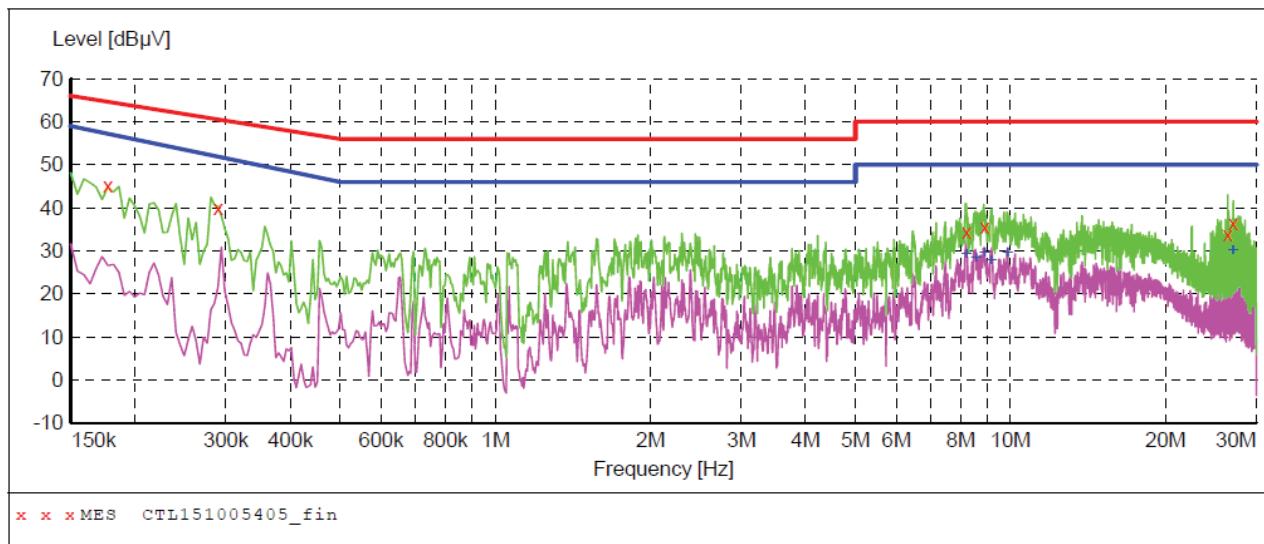

**MEASUREMENT RESULT: "CTL151005405\_fin"**

10/5/2015 2:25PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.177001	45.00	10.2	65	19.6	QP	N	GND
0.289501	39.90	10.2	61	20.6	QP	N	GND
8.227501	34.40	10.5	60	25.6	QP	N	GND
8.902501	35.40	10.6	60	24.6	QP	N	GND
26.416501	33.70	11.2	60	26.3	QP	N	GND
27.073501	36.50	11.2	60	23.5	QP	N	GND

**MEASUREMENT RESULT: "CTL151005405\_fin2"**

10/5/2015 2:25PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
8.196001	29.00	10.5	50	21.0	AV	N	GND
8.560501	28.40	10.6	50	21.6	AV	N	GND
8.884501	29.30	10.6	50	20.7	AV	N	GND
9.172501	27.50	10.6	50	22.5	AV	N	GND
9.861001	29.50	10.6	50	20.5	AV	N	GND
27.015001	30.10	11.2	50	19.9	AV	N	GND

### 3.2. Radiated Emission

#### Limit

- a The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.
- b Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d The field strength of any emissions appearing outside of the 13.110– 14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Frequency (MHz)	Distance (Meters)	Radiated (dBuV/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-13.110	3	69.54	30
13.110-13.410	3	80.50	106
13.410-13.553	3	90.47	334
13.553-13.567	3	124.00	15848
13.567-13.710	3	90.47	334
13.710-14.010	3	80.50	106
14.010-30.0	3	69.54	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

#### Test Procedure

1. The EUT was placed on 10cm wooden desk above ground plane which on a turn table.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	


For example

Frequency (MHz)	FS (dBuV/m)	RA (dBuV/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
150.00	40	58.1	12.2	1.6	31.90	-18.1


Transd=AF +CL-AG

### Test Configuration

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

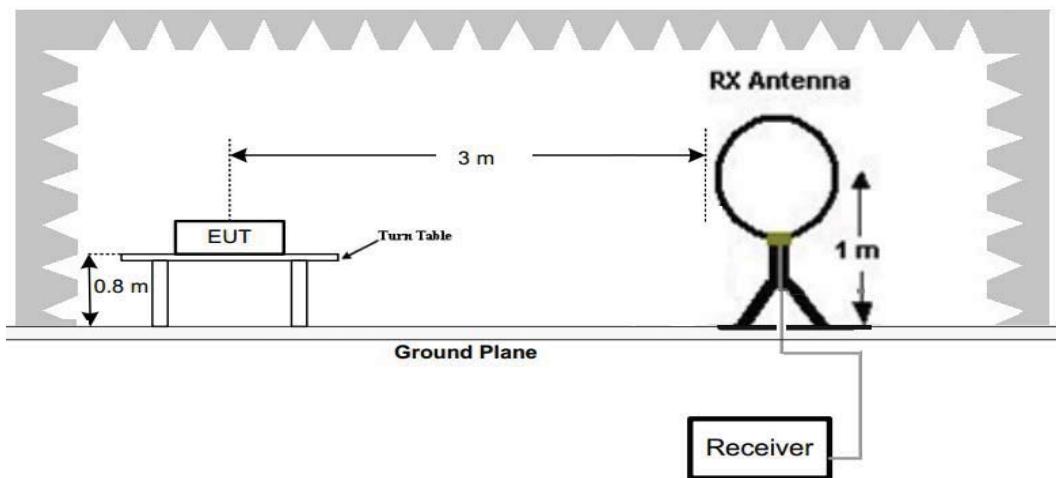

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

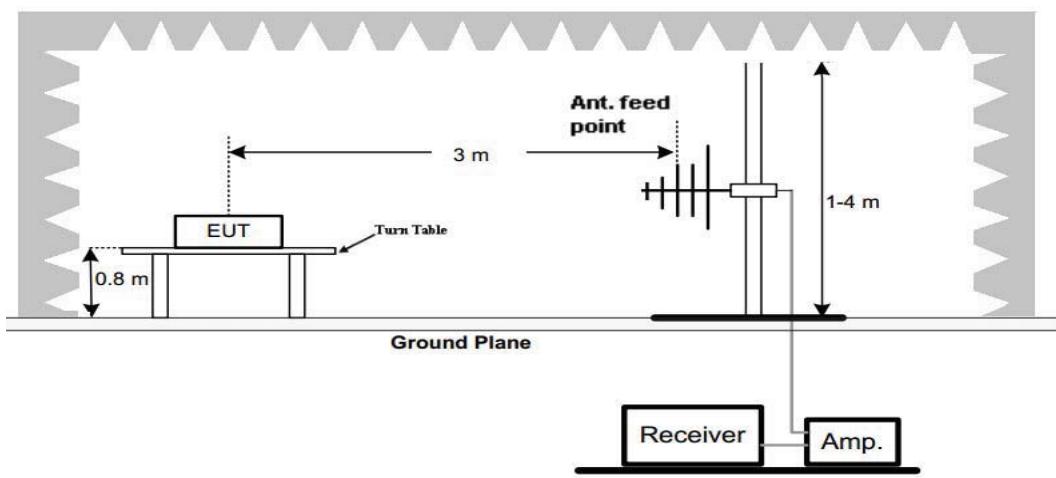

**Test Results****3.2.1 In-band Emissions**

Frequency(MHz):			13.56			Polarity:		HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Detector	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Correction Factor (dB/m)
1	13.15	41.30	PK	80.50	39.20	36.60	5.26	-0.56	4.70
2	13.55	49.26	PK	90.47	41.21	44.47	5.36	-0.57	4.79
3	13.56	86.58	PK	124.00	37.42	81.70	5.45	-0.57	4.88
4	13.57	48.69	PK	90.47	41.78	43.55	5.49	-0.35	5.14
5	13.75	40.20	PK	80.50	40.30	34.87	5.63	-0.30	5.33

Frequency(MHz):			13.56			Polarity:		VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Detector	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Correction Factor (dB/m)
1	13.15	41.26	PK	80.50	39.24	36.56	5.26	-0.56	4.70
2	13.55	49.33	PK	90.47	41.14	44.54	5.36	-0.57	4.79
3	13.56	87.25	PK	124.00	36.75	82.37	5.45	-0.57	4.88
4	13.57	49.20	PK	90.47	41.27	44.06	5.49	-0.35	5.14
5	13.75	40.69	PK	80.50	39.81	35.36	5.63	-0.30	5.33

**REMARKS:**

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)
3. Margin value = Limit value- Emission level.
4. The other emission levels were very low against the limit.

**3.2.2 Out-of-band Emissions**

Frequency(MHz):			13.56			Polarity:		HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Detector	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Correction Factor (dB/m)
1	27.12	35.69	PK	69.54	33.85	28.19	7.25	0.25	7.50
2	40.68	32.56	PK	40.00	7.44	23.75	8.25	0.56	8.81
3	54.24	28.24	PK	40.00	11.76	19.20	8.30	0.74	9.04
4	67.80	25.69	PK	40.00	14.31	16.16	8.55	0.98	9.53

Frequency(MHz):			13.56			Polarity:		VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Detector	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Correction Factor (dB/m)
1	27.12	36.25	PK	69.54	33.29	28.75	7.25	0.25	7.50
2	40.68	33.41	PK	40.00	6.59	24.60	8.25	0.56	8.81
3	54.24	30.26	PK	40.00	9.74	21.22	8.30	0.74	9.04
4	67.80	28.54	PK	40.00	11.46	19.01	8.55	0.98	9.53

**REMARKS:**

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)
3. Margin value = Limit value- Emission level.
4. The other emission levels were very low against the limit.

### 3.3. 20dB Bandwidth

#### Limit


No limit for 20dB bandwidth.

#### Test Procedure

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### Test Configuration

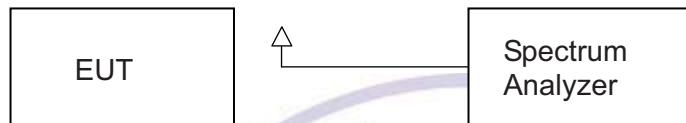

#### Test Results

Modulation	Frequency(MHz)	20dB bandwidth (MHz)	Result
ASK	CH00	0.276	Pass

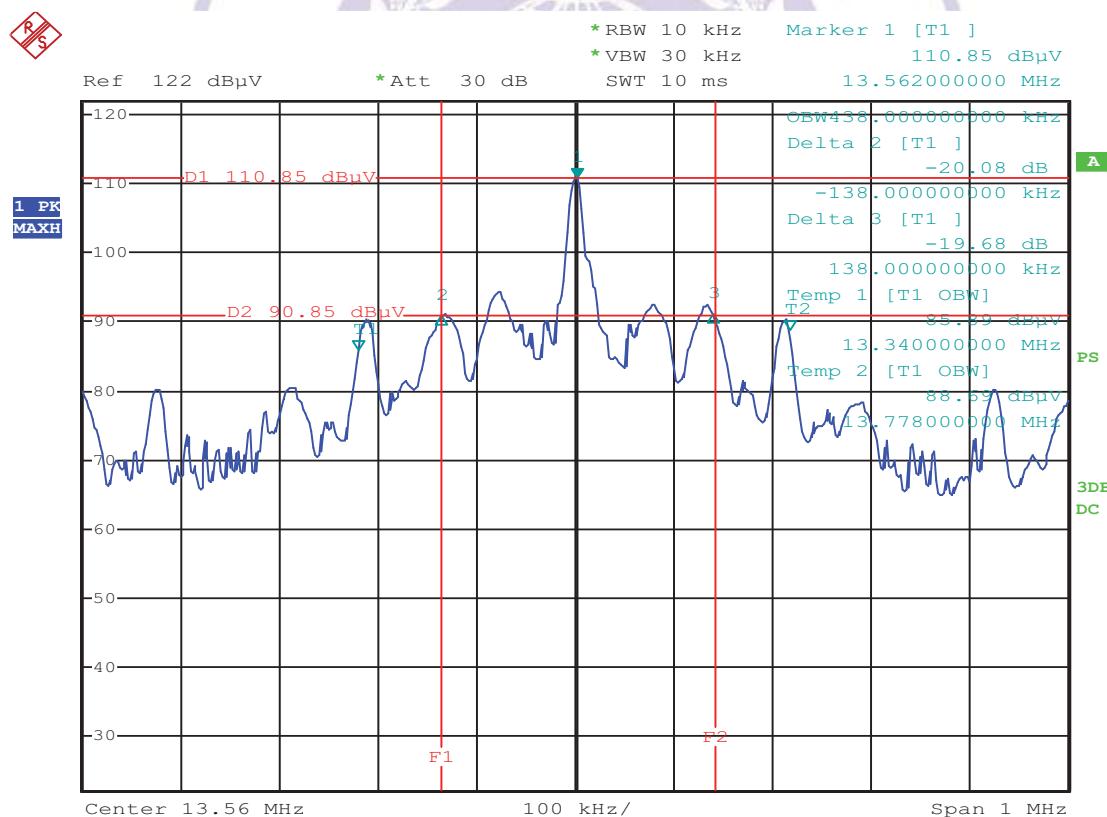


### 3.4. Frequency Stability Test Data

#### LIMIT

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

#### TEST CONFIGURATION

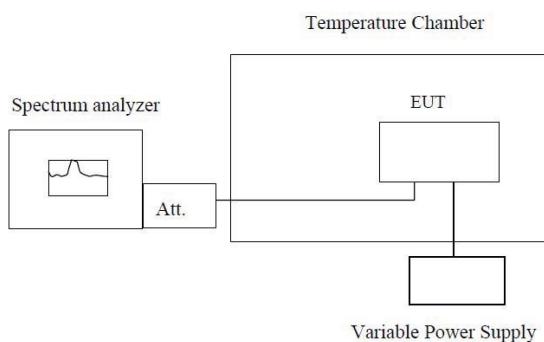

Note : Measurement setup for testing on Antenna connector

#### TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
7. Reduce the input voltage to specified extreme voltage variation (+/- 15%) or endpoint, record the maximum frequency change.

#### TEST RESULTS

Reference Frequency: 13.56MHz				
Voltage ( V )	Temperature (°C)	Frequency (Hz)	Frequency Deviation(Hz)	Deviation (%)
3.70	+20(Ref)	13,560,015	15	0.001106
	-20	13,560,026	26	0.001917
	-10	13,560,023	23	0.001696
	0	13,559,975	-25	-0.001844
	+10	13,560,010	10	0.000737
	+20	13,560,023	23	0.001696
	+25	13,560,014	14	0.001032
	+30	13,559,983	-17	-0.001254
	+40	13,559,975	-25	-0.001844
	+50	13,559,910	-90	-0.006637
4.225	+20	13,560,026	26	0.001917
3.145	+20	13,560,030	30	0.002212



## 4. EUT TEST PHOTO

Radiated Emission



检 检



Conducted Emission



## 5. External and Internal Photos of the EUT

Reference to the test report No. CTL1509252818-WF-01

\*\*\*\*\* End of Report \*\*\*\*\*

