


GAMESIR X5s

Wireless Game Controller

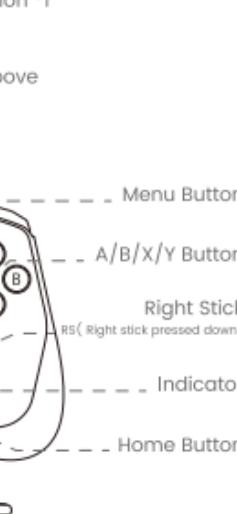

Scan the code for more tutorials ➔

<https://www.gamesir.com/pages/manuals-gamesir-x5s>


PACKAGE CONTENTS

X5s Controller *1 Type-C Cable (1 m) *1 Silicone Pad *2 User Manual *1
Thank You & After-sale Service Card *1 GameSir Sticker *1 Certification *1

COMPATIBILITY

• Android 8.0 or above • iOS 13 or above • Switch • Windows 10 or above

DEVICE LAYOUT

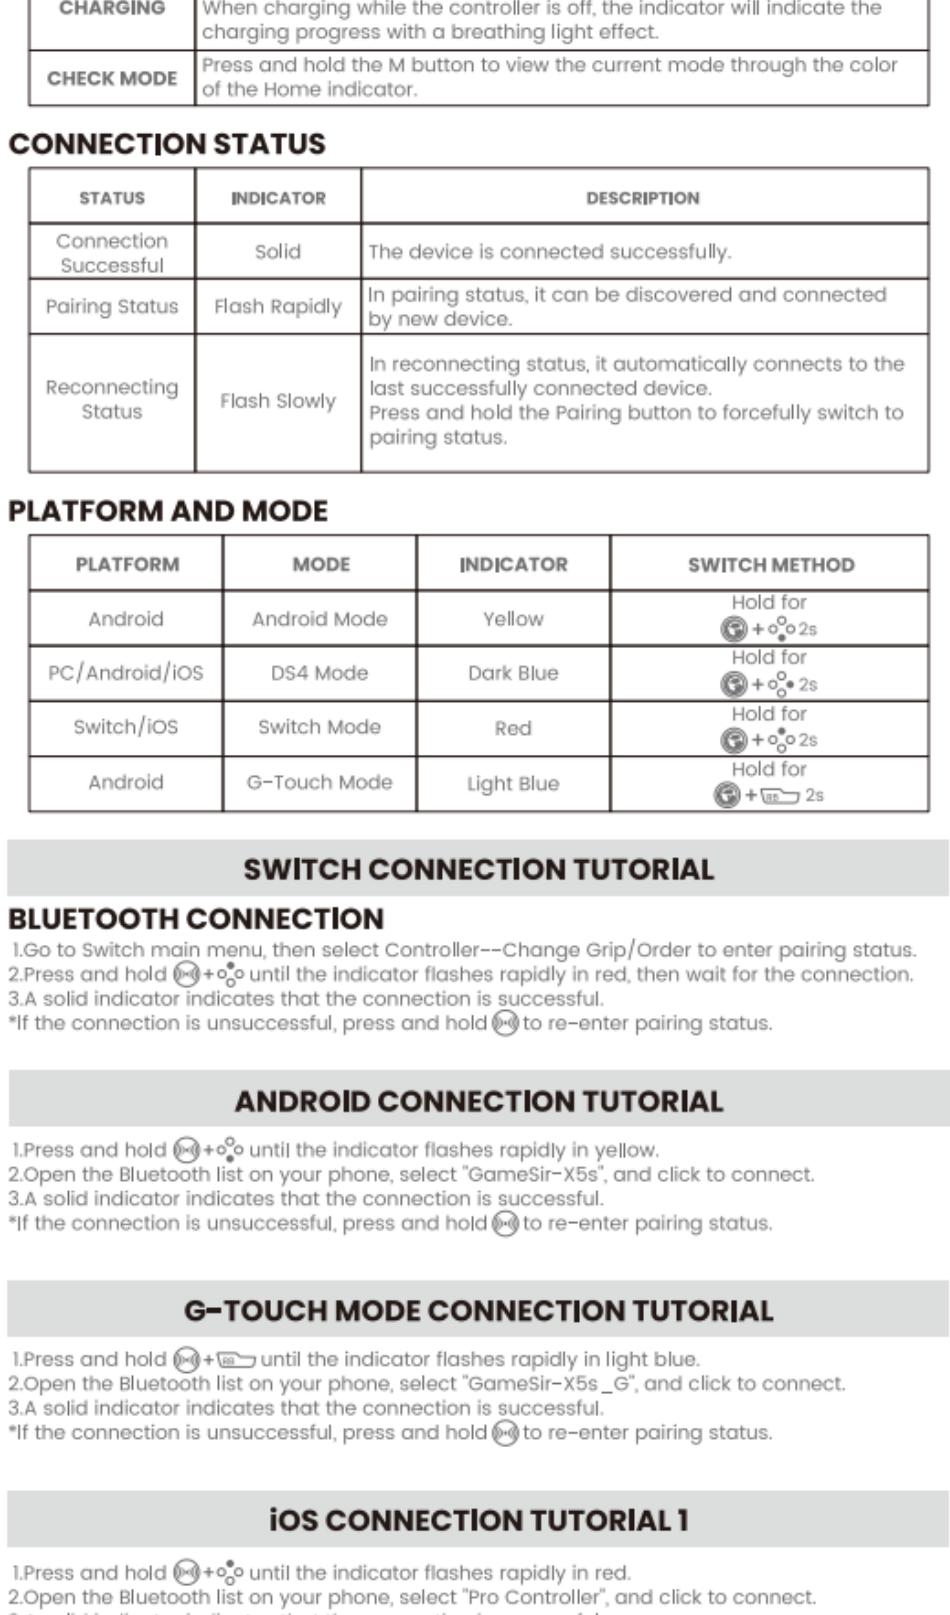

BASIC FUNCTION INTRODUCTION

BASIC OPERATION

POWER ON	Press and hold the Home button for 1 second when the controller is stretched or retracted.
POWER OFF	Press and hold the Home button for 5 seconds to power off.
STANDBY	The controller will automatically power off if there is no operation while in connection status for 10 minutes.
LOW BATTERY	When the battery is below 15%, the indicator will flash in red.
CHARGING	The controller can be charged via the Type-C cable. When charging while the controller is off, the indicator will indicate the charging progress with a breathing light effect.
CHECK MODE	Press and hold the M button to view the current mode through the color of the Home indicator.

CONNECTION STATUS

STATUS	INDICATOR	DESCRIPTION
Connection Successful	Solid	The device is connected successfully.
Pairing Status	Flash Rapidly	In pairing status, it can be discovered and connected by new device.
Reconnecting Status	Flash Slowly	In reconnecting status, it automatically connects to the last successfully connected device. Press and hold the Pairing button to forcefully switch to pairing status.

PLATFORM AND MODE

PLATFORM	MODE	INDICATOR	SWITCH METHOD
Android	Android Mode	Yellow	Hold for $\text{M} + \text{O}$ 2s
PC/Android/iOS	DS4 Mode	Dark Blue	Hold for $\text{M} + \text{O}$ 2s
Switch/iOS	Switch Mode	Red	Hold for $\text{M} + \text{O}$ 2s
Android	G-Touch Mode	Light Blue	Hold for $\text{M} + \text{O}$ 2s

SWITCH CONNECTION TUTORIAL

BLUETOOTH CONNECTION

1. Go to Switch main menu, then select Controller—Change Grip/Order to enter pairing status.

2. Press and hold $\text{M} + \text{O}$ until the indicator flashes rapidly in red, then wait for the connection.

3. A solid indicator indicates that the connection is successful.

*If the connection is unsuccessful, press and hold M to re-enter pairing status.

ANDROID CONNECTION TUTORIAL

1. Press and hold $\text{M} + \text{O}$ until the indicator flashes rapidly in yellow.

2. Open the Bluetooth list on your phone, select "GameSir-X5s", and click to connect.

3. A solid indicator indicates that the connection is successful.

*If the connection is unsuccessful, press and hold M to re-enter pairing status.

G-TOUCH MODE CONNECTION TUTORIAL

1. Press and hold $\text{M} + \text{O}$ until the indicator flashes rapidly in light blue.

2. Open the Bluetooth list on your phone, select "GameSir-X5s_G", and click to connect.

3. A solid indicator indicates that the connection is successful.

*If the connection is unsuccessful, press and hold M to re-enter pairing status.

IOS CONNECTION TUTORIAL 1

1. Press and hold $\text{M} + \text{O}$ until the indicator flashes rapidly in red.

2. Open the Bluetooth list on your phone, select "Pro Controller", and click to connect.

3. A solid indicator indicates that the connection is successful.

*If the connection is unsuccessful, press and hold M to re-enter pairing status.

IOS CONNECTION TUTORIAL 2

1. Press and hold $\text{M} + \text{O}$ until the indicator flashes rapidly in dark blue.

2. Open the Bluetooth list on your phone, select "DUOLSHOK 4 Wireless Controller", and click to connect.

3. A solid indicator indicates that the connection is successful.

*If the connection is unsuccessful, press and hold M to re-enter pairing status.

CONNECT TO A DEVICE VIA WIRED CONNECTION

1. Use the included Type-C cable to connect, and the controller will automatically recognize the device.

2. After connecting, the controller will automatically switch to the corresponding mode and can be used normally. Press and hold $\text{M} + \text{O}$ to switch between Xbox/Switch/DS4 mode in sequence.

*For Switch: After connecting to the Switch via wired connection, go to "System Settings - Controllers and Sensors - Pro Controller Wired Communication" and enable this feature.

*This mode switching method is only supported when using a receiver or a wired connection.

ADVANCED TUTORIAL

BUTTON COMBINATION FUNCTION

FUNCTION	BUTTON COMBINATION	DESCRIPTION
Toggle Stick's Dead Zone	$(\text{M}) + \text{LS/RS}$	Press and hold the M button and push down on the left/right stick to toggle the corresponding dead zone.
Activate Turbo Function	$(\text{M}) + \text{Button}$	While holding the M button, press A/B/X/Y/L/R/RT to activate the Turbo function for that button. Repeat this operation to deactivate. 2 seconds to clear all Turbo settings.
Adjust Vibration Intensity	$(\text{M}) + \text{+/-}$	While holding the M button, press D-pad Up/Down to increase/decrease the vibration intensity level.
Toggle Hair Trigger Mode	$(\text{M}) + \text{L1/R1}$	Press and hold the M button + L1/R1 trigger to toggle the hair trigger mode.
Switch Layout	$(\text{M}) + \text{O}$	Press and hold the M button and A button to swap button values of A-B and X-Y.
Adjust Volume	$(\text{M}) + \text{+/-}$	While holding the Home button, press D-pad Up/Down to increase/decrease volume. *Only works in Android mode.

CALIBRATION

1. Hold $\text{M} + \text{O}$ simultaneously. At this point, push both sticks all the way to their limits and rotate them 2-3 times. Press both triggers fully down with appropriate pressure for 3 times. Finally, press O to exit.

The indicator will return to its normal state.

2. Place the controller on a stable, flat surface. Hold $\text{M} + \text{O}$ simultaneously, and the gyroscope will automatically begin calibration. During calibration, the indicator will flash in red and blue alternately.

3. When the indicator returns to its original light effect, the calibration is complete.

*If you have any quality concerns or suggestions, please contact GameSir or your local distributor.

STICKS & TRIGGERS

Hold $\text{M} + \text{O}$ simultaneously. At this point, push both sticks all the way to their limits and rotate them 2-3 times. Press both triggers fully down with appropriate pressure for 3 times. Finally, press O to exit.

The indicator will return to its normal state.

4. Place the controller on a stable, flat surface. Hold $\text{M} + \text{O}$ simultaneously, and the gyroscope will automatically begin calibration. During calibration, the indicator will flash in red and blue alternately.

5. When the indicator returns to its original light effect, the calibration is complete.

*If you have any quality concerns or suggestions, please contact GameSir or your local distributor.

SILICONE PAD REPLACEMENT

The pad thickness based on swappable device pad design, on both sides, allowing users to customize the silicone pad faces upward and the thinner side faces downward.

1. For devices like mobile phones, use the $\text{L} + \text{R}$ silicone pads based on the camera size.

2. For devices like Switch, use the $\text{L} + \text{R}$ silicone pads based on the camera size.

3. Aligning off the edges of the silicone pads fit securely against the controller to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.

*The layout of the silicone pads is designed to prevent them from falling off.