



FCC TEST REPORT

FCC PART 15 SUBPART C 15.249

Test report
On Behalf of
King-Sound Electronic & Technology Co., Ltd.
For
Foldable Rubberized Wireless Headphones

Model No.: MI-BTH16

FCC ID: 2AFCE-MI-BTH16

Prepared for : King-Sound Electronic & Technology Co., Ltd.
No.2, XianShuiHu Road, ShiJin, PinShan, ShenZhen, China.

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai
Street, Bao'an District, Shenzhen City, China

Date of Test: Oct. 18, 2018 ~ Nov. 02, 2018
Date of Report: Nov. 08, 2018
Report Number: HK1809271169E



TEST RESULT CERTIFICATION

Applicant's name King-Sound Electronic & Technology Co., Ltd.

Address No.2, XianShuiHu Road, ShiJin, PinShan, ShenZhen, China.

Manufacture's Name King-Sound Electronic & Technology Co., Ltd.

Address No.2, XianShuiHu Road, ShiJin, PinShan, ShenZhen, China.

Factory's Name King-Sound Electronic & Technology Co., Ltd.

Address No.2, XianShuiHu Road, ShiJin, PinShan, ShenZhen, China.

Product description

Trade Mark: MERKURY

Product name Foldable Rubberized Wireless Headphones

Model and/or type reference ... MI-BTH16

Standards FCC Rules and Regulations Part 15 Subpart C Section 15.249

ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material.

Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test.....:

Date (s) of performance of tests.....: Oct. 18, 2018 ~ Nov. 02, 2018

Date of Issue.....: Nov. 07, 2018

Test Result.....: **Pass**

Testing Engineer

:

(Gary Qian)

Technical Manager

:

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



Table of Contents	Page
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 OPERATION OF EUT DURING TESTING	6
2.3 DESCRIPTION OF TEST SETUP	7
2.4 MEASUREMENT INSTRUMENTS LIST	8
3. RADIATED EMISSION	9
3.1. MEASUREMENT PROCEDURE	9
3.2. TEST SETUP	11
3.3. TEST RESULT	12
4. BAND EDGE EMISSION	18
4.1. MEASUREMENT PROCEDURE	18
4.2 TEST SETUP	18
4.3 RADIATED TEST RESULT	19
5. BANDWIDTH	23
5.1. MEASUREMENT PROCEDURE	23
5.2. TEST SETUP	23
5.3. TEST RESULT	24
6. FCC LINE CONDUCTED EMISSION TEST	28
6.1. LIMITS OF LINE CONDUCTED EMISSION TEST	28
6.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	28
6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	29
6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	29
6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	30
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	32
APPENDIX B: PHOTOGRAPHS OF EUT	35



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249&15.209	Band Edges Emission	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Compliant

1.2 TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,
Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Operation Frequency	2.402 GHz to 2.480GHz
Maximum field strength	91.86dBuV/m(AV)@3m
Bluetooth Version	V4.2
Modulation	GFSK, $\pi/4$ -DQPSK for BR/EDR
Number of channels	79 for BR/EDR
Antenna Gain	-58dBi
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Hardware Version	1.0
Software Version	1.0
Power Supply	DC 3.7V by adapter

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ



2.2 OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK


Note:

1. Only the data of the worst case recorded in the test report.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.




2.3 DESCRIPTION OF TEST SETUP

Configure 1: (Normal hopping)

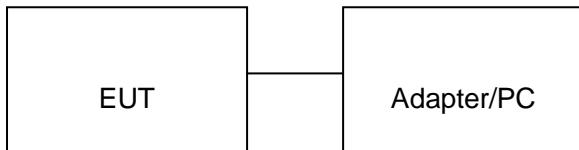

Note: Owing to the EUT has own battery, and testing may be performed while adapter or PC removed.

Configure 2: (Control continuous TX)

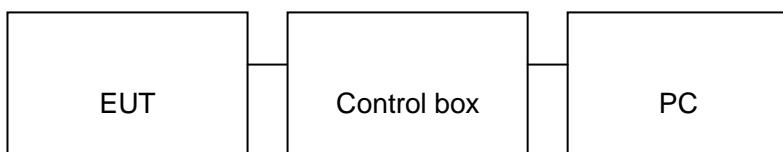

2.4. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Wireless Speaker Bottle	HONGLIANG	HL8478	EUT
2	Battery	DL	502030	Accessory
3	PC	APPLE	A1465	A.E
	IPOD	APPLE	A1367	A.E
4	Control box	GZUT	N/A	A.E
5	Adapter	IPRO	NTR-S01	A.E
6	USB Cable	N/A	1.0m unshielded	A.E



2.5. MEASUREMENT INSTRUMENTS LIST

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year

TEST EQUIPMENT OF RADIATED EMISSION TEST

Item	Equipment	Manufacturer	Model No.	Lab Equipment No.	Last Cal.	Cal. Interval
1.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
2.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
5.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
6.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
7.	Broad-band Horn Antenna	A-INFOMW	LB-180400-KF	HKE-031	Dec. 28, 2017	1 Year
8.	Pre-amplifier	EMCI	EMC051845SE	HKE-015	Dec. 28, 2017	1 Year
9.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
10.	Filter (2.4-2.483GHz)	Micro-tronics	087	--	N/A	N/A
11.	Radiation Cable 1	MXT	HK1	R05	N/A	N/A
12.	Radiation Cable 2	MXT	HK1	R06	N/A	N/A



3. RADIATED EMISSION

3.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.



The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/5MHz for Peak, 1.5MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP

Test limit for Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Test limit for Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB(μ V)/m (Peak)	54.0 dB(μ V)/m (Average)


Remark: (1) Emission level $dB\mu$ V = $20 \log$ Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.


(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

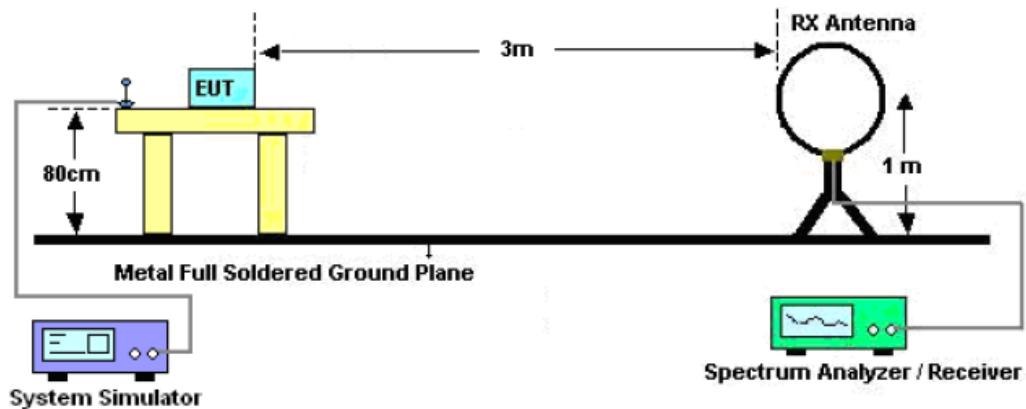

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

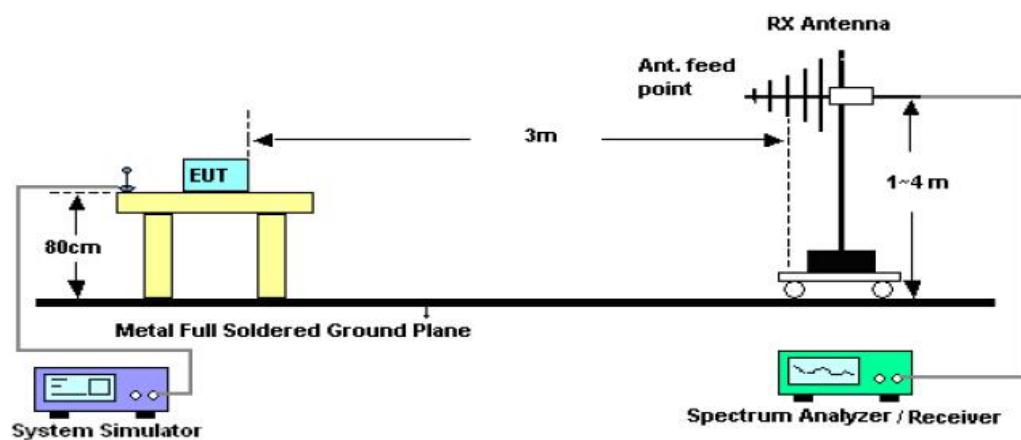

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

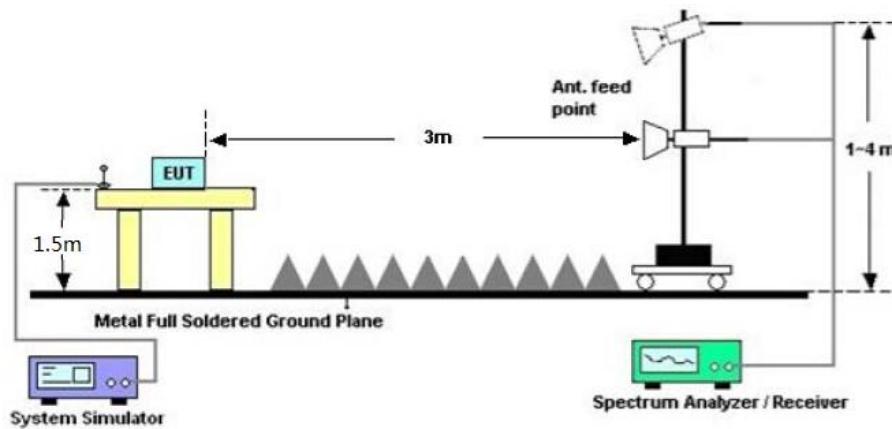




3.3. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


RADIATED EMISSION 30MHz- 1GHZ FOR BR/EDR

EUT :	Foldable Rubberized Wireless Headphones	Model Name. :	MI-BTH16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Horizontal

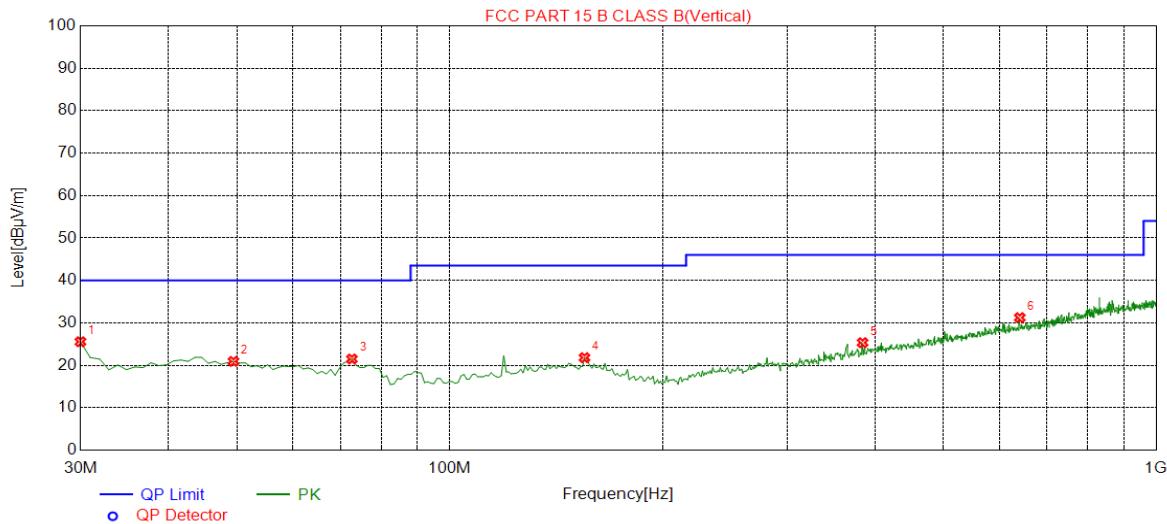

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.0000	25.55	12.59	40.00	14.45	100	45	Vertical
2	49.4000	20.92	14.36	40.00	19.08	200	179	Vertical
3	72.6800	21.49	11.27	40.00	18.51	150	187	Vertical
4	155.130	21.81	14.26	43.50	21.69	100	97	Vertical
5	384.050	25.33	18.06	46.00	20.67	150	227	Vertical
6	641.100	31.23	23.54	46.00	14.77	150	278	Vertical

EUT :	Foldable Rubberized Wireless Headphones	Model Name. :	MI-BTH16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Vertical

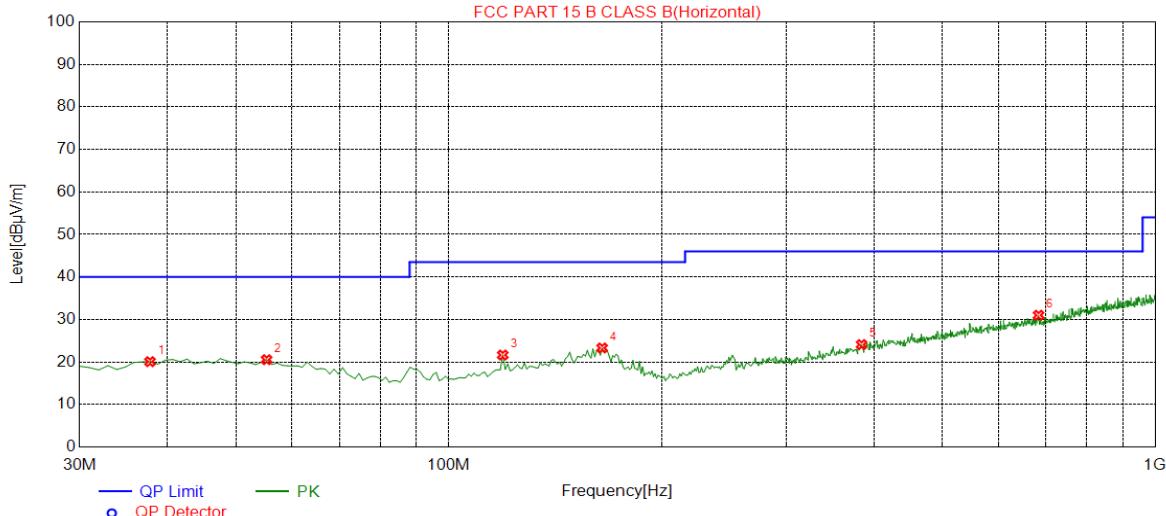

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.7600	20.08	14.11	40.00	19.92	150	63	Horizontal
2	55.2200	20.54	13.92	40.00	19.46	200	166	Horizontal
3	119.240	21.64	12.82	43.50	21.86	150	176	Horizontal
4	164.830	23.30	13.78	43.50	20.20	200	111	Horizontal
5	384.050	24.10	18.06	46.00	21.90	100	358	Horizontal
6	683.780	31.00	24.19	46.00	15.00	100	62	Horizontal

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The mode 1 is the worst case, and only the data of the worst case recorded in this test report.



FIELD STRENGTH OF FUNDAMENTAL FOR BR/EDR

EUT :	Foldable Rubberized Wireless Headphones	Model Name. :	MI-BTH16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Modulation :	GFSK	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
						peak
2402.021	78.40	13.46	91.86	114	-22.14	AVG
2402.021	71.36	13.46	84.82	94	-9.18	peak
2441.021	77.40	13.88	91.28	114	-22.72	AVG
2441.021	70.41	13.88	84.29	94	-9.71	peak
2480.021	76.59	14.11	90.70	114	-23.30	AVG
2480.021	69.77	14.11	83.88	94	-10.12	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Foldable Rubberized Wireless Headphones	Model Name. :	MI-BTH16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Modulation :	GFSK	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
						peak
2402.021	78.19	13.46	91.65	114	-22.35	AVG
2402.021	71.12	13.46	84.58	94	-9.42	peak
2441.021	77.05	13.88	90.93	114	-23.07	AVG
2441.021	70.21	13.88	84.09	94	-9.91	peak
2480.021	76.30	14.11	90.41	114	-23.59	AVG
2480.021	69.48	14.11	83.59	94	-10.41	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Foldable Rubberized Wireless Headphones	Model Name. :	MI-BTH16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Modulation :	$\pi/4$ -DQPSK	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
2402.021	77.92	13.46	91.38	114	-22.62	peak
2402.021	70.91	13.46	84.37	94	-9.63	AVG
2441.021	76.91	13.88	90.79	114	-23.21	peak
2441.021	70.00	13.88	83.88	94	-10.12	AVG
2480.021	76.14	14.11	90.25	114	-23.75	peak
2480.021	69.33	14.11	83.44	94	-10.56	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Foldable Rubberized Wireless Headphones	Model Name. :	MI-BTH16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Modulation :	$\pi/4$ -DQPSK	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
2402.021	77.79	13.46	91.25	114	-22.75	peak
2402.021	70.64	13.46	84.10	94	-9.90	AVG
2441.021	76.64	13.88	90.52	114	-23.48	peak
2441.021	69.72	13.88	83.60	94	-10.40	AVG
2480.021	75.87	14.11	89.98	114	-24.02	peak
2480.021	68.99	14.11	83.10	94	-10.90	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**RADIATED EMISSION ABOVE 1GHZ FOR BR/EDR**

EUT :	Foldable Rubberized Wireless Headphones		Model Name. :	MI-BTH16	
Temperature :	20 °C		Relative Humidity :	48%	
Pressure :	1010 hPa		Test Voltage :	DC 3.7V	
Test Mode :	Mode 1		Polarization :	Horizontal	

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Margin (dB)	Value Type
4804.042	42.39	7.12	49.51	74	-24.49	peak
4804.042	39.25	7.12	46.37	54	-7.63	AVG
7206.063	38.46	9.84	48.3	74	-25.7	peak
7206.063	37.22	9.84	47.06	54	-6.94	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Foldable Rubberized Wireless Headphones		Model Name. :	MI-BTH16	
Temperature :	20 °C		Relative Humidity :	48%	
Pressure :	1010 hPa		Test Voltage :	DC 3.7V	
Test Mode :	Mode 1		Polarization :	Vertical	

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Margin (dB)	Value Type
4804.042	41.26	7.12	48.38	74	-25.62	peak
4804.042	39.33	7.12	46.45	54	-7.55	AVG
7206.063	38.31	9.84	48.15	74	-25.85	peak
7206.063	37.54	9.84	47.38	54	-6.62	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Foldable Rubberized Wireless Headphones		Model Name. :	MI-BTH16	
Temperature :	20 °C		Relative Humidity :	48%	
Pressure :	1010 hPa		Test Voltage :	DC 3.7V	
Test Mode :	Mode 2		Polarization :	Horizontal	

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
4804.042	42.34	7.12	49.46	74	-24.54	peak
4804.042	38.74	7.12	45.86	54	-8.14	AVG
7206.063	38.93	9.84	48.77	74	-25.23	peak
7206.063	38.26	9.84	48.1	54	-5.9	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Foldable Rubberized Wireless Headphones		Model Name. :	MI-BTH16	
Temperature :	20 °C		Relative Humidity :	48%	
Pressure :	1010 hPa		Test Voltage :	DC 3.7V	
Test Mode :	Mode 2		Polarization :	Vertical	

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
4804.042	39.76	7.12	46.88	74	-27.12	peak
4804.042	38.64	7.12	45.76	54	-8.24	AVG
7206.063	38.22	9.84	48.06	74	-25.94	peak
7206.063	35.04	9.84	44.88	54	-9.12	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Note: Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

The GFSK modulation was the worst case and only the data of worst recorded in this report.


4. BAND EDGE EMISSION

4.1. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz , Sweep=AUTO
(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1kHz), Sweep=AUTO
3. Other procedures refer to clause 3.1.

4.2 TEST SETUP

RADIATED EMISSION TEST SETUP

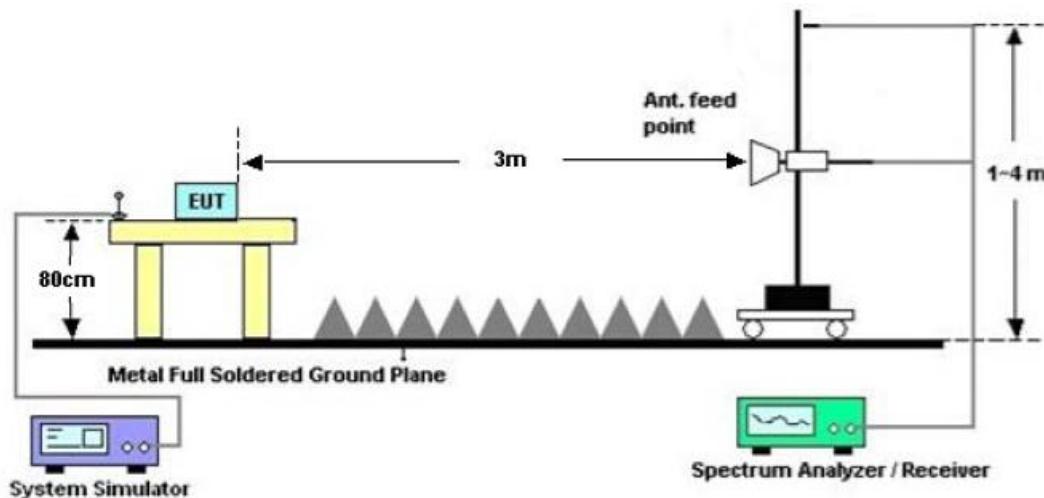




4.3 RADIATED TEST RESULT

FOR BR/EDR

(Worst modulation: GFSK)


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

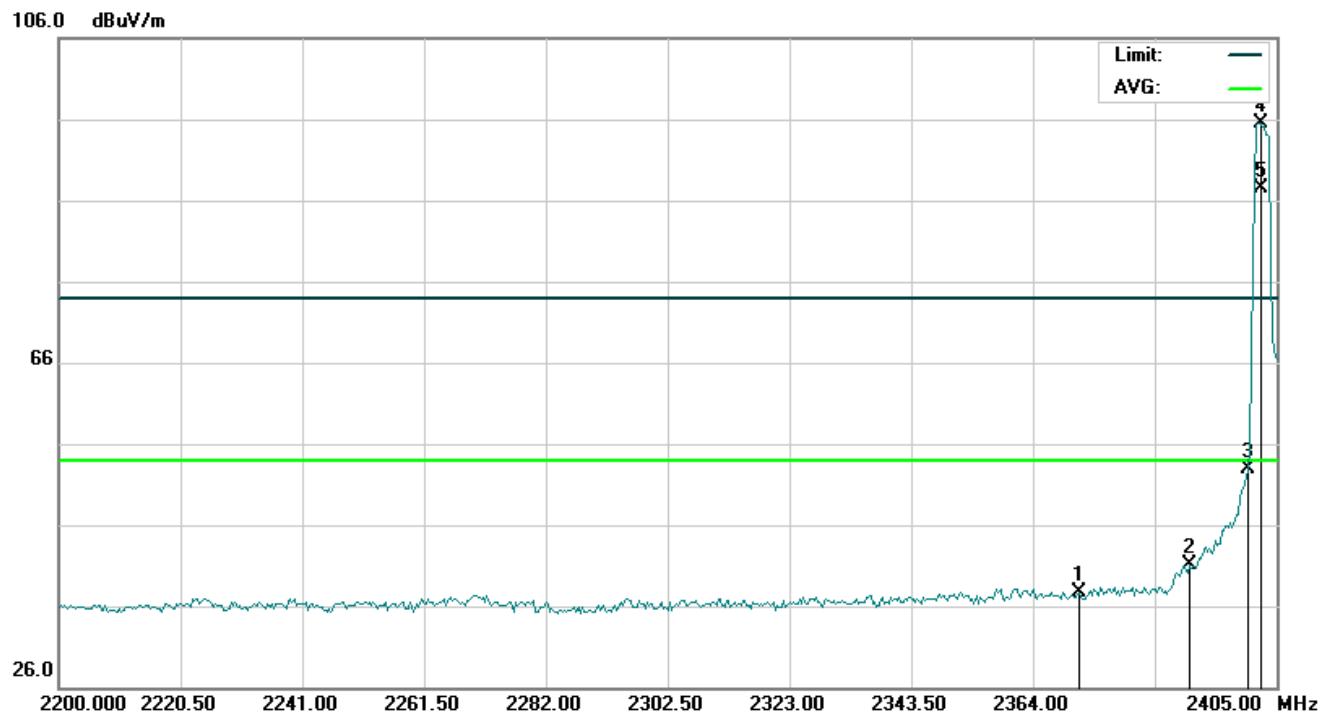

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2371.858	24.26	13.46	37.72	74.00	-36.28	peak			
2		2390.000	27.67	13.46	41.13	74.00	-32.87	peak			
3		2400.000	39.44	13.46	52.90	74.00	-21.10	peak			
4	X	2402.000	82.09	13.46	95.55	74.00	21.55	peak			
5	*	2402.000	74.11	13.46	87.57	54.00	33.57	AVG	100	141	



TEST PLOT OF BAND EDGE FOR LOW CHANNEL –Vertical

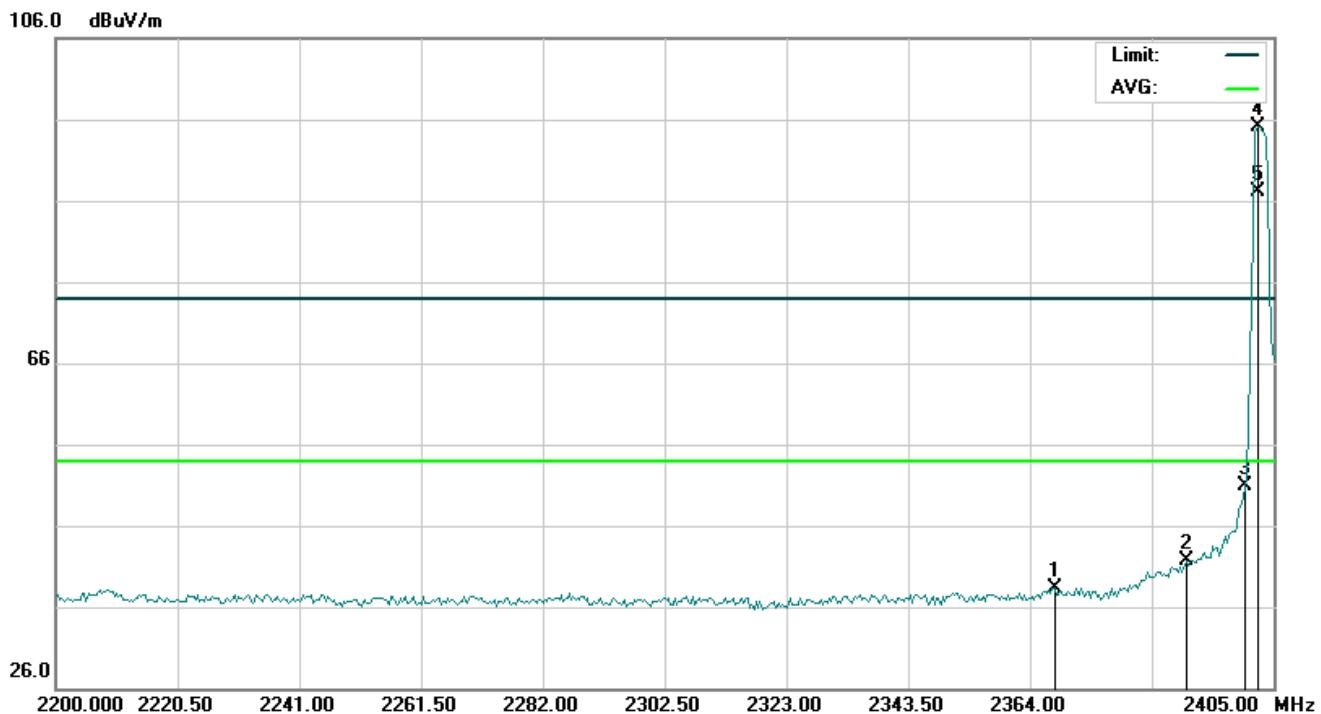

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2368.100	24.89	13.46	38.35	74.00	-35.65	peak			
2		2390.000	28.17	13.46	41.63	74.00	-32.37	peak			
3		2400.000	37.44	13.46	50.90	74.00	-23.10	peak			
4	X	2402.000	81.59	13.46	95.05	74.00	21.05	peak			
5	*	2402.000	73.66	13.46	87.12	54.00	33.12	AVG	100	246	



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL –Horizontal



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	X	2480.000	77.78	14.11	91.89	74.00	17.89	peak			
2	*	2480.000	69.64	14.11	83.75	54.00	29.75	AVG	100	145	
3		2483.500	25.66	14.13	39.79	74.00	-34.21	peak			
4		2484.967	24.26	14.14	38.40	74.00	-35.60	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	X	2480.000	77.17	14.11	91.28	74.00	17.28	peak			
2	*	2480.000	69.13	14.11	83.24	54.00	29.24	AVG	100	221	
3		2483.500	22.72	14.13	36.85	74.00	-37.15	peak			
4		2485.517	22.53	14.14	36.67	74.00	-37.33	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

5. BANDWIDTH

5.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Set the EUT Work on the operation frequency individually.
3. Set Span = approximately 2 to 5 times the OBW, centered on a hoping channel
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately 3* RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

5.2. TEST SETUP

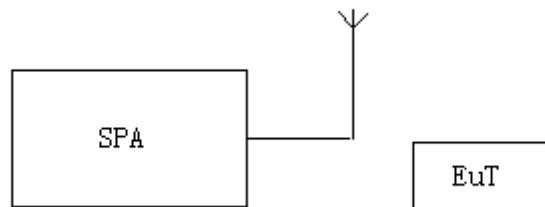


5.3. TEST RESULT

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK for BR/EDR


Test Data (MHz)		Criteria
Low Channel	1.070	PASS
Middle Channel	1.060	PASS
High Channel	1.070	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

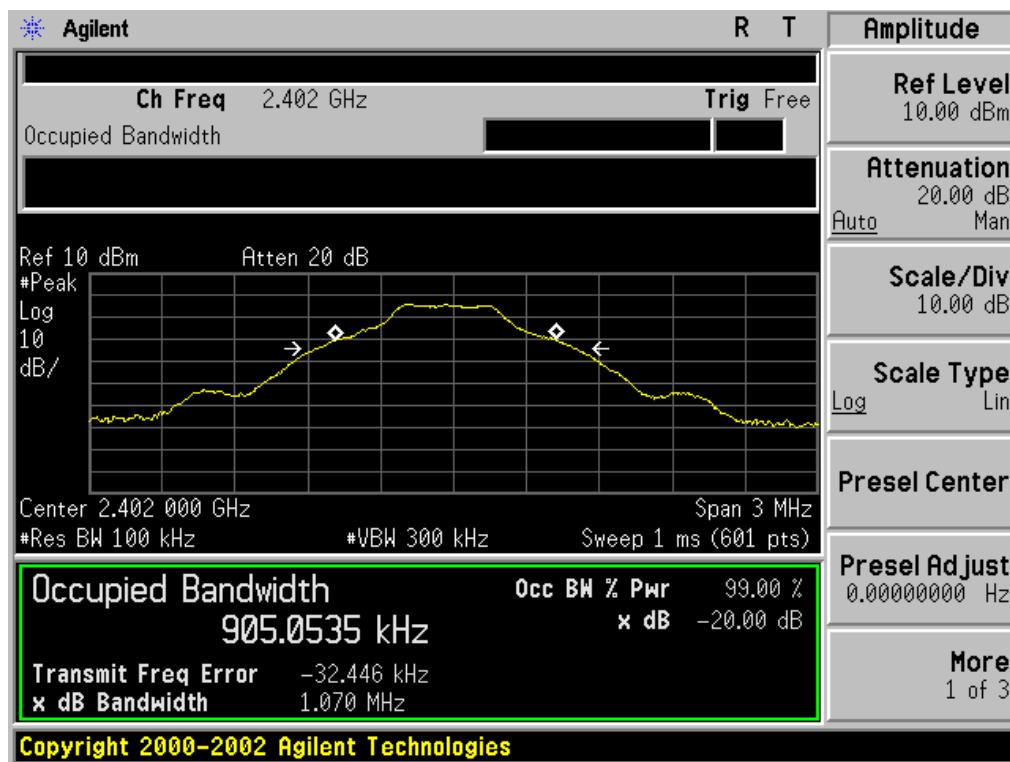




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

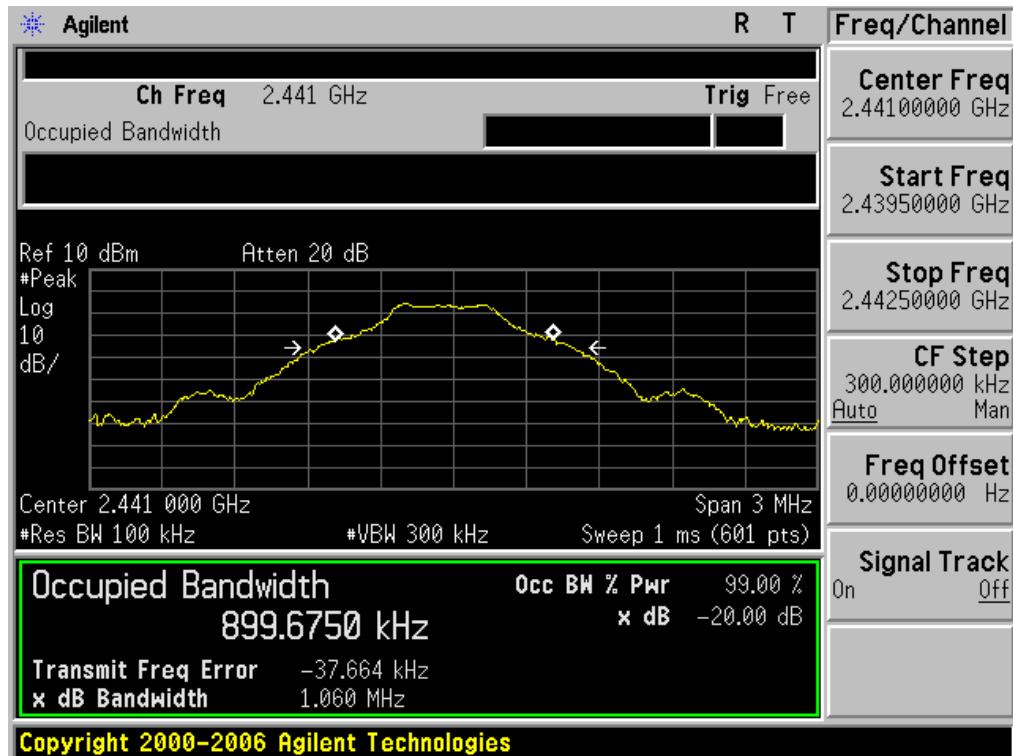

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

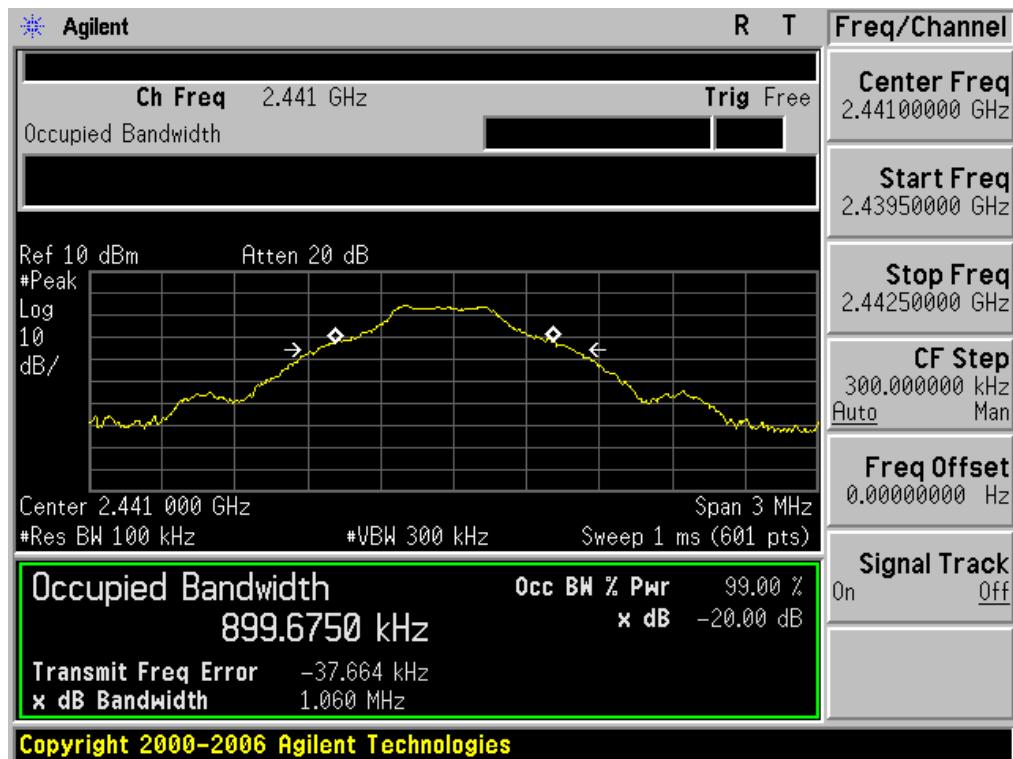




TEST ITEM	20DB BANDWIDTH
TEST MODULATION	$\pi/4$ -DQPSK for BR/EDR


Test Data (MHz)		Criteria
Low Channel	1.365	PASS
Middle Channel	1.366	PASS
High Channel	1.353	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

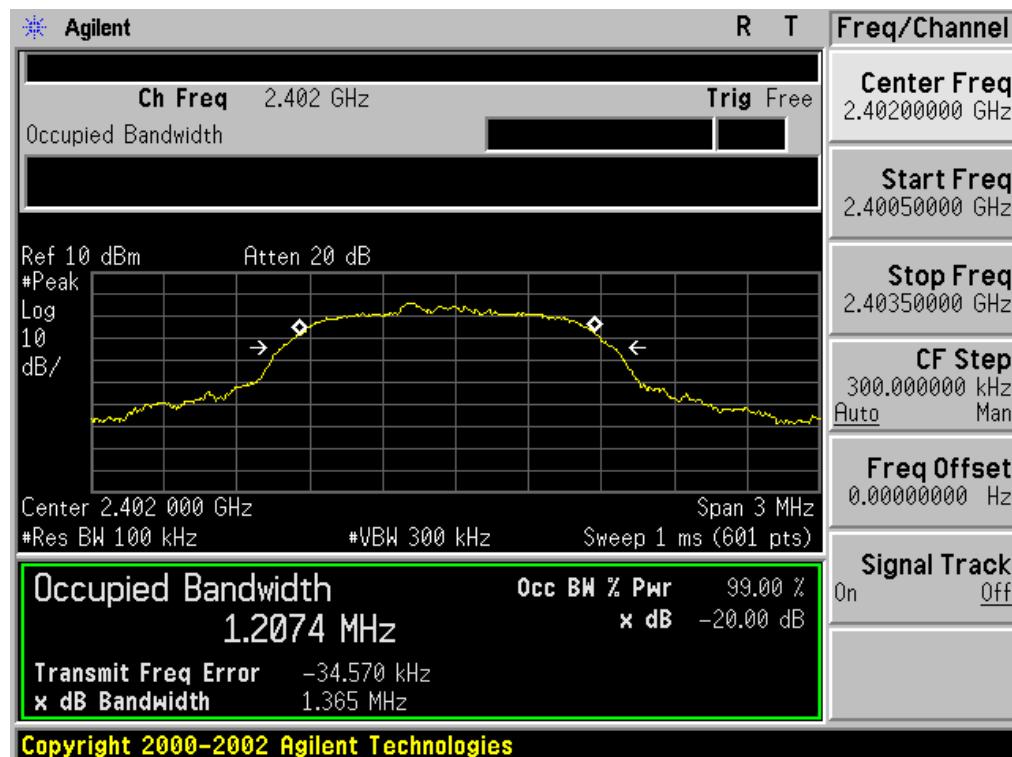




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

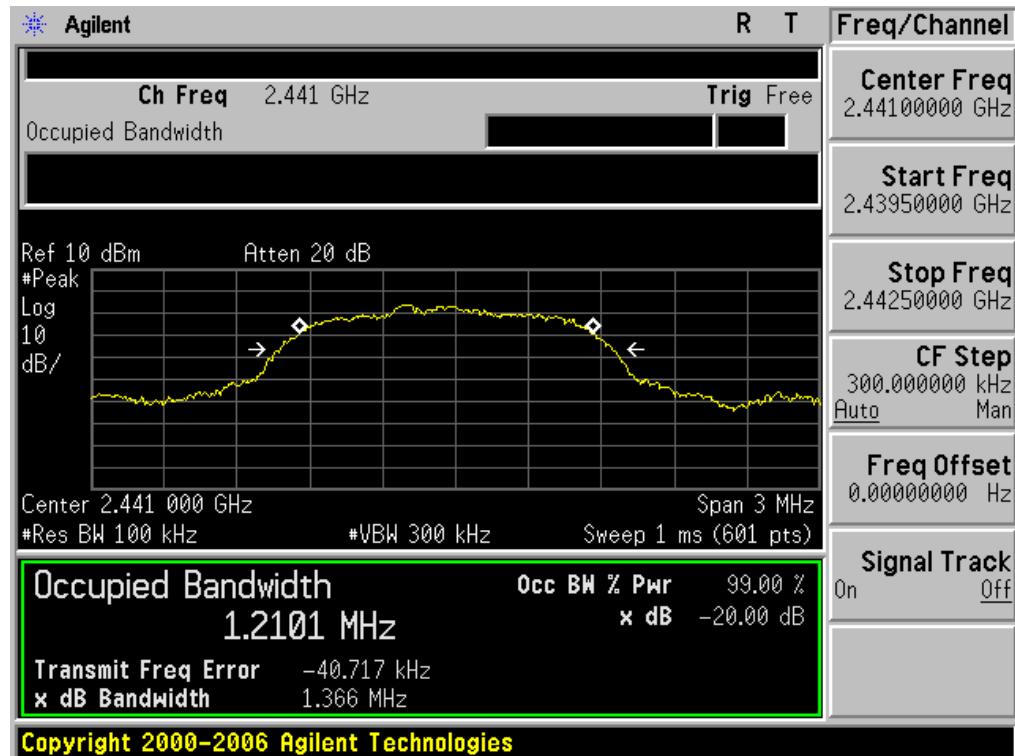

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

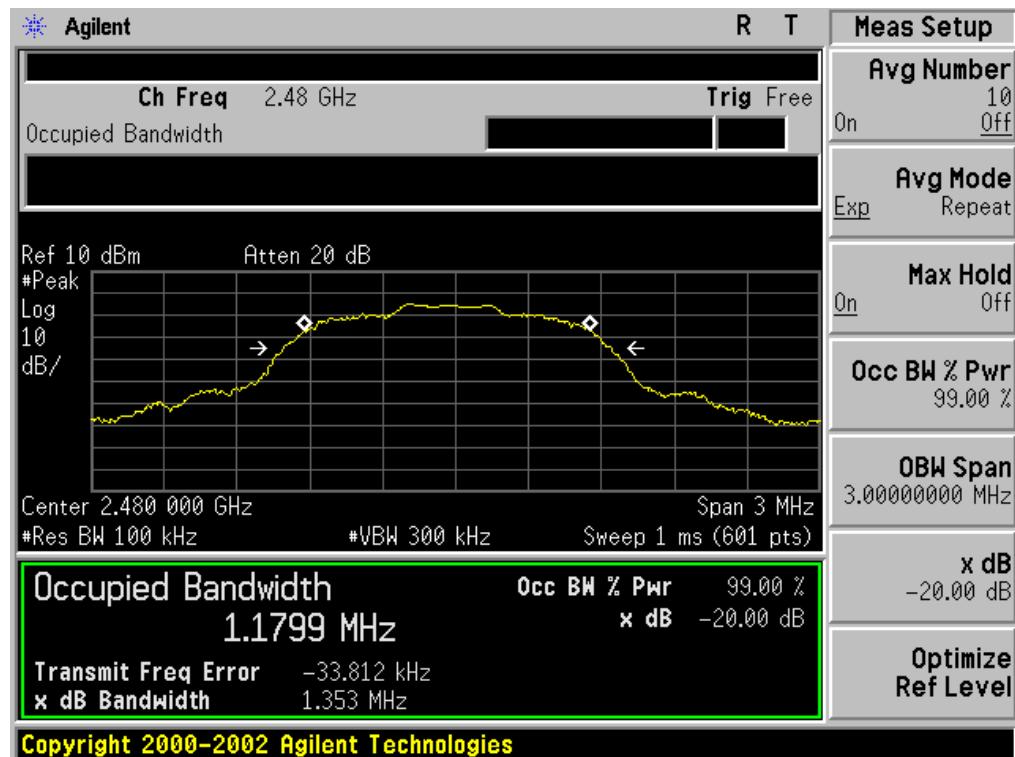

6. FCC LINE CONDUCTED EMISSION TEST


6.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

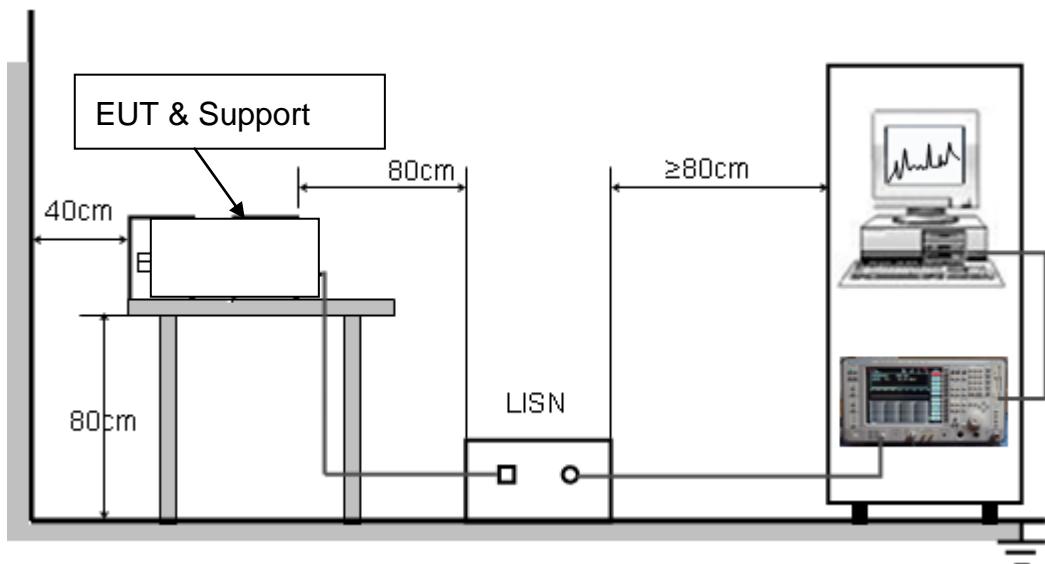



6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received DC 3.7V/60Hz power from a LISN, if any.
5. The EUT received DC 5V power from adapter which received DC 3.7V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

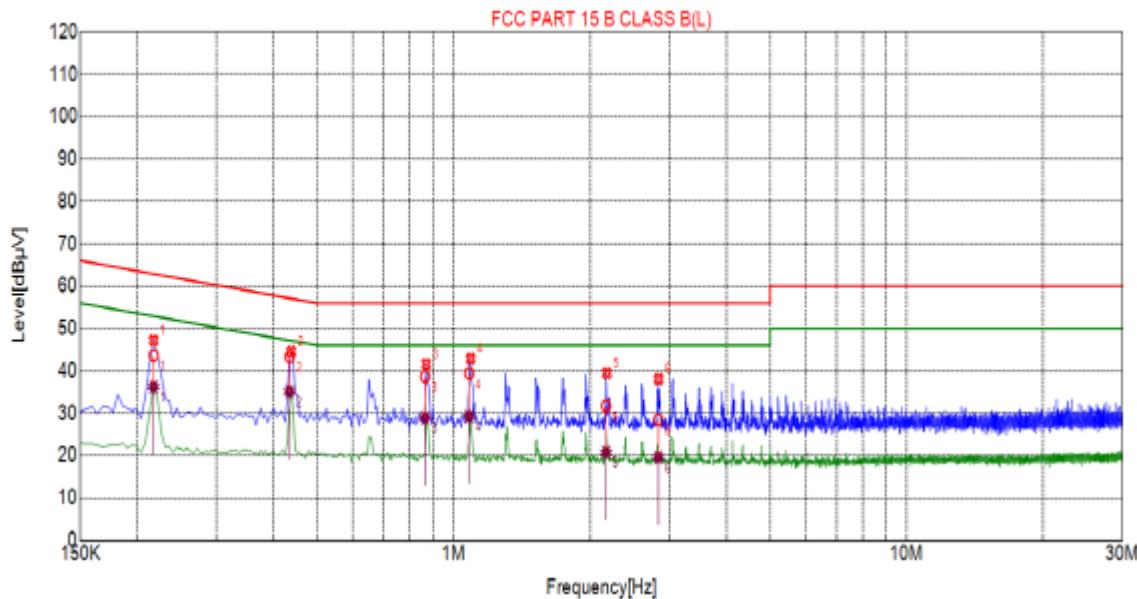

Suspected List


NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.2175	47.19	10.05	62.91	15.72	PK
2	0.4380	44.56	10.05	57.10	12.54	PK
3	0.8700	41.59	10.06	56.00	14.41	PK
4	1.0905	42.91	10.07	56.00	13.09	PK
5	2.1795	39.49	10.16	56.00	16.51	PK
6	2.8365	38.09	10.21	56.00	17.91	PK

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dB μ V]	QP Limit [dB μ V]	QP Margin [dB]	AV Value [dB μ V]	AV Limit [dB μ V]	AV Margin [dB]
1	0.2175	10.05	43.67	62.91	19.24	36.25	52.91	16.66
2	0.4342	10.05	43.31	57.17	13.86	35.16	47.17	12.01
3	0.8651	10.06	38.65	56.00	17.35	28.98	46.00	17.02
4	1.0823	10.07	39.49	56.00	16.51	29.26	46.00	16.74
5	2.1715	10.16	31.74	56.00	24.26	20.77	46.00	25.23
6	2.8318	10.21	28.50	56.00	27.50	19.62	46.00	26.38



Line Conducted Emission Test Line 2-N

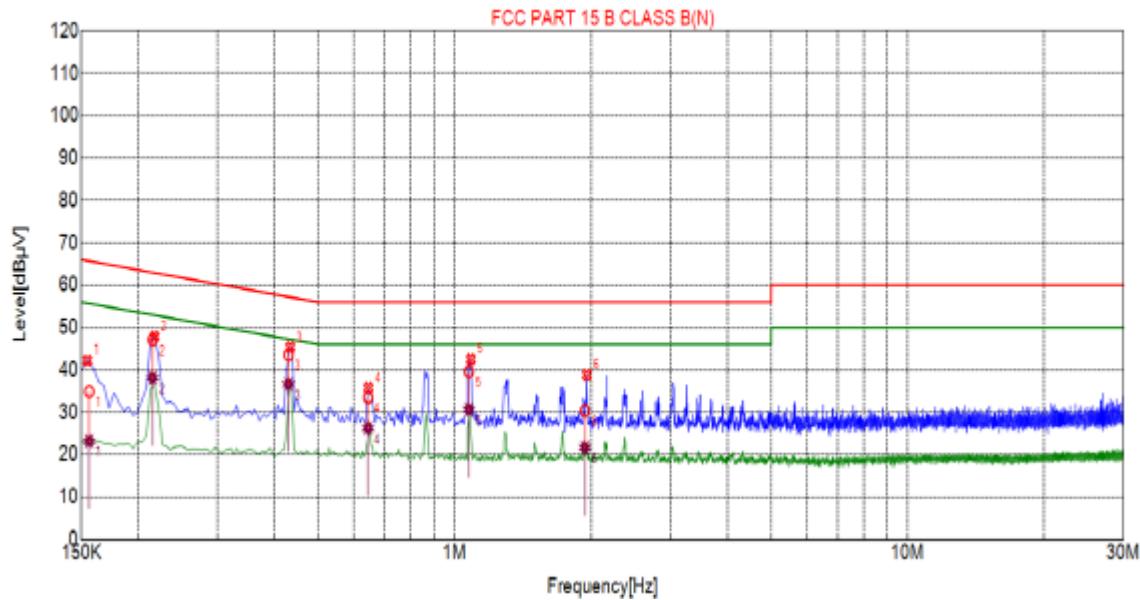

Suspected List

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.1545	42.23	10.03	65.75	23.52	PK
2	0.2175	47.87	10.05	62.91	15.04	PK
3	0.4335	45.33	10.05	57.19	11.86	PK
4	0.6450	35.79	10.05	56.00	20.21	PK
5	1.0860	42.52	10.07	56.00	13.48	PK
6	1.9590	38.81	10.14	56.00	17.19	PK

Final Data List


NO.	Freq. [MHz]	Factor [dB]	QP Value [dB μ V]	QP Limit [dB μ V]	QP Margin [dB]	AV Value [dB μ V]	AV Limit [dB μ V]	AV Margin [dB]
1	0.1560	10.02	34.91	65.67	30.76	23.19	55.67	32.48
2	0.2153	10.05	47.10	63.00	15.90	38.10	53.00	14.90
3	0.4297	10.05	43.57	57.26	13.69	36.62	47.26	10.64
4	0.6440	10.05	33.50	56.00	22.50	26.28	46.00	19.72
5	1.0752	10.07	39.60	56.00	16.40	30.67	46.00	15.33
6	1.9394	10.14	30.35	56.00	25.65	21.69	46.00	24.31

RESULT: PASS

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP

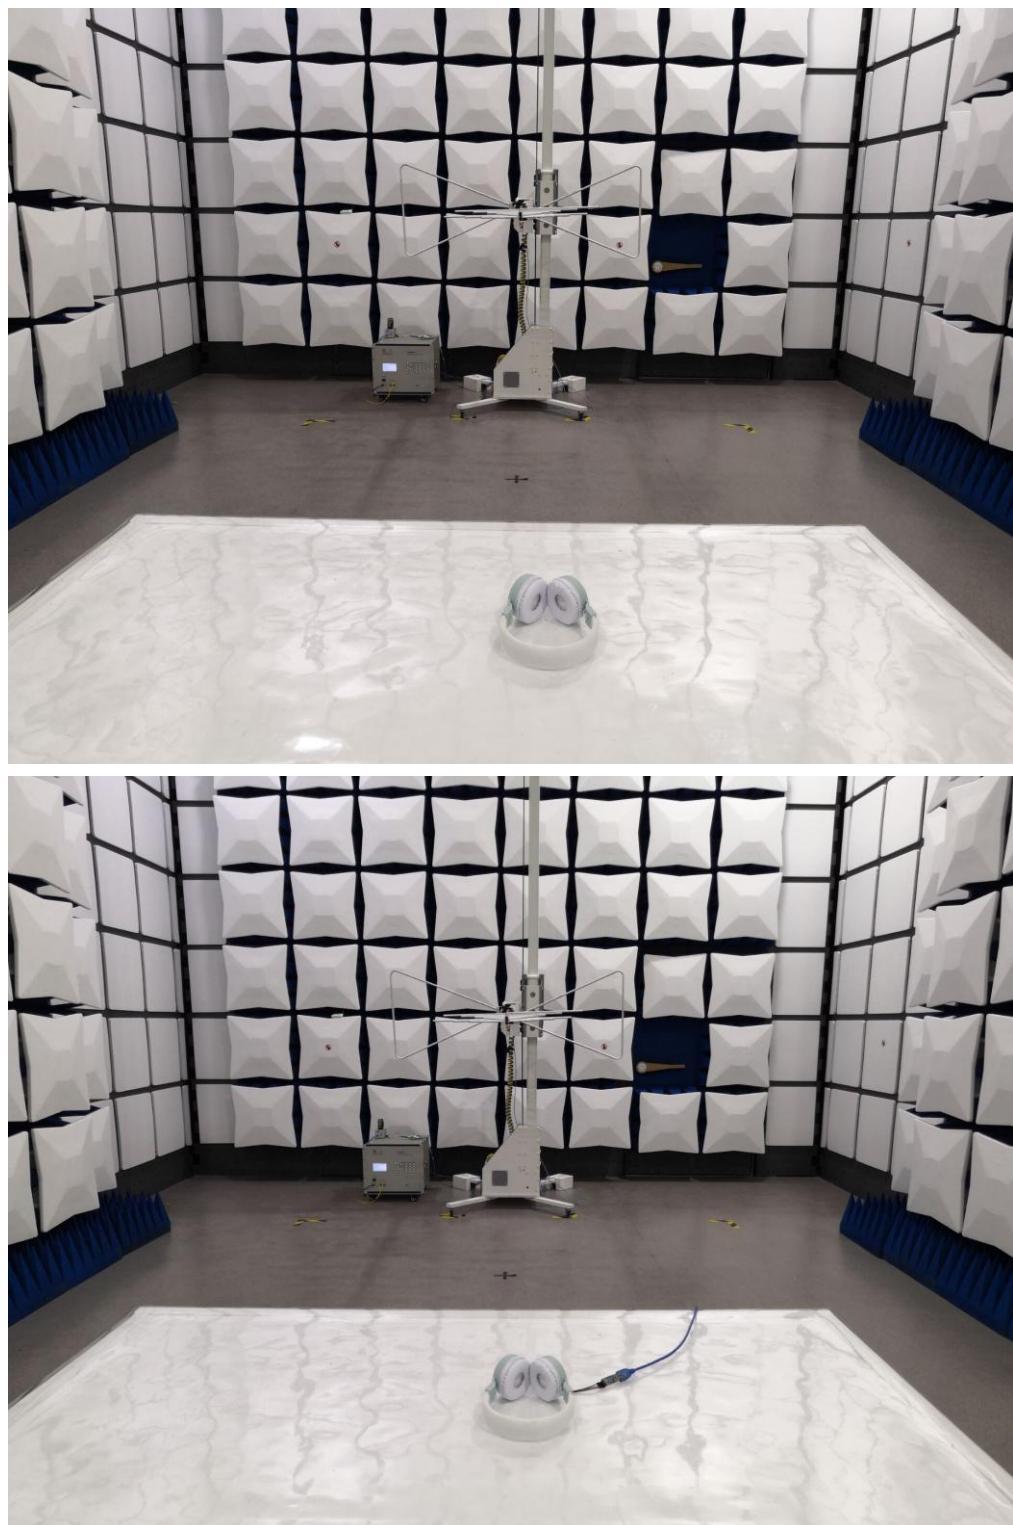





FCC LINE CONDUCTED EMISSION TEST SETUP



APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




VIEW OF EUT (PORT)



OPEN VIEW OF EUT-1

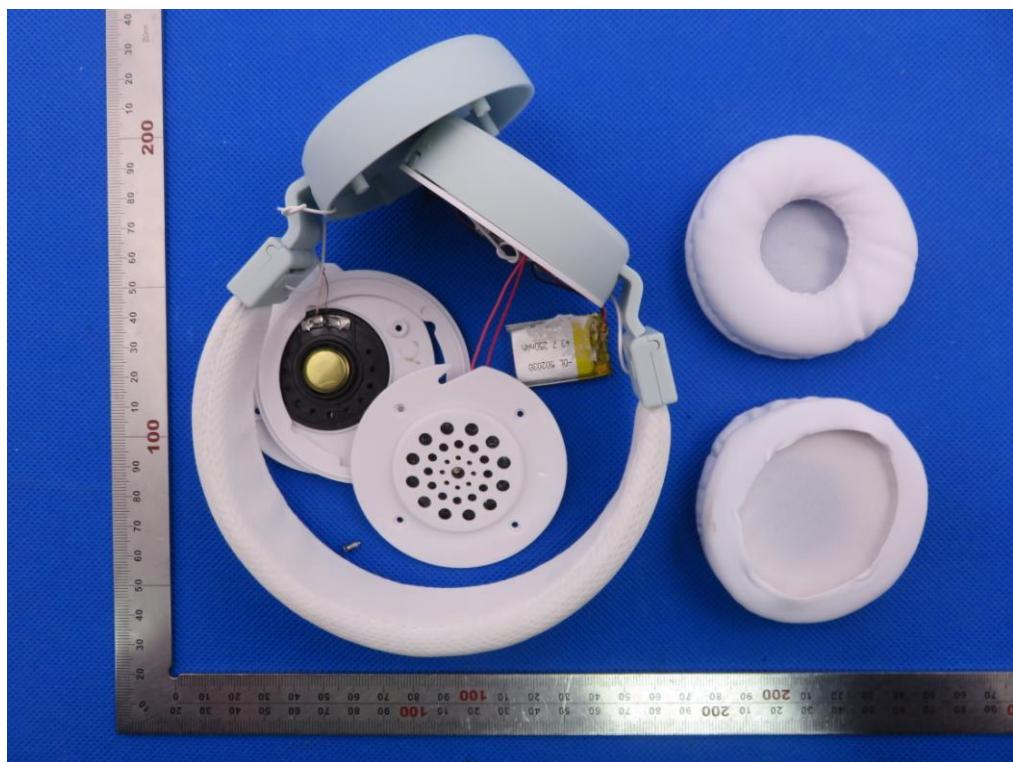

OPEN VIEW OF EUT-2

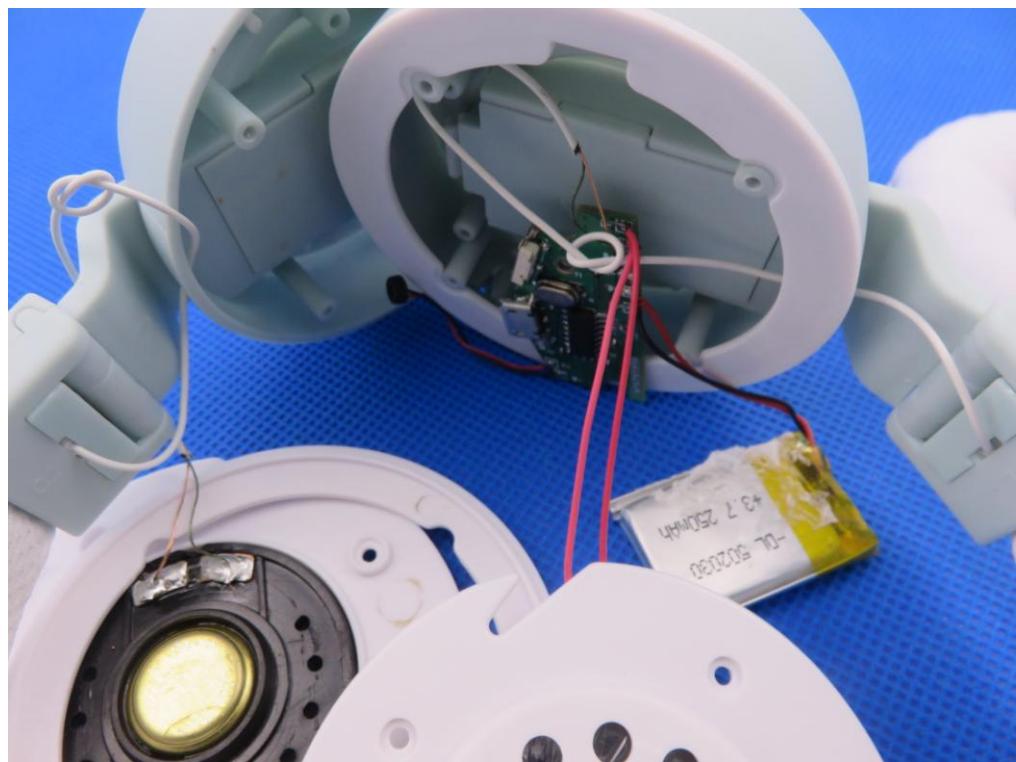


VIEW OF BATTERY






INTERNAL VIEW OF EUT-1

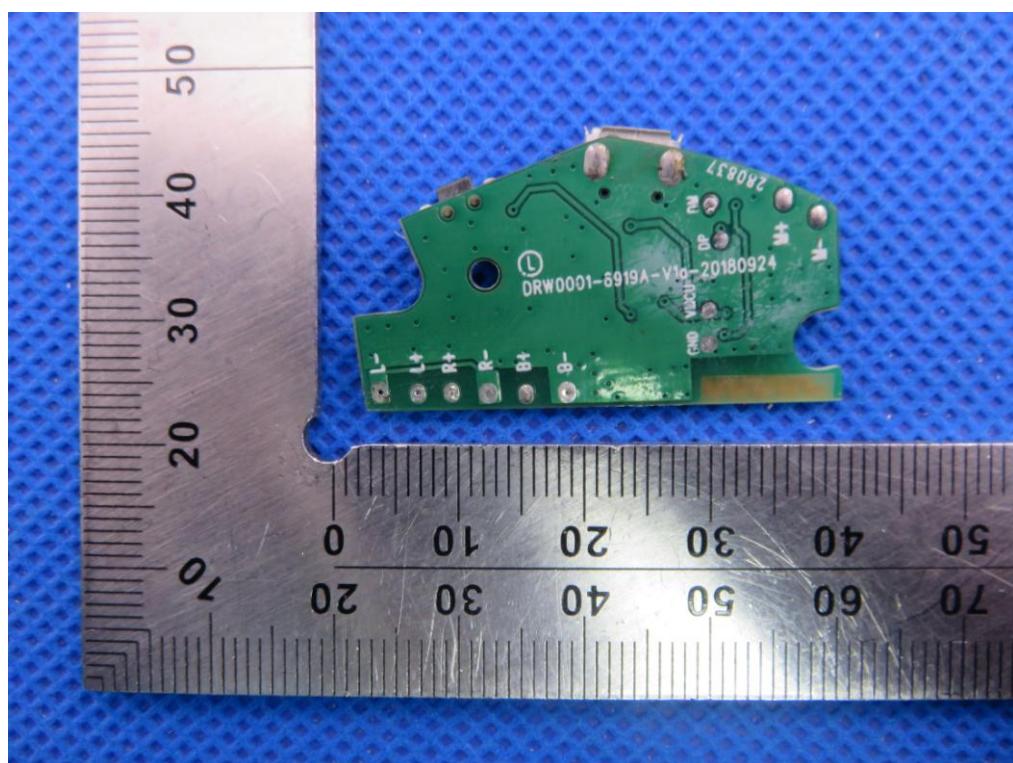



INTERNAL VIEW OF EUT-2

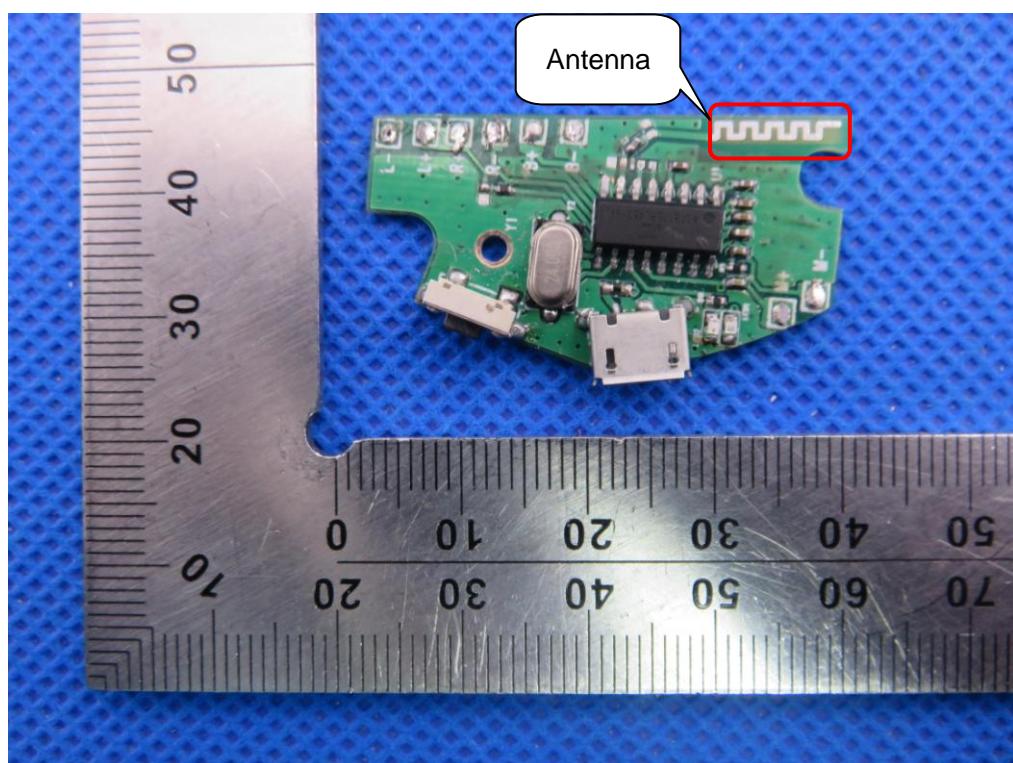



INTERNAL VIEW OF EUT-3

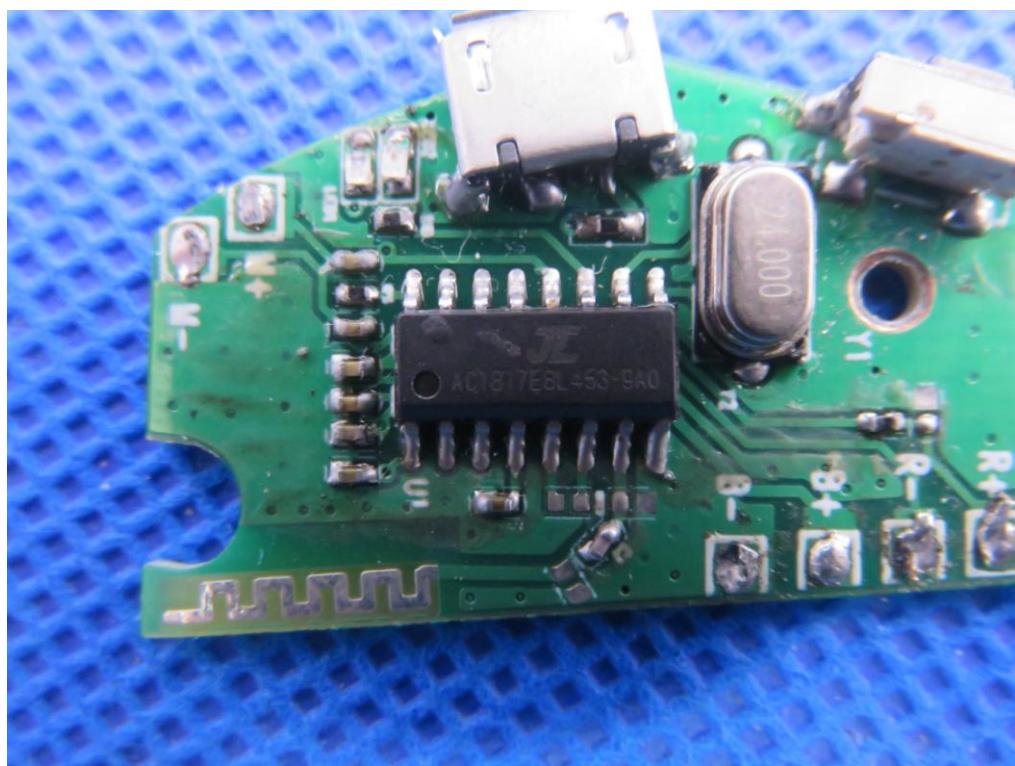


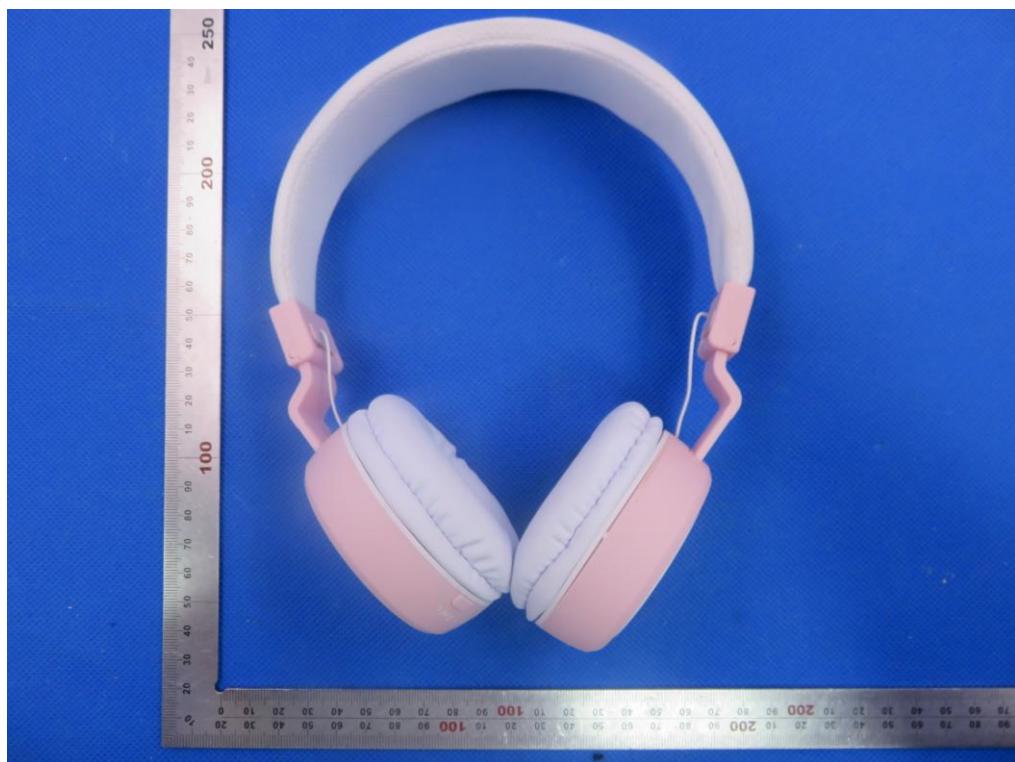SERIES COLOR SAMPLE**TOP VIEW OF EUT****BOTTOM VIEW OF EUT**

FRONT VIEW OF EUT



BACK VIEW OF EUT

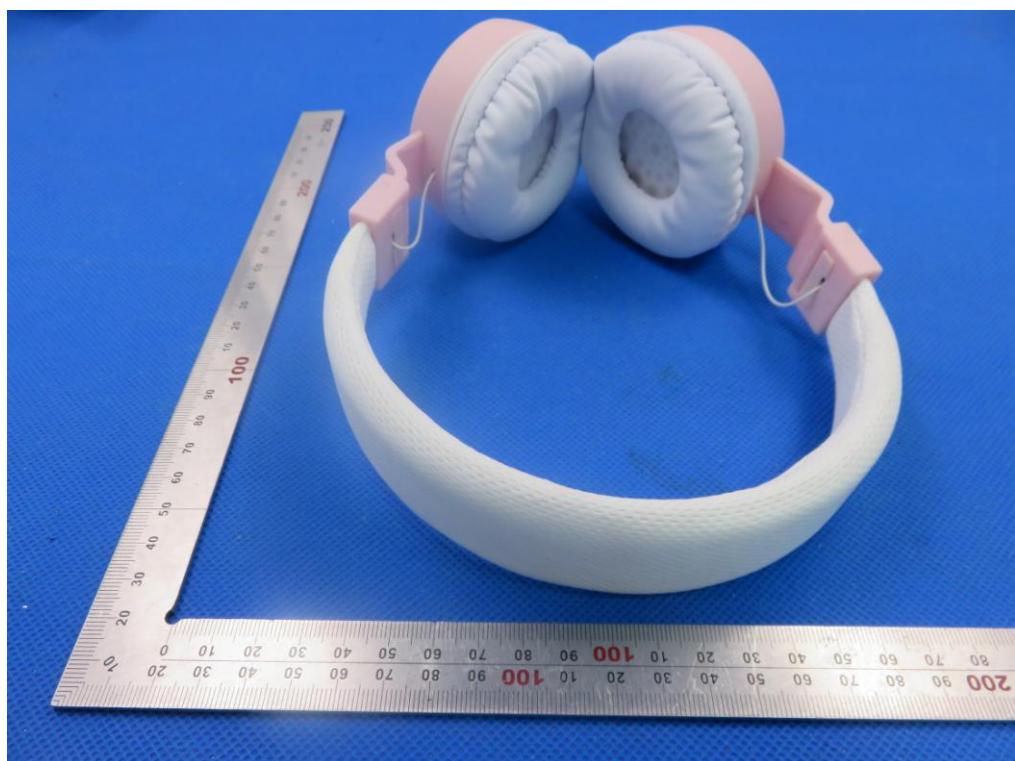

LEFT VIEW OF EUT




RIGHT VIEW OF EUT



VIEW OF EUT (PORT)




OPEN VIEW OF EUT

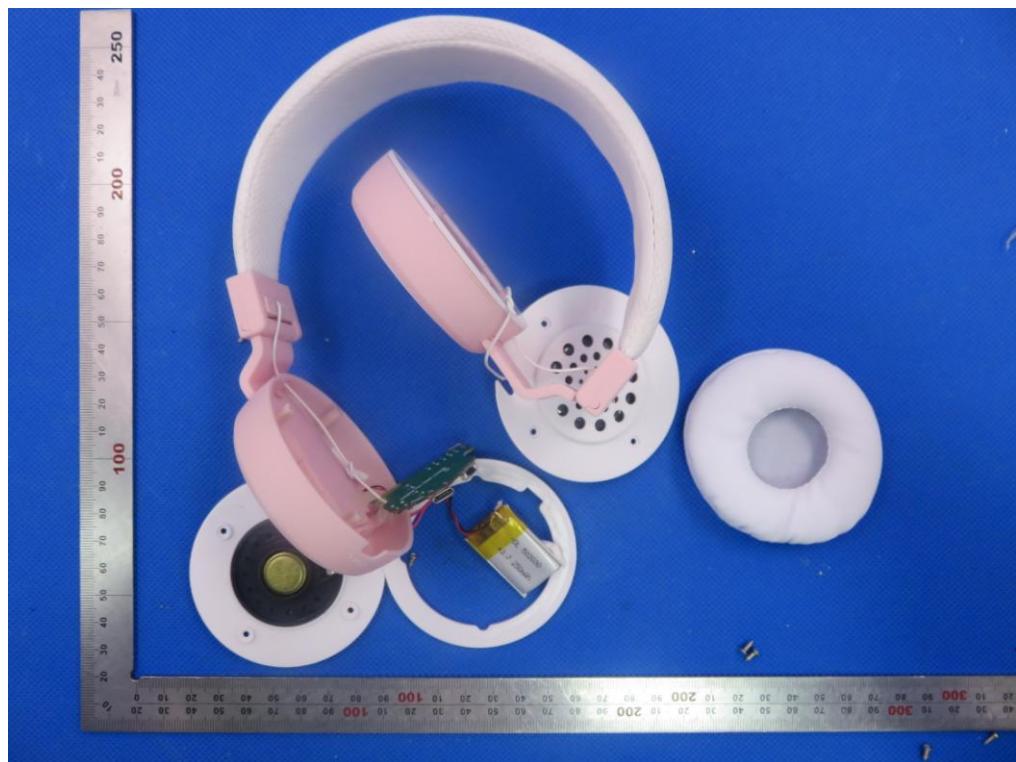




VIEW OF BATTERY

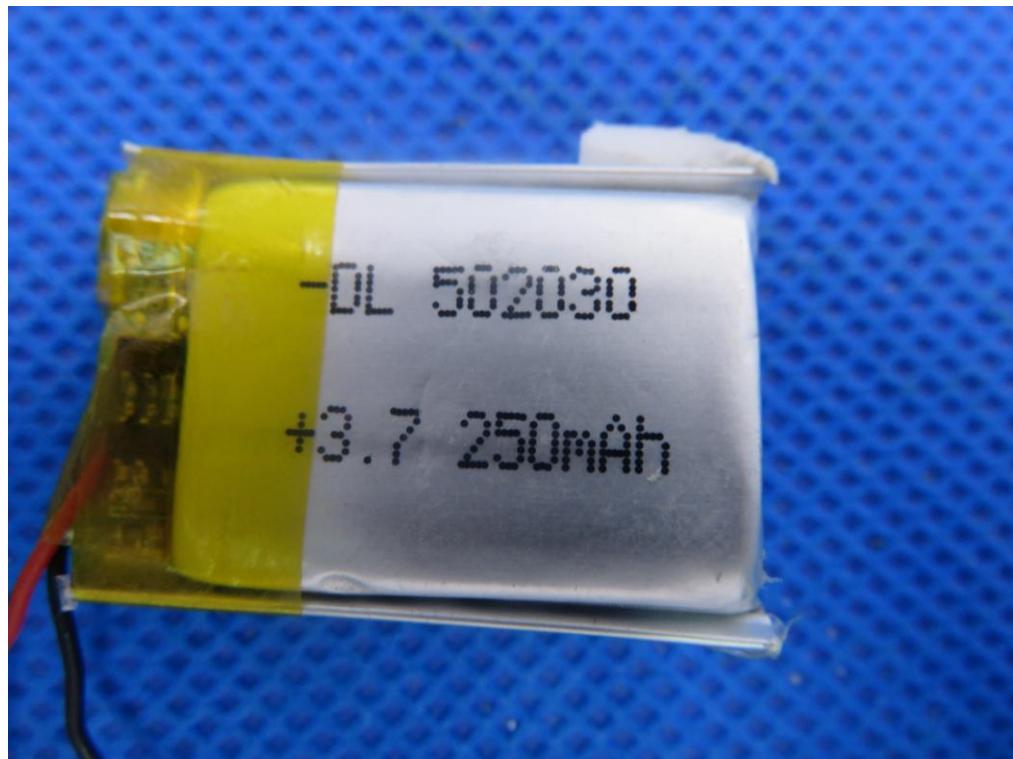


INTERNAL VIEW OF EUT-1

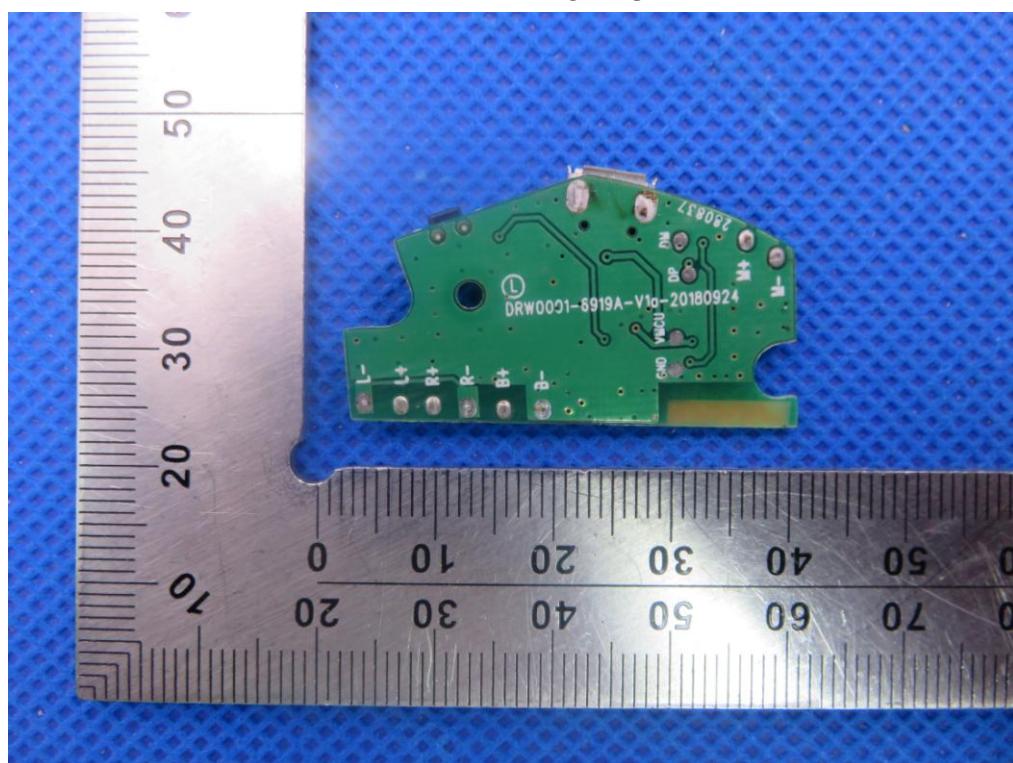




INTERNAL VIEW OF EUT-2

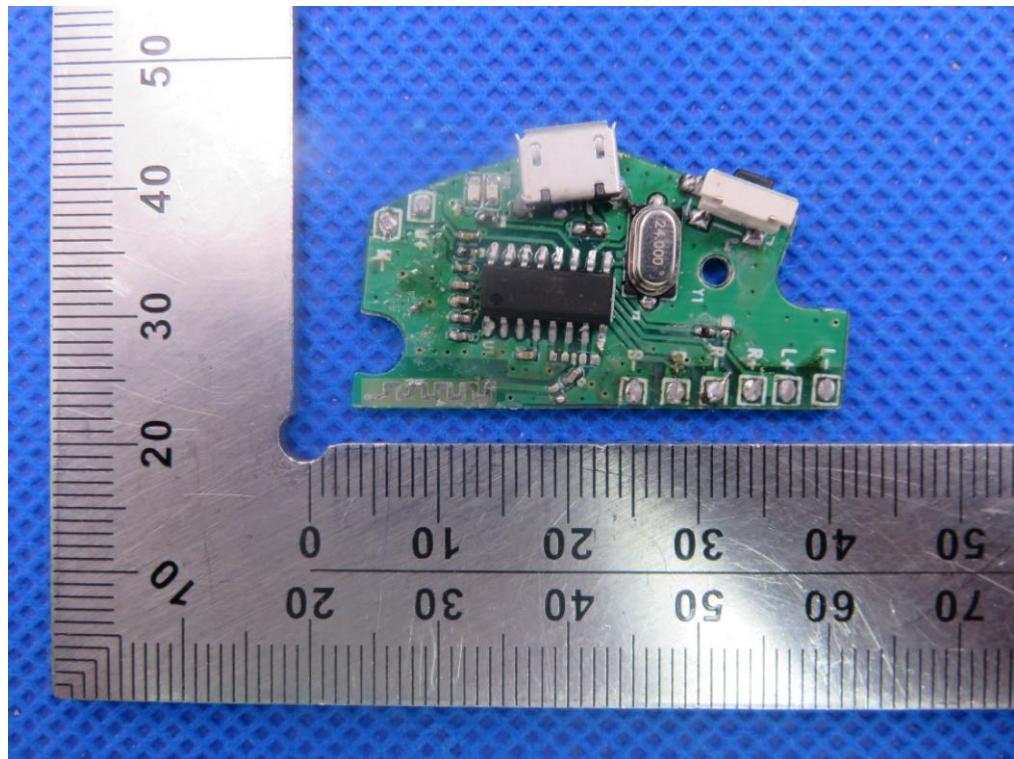

INTERNAL VIEW OF EUT-3

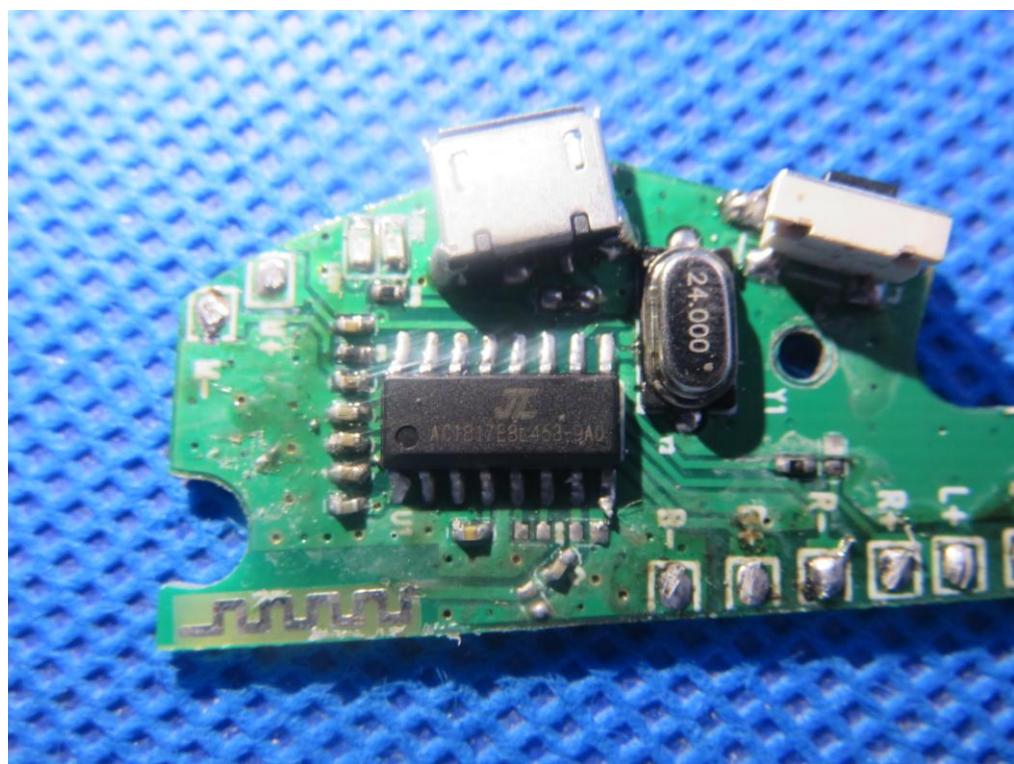




SERIES COLOR SAMPLE

TOP VIEW OF EUT




BOTTOM VIEW OF EUT

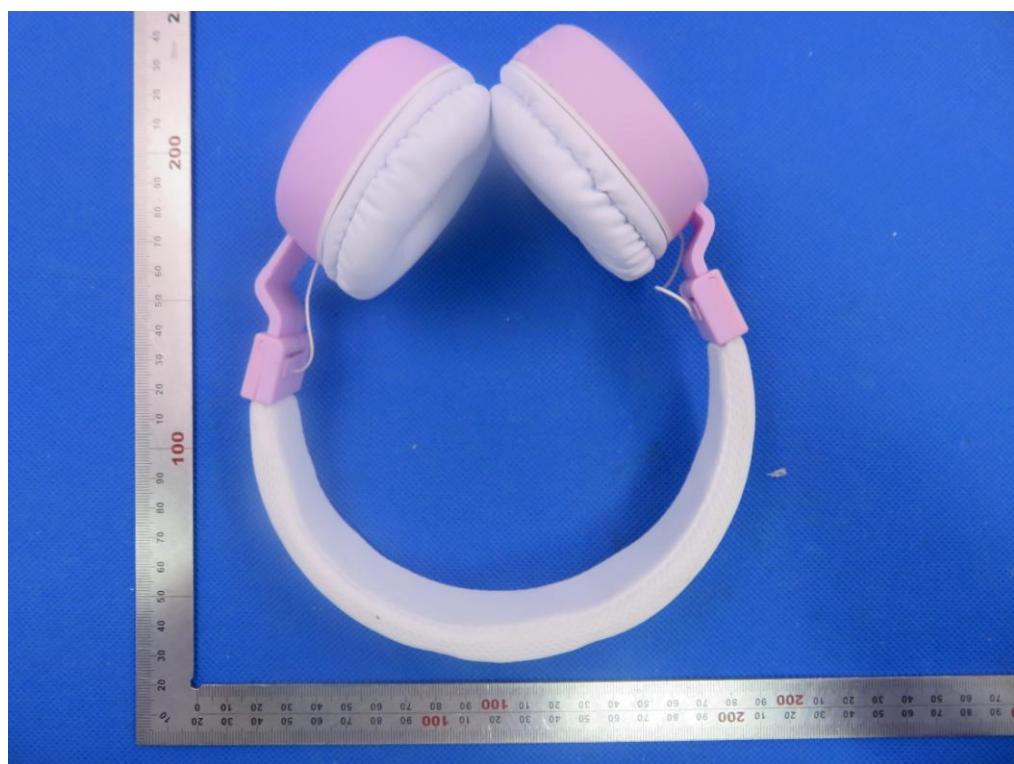

FRONT VIEW OF EUT



BACK VIEW OF EUT

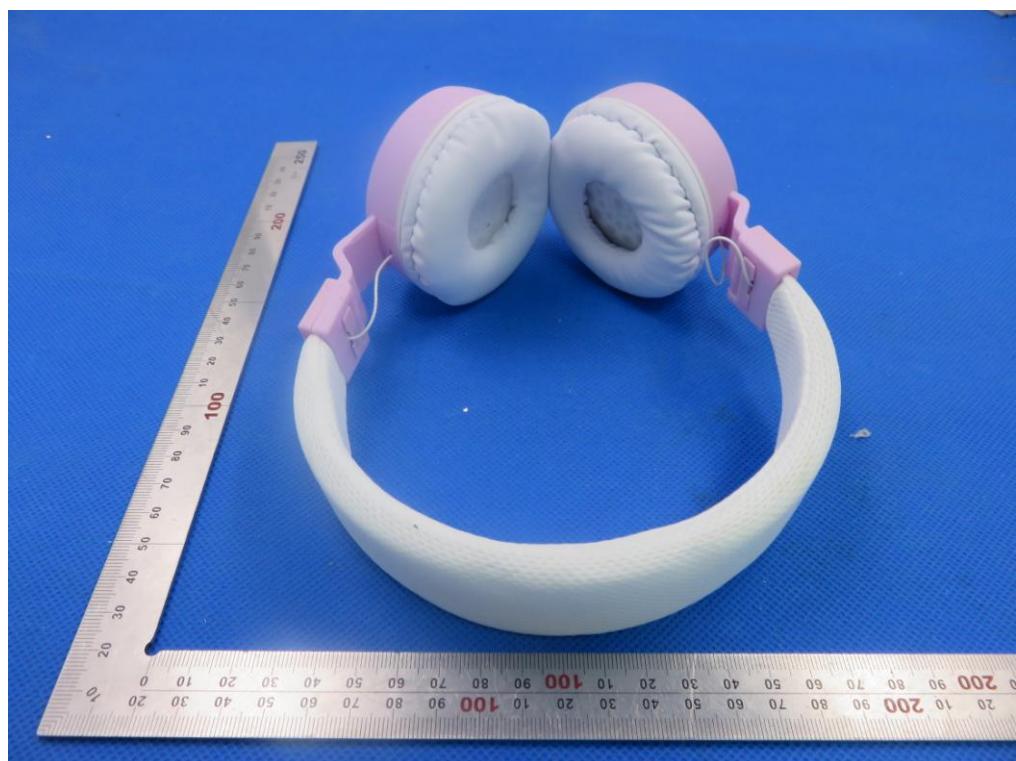



LEFT VIEW OF EUT



RIGHT VIEW OF EUT





VIEW OF EUT (PORT)




OPEN VIEW OF EUT







VIEW OF BATTERY

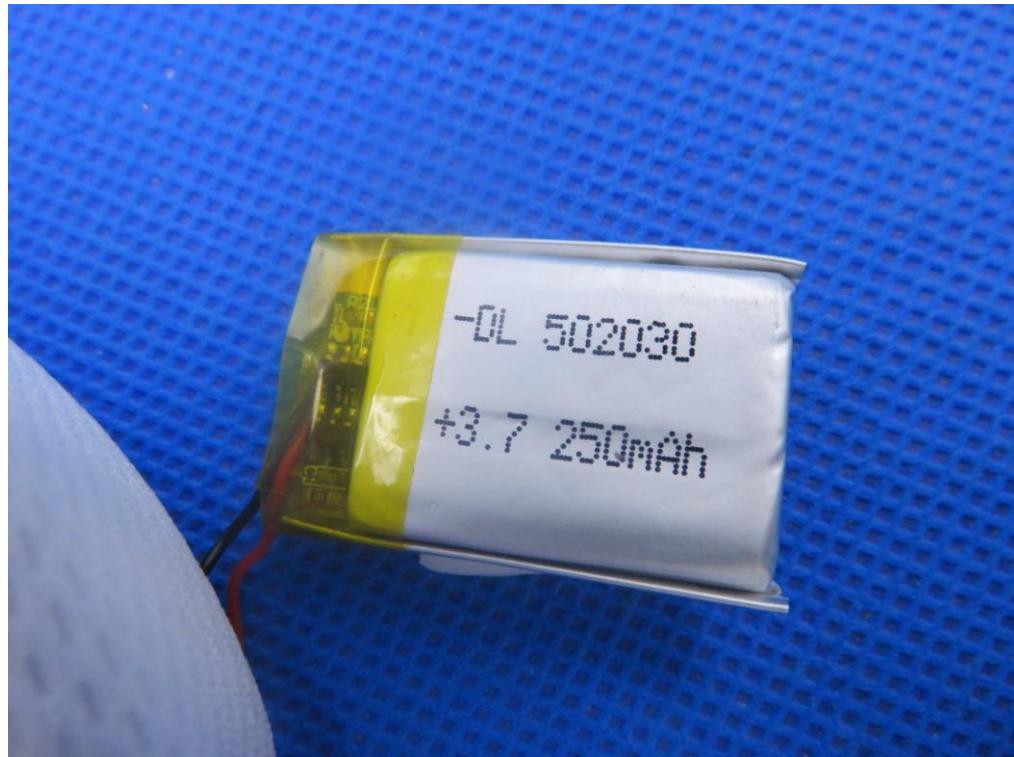


INTERNAL VIEW OF EUT-1

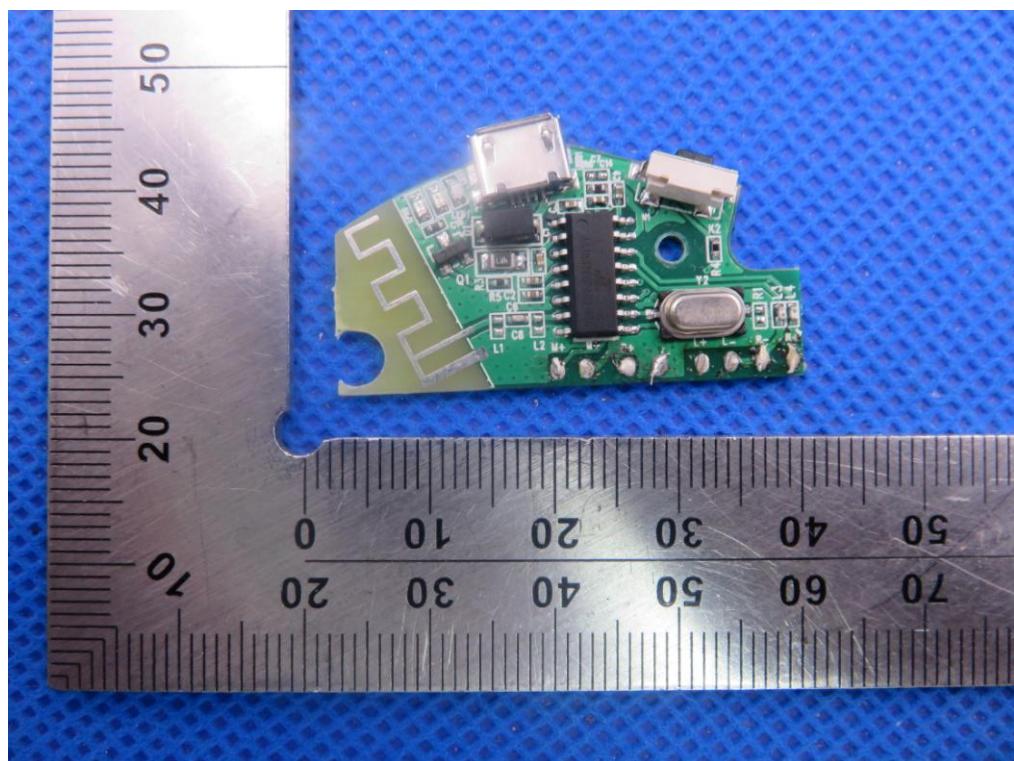

INTERNAL VIEW OF EUT-2

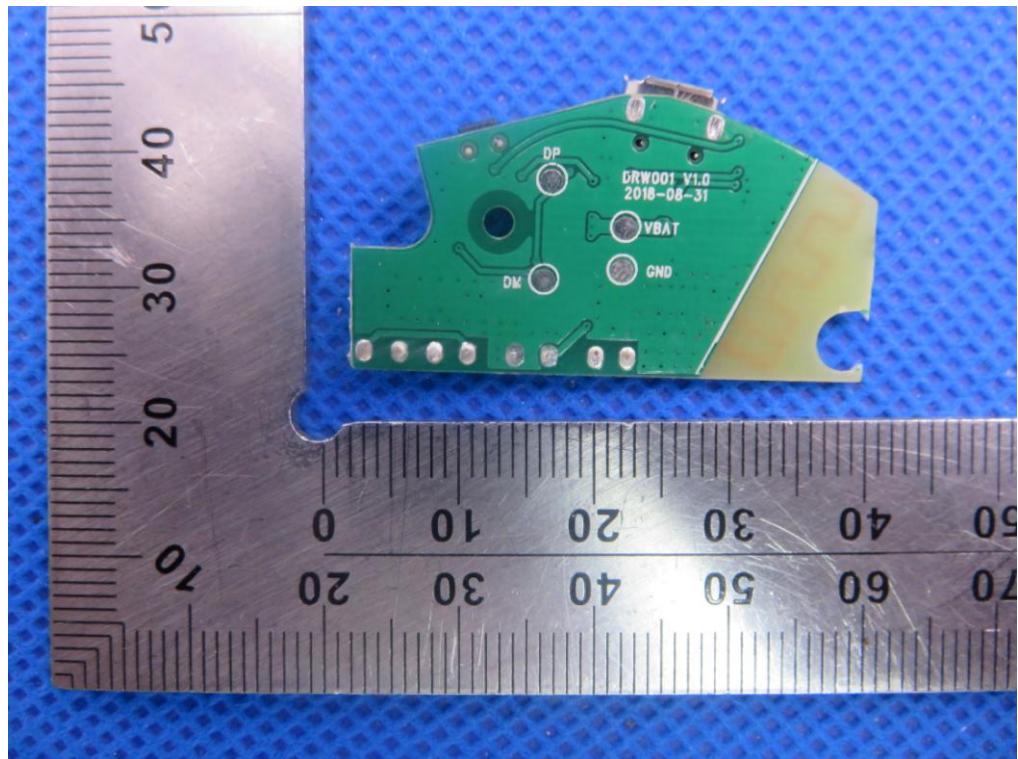

INTERNAL VIEW OF EUT-3

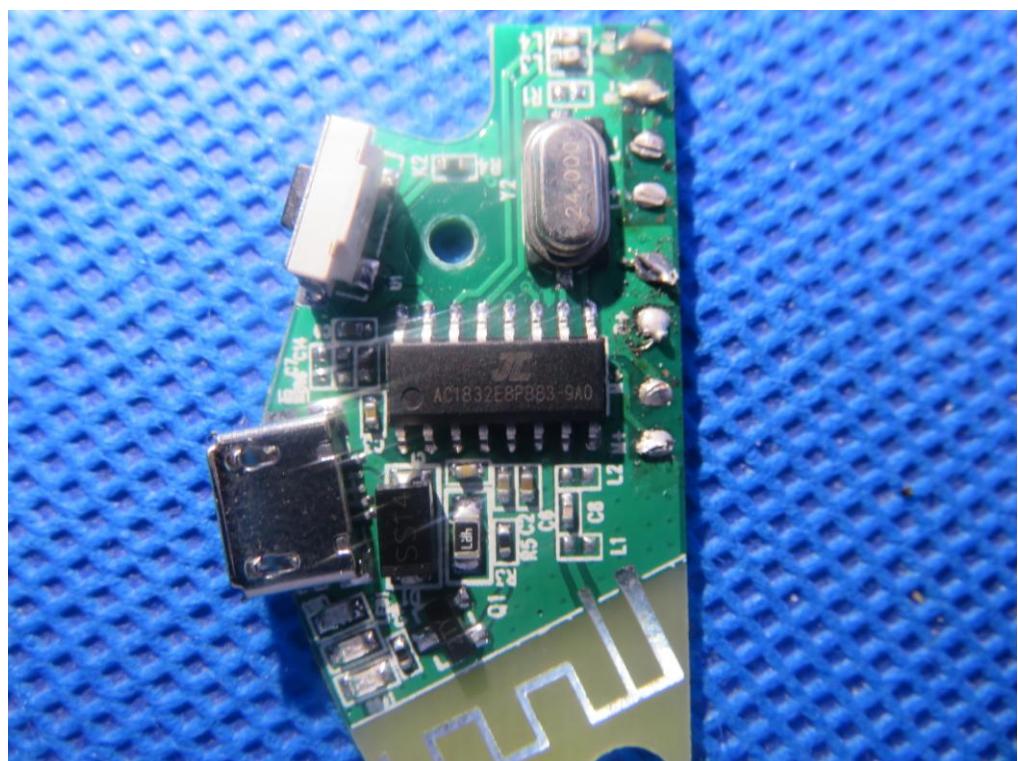



VIEW OF ADAPTER (AE)



The adapter was supplied by HUA

----END OF REPORT----