

# **FCC Test Report**

Report No.: RF170426C21-4

FCC ID: 2AFD7-P3303-C

Test Model: P3303-C

Received Date: Apr. 26, 2017

Test Date: May 11, 2017 ~ May 16, 2017

Issued Date: Jun. 02, 2017

Applicant: Poynt Co.

Address: 490 S California Avenue Suite 200 Palo Alto, CA 94306 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

(R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan

Hsien 333, Taiwan, R.O.C.





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



# **Table of Contents**

Re	leas	e Control Record	. 3				
1	Cert	tificate of Conformity	. 4				
2	Sun	nmary of Test Results	. 5				
		Measurement Uncertainty					
3	Gen	eral Information	. 6				
		General Description of EUT					
		Description of Test Modes.					
	0.2	3.2.1 Test Mode Applicability and Tested Channel Detail					
	3.3	Description of Support Units	. 9				
		3.3.1 Configuration of System under Test					
	3.4	General Description of Applied Standards	. 9				
4	Test	t Types and Results	10				
	4.1	Radiated Emission Measurement	10				
		4.1.1 Limits of Radiated Emission Measurement					
		4.1.2 Test Instruments	.11				
		4.1.3 Test Procedures					
		4.1.4 Deviation from Test Standard					
		4.1.5 Test Set Up					
		4.1.6 EUT Operating Conditions					
	4.0	4.1.7 Test Results					
	4.2	Conducted Emission Measurement					
		4.2.1 Limits of Conducted Emission Measurement. 4.2.2 Test Instruments					
		4.2.3 Test Procedures					
		4.2.4 Deviation from Test Standard					
		4.2.5 Test Setup					
		4.2.6 EUT Operating Conditions					
		4.2.7 Test Results					
	4.3	Frequency Stability	27				
		4.3.1 Limits of Frequency Stability Measurement					
		4.3.2 Test Setup					
		4.3.3 Test Instruments					
		4.3.4 Test Procedure					
		4.3.5 Deviation fromTest Standard					
		4.3.6 EUT Operating Conditions					
	44	20 dB Bandwidth					
	7.7	4.4.1 Limits of 20 dB Bandwidth Measurement					
		4.4.2 Test Setup					
		4.4.3 Test Instruments					
		4.4.4 Test Procedures	29				
		4.4.5 Deviation from Test Standard	29				
		4.4.6 EUT Operating Conditions					
		4.4.7 Test Results	30				
5	Pict	ures of Test Arrangements	32				
Αp	pen	pendix – Information on the Testing Laboratories33					
•			-				



# **Release Control Record**

Issue No.	Description	Date Issued
RF170426C21-4	Original Release	Jun. 02, 2017



# 1 Certificate of Conformity

**Product:** Smart Terminal

**Brand: POYNT** 

Test Model: P3303-C

Sample Status: Identical Prototype

Applicant: Poynt Co.

**Test Date:** May 11, 2017 ~ May 16, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.225)

47 CFR FCC Part 15, Subpart C (Section 15.215)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Ivonne Wu / Supervisor

David Huang / Project Engineer



# 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215)						
FCC Clause	Test Item	Result	Remarks			
15.207	Conducted emission test	Pass	Meet the requirement of limit. Minimum passing margin is -1.58 dB at 13.562 MHz.			
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	Pass	Meet the requirement of limit. Minimum passing margin is -51.36 dB at 13.56 MHz.			
15.225 (b)	The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	Pass	Meet the requirement of limit.			
15.225 (c)	The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	Pass	Meet the requirement of limit.			
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	Pass	Meet the requirement of limit. Minimum passing margin is -3.68 dB at 40.67 MHz.			
15.225 (e) The frequency tolerance		Pass	Meet the requirement of limit.			
15.215 (c)	20dB Bandwidth	Pass	Meet the requirement of limit.			
15.203 Antenna Requirement		Pass	No antenna connector is used.			

# 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
Radiated Effissions up to 1 GHZ	200 MHz ~1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
Radiated Emissions above 1 GHZ	18 GHz ~ 40 GHz	1.94 dB

# 2.2 Modification Record

There were no modifications required for compliance.



# 3 General Information

# 3.1 General Description of EUT

Product	Smart Terminal
Brand	POYNT
Test Model	P3303-C
Status of EUT	Identical Prototype
Dawer Complex Datings	12 Vdc (adapter)
Power Supply Rating	7.6 Vdc (battery)
Modulation Type	ASK
Operating Frequency	13.56 MHz
Antenna Type	Loop Antenna
Accessory Device	Refer to Note
Data Cable Supplied	Refer to Note

# Note:

1. The EUT contains following accessory devices & components.

Product	Brand	Model	Description
Adapter	FSP Group Inc.	FSP040-RHBN2 B	I/P: 100-240 Vac, 50/60 Hz, 1.5 A
Adaptei	1 or Gloup IIIc.	1 3F 040-1(11D112 D	O/P: 12 Vdc, 3.33 A
Battery	WELL Tech Energy Inc.	P61B	7.6 Vdc, 2000 mAh
Docking	Quanta	DA0P61TB6B0	
BT/WLAN	MEDIATEI	MTCCCFLNI	
Module	MEDIATEK	MT6625LN	
NFC Chip	NXP	CLRC663	
WWAN Module	Fibocom	L816-AM	

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



# 3.2 Description of Test Modes

One channel was provided to this EUT:

Channel	Frequency (MHz)	
1	13.56	

#### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure	Applicable To				Description
Mode	RE	PLC	FS	EB	·
-	$\checkmark$	$\checkmark$	V	$\sqrt{}$	-

Where

RE: Radiated Emission
FS: Frequency Stability

**PLC:** Power Line Conducted Emission **EB:** 20 dB Bandwidth measurement

### **Radiated Emission Test:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Axis
-	1	1	ASK	Υ

### **Power Line Conducted Emission Test:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Axis
-	1	1	ASK	Υ

### **Frequency Stability:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Axis
-	1	1	ASK	Υ



# 20 dB Bandwidth:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Axis
-	1	1	ASK	Υ

# **Test Condition:**


Applicable To	Environmental Conditions	Input Power	Tested By
RE	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
FS	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
EB	25 deg. C, 68 % RH	120 Vac, 60 Hz	Carlos Chen



# 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

# 3.3.1 Configuration of System under Test

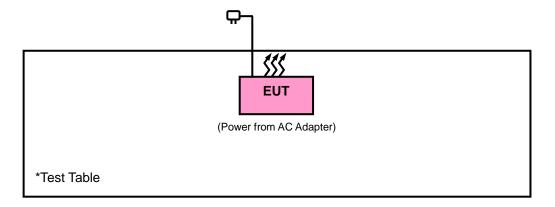

# 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.225) FCC Part 15, Subpart C (15.215)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 4 Test Types and Results

#### 4.1 Radiated Emission Measurement

### 4.1.1 Limits of Radiated Emission Measurement

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz shall not exceed 334 microvolts/meter at 30 meters.

The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dBuV/m) = 20 \log Emission level (uV/m)$ .
- 3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.



# 4.1.2 Test Instruments

Description & Manaufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Feb. 17, 2017	Feb. 16, 2018
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 16, 2016	Dec. 15, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 13, 2016	Dec. 12, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 26, 2016	Dec. 27, 2017
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 12, 2016	Dec. 13, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 14, 2016	Dec. 13, 2017
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 08, 2016	Jul. 07, 2017
Loop Antenna	EM-6879	269	Aug. 11, 2016	Aug. 10, 2017
Bluetooth Tester	CBT	100946	Jul. 29, 2016	Jul. 28, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 21, 2016	Oct. 20, 2017
Preamplifier EMCI	EMC 184045	980116	Oct. 21, 2016	Oct. 20, 2017
Preamplifier EMCI	EMC 330H	980112	Oct. 21, 2016	Oct. 20, 2017
Power Meter Anritsu	ML2495A	1232002	Sep. 08, 2016	Sep. 07, 2017
Power Sensor Anritsu	MA2411B	1207325	Sep. 08, 2016	Sep. 07, 2017
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 21, 2016	Oct. 20, 2017
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 21, 2016	Oct. 20, 2017
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 21, 2016	Oct. 20, 2017
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower &Turn Table Controller MF	MF-7802	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  - 2. The test was performed in HwaYa Chamber 10.
  - 3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
  - 4. The FCC Site Registration No. is 690701.
  - 5. The IC Site Registration No. is IC7450F-10.



#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, guasi-peak or average method as specified and then reported in a data sheet.

### NOTE:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is ≥ 1/T (Duty cycle < 98 %) or 10 Hz (Duty cycle > 98 %) for Average detection (AV) at frequency above 1 GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported.


4.1.4 Deviation from Test Standar	Deviation from Test	Standard
-----------------------------------	---------------------	----------

No deviation.




# 4.1.5 Test Set Up

Frequency range 9k~30MHz:

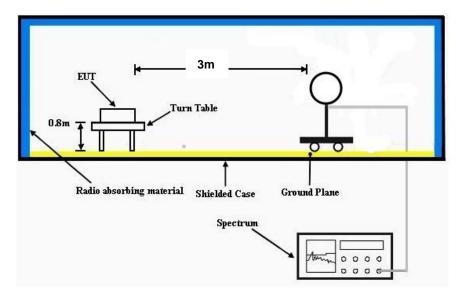

Frequency range 30~1000MHz:

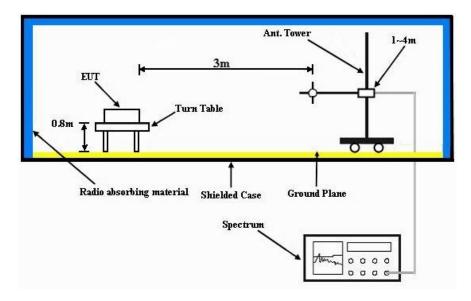

For the actual test configuration, please refer to the attached file (Test Setup Photo).

# 4.1.6 EUT Operating Conditions


- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.



# 4.1.7 Test Results No non-compliance noted: KDB 937606 OATS and Chamber Correlation Justification - Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. - OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.



<b>EUT Test Condition</b>		Measurement Detail		
Channel	Channel 1	Frequency Range	13.553 ~ 13.567 MHz	
Input Power	120 Vac, 60 Hz	<b>Detector Function</b>	Quasi-Peak	
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Getaz Yang	

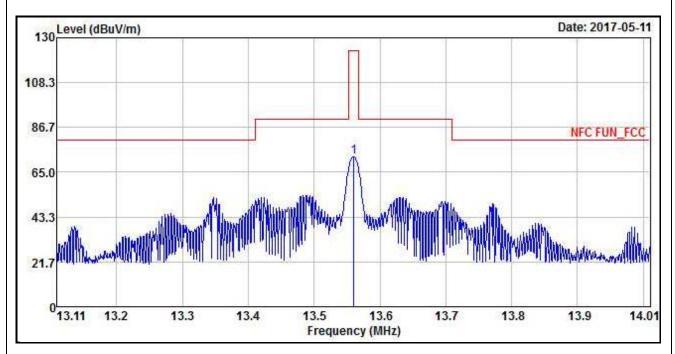

	Antenna Polarity & Test Distance: Loop Antenna Open at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Level	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark	
13.56	72.64	76.02	124	-51.36	37.67	0.31	41.36	100	360	QP	

- 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  - Pre-Amplifier Factor(dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. Above limits have been translated by the formula


The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance) Example:

13.56 MHz = 15848 uV/m 30m = 84 dBuV/m 30m = 84+20log(30/3)<sup>2</sup> 3m

= 124 dBuV/m



<b>EUT Test Condition</b>		Measurement Detail		
Channel	Channel 1	Frequency Range	13.553 ~ 13.567 MHz	
Input Power	120 Vac, 60 Hz	Detector Function	Quasi-Peak	
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Getaz Yang	

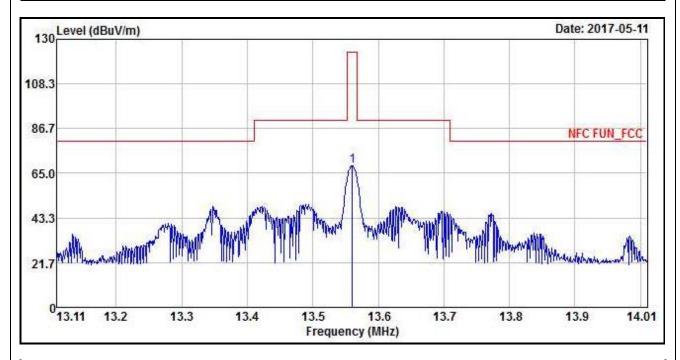

	Antenna Polarity & Test Distance: Loop Antenna Close at 3 m									
Frequency (MHz)	Emission Level (dBuV/m)	Level	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
13.56	68.47	71.85	124	-55.53	37.67	0.31	41.36	100	0	QP

- 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  - Pre-Amplifier Factor(dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)


Example:

13.56 MHz = 15848 uV/m 30m = 84 dBuV/m 30m = 84+20log(30/3)<sup>2</sup> 3m

= 124 dBuV/m



<b>EUT Test Condition</b>		Measurement Detail		
Channel	Channel 1	Frequency Range	Below 30 MHz	
Input Power	120 Vac, 60 Hz	<b>Detector Function</b>	Quasi-Peak	
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Getaz Yang	

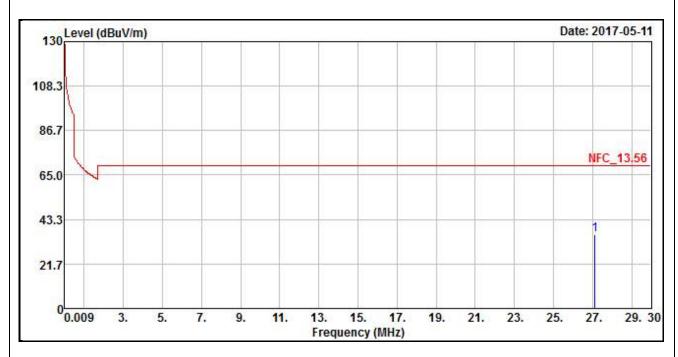


	Antenna Polarity & Test Distance: Loop Antenna Open at 3 m									
Frequency (MHz)	Emission Level (dBuV/m)	Level	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
27.12	35.95	41.35	69.54	-33.59	35.55	0.38	41.33	100	360	QP

- 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
  - Pre-Amplifier Factor (dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission Level Limit value



<b>EUT Test Condition</b>		Measurement Detail		
Channel	Channel 1	Frequency Range	Below 30 MHz	
Input Power	120 Vac, 60 Hz	<b>Detector Function</b>	Quasi-Peak	
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Getaz Yang	

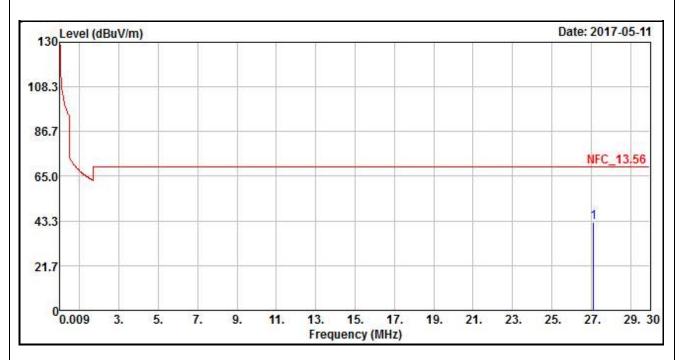



	Antenna Polarity & Test Distance: Loop Antenna Close at 3 m									
Frequency (MHz)	Emission Level (dBuV/m)	Level	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
27.12	42.59	47.99	69.54	-26.95	35.55	0.38	41.33	100	0	QP

- 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
  - Pre-Amplifier Factor (dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission Level Limit value



<b>EUT Test Condition</b>		Measurement Detail		
Channel	Channel 1	Frequency Range	Below 1000 MHz	
Input Power	120 Vac, 60 Hz	Detector Function	Quasi-Peak	
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Getaz Yang	

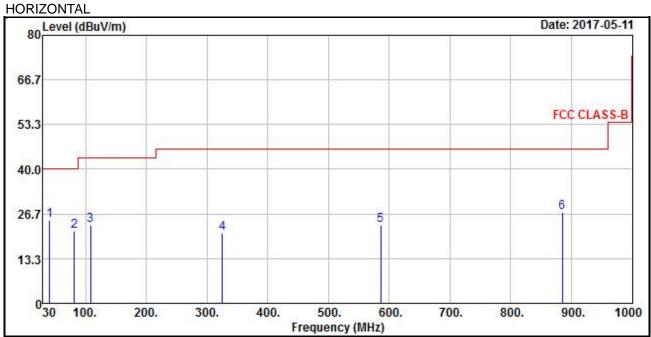

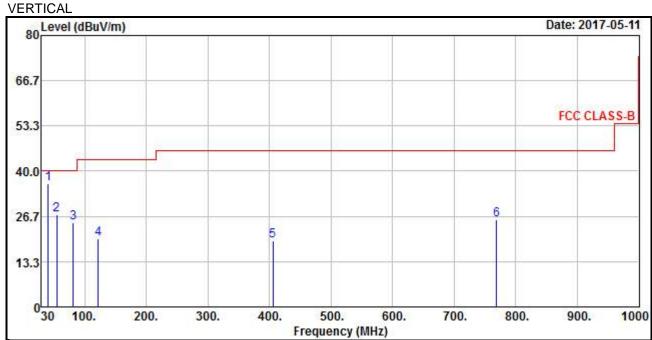



					. =					
		Ant	enna Pola	arity & Te	st Distanc	e: Horiz	ontal at 3	m	1	
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
40.67	24.77	41.59	40	-15.23	13.55	0.65	31.02	128	332	Peak
81.41	21.62	44.13	40	-18.38	8.15	0.9	31.56	137	212	Peak
108.57	23.2	44.05	43.5	-20.3	9.9	1.1	31.85	111	262	Peak
324.88	20.95	37.56	46	-25.05	13.54	1.7	31.85	137	70	Peak
585.81	23.23	33.84	46	-22.77	19.28	2.24	32.13	103	52	Peak
885.54	27.05	32.99	46	-18.95	23.32	2.73	31.99	134	176	Peak
		Ar	ntenna Po	larity & T	est Distan	ce: Vert	ical at 3 m	)		
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
40.67	36.32	53.14	40	-3.68	13.55	0.65	31.02	114	302	Peak
54.25	27.06	45.09	40	-12.94	12.56	0.74	31.33	121	223	Peak
81.41	24.89	47.4	40	-15.11	8.15	0.9	31.56	107	41	Peak
122.15	20.03	39.63	43.5	-23.47	11.15	1.15	31.9	137	289	Peak
405.39	19.61	34.29	46	-26.39	15.45	1.92	32.05	123	266	Peak
769.14	25.58	32.54	46	-20.42	21.79	2.56	31.31	103	200	Peak

 Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor Margin value = Emission level – Limit value.



#### 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Fraguency (MUz)	Conducted Limit (dBuV)					
Frequency (MHz)	Quasi-peak	Average				
0.15 - 0.5	66 - 56	56 - 46				
0.50 - 5.0	56	46				
5.0 - 30.0	60	50				

### Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 21, 2016	Nov. 20, 2017
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 22, 2016	Dec. 21, 2017
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 10, 2017	Mar. 09, 2018
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 28, 2016	Jul. 27, 2017
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- **NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  - 2. The test was performed in HwaYa Shielded Room 1.
  - 3. The VCCI Site Registration No. is C-2040.



#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit 20 dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz - 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

### 4.2.5 Test Setup

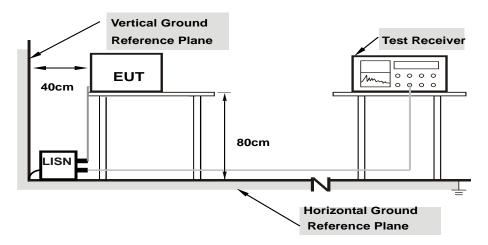

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

# 4.2.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.




# 4.2.7 Test Results

# <EUT without Docking>

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25℃, 65%RH
Tested by	Getaz Yang	Test Date	2017/5/11

	Phase Of Power : Line (L)									
No	Frequency	Correction Factor		g Value uV)		n Level uV)		nit uV)		rgin B)
INO	(MHz)	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17400	10.36	41.58	25.00	51.94	35.36	64.77	54.77	-12.83	-19.41
2	0.27400	10.38	26.55	8.83	36.93	19.21	61.00	51.00	-24.07	-31.79
3	0.49800	10.40	21.43	10.52	31.83	20.92	56.03	46.03	-24.20	-25.11
4	3.63800	10.55	20.34	9.72	30.89	20.27	56.00	46.00	-25.11	-25.73
5	13.55800	11.01	38.78	36.89	49.79	47.90	60.00	50.00	-10.21	-2.10
6	27.11800	11.58	31.69	28.10	43.27	39.68	60.00	50.00	-16.73	-10.32

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value

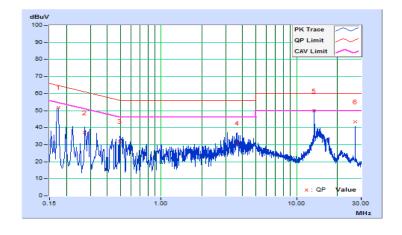




Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25℃, 65%RH
Tested by	Getaz Yang	Test Date	2017/5/11

	Phase Of Power : Neutral (N)									
	Frequency	Correction	Readin	g Value	Emissio	n Level	Lir	nit	Mai	rgin
No		Factor	(dB	uV)	(dB	uV)	(dB	uV)	(d	B)
	(MHz)	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17000	10.12	41.20	26.03	51.32	36.15	64.96	54.96	-13.64	-18.81
2	0.21805	10.14	31.30	11.45	41.44	21.59	62.89	52.89	-21.45	-31.30
3	0.51800	10.16	23.14	10.67	33.30	20.83	56.00	46.00	-22.70	-25.17
4	3.17800	10.29	18.60	8.17	28.89	18.46	56.00	46.00	-27.11	-27.54
5	13.56200	10.69	39.57	37.73	50.26	48.42	60.00	50.00	-9.74	-1.58
6	27.12200	11.12	30.01	26.38	41.13	37.50	60.00	50.00	-18.87	-12.50

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value

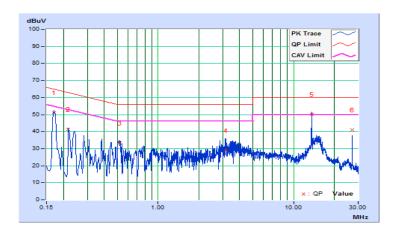




<EUT with Docking>

4201 With Booking								
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz					
Input Power	120Vac, 60Hz	Environmental Conditions	25℃, 65%RH					
Tested by	Getaz Yang	Test Date	2017/5/11					

	Phase Of Power : Line (L)									
No	Frequency	Correction Factor		g Value uV)		n Level uV)		nit uV)	Mai (d	•
INO	(MHz)	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	10.35	26.48	5.35	36.83	15.70	65.16	55.16	-28.33	-39.46
2	0.21015	10.37	21.17	1.69	31.54	12.06	63.20	53.20	-31.66	-41.14
3	0.47000	10.40	10.67	1.97	21.07	12.37	56.51	46.51	-35.44	-34.14
4	3.62200	10.55	8.83	-1.20	19.38	9.35	56.00	46.00	-36.62	-36.65
5	13.56200	11.01	33.77	34.05	44.78	45.06	60.00	50.00	-15.22	-4.94
6	27.12200	11.58	24.50	20.94	36.08	32.52	60.00	50.00	-23.92	-17.48

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value

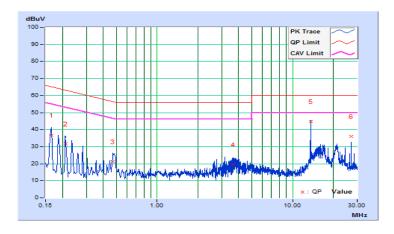




Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25℃, 65%RH
Tested by	Getaz Yang	Test Date	2017/5/11

Phase Of Power : Neutral (N)										
	Frequency	Correction	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
No		Factor								
	(MHz)	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17022	10.12	24.50	4.36	34.62	14.48	64.95	54.95	-30.33	-40.47
2	0.21805	10.14	19.28	1.57	29.42	11.71	62.89	52.89	-33.47	-41.18
3	0.47800	10.16	13.71	4.52	23.87	14.68	56.37	46.37	-32.50	-31.69
4	3.32600	10.30	7.33	-1.87	17.63	8.43	56.00	46.00	-38.37	-37.57
5	13.56200	10.69	34.79	35.07	45.48	45.76	60.00	50.00	-14.52	-4.24
6	27.12200	11.12	26.61	23.04	37.73	34.16	60.00	50.00	-22.27	-15.84

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value

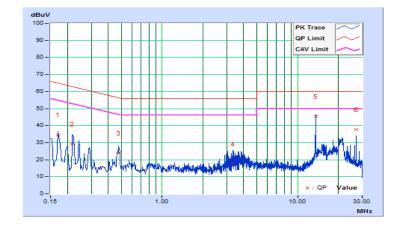




### 4.3 Frequency Stability

#### 4.3.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01 % of the operating frequency over a temperature variation of –20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115% of the rated supply voltage at a temperature of 20 degrees C.

#### 4.3.2 Test Setup

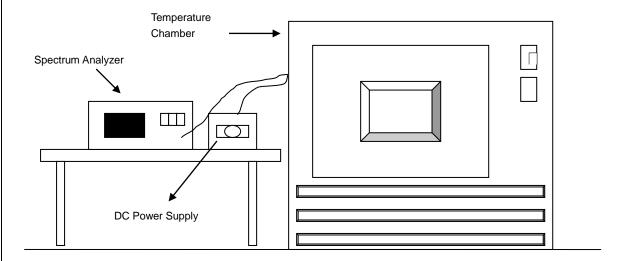

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turned the EUT on and coupled its output to a spectrum analyzer.
- c. Turned the EUT off and set the chamber to the highest temperature specified.
- d. Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- e. Repeated step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85 % to 115 % and the frequency record.

## 4.3.5 Deviation from Test Standard

No deviation.

### 4.3.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.



# 4.3.7 Test Result

Frequency Stability Versus Temperature									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.560058	0.00043	13.560047	0.00035	13.560056	0.00041	13.560059	0.00044
40	120	13.560036	0.00027	13.560021	0.00015	13.560024	0.00018	13.560044	0.00032
30	120	13.559972	-0.00021	13.559968	-0.00024	13.559955	-0.00033	13.559964	-0.00027
20	120	13.560055	0.00041	13.560038	0.00028	13.560038	0.00028	13.560055	0.00041
10	120	13.560041	0.00030	13.560042	0.00031	13.560042	0.00031	13.560038	0.00028
0	120	13.559964	-0.00027	13.559955	-0.00033	13.559962	-0.00028	13.559969	-0.00023
-10	120	13.560036	0.00027	13.56003	0.00022	13.560035	0.00026	13.560022	0.00016
-20	120	13.559944	-0.00041	13.559946	-0.00040	13.559929	-0.00052	13.559934	-0.00049
-30	120	13.560057	0.00042	13.560054	0.00040	13.560042	0.00031	13.560063	0.00046

Frequency Stability Versus Voltage										
Temp. (℃)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute		
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%	
20	138	13.560056	0.00041	13.560038	0.00028	13.560035	0.00026	13.560052	0.00038	
	120	13.560055	0.00041	13.560038	0.00028	13.560038	0.00028	13.560055	0.00041	
	102	13.560055	0.00041	13.560037	0.00027	13.560039	0.00029	13.560055	0.00041	



#### 4.4 20 dB Bandwidth

### 4.4.1 Limits of 20 dB Bandwidth Measurement

The 20 dB bandwidth shall be specified in operating frequency band.

### 4.4.2 Test Setup

Refer to section 4.1.5.

#### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1 kHz RBW and 3 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

#### 4.4.5 Deviation from Test Standard

No deviation.


# 4.4.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.




# 4.4.7 Test Results

20 dBc Point (Low)	20 dBc Point (High)	Operating Frequency Band (MHz)	Pass / Fail	
13.558653846 MHz	13.561217949 MHz	13.553~13.567	Pass	

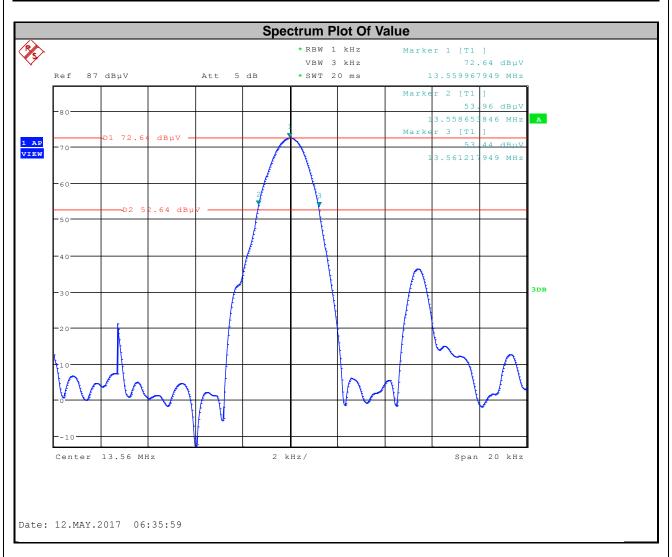



Operating frequency band (MHz)	Occupied Bandwidth (kHz)	Pass / Fail	
13.553~13.567	2.243585744	Pass	

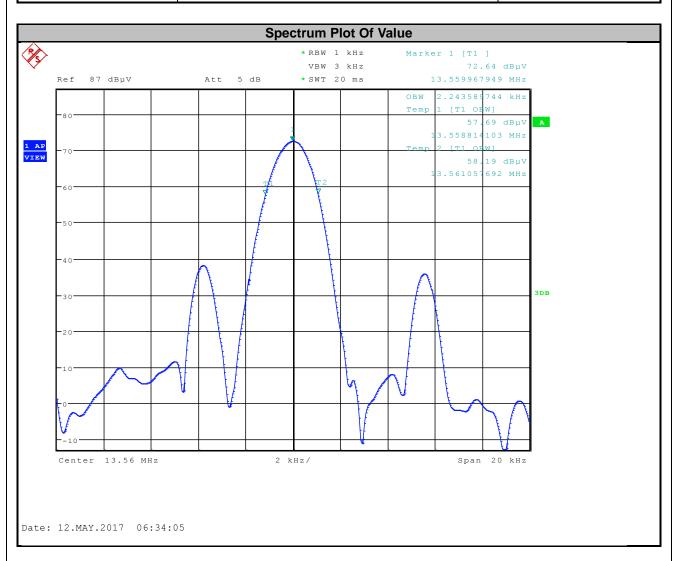



5 Pictures of Test Arrangements								
Please refer to the attached file (Test Setup Photo).								



# Appendix - Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab Hsin Chu EMC/RF/Telecom Lab

Tel: 886-2-26052180 Tel: 886-3-6668565 Fax: 886-2-26051924 Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232 Fax: 886-3-3270892

Email: <a href="mailto:service.adt@tw.bureauveritas.com">service.adt@tw.bureauveritas.com</a>
Web Site: <a href="mailto:www.bureauveritas-adt.com">www.bureauveritas-adt.com</a>

The address and road map of all our labs can be found in our web site also.

--- END ---