



FCC PART 15.247

TEST REPORT

For

Shenzhen Eastfield Lighting Co.,Ltd

No.6 industrial Zone, Fugaodong Road, Gaoqiao District, Pingdi Street, Longgang Area, Shenzhen, Guangdong, P.R.China 518116

FCC ID: 2AFE6ZB100B

Report Type: Original Report	Product Type: Zigbee module
Test Engineer: <u>Lion Xiao</u> 	
Report Number: <u>RDG150713050-00</u>	
Report Date: <u>2015-07-24</u>	
Reviewed By: <u>Sula Huang</u> RF Leader	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1307 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	24

APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(e) - POWER SPECTRAL DENSITY	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen Eastfield Lighting Co.,Ltd*'s product, model number: *EF-CDT-ZB100B-00 (FCC ID: 2AFE6ZB100B)* (the "EUT") in this report was a *Zigbee module*, which was measured approximately: 15.80 mm (L) x 12.37 mm (W) x 0.9 mm (H), rated input voltage: DC3.0~3.6V from system.

All measurement and test data in this report was gathered from production sample serial number: 150713050 (Assigned by BACL, Dongguan). The EUT was received on 2015-07-13.

Objective

This report is prepared on behalf of *Shenzhen Eastfield Lighting Co.,Ltd*. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer.

For Zigbee mode, 16 channels are provided to testing and CH11, CH18, CH26 were selected to test.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:


Test Mode	Test Software Version	COMDBG V1.3		
		2405MHz	2440 MHz	2480MHz
Zigbee	Test Frequency	2405MHz	2440 MHz	2480MHz
	Power Level Setting	40	40	40

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
STC	Test Jig (ISP)	H1032	/

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

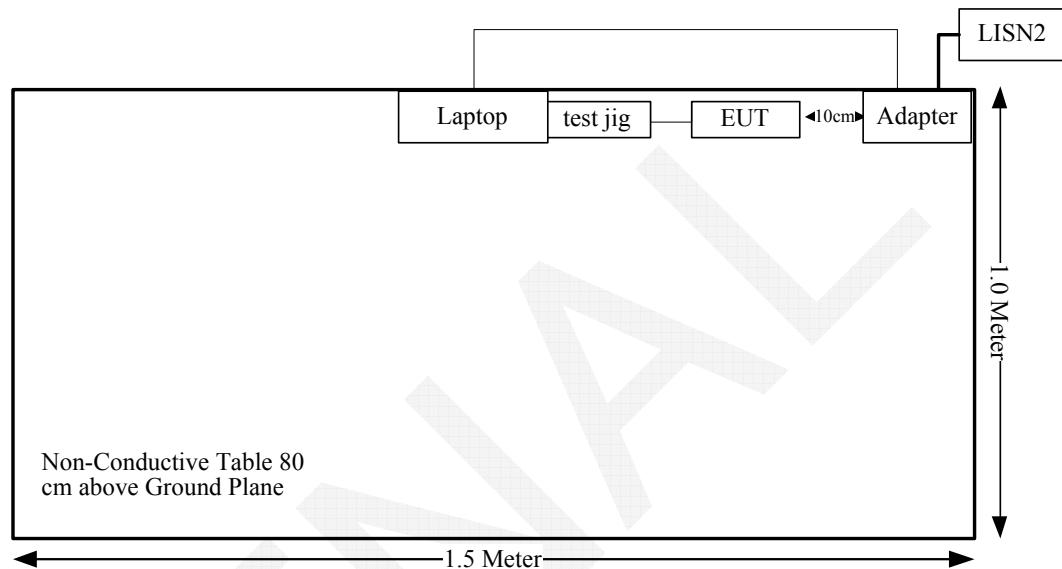Configuration of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1307 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Zigbee	2480	2.0	1.58	10.64	11.59	20	0.00364	1.0

Result: The device meets FCC MPE limit at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

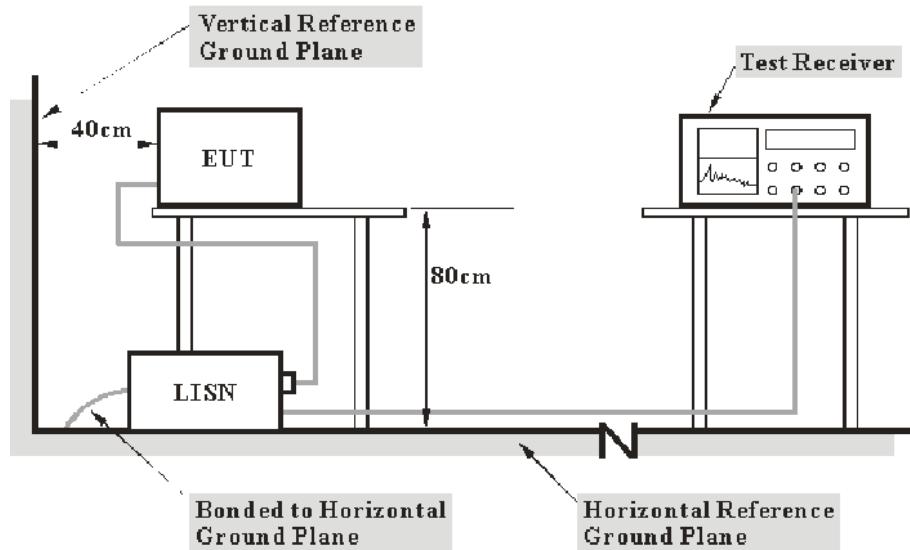

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter of laptop was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-20	2015-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-06-09	2016-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

7.10 dB at 0.600101 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	27.4 °C
Relative Humidity:	59 %
ATM Pressure:	100.1 kPa

The testing was performed by Lion Xiao on 2015-07-23.

Test Mode: Transmitting


AC120 V/60 Hz, Line:

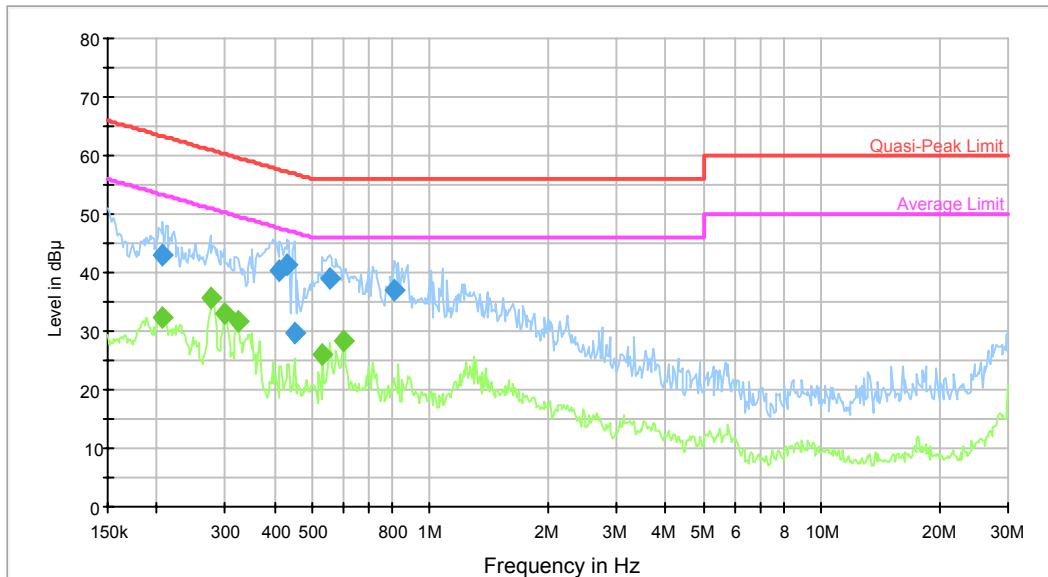

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.207957	42.9	9.000	L1	10.2	20.4	63.3	Compliance
0.412647	40.5	9.000	L1	10.2	17.1	57.6	Compliance
0.432855	41.2	9.000	L1	10.2	16.0	57.2	Compliance
0.450448	29.5	9.000	L1	10.2	27.3	56.9	Compliance
0.554139	38.9	9.000	L1	10.1	17.1	56.0	Compliance
0.812315	36.9	9.000	L1	10.4	19.1	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.207957	32.4	9.000	L1	10.2	20.9	53.3	Compliance
0.277046	35.7	9.000	L1	10.3	15.2	50.9	Compliance
0.300025	32.9	9.000	L1	10.3	17.3	50.2	Compliance
0.322331	31.7	9.000	L1	10.3	18.0	49.6	Compliance
0.532496	25.9	9.000	L1	10.1	20.2	46.0	Compliance
0.600101	28.3	9.000	L1	10.3	17.7	46.0	Compliance

*within measurement uncertainty!

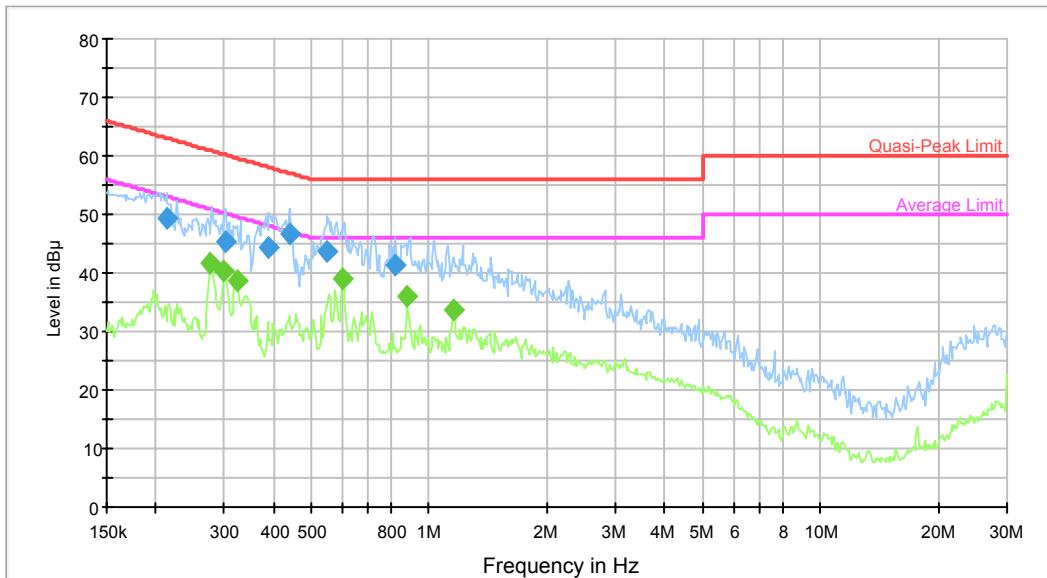AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.212988	49.4	9.000	N	10.2	13.7	63.1	Compliance
0.302425	45.2	9.000	N	10.3	14.9	60.2	Compliance
0.390261	44.2	9.000	N	10.2	13.8	58.1	Compliance
0.439808	46.6	9.000	N	10.2	10.5	57.1	Compliance
0.549741	43.7	9.000	N	10.1	12.3	56.0	Compliance
0.818813	41.4	9.000	N	10.4	14.6	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.277046	41.8	9.000	N	10.3	9.1	50.9	Compliance
0.300025	40.3	9.000	N	10.3	9.9	50.2	Compliance
0.324910	38.6	9.000	N	10.3	11.0	49.6	Compliance
0.600101	38.9	9.000	N	10.3	7.1	46.0	Compliance
0.879690	36.0	9.000	N	10.4	10.0	46.0	Compliance
1.153421	33.7	9.000	N	10.4	12.3	46.0	Compliance

*within measurement uncertainty!

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

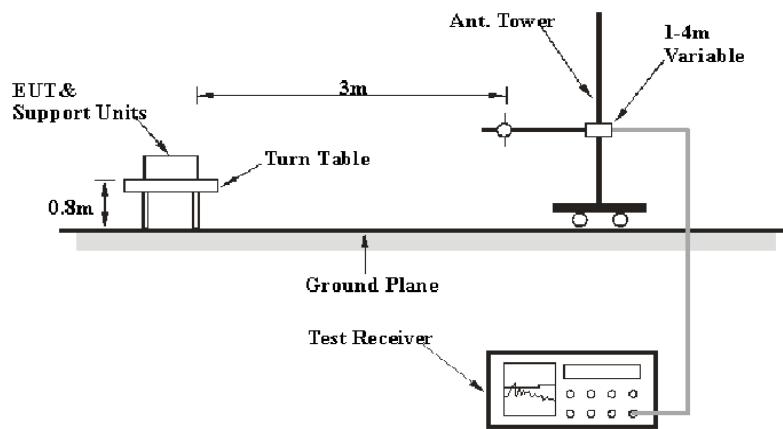

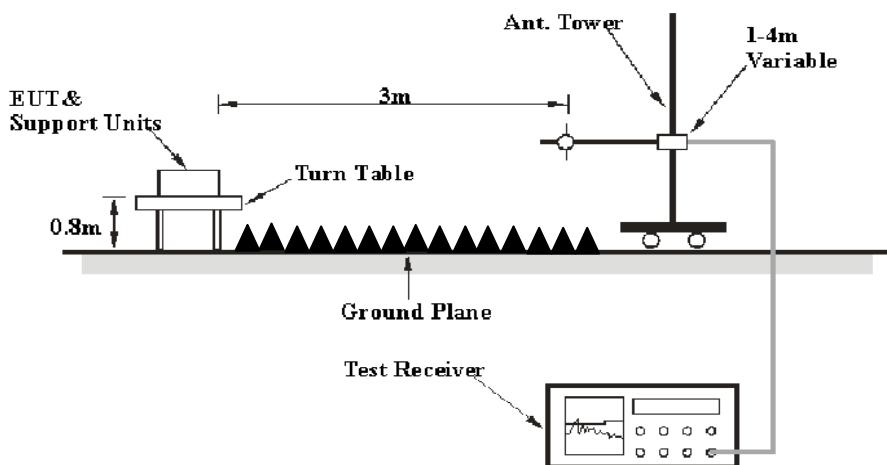Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter of laptop was connected to the first AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-05-09	2016-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	E4440A	SG43360054	2014-12-04	2015-12-04
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2014-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

1.28 dB at 4880 MHz in the **Horizontal** polarization

Test Data

Environmental Conditions

Temperature:	27.9°C
Relative Humidity:	66 %
ATM Pressure:	100.1 kPa

* The testing was performed by Lion Xiao on 2015-07-23.


Test Mode: Transmitting

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2405 MHz									
2405	71.51	PK	H	25.65	3.66	0.00	100.82	N/A	N/A
2405	61.12	AV	H	25.65	3.66	0.00	90.43	N/A	N/A
2405	70.58	PK	V	25.65	3.66	0.00	99.89	N/A	N/A
2405	60.15	AV	V	25.65	3.66	0.00	89.46	N/A	N/A
2390	27.73	PK	H	25.61	3.63	0.00	56.97	74.00	17.03
2390	15.58	AV	H	25.61	3.63	0.00	44.82	54.00	9.18
4810	56.31	PK	H	30.61	5.05	27.41	64.56	74.00	9.44
4810	44.27	AV	H	30.61	5.05	27.41	52.52	54.00	1.48*
7215	48.8	PK	H	34.12	6.62	25.91	63.63	74.00	10.37
7215	36.27	AV	H	34.12	6.62	25.91	51.10	54.00	2.90*
9620	33.49	PK	H	35.99	8.54	27.53	50.49	74.00	23.51
9620	20.61	AV	H	35.99	8.54	27.53	37.61	54.00	16.39
4365	36.28	PK	H	29.83	5.00	26.92	44.19	74.00	29.81
4365	23.48	AV	H	29.83	5.00	26.92	31.39	54.00	22.61
241.7	36.6	QP	H	12.23	1.86	21.49	29.20	46.00	16.80
Middle Channel: 2440 MHz									
2440	71.5	PK	H	25.74	3.76	0.00	101.00	N/A	N/A
2440	61.13	AV	H	25.74	3.76	0.00	90.63	N/A	N/A
2440	70.59	PK	V	25.74	3.76	0.00	100.09	N/A	N/A
2440	60.18	AV	V	25.74	3.76	0.00	89.68	N/A	N/A
4880	56.42	PK	H	30.79	5.18	27.42	64.97	74.00	9.03
4880	44.17	AV	H	30.79	5.18	27.42	52.72	54.00	1.28*
7320	48.9	PK	H	34.37	6.75	25.88	64.14	74.00	9.86
7320	36.38	AV	H	34.37	6.75	25.88	51.62	54.00	2.38*
9760	33.4	PK	H	36.32	8.62	27.21	51.13	74.00	22.87
9760	20.54	AV	H	36.32	8.62	27.21	38.27	54.00	15.73
4365	36.19	PK	H	29.83	5.00	26.92	44.10	74.00	29.90
4365	23.31	AV	H	29.83	5.00	26.92	31.22	54.00	22.78
1780	35.68	PK	H	24.16	2.61	27.56	34.89	74.00	39.11
1780	22.79	AV	H	24.16	2.61	27.56	22.00	54.00	32.00
241.7	36.9	QP	H	12.23	1.86	21.49	29.50	46.00	16.50
High Channel: 2480 MHz									
2480	70.43	PK	H	25.85	3.68	0.00	99.96	N/A	N/A
2480	60.04	AV	H	25.85	3.68	0.00	89.57	N/A	N/A
2480	69.55	PK	V	25.85	3.68	0.00	99.08	N/A	N/A
2480	59.13	AV	V	25.85	3.68	0.00	88.66	N/A	N/A
2483.5	27.37	PK	H	25.86	3.67	0.00	56.90	74.00	17.10
2483.5	15.26	AV	H	25.86	3.67	0.00	44.79	54.00	9.21
4960	55.24	PK	H	31.00	5.34	27.43	64.15	74.00	9.85
4960	43.16	AV	H	31.00	5.34	27.43	52.07	54.00	1.93*
7440	47.73	PK	H	34.66	6.89	25.97	63.31	74.00	10.69
7440	35.22	AV	H	34.66	6.89	25.97	50.80	54.00	3.20*
9920	32.3	PK	H	36.71	8.71	26.66	51.06	74.00	22.94
9920	19.52	AV	H	36.71	8.71	26.66	38.28	54.00	15.72
1780	35.11	PK	H	24.16	2.61	27.56	34.32	74.00	39.68
1780	22.3	AV	H	24.16	2.61	27.56	21.51	54.00	32.49
241.7	36.7	QP	H	12.23	1.86	21.49	28.70	46.00	16.70


*within measurement uncertainty!


Conducted Spurious Emissions at Antenna Port

Low Channel

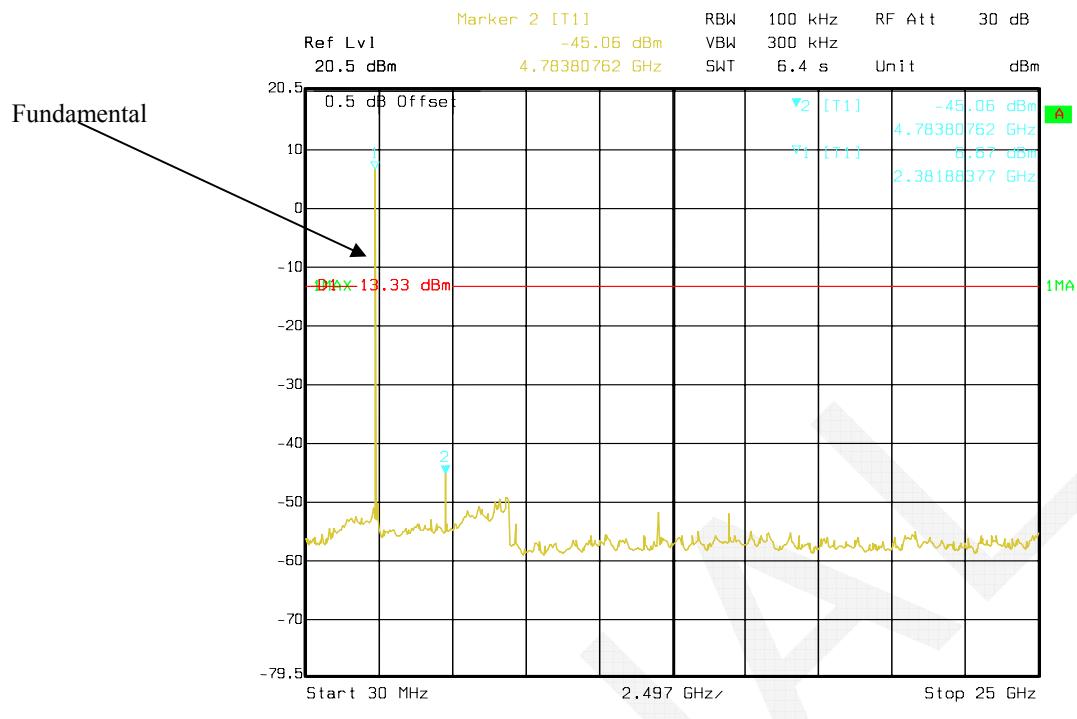

Middle Channel

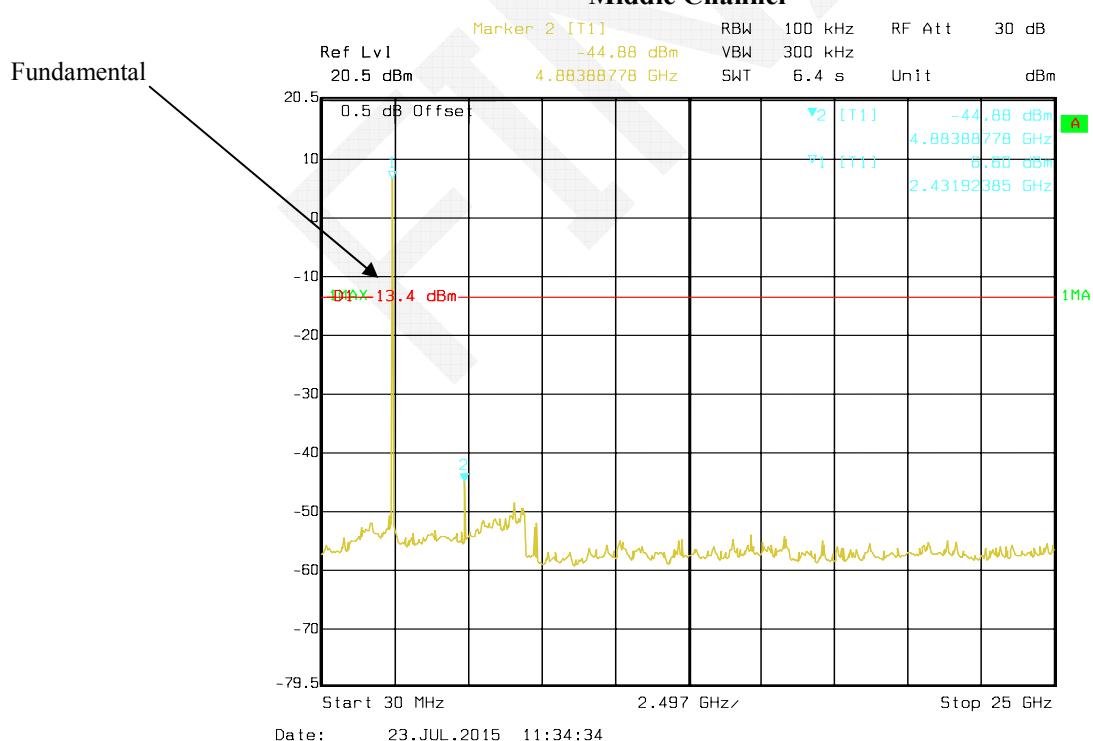

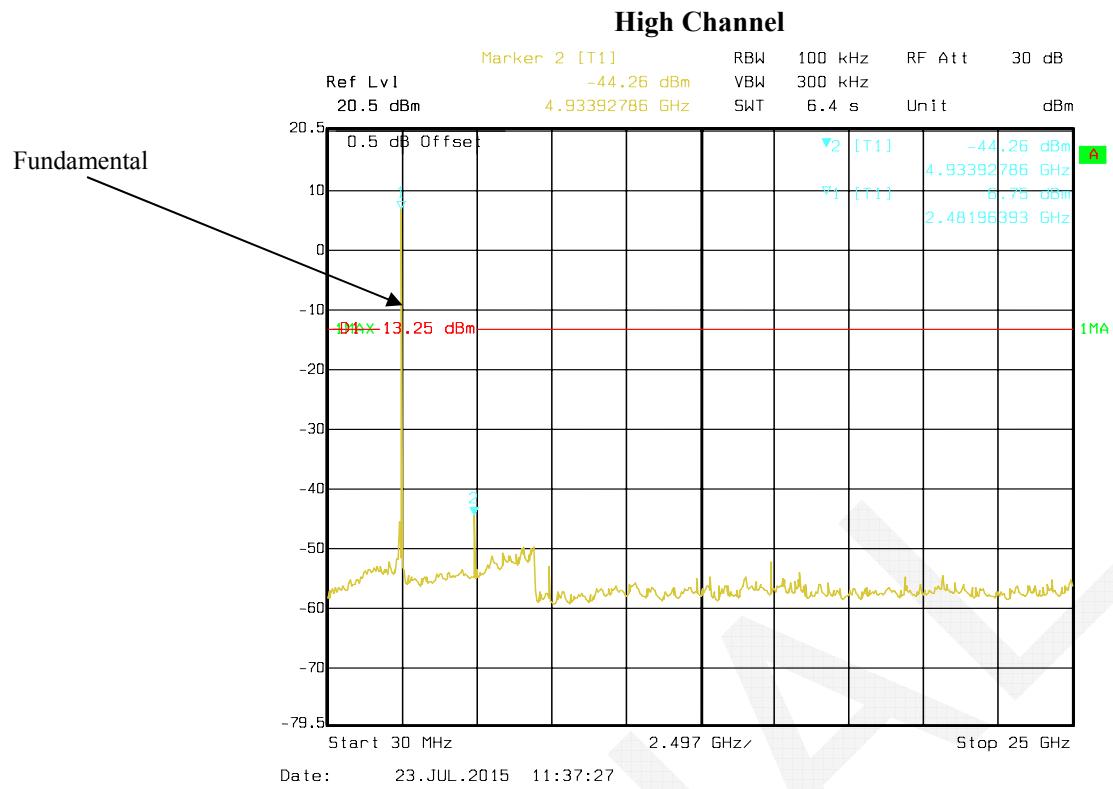

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.9°C
Relative Humidity:	66 %
ATM Pressure:	100.1 kPa


* The testing was performed by Lion Xiao on 2015-07-23.



Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
Zigbee	Low	2405	1.523	≥0.5
	Middle	2440	1.523	≥0.5
	High	2480	1.533	≥0.5

Low Channel

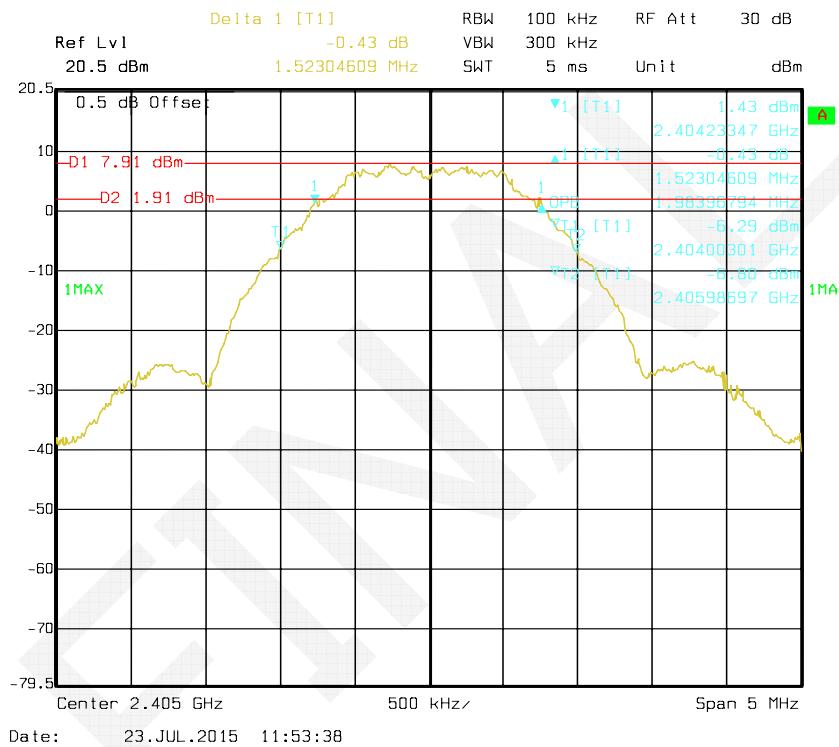

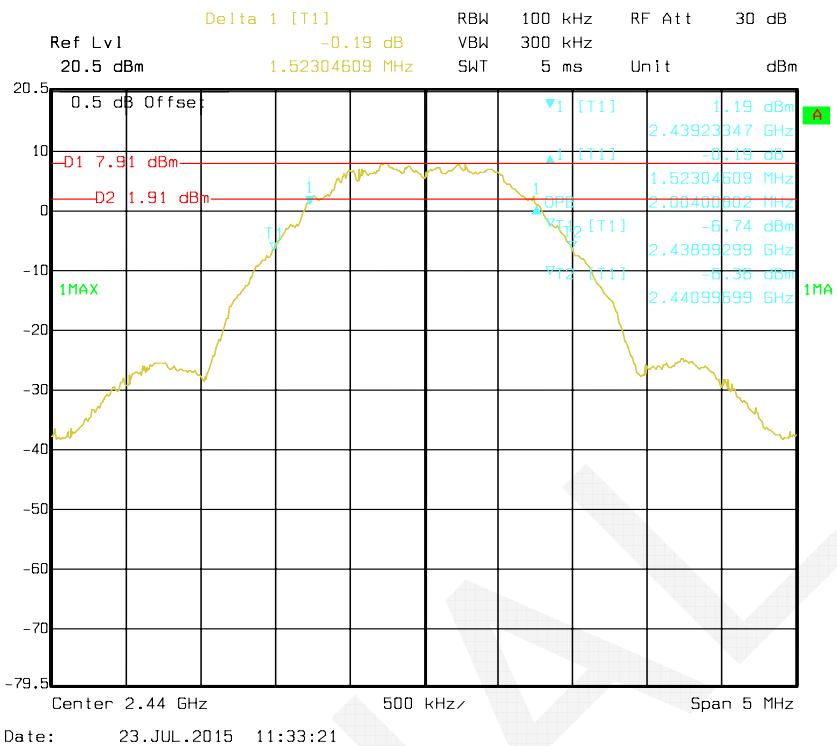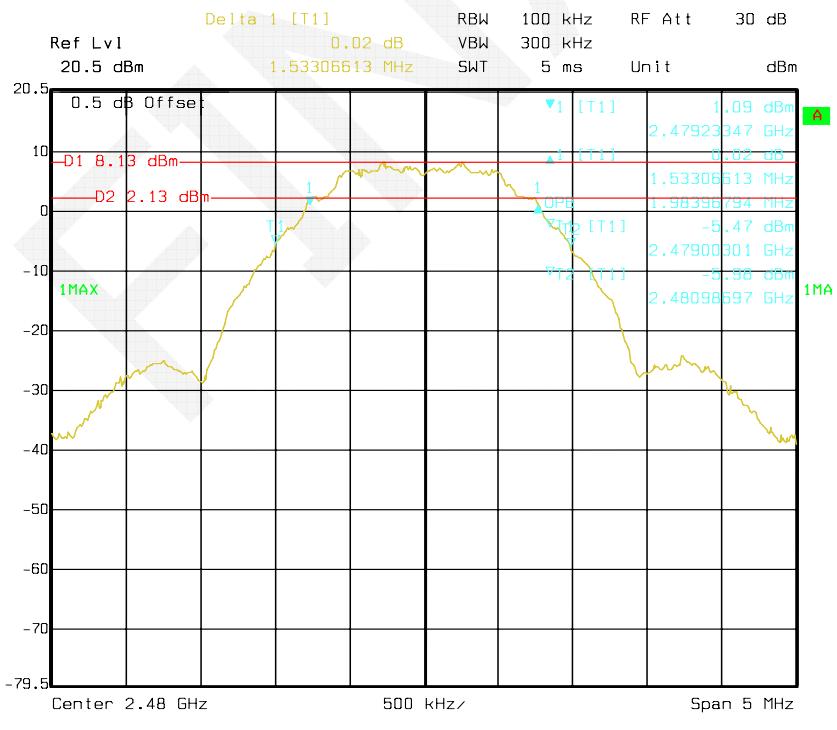Middle Channel**High Channel**

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.9°C
Relative Humidity:	66 %
ATM Pressure:	100.1 kPa


* The testing was performed by Lion Xiao on 2015-07-23.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.


Test mode	Channel	Frequency	Max Peak Conducted Output Power	Limit	Result
		(MHz)	(dBm)	(dBm)	
Zigbee	Low	2405	10.45	30	PASS
	Middle	2440	10.53	30	PASS
	High	2480	10.64	30	PASS

Please refer to the following plots

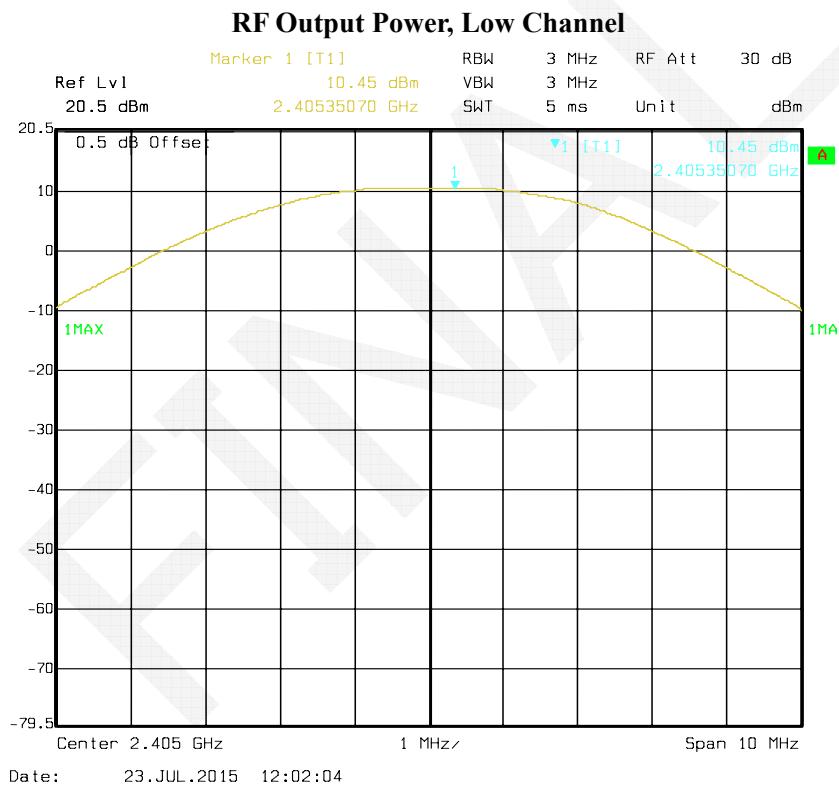

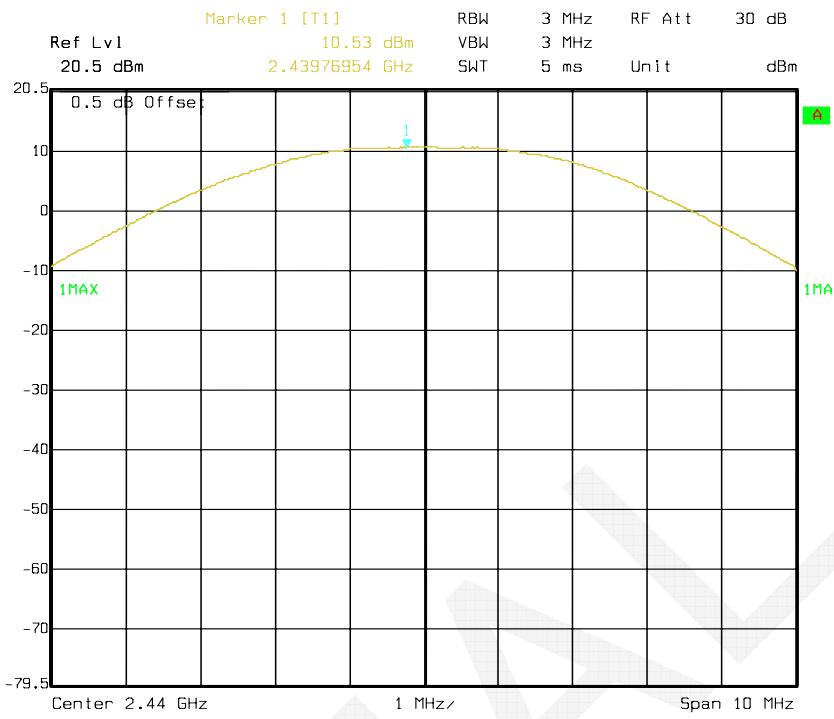RF Output Power, Middle Channel

Date: 23.JUL.2015 11:28:16

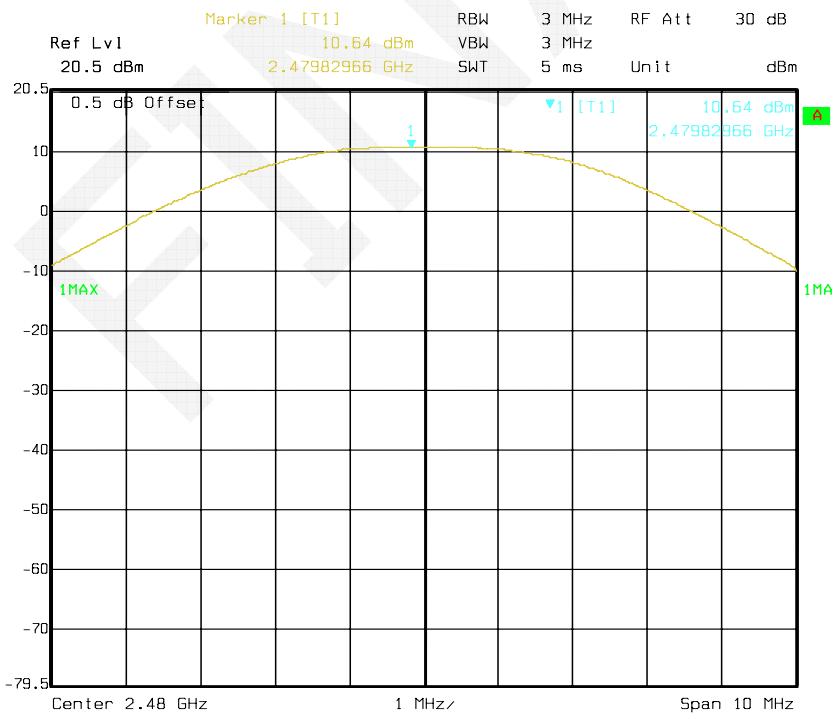RF Output Power, High Channel

Date: 23.JUL.2015 11:37:54

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27.9°C
Relative Humidity:	66 %
ATM Pressure:	100.1 kPa

* The testing was performed by Lion Xiao on 2015-07-23.


Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.

Band Edge, Left Side

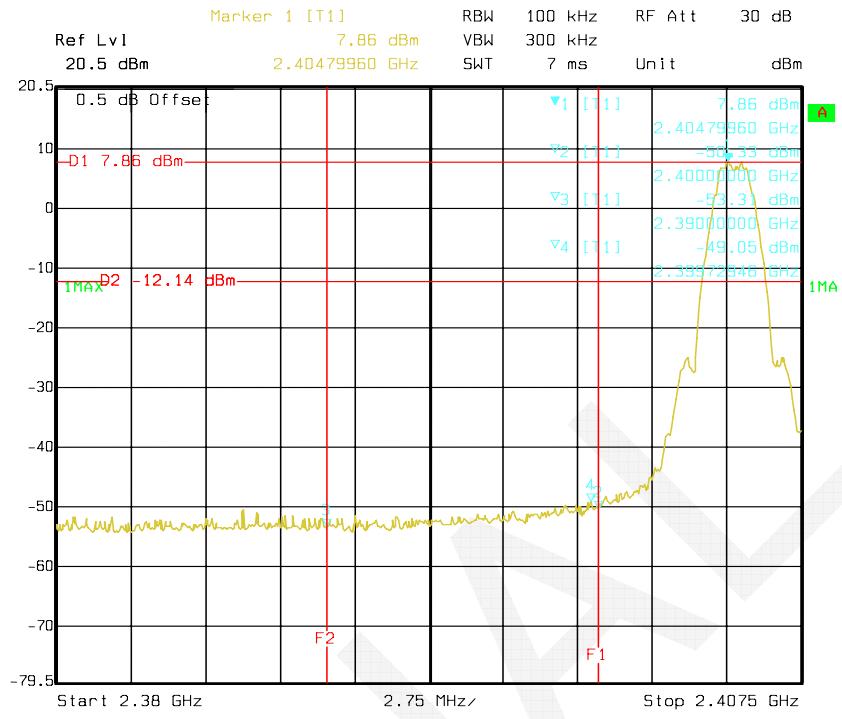

Band Edge, Right Side

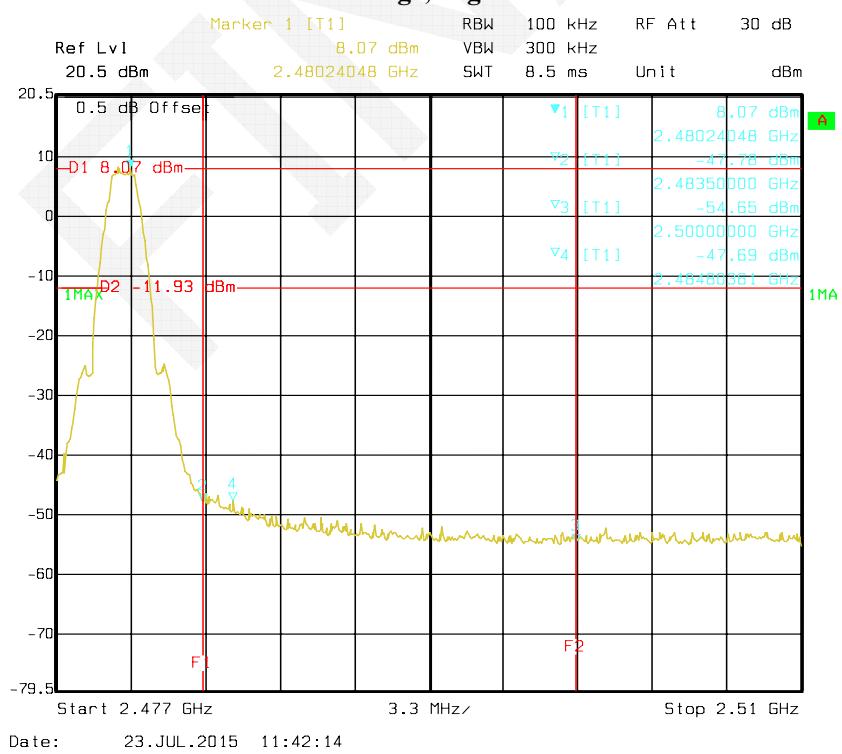

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.9°C
Relative Humidity:	66 %
ATM Pressure:	100.1 kPa


* The testing was performed by Lion Xiao on 2015-07-23.



Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Zigbee	Low	2405	-4.38	≤8
	Middle	2440	-4.24	≤8
	High	2480	-4.16	≤8

Power Spectral Density, Low Channel

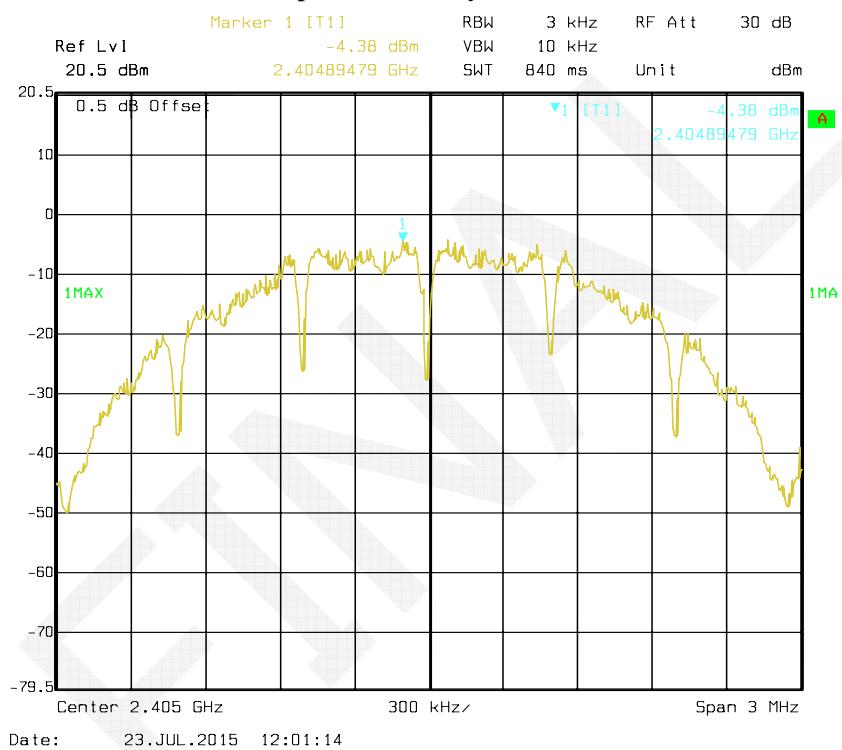

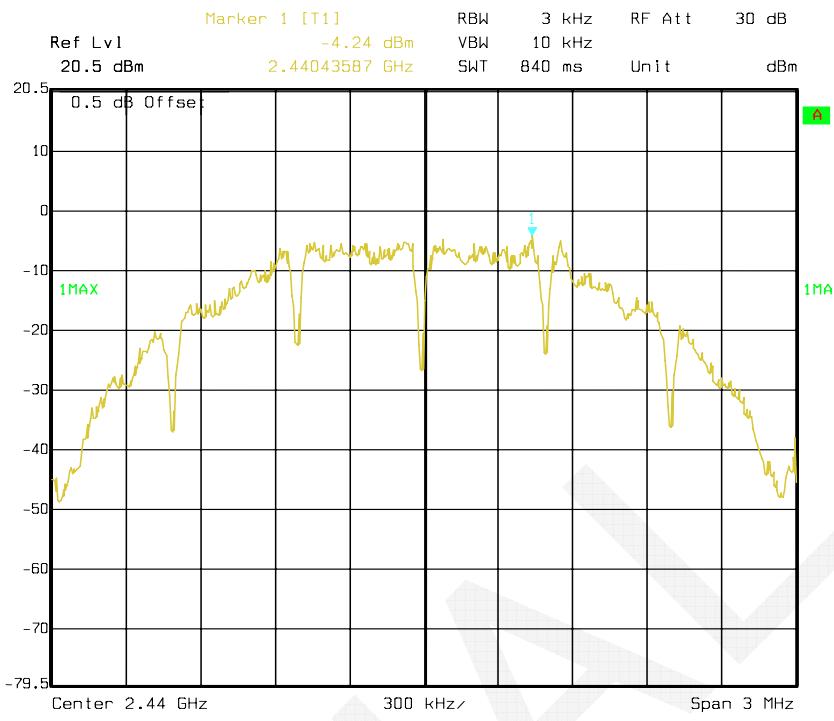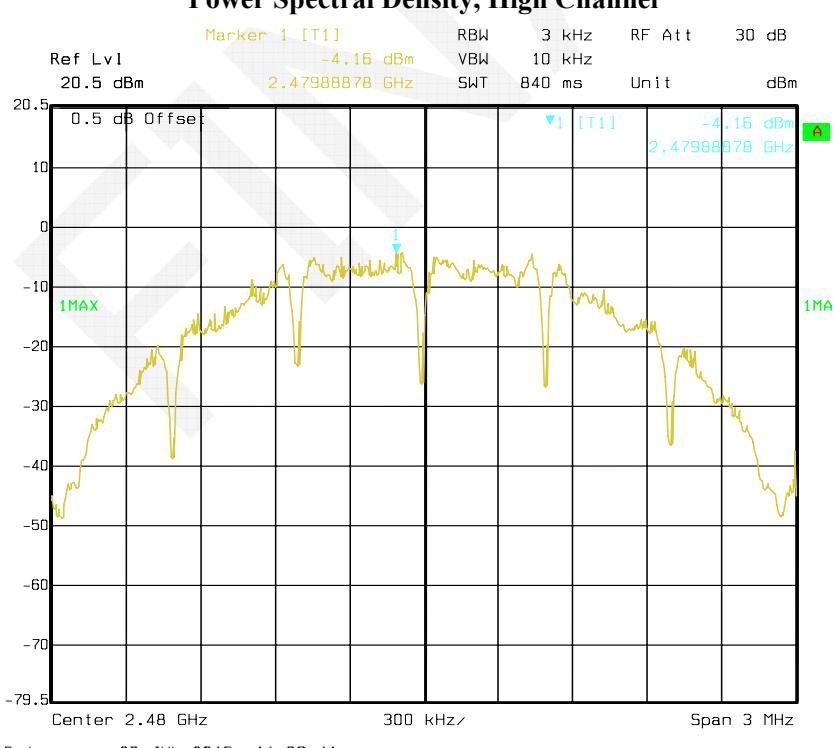Power Spectral Density, Middle Channel**Power Spectral Density, High Channel**

*****END OF REPORT*****