

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 1 of 57

Applicant : Shanghai Xiaoyi Technology Co., Ltd.
: Building 18, Lane 55, Chuanke Road, China (Shanghai)
Address of Applicant : Pilot Free Trade Zone

Product Name : Kami Doorbell Camera
Model No. : YDS.20120
: E20080007-01#01
Sample No. : E20080007-01#02
: 2AFIB-YDS20120
FCC ID : Kami Doorbell Camera

Standards : FCC CFR47 Part 15, Subpart C

Date of Receipt : 2020-08-12
Date of Test : 2020-08-16 ~ 2020-08-18
Date of Issue : 2020-08-28

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by: Jennifer Zhou
(Jennifer Zhou)

Reviewed by: Oliver Xiang
(Oliver Xiang)

Approved by: Guoyou Chi
(Authorized signatory: Guoyou Chi)

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 2 of 57

Revision Record			
Version	Date	Revisions	Revised By
1.0	2019-10-31	Original	--

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 3 of 57

Contents

1	GENERAL INFORMATION	4
1.1	TESTING LABORATORY	4
1.2	DETAILS OF APPLICATION	4
1.3	DETAILS OF EUT	4
1.4	TEST METHODOLOGY	5
2	TEST CONDITION	6
2.1	ENVIRONMENTAL CONDITIONS	6
2.2	EQUIPMENT LIST	6
2.3	MEASUREMENT UNCERTAINTY	6
3	TEST SET-UP AND OPERATION MODES	7
3.1	DETAILS OF TEST MODE	7
3.2	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	7
3.3	SUPPORT SOFTWARE	7
4	TEST RESULTS	10
4.1	TRANSMITTER REQUIREMENT & TEST SUITES	10
4.1.1	<i>Antenna Requirement</i>	10
4.1.2	<i>Peak Output Power</i>	11
4.1.3	<i>6dB Bandwidth and 99% Bandwidth</i>	12
4.1.4	<i>Power Spectral Density</i>	22
4.1.5	<i>Conducted Spurious Emission & Authorized-band band-edge</i>	28
4.1.6	<i>Spurious Emission</i>	50
4.1.7	<i>Band Edge (Restricted-band band-edge)</i>	51
4.2	MAINS EMISSIONS	52
4.2.1	<i>Conducted Emission on AC Mains</i>	52
5	APPENDIXES	55
5.1	PHOTOGRAPHS OF THE SAMPLE	55
5.2	SET-UP FOR CONDUCTED EMISSIONS	56
5.3	SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT	56
5.4	SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ	57
5.5	SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ	57

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 4 of 57

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Services (Shanghai) Co., Ltd.
Address	155 Pingbei Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Company Name	Shanghai Xiaoyi Technology Co., Ltd.
Address	Building 18, Lane 55, Chuanke Road, China (Shanghai) Pilot Free Trade Zone
Contact Person	Jackie Han
Telephone	+86-21-61656722
Email	han.guangbao@xiaoyi.com

1.3 Details of EUT

Product Name	Kami Doorbell Camera
Brand Name	Kami
Model No.	YDS.20120
FCC ID	2AFIB-YDS20120
Mode of Operation	WLAN 802.11b/g/n(HT20)
Frequency Range	2400MHz ~ 2483.5MHz
Channel Separation	5 MHz
Modulation Type	DSSS, OFDM
Antenna Type	FPC Antenna
Antenna Gain	1.88 dBi
Extreme Temperature Range	-10℃~ +40℃
Test Voltage	DC 3.7V

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 5 of 57

1.4 Test Methodology

47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
KDB Publication 558074 D01 v05r02	15.247 Meas Guidance.
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 6 of 57

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Spectrum Analyzer	Keysight	N9020B	MY59260184	2021-08-19
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2021-06-24
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2021-06-19
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2021-06-19
V-network	SCHWARZBECK	NSLK 8127	8127-902	2021-02-20
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	100687	2021-08-19
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2021-06-06
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2021-06-06
Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2021-03-19
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2021-07-26
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2021-06-08
Shielded Enclosure 8*5*4 (L*W*H)	CHANGNING	854	N/A	2021-06-08
Test Software	BL	BL410_E	N/A	N/A

2.3 Measurement Uncertainty

Parameter	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	± 1.5 dB
	> 1GHz	± 1.5 dB
Radiated Emission	30 MHz – 1 GHz	± 3 dB
	> 1GHz	± 3 dB

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 7 of 57

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software was control EUT work in continuous transmitter and receiver mode. Select test channel as below:
For 802.11b/g/n (HT20)

Channel	Frequency
The lowest channel(CH1)	2412MHz
The middle channel(CH6)	2437MHz
The Highest channel(CH11)	2462MHz

Through Pre-scan under all rate at lowest channel, the data rate as below table described is the worst case, so we choose these data rate for test.

Type	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(20M)	MCS0

The basic operation modes are:

- A. On
 - 1. WLAN mode
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
- B. Standby
- C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	TP00083A	N/A

3.3 Support Software

Description	Manufacturer	Software Name
Software	/	RF Test Tool

TEST REPORT


Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 8 of 57


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

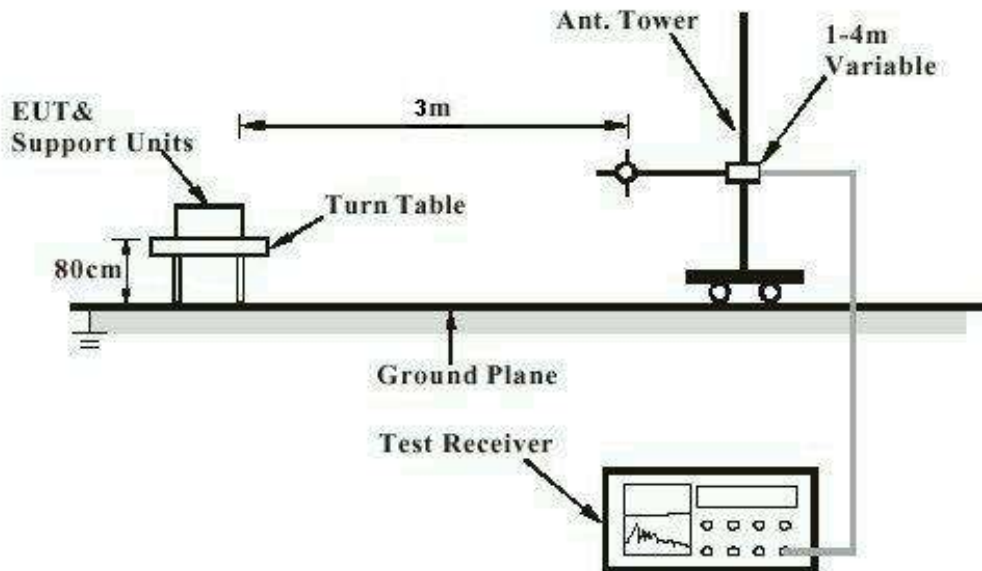

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Conduction Measurement

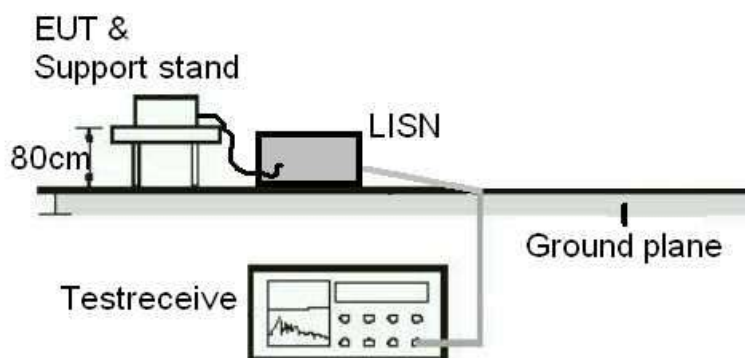


TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 9 of 57

Diagram of Measurement Equipment Configuration for Transmitter Measurement

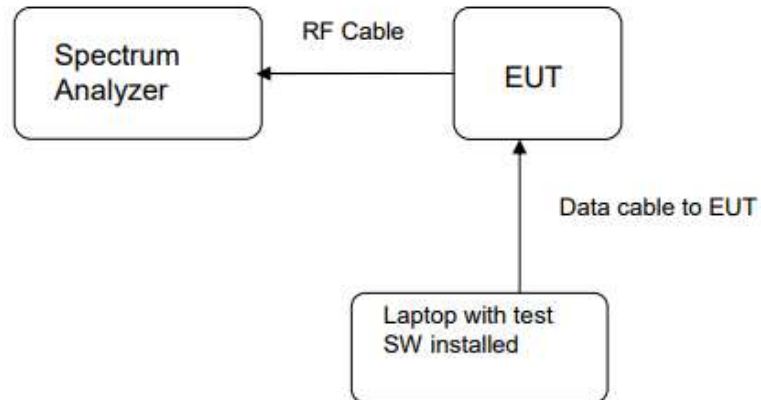

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 10 of 57

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard	: FCC Part 15.247(b)(4), Part 15.203
Requirement	: The use of approved antennas only with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 1.88 dBi. The antenna is an internal antenna with no possibility of replacement with a non-approved antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 11 of 57

4.1.2 Peak Output Power

RESULT:

PASS

Test standard : FCC Part 15.247(b)(3)
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 52%

Table 1: Peak Output Power

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(mW)	
802.11b	2412	20.61	115.08	< 1
	2437	20.75	118.85	
	2462	20.87	122.18	
802.11g	2412	18.83	76.38	
	2437	18.79	75.68	
	2462	18.91	77.80	
802.11n(HT20)	2412	18.27	67.14	
	2437	18.33	68.08	
	2462	18.37	68.71	

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 12 of 57

4.1.3 6dB Bandwidth and 99% Bandwidth

RESULT:

PASS

Test standard : FCC Part 15.247(a)(2)
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 52%

Table 2: 6dB Bandwidth and 99% Bandwidth

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limit (MHz)
802.11b	2412	8.260	12.389	0.5
	2437	9.010	12.546	
	2462	8.860	12.655	
802.11g	2412	12.370	17.209	
	2437	12.620	17.253	
	2462	13.570	17.124	
802.11n(HT20)	2412	13.970	18.145	
	2437	15.070	18.156	
	2462	14.570	18.176	

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 13 of 57

Figure 1: 6dB Bandwidth and 99% Bandwidth, 802.11b, 2412MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 14 of 57

Figure 2: 6dB Bandwidth and 99% Bandwidth, 802.11b, 2437MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 15 of 57

Figure 3: 6dB Bandwidth and 99% Bandwidth, 802.11b, 2462MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 16 of 57

Figure 4: 6dB Bandwidth and 99% Bandwidth, 802.11g, 2412MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 17 of 57

Figure 5: 6dB Bandwidth and 99% Bandwidth, 802.11g, 2437MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 18 of 57

Figure 6: 6dB Bandwidth and 99% Bandwidth, 802.11g, 2462MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 19 of 57

Figure 7: 6dB Bandwidth and 99% Bandwidth, 802.11n(HT20), 2412MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 20 of 57

Figure 8: 6dB Bandwidth and 99% Bandwidth, 802.11n(HT20), 2437MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 21 of 57

Figure 9: 6dB Bandwidth and 99% Bandwidth, 802.11n(HT20), 2462MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 22 of 57

4.1.4 Power Spectral Density

RESULT:

PASS

Test standard : FCC Part 15.247(e)
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 52%

Table 3: Power Spectral Density

Test Mode	Test Channel (MHz)	Measured Result (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	2412	-3.52	8
	2437	-4.23	
	2462	-3.22	
802.11g	2412	-7.41	
	2437	-7.40	
	2462	-7.31	
802.11n(HT20)	2412	-7.69	
	2437	-8.08	
	2462	-7.34	

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 23 of 57

Figure 10: Power Spectral Density, 802.11b, 2412MHz



Figure 11: Power Spectral Density, 802.11b, 2437MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 24 of 57

Figure 12: Power Spectral Density, 802.11b, 2462MHz



Figure 13: Power Spectral Density, 802.11g, 2412MHz



TEST REPORT

Report No.: SHE20080007-02CE


Date: 2020-08-28

Page 25 of 57

Figure 14: Power Spectral Density, 802.11g, 2437MHz



Figure 15: Power Spectral Density, 802.11g, 2462MHz

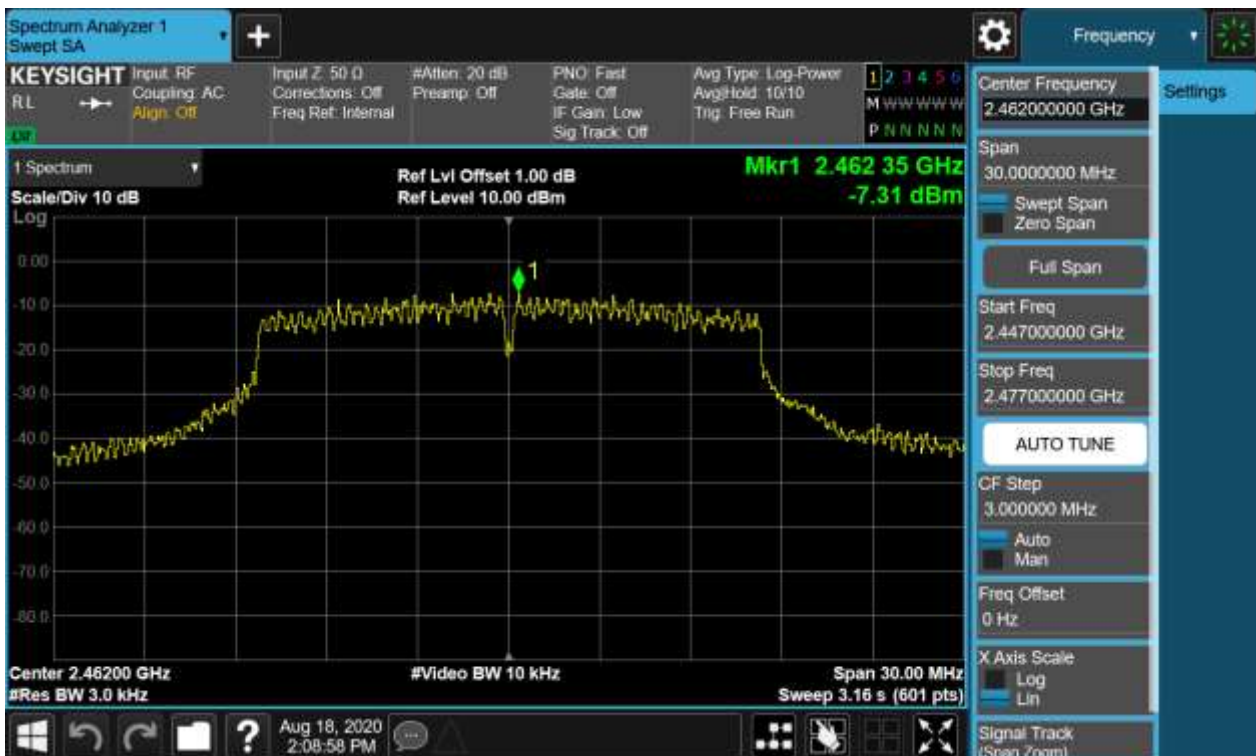

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 26 of 57

Figure 16: Power Spectral Density, 802.11n(HT20), 2412MHz


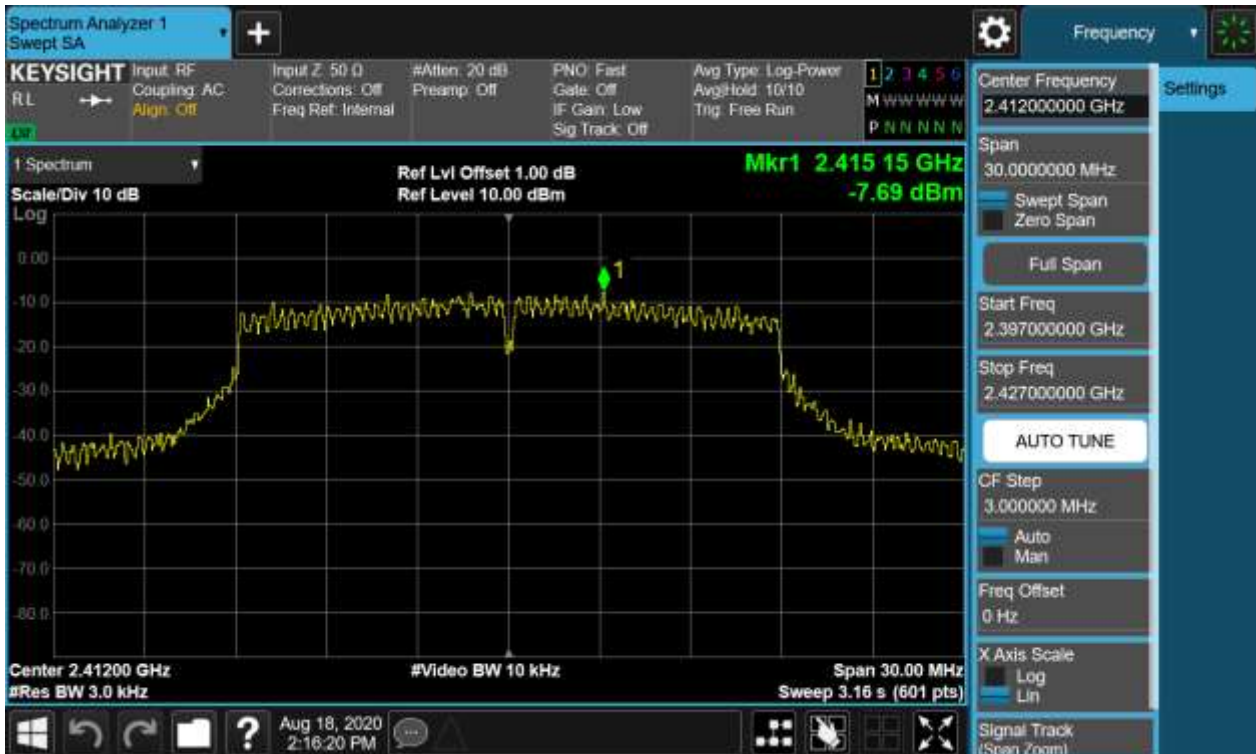


Figure 17: Power Spectral Density, 802.11n(HT20), 2437MHz

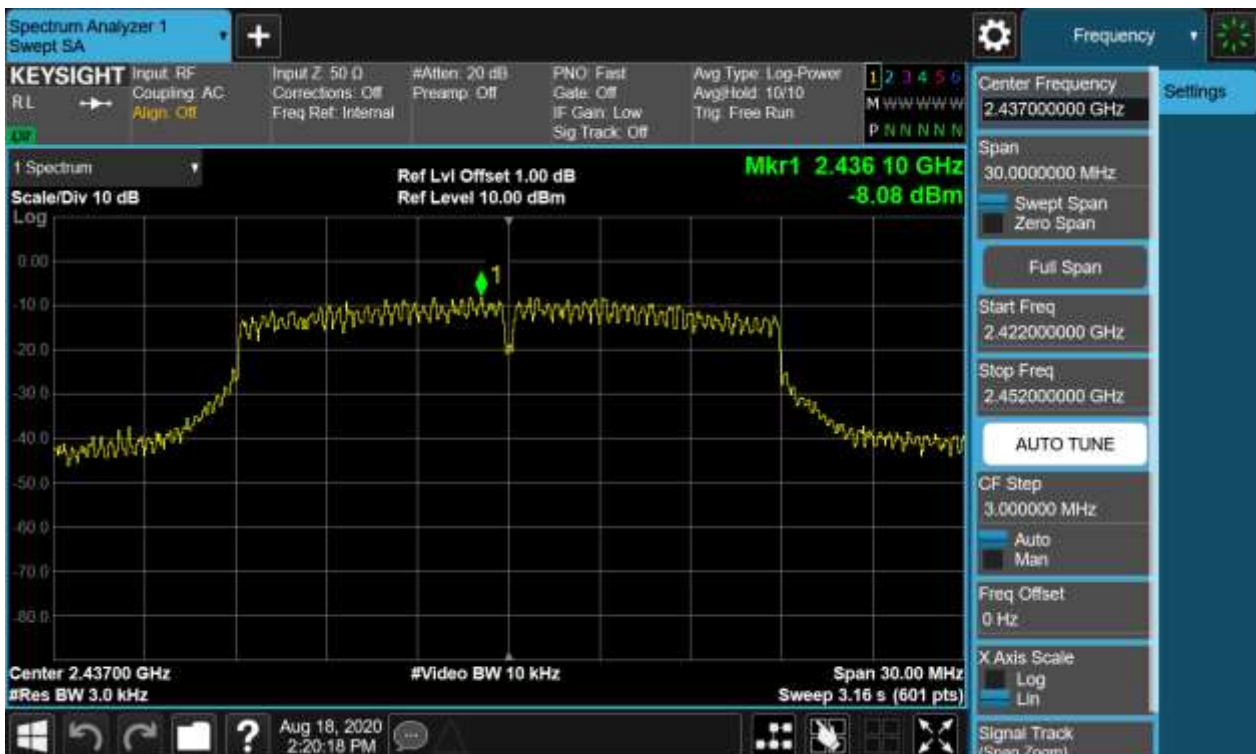

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 27 of 57

Figure 18: Power Spectral Density, 802.11n(HT20), 2462MHz



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 28 of 57

4.1.5 Conducted Spurious Emission & Authorized-band band-edge

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.209
Requirement	: ANSI C63.10-2013, KDB 558074
Kind of test site	: Shielded room

Test setup

Test Channel	: Low/Middle/High for spurious, Low/High for Band Edge
Operation Mode	: A.1.a
Ambient temperature	: 25°C
Relative humidity	: 52%

For details refer to following test plot.

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 29 of 57

Figure 19: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2412MHz Carrier Level



Band Edge



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 30 of 57


TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 31 of 57

Conducted spurious emissions 30MHz-25GHz

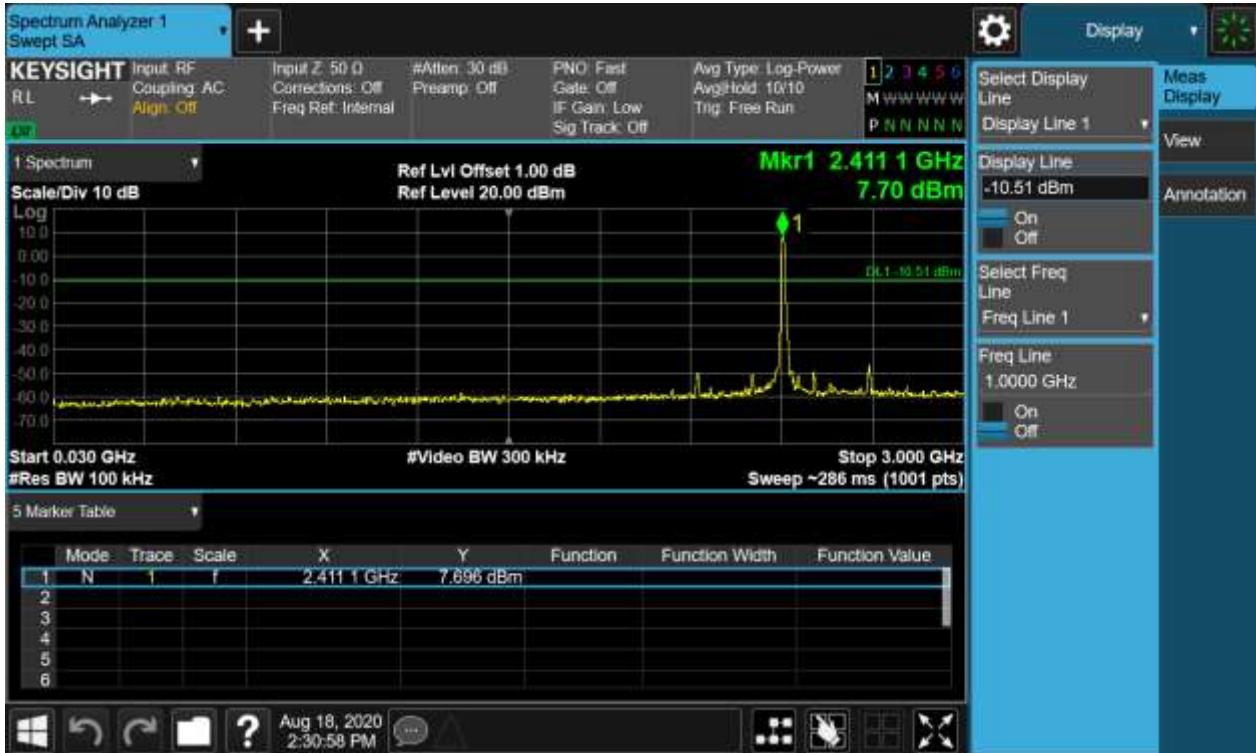

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 32 of 57

Figure 20: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2437MHz Carrier Level



Conducted spurious emissions 30MHz-25GHz

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 33 of 57

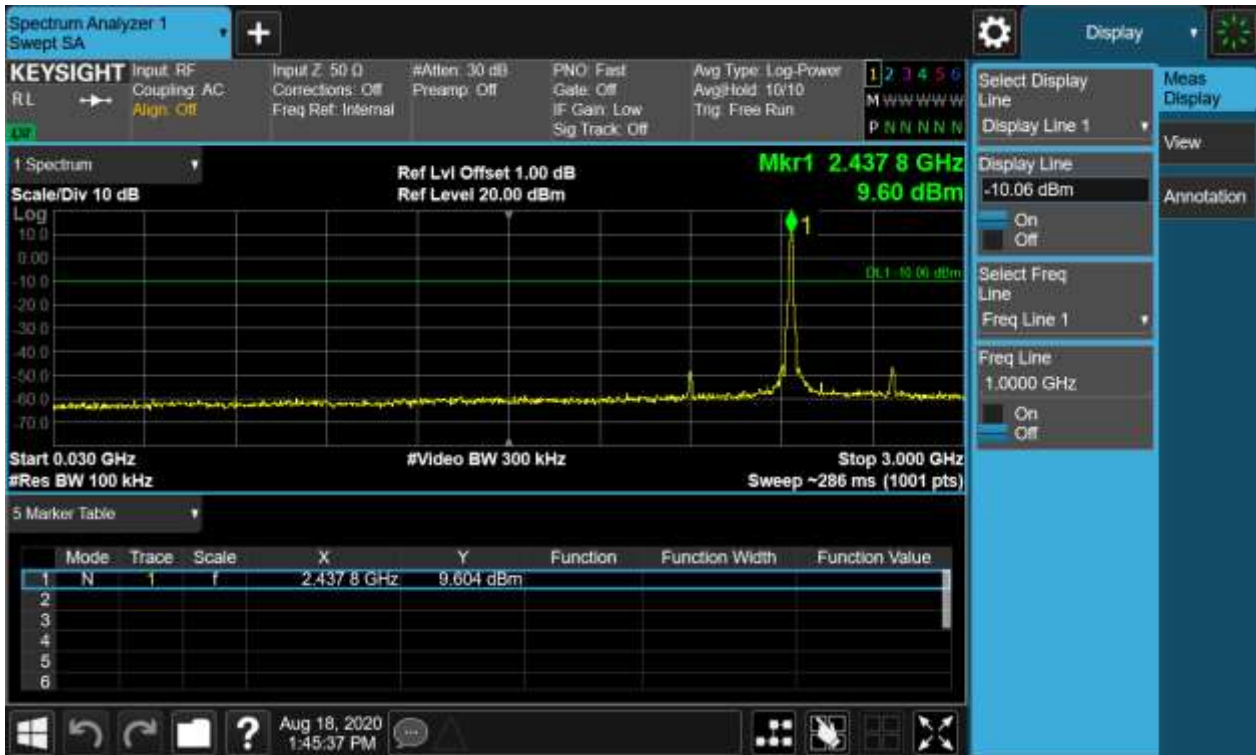


Figure 21: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2462MHz Carrier Level

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 34 of 57



TEST REPORT

Report No.: SHE20080007-02CE


Date: 2020-08-28

Page 35 of 57

Band Edge



Conducted spurious emissions 30MHz-25GHz

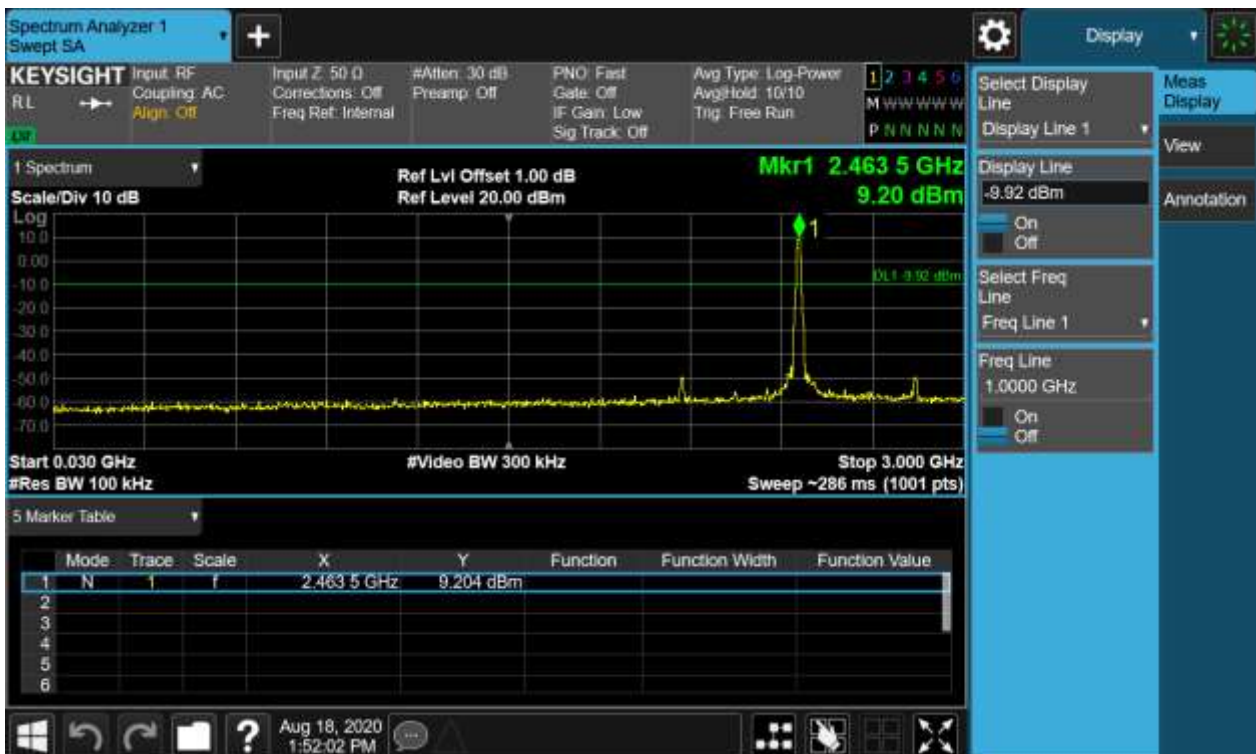

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 36 of 57



Figure 22: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2412MHz Carrier Level



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 37 of 57

Band Edge



Conducted spurious emissions 30MHz-25GHz

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 38 of 57



Figure 23: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2437MHz Carrier Level

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 39 of 57




TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 40 of 57

Conducted spurious emissions 30MHz-25GHz

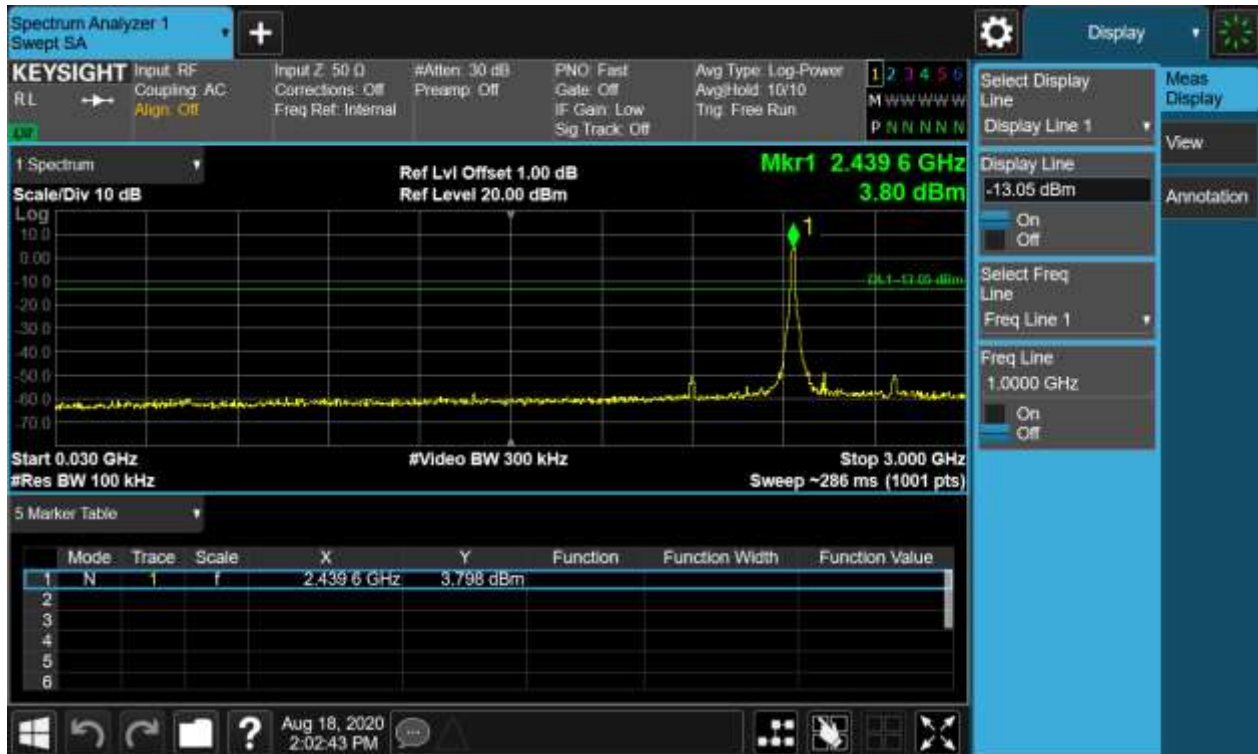

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 41 of 57

Figure 24: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2462MHz Carrier Level



Band Edge

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 42 of 57



Conducted spurious emissions 30MHz-25GHz



Figure 25: Conducted Spurious Emission & Authorized-band band-edge, 802.11n(HT20), 2412MHz

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 43 of 57

Carrier Level



Band Edge



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 44 of 57

Conducted spurious emissions 30MHz-25GHz



Figure 26: Conducted Spurious Emission & Authorized-band band-edge, 802.11n(HT20), 2437MHz Carrier Level

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 45 of 57




TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 46 of 57

Conducted spurious emissions 30MHz-25GHz

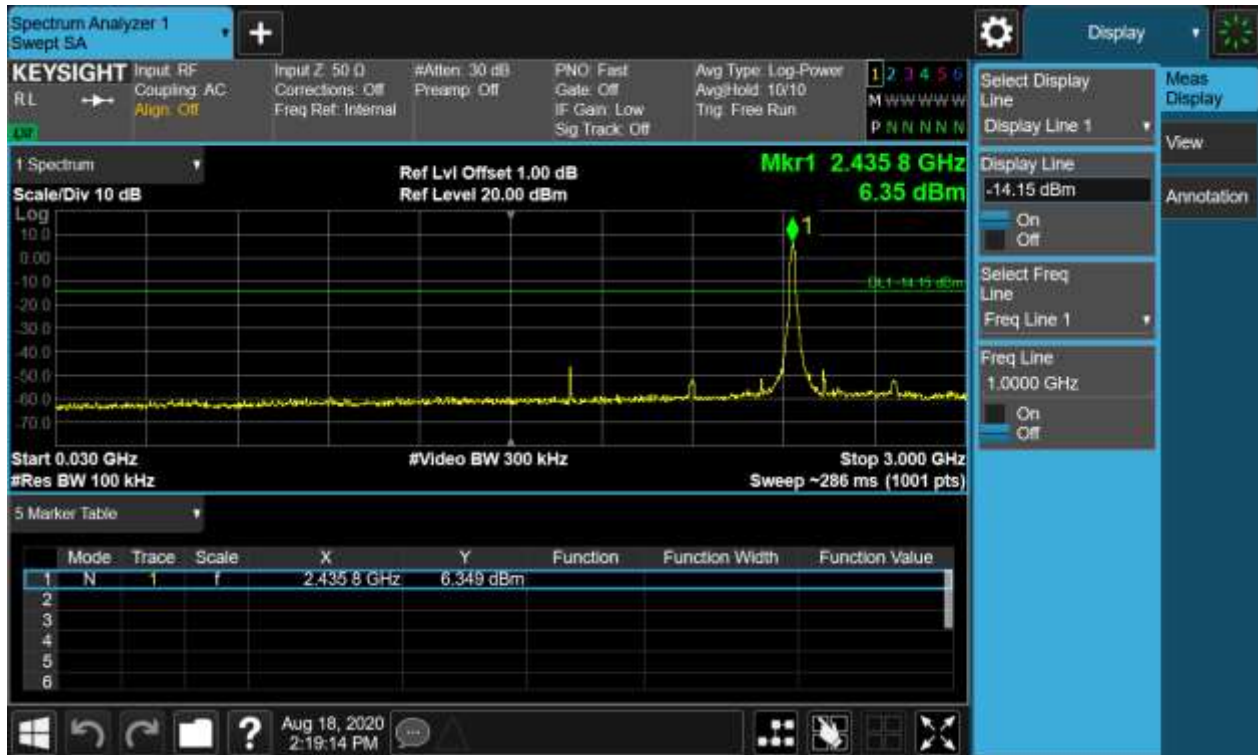

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 47 of 57

Figure 27: Conducted Spurious Emission & Authorized-band band-edge, 802.11n(HT20), 2462MHz Carrier Level



Band Edge

TEST REPORT


Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 48 of 57



Conducted spurious emissions 30MHz-25GHz

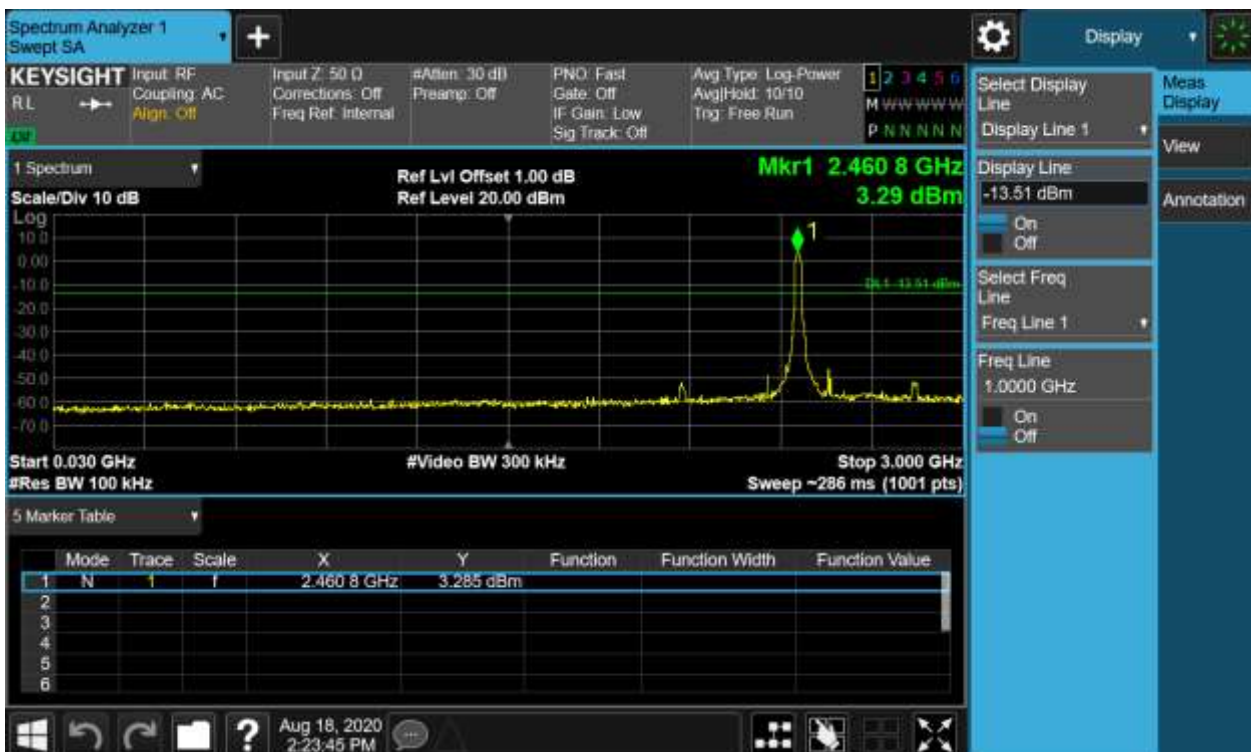

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 49 of 57



TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 50 of 57

4.1.6 Spurious Emission

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209
Requirement	: ANSI C63.10-2013, KDB 558074
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A
Ambient temperature	: 25°C
Relative humidity	: 52%

Notes:

1. Test plots please refer to the annex document "WLAN 2.4GHz-TX EXHIBIT A of SHE20080007-01CE".
2. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.
3. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
4. The EUT is working in the Normal link mode below 1 GHz.

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 51 of 57

4.1.7 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209
Requirement	: ANSI C63.10-2013, KDB 558074
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1
Ambient temperature	: 25°C
Relative humidity	: 52%

Note:

1. Test plots please refer to the annex document "WLAN 2.4GHz-TX EXHIBIT A of SHE20080007-01CE".

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 52 of 57

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT:

PASS

Test standard	: FCC Part 15.207(a)
Requirement	: ANSI C63.10-2013
Kind of test site	: Shielded room

Test setup

Input Voltage	: AC 120V, 60Hz; AC 240V, 50Hz
Operation Mode	: A
Earthing	: Not Connected
Ambient temperature	: 25°C
Relative humidity	: 52%

For details refer to following test plot.

TEST REPORT

Report No.: SHE20080007-02CE


Date: 2020-08-28

Page 53 of 57

Note:

The all configurations were tested respectively, but only the worst configuration shown here.

Figure 28: Conducted Emission on AC Mains, L Phase

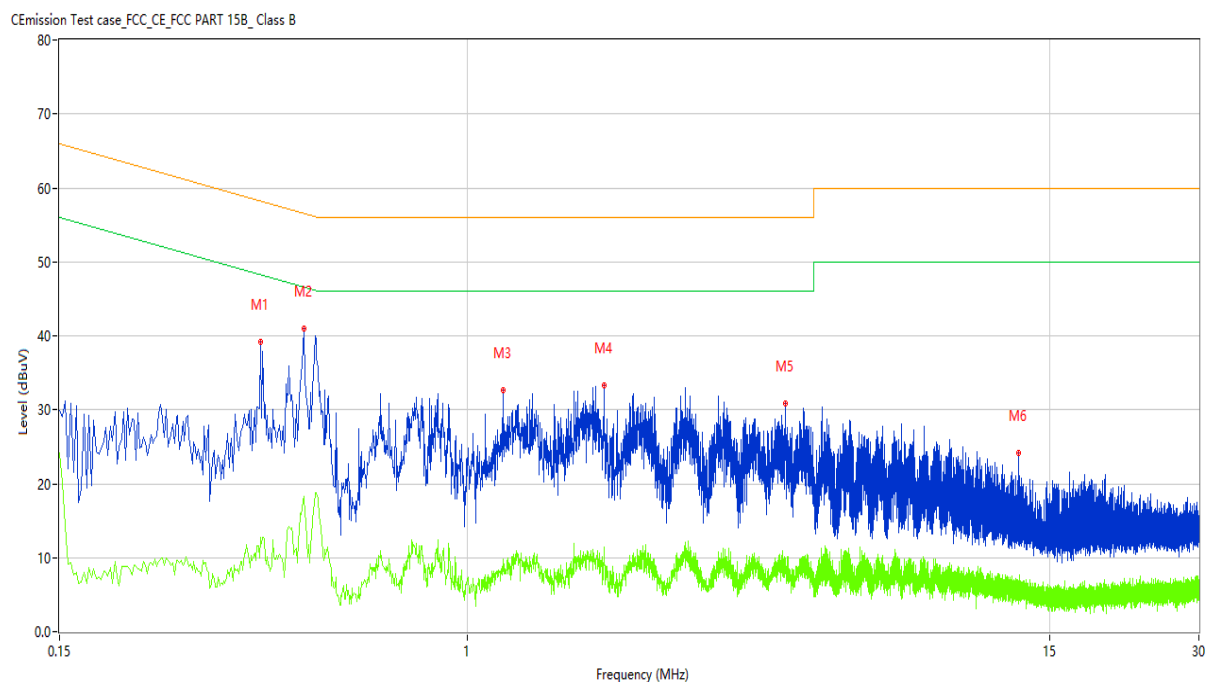

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.382	39.13	10.14	58.24	-19.11	Peak	L	Pass
1*	0.382	26.59	10.14	58.24	-31.65	QP	L	Pass
1**	0.382	12.66	10.14	48.24	-35.58	AV	L	Pass
2	0.468	43.46	10.15	56.55	-13.09	Peak	L	Pass
2*	0.468	32.07	10.15	56.55	-24.48	QP	L	Pass
2**	0.468	18.27	10.15	46.55	-28.28	AV	L	Pass
3	1.180	32.47	10.16	56.00	-23.53	Peak	L	Pass
3*	1.180	21.66	10.16	56.00	-34.34	QP	L	Pass
3**	1.180	9.86	10.16	46.00	-36.14	AV	L	Pass
4	1.886	34.78	10.17	56.00	-21.22	Peak	L	Pass
4*	1.886	22.74	10.17	56.00	-33.26	QP	L	Pass
4**	1.886	11.40	10.17	46.00	-34.60	AV	L	Pass
5	4.388	31.73	10.25	56.00	-24.27	Peak	L	Pass
5*	4.388	20.39	10.25	56.00	-35.61	QP	L	Pass
5**	4.388	10.01	10.25	46.00	-35.99	AV	L	Pass
6	12.980	24.71	10.47	60.00	-35.29	Peak	L	Pass
6*	12.980	9.72	10.47	60.00	-50.28	QP	L	Pass
6**	12.980	6.92	10.47	50.00	-43.08	AV	L	Pass


TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 54 of 57

Figure 29: Conducted Emission on AC Mains, N Phase

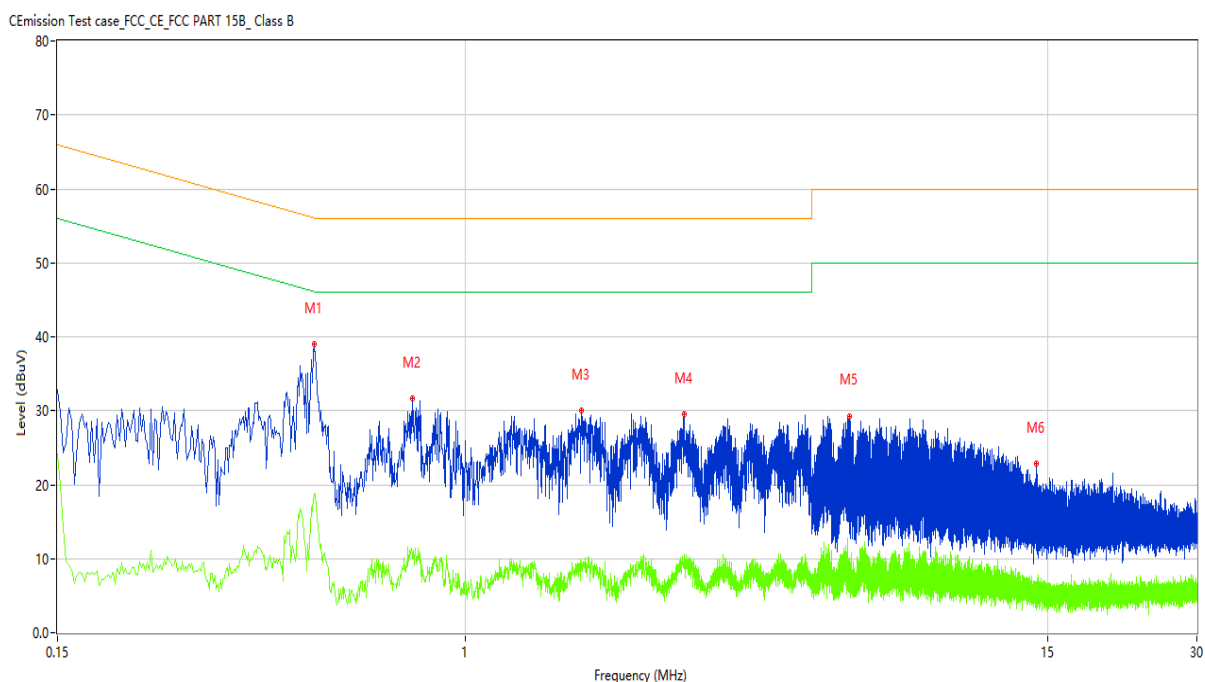

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.494	39.71	10.15	56.10	-16.39	Peak	N	Pass
1*	0.494	34.17	10.15	56.10	-21.93	QP	N	Pass
1**	0.494	18.51	10.15	46.10	-27.59	AV	N	Pass
2	0.780	32.90	10.15	56.00	-23.10	Peak	N	Pass
2*	0.780	25.06	10.15	56.00	-30.94	QP	N	Pass
2**	0.780	10.75	10.15	46.00	-35.25	AV	N	Pass
3	1.718	30.09	10.17	56.00	-25.91	Peak	N	Pass
3*	1.718	22.80	10.17	56.00	-33.20	QP	N	Pass
3**	1.718	9.57	10.17	46.00	-36.43	AV	N	Pass
4	2.766	29.21	10.21	56.00	-26.79	Peak	N	Pass
4*	2.766	21.41	10.21	56.00	-34.59	QP	N	Pass
4**	2.766	10.42	10.21	46.00	-35.58	AV	N	Pass
5	5.954	30.56	10.28	60.00	-29.44	Peak	N	Pass
5*	5.954	20.57	10.28	60.00	-39.43	QP	N	Pass
5**	5.954	10.06	10.28	50.00	-39.94	AV	N	Pass
6	14.204	22.13	10.45	60.00	-37.87	Peak	N	Pass
6*	14.204	11.59	10.45	60.00	-48.41	QP	N	Pass
6**	14.204	6.26	10.45	50.00	-43.74	AV	N	Pass

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 55 of 57

5 Appendixes

5.1 Photographs of the Sample



Front of the sample



Rear of the sample

TEST REPORT

Report No.: SHE20080007-02CE


Date: 2020-08-28

Page 56 of 57

5.2 Set-up for Conducted Emissions



5.3 Set-up for Conducted RF test at Antenna Port

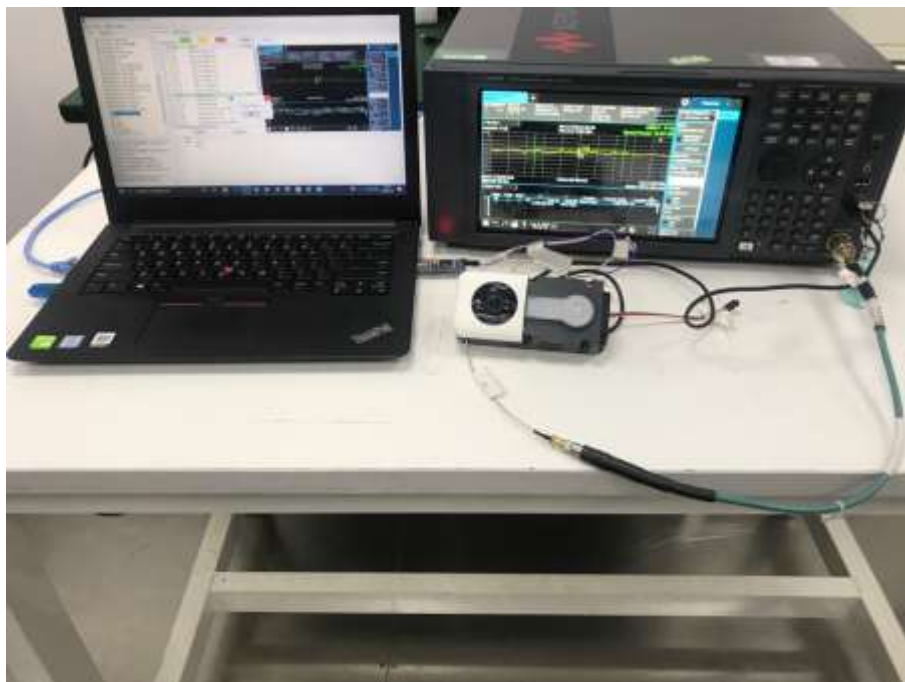

TEST REPORT

Report No.: SHE20080007-02CE

Date: 2020-08-28

Page 57 of 57

5.4 Set-up for Spurious Emissions below 1GHz



5.5 Set-up for Spurious Emissions above 1GHz



End of the report