



FCC 47 CFR PART 15 SUBPART E

for

LifeShare TV

Model: LifeShareTV-Pro-1.0

Brand: N/A

Test Report Number:

C150727Z04-RP1-4

Issued Date: September 29, 2015

Issued for

LifeShare Technologies LLC

2177 Intelliplex Dr., Suite 150 Shelbyville, IN 46176

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The TEST RESULTS in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	September 29, 2015	Initial Issue	ALL	Sabrina Wang



TABLE OF CONTENTS

1. TEST CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	8
3.1 EUT CONFIGURATION	8
3.2 EUT EXERCISE	8
3.3 GENERAL TEST PROCEDURES	8
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	9
3.5 DESCRIPTION OF TEST MODES	10
4. SETUP OF EQUIPMENT UNDER TEST	12
4.1 DESCRIPTION OF SUPPORT UNITS	12
4.2 CONFIGURATION OF SYSTEM UNDER TEST	12
5. FACILITIES AND ACCREDITATIONS	13
5.1 FACILITIES	13
5.2 EQUIPMENT	13
5.3 ACCREDITATIONS	13
5.4 MEASUREMENT UNCERTAINTY	14
6. FCC PART 15 REQUIREMENTS	15
6.1 26dB EMISSION BANDWIDTH	15
6.2 ANTENNA GAIN	49
6.3 PEAK POWER	51
6.4 BAND EDGES MEASUREMENT	58
6.5 PEAK POWER SPECTAL DENSITY	82
6.6 RADIATED UNDESIABLE EMISSION	117
6.7 CONDUCTED UNDESIRABLE EMISSION	159
6.8 POWERLINE CONDUCTED EMISSIONS	175
6.9 FREQUENCY STABILITY	179



1. TEST CERTIFICATION

Product	LifeShare TV
Model	LifeShareTV-Pro-1.0
Brand	N/A
Tested	July 27~September 29, 2015
Applicant	LifeShare Technologies LLC 2177 Intelliplex Dr., Suite 150 Shelbyville, IN 46176
Manufacturer	LifeShare Technologies LLC 2177 Intelliplex Dr., Suite 150 Shelbyville, IN 46176

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

We hereby certify that:

Compliance Certification Services (Shenzhen) Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407、FCC 14-30.

The TEST RESULTS of this report relate only to the tested sample identified in this report.

Approved by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2. EUT DESCRIPTION

Product	LifeShare TV
Model Number	LifeShareTV-Pro-1.0
Brand	N/A
Model Discrepancy	N/A
Serial Number	C150727Z04-RP1-4
Received Date	July 27, 2015
Power Supply	DC5V supplied by the Adapter
Adapter Manufacturer /Model No.	SHENZHEN FUJIA APPLIANCE CO., LTD. / FJ-SW0502000U I/P: 100-240Vac, 50/60Hz, 0.35A O/P: 5Vdc, 2000mA
Frequency Range	UNII Band I: IEEE 802.11a, 802.11n HT20 : 5180MHz ~ 5240MHz; IEEE 802.11n HT40: 5190MHz ~ 5230MHz IEEE 802.11ac 80: 5210MHz UNII Band II IEEE 802.11a, 802.11n HT20 : 5260MHz ~ 5320MHz IEEE 802.11n HT40: 5270MHz ~ 5310MHz IEEE 802.11ac 80: 5290MHz UNII Band IV IEEE 802.11a, 802.11n HT20 : 5745MHz ~ 5825MHz IEEE 802.11n HT40: 5755MHz ~ 5795MHz IEEE 802.11ac 80: 5775MHz
Transmit Power	UNII Band I: IEEE 802.11a: 15.79dBm (Antenna 1) 15.50dBm (Antenna 2) IEEE 802.11n HT 20 MHz mode: 18.02dBm (Combine with Antenna 1 and Antenna 2) IEEE 802.11n HT 40 MHz mode: 18.61dBm (Combine with Antenna 1 and Antenna 2) IEEE 802.11ac 80: 17.73dBm (Combine with Antenna 1 and Antenna 2) UNII Band II IEEE 802.11a: 15.49dBm (Antenna 1) 14.46dBm (Antenna 2) IEEE 802.11n HT 20 MHz mode: 17.89dBm (Combine with Antenna 1 and Antenna 2) IEEE 802.11n HT 40 MHz mode: 18.31dBm (Combine with Antenna 1 and Antenna 2) IEEE 802.11ac 80: 17.59dBm (Combine with Antenna 1 and Antenna 2) UNII Band IV IEEE 802.11a: 15.32dBm (Antenna 1) 15.22dBm (Antenna 2) IEEE 802.11n HT 20 MHz mode: 18.09dBm (Combine with Antenna 1 and Antenna 2) IEEE 802.11n HT 40 MHz mode: 18.89dBm (Combine with Antenna 1 and Antenna 2) IEEE 802.11ac 80: 18.03dBm (Combine with Antenna 1 and Antenna 2)
Modulation Technique	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	IEEE 802.11a mode: 48, 36, 24, 18, 12, 9, 6Mbps IEEE802.11n HT20MHz mode(800ns GI): 13,26,39,52,78,104,117,130Mbps IEEE802.11n HT40MHz mode(800ns GI): 27,54,81,108,162,216,243,270Mbps IEEE802.11ac VHT80MHz mode(800ns GI): 58.6,117,175.6,234,351,468,526.6,585,702,780Mbps



Number of Channels	UNII Band I:	
	IEEE 802.11a, 802.11n HT20 :	4 Channels
	IEEE 802.11n HT40 :	2 Channels
	IEEE 802.11ac 80:	1 Channel
	UNII Band II	
	IEEE 802.11a, 802.11n HT20 :	4 Channels
	IEEE 802.11n HT40:	2 Channels
	IEEE 802.11ac 80:	1 Channel
	UNII Band IV	
	IEEE 802.11a, 802.11n HT20 :	5 Channels
Antenna Specification	IEEE 802.11n HT 40 MHz mode:	2 Channels
	IEEE 802.11ac 80:	1 Channel
Channels Spacing	PCB Antenna with 3dBi gain (Max)	
Temperature Range	IEEE 802.11a, 802.11n HT20 : 20MHz	
	IEEE 802.11n HT40: 40MHz	
	IEEE 802.11ac 80: 80MHz	
Hardware Version	0°C ~ +40°C	
Software Version	2.0	
	1509	

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.



Operation Frequency:

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
38	5190
40	5200
42	5210
44	5220
46	5230
48	5240
52	5260
54	5270
56	5280
58	5290
60	5300
62	5310
64	5320
149	5745
151	5755
153	5765
155	5775
157	5785
159	5795
161	5805
165	5825

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for **FCC ID: 2AFNK-D2C315** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules and FCC 14-30.



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10. Radiated testing was performed at an antenna to EUT distance 3 meters. The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.407 and FCC 14-30. Radio testing was performed according to KDB DA 02-2138, KDB 789033 D02, KDB 905462 D06;

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT is a 2x2 configuration spatial MIMO (2TX & 2RX) without beam forming function.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: HDMI + USB1 Play (AC120V/60Hz)	☒
	Mode 2: HDMI + USB2 Play (AC120V/60Hz)	☐
	Mode 3: HDMI + TF Play (AC120V/60Hz)	☐
	Mode 4: HDMI + USB1 Play (AC240V/50Hz)	☐
Radiated Emission	Mode 1: TX	☒

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.

UNII Band I:

IEEE 802.11a for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5190 ~ 5230MHz:

Channel Low (5190MHz) and Channel High (5230MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5210MHz:

Channel Low (5210MHz) with 27Mbps data rate were chosen for full testing.



UNII Band II:

IEEE 802.11a for 5260 ~ 5320MHz:

Channel Low (5260MHz), Channel Mid (5300MHz) and Channel High (5320MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5260 ~ 5320MHz:

Channel Low (5260MHz), Channel Mid (5300MHz) and Channel High (5320MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5270~ 5310MHz:

Channel Low (5270MHz) and Channel High (5310MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5290MHz:

Channel Low (5290MHz) with 27Mbps data rate were chosen for full testing.

UNII Band IV:

IEEE 802.11a for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5755~ 5795MHz:

Channel Low (5755MHz) and Channel High (5795MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5775MHz:

Channel Low (5775MHz) with 27Mbps data rate were chosen for full testing.



4. SETUP OF EQUIPMENT UNDER TEST

4.1 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	TV	TLM19V68	N/A	DOC	Hisense	N/A	Unshielded 1.50m
2	Mouse	WB365PA#AB2	2HTJMB10117 8-317	DOC	DELL	Shielded 1.45m	N/A

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.2 CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at **No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>



5.4 MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
RF frequency	$\pm 1 \times 10^{-5}$
RF power conducted	$\pm 1,5 \text{ dB}$
RF power radiated	$\pm 6 \text{ dB}$
Spurious emissions, conducted	$\pm 3 \text{ dB}$
Spurious emissions, radiated	$\pm 6 \text{ dB}$
Humidity	$\pm 5 \%$
Temperature	$\pm 1^{\circ}\text{C}$
Time	$\pm 10 \%$

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



6. FCC PART 15 REQUIREMENTS

6.1 26dB EMISSION BANDWIDTH

6.1.1 LIMIT


According to §15.303(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

6.1.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

6.1.3 TEST CONFIGURATION



6.1.4 TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, Detector = Peak, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.

**6.1.5 TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
Low	5180	21.699	21.582
Mid	5200	21.736	21.743
High	5240	21.688	21.554

Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
Low	5260	21.703	21.626
Mid	5300	21.771	21.623
High	5320	21.634	21.506

Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
Low	5745	21.779	21.560
Mid	5785	21.670	21.682
High	5825	21.787	21.541

**Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
Low	5180	22.109	21.649
Mid	5200	21.707	21.738
High	5240	21.753	21.772

Test mode: IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
Low	5260	21.746	21.746
Mid	5300	21.915	21.554
High	5320	21.832	21.892

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
Low	5745	22.046	21.725
Mid	5785	21.811	21.782
High	5825	21.508	21.518

**Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
Low	5190	39.670	39.462
High	5230	39.740	39.517

Test mode: IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
Low	5270	39.521	39.475
High	5310	39.613	39.338

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
Low	5755	39.350	39.299
High	5795	39.594	39.478

**Test mode: IEEE 802.11ac 80 mode / 5210MHz**

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
	5210	80.829	80.516

Test mode: IEEE 802.11ac 80 mode / 5290MHz

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
	5290	80.248	80.490

Test mode: IEEE 802.11ac 80 mode / 5775MHz


Channel	Frequency (MHz)	Bandwidth(B) (MHz)	
		Antenna 1	Antenna 2
	5775	80.176	80.716




Test Plot

IEEE 802.11a mode / 5180 ~ 5240MHz

26dB Bandwidth (CH Low)

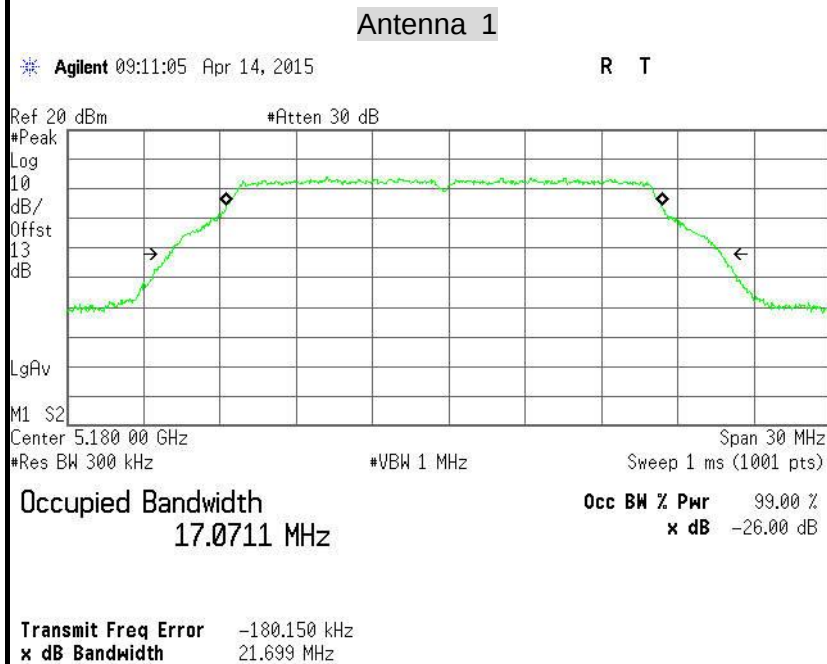


26dB Bandwidth (CH Mid)

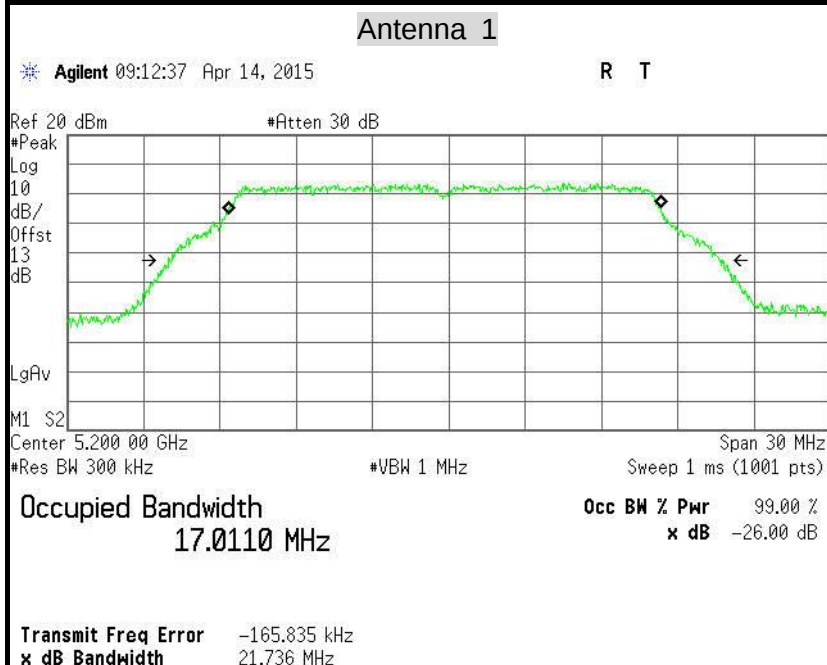




26dB Bandwidth (CH High)

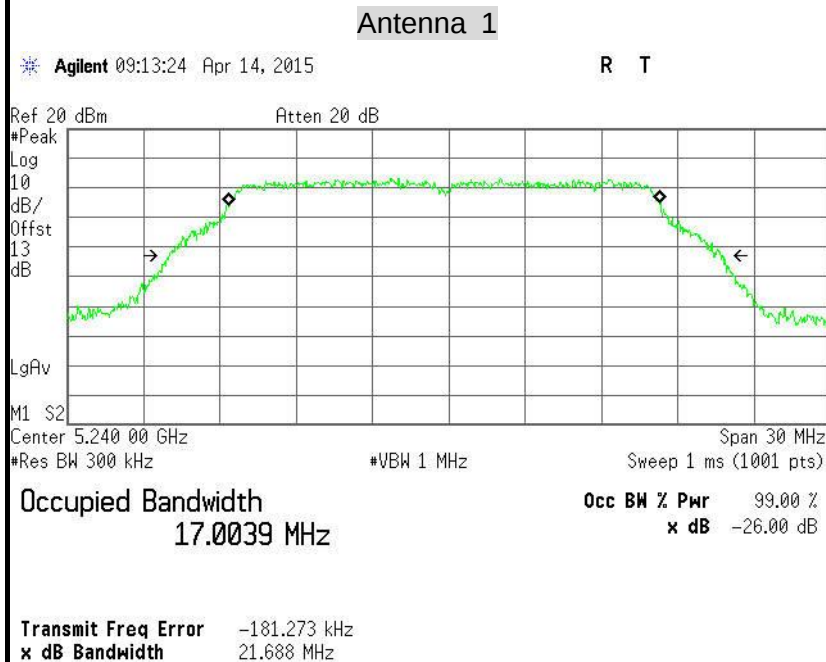


IEEE 802.11a mode / 5260~ 5320MHz

26dB Bandwidth (CH Low)

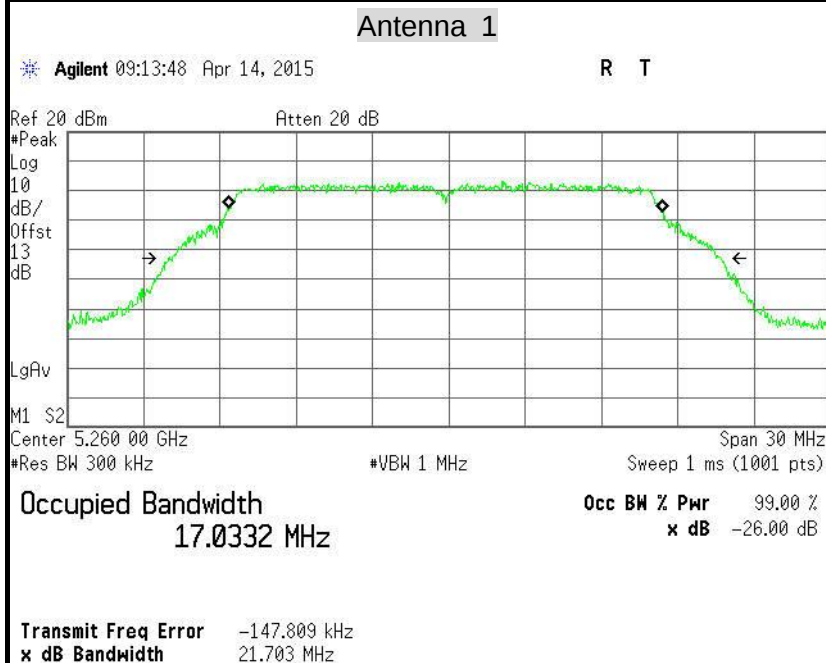




26dB Bandwidth (CH Mid)

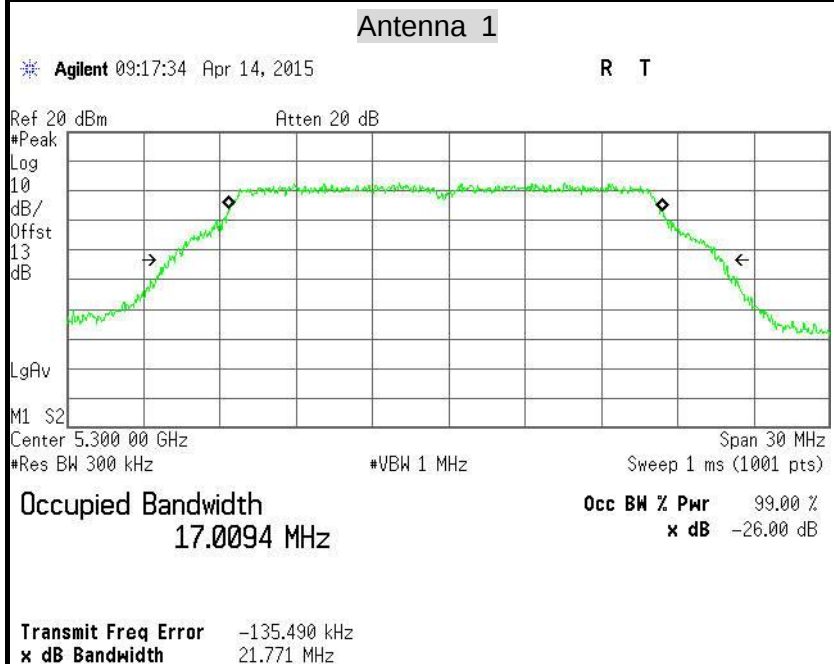


26dB Bandwidth (CH High)

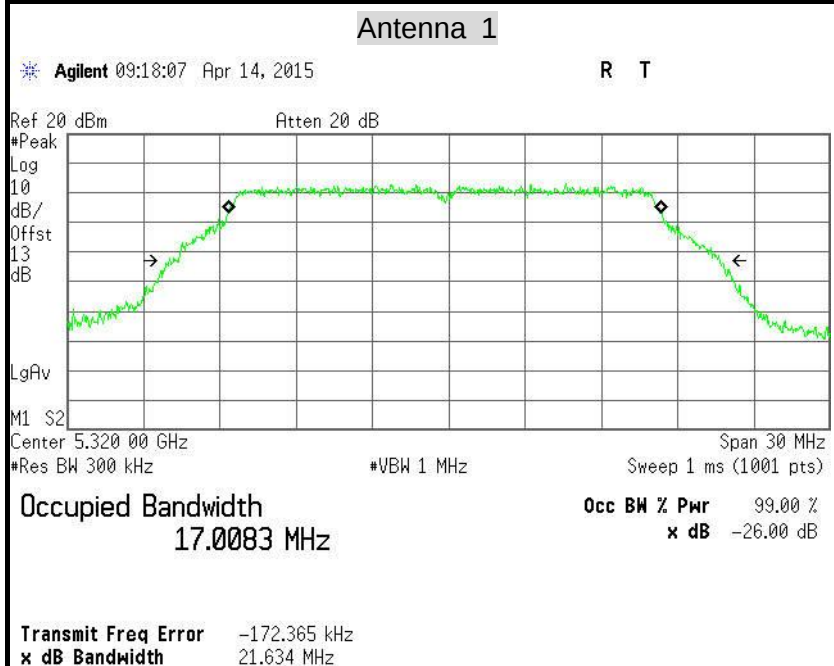





IEEE 802.11a mode / 5745 ~ 5825MHz

26dB Bandwidth (CH Low)

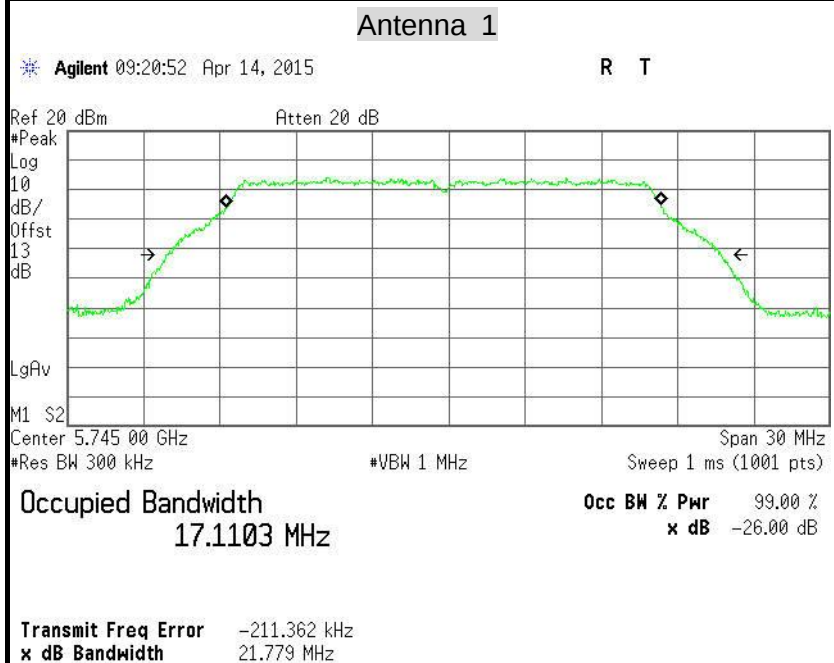

26dB Bandwidth (CH Mid)

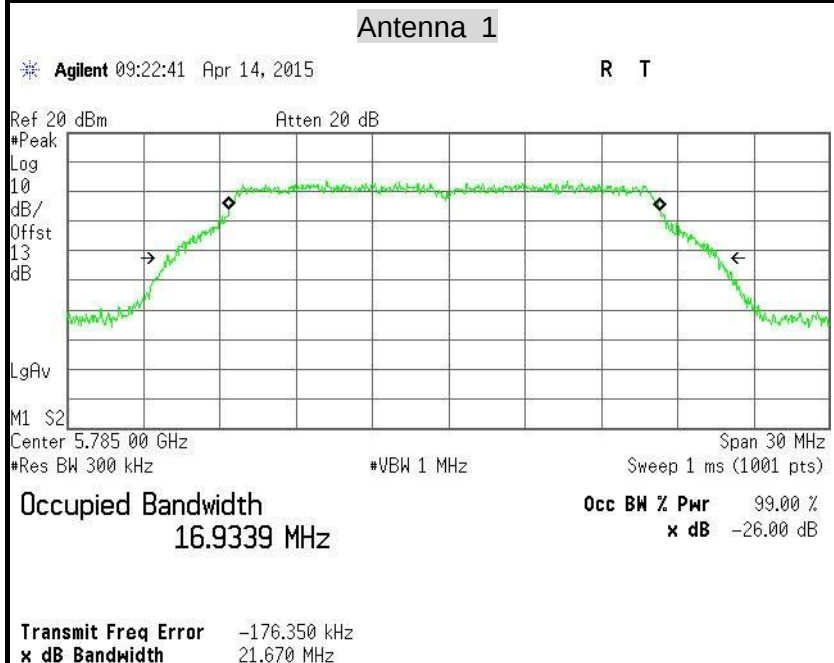


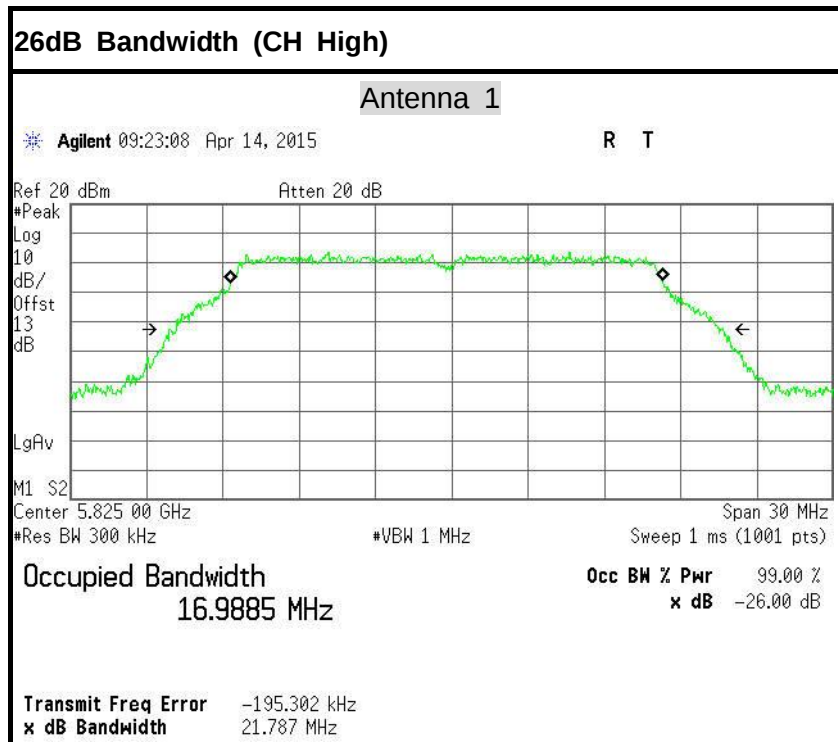




IEEE 802.11a mode / 5180 ~ 5240MHz

26dB Bandwidth (CH Low)

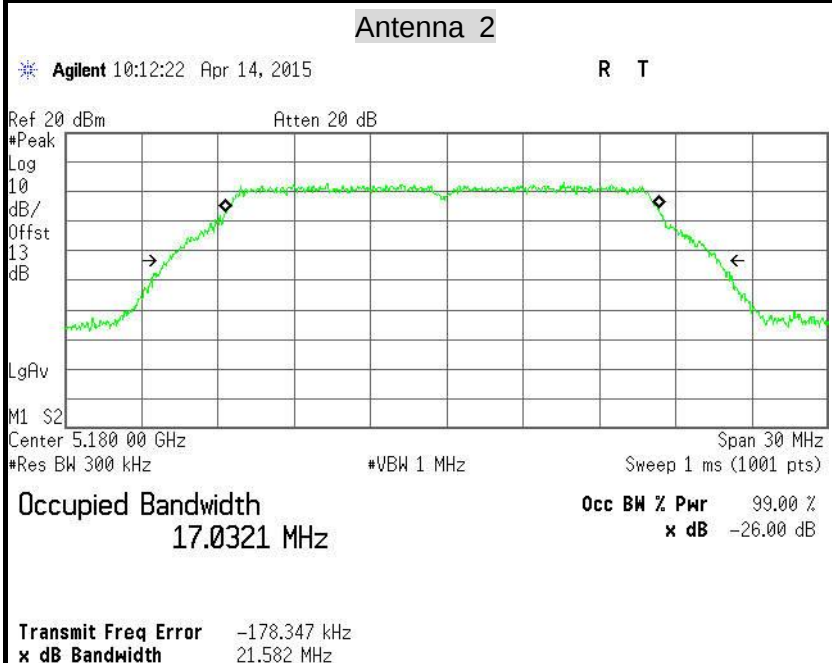


26dB Bandwidth (CH Mid)

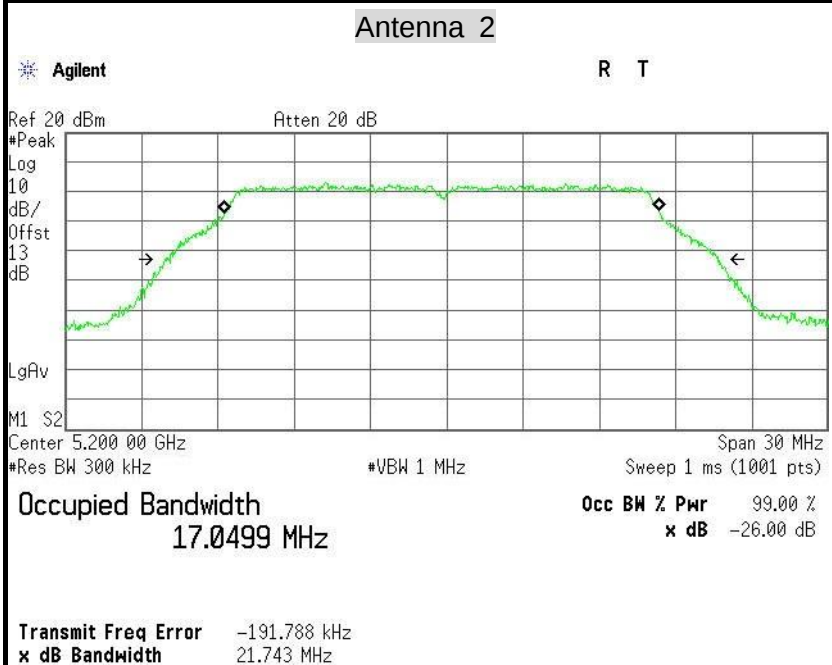




26dB Bandwidth (CH High)

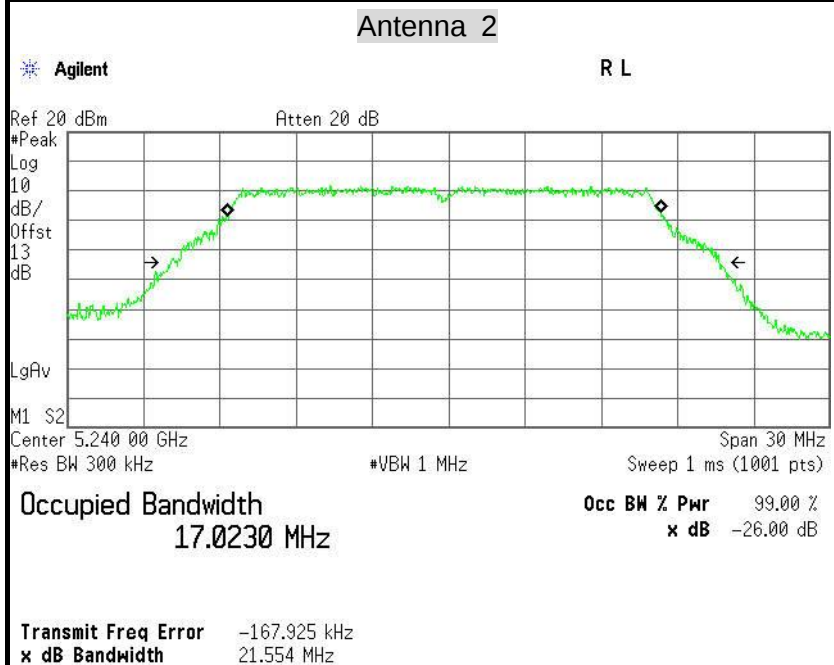


IEEE 802.11a mode / 5260~ 5320MHz

26dB Bandwidth (CH Low)

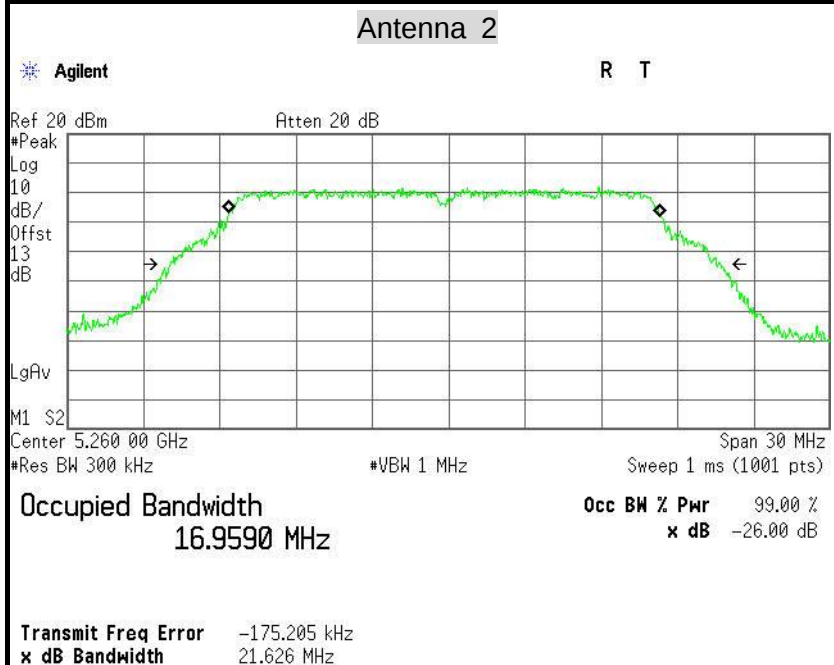




26dB Bandwidth (CH Mid)

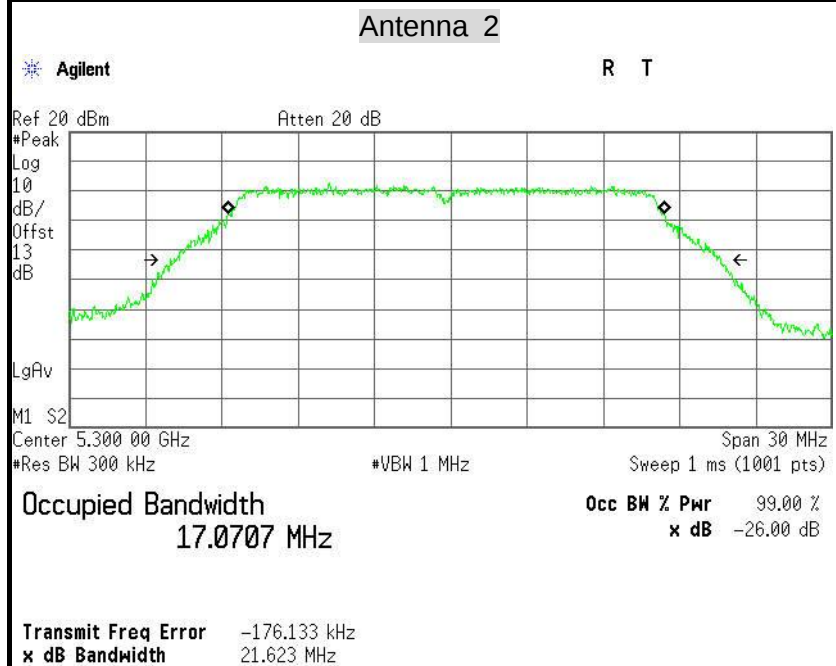


26dB Bandwidth (CH High)

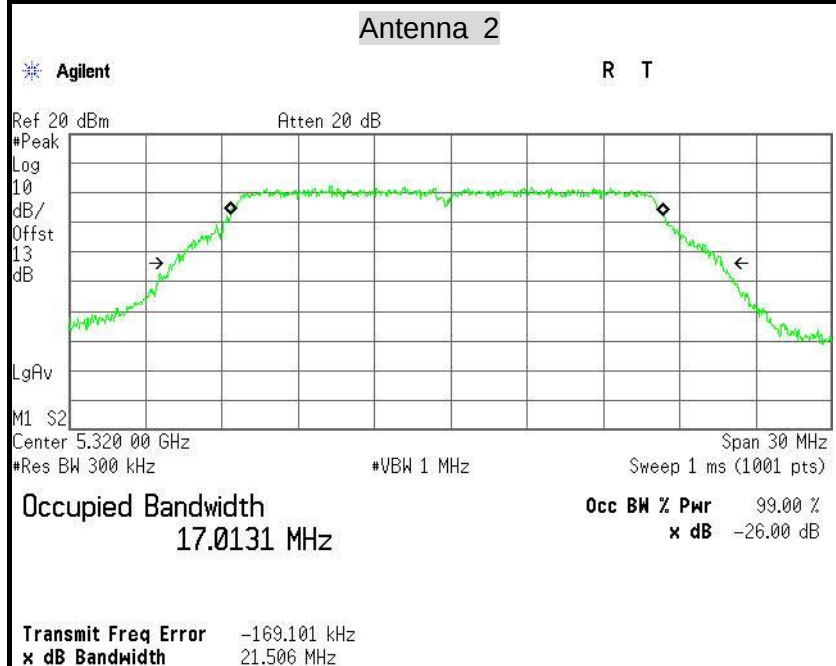





IEEE 802.11a mode / 5745 ~ 5825MHz

26dB Bandwidth (CH Low)

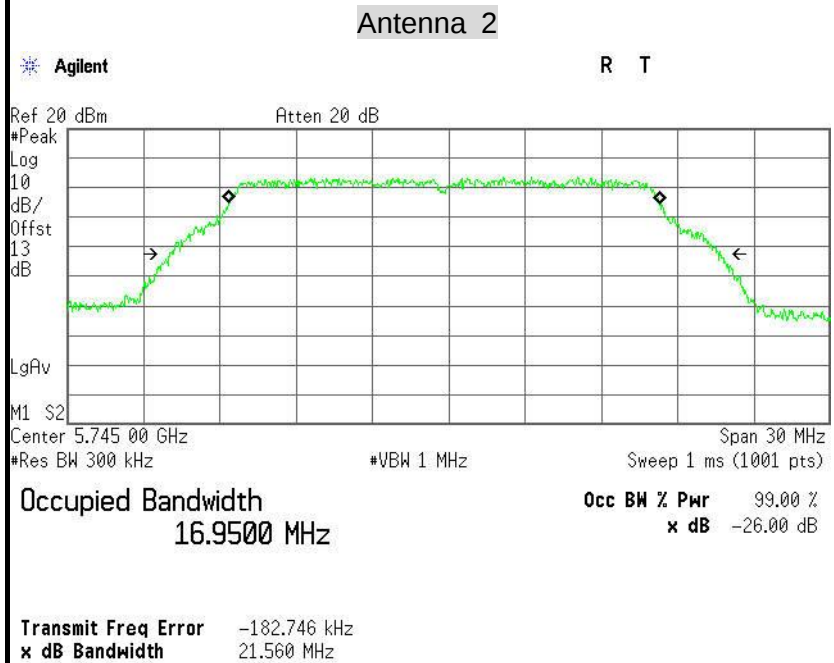

26dB Bandwidth (CH Mid)

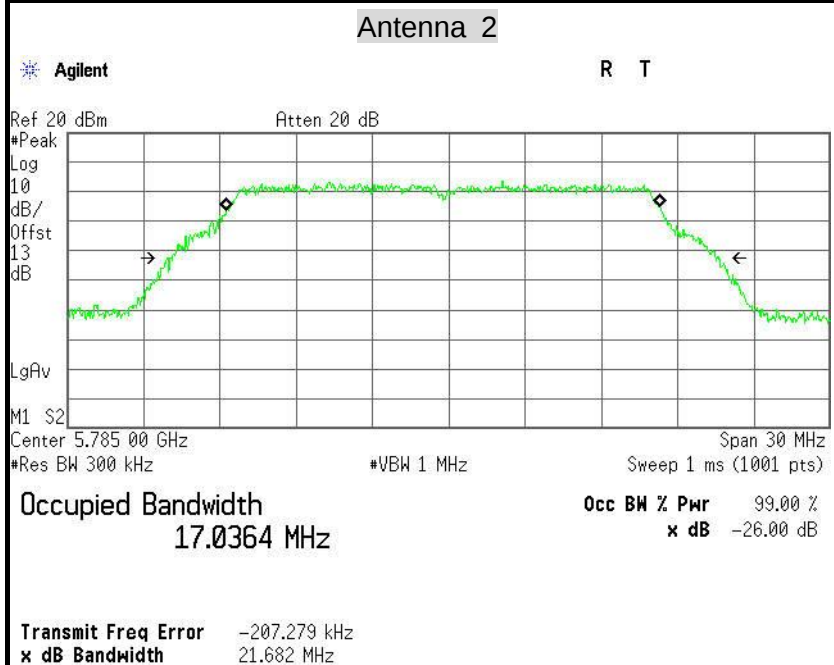


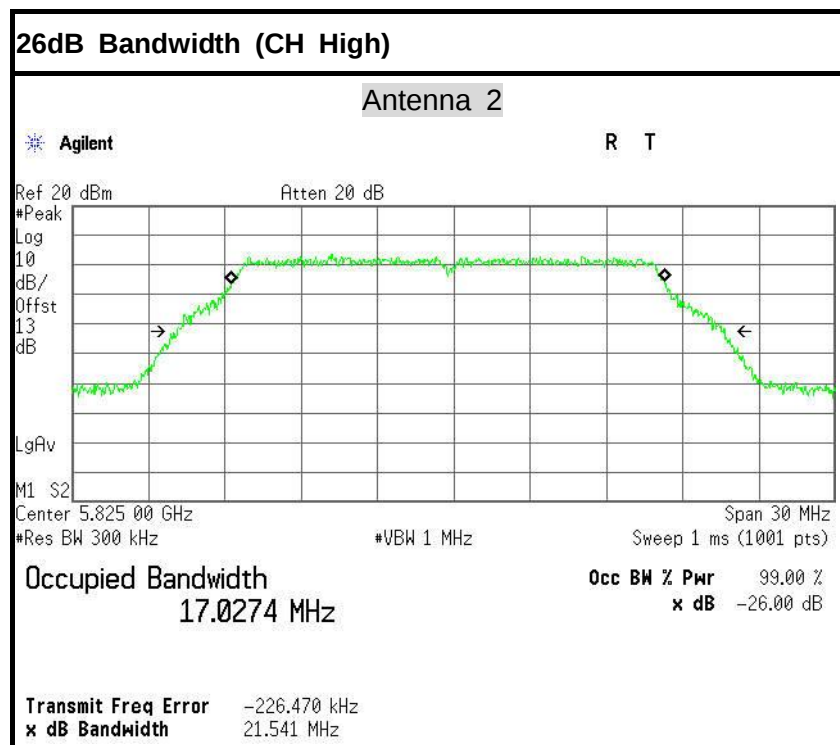




IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

26dB Bandwidth (CH Low)

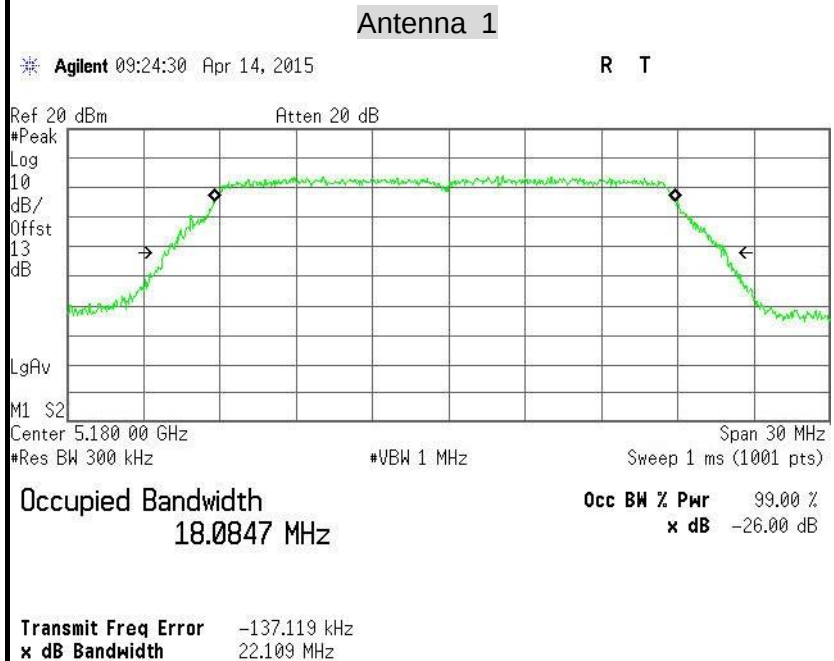


26dB Bandwidth (CH Mid)

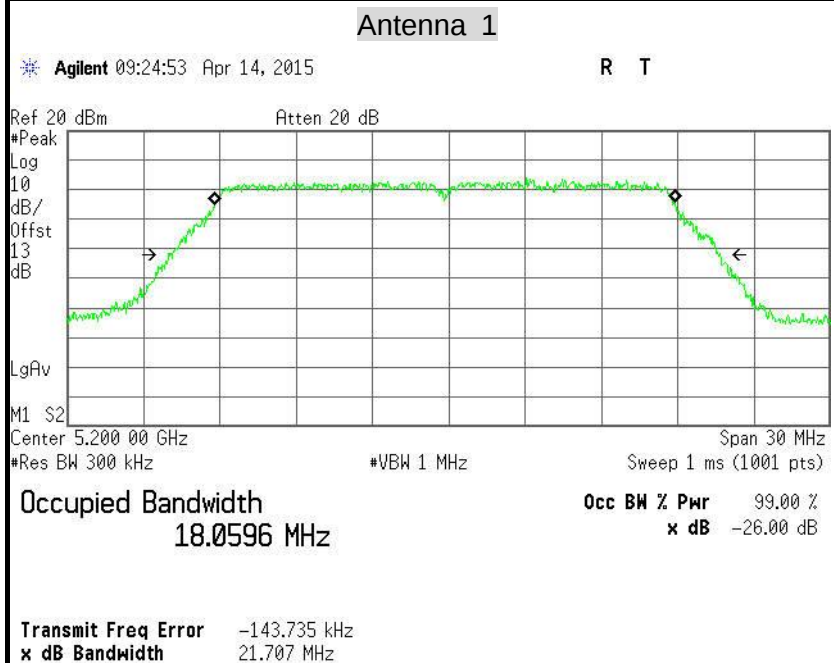




26dB Bandwidth (CH High)

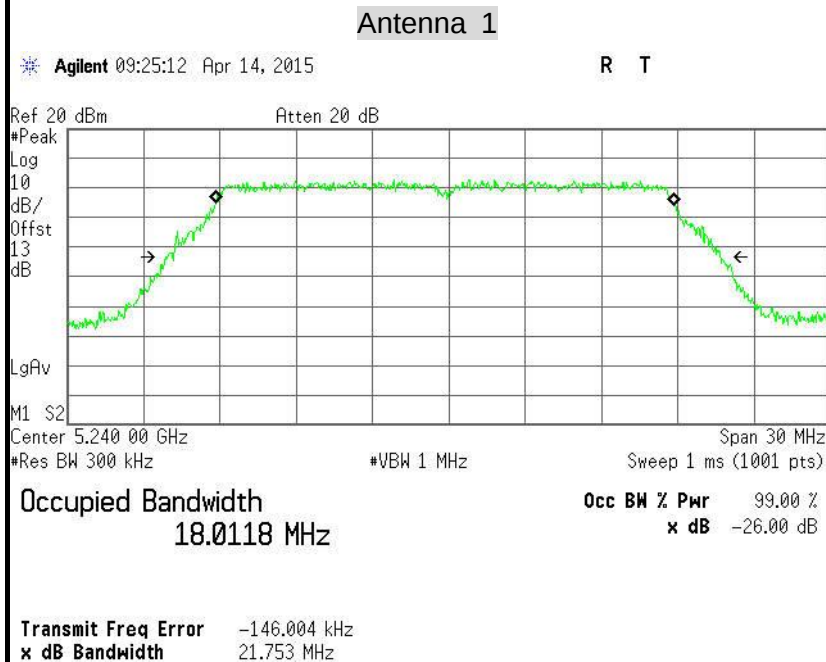


IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz

26dB Bandwidth (CH Low)

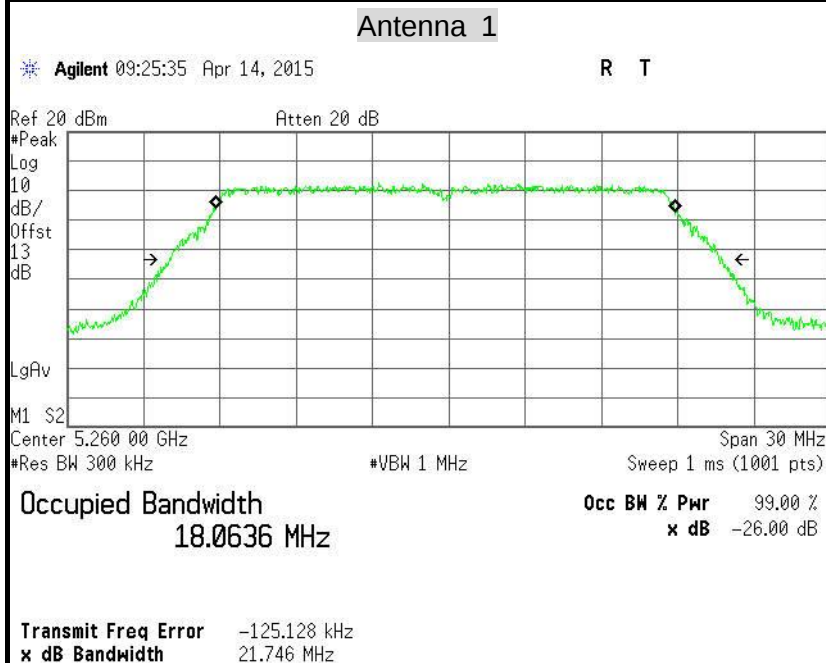




26dB Bandwidth (CH Mid)

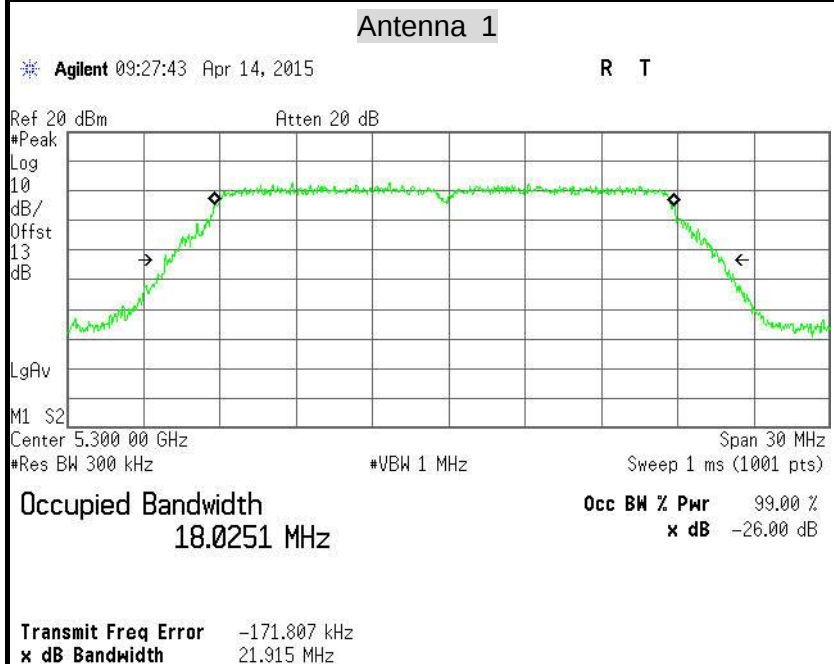


26dB Bandwidth (CH High)

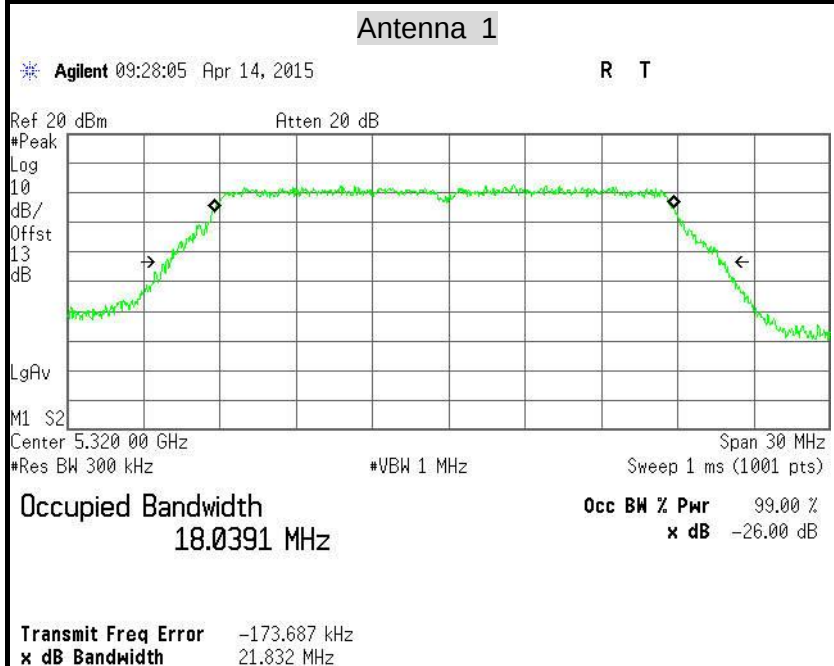





IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

26dB Bandwidth (CH Low)

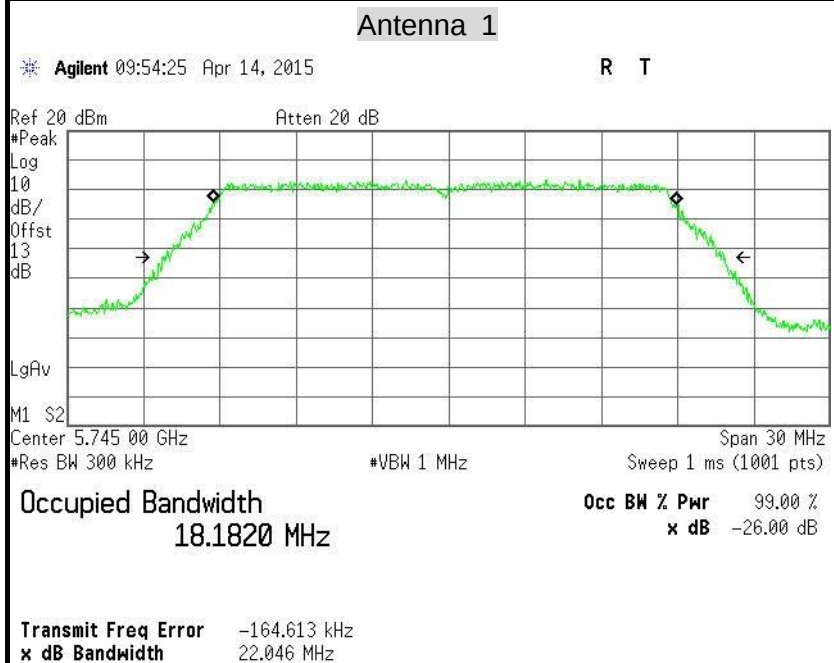

26dB Bandwidth (CH Mid)

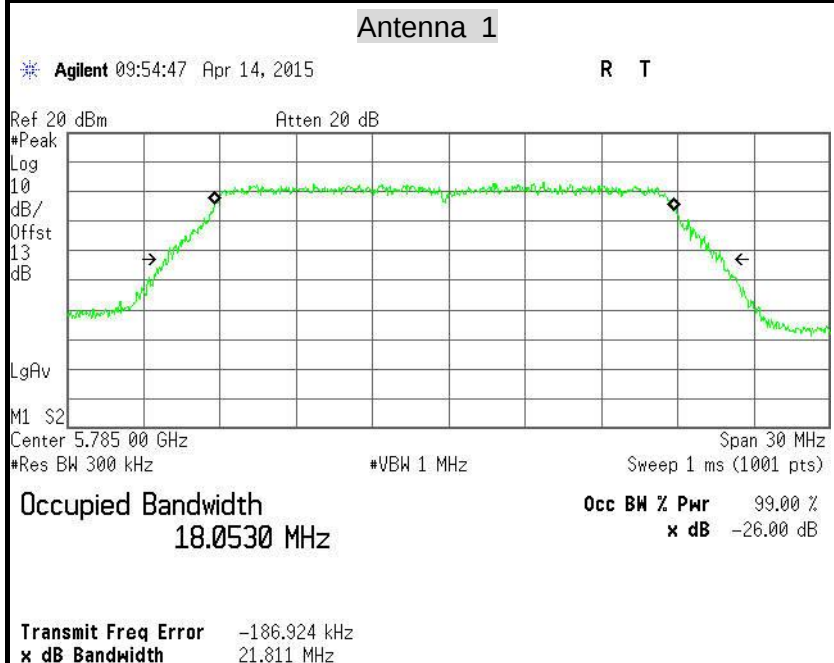


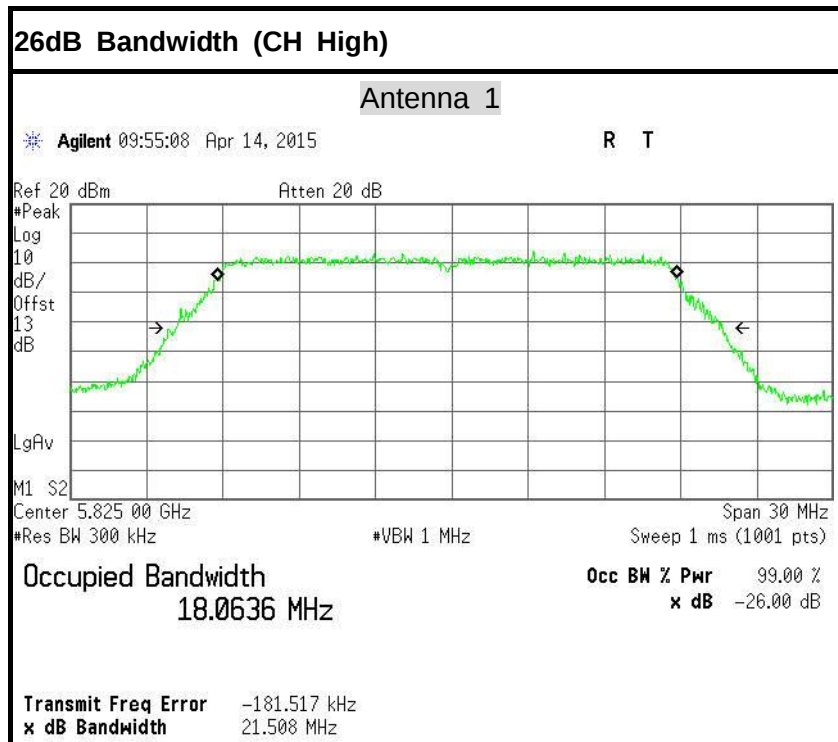




IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

26dB Bandwidth (CH Low)

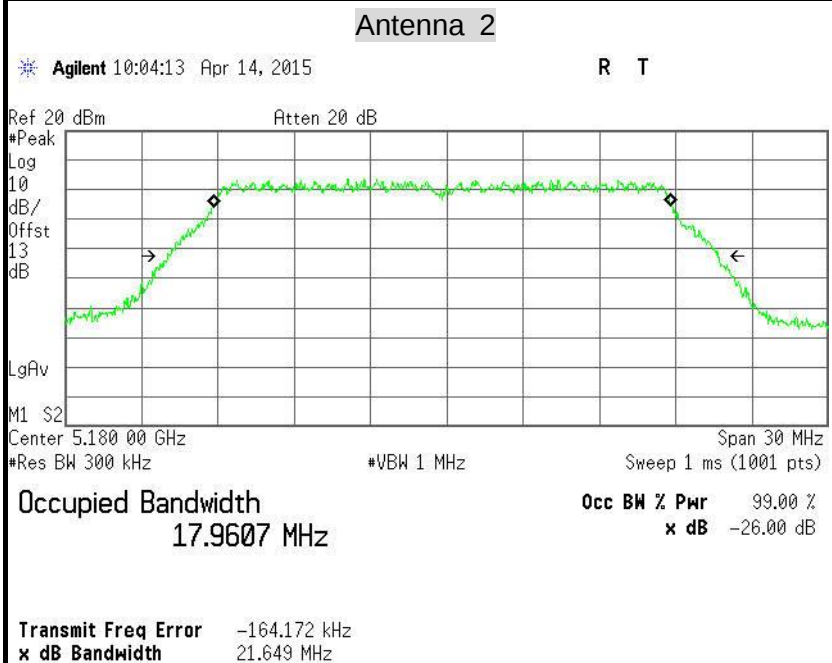


26dB Bandwidth (CH Mid)

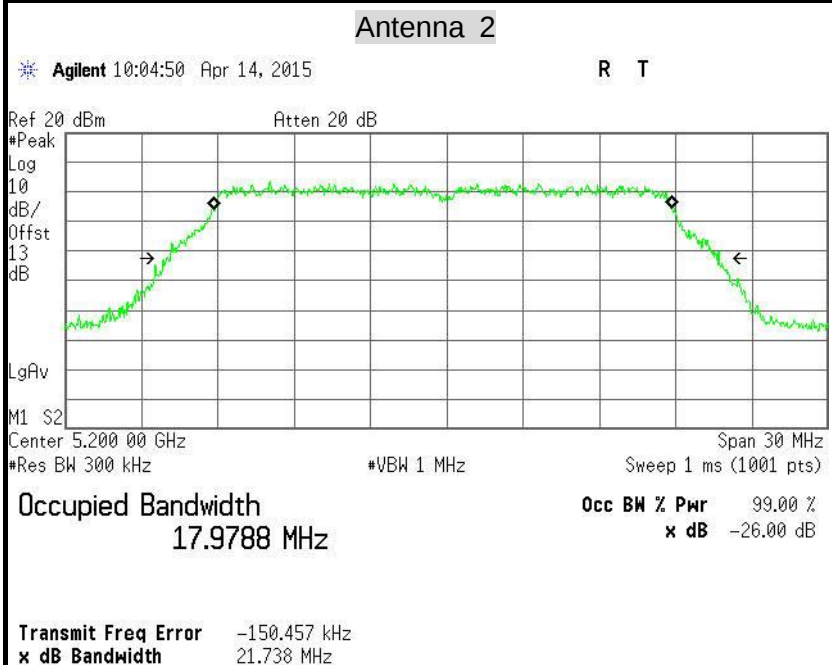




26dB Bandwidth (CH High)

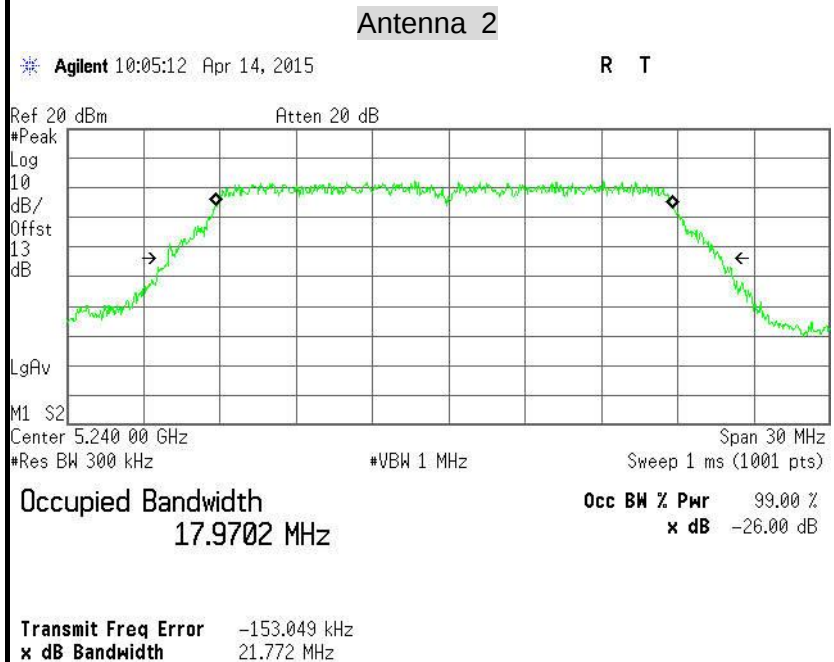


IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz

26dB Bandwidth (CH Low)

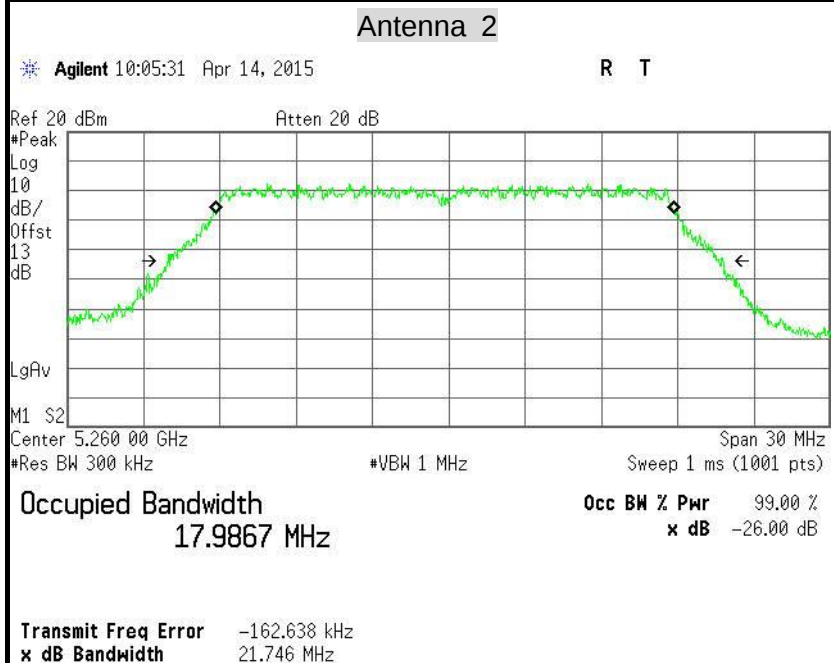




26dB Bandwidth (CH Mid)

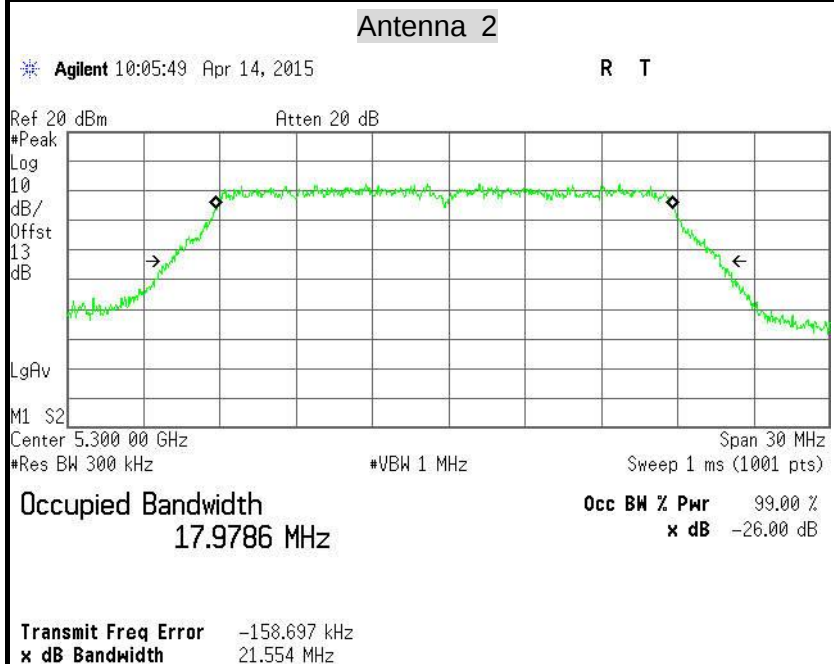


26dB Bandwidth (CH High)

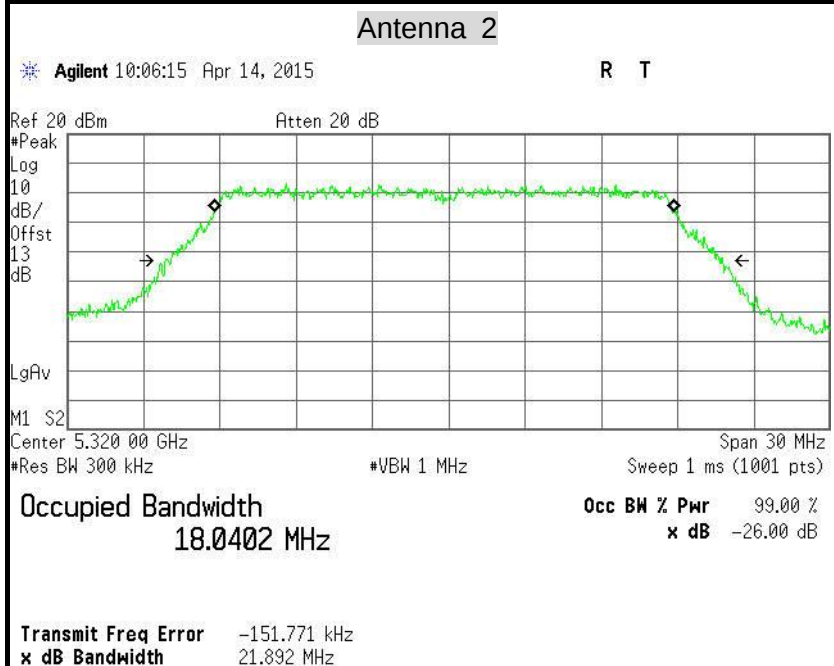





IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

26dB Bandwidth (CH Low)

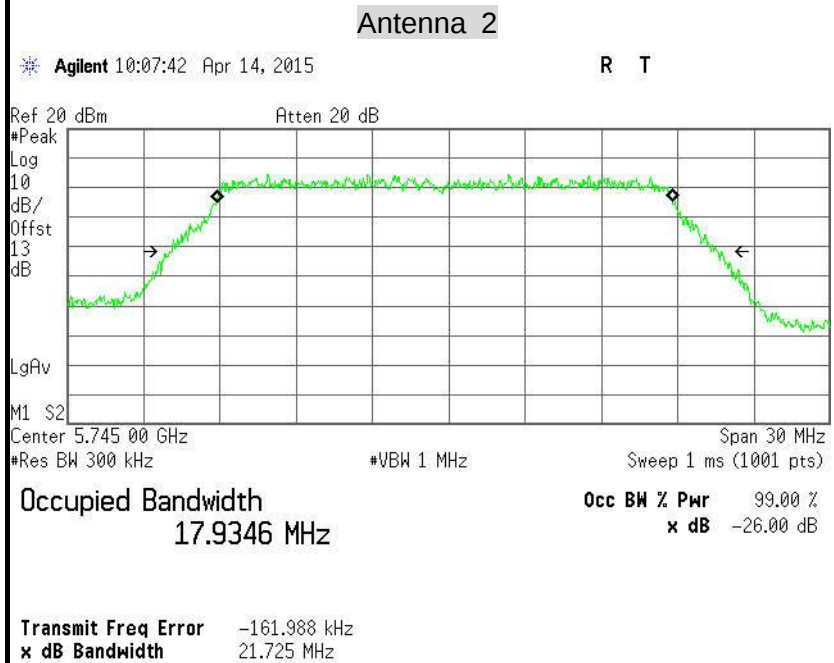

26dB Bandwidth (CH Mid)

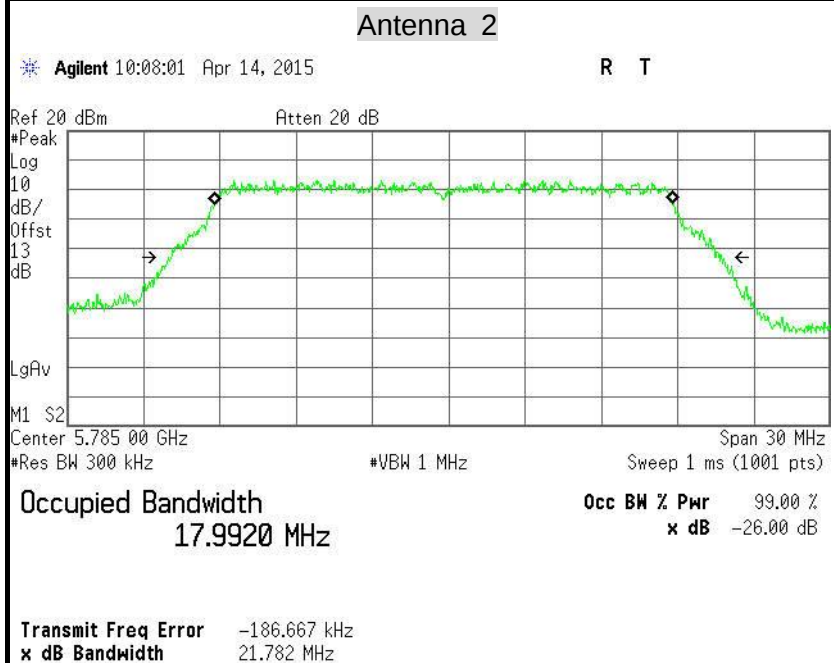


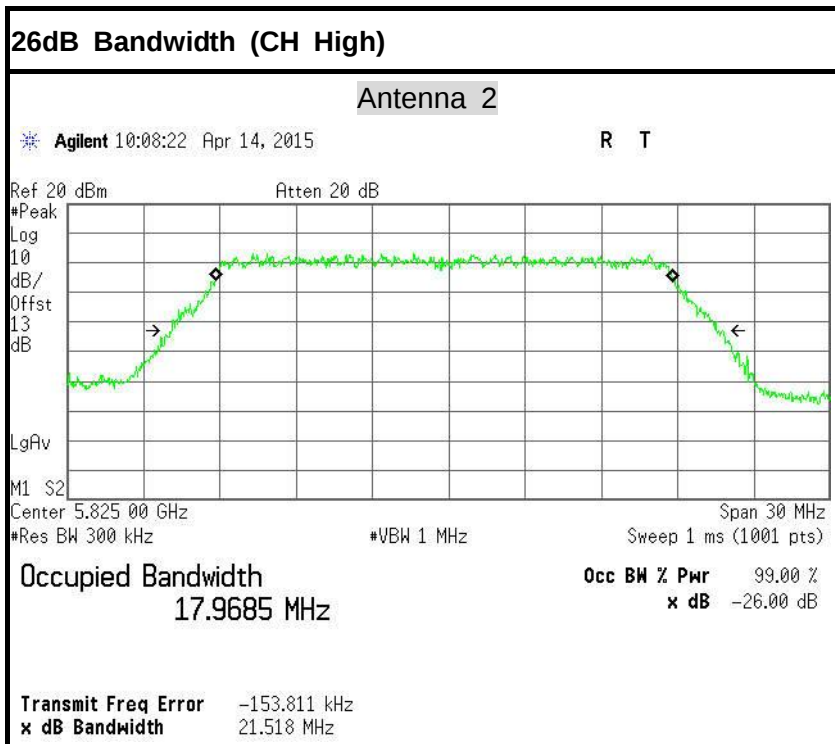




IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz

26dB Bandwidth (CH Low)

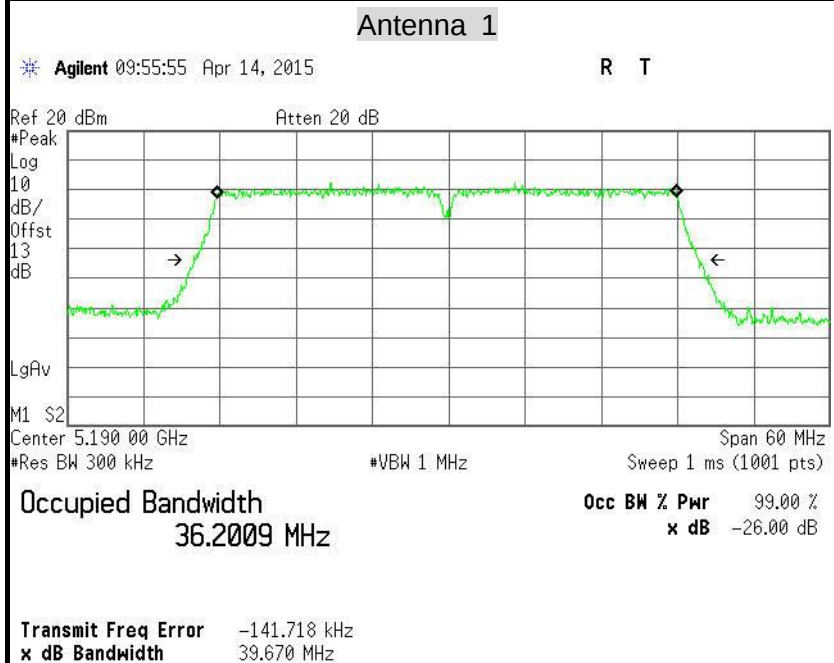


26dB Bandwidth (CH High)

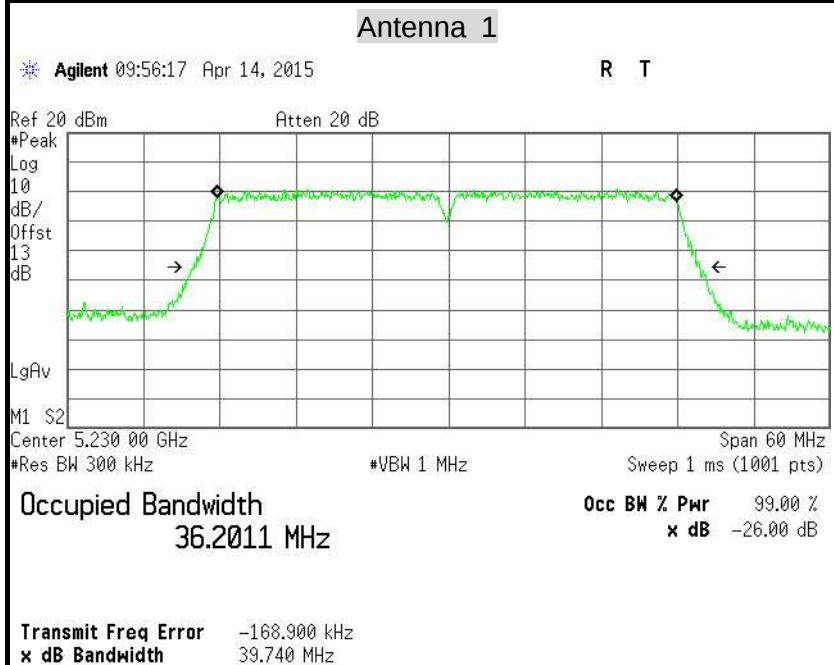




IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz

26dB Bandwidth (CH Low)

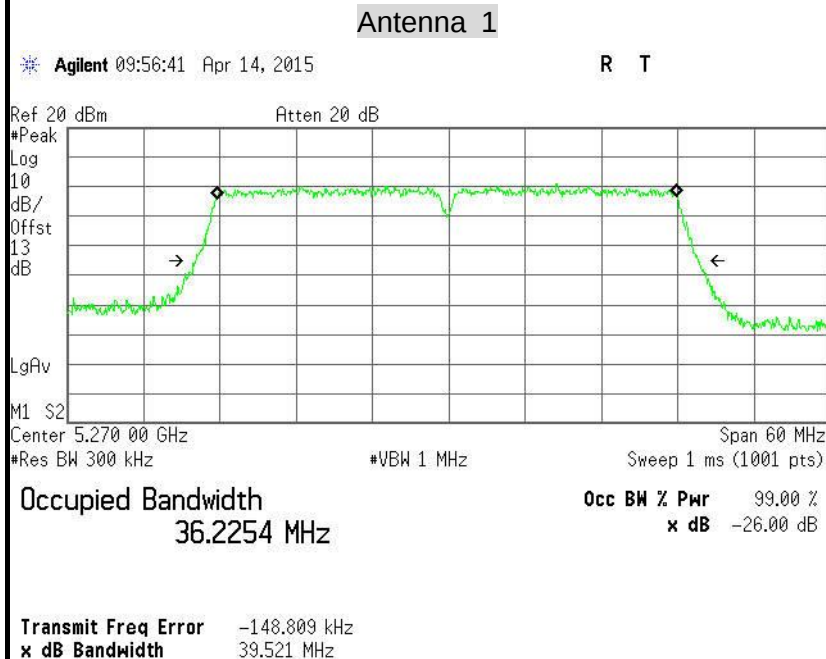


26dB Bandwidth (CH High)

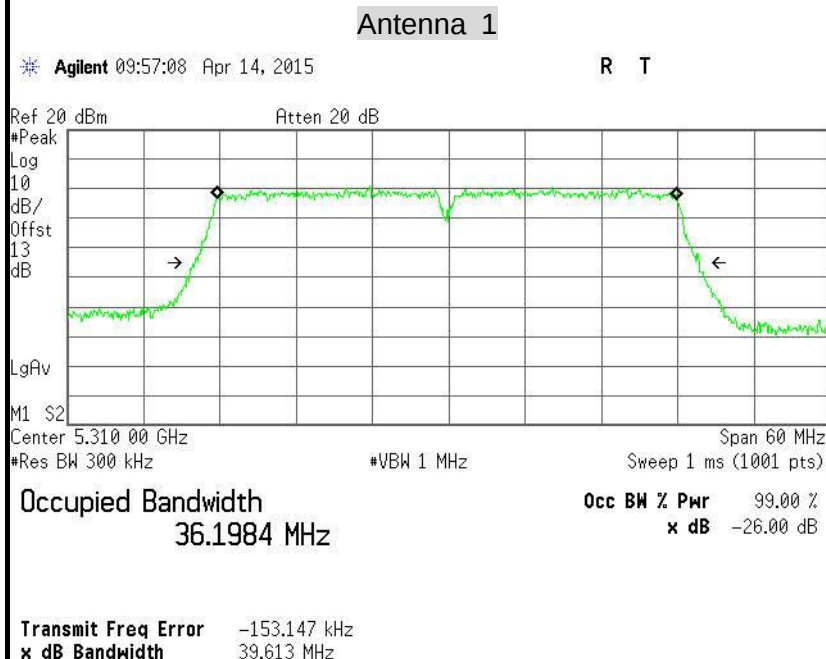




IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

26dB Bandwidth (CH Low)

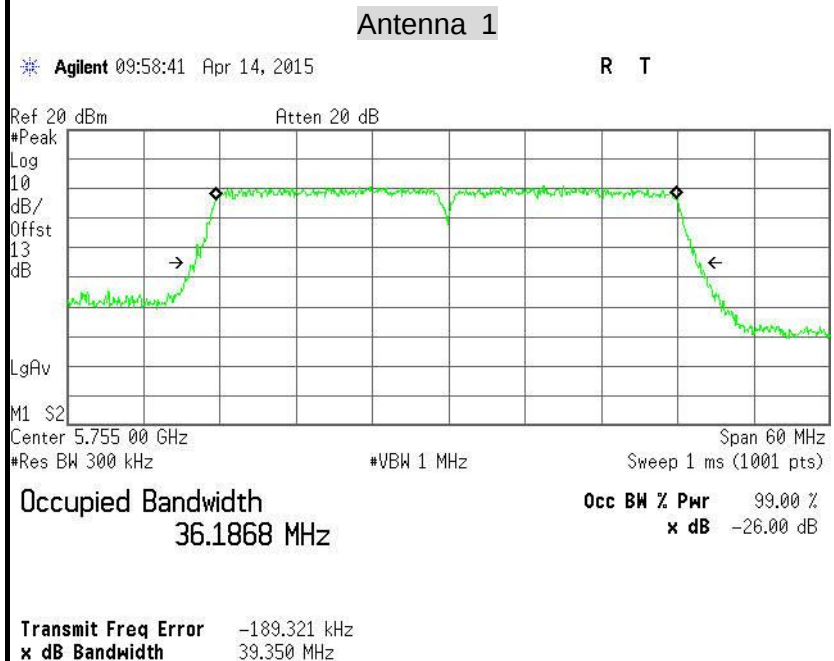


26dB Bandwidth (CH High)

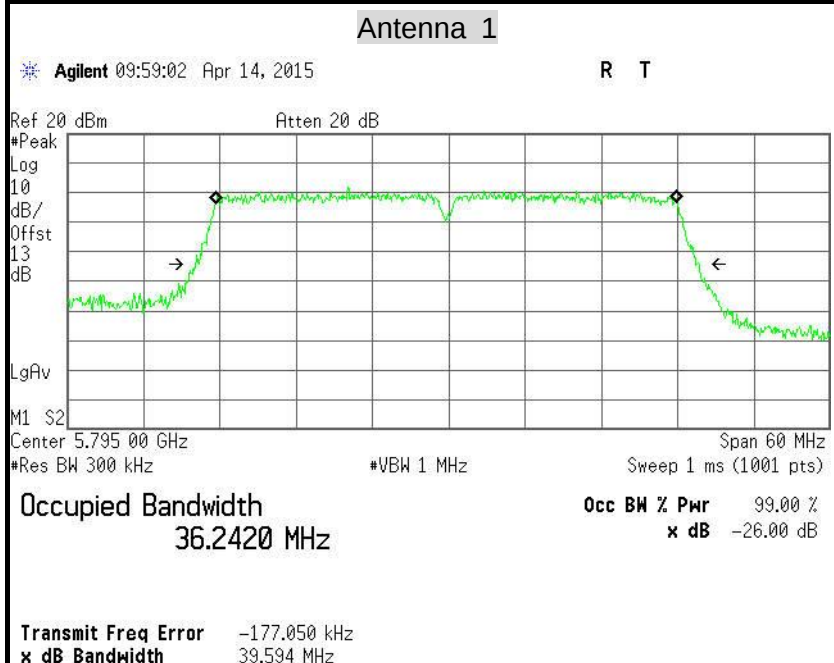




IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz

26dB Bandwidth (CH Low)

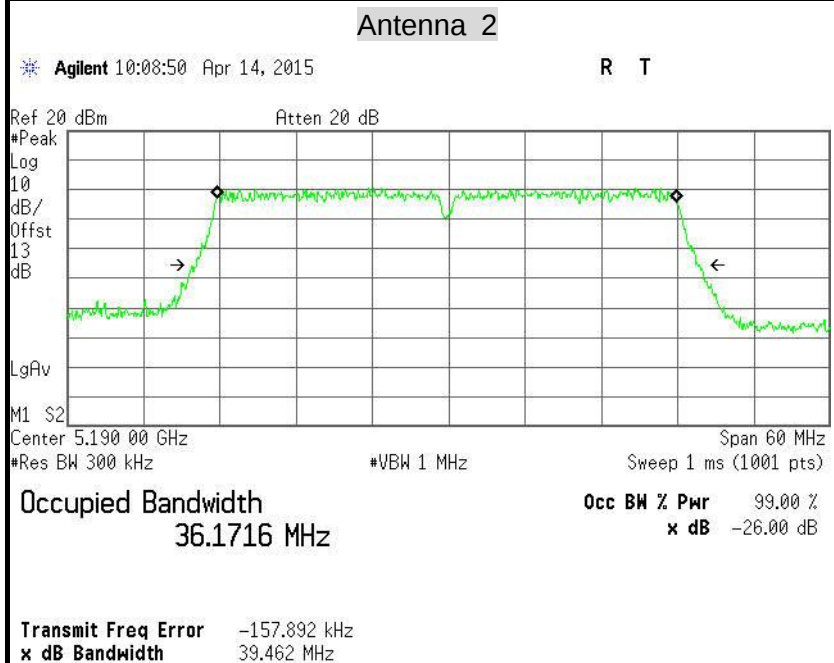


26dB Bandwidth (CH High)

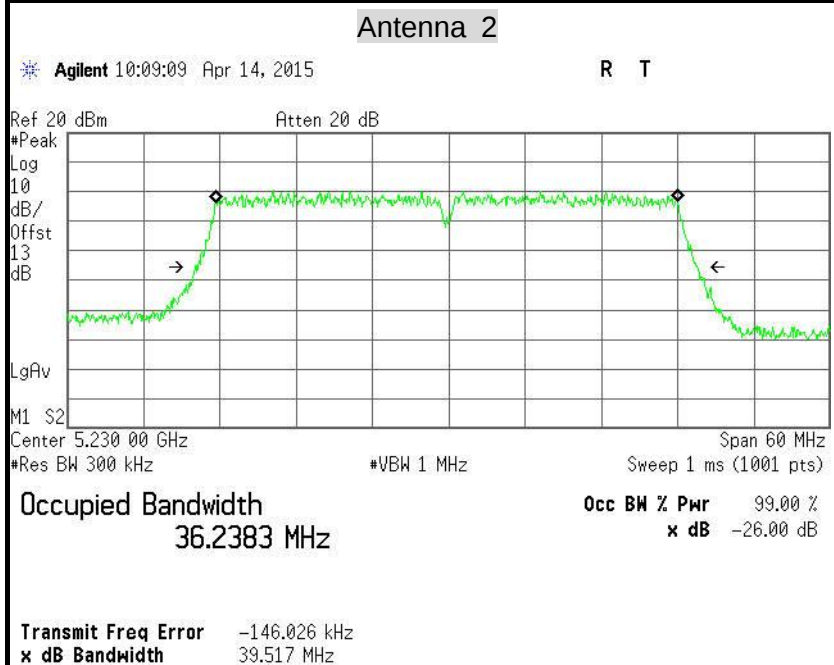




IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz

26dB Bandwidth (CH Low)

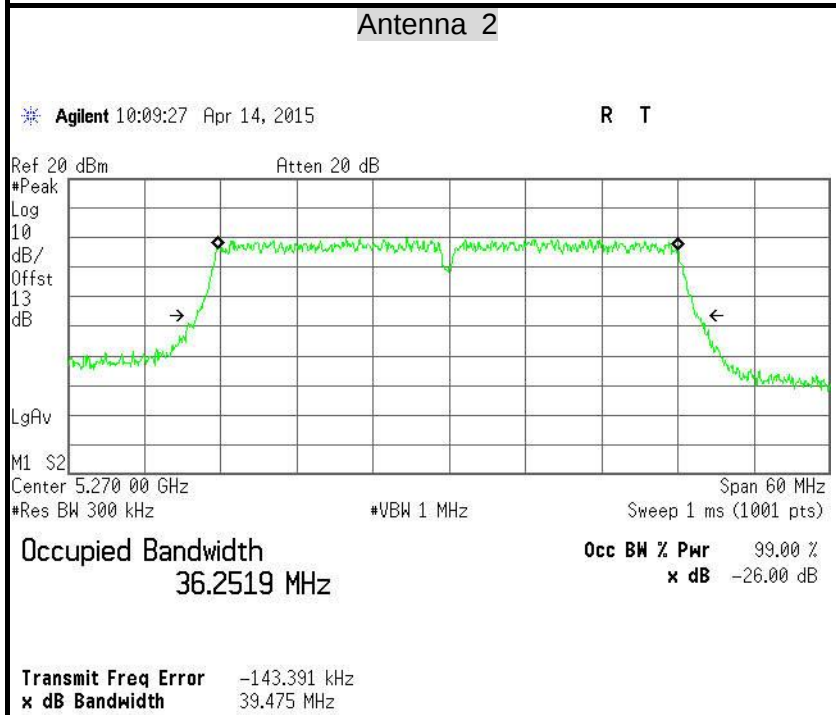


26dB Bandwidth (CH High)

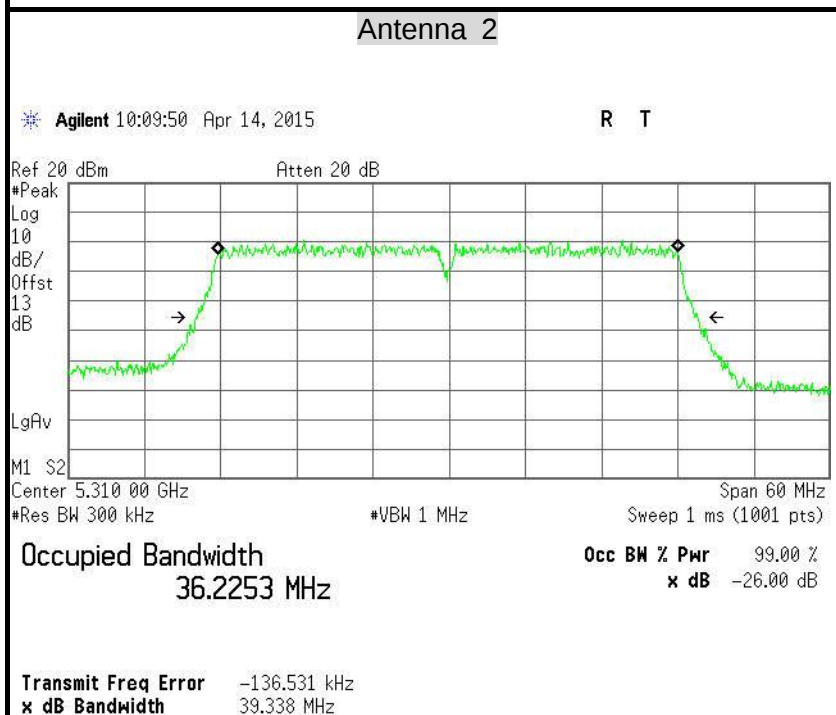




IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

26dB Bandwidth (CH Low)

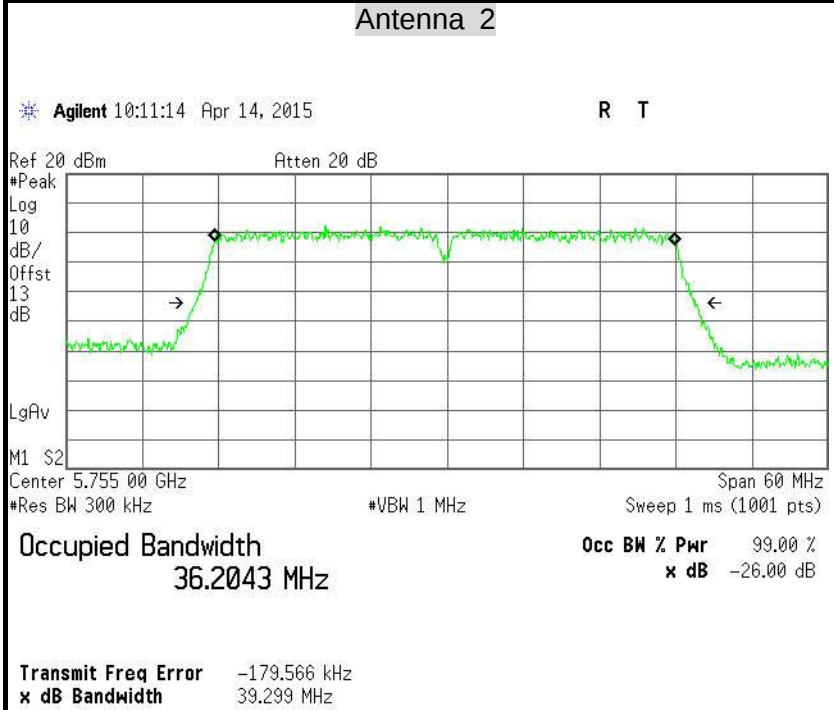


26dB Bandwidth (CH High)

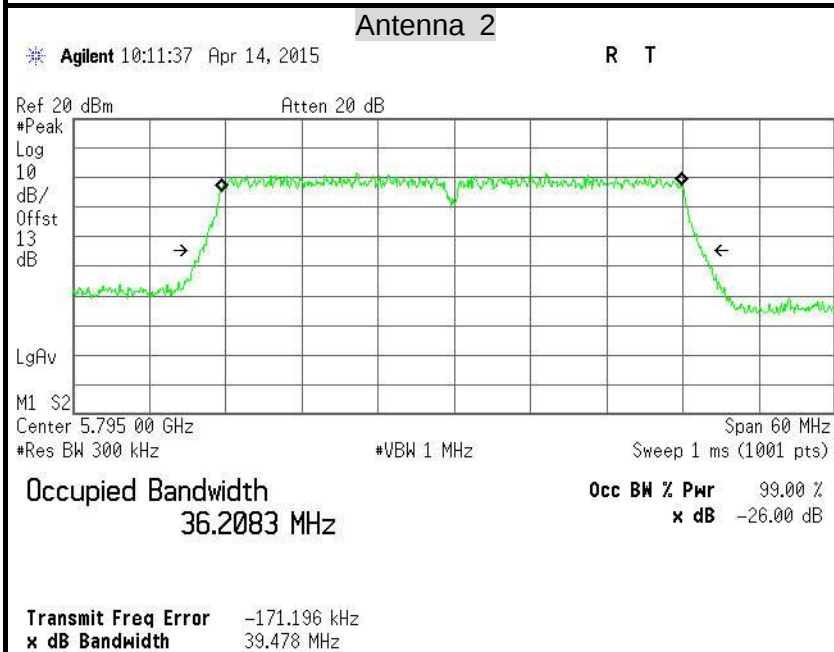




IEEE 802.11ac 80 mode / 5210MHz

26dB Bandwidth

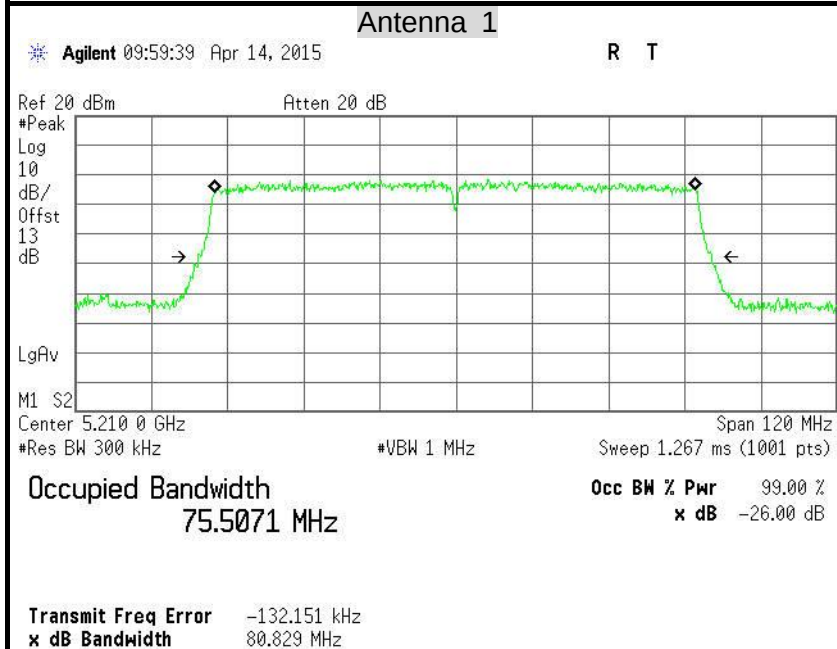

IEEE 802.11ac 80 mode / 5290MHz


26dB Bandwidth

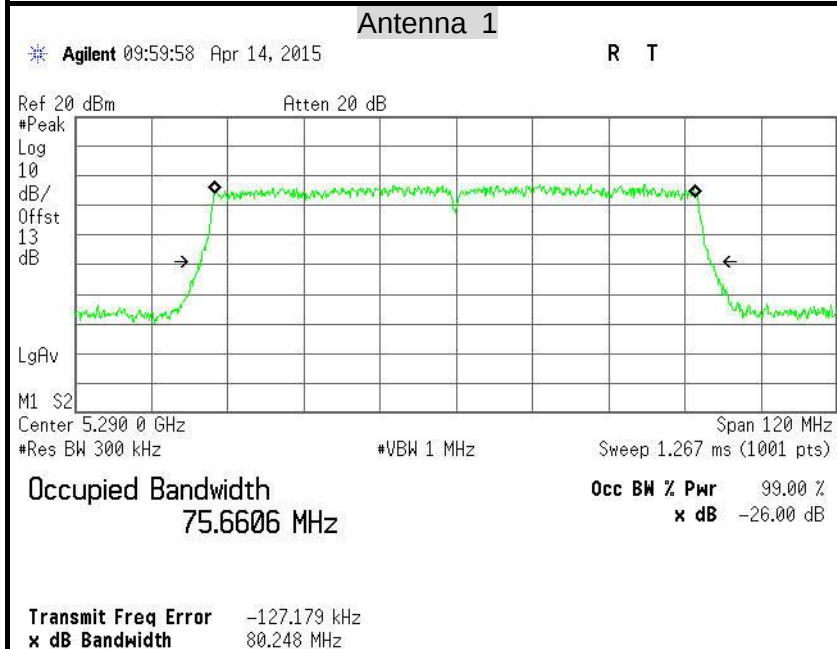




IEEE 802.11ac 80 mode / 5775MHz

26dB Bandwidth

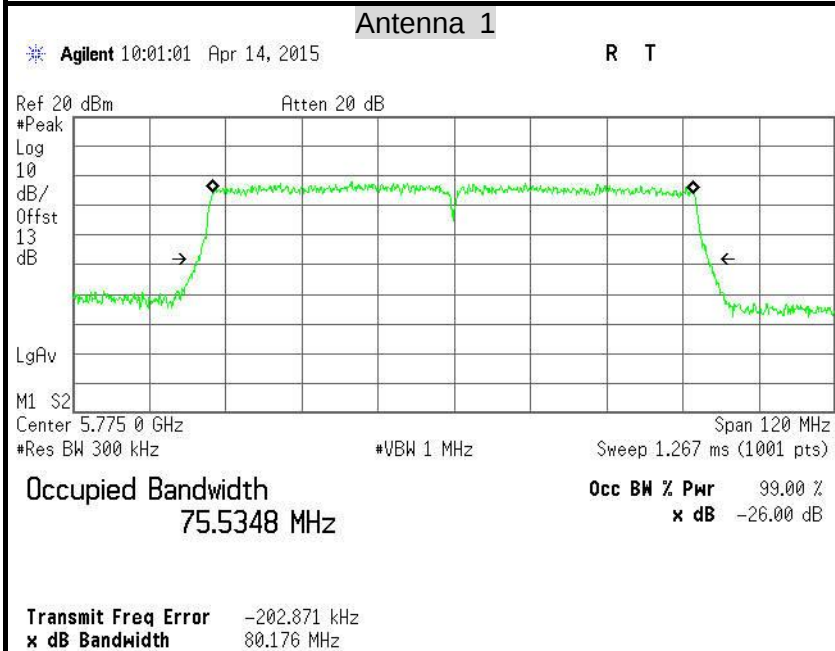


IEEE 802.11ac 80 mode / 5210MHz

26dB Bandwidth

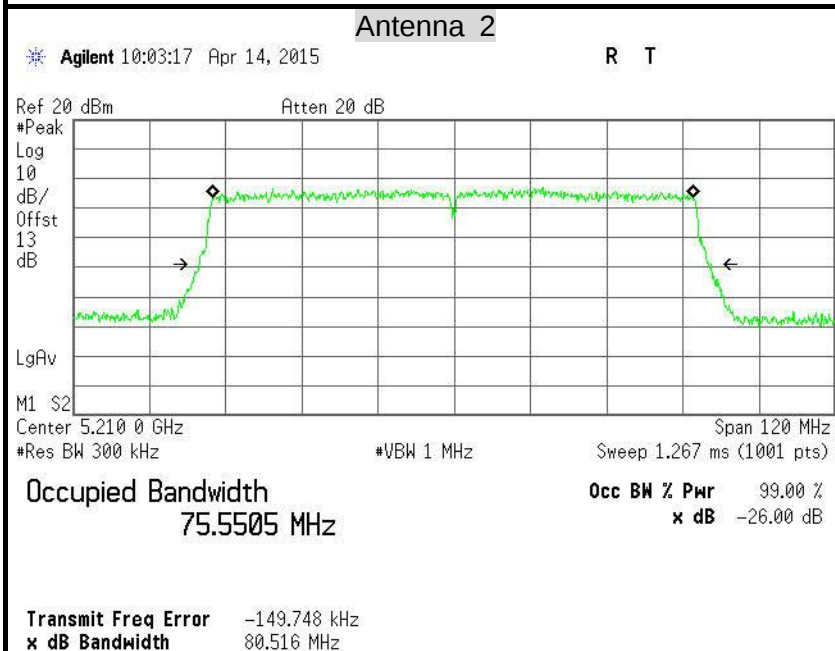


IEEE 802.11ac 80 mode / 5290MHz

26dB Bandwidth

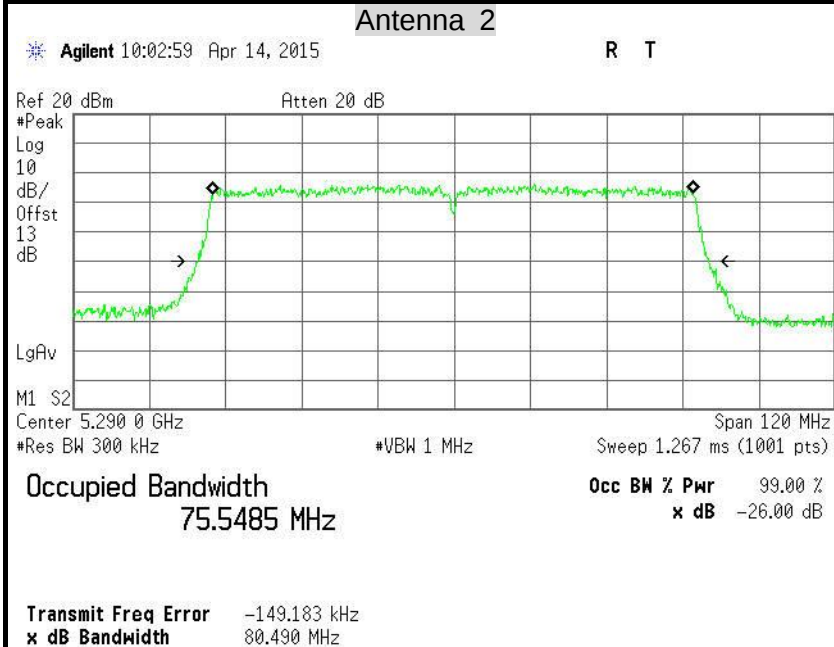

IEEE 802.11ac 80 mode / 5775MHz

26dB Bandwidth

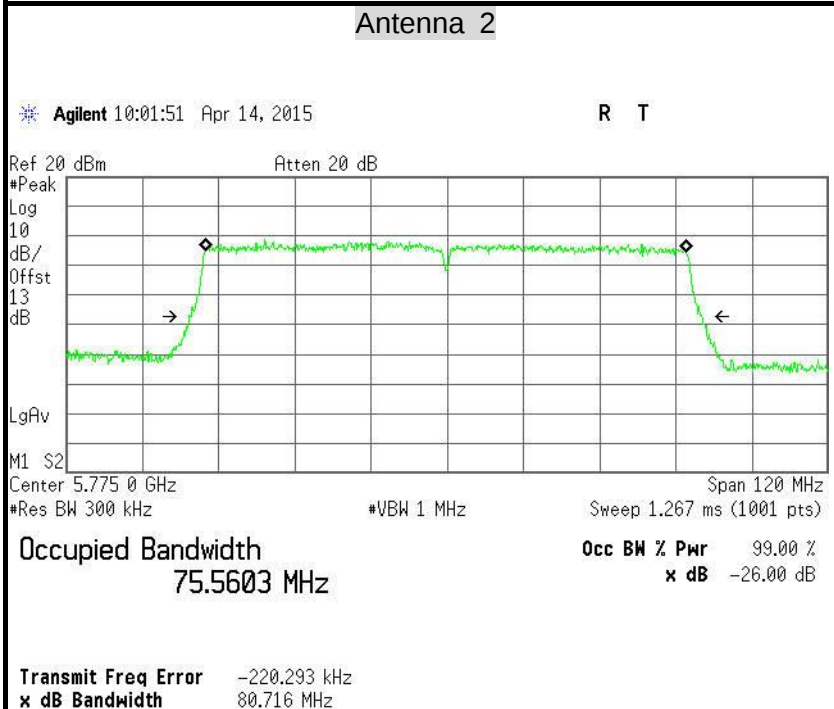



6.2 ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the OFDM mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	



TEST RESULTS

IEEE 802.11a mode (Antenna 1)

T_{nom}	V_{nom}	Lowest channel 5180MHz	Highest channel 5320MHz
Conducted power [dBm] Measured with OFDM modulation		9.76	9.06
Radiated power [dBm] Measured with OFDM modulation		9.94	9.16
Gain [dBi] Calculated		0.18	0.10
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	

IEEE 802.11a mode (Antenna 2)

T_{nom}	V_{nom}	Lowest channel 5180MHz	Highest channel 5320MHz
Conducted power [dBm] Measured with OFDM modulation		8.63	9.06
Radiated power [dBm] Measured with OFDM modulation		11.15	11.84
Gain [dBi] Calculated		2.52	2.78
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	



6.3 PEAK POWER

6.3.1 LIMIT

According to §15.407(a)& FCC R&O FCC 14 - 30,

- (1) (i) For an outdoor access point operating in the band 5.15 – 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15 – 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

**Specified Limit of the Peak Power****Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2
Low	5260	21.70	21.63	13.37	13.35	24.37	24.35	24.00	24.00
Mid	5300	21.77	21.62	13.38	13.35	24.38	24.35	24.00	24.00
High	5320	21.63	21.51	13.35	13.33	24.35	24.33	24.00	24.00

Test mode: IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2
Low	5260	21.75	21.75	13.37	13.37	24.37	24.37	24.00	24.00
Mid	5300	21.92	21.55	13.41	13.34	24.41	24.34	24.00	24.00
High	5320	21.83	21.89	13.39	13.40	24.39	24.40	24.00	24.00

IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2
Low	5270	39.52	39.48	15.97	15.96	26.97	26.96	24.00	24.00
High	5310	39.61	39.34	15.98	15.95	26.98	26.95	24.00	24.00

IEEE 802.11ac 80 mode / 5290MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2
	5290	80.25	80.49	19.04	19.06	30.04	30.06	24.00	24.00




6.3.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/28/2015	02/27/2016
Power Sensor	Anritsu	MA2411B	1126150	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

6.3.3 TEST CONFIGURATIONS

The EUT was connected to a spectrum analyzer through a 50 Ω RF cable.



6.3.4 TEST PROCEDURE

Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run". Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

6.3.5 TEST RESULTS

No non-compliance noted

**6.3.6 TEST DATA****IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Output Power (dBm)		Output Power (W)		Limit (dBm)	Result
		Antenna 1	Antenna 2	Antenna 1	Antenna 2		
Low	5180	15.79	14.32	0.03793	0.02704	30.00	PASS
Mid	5200	15.79	15.50	0.03793	0.03548		PASS
High	5240	15.51	14.45	0.03556	0.02786		PASS

IEEE 802.11a mode / 5260~ 5320MHz

Channel	Frequency (MHz)	Output Power (dBm)		Output Power (W)		Limit (dBm)	Result
		Antenna 1	Antenna 2	Antenna 1	Antenna 2		
Low	5260	15.49	14.33	0.03540	0.02710	24.00	PASS
Mid	5300	15.15	14.46	0.03273	0.02793		PASS
High	5320	15.20	14.20	0.03311	0.02630		PASS

IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	Output Power (dBm)		Output Power (W)		Limit (dBm)	Result
		Antenna 1	Antenna 2	Antenna 1	Antenna 2		
Low	5745	15.26	14.41	0.03357	0.02761	30.00	PASS
Mid	5785	15.32	15.22	0.03404	0.03327		PASS
High	5825	14.90	14.91	0.03090	0.03097		PASS

**IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Limit (dBm)	Result
		Antenna 1	Antenna 2	Total			
Low	5180	15.56	14.39	18.02	0.06345	30.00	PASS
Mid	5200	15.42	14.43	17.96	0.06257		PASS
High	5240	15.46	13.34	17.54	0.05673		PASS

IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Limit (dBm)	Result
		Antenna 1	Antenna 2	Total			
Low	5260	15.34	14.36	17.89	0.06149	24.00	PASS
Mid	5300	14.04	14.26	17.16	0.05202		PASS
High	5320	15.16	14.22	17.73	0.05923		PASS

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Limit (dBm)	Result
		Antenna 1	Antenna 2	Total			
Low	5745	14.07	15.39	17.79	0.06012	30.00	PASS
Mid	5785	15.12	15.04	18.09	0.06442		PASS
High	5825	14.63	14.54	17.60	0.05748		PASS

**IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Limit (dBm)	Result
		Antenna 1	Antenna 2	Total			
Low	5190	16.21	14.90	18.61	0.07269	30.00	PASS
High	5230	15.94	14.98	18.50	0.07074		PASS

IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Limit (dBm)	Result
		Antenna 1	Antenna 2	Total			
Low	5270	15.76	14.71	18.28	0.06725	24.00	PASS
High	5310	15.70	14.86	18.31	0.06777		PASS

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Limit (dBm)	Result
		Antenna 1	Antenna 2	Total			
Low	5755	15.75	16.00	18.89	0.07739	30.00	PASS
High	5795	15.54	15.77	18.67	0.07357		PASS

**IEEE 802.11ac 80 mode / 5210MHz**

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Limit (dBm)	Result
		Antenna 1	Antenna 2	Total			
	5210	15.46	13.83	17.73	0.05931	30.00	PASS

IEEE 802.11ac 80 mode / 5290MHz

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Limit (dBm)	Result
		Antenna 1	Antenna 2	Total			
	5290	15.17	13.89	17.59	0.05738	24.00	PASS

IEEE 802.11ac 80 mode / 5775MHz

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Limit (dBm)	Result
		Antenna 1	Antenna 2	Total			
	5775	14.90	15.14	18.03	0.06356	30.00	PASS



6.4 BAND EDGES MEASUREMENT

6.4.1 LIMIT

According to §15.407(b)

- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

6.4.2 MEASUREMENT EQUIPMENT USED


Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/28/2015	02/27/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/18/2016
High Noise Amplifier	Agilent	8449B	3008A01838	02/28/2015	02/27/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2015	02/27/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/28/2015	02/27/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2015	02/27/2016
Loop Antenna	COM-POWER	AL-130	121044	09/25/2015	09/24/2016
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.

6.4.3 TEST CONFIGURATION

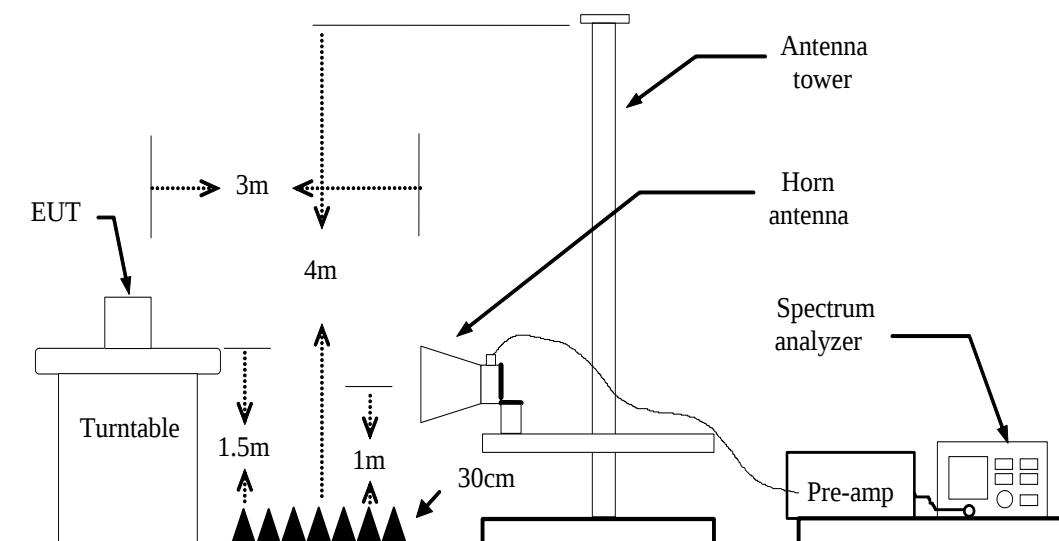

6.4.4 TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1 / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO / Detector=RMS
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.