

**FCC 47 CFR PART 15 SUBPART C****TEST REPORT****For****802.11ac/b/g/n USB module****Model: WUBM-273ACN****Trade Name: N/A***Issued to*

**Teradek, LLC**  
**34B Mauchly Irvine, CA 92618 United States**

*Issued by*

**Compliance Certification Services Inc.**  
**No.11, Wugong 6th Rd., Wugu Dist.,**  
**New Taipei City 24891, Taiwan. (R.O.C.)**  
**<http://www.ccsrf.com>**  
**[service@ccsrf.com](mailto:service@ccsrf.com)**  
**Issued Date: January 12, 2016**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 12, 2016	Initial Issue	ALL	Kelly Cheng

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION.....</b>	<b>5</b>
<b>3. TEST METHODOLOGY.....</b>	<b>6</b>
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE .....	6
3.3 GENERAL TEST PROCEDURES .....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES .....	8
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>9</b>
4.1 MEASURING INSTRUMENT CALIBRATION.....	9
4.2 MEASUREMENT EQUIPMENT USED.....	9
4.3 MEASUREMENT UNCERTAINTY .....	10
<b>5. FACILITIES AND ACCREDITATIONS.....</b>	<b>11</b>
5.1 FACILITIES.....	11
5.2 EQUIPMENT .....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS .....	12
<b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>13</b>
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT .....	13
<b>7. FCC PART 15.247 REQUIREMENTS .....</b>	<b>14</b>
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER .....	34
7.3 AVERAGE POWER .....	36
7.4 BAND EDGES MEASUREMENT .....	38
7.5 PEAK POWER SPECTRAL DENSITY .....	84
7.6 SPURIOUS EMISSIONS .....	104
7.7 RADIATED EMISSIONS .....	123
7.8 POWERLINE CONDUCTED EMISSIONS.....	153
<b>APPENDIX I PHOTOGRAPHS OF TEST SETUP .....</b>	<b>158</b>

## 1. TEST RESULT CERTIFICATION

**Applicant:** Teradek, LLC  
34B Mauchly Irvine, CA 92618 United States

**Equipment Under Test:** 802.11ac/b/g/n USB module

**Trade Name:** N/A

**Model Number:** WUBM-273ACN

**Date of Test:** December 27, 2014 ~ January 5, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:



---

Miller Lee  
Manager  
Compliance Certification Services Inc.

Reviewed by:



---

Angel Cheng  
Section Manager  
Compliance Certification Services Inc.

## 2. EUT DESCRIPTION

<b>Product</b>	802.11ac/b/g/n USB module
<b>Trade Name</b>	N/A
<b>Model Number</b>	WUBM-273ACN
<b>Received Date</b>	November 26, 2015
<b>Power Adapter</b>	Powered from host device
<b>Frequency Range</b>	2412 ~ 2462 MHz
<b>Transmit Power</b>	IEEE 802.11b mode: 24.86 dBm IEEE 802.11g mode: 23.76 dBm IEEE 802.11n HT 20 MHz mode: 27.78 dBm IEEE 802.11n HT 40 MHz mode: 25.31 dBm
<b>Modulation Technique</b>	IEEE 802.11b mode: DSSS IEEE 802.11g mode: OFDM IEEE 802.11n HT 20 MHz mode: OFDM IEEE 802.11n HT 40 MHz mode: OFDM
<b>Number of Channels</b>	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels
<b>Antenna Specification</b>	1. SparkLAN / WUBM-273ACN Printed Antenna / Gain: 0.23dBi 2. LCT / DFE_ACBSMA-BGP Dipole Antenna / Gain: 3dBi

**Remark:**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **2AFNQ-WUBM273ACN** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. Client consigns two types to test (model number: WUBM-273ACN). Therefore, the testing Lab. just guarantees the unit, which has been tested.
4. There are four types for sale is just for marketing purpose only, please see as below:

<i>Model</i>	<i>Type</i>
WUBM-273ACN	12pin wafer connector + dipole antenna
	USB 3.0 type A + dipole antenna
	USB 3.0 type A + printed antenna
	12pin wafer connector + printed antenna

### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47 Part 15.207, 15.209, 15.247 and KDB558074.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### **3.5 DESCRIPTION OF TEST MODES**

The EUT had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

**IEEE 802.11b mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

**IEEE 802.11g mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 20 MHz mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz mode:**

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

**Remark:** Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/19/2015
Power Meter	Anritsu	ML2495A	1012009	06/03/2015
Power Sensor	Anritsu	MA2411A	0917072	06/03/2015

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/31/2015
EMI Test Receiver	R&S	ESCI	100064	02/14/2015
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/10/2015
Pre-Amplifier	MITEQ	AFS44-0010265 0-42-10P-44	1415367	11/16/2015
Bilog Antenna	Sunol Sciences	JB3	A030105	09/30/2015
Horn Antenna	EMCO	3117	00055165	01/09/2015
Horn Antenna	EMCO	3116	00026370	10/09/2015
Loop Antenna	EMCO	6502	8905/2356	06/08/2015
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/22/2015
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESI	101203	09/11/2015
LISN	R&S	ESH3-Z5	848773/014	12/04/2015
Coaxial Cable	Commate	CFD300-NL	NA	12/04/2015
Test S/W	CCS-3A1-CE			

### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2159
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	DELL	PP19L	7B3ZP1S	N/A	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

**Remark:**

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 300 kHz, VBW = 1000 kHz, Sweep = auto.
4. Mark the peak frequency and –6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted.*

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.25	>500	PASS
Mid	2437	10.25		PASS
High	2462	10.25		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.5	>500	PASS
Mid	2437	16.4167		PASS
High	2462	16.5		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / Chain 0**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.6667	>500	PASS
Mid	2437	17.75		PASS
High	2462	17.5833		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / Chain 1**

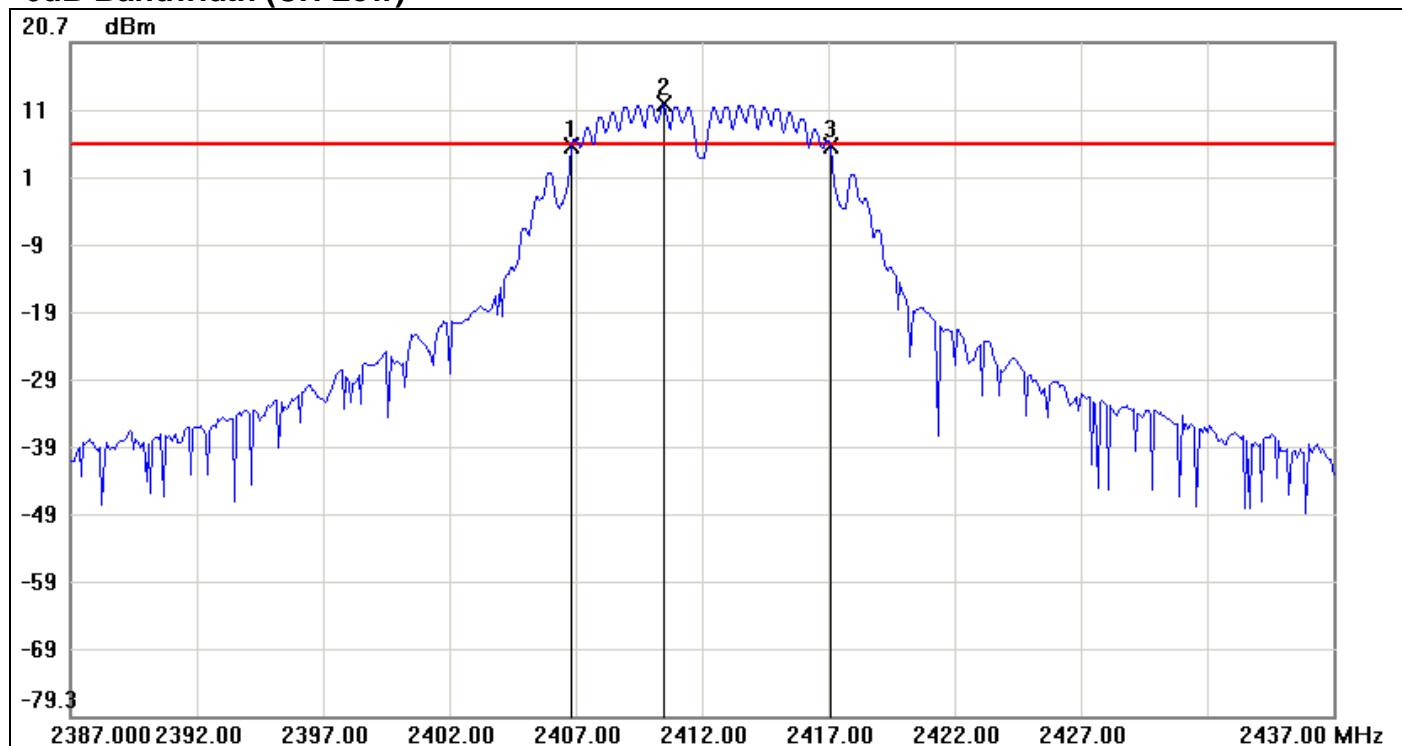
Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.5833	>500	PASS
Mid	2437	17.75		PASS
High	2462	17.5833		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / Chain 0**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.25	>500	PASS
Mid	2437	36.25		PASS
High	2452	36.4167		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / Chain 1**

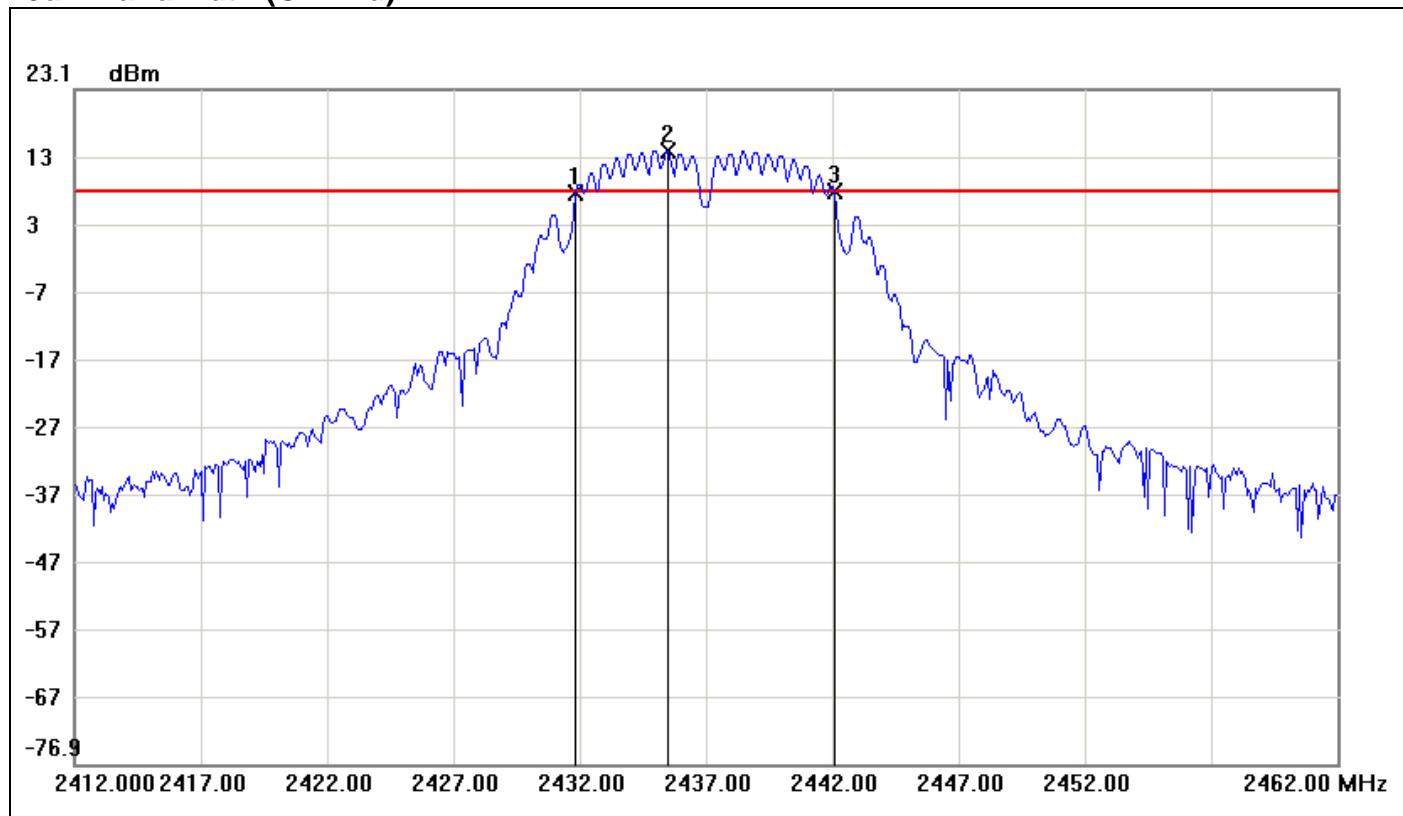
Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.6667	>500	PASS
Mid	2437	35.9167		PASS
High	2452	35.9167		PASS

**Test Plot****IEEE 802.11b mode****6dB Bandwidth (CH Low)**

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2406.8333	5.27	5.46	-0.19
2	2410.5000	11.46	5.46	6.00
3	2417.0833	5.42	5.46	-0.04

No.	ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	10.25

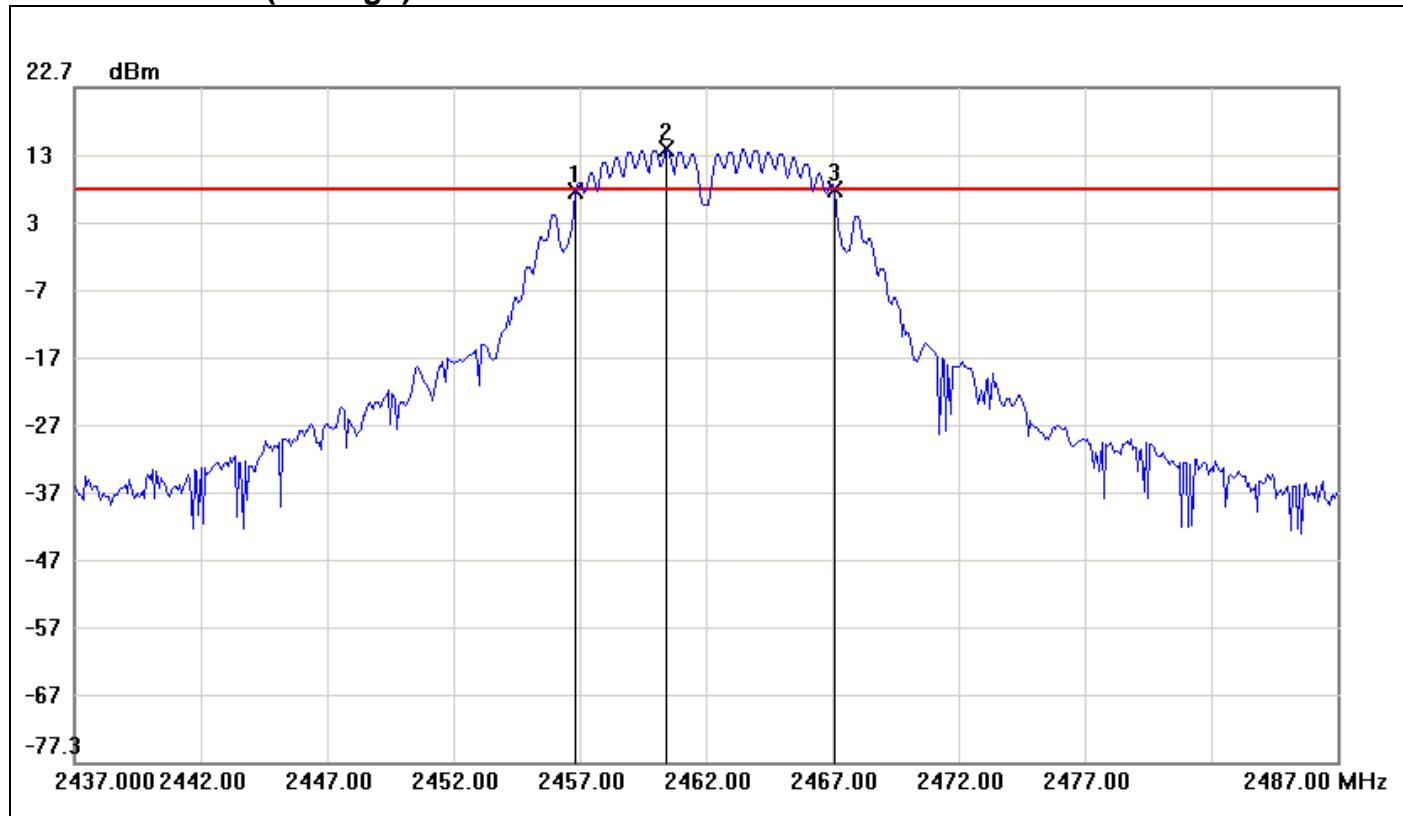
**6dB Bandwidth (CH Mid)**



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2431.8333	7.82	8.05	-0.23
2	2435.5000	14.05	8.05	6.00
3	2442.0833	8.02	8.05	-0.03

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	10.25	0.2

**6dB Bandwidth (CH High)**

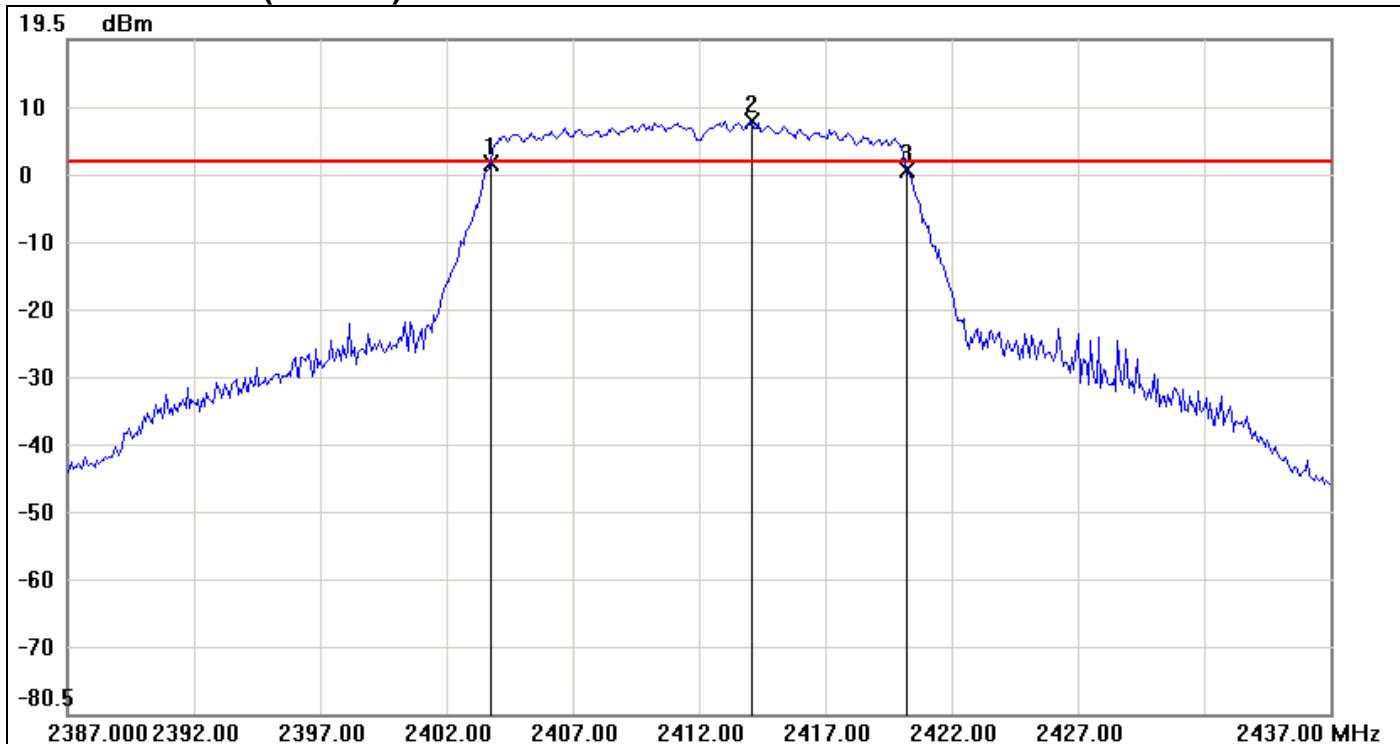


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2456.8333	7.28	7.52	-0.24
2	2460.4167	13.52	7.52	6.00
3	2467.0833	7.48	7.52	-0.04

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	10.25	0.2

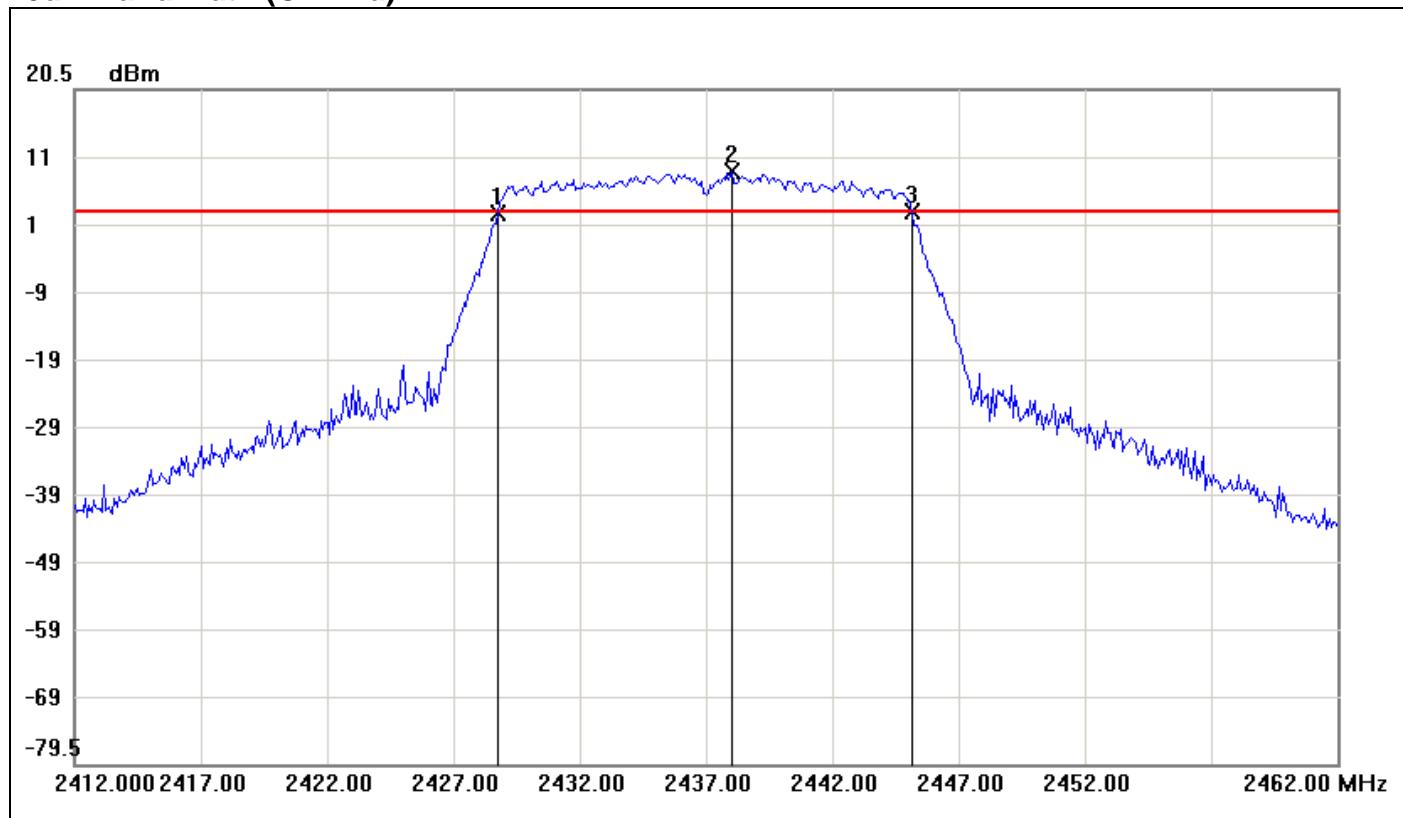
**IEEE 802.11g mode**

**6dB Bandwidth (CH Low)**



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.7500	1.05	1.44	-0.39
2	2414.0833	7.44	1.44	6.00
3	2420.2500	0.11	1.44	-1.33

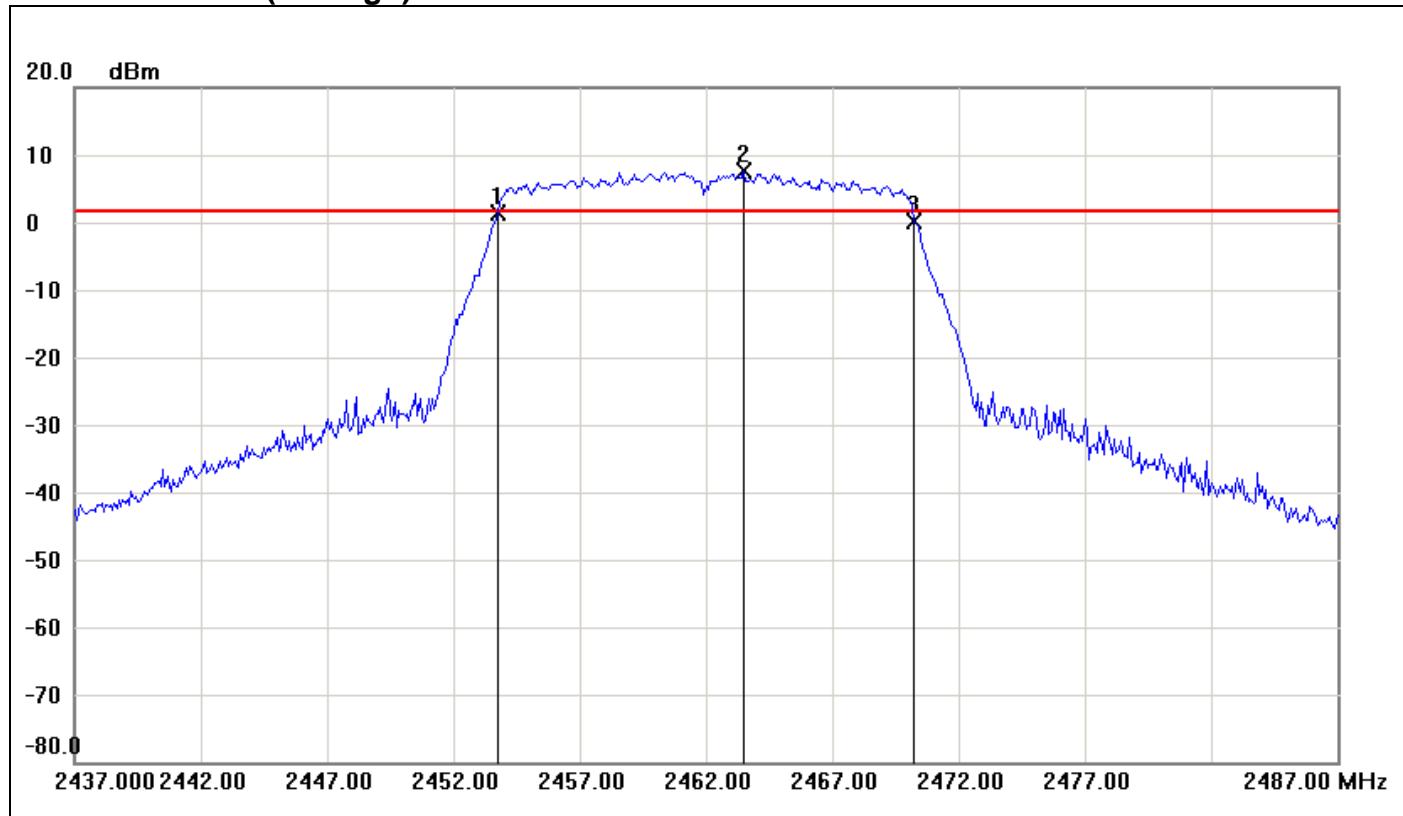
No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	16.5	-0.94

**6dB Bandwidth (CH Mid)**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.7500	2.05	2.46	-0.41
2	2438.0000	8.46	2.46	6.00
3	2445.1667	2.31	2.46	-0.15

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	16.4167	0.26

**6dB Bandwidth (CH High)**

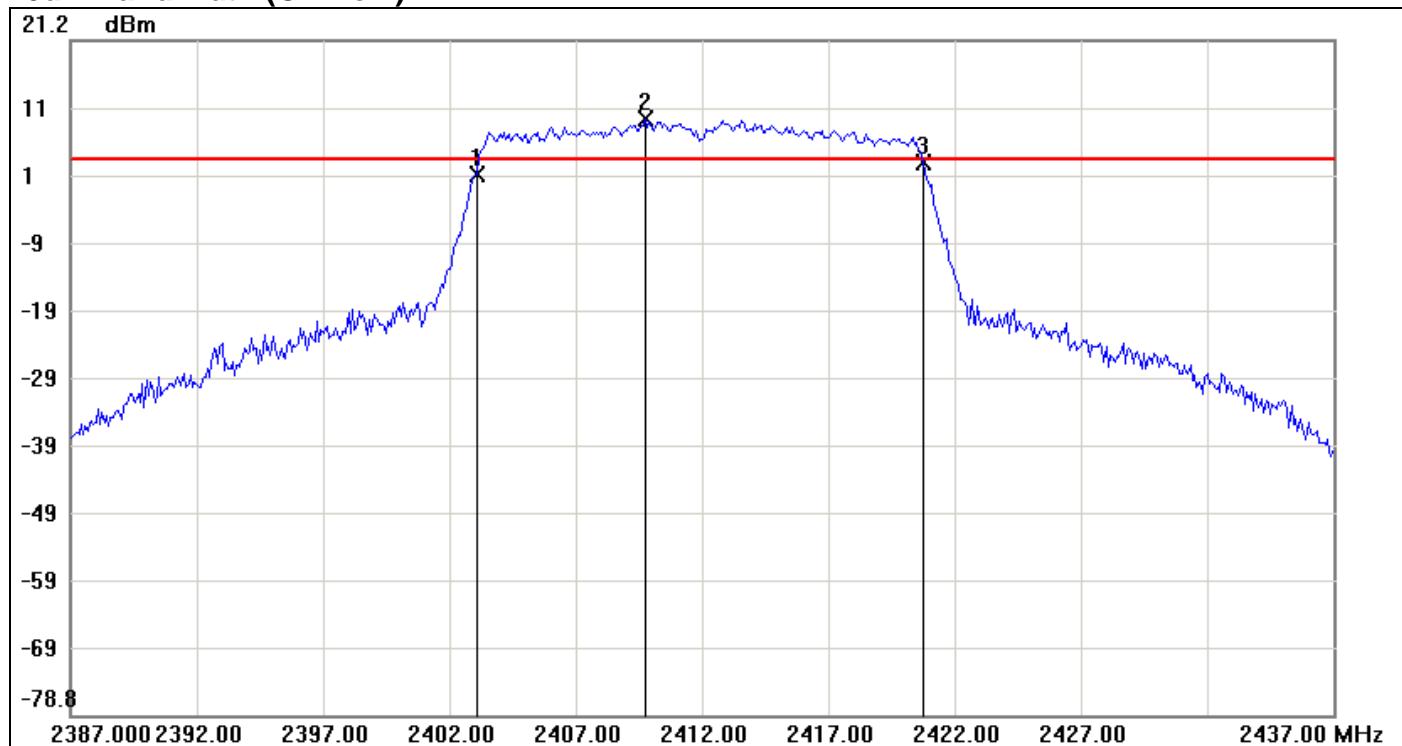


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.7500	1.30	1.51	-0.21
2	2463.5000	7.51	1.51	6.00
3	2470.2500	0.18	1.51	-1.33

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	16.5	-1.12

**IEEE 802.11n HT 20 MHz mode / Chain 0**

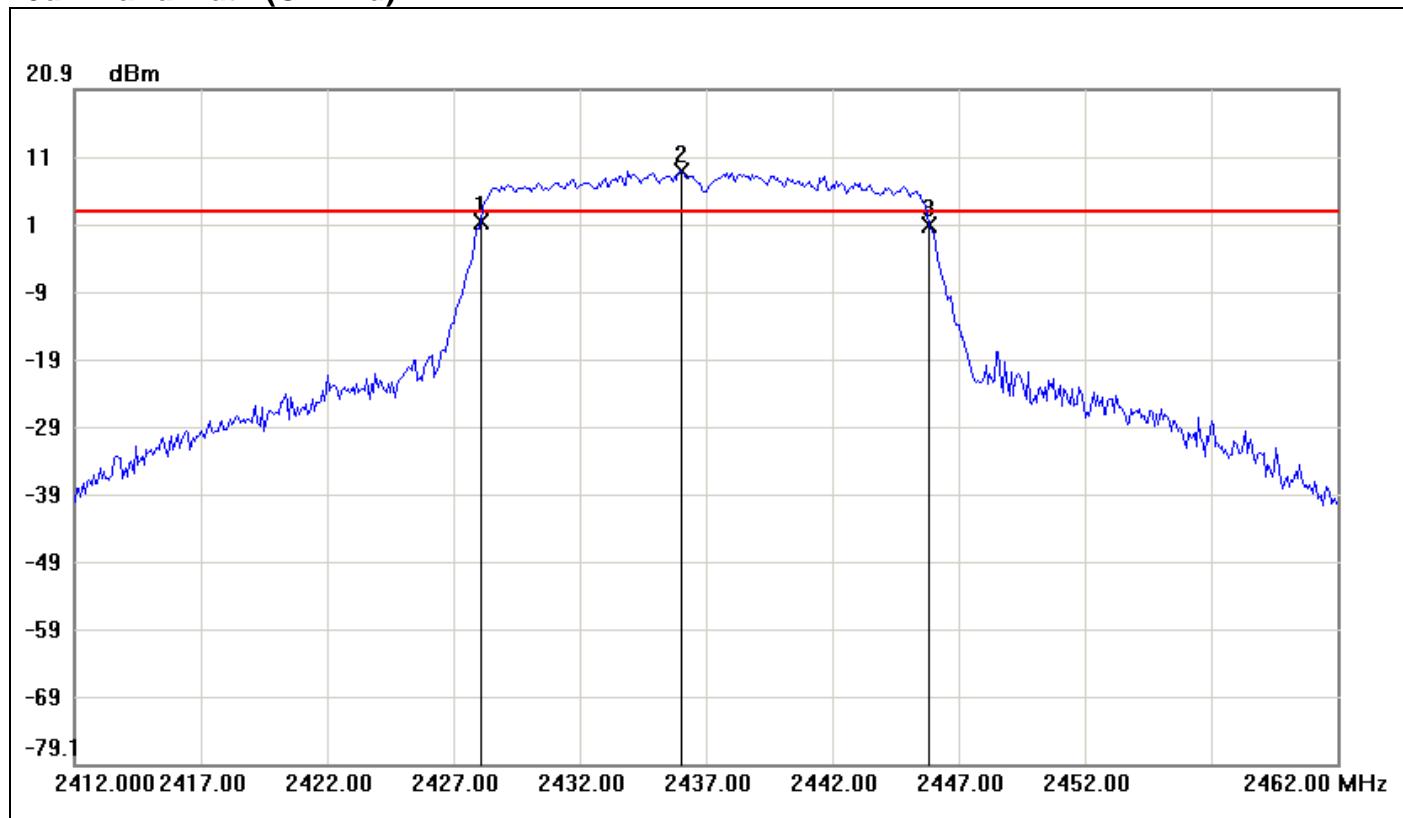
**6dB Bandwidth (CH Low)**



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.0833	1.37	3.52	-2.15
2	2409.7500	9.52	3.52	6.00
3	2420.7500	3.09	3.52	-0.43

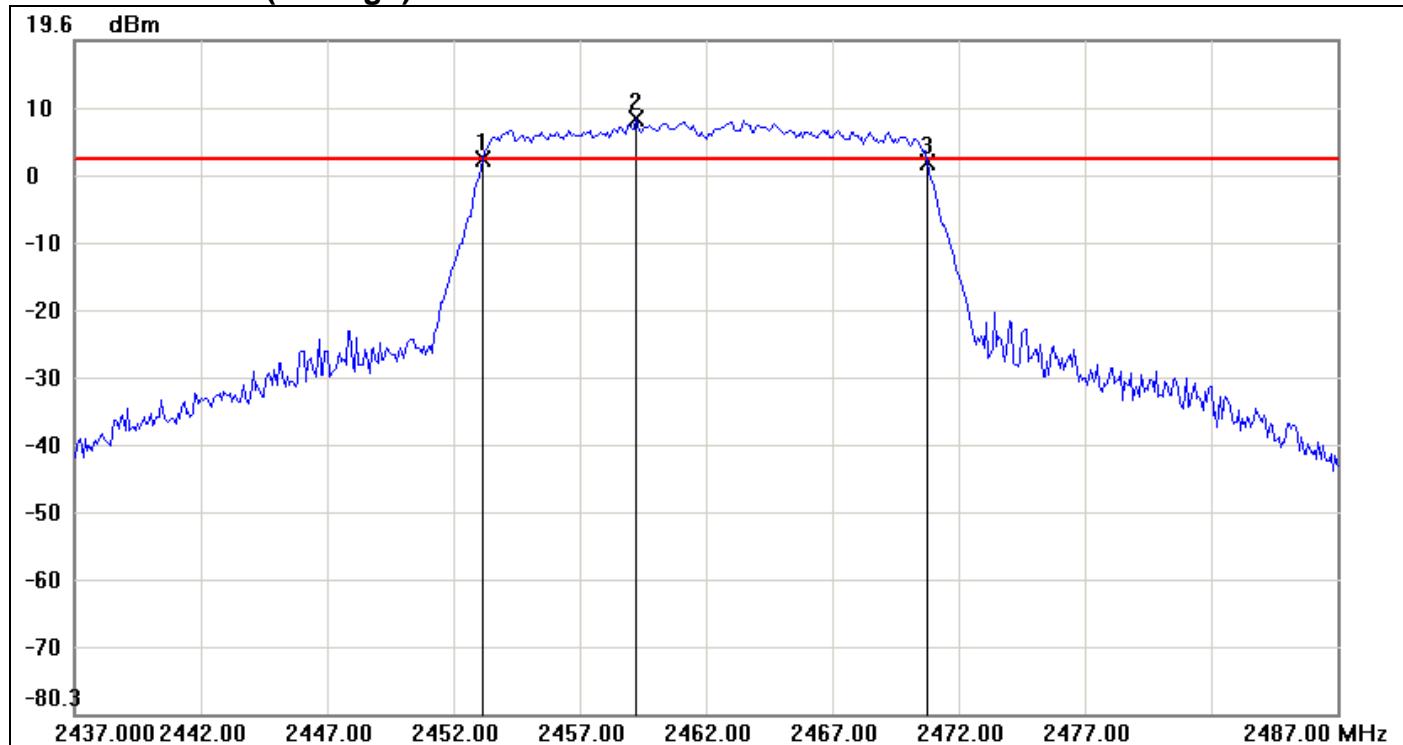
No.	$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	17.6667

### 6dB Bandwidth (CH Mid)



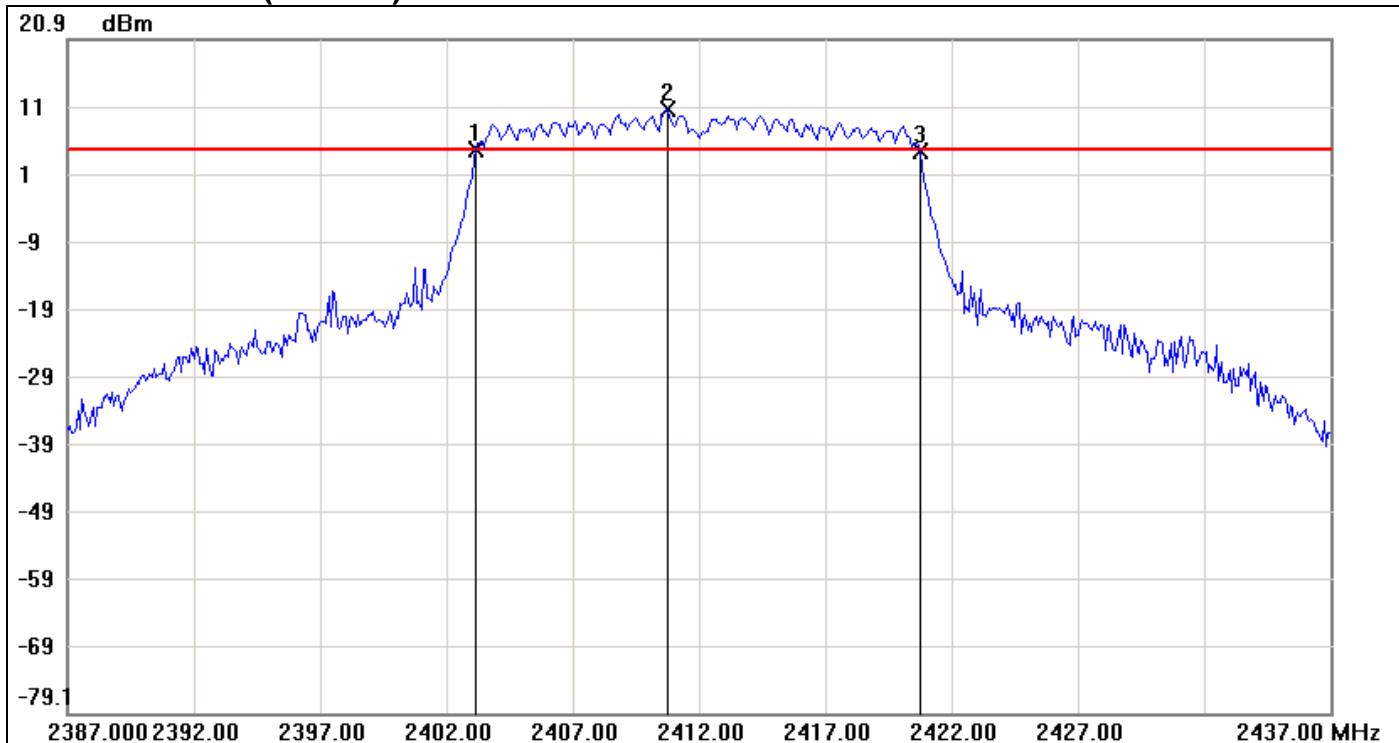
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.0833	1.33	2.77	-1.44
2	2436.0000	8.77	2.77	6.00
3	2445.8333	0.88	2.77	-1.89

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	17.75	-0.45

**6dB Bandwidth (CH High)**


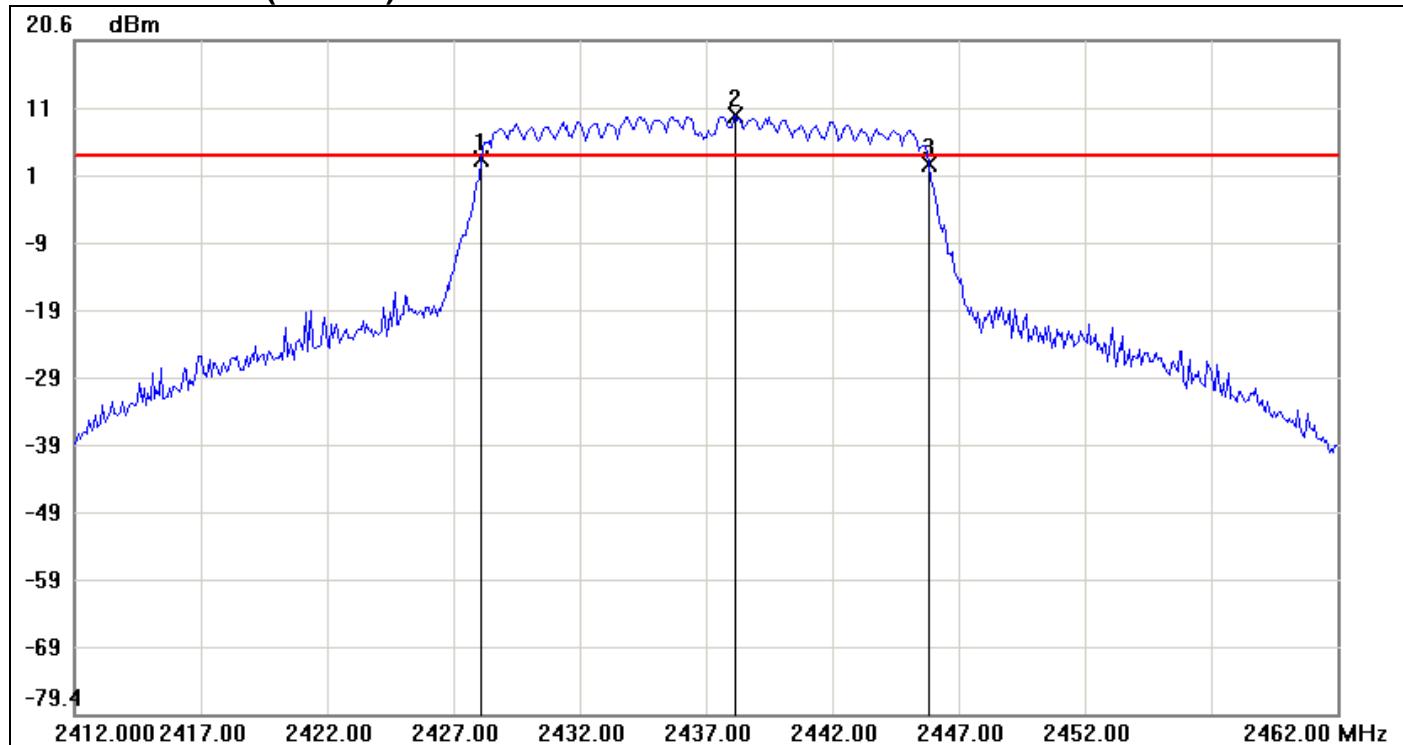
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.1667	2.00	2.01	-0.01
2	2459.2500	8.01	2.01	6.00
3	2470.7500	1.49	2.01	-0.52

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	17.5833	-0.51

**IEEE 802.11n HT 20 MHz mode / Chain 1**
**6dB Bandwidth (CH Low)**


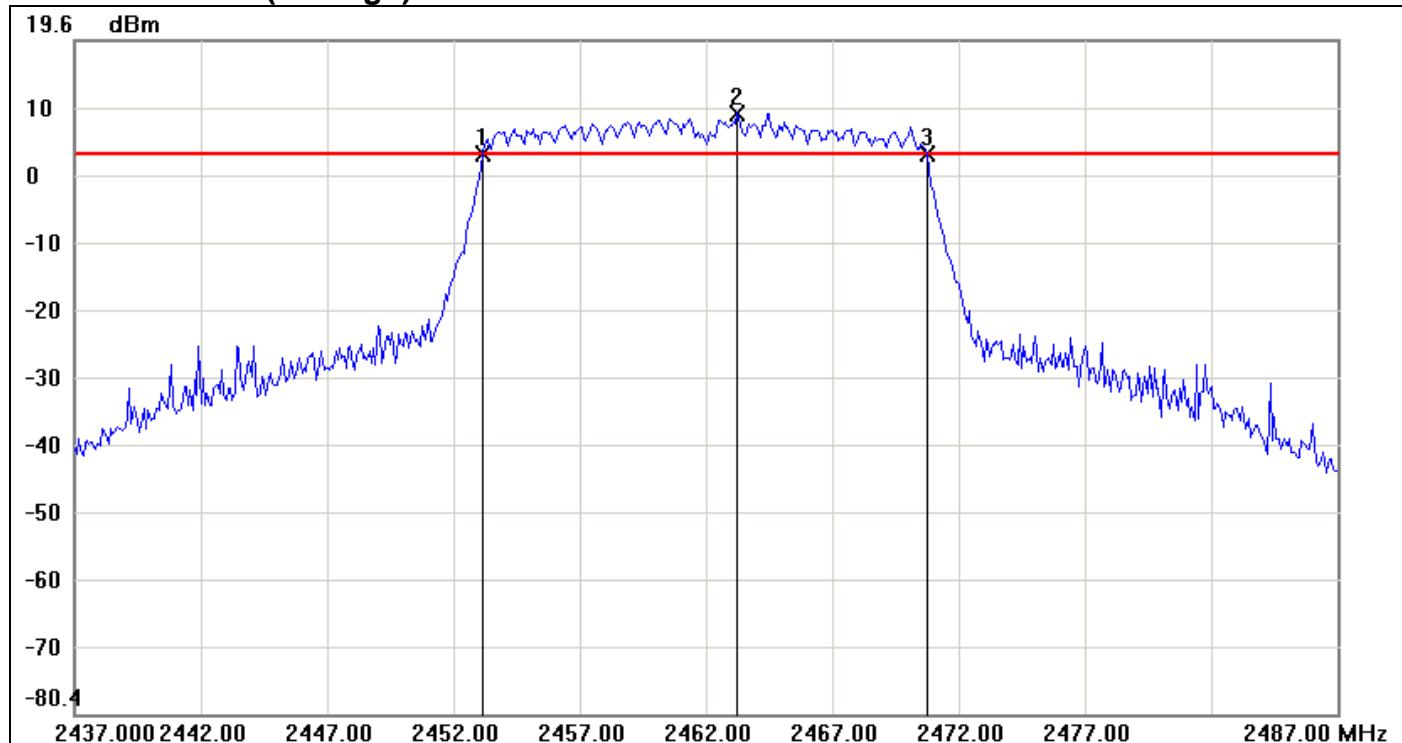
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.1667	4.47	4.50	-0.03
2	2410.7500	10.50	4.50	6.00
3	2420.7500	4.36	4.50	-0.14

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	17.5833	-0.11

**6dB Bandwidth (CH Mid)**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.0833	3.10	3.48	-0.38
2	2438.1667	9.48	3.48	6.00
3	2445.8333	2.20	3.48	-1.28

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	17.75	-0.9

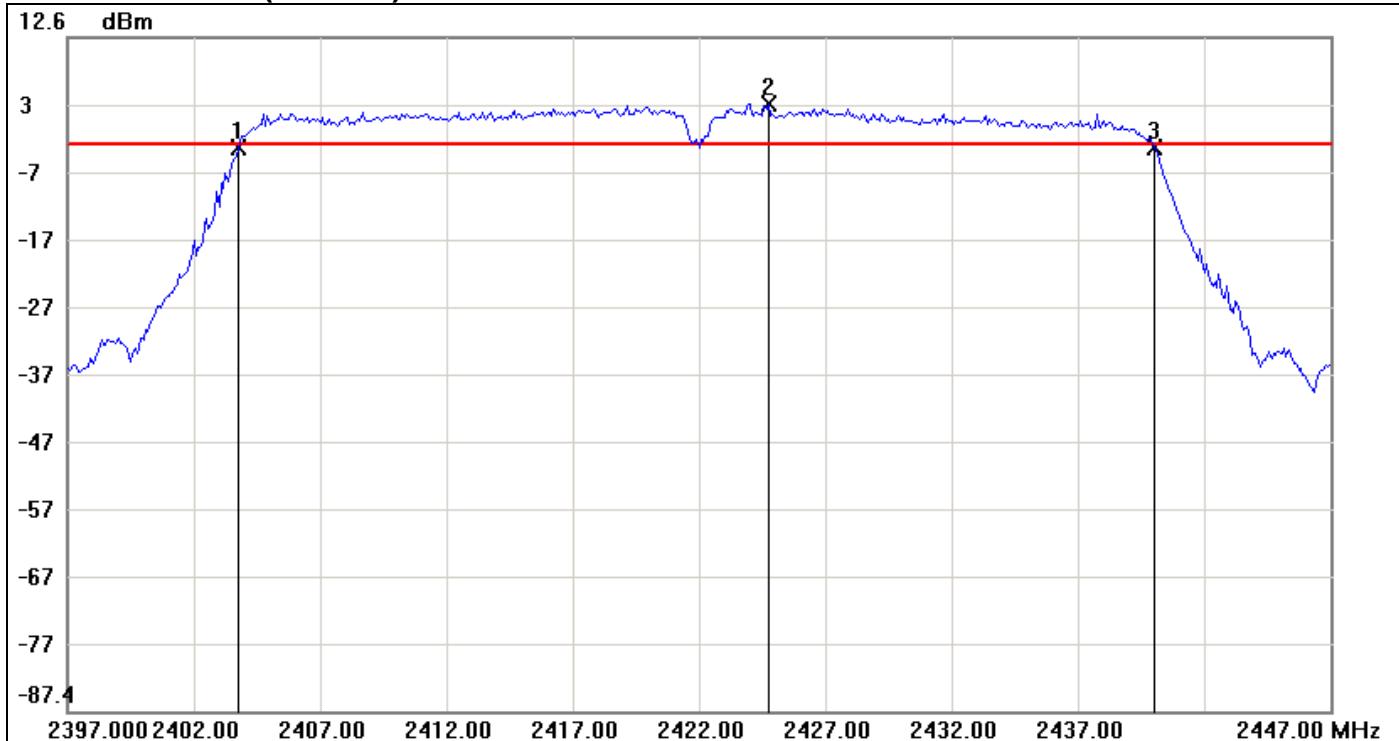
**6dB Bandwidth (CH High)**

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.1667	2.79	2.87	-0.08
2	2463.2500	8.87	2.87	6.00
3	2470.7500	2.73	2.87	-0.14

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	17.5833	-0.06

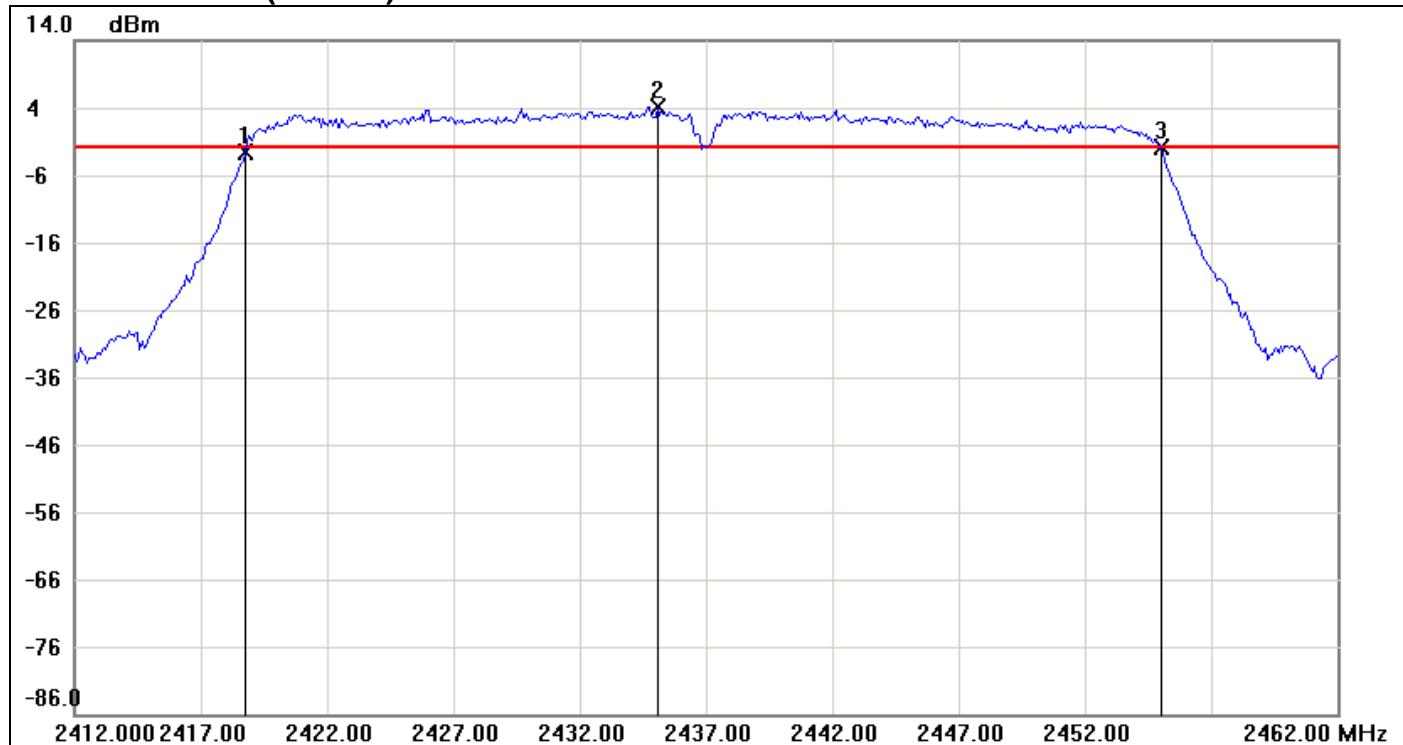
**IEEE 802.11n HT 40 MHz mode / Chain 0**

**6dB Bandwidth (CH Low)**



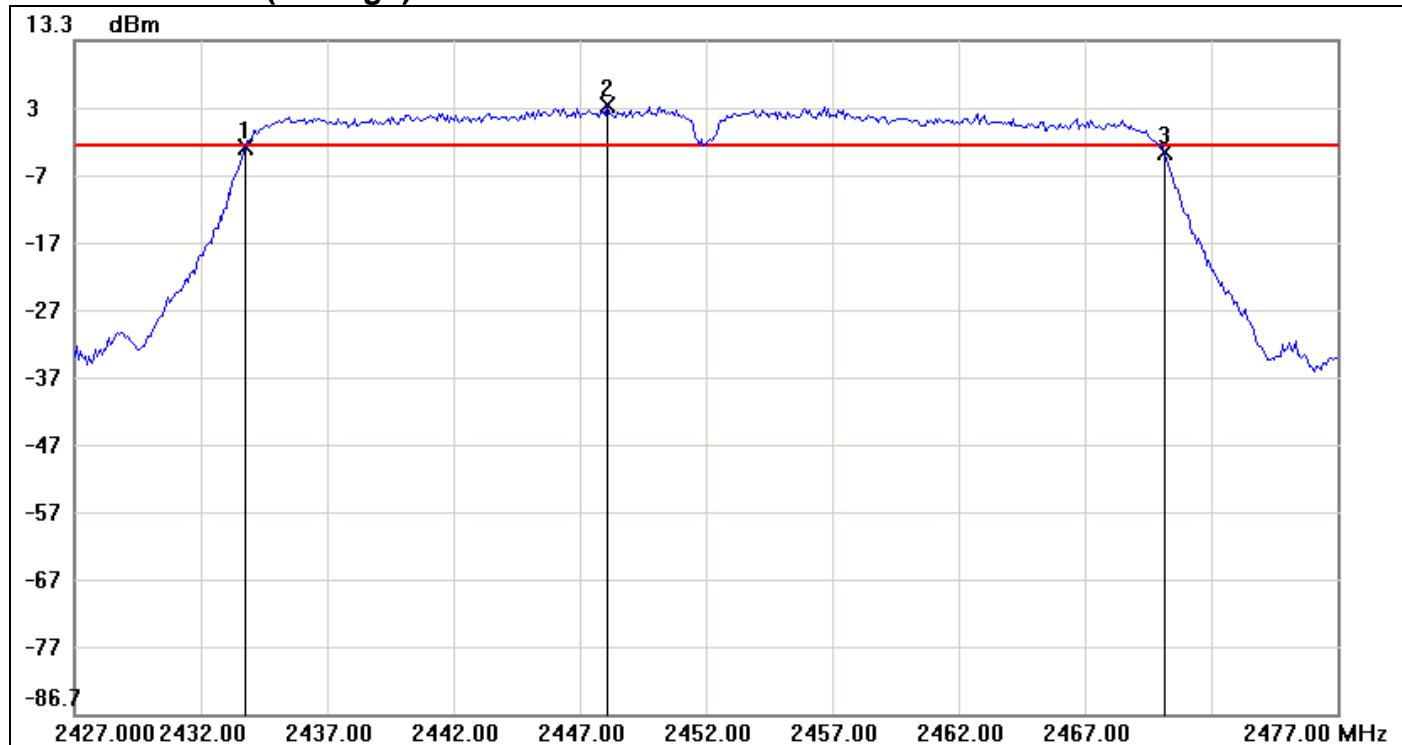
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.7500	-3.85	-3.25	-0.60
2	2424.7500	2.75	-3.25	6.00
3	2440.0000	-3.65	-3.25	-0.40

No.	ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	36.25
		0.2

**6dB Bandwidth (CH Mid)**


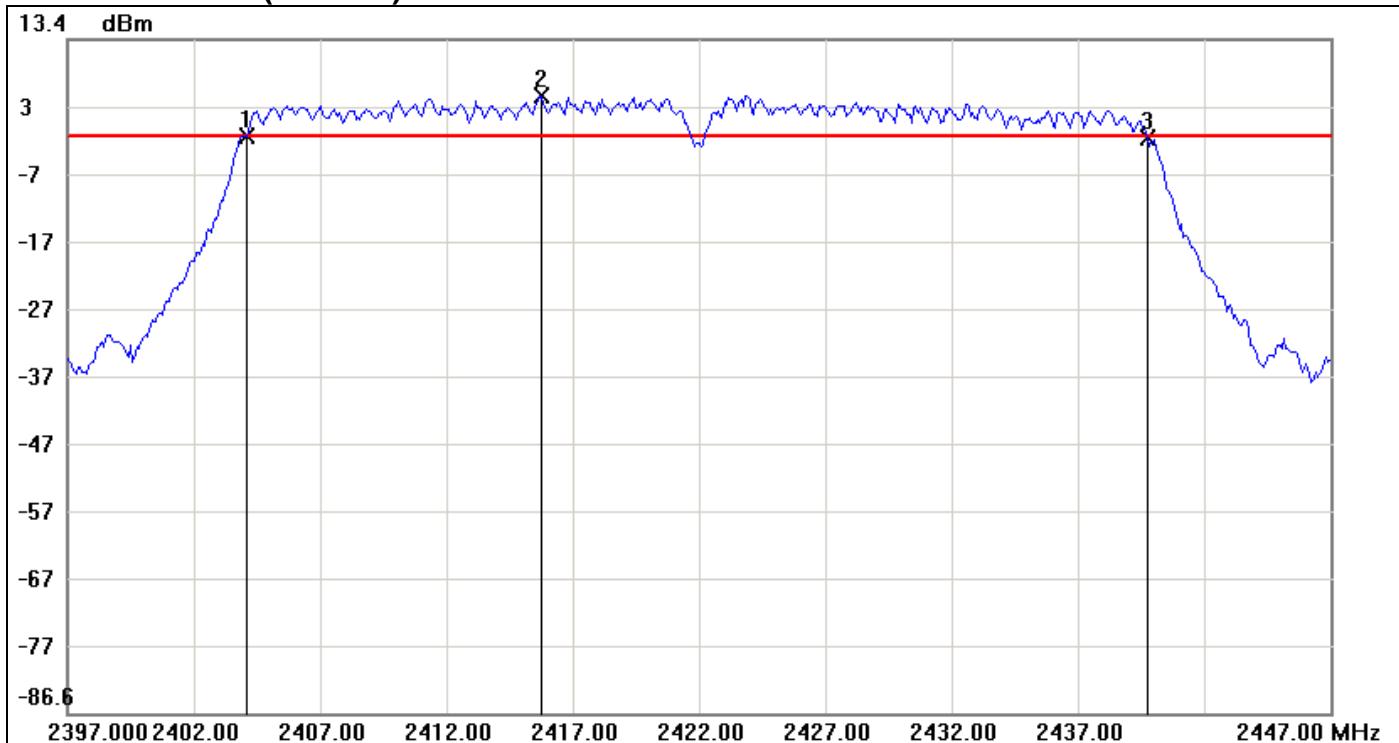
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2418.7500	-2.63	-1.89	-0.74
2	2435.0833	4.11	-1.89	6.00
3	2455.0000	-1.91	-1.89	-0.02

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	36.25	0.72

**6dB Bandwidth (CH High)**


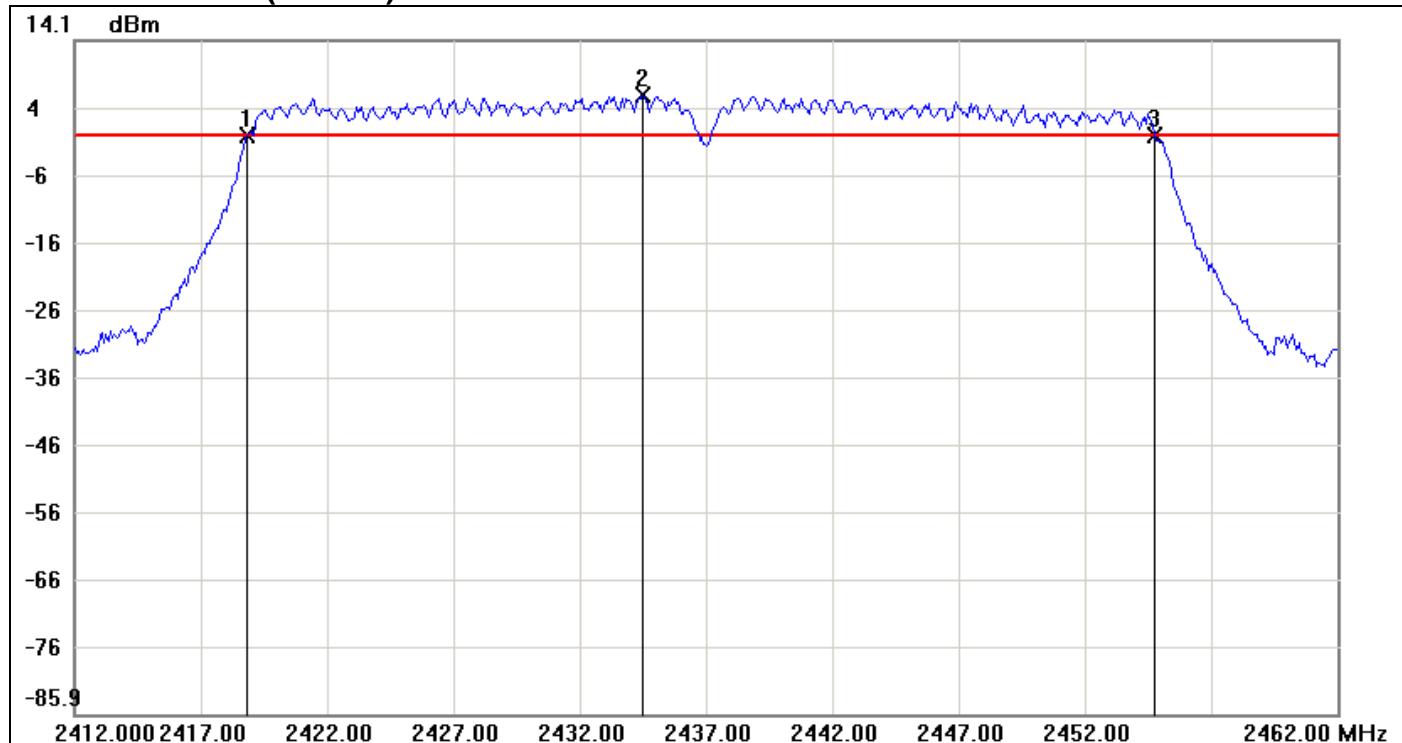
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2433.7500	-2.54	-2.42	-0.12
2	2448.0833	3.58	-2.42	6.00
3	2470.1667	-3.21	-2.42	-0.79

No.	ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	36.4167

**IEEE 802.11n HT 40 MHz mode / Chain 1**
**6dB Bandwidth (CH Low)**


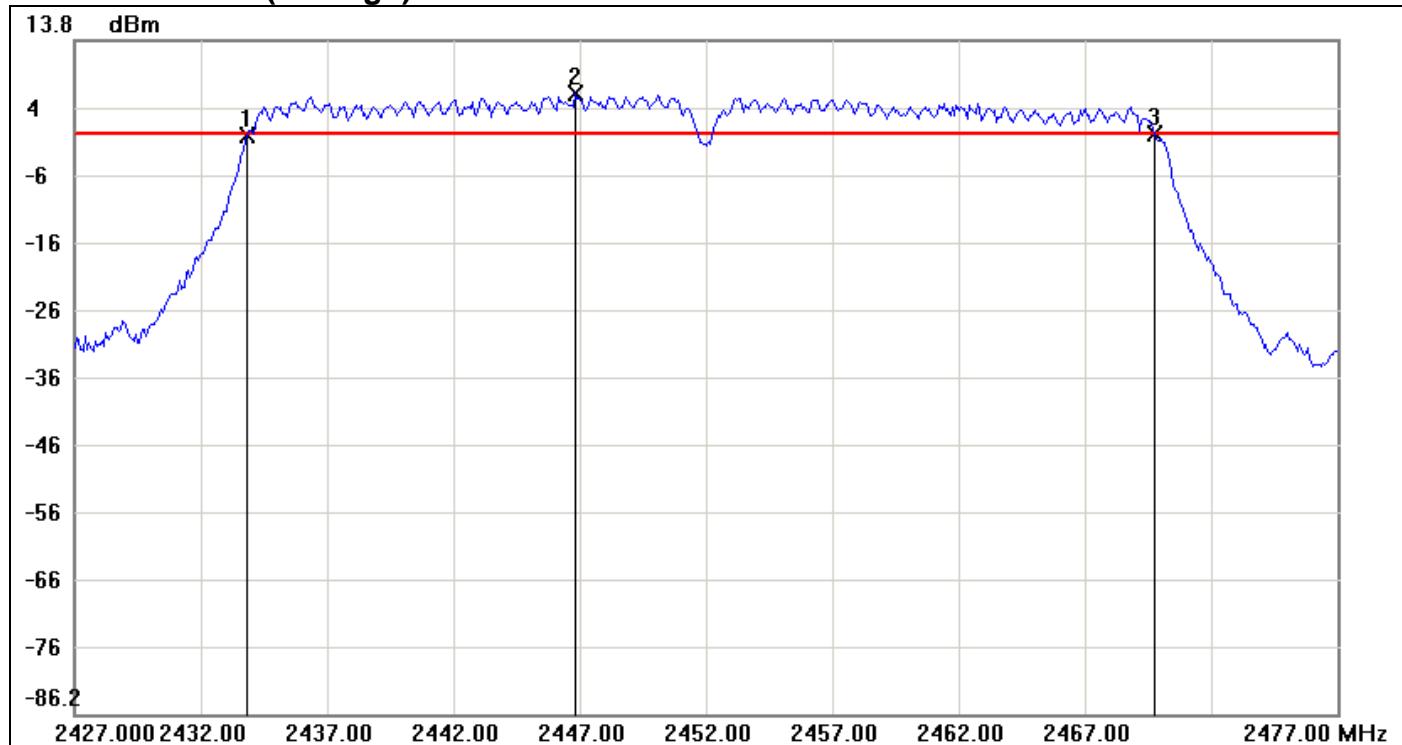
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2404.0833	-1.03	-0.95	-0.08
2	2415.7500	5.05	-0.95	6.00
3	2439.7500	-1.33	-0.95	-0.38

No.	ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	35.6667

**6dB Bandwidth (CH Mid)**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2418.8333	-0.10	0.01	-0.11
2	2434.5000	6.01	0.01	6.00
3	2454.7500	-0.10	0.01	-0.11

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	35.9167	0

**6dB Bandwidth (CH High)**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2433.8333	-0.33	-0.08	-0.25
2	2446.8333	5.92	-0.08	6.00
3	2469.7500	-0.13	-0.08	-0.05

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	35.9167	0.2


## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

## Test Data

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	22.55	0.1799	30	PASS
Mid	2437	<b>*24.86</b>	0.3062		PASS
High	2462	24.54	0.2844		PASS

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	23.31	0.2143	30	PASS
Mid	2437	<b>*23.76</b>	0.2377		PASS
High	2462	23.22	0.2099		PASS

### Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	25.03	24.16	27.63	0.5794	30	PASS
Mid	2437	25.16	24.33	<b>*27.78</b>	0.5998		PASS
High	2462	24.44	23.37	26.95	0.4955		PASS

### Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	19.94	20.21	23.09	0.2037	30	PASS
Mid	2437	22.04	22.55	<b>*25.31</b>	0.3396		PASS
High	2452	21.04	21.25	24.16	0.2606		PASS

#### **Remark:**


1. Total Output Power (w) = Chain 0 ( $10^{(Output\ Power/10)/1000}$ ) + Chain 1 ( $10^{(Output\ Power/10)/1000}$ )

## 7.3 AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the avg power detection.

### TEST RESULTS

*No non-compliance noted.*

## Test Data

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	19.35	0.0861
Mid	2437	22.10	0.1622
High	2462	21.59	0.1442

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	14.16	0.0261
Mid	2437	14.95	0.0313
High	2462	14.32	0.0270

### Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2412	16.37	16.02	19.21	0.0834
Mid	2437	16.17	15.81	19.00	0.0794
High	2462	15.08	14.70	17.90	0.0617

### Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2422	10.42	10.56	13.50	0.0224
Mid	2437	11.88	12.02	14.96	0.0313
High	2452	11.47	11.22	14.36	0.0273

**Remark:** Total Output Power (w) = Chain 0 ( $10^{(Output\ Power\ /10)/1000}$ ) + Chain 1 ( $10^{(Output\ Power\ /10)/1000}$ )

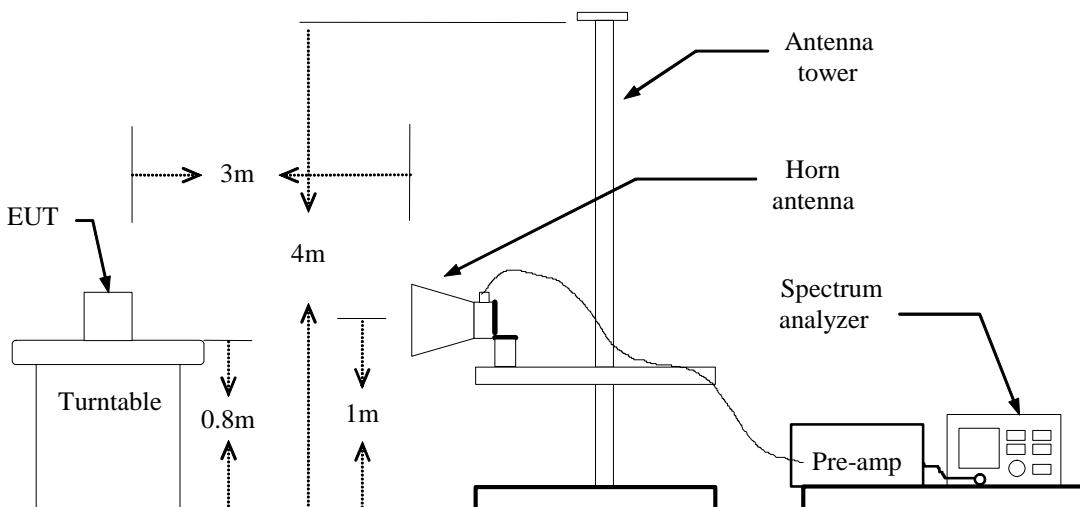
## 7.4 BAND EDGES MEASUREMENT

### LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

#### For Radiated



#### For Conducted



## **TEST PROCEDURE**

### **For Radiated**

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=3MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz,  
if duty cycle  $\geq 98\%$ , VBW=10Hz.  
if duty cycle  $< 98\%$  VBW=1/T.  
**IEEE 802.11b mode:**  $\geq 98\%$ , VBW=10Hz  
**IEEE 802.11g mode:**  $\geq 98\%$ , VBW=10Hz  
**IEEE 802.11n HT 20 MHz mode:**  $\geq 98\%$ , VBW=10Hz  
**IEEE 802.11n HT 40 MHz mode:**  $\geq 98\% = \text{VBW } 10\text{Hz}$
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

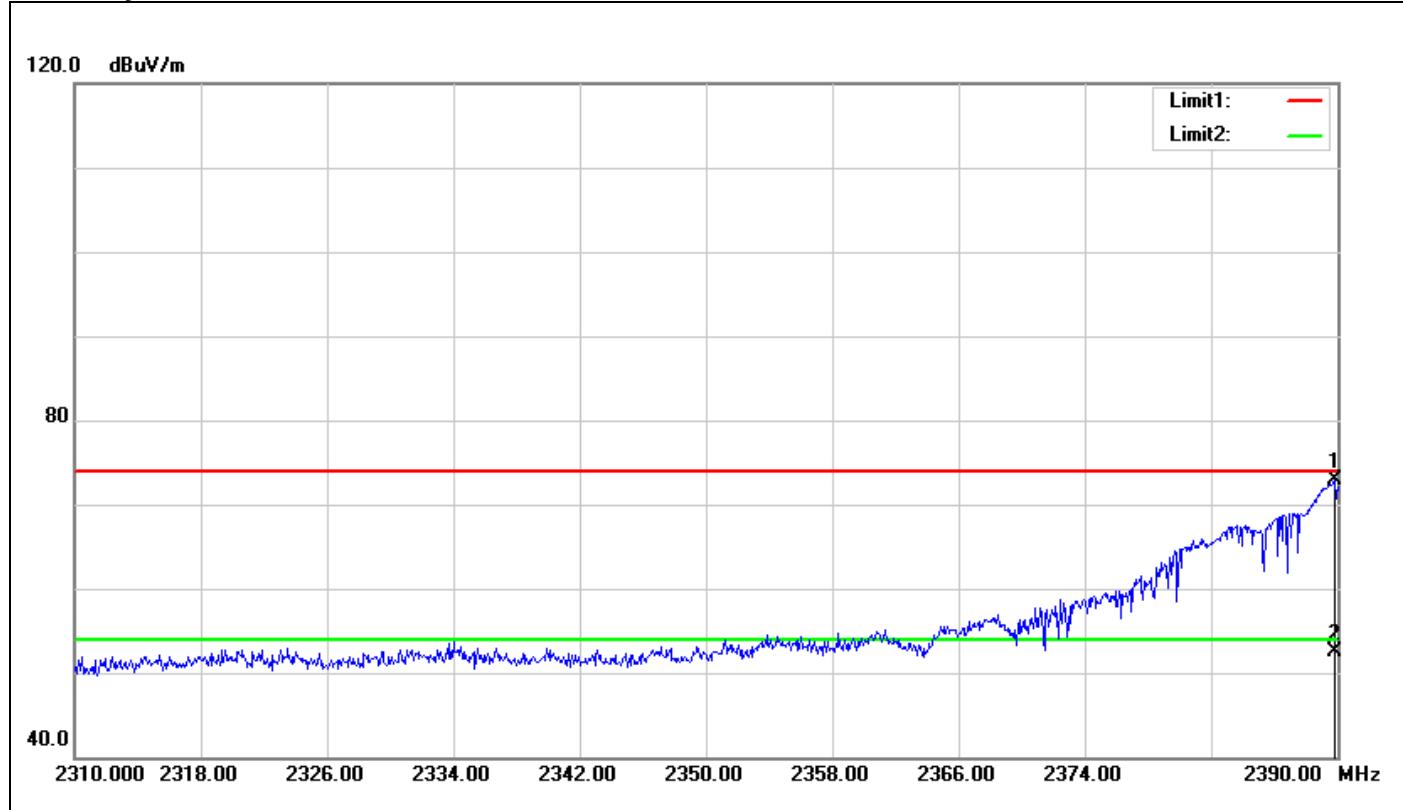
### **For Conducted**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

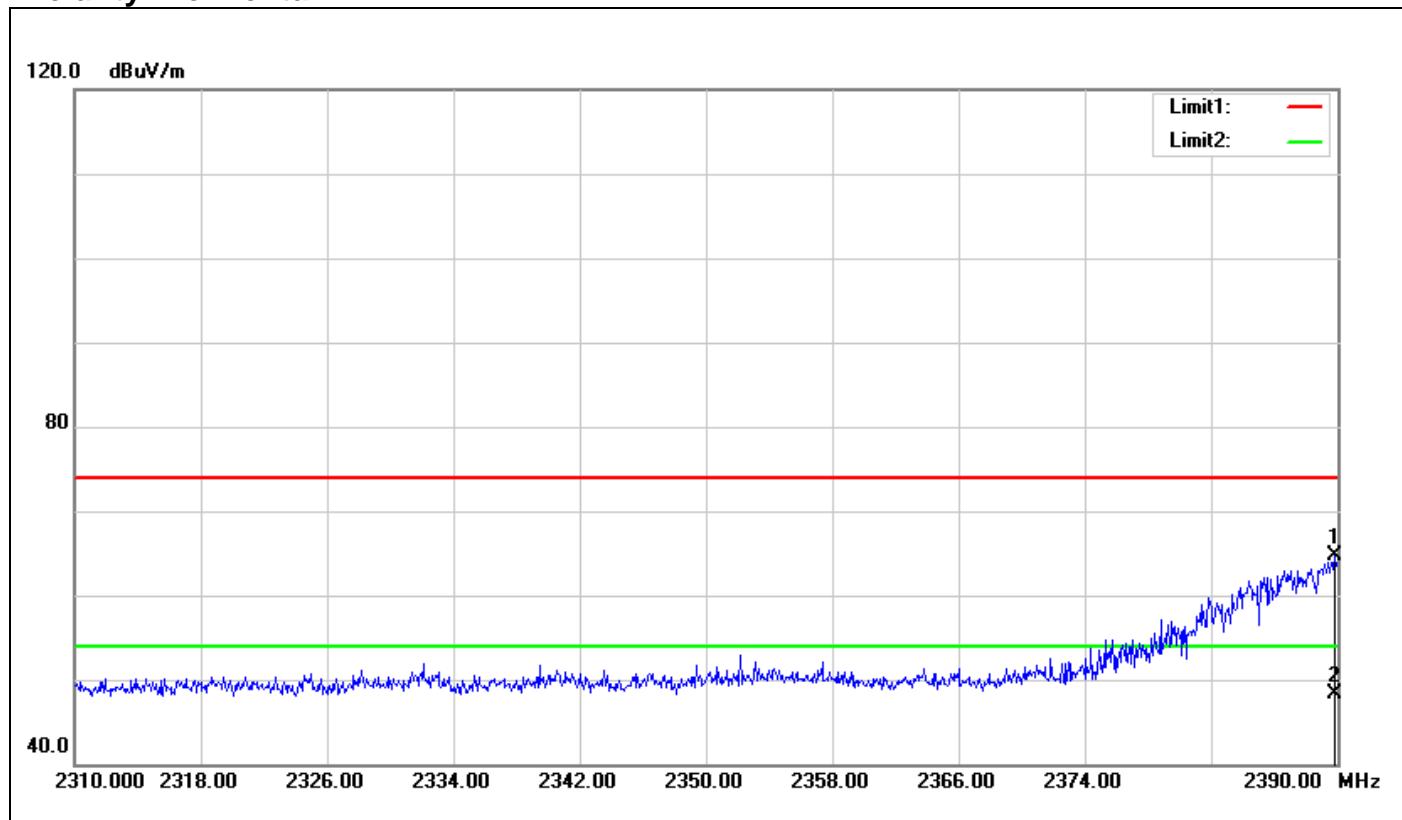
The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

## **TEST RESULTS**

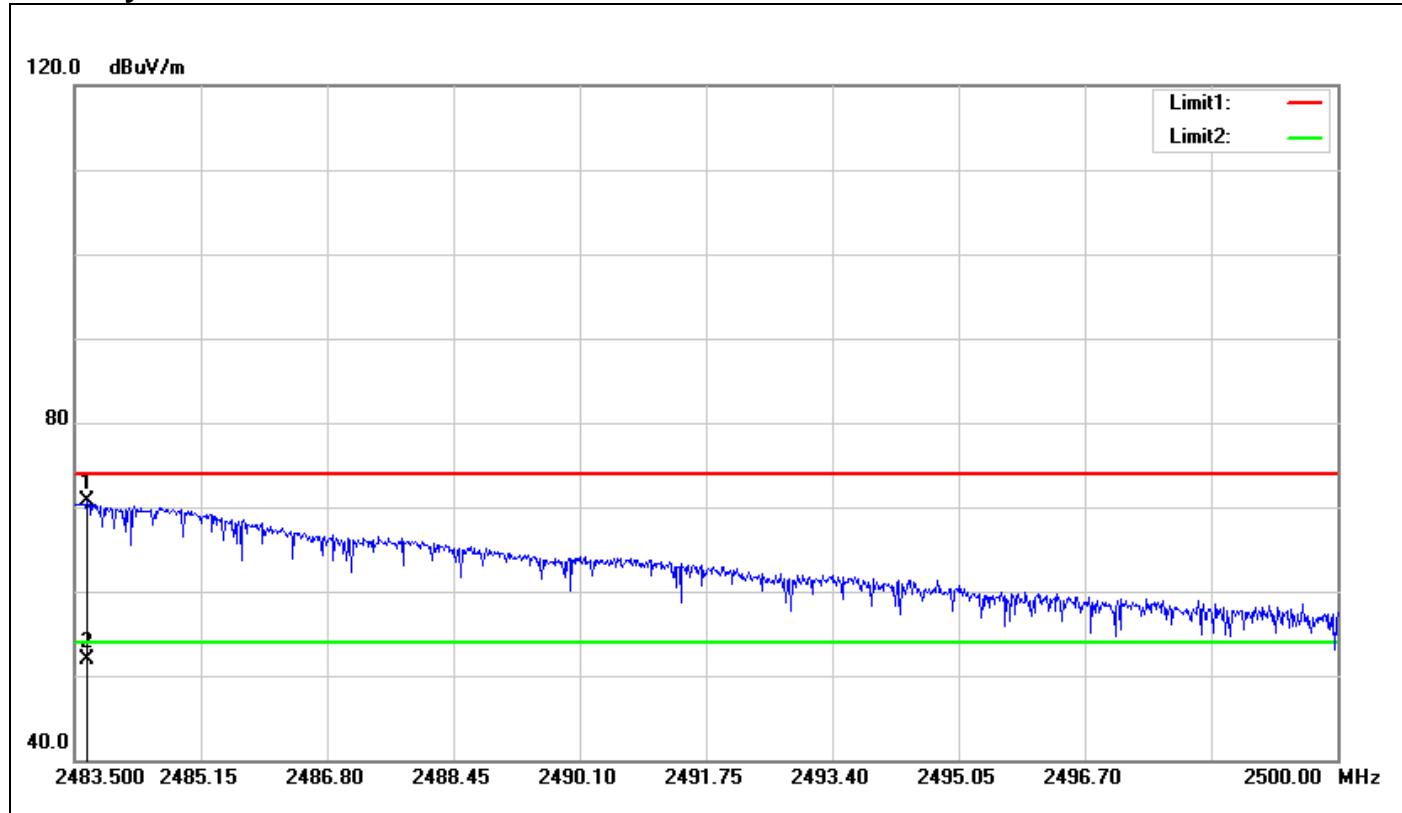
Refer to attach spectrum analyzer data chart.

**For printed Antenna**
**Band Edges (IEEE 802.11b mode / CH Low)**
**Polarity: Vertical**


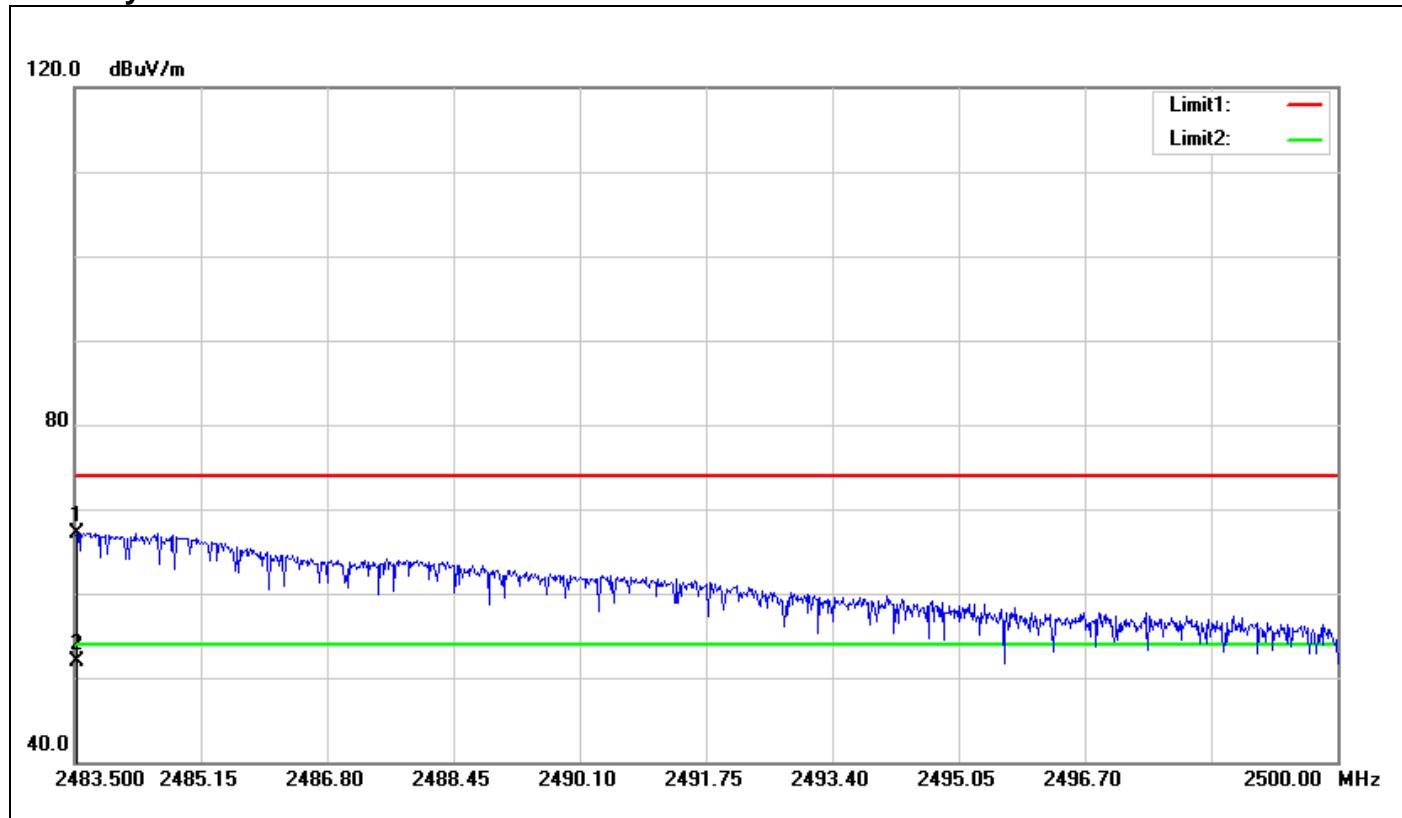
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.840	76.61	-3.77	72.84	74.00	-1.16	100	97	peak
2	2389.840	56.23	-3.77	52.46	54.00	-1.54	100	97	AVG

**Polarity: Horizontal**


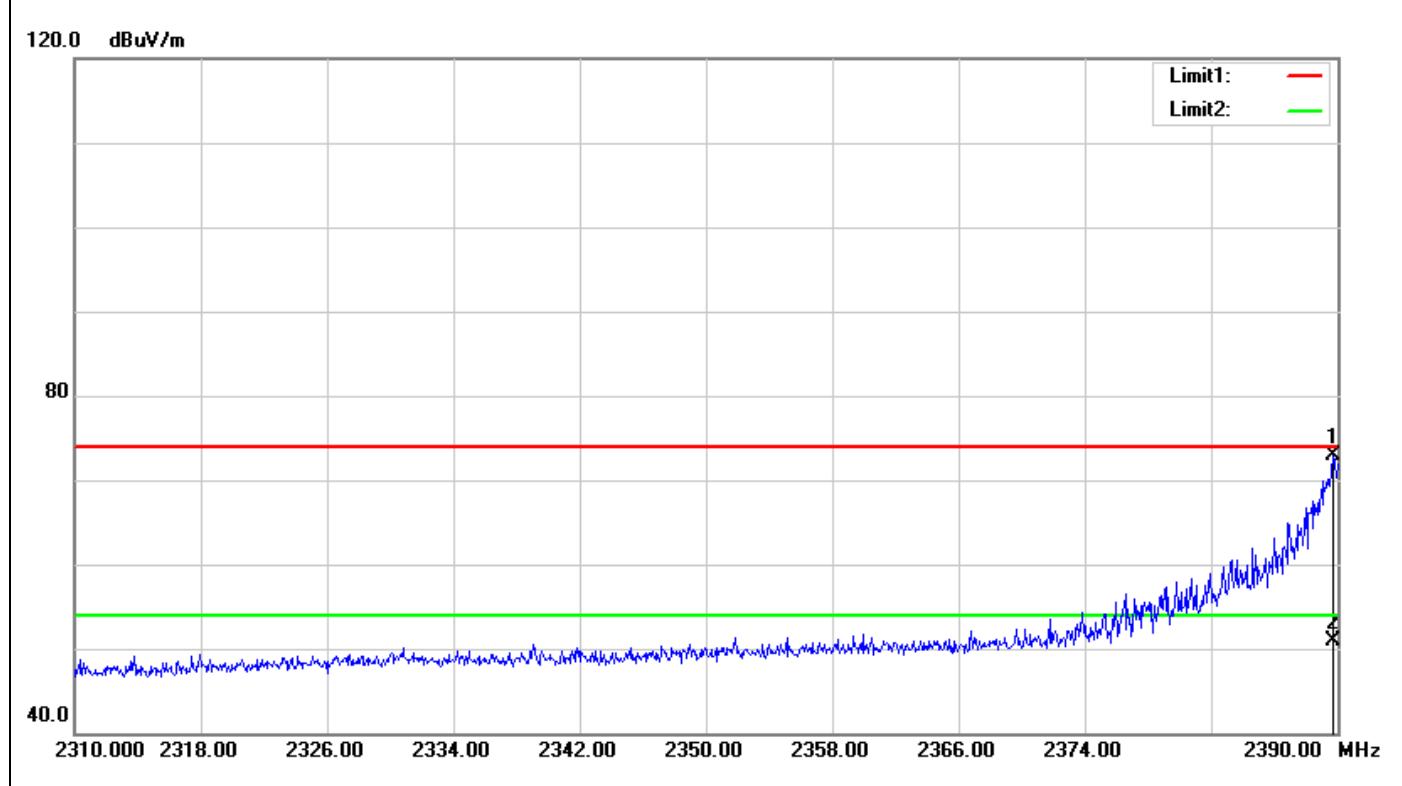
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.840	68.42	-3.77	64.65	74.00	-9.35	100	340	peak
2	2389.840	52.15	-3.77	48.38	54.00	-5.62	100	340	AVG

**Band Edges (IEEE 802.11b mode / CH High)**
**Polarity: Vertical**


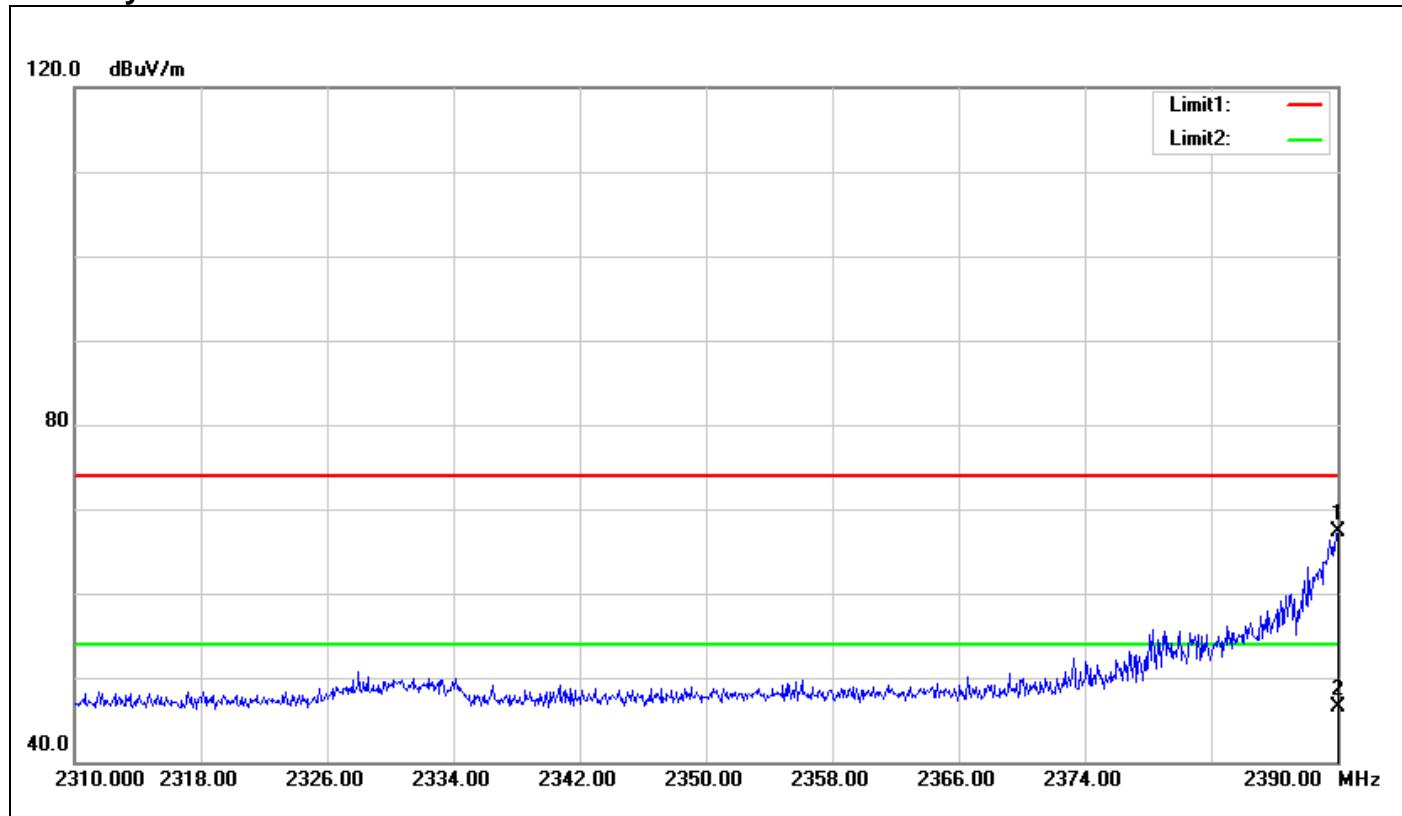
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.665	73.91	-3.27	70.64	74.00	-3.36	100	218	peak
2	2483.665	55.17	-3.27	51.90	54.00	-2.10	100	218	AVG

**Polarity: Horizontal**


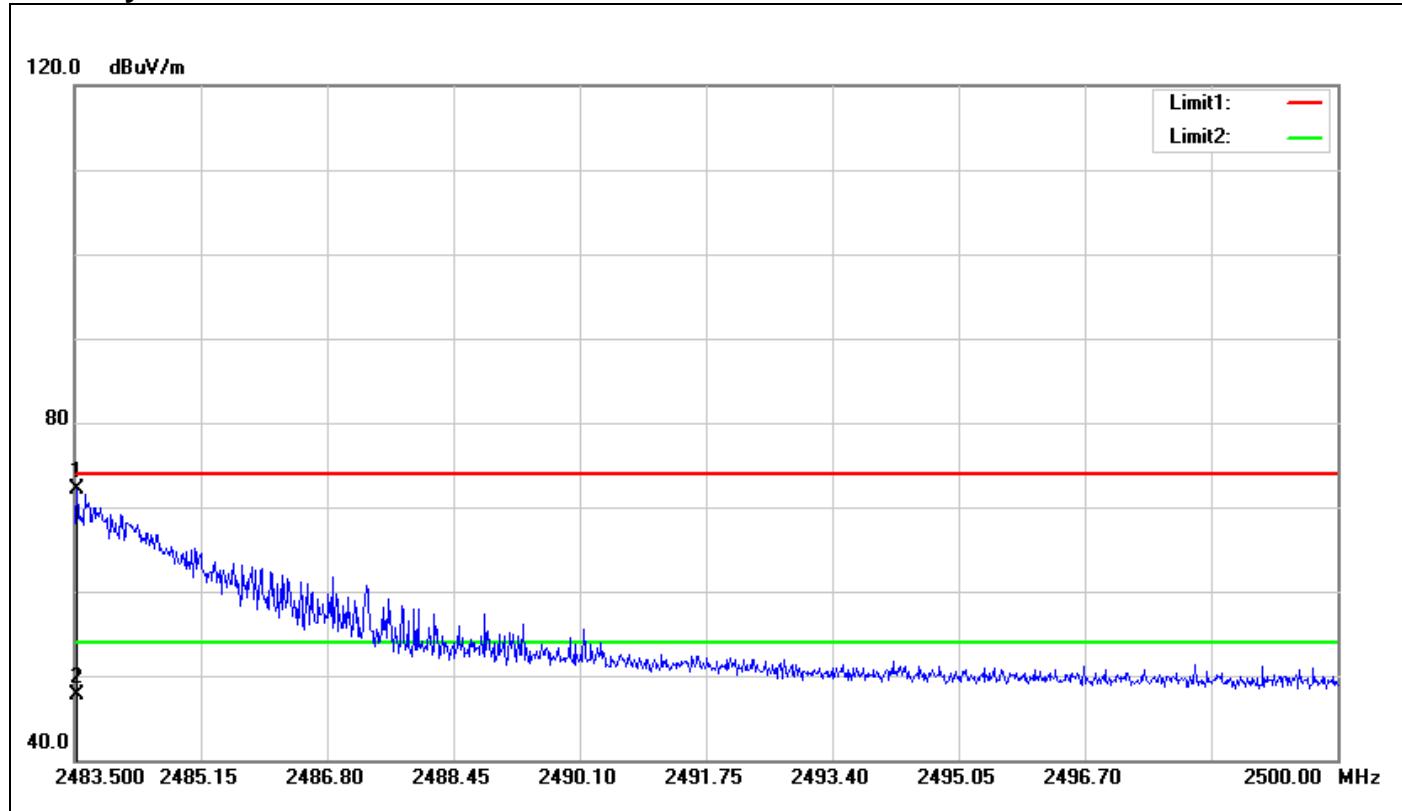
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.533	70.43	-3.27	67.16	74.00	-6.84	100	34	peak
2	2483.533	55.08	-3.27	51.81	54.00	-2.19	100	34	Avg

**Band Edges (IEEE 802.11g mode / CH Low)**
**Polarity: Vertical**


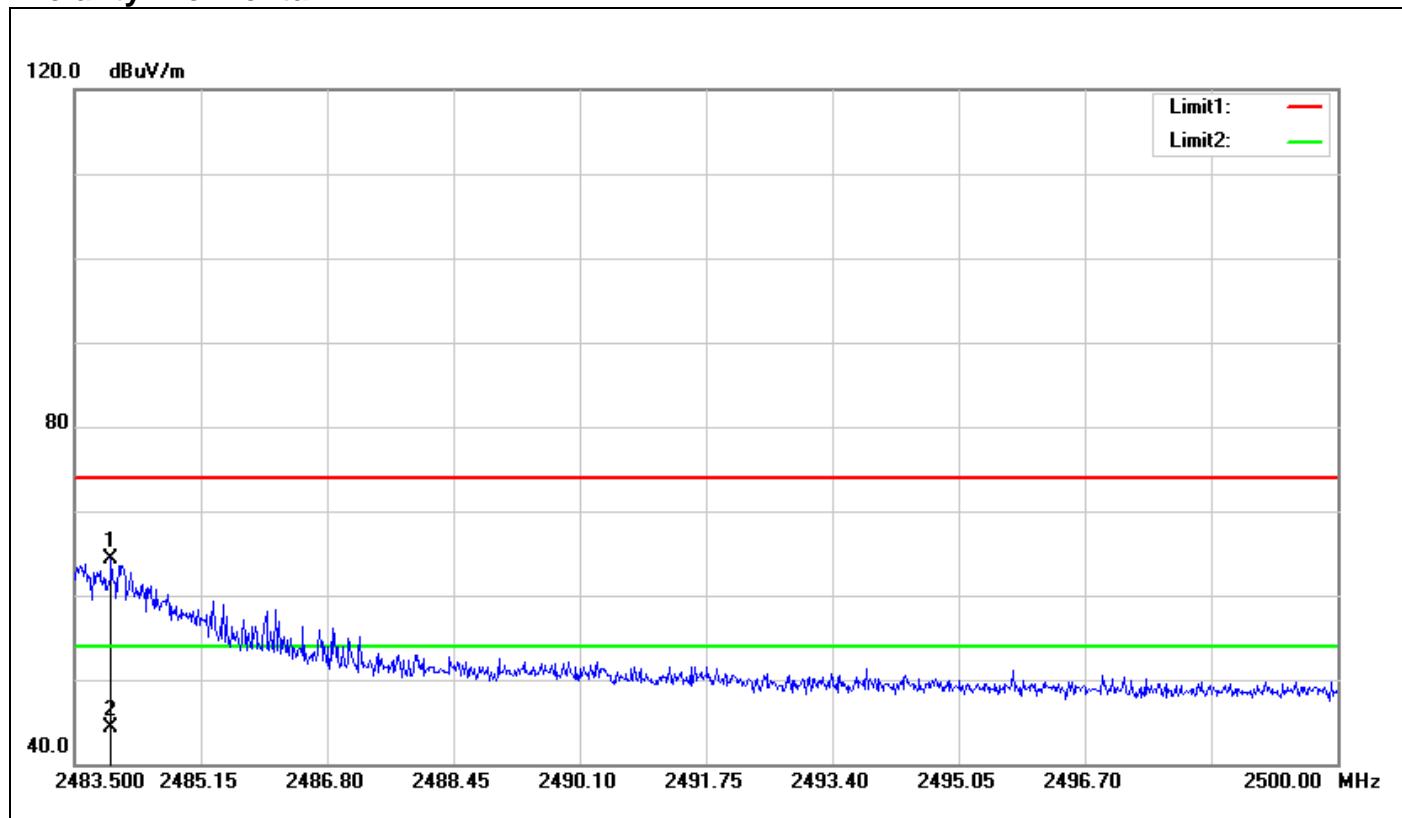
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.760	76.68	-3.77	72.91	74.00	-1.09	100	244	peak
2	2389.760	54.60	-3.77	50.83	54.00	-3.17	100	244	AVG

**Polarity: Horizontal**


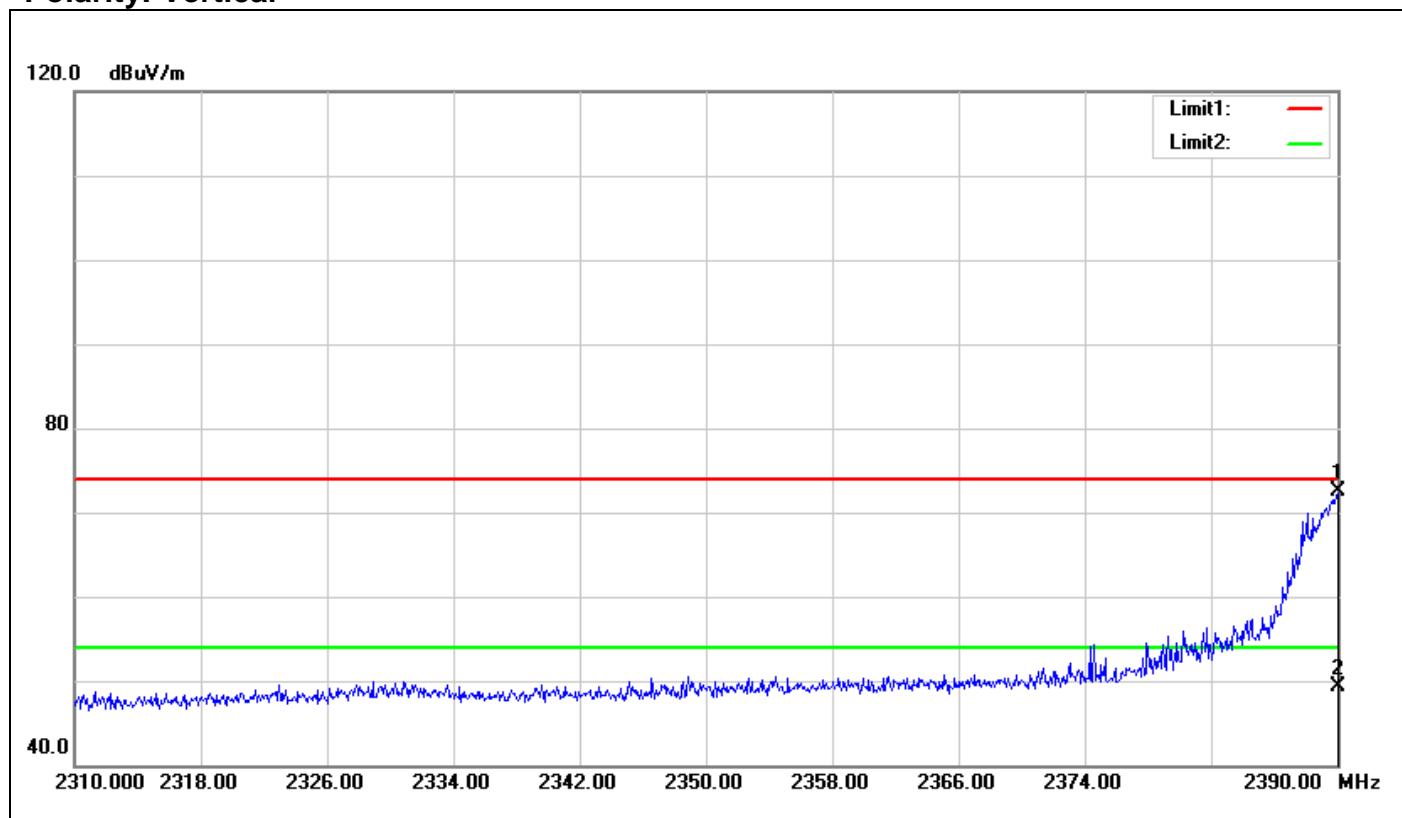
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2390.000	71.13	-3.77	67.36	74.00	-6.64	100	189	peak
2	2390.000	50.18	-3.77	46.41	54.00	-7.59	100	189	Avg

**Band Edges (IEEE 802.11g mode / CH High)**
**Polarity: Vertical**


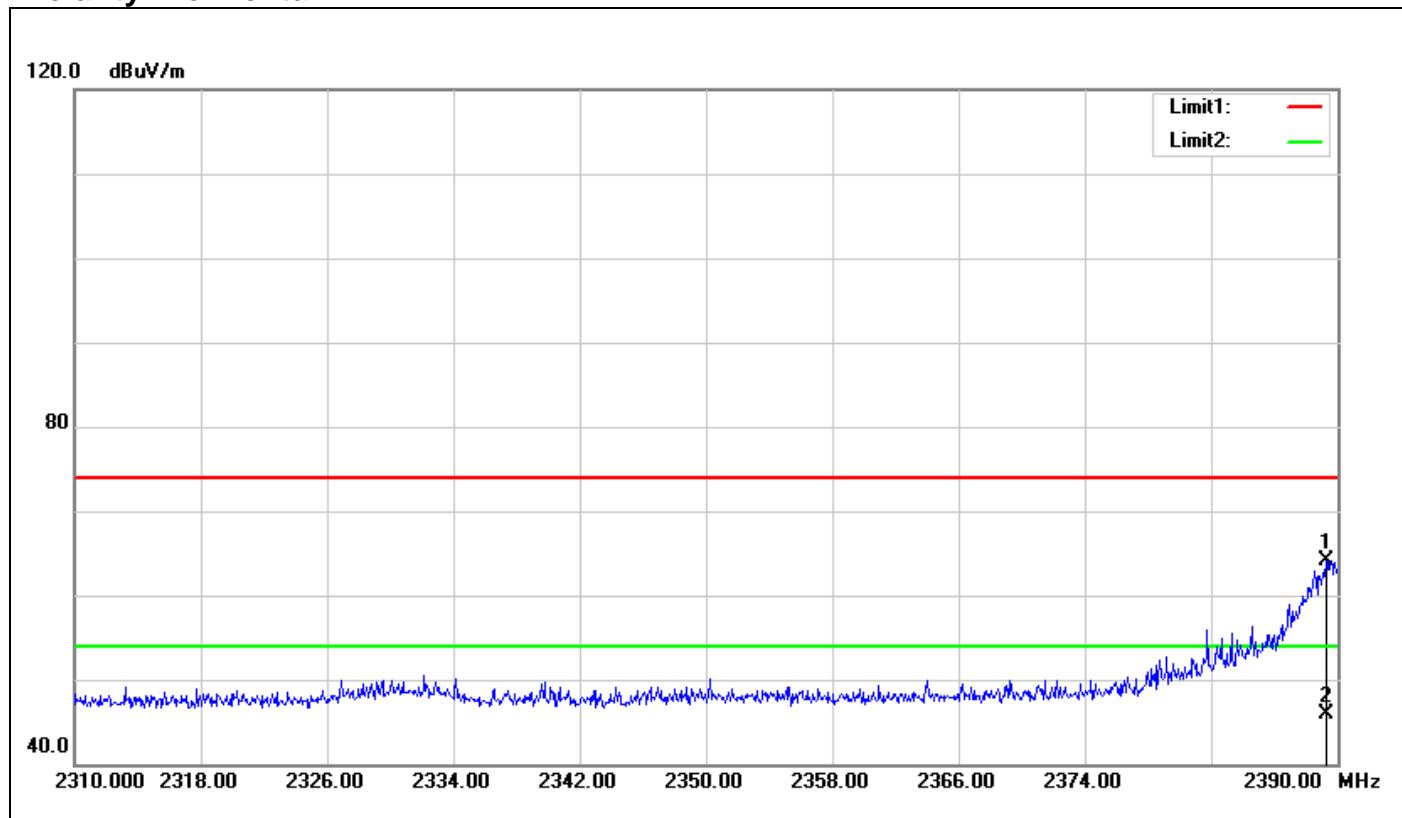
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.533	75.30	-3.27	72.03	74.00	-1.97	100	277	peak
2	2483.533	50.89	-3.27	47.62	54.00	-6.38	100	277	AVG

**Polarity: Horizontal**


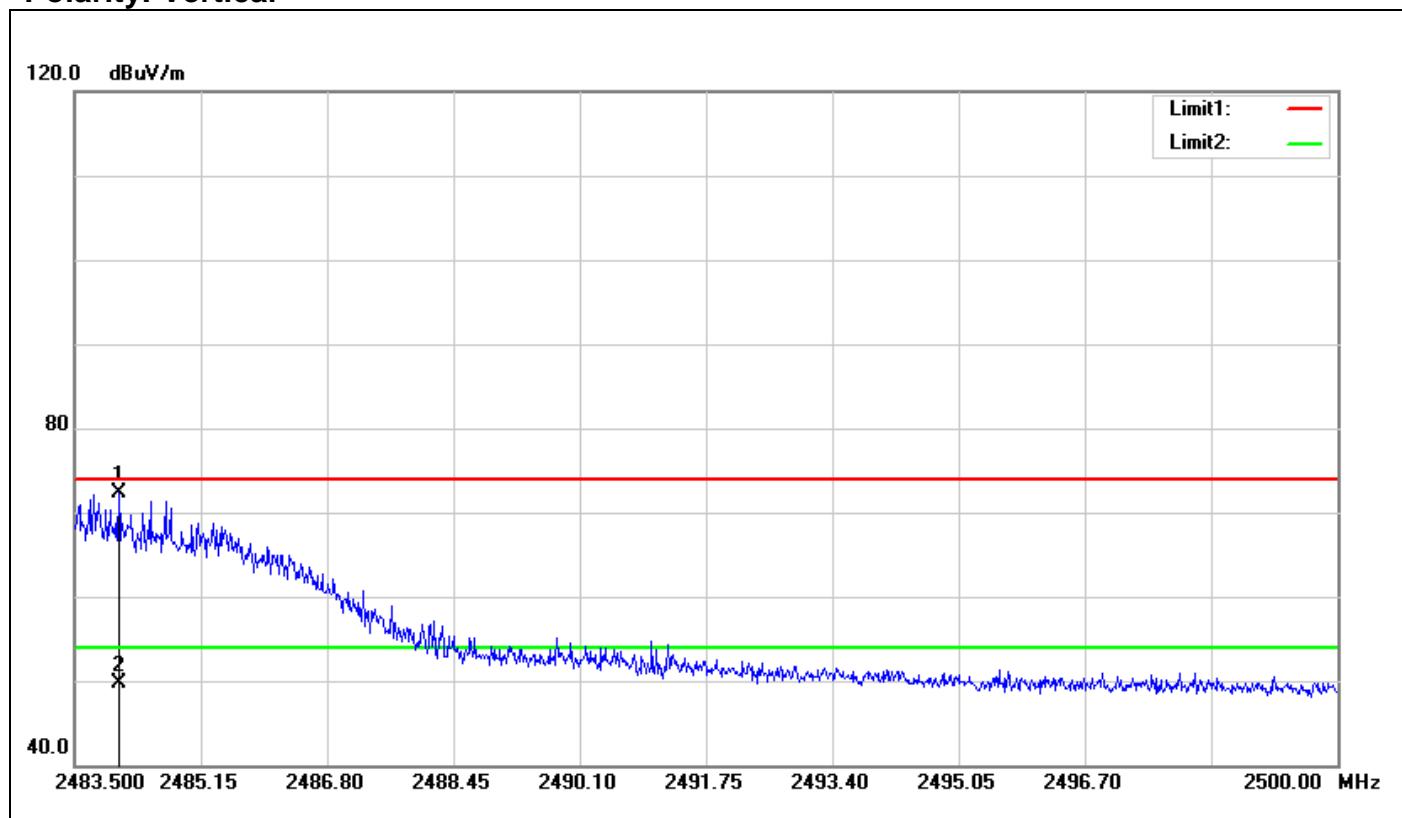
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.979	67.64	-3.27	64.37	74.00	-9.63	100	42	peak
2	2483.979	47.55	-3.27	44.28	54.00	-9.72	100	42	AVG

**Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)**
**Polarity: Vertical**


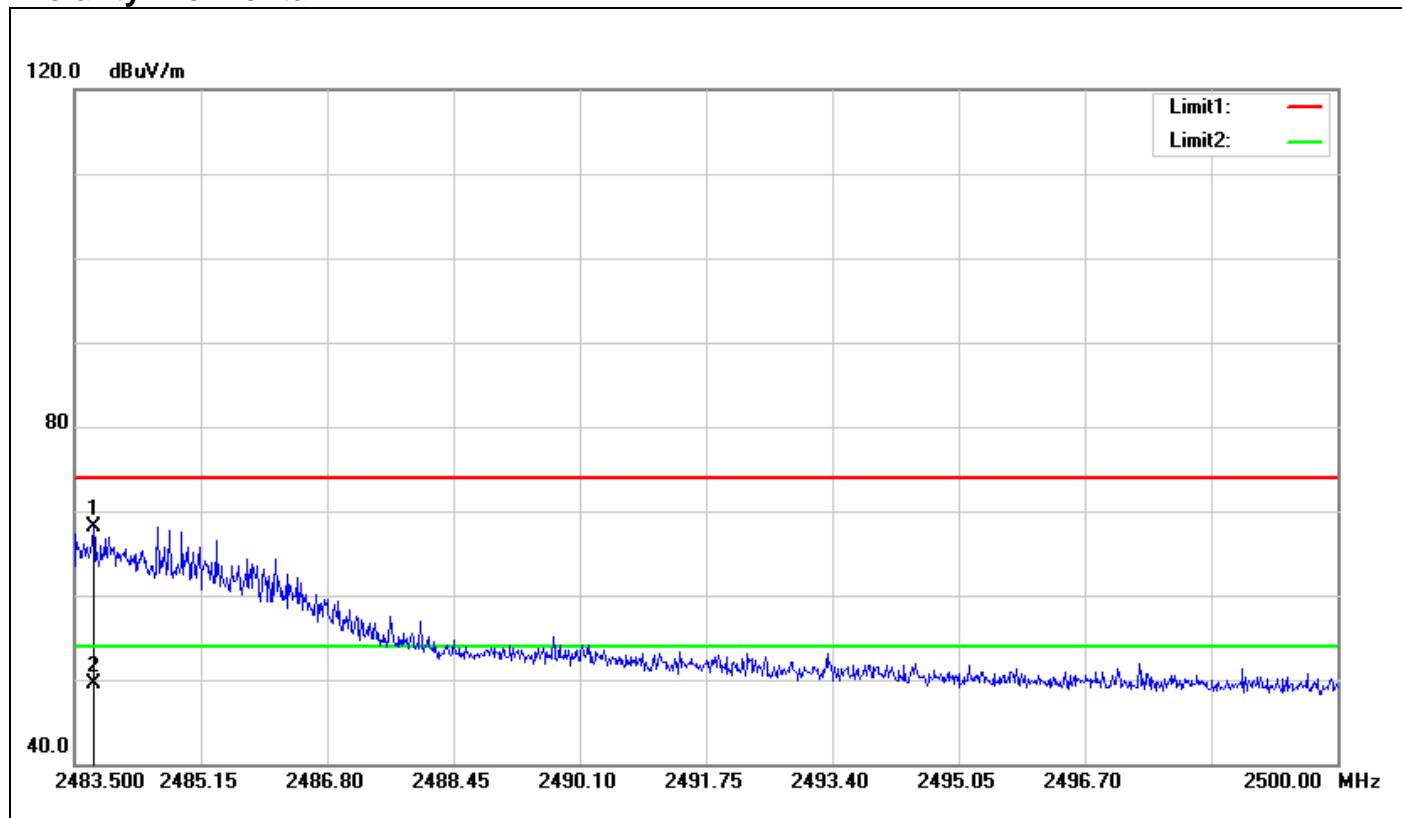
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2390.000	76.32	-3.77	72.55	74.00	-1.45	100	209	peak
2	2390.000	53.10	-3.77	49.33	54.00	-4.67	100	209	AVG

**Polarity: Horizontal**


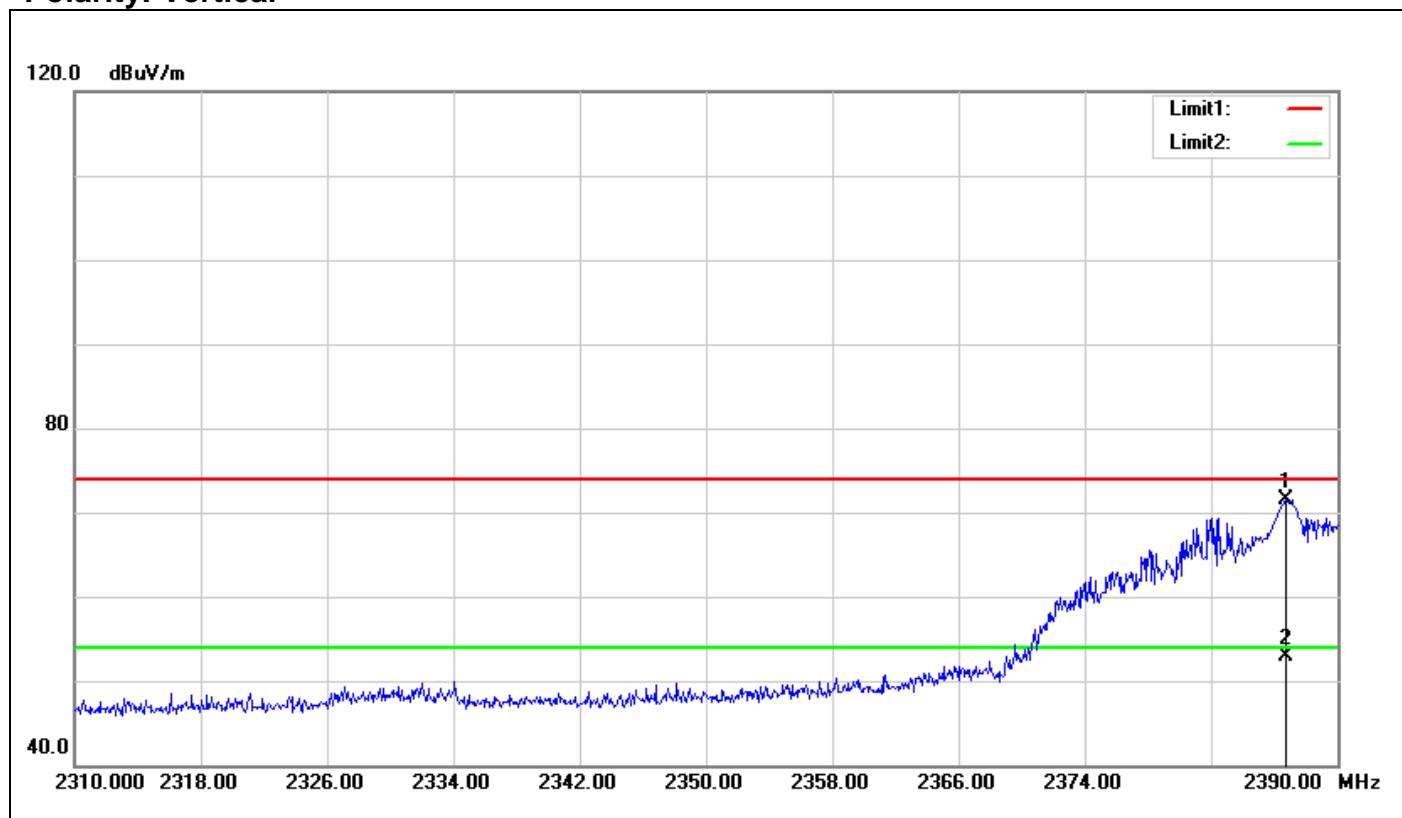
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.280	67.97	-3.78	64.19	74.00	-9.81	100	306	peak
2	2389.280	49.65	-3.78	45.87	54.00	-8.13	100	306	Avg

**Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)**
**Polarity: Vertical**


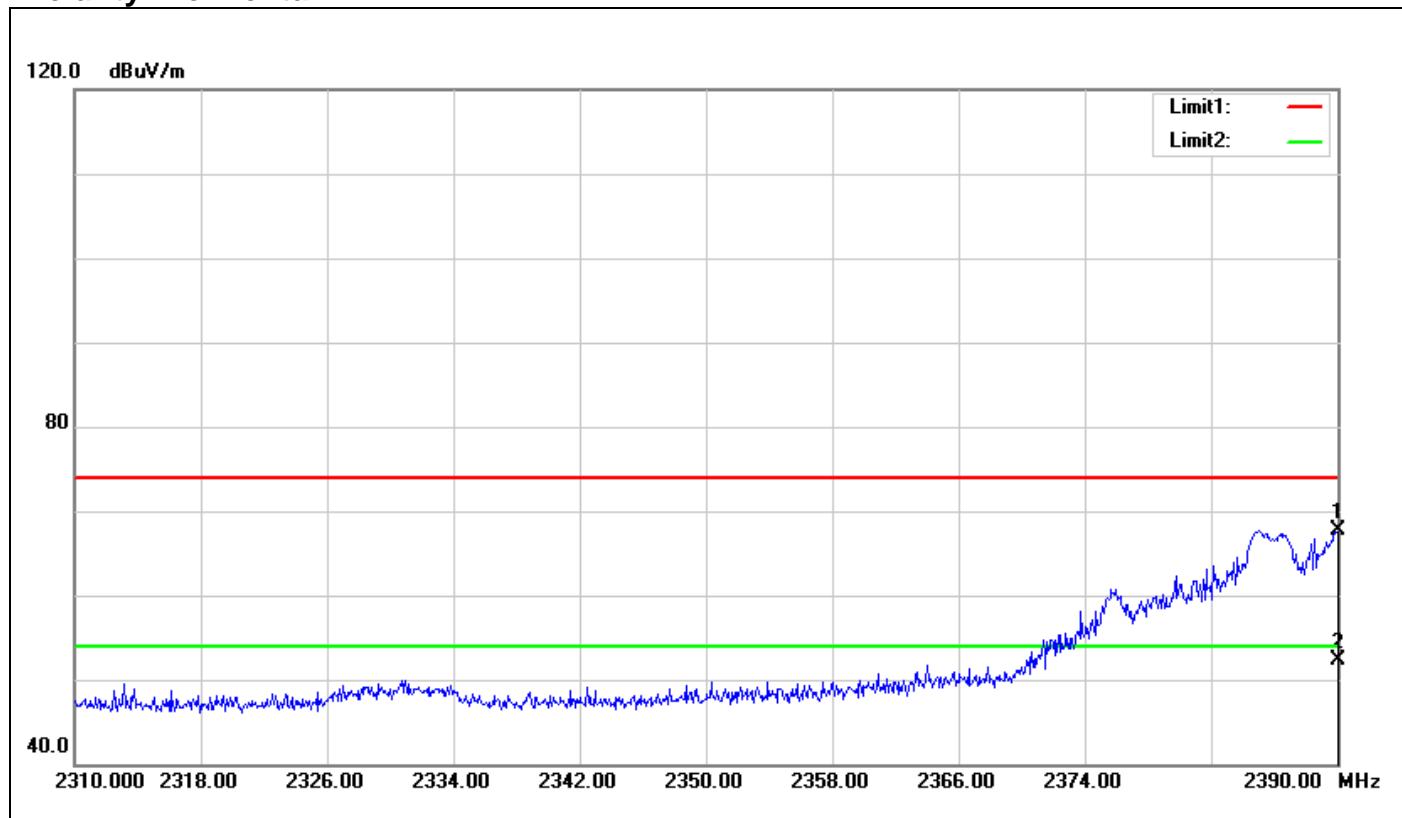
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2484.077	75.57	-3.27	72.30	74.00	-1.70	100	247	peak
2	2484.077	52.93	-3.27	49.66	54.00	-4.34	100	247	AVG

**Polarity: Horizontal**


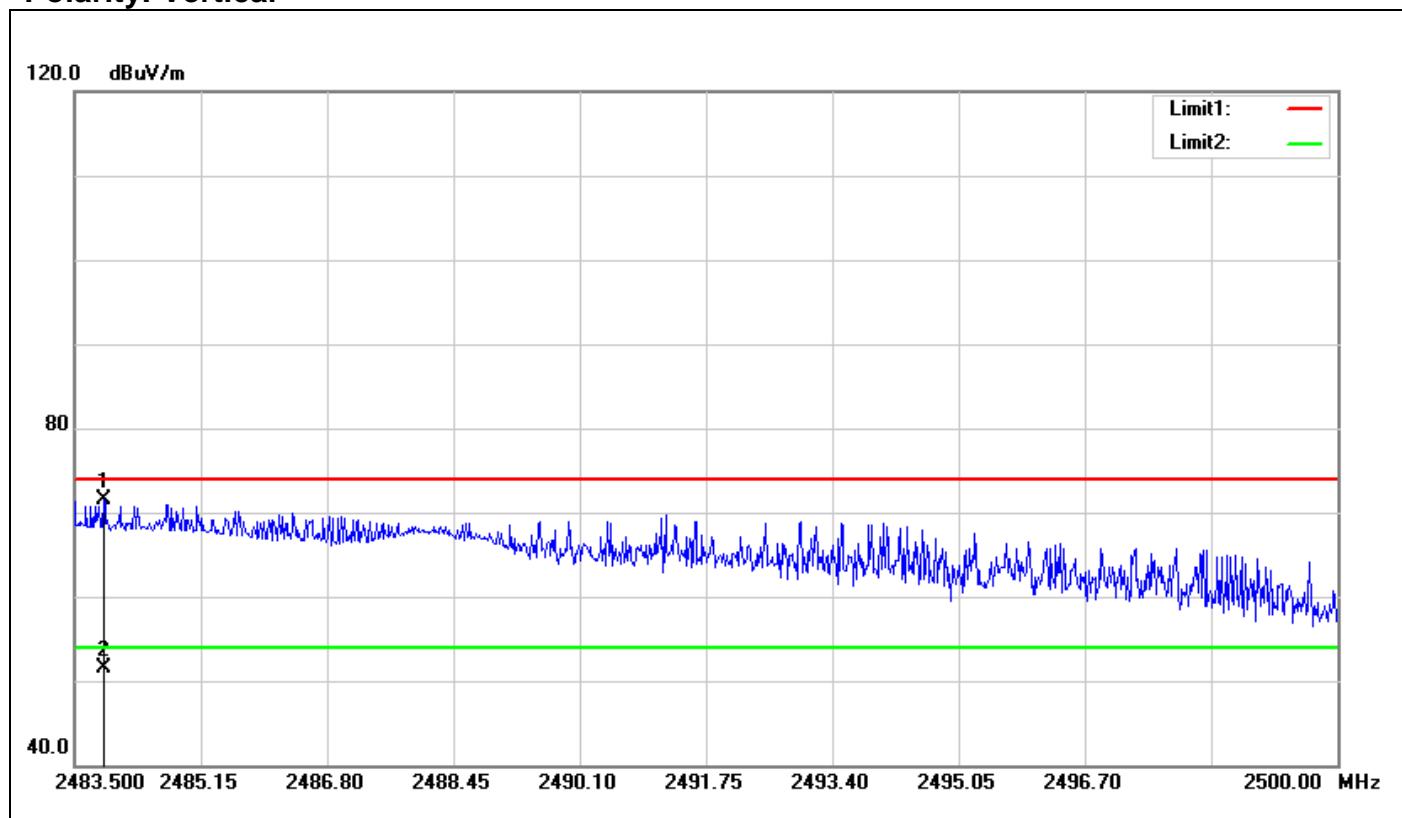
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.747	71.32	-3.27	68.05	74.00	-5.95	100	57	peak
2	2483.747	52.82	-3.27	49.55	54.00	-4.45	100	57	AVG

**Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)**
**Polarity: Vertical**


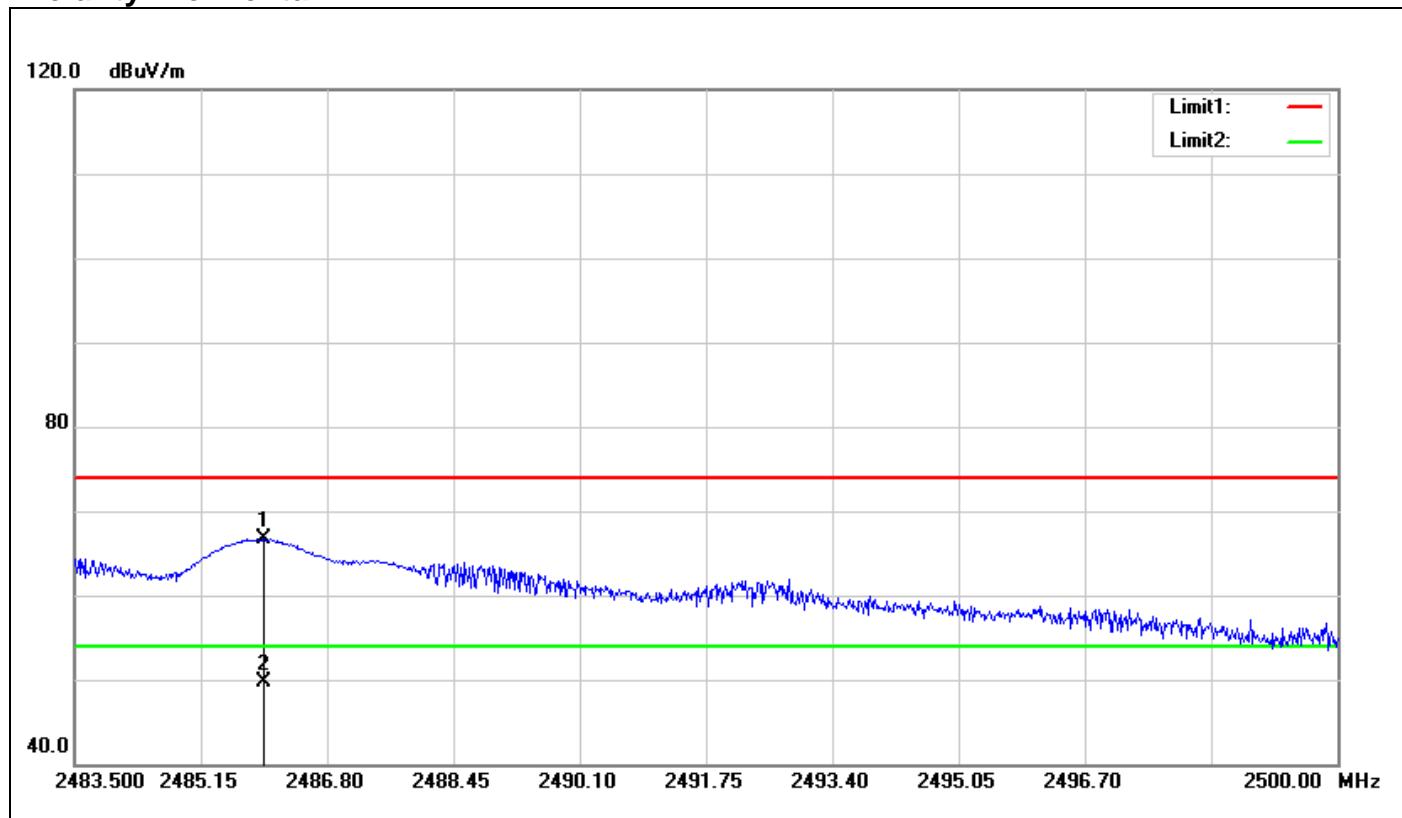
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2386.720	75.23	-3.80	71.43	74.00	-2.57	100	71	peak
2	2386.720	56.63	-3.80	52.83	54.00	-1.17	100	71	AVG

**Polarity: Horizontal**


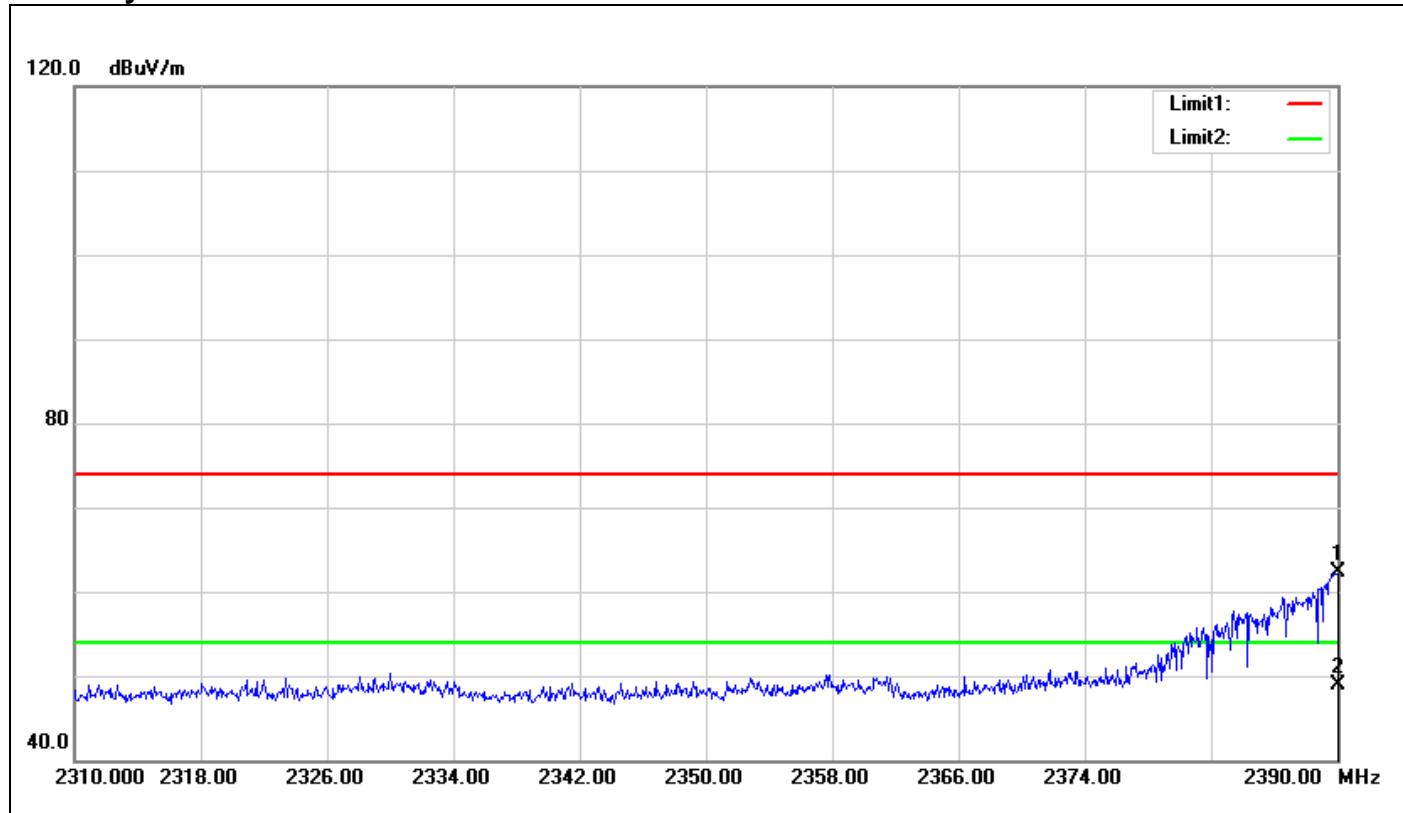
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2390.000	71.44	-3.77	67.67	74.00	-6.33	100	103	peak
2	2390.000	56.03	-3.77	52.26	54.00	-1.74	100	103	Avg

**Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)**
**Polarity: Vertical**


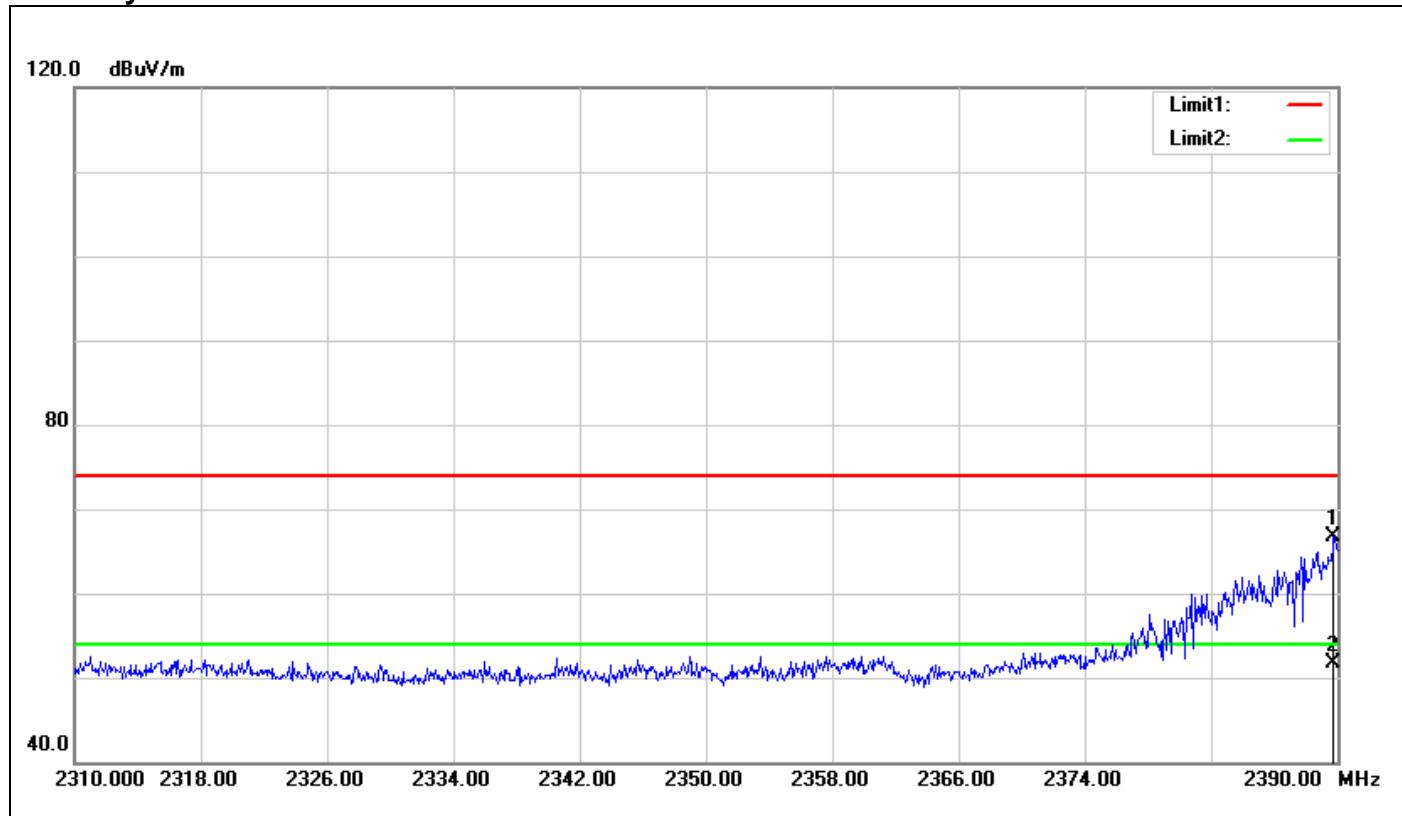
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2483.880	74.75	-3.27	71.48	74.00	-2.52	100	204	peak
2	2483.880	54.79	-3.27	51.52	54.00	-2.48	100	204	AVG

**Polarity: Horizontal**


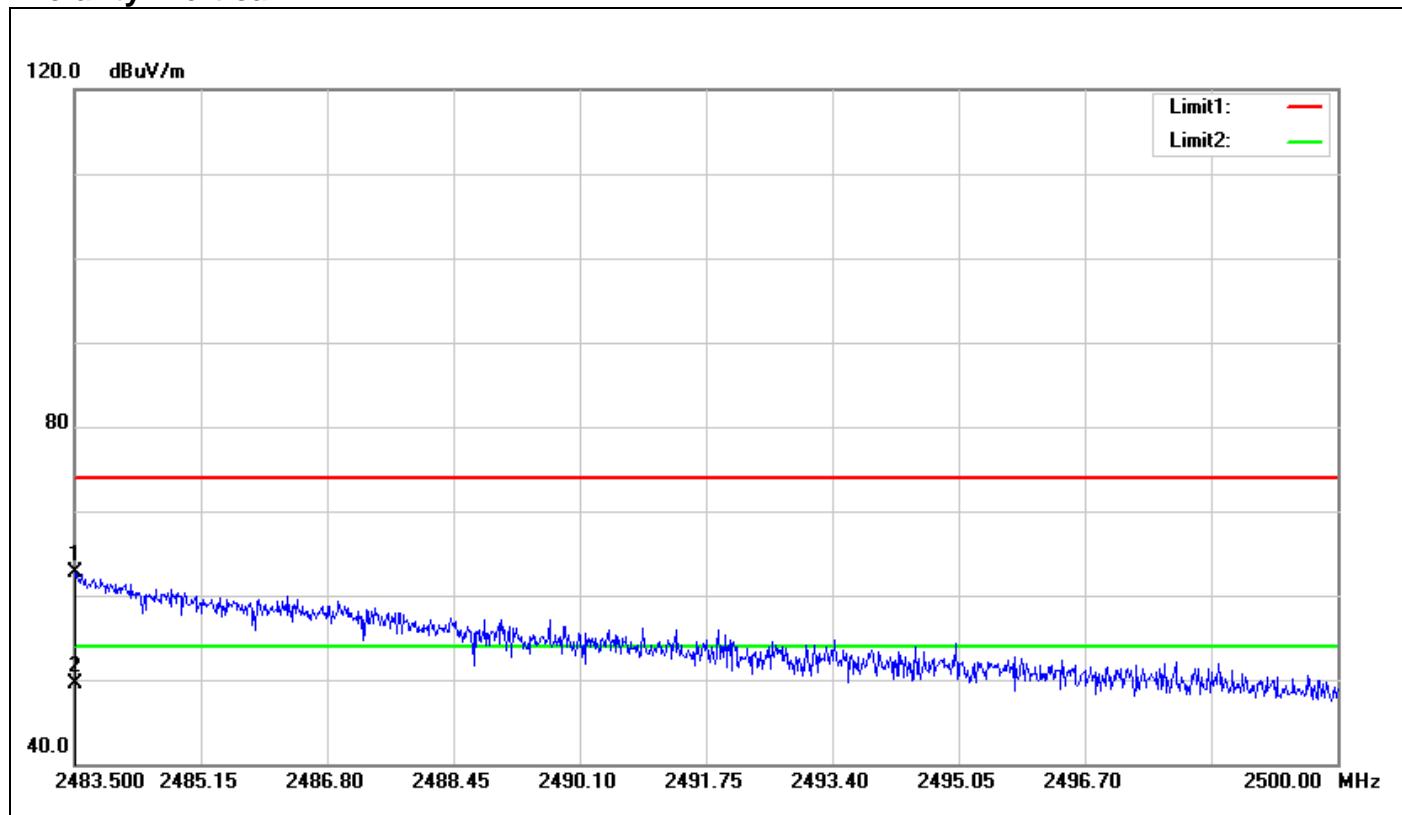
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2485.975	69.94	-3.25	66.69	74.00	-7.31	100	60	peak
2	2485.975	53.03	-3.25	49.78	54.00	-4.22	100	60	AVG

**For Dipole Antenna**
**Band Edges (IEEE 802.11b mode / CH Low)**
**Polarity: Vertical**


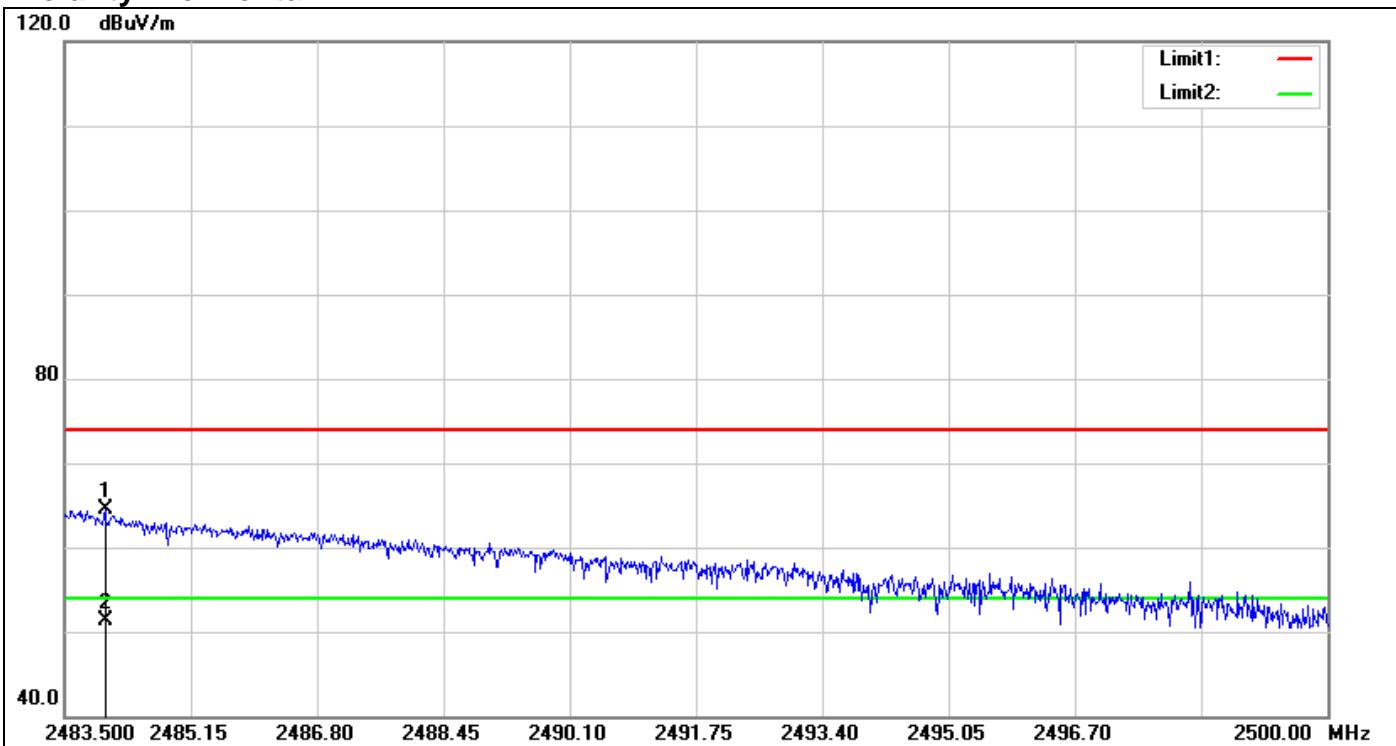
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2390.000	66.08	-3.77	62.31	74.00	-11.69	100	200	peak
2	2390.000	52.62	-3.77	48.85	54.00	-5.15	100	200	AVG

**Polarity: Horizontal**


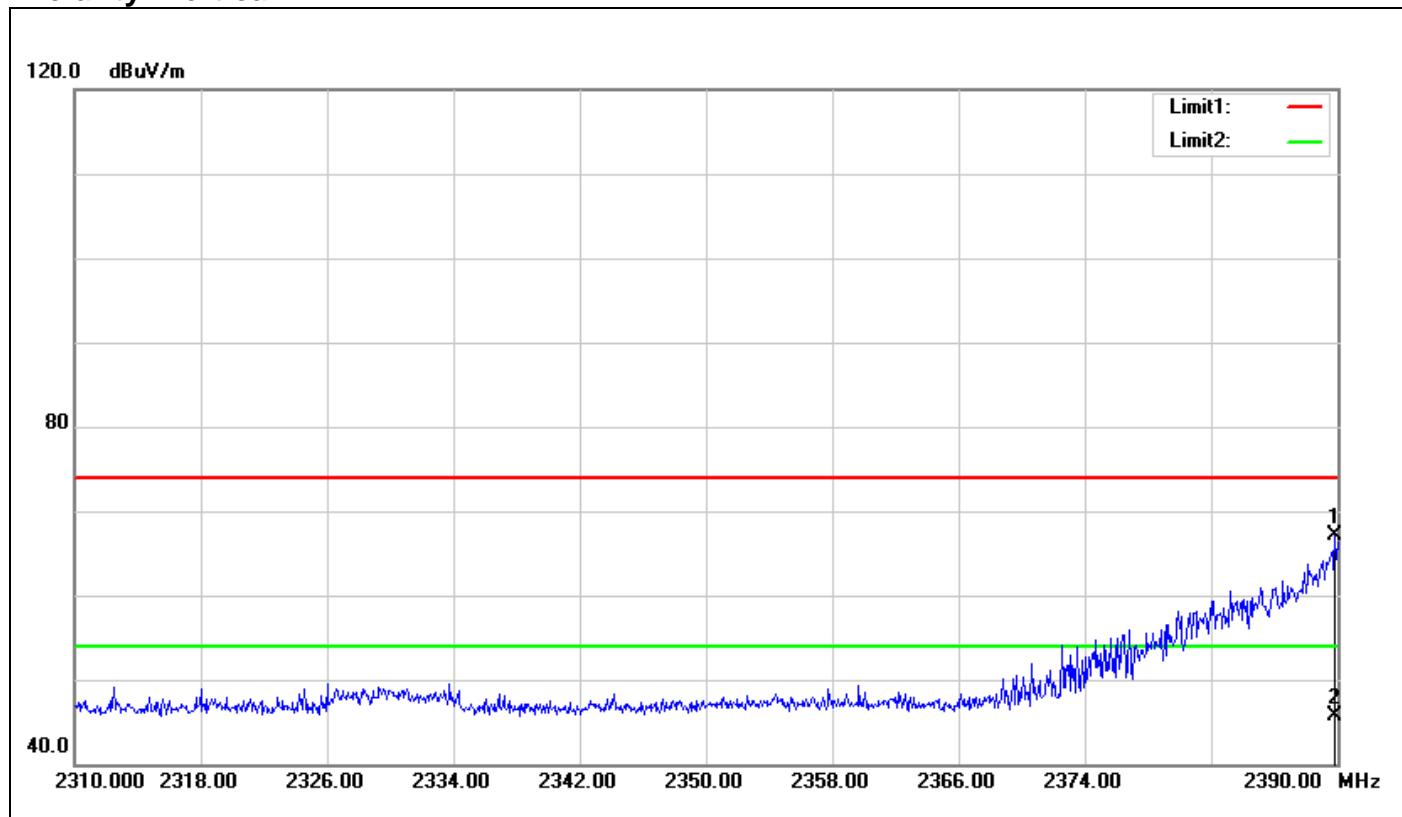
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2389.760	70.52	-3.77	66.75	74.00	-7.25	100	240	peak
2	2389.760	55.45	-3.77	51.68	54.00	-2.32	100	240	AVG

**Band Edges (IEEE 802.11b mode / CH High)**
**Polarity: Vertical**


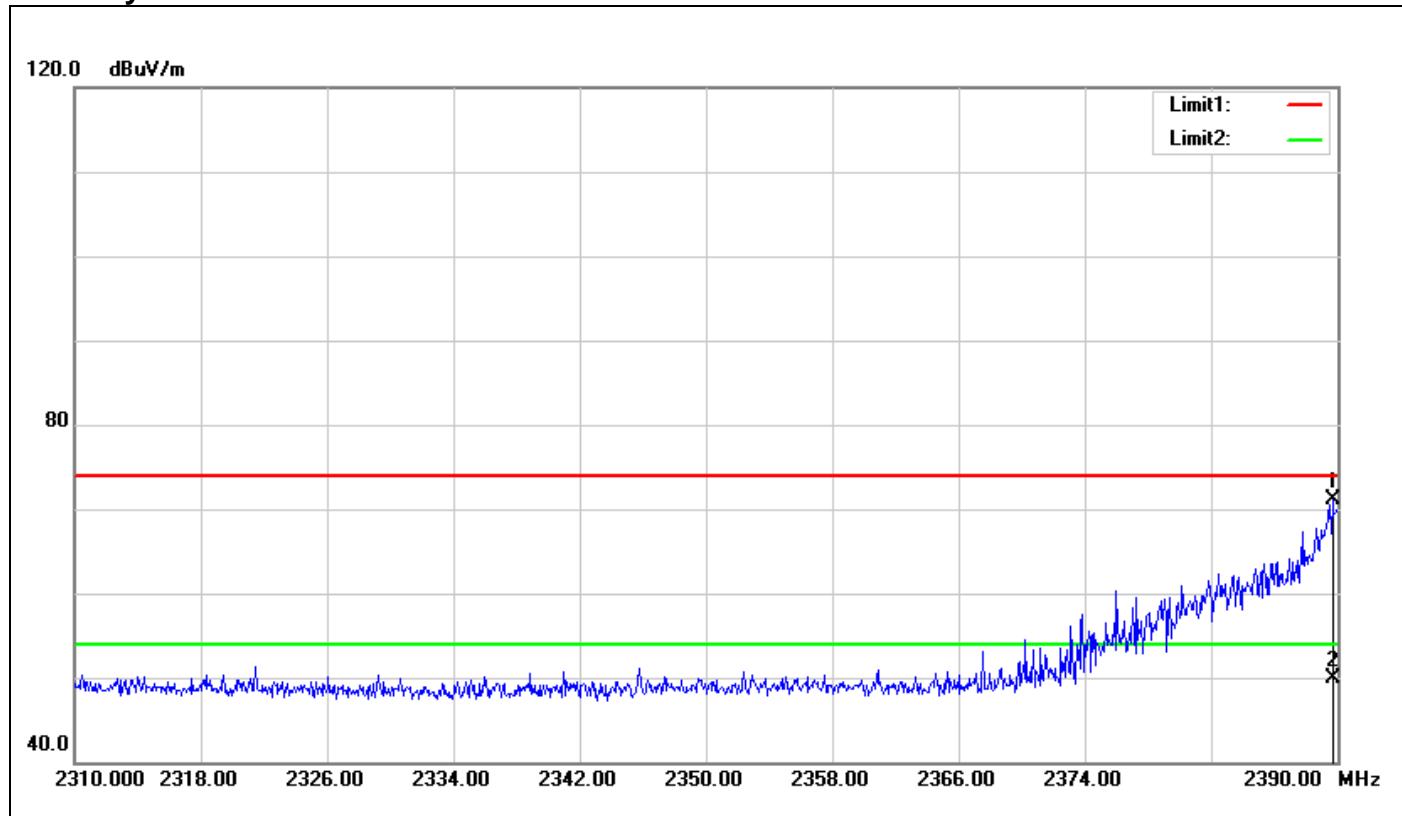
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2483.500	65.93	-3.27	62.66	74.00	-11.34	100	291	peak
2	2483.500	52.86	-3.27	49.59	54.00	-4.41	100	291	AVG

**Polarity: Horizontal**


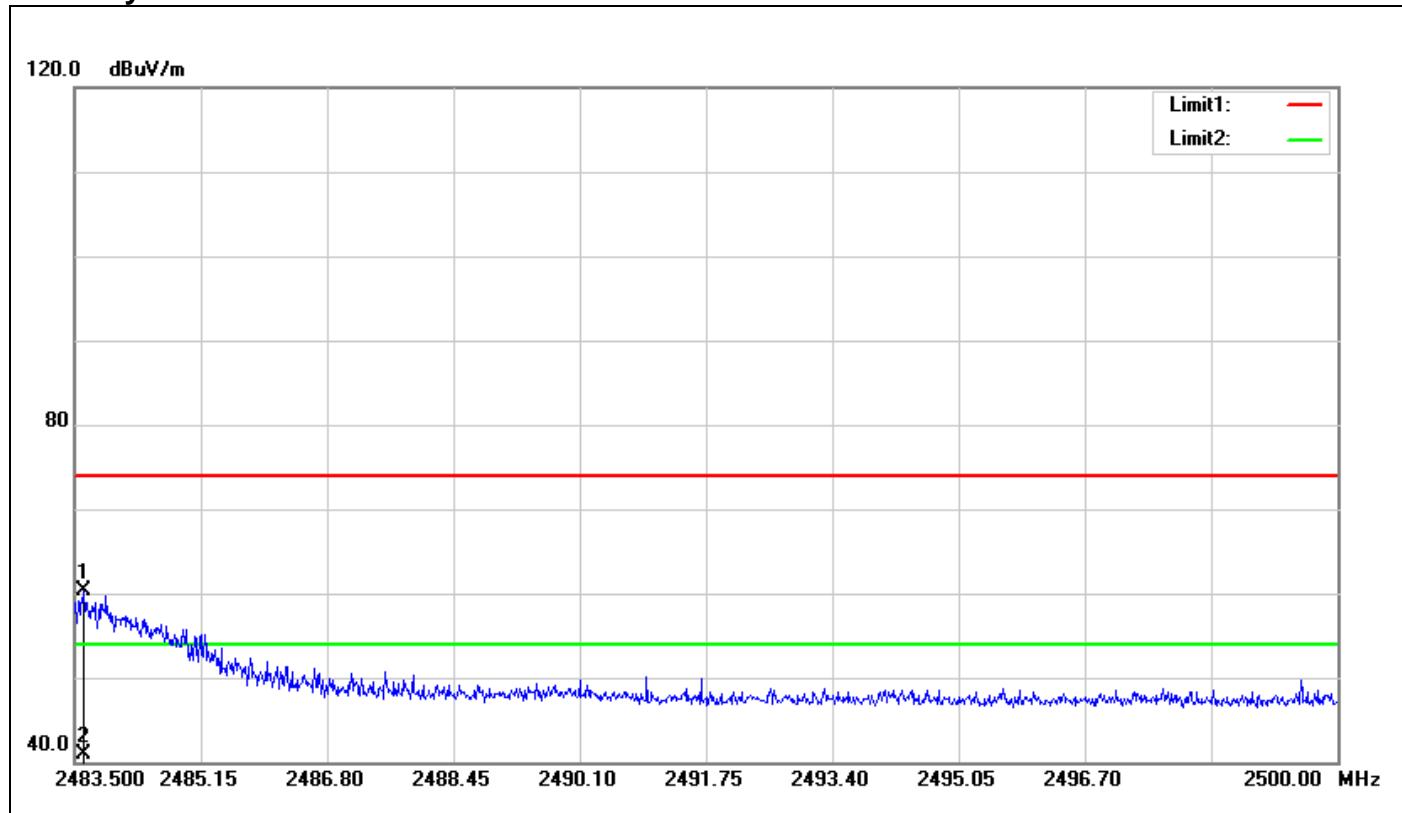
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2484.028	67.87	-3.27	64.60	74.00	-9.40	100	302	peak
2	2484.028	54.59	-3.27	51.32	54.00	-2.68	100	302	AVG

**Band Edges (IEEE 802.11g mode / CH Low)**
**Polarity: Vertical**


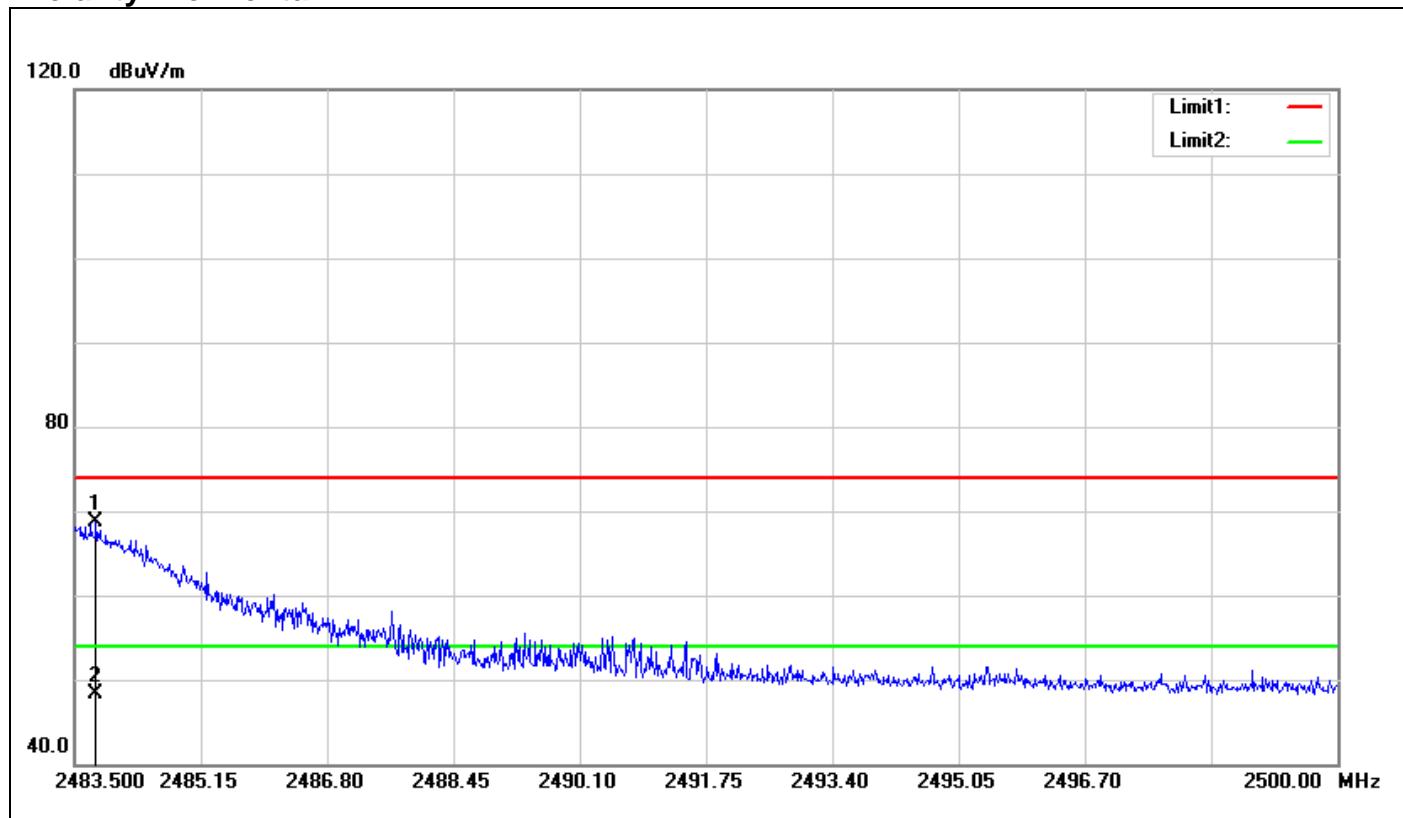
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2389.840	70.78	-3.77	67.01	74.00	-6.99	100	335	peak
2	2389.840	49.44	-3.77	45.67	54.00	-8.33	100	335	AVG

**Polarity: Horizontal**


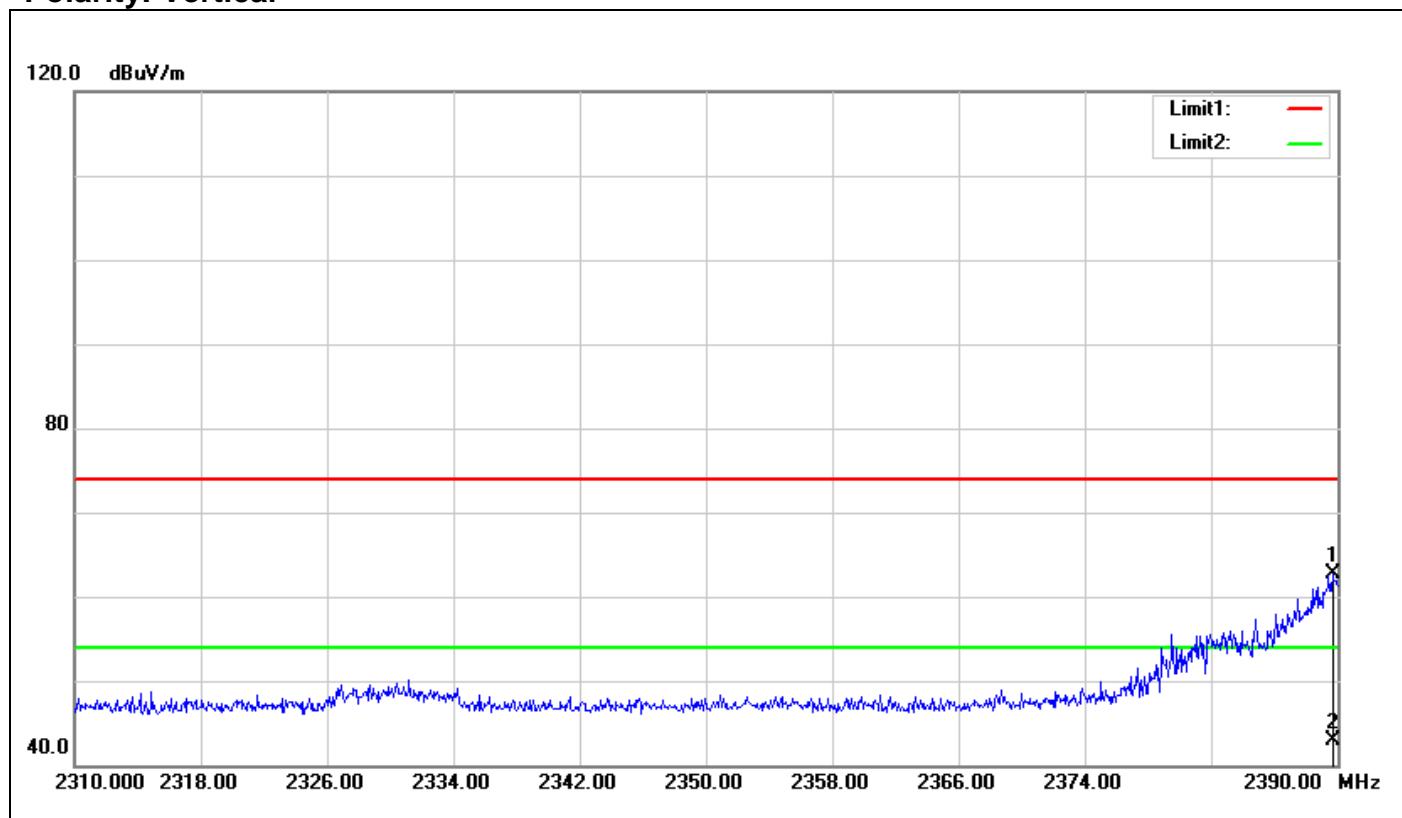
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.680	74.94	-3.77	71.17	74.00	-2.83	100	9	peak
2	2389.680	53.60	-3.77	49.83	54.00	-4.17	100	9	AVG

**Band Edges (IEEE 802.11g mode / CH High)**
**Polarity: Vertical**


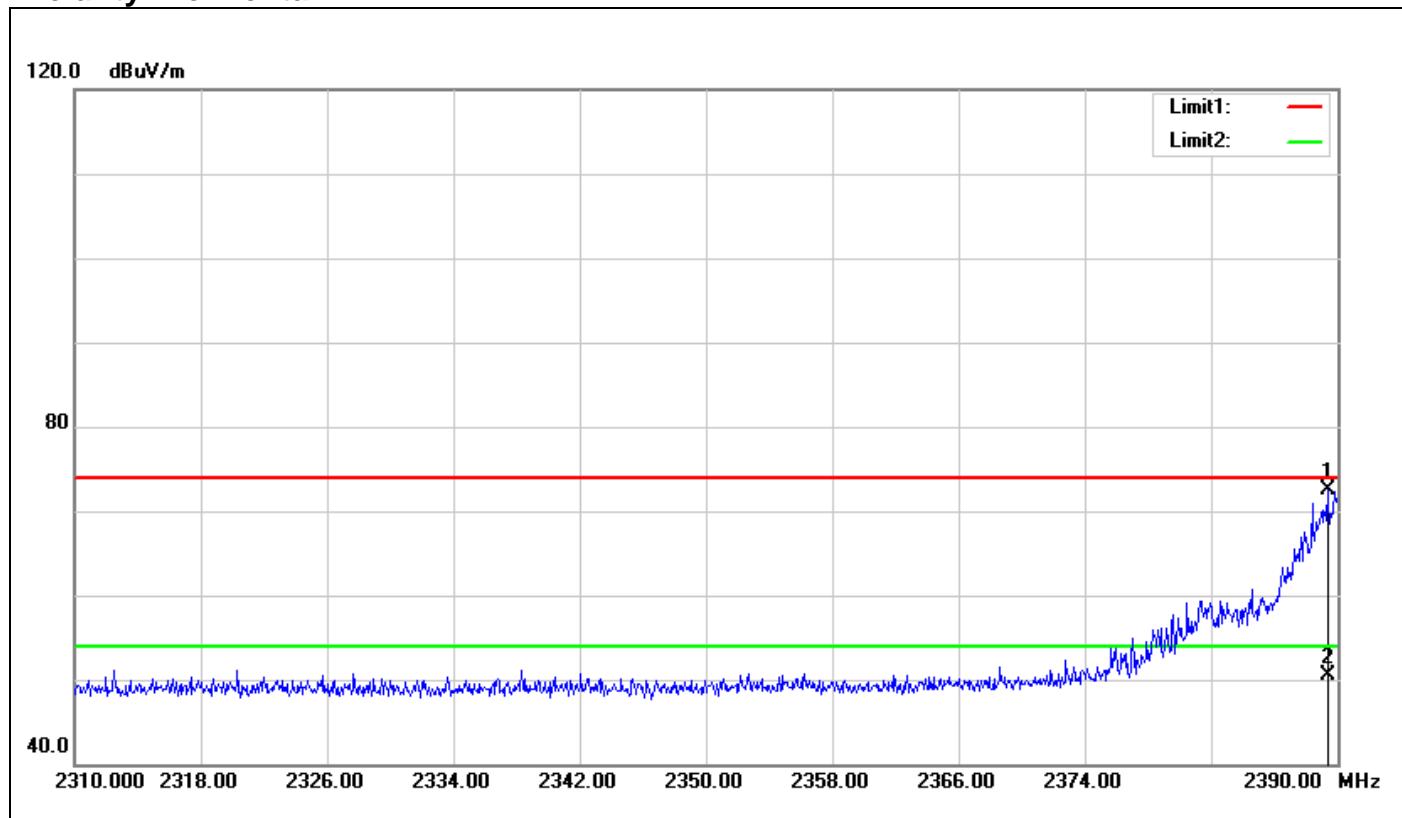
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2483.615	63.61	-3.27	60.34	74.00	-13.66	100	303	peak
2	2483.615	44.10	-3.27	40.83	54.00	-13.17	100	303	AVG

**Polarity: Horizontal**


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.780	71.94	-3.27	68.67	74.00	-5.33	100	148	peak
2	2483.780	51.47	-3.27	48.20	54.00	-5.80	100	148	AVG

**Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)**
**Polarity: Vertical**


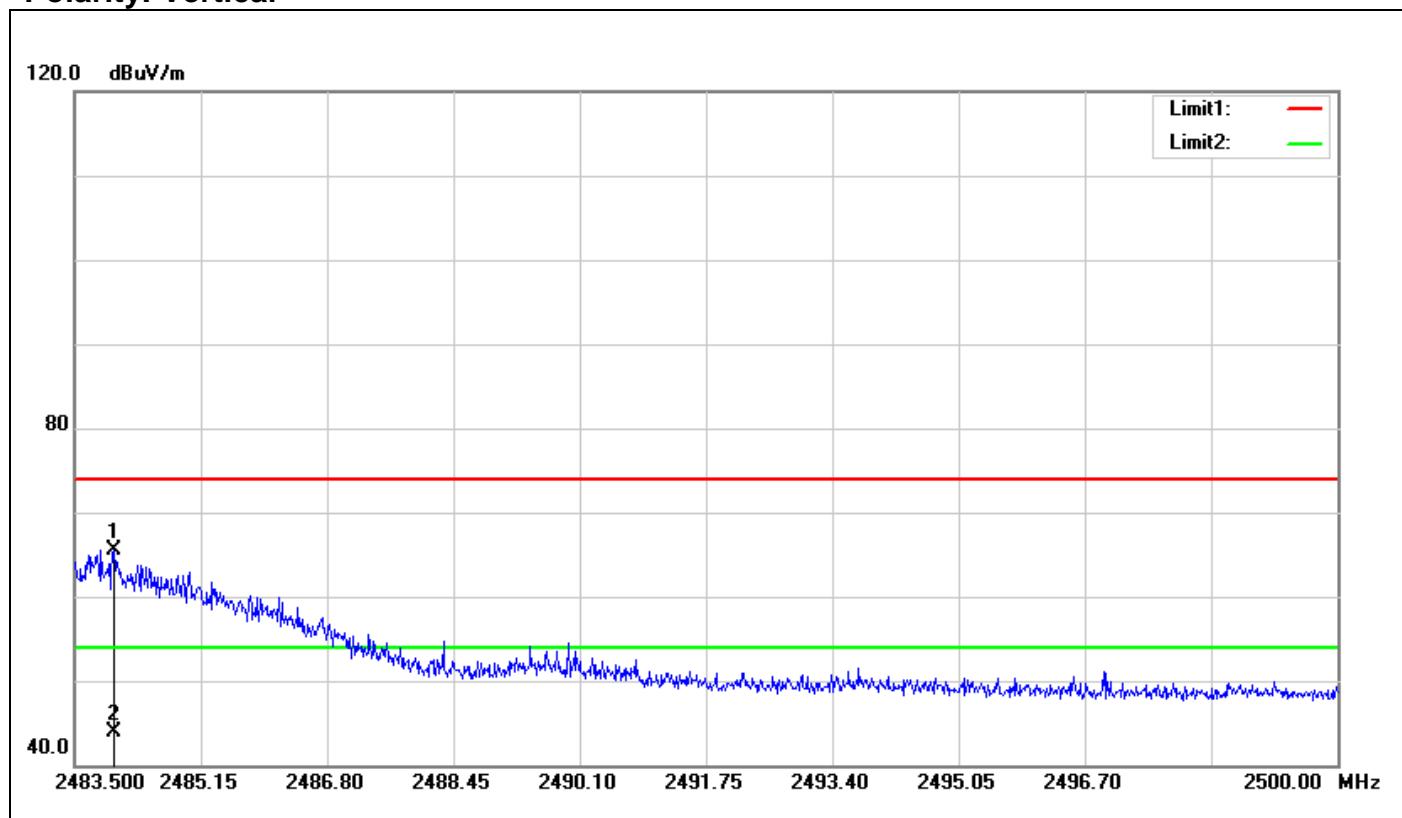
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.680	66.48	-3.77	62.71	74.00	-11.29	100	107	peak
2	2389.680	46.70	-3.77	42.93	54.00	-11.07	100	107	AVG

**Polarity: Horizontal**


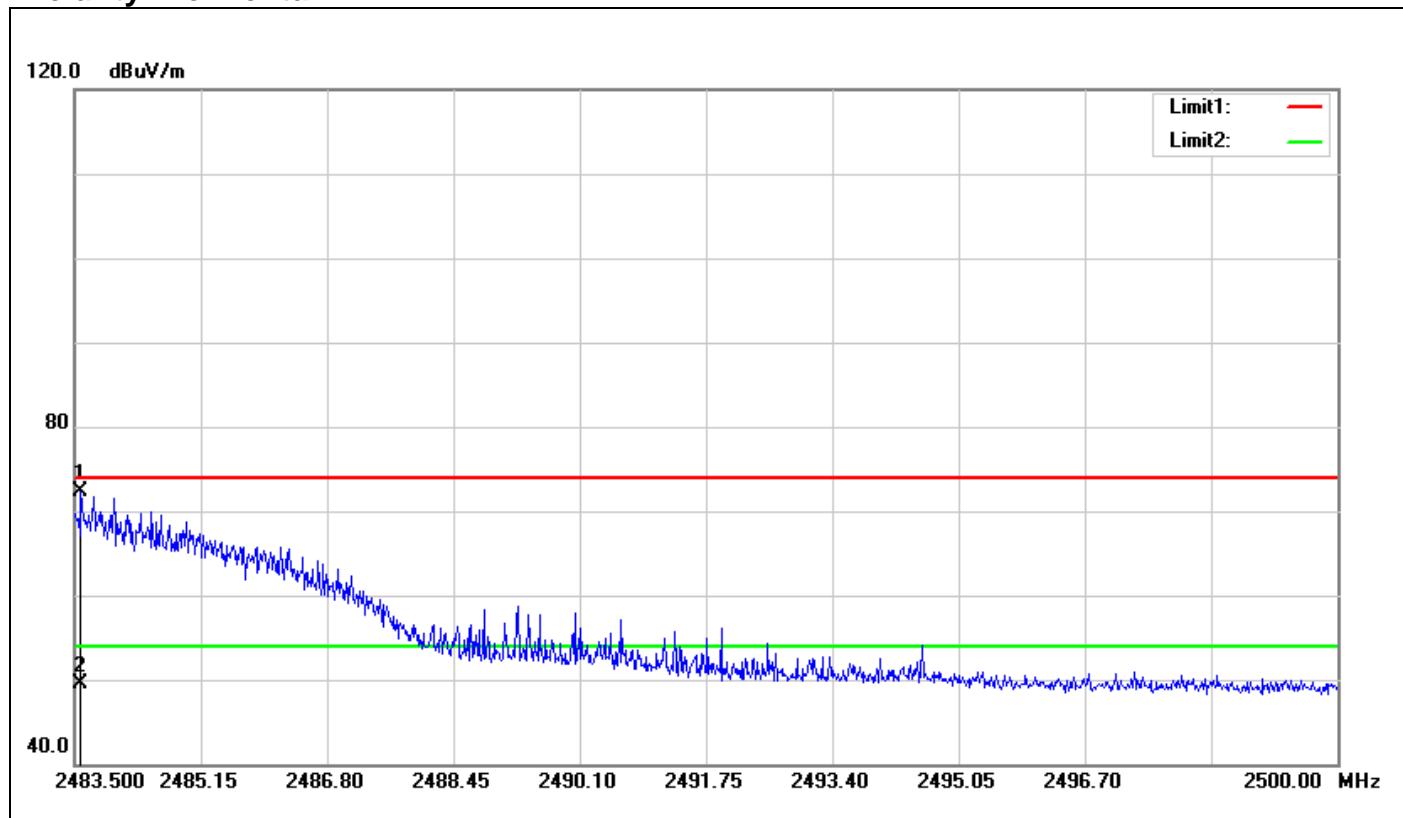
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.360	76.21	-3.78	72.43	74.00	-1.57	100	155	peak
2	2389.360	54.26	-3.78	50.48	54.00	-3.52	100	155	AVG

## Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)

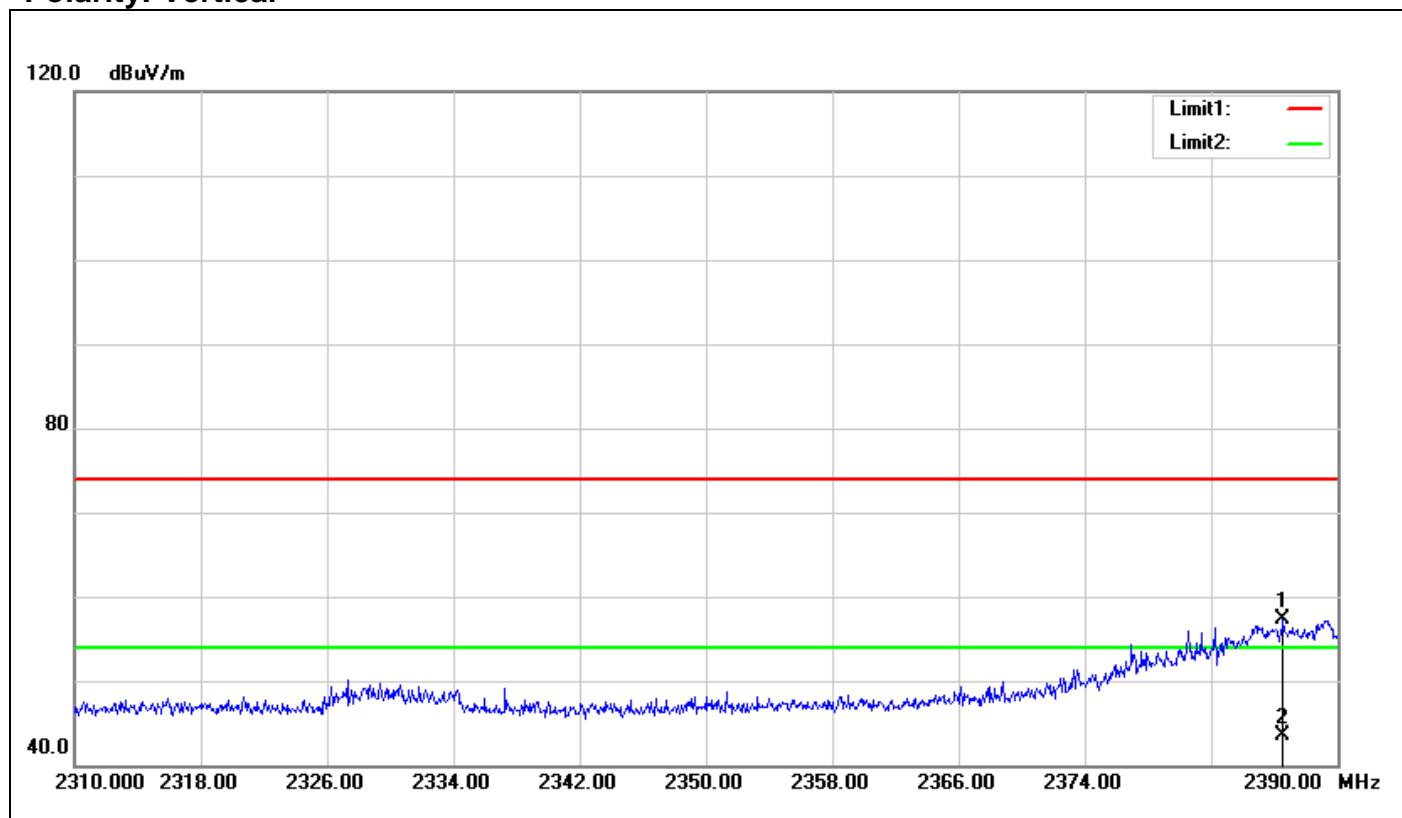
## Polarity: Vertical



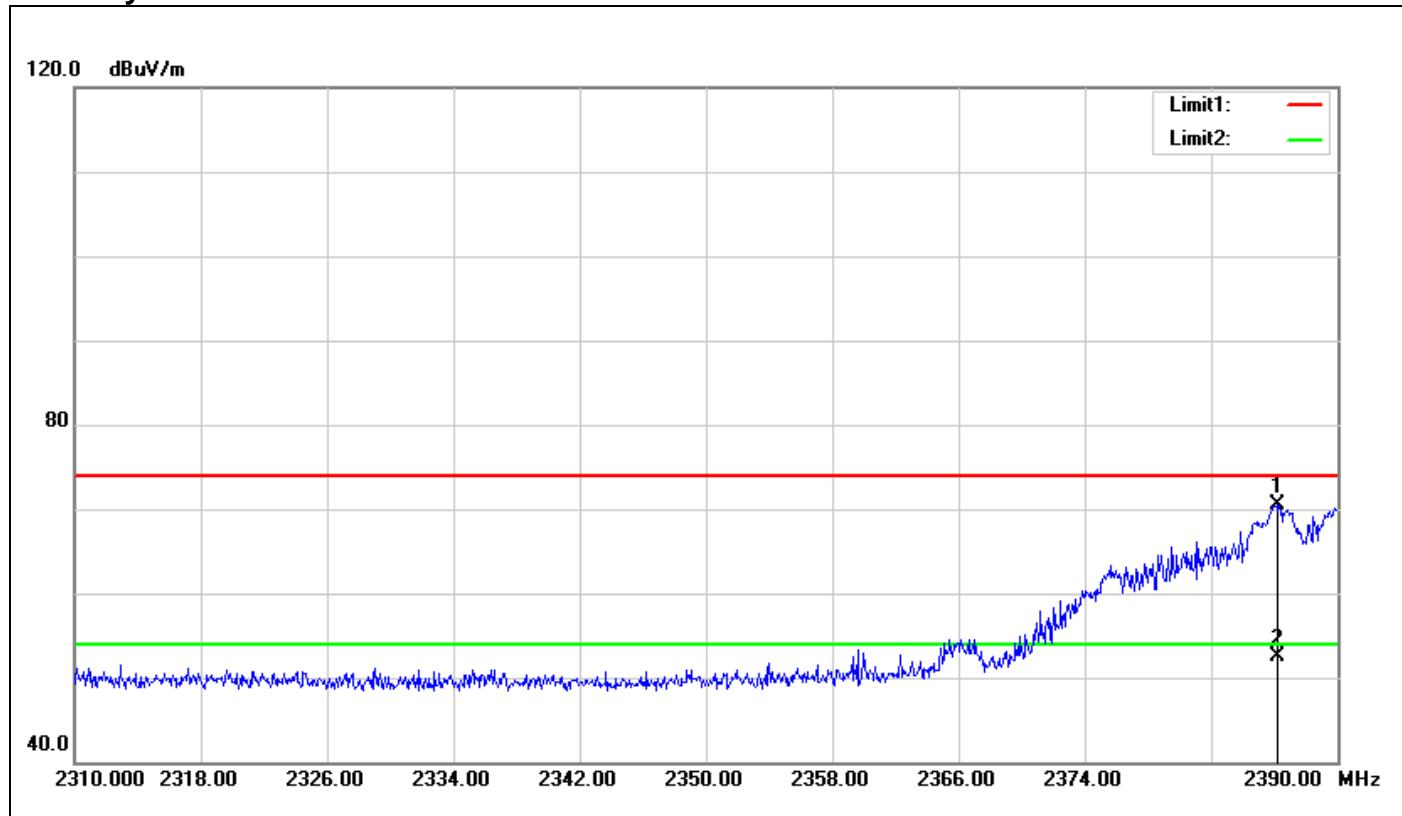
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2484.012	68.76	-3.27	65.49	74.00	-8.51	100	152	peak
2	2484.012	47.10	-3.27	43.83	54.00	-10.17	100	152	AVG

**Polarity: Horizontal**


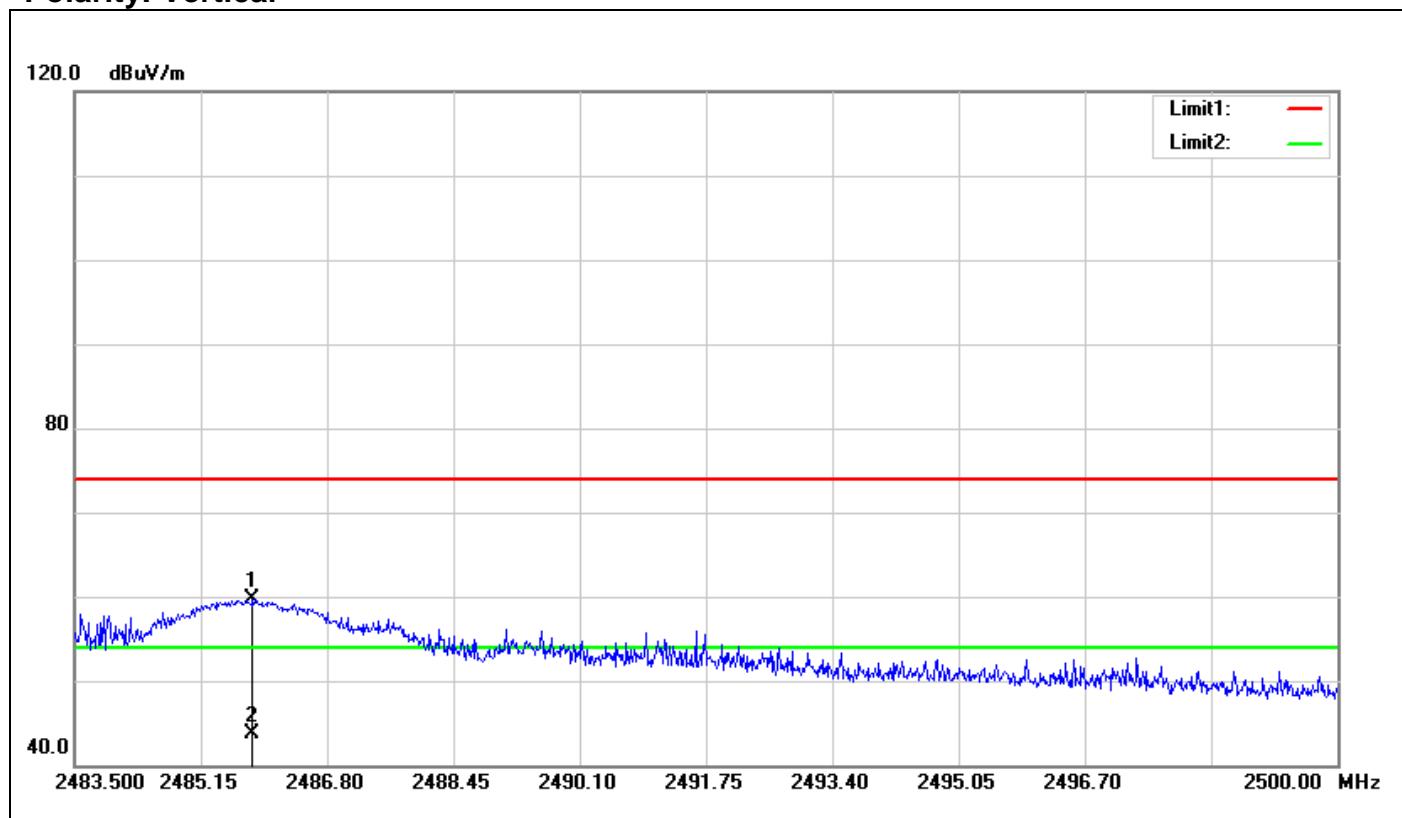
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2483.582	75.49	-3.27	72.22	74.00	-1.78	100	34	peak
2	2483.582	52.83	-3.27	49.56	54.00	-4.44	100	34	AVG

**Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)**
**Polarity: Vertical**


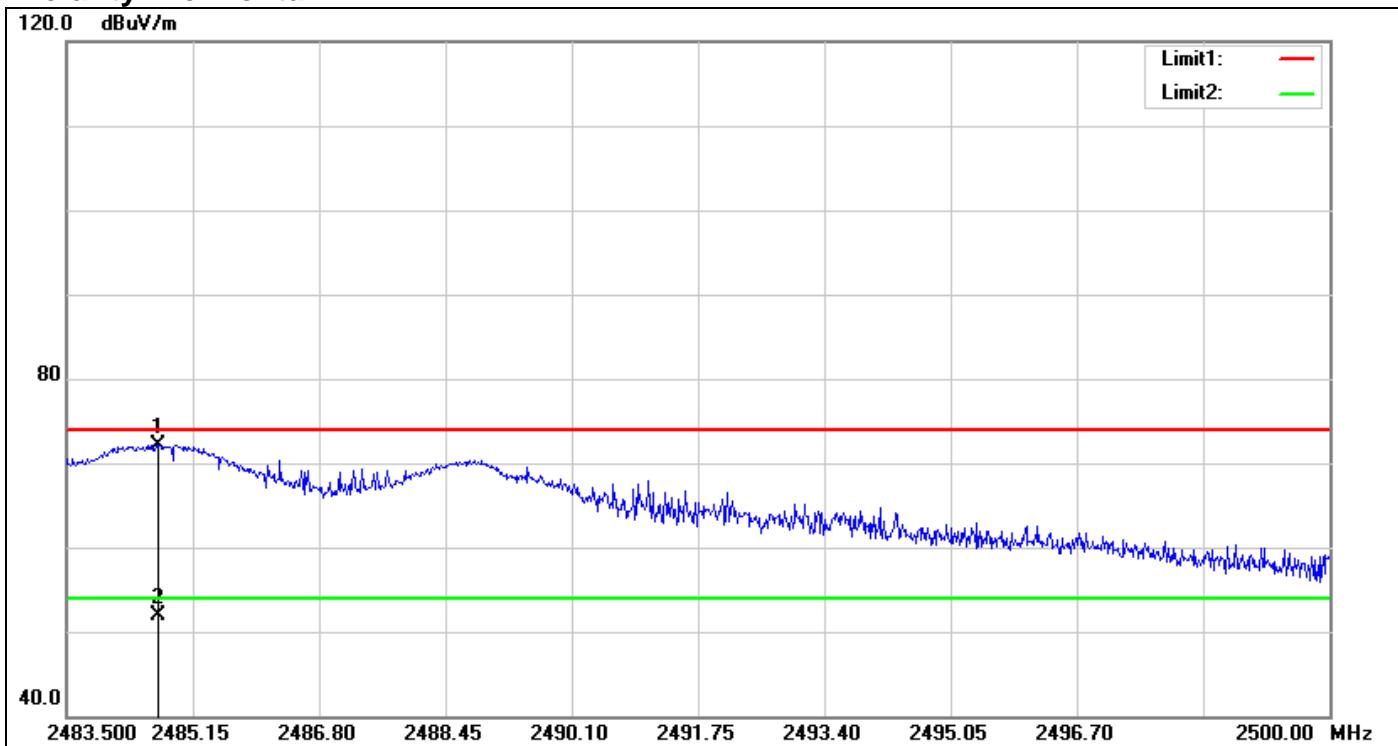
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2386.560	61.03	-3.80	57.23	74.00	-16.77	100	141	peak
2	2386.560	47.26	-3.80	43.46	54.00	-10.54	100	141	AVG

**Polarity: Horizontal**


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2386.160	74.25	-3.80	70.45	74.00	-3.55	100	0	peak
2	2386.160	56.33	-3.80	52.53	54.00	-1.47	100	0	AVG

**Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)**
**Polarity: Vertical**


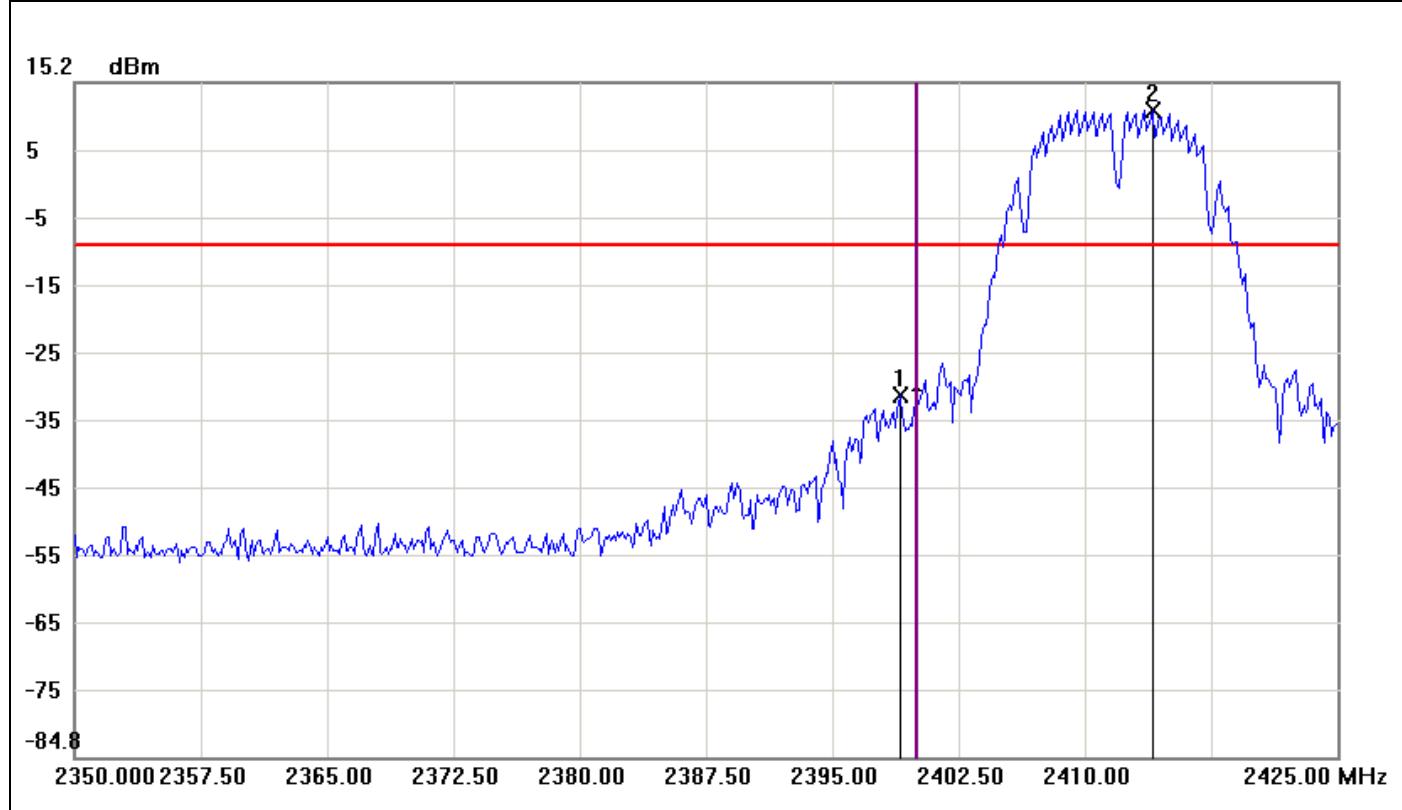
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2485.827	63.03	-3.25	59.78	74.00	-14.22	100	118	peak
2	2485.827	47.01	-3.25	43.76	54.00	-10.24	100	118	AVG

**Polarity: Horizontal**


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2484.704	75.37	-3.26	72.11	74.00	-1.89	100	111	peak
2	2484.704	55.23	-3.26	51.97	54.00	-2.03	100	111	AVG

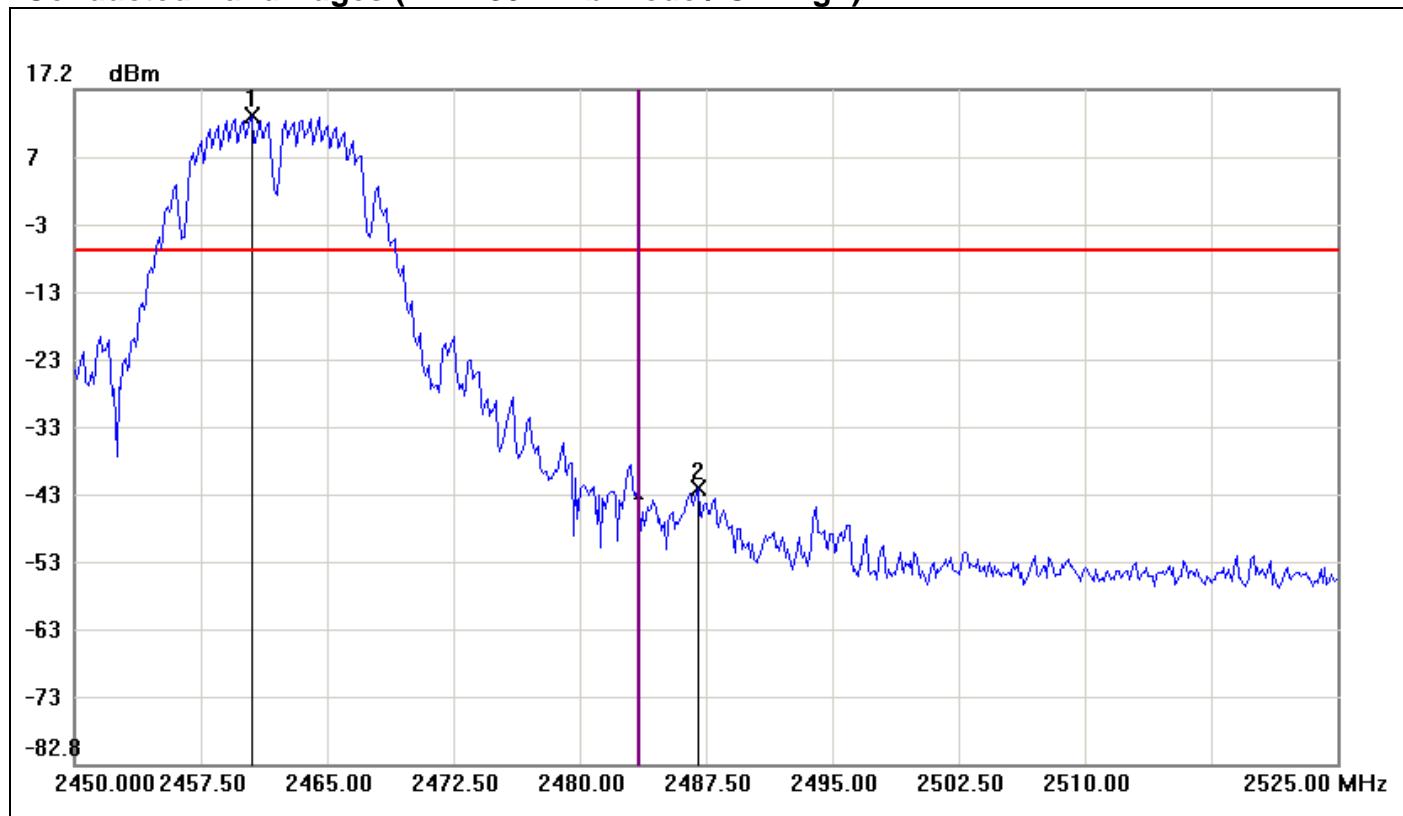
## Test Plot

### Conducted Band Edges (IEEE 802.11b mode / CH Low)



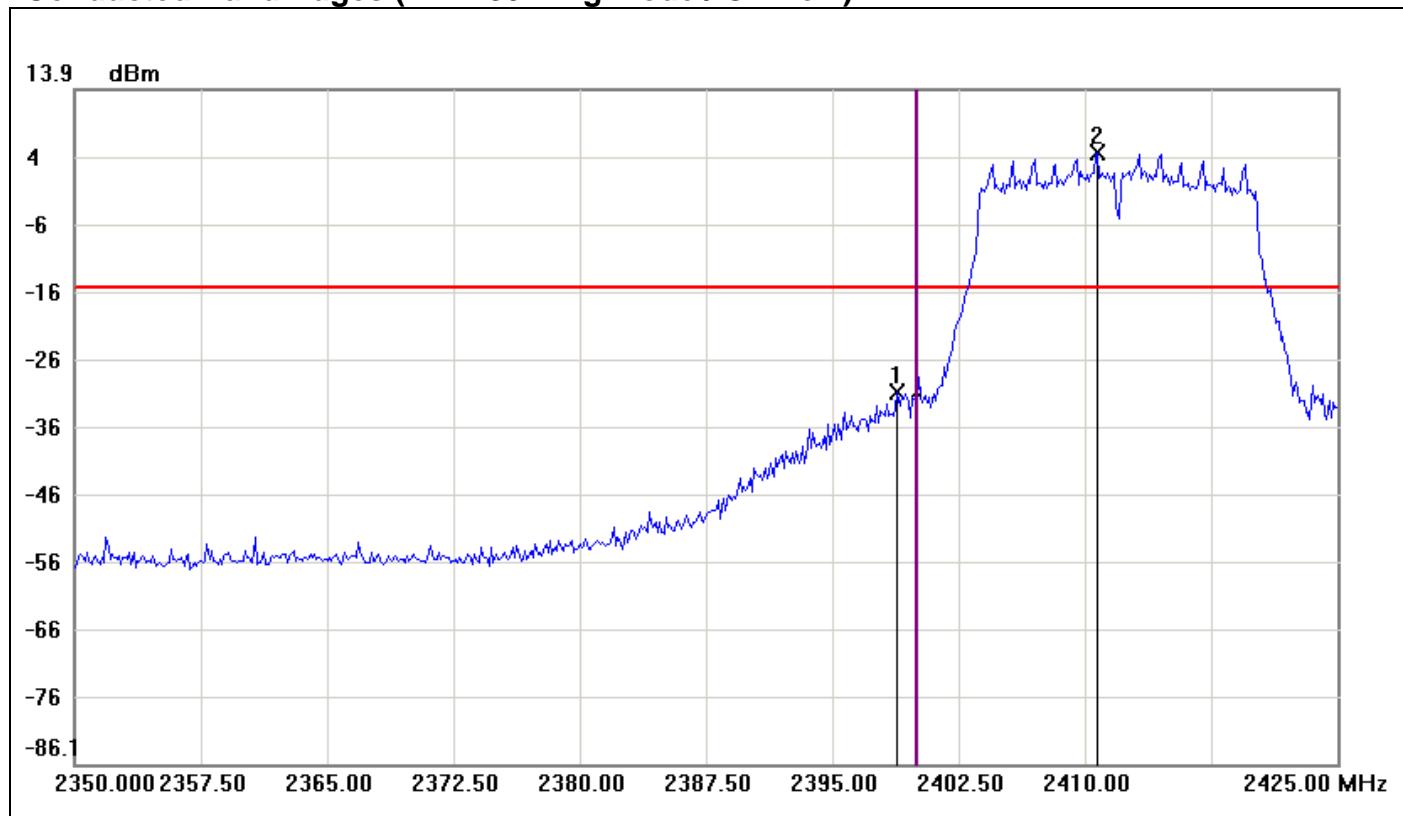
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.0000	-31.25	-8.98	-22.27
2	2414.0000	11.02	-8.98	20.00

**Conducted Band Edges (IEEE 802.11b mode / CH High)**



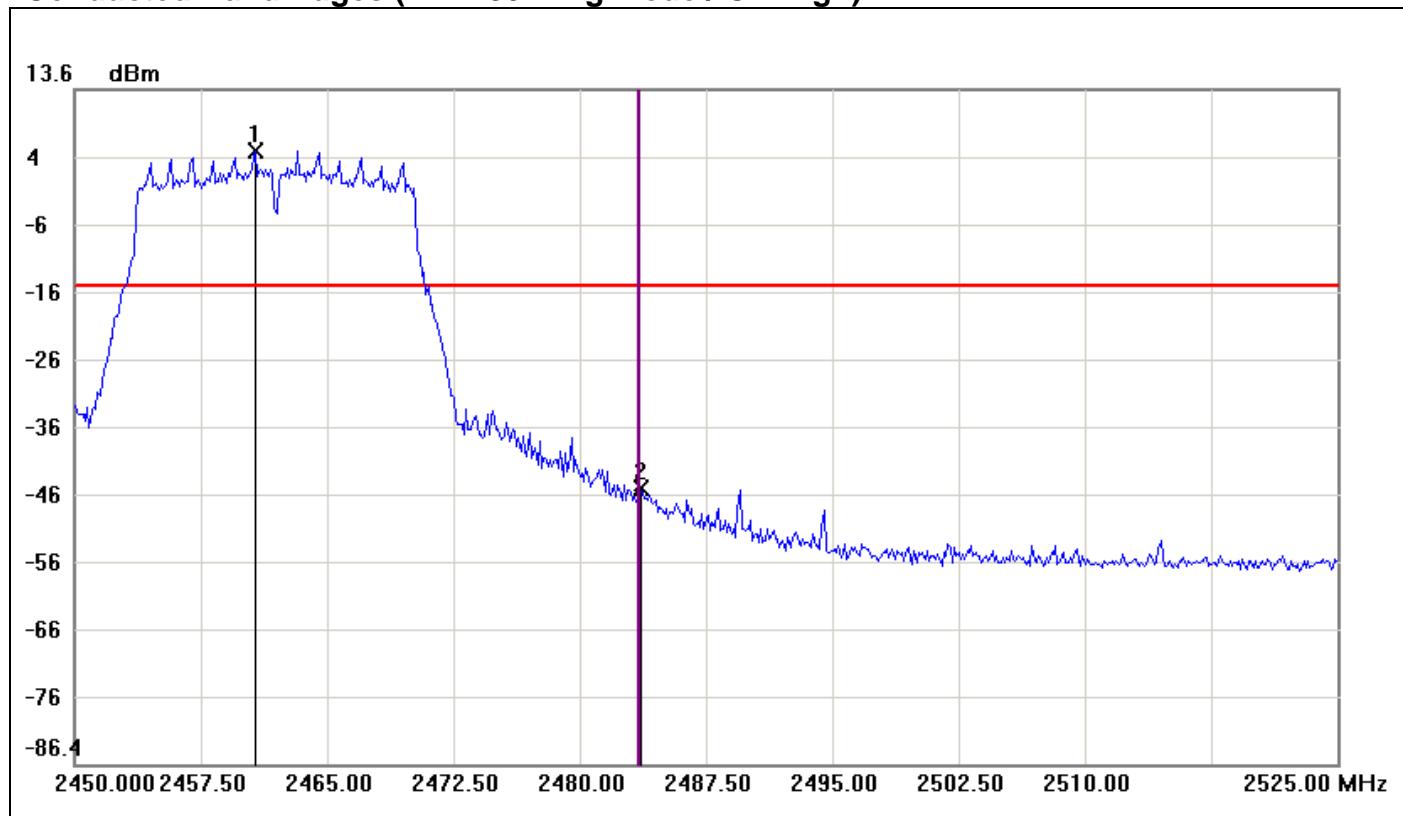
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2460.5000	13.30	-6.70	20.00
2	2487.0000	-41.85	-6.70	-35.15

**Conducted Band Edges (IEEE 802.11g mode / CH Low)**

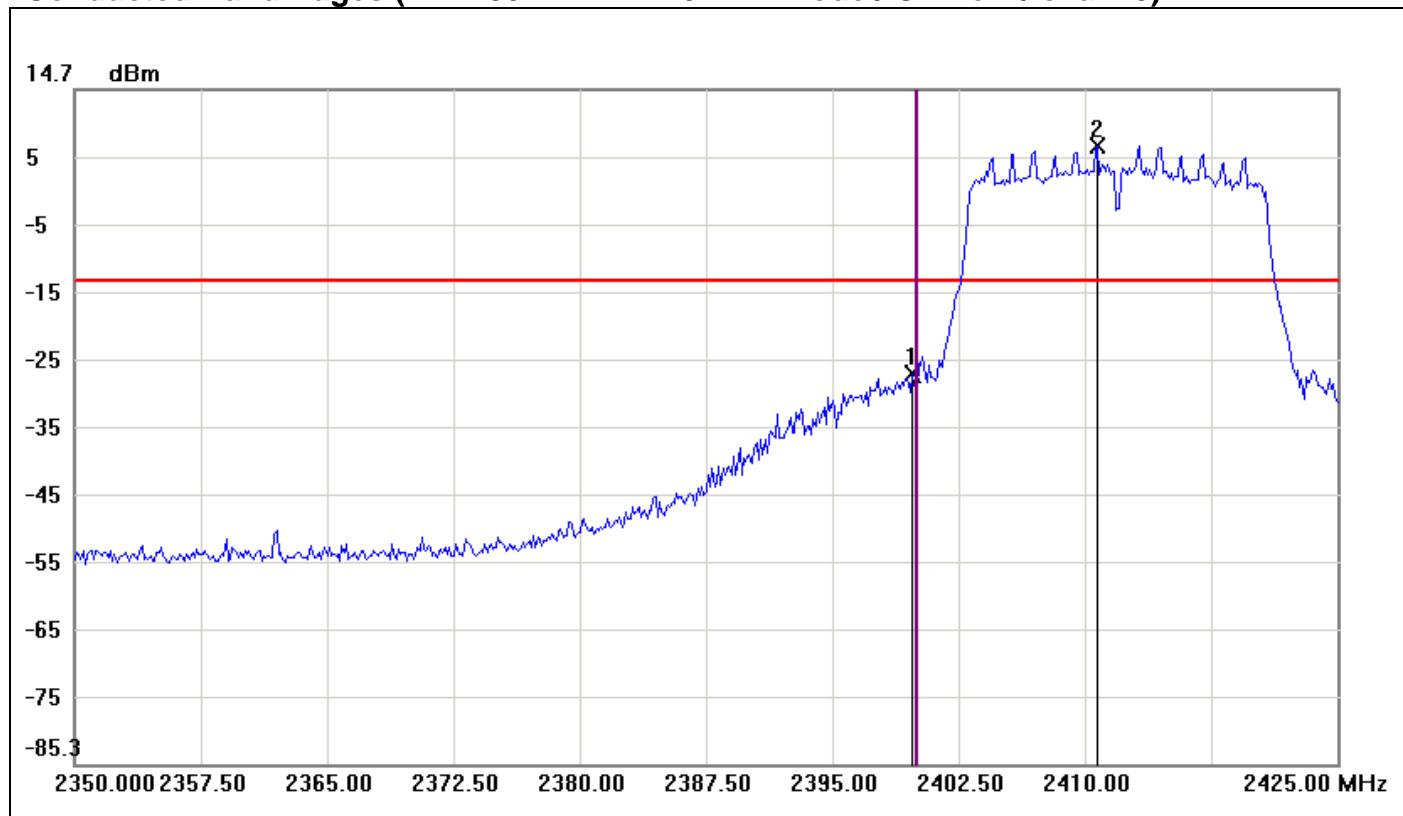


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2398.8750	-31.05	-15.62	-15.43
2	2410.7500	4.38	-15.62	20.00

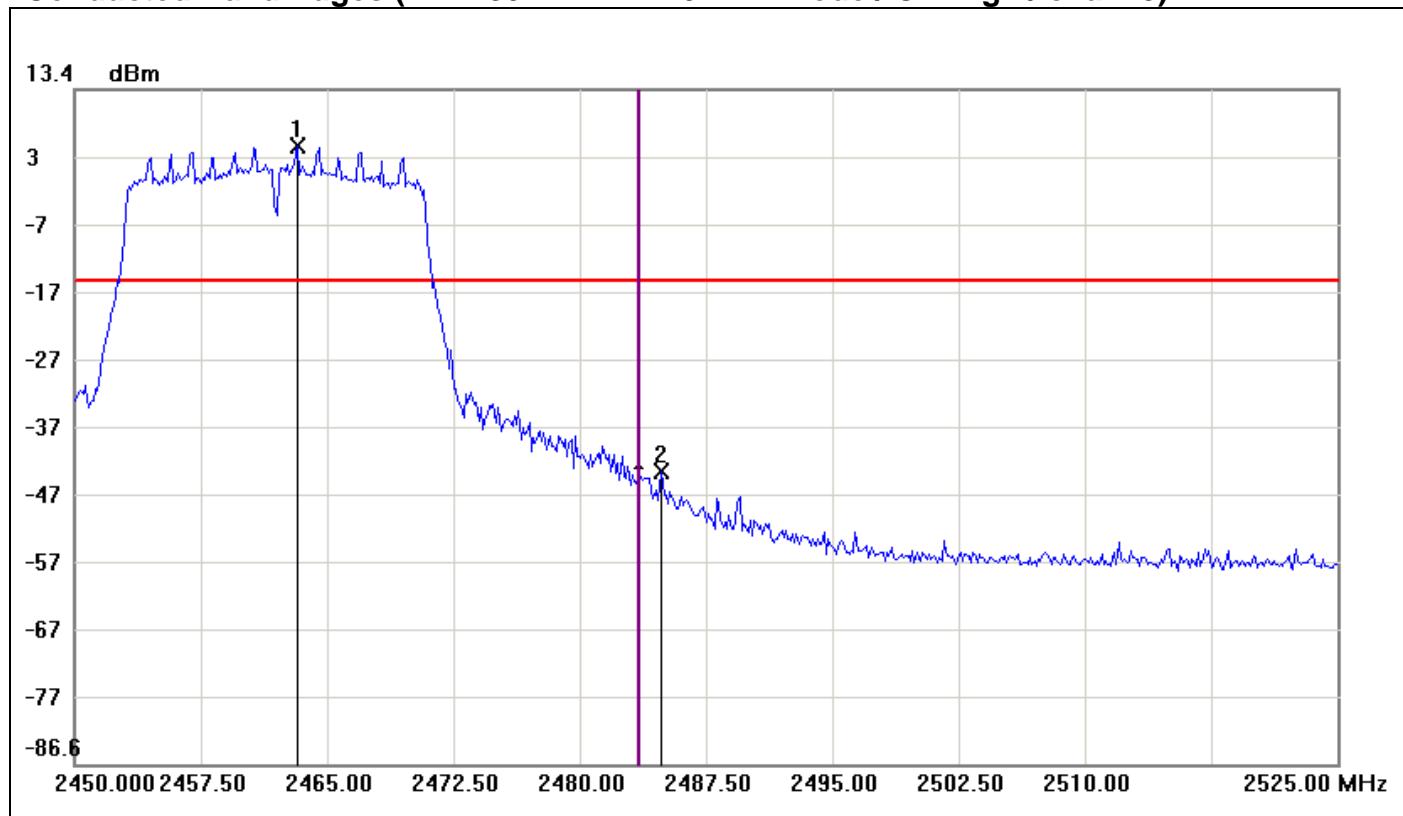
**Conducted Band Edges (IEEE 802.11g mode / CH High)**



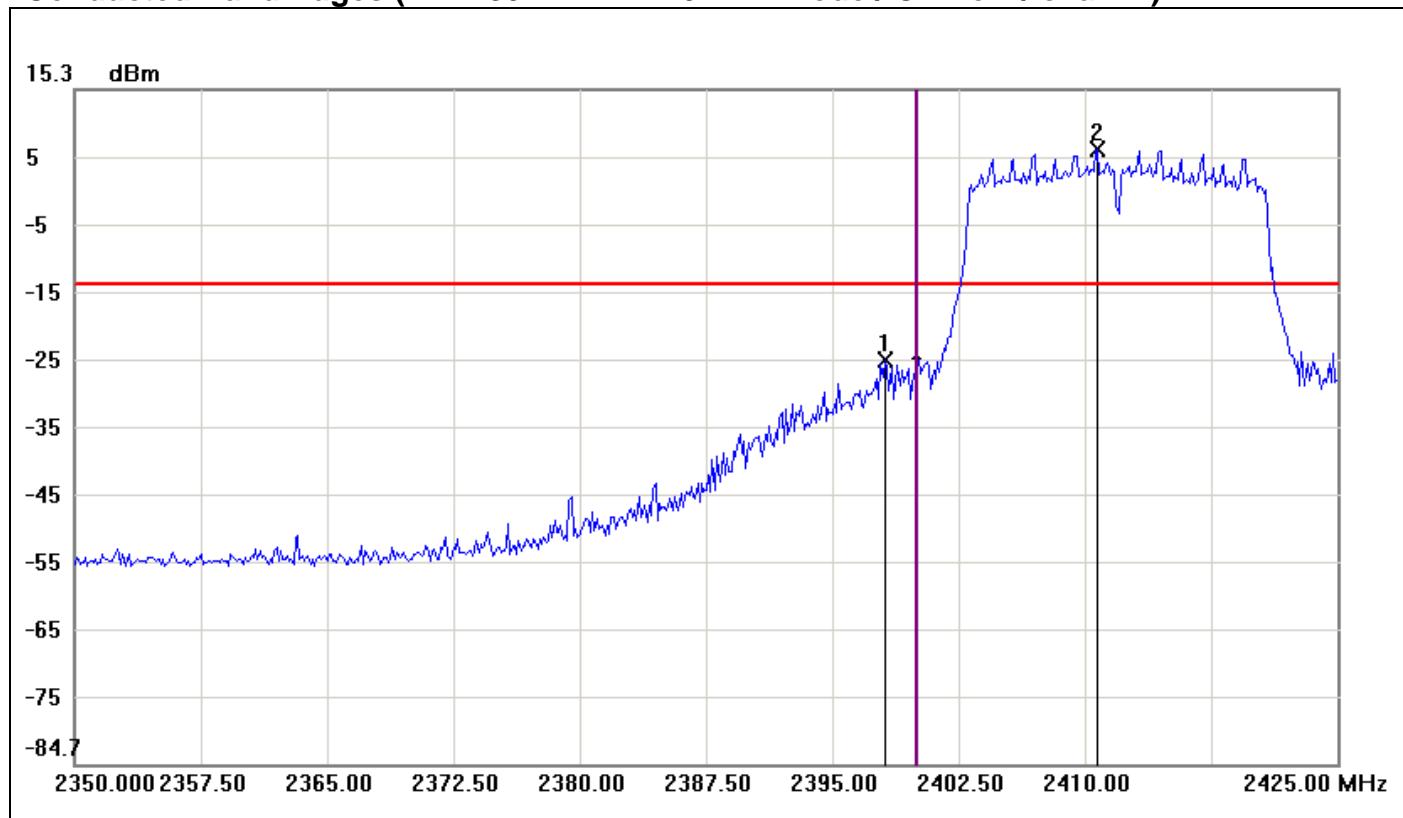
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2460.7500	4.52	-15.48	20.00
2	2483.6250	-45.40	-15.48	-29.92

**Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low / chain 0)**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.7500	-27.52	-13.61	-13.91
2	2410.7500	6.39	-13.61	20.00

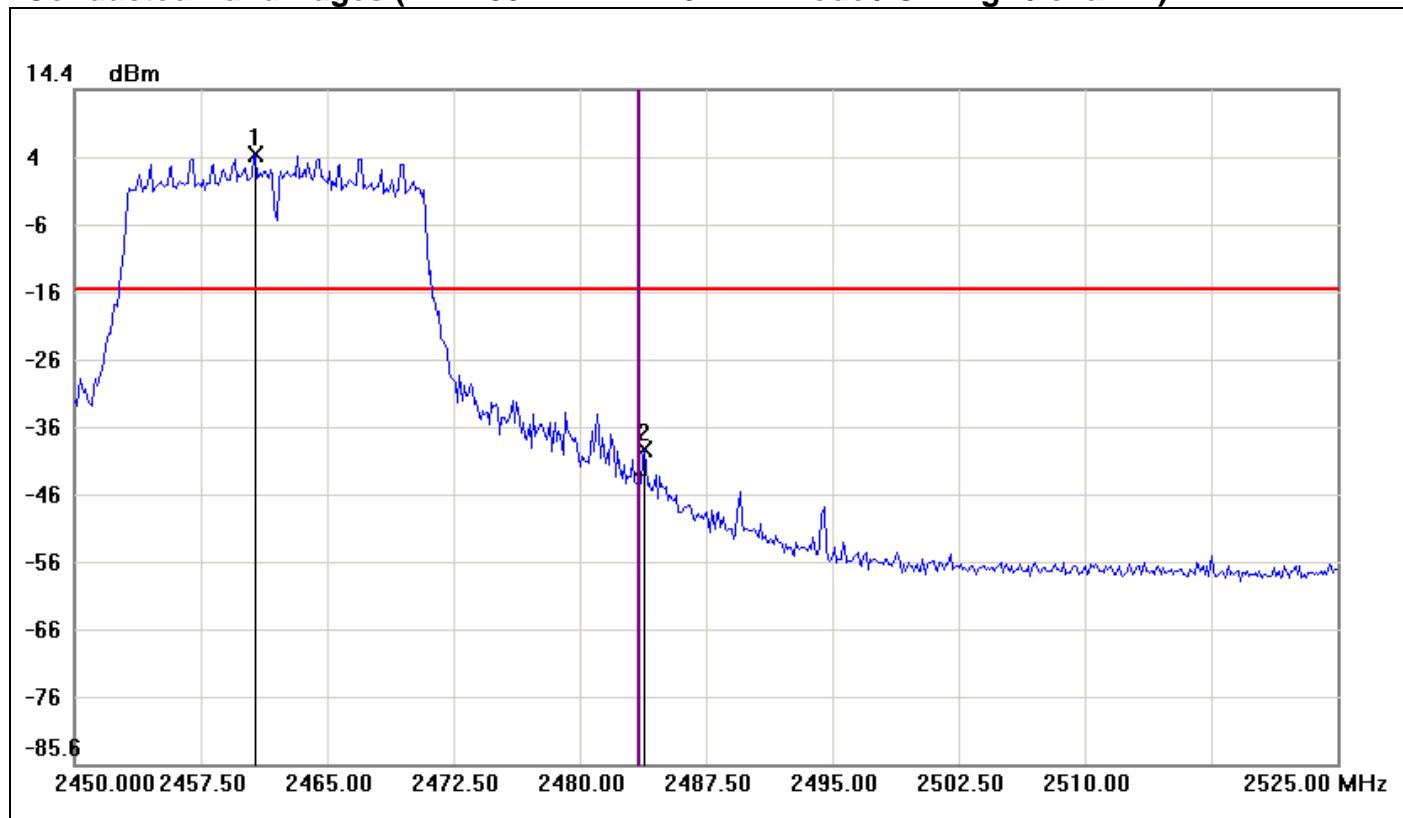
**Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High / chain 0)**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2463.2500	4.90	-15.10	20.00
2	2484.8750	-43.33	-15.10	-28.23

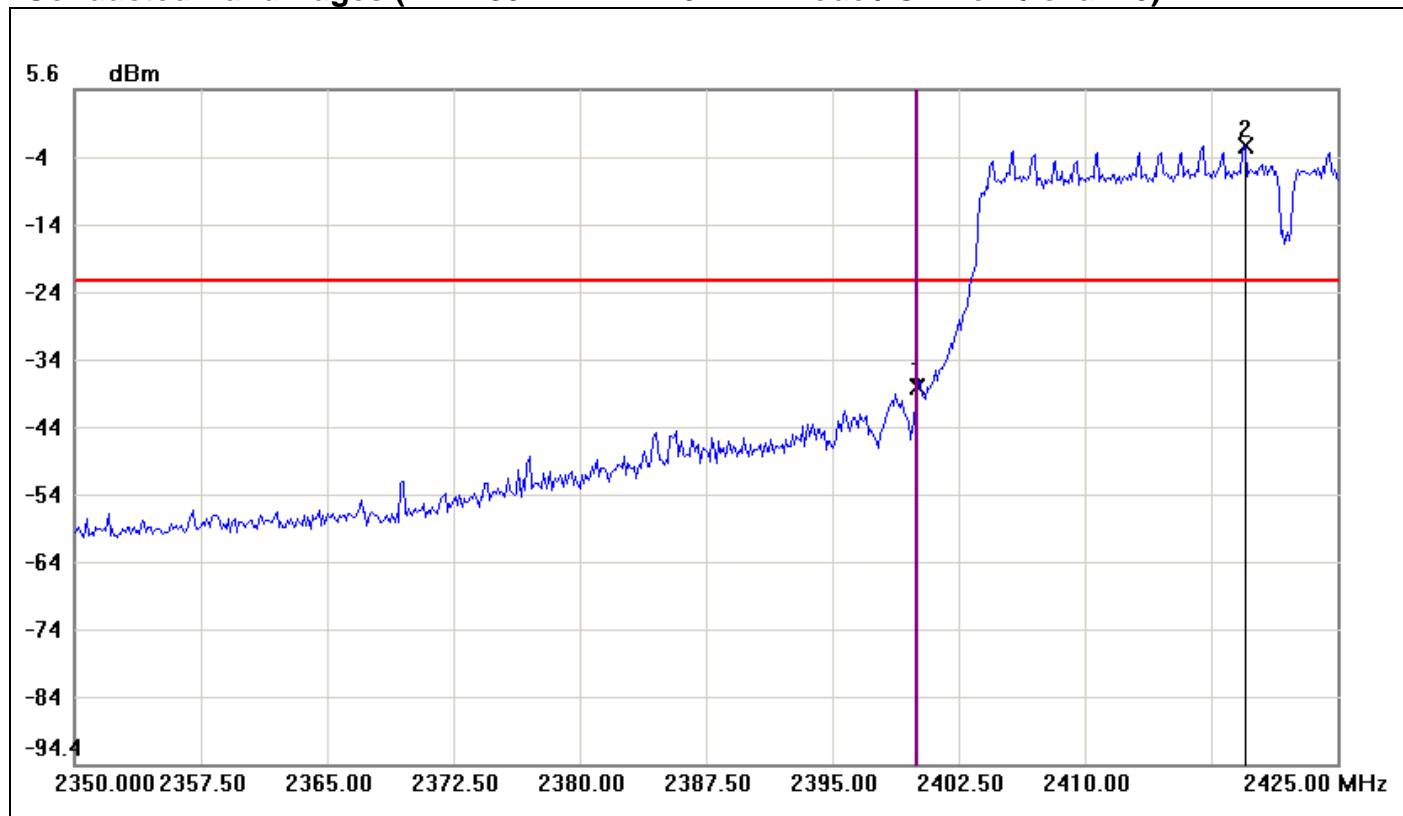
**Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low / chain 1)**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2398.1250	-24.94	-13.64	-11.30
2	2410.7500	6.36	-13.64	20.00

**Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High / chain 1)**

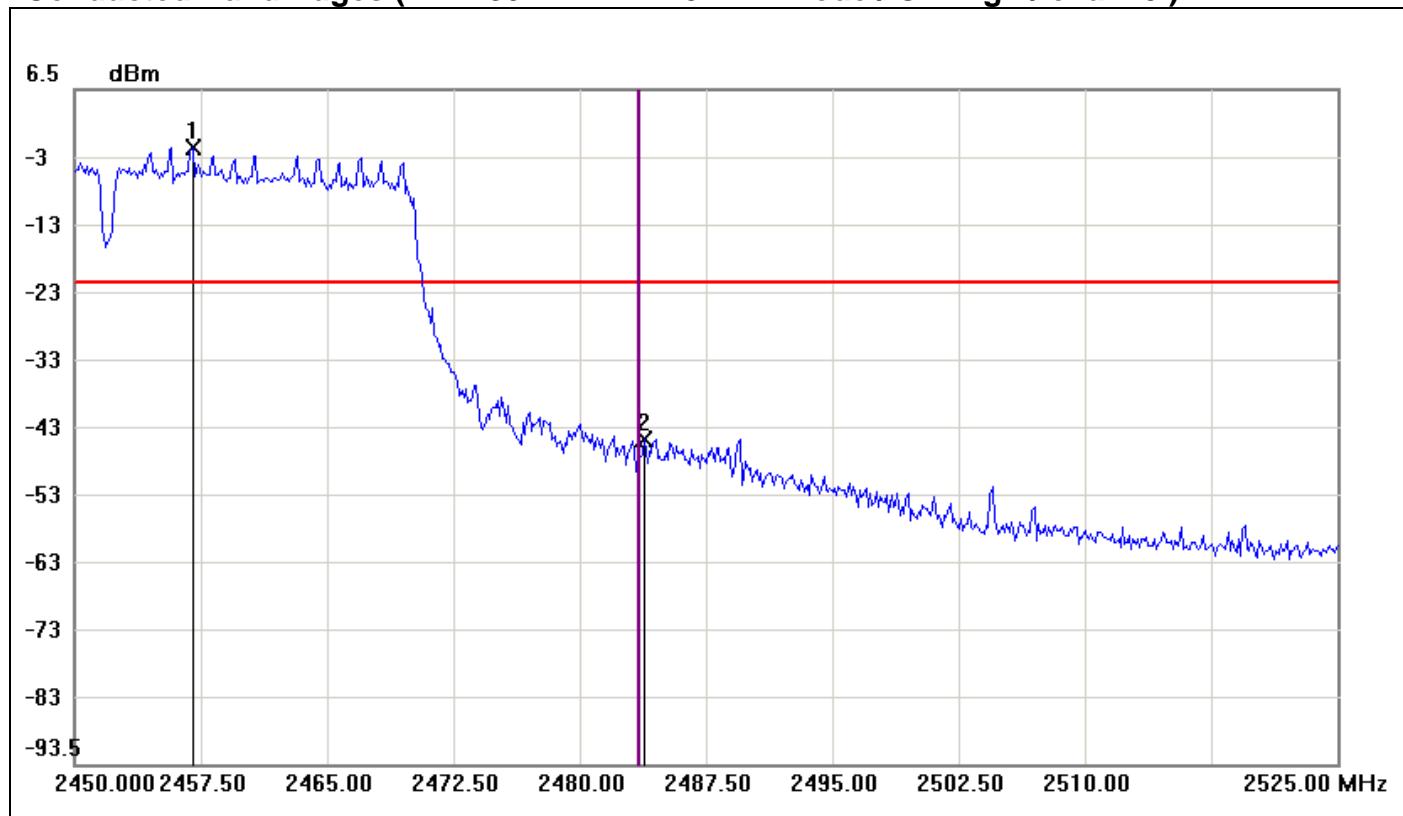


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2460.7500	4.69	-15.31	20.00
2	2483.8750	-38.94	-15.31	-23.63

**Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low / chain 0)**


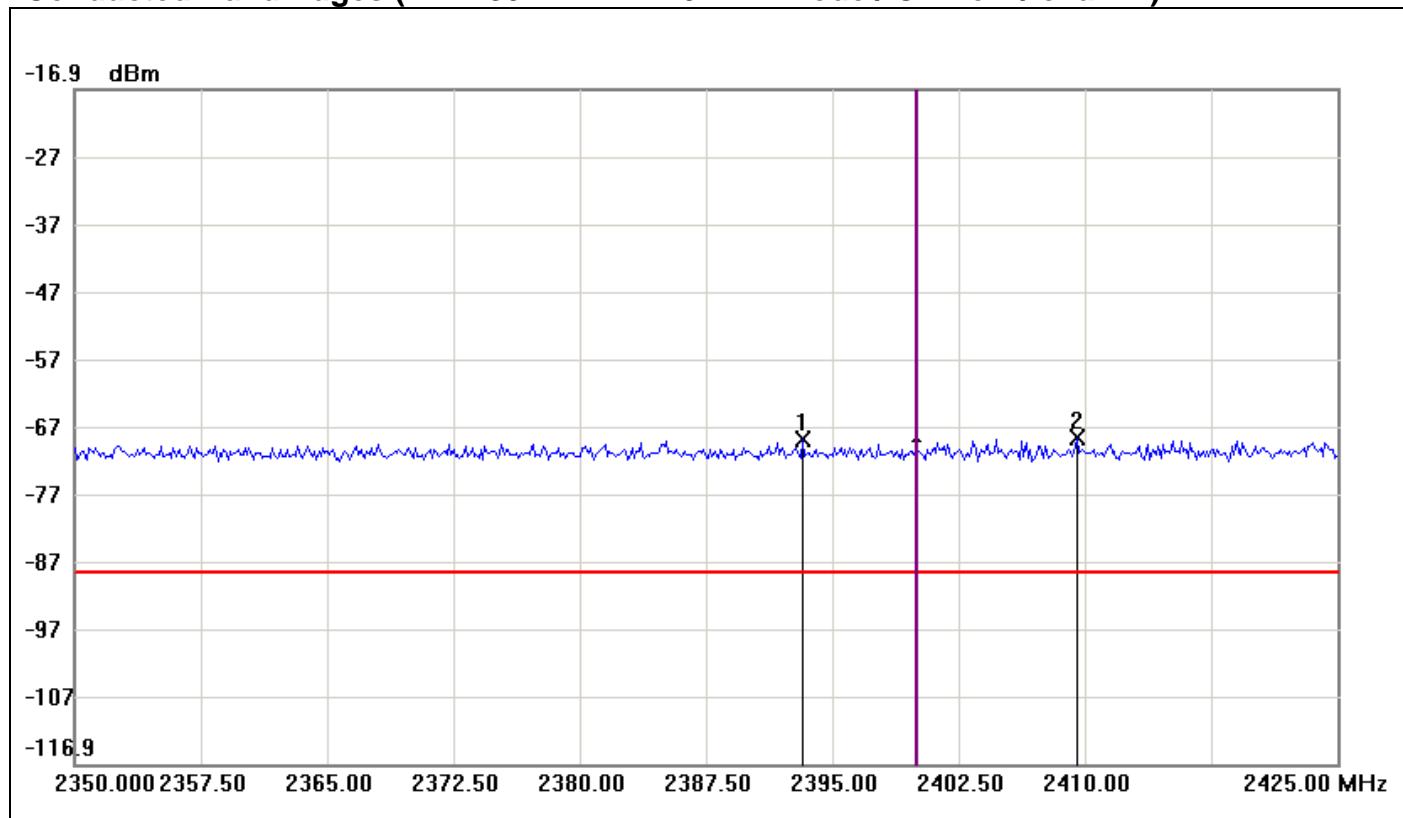
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2400.0000	-38.39	-22.83	-15.56
2	2419.5000	-2.83	-22.83	20.00

**Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High / chain 0 )**



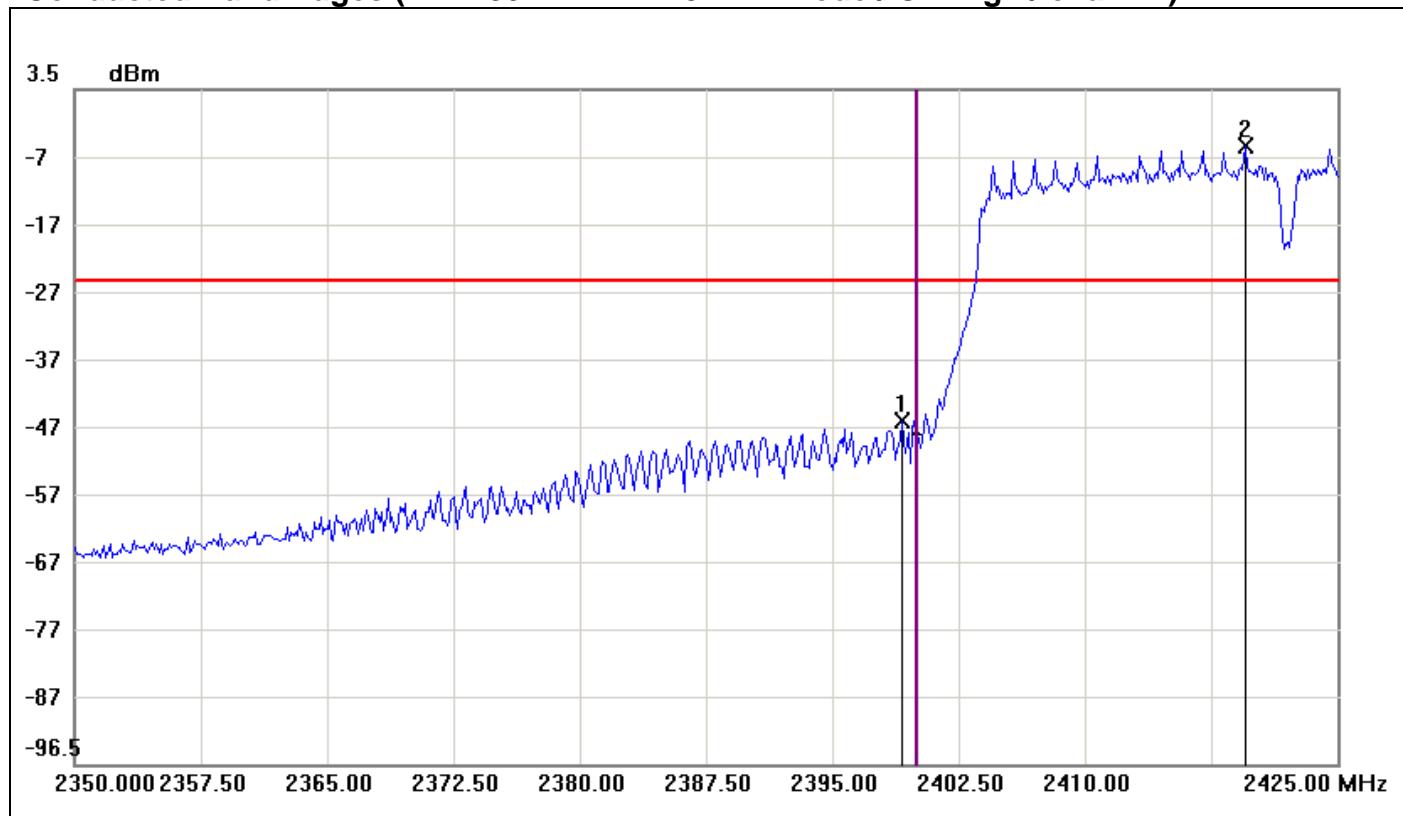
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2457.0000	-2.09	-22.09	20.00
2	2483.8750	-45.28	-22.09	-23.19

**Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low / chain 1)**



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2393.2500	-68.85	-88.61	19.76
2	2409.5000	-68.61	-88.61	20.00

**Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High / chain 1 )**




No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.1250	-45.54	-24.89	-20.65
2	2419.5000	-4.89	-24.89	20.00

## 7.5 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW=10kHz, VBW=100kHz, Span=1.5 times the DTS bandwidth, Sweep time= auto
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### TEST RESULTS

*No non-compliance noted.*

## Test Data

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	2.50	8.00	PASS
Mid	2437	5.05		PASS
High	2462	5.46		PASS

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-3.42	8.00	PASS
Mid	2437	-2.13		PASS
High	2462	-2.67		PASS

### Test mode: IEEE 802.11n HT 20 MHz mode

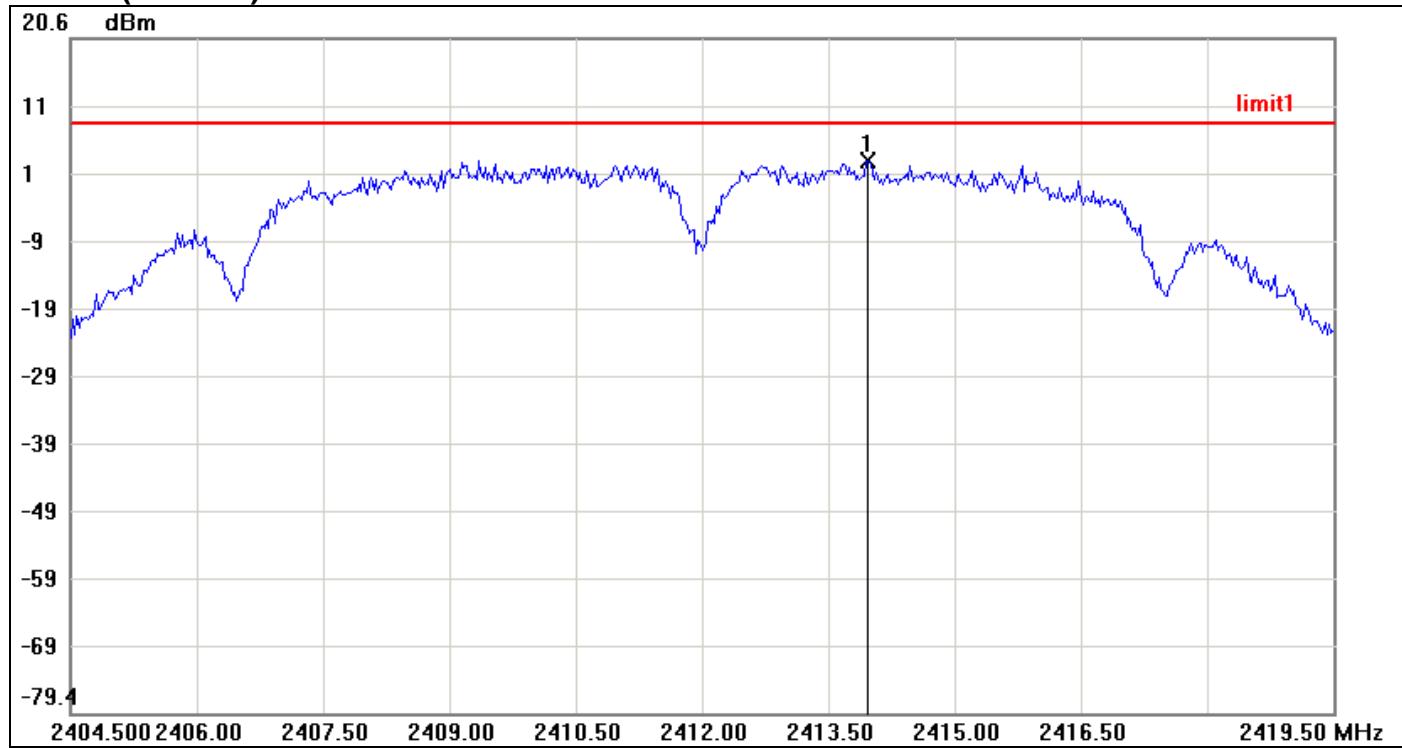
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-1.52	-1.33	1.59	8.00	PASS
Mid	2437	-2.14	-1.30	1.31		PASS
High	2462	-3.41	-2.31	0.19		PASS

### Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-10.34	-9.52	-6.90	8.00	PASS
Mid	2437	-9.96	-8.46	-6.14		PASS
High	2452	-10.36	-9.50	-6.90		PASS

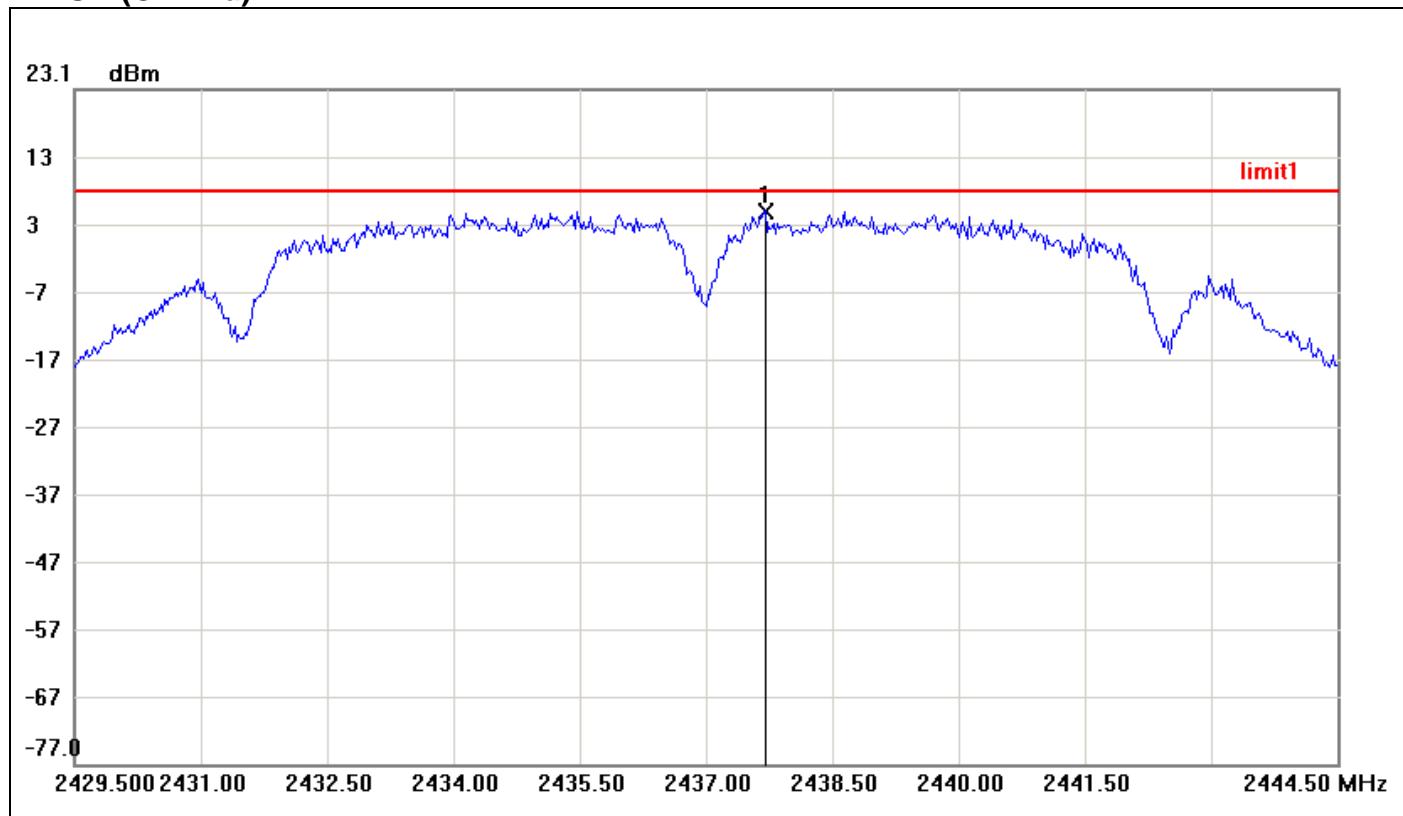
#### **Remark:**

1. Total PPSD (dBm) =  $10 \cdot \log(10^{(Chain\ 0\ PPSD\ / 10)} + 10^{(Chain\ 1\ PPSD\ / 10)})$

**Test Plot**
**IEEE 802.11b mode**
**PPSD (CH Low)**


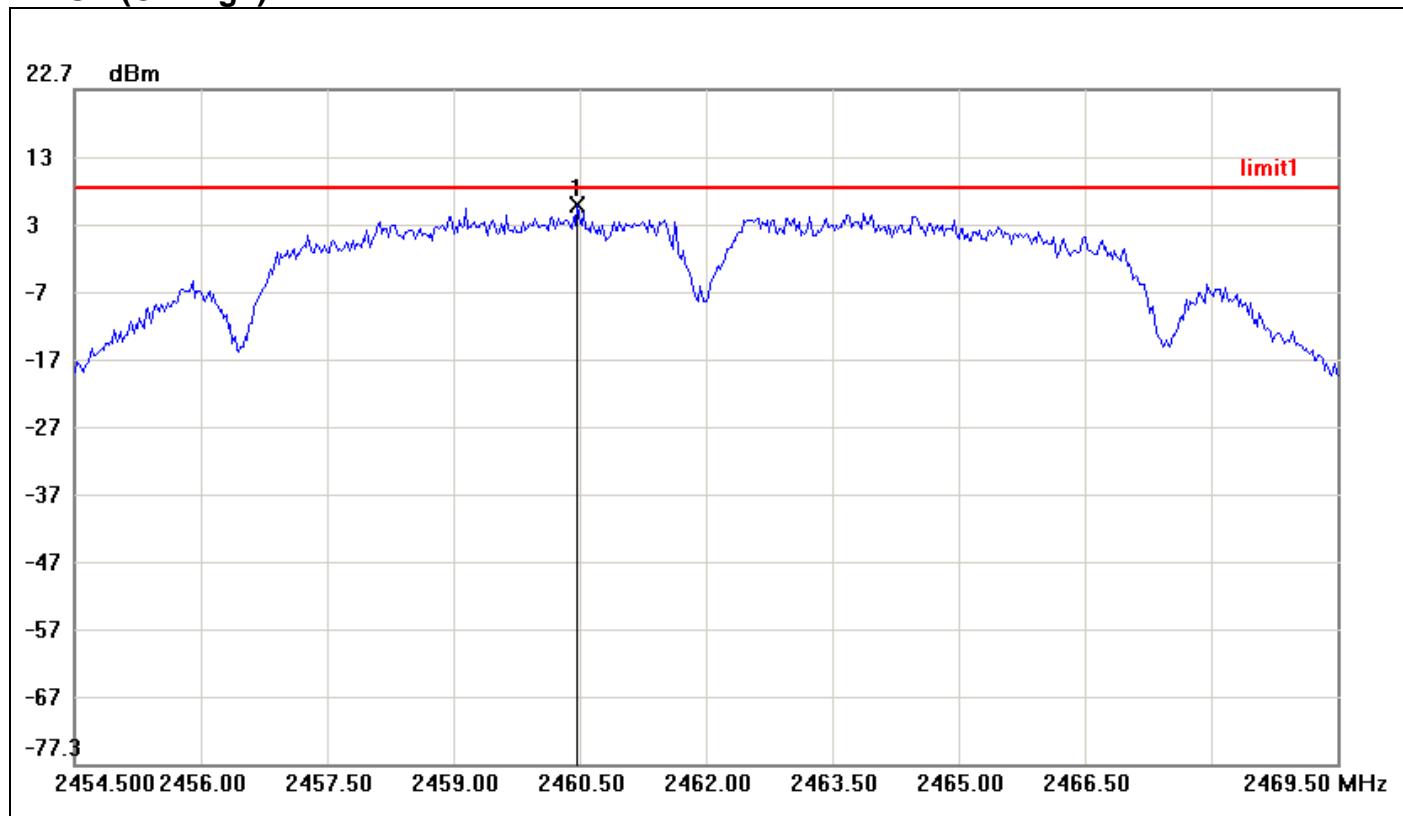
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2413.9750	2.50	6.00	-3.50

**PPSD (CH Mid)**

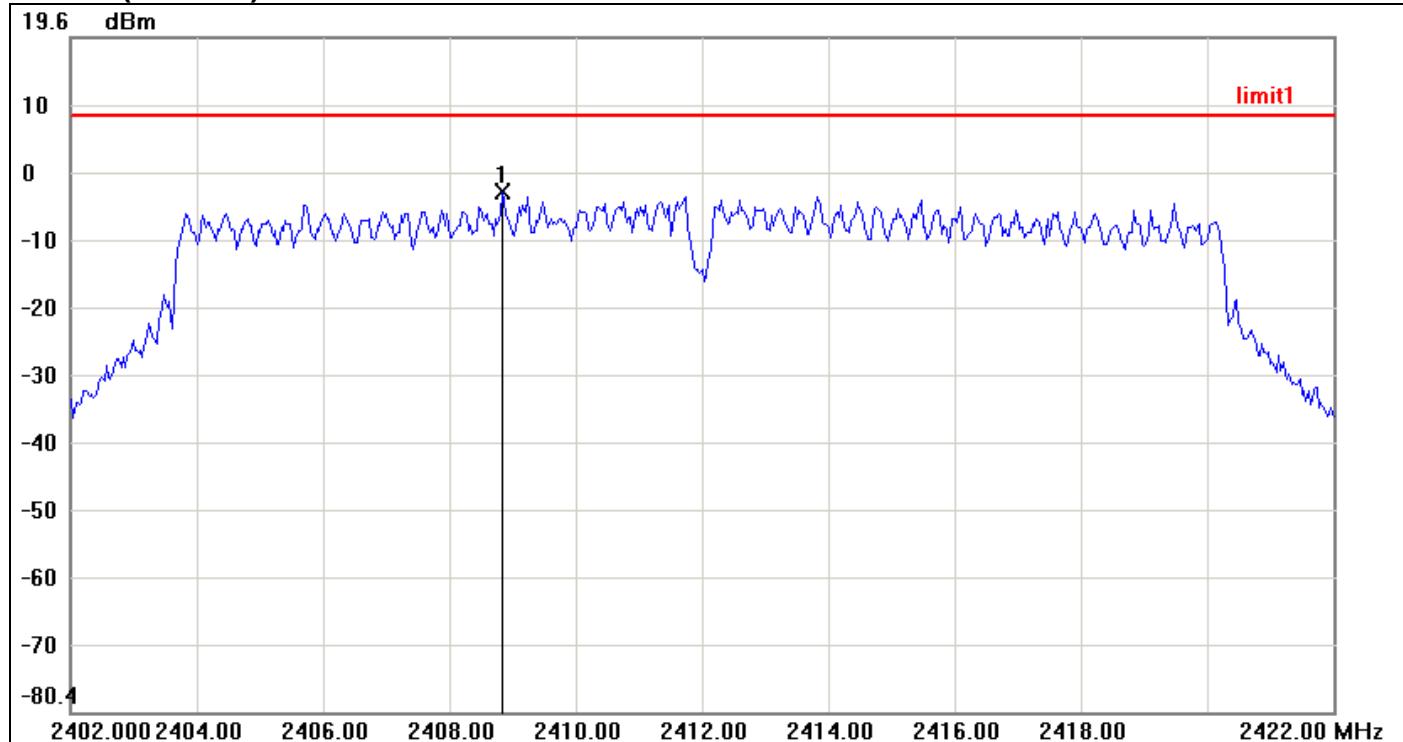


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2437.7000	5.05	6.00	-0.95

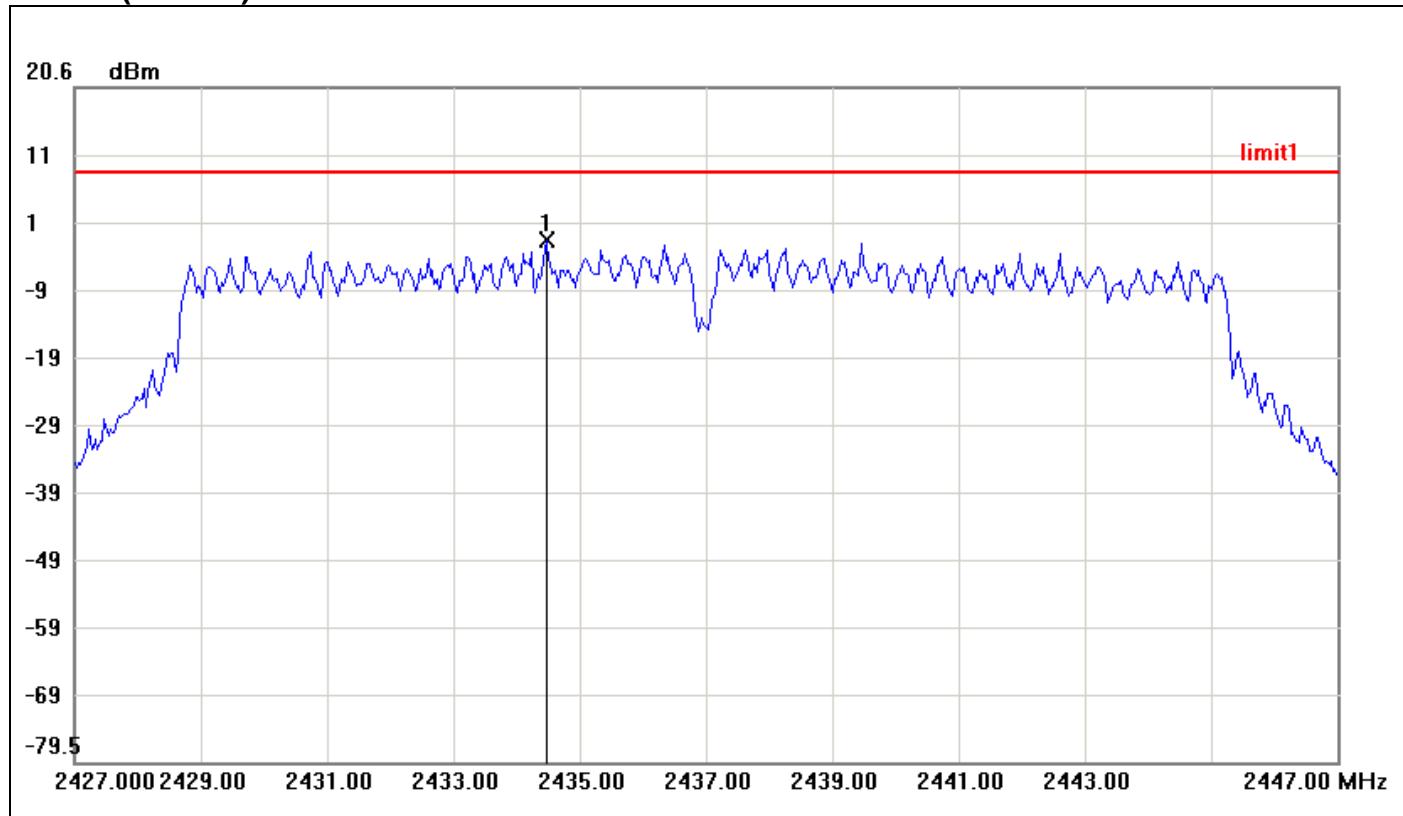
**PPSD (CH High)**



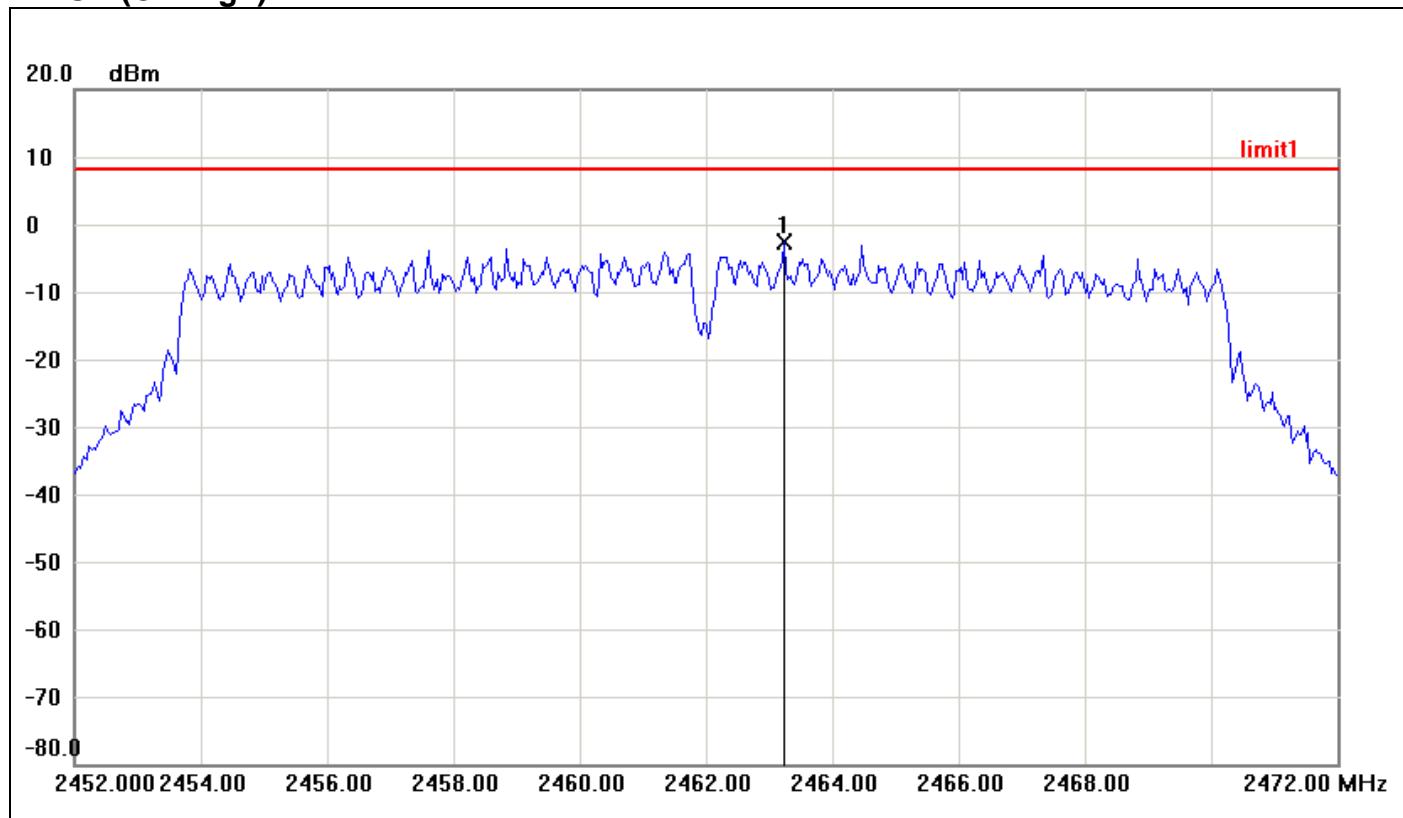
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2460.4750	5.46	6.00	-0.54

**IEEE 802.11g mode****PPSD (CH Low)**

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2408.8333	-3.42	6.00	-9.42

**PPSD (CH Mid)**

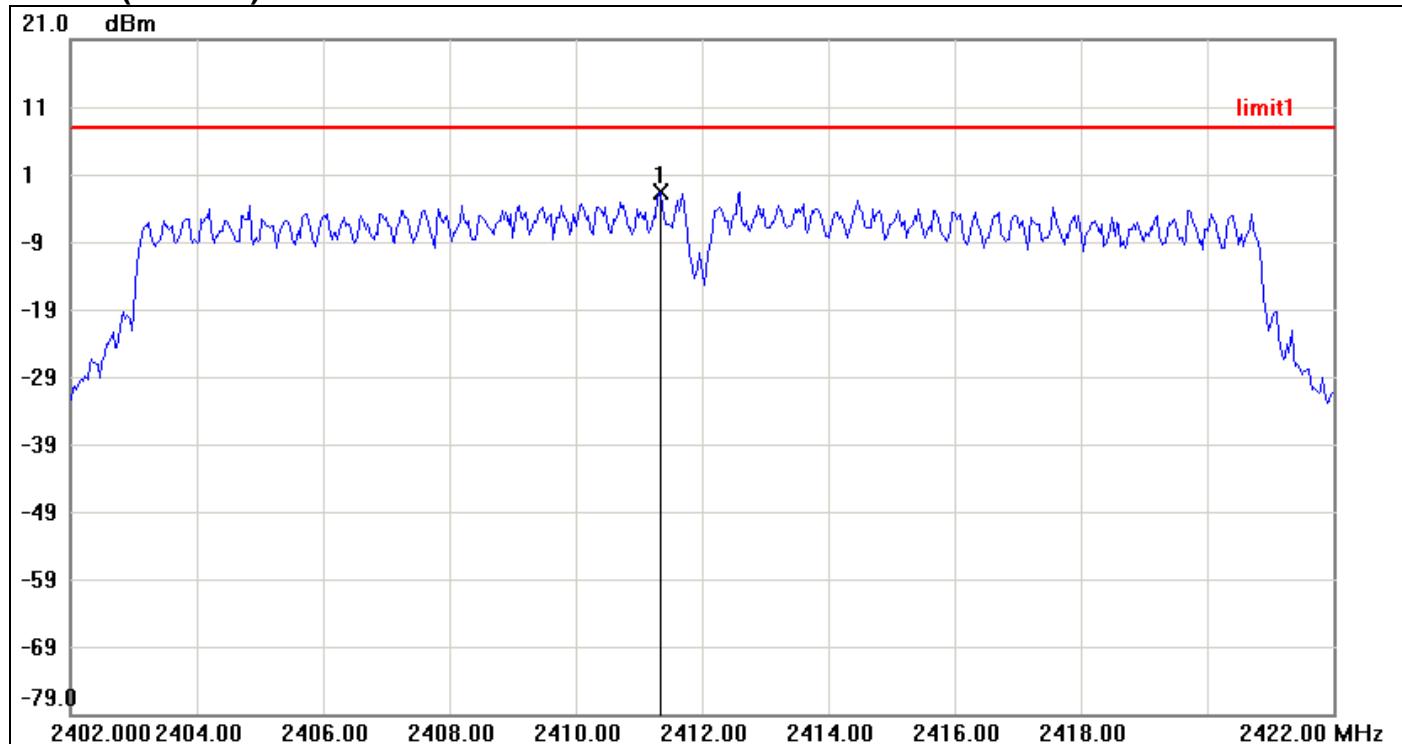
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2434.4667	-2.13	6.00	-8.13

**PPSD (CH High)**

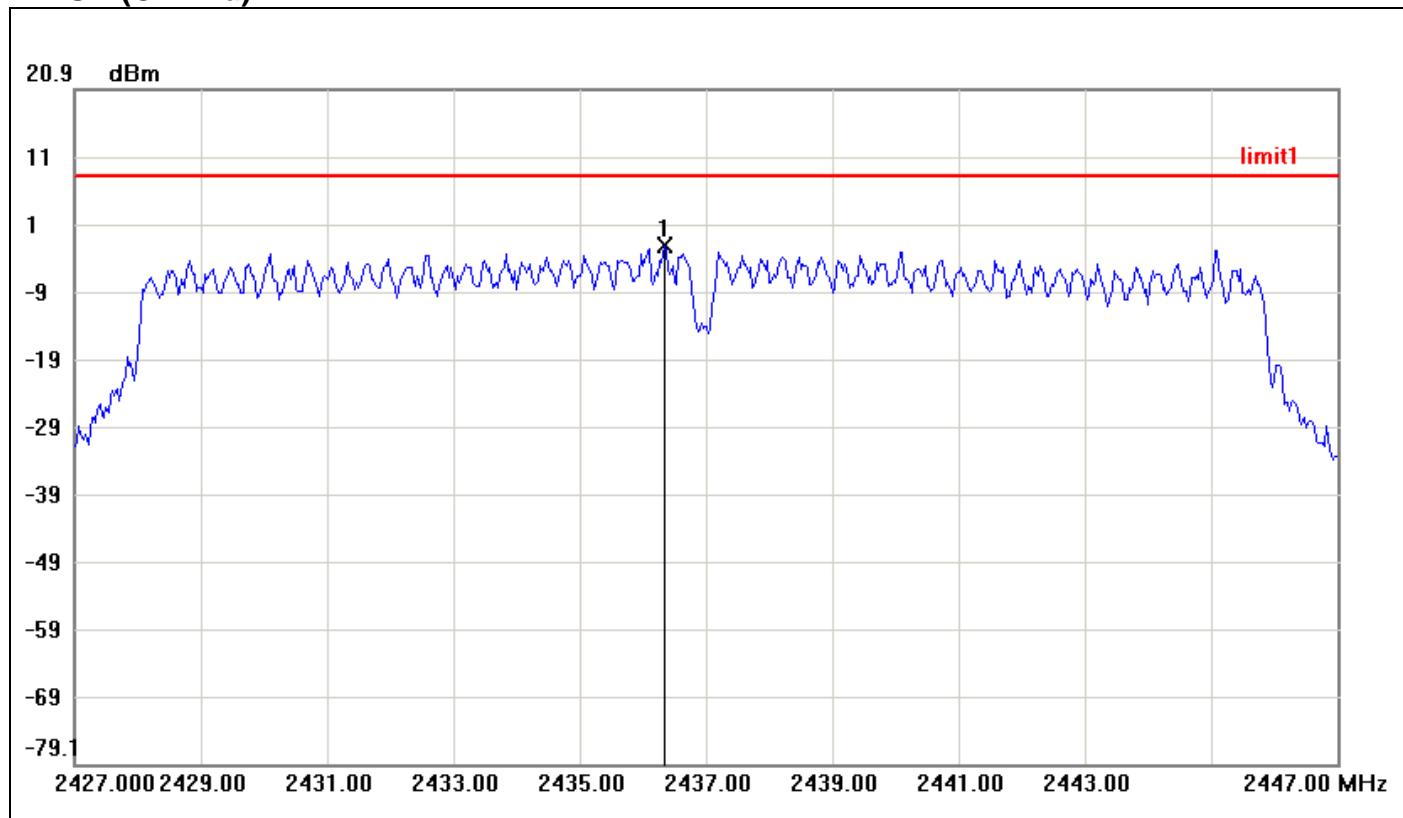
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2463.2333	-2.67	6.00	-8.67

**IEEE 802.11n HT 20 MHz mode / Chain 0**

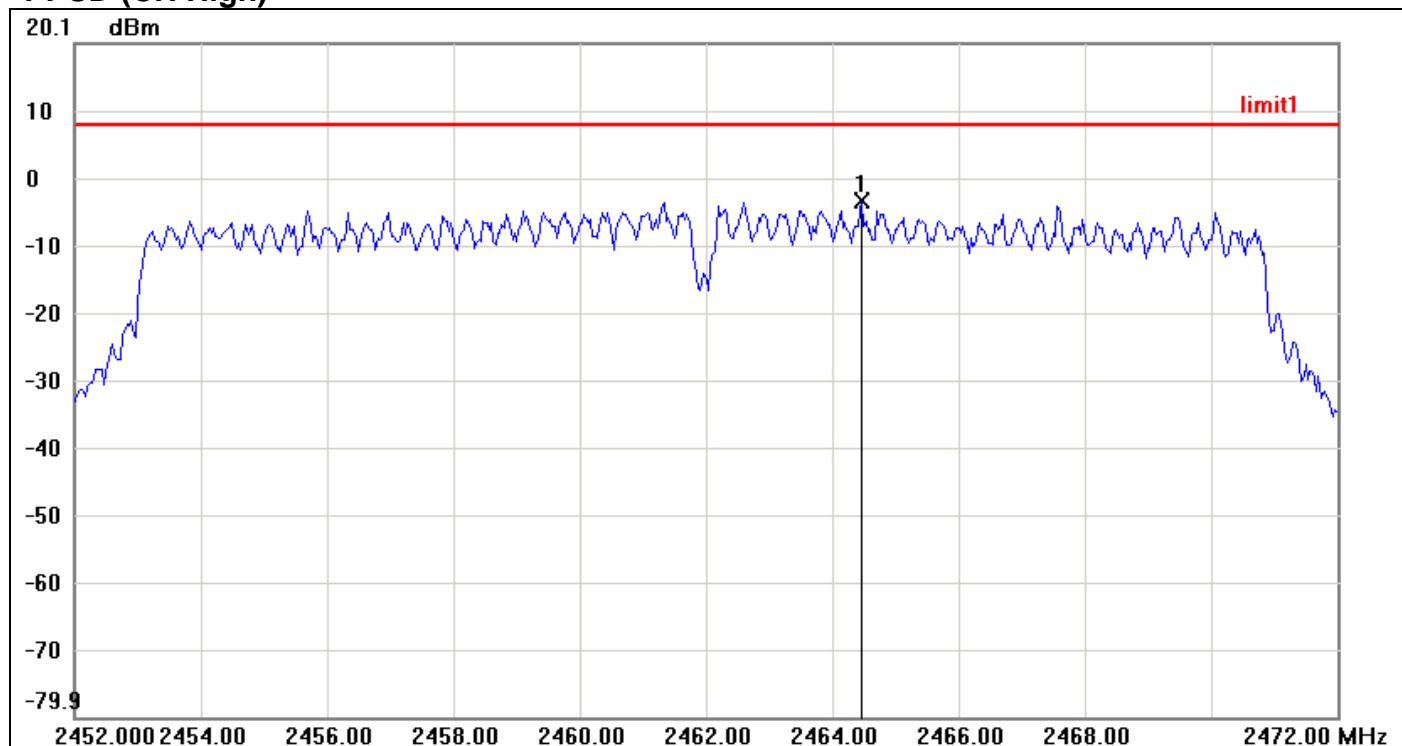
**PPSD (CH Low)**



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2411.3333	-1.52	6.00	-7.52

**PPSD (CH Mid)**

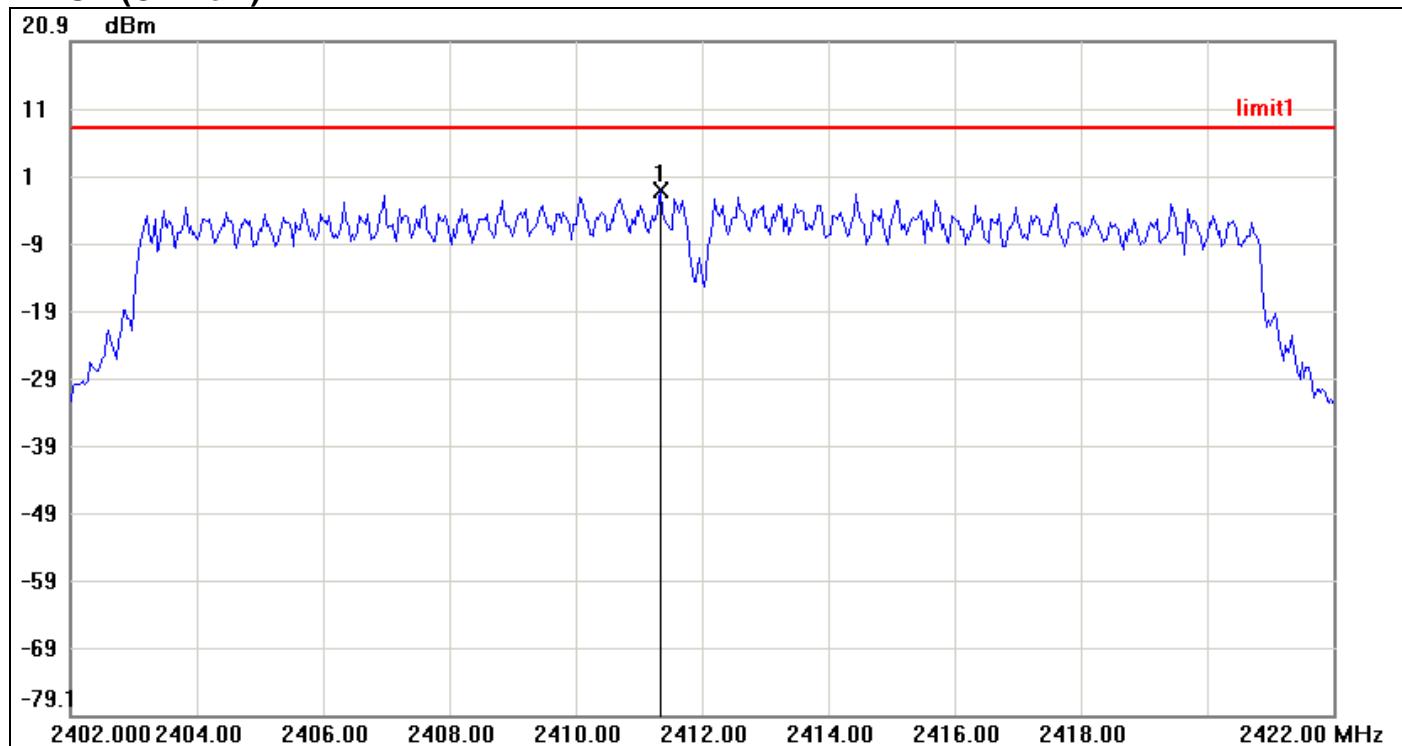
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2436.3333	-2.14	6.00	-8.14

**PPSD (CH High)**


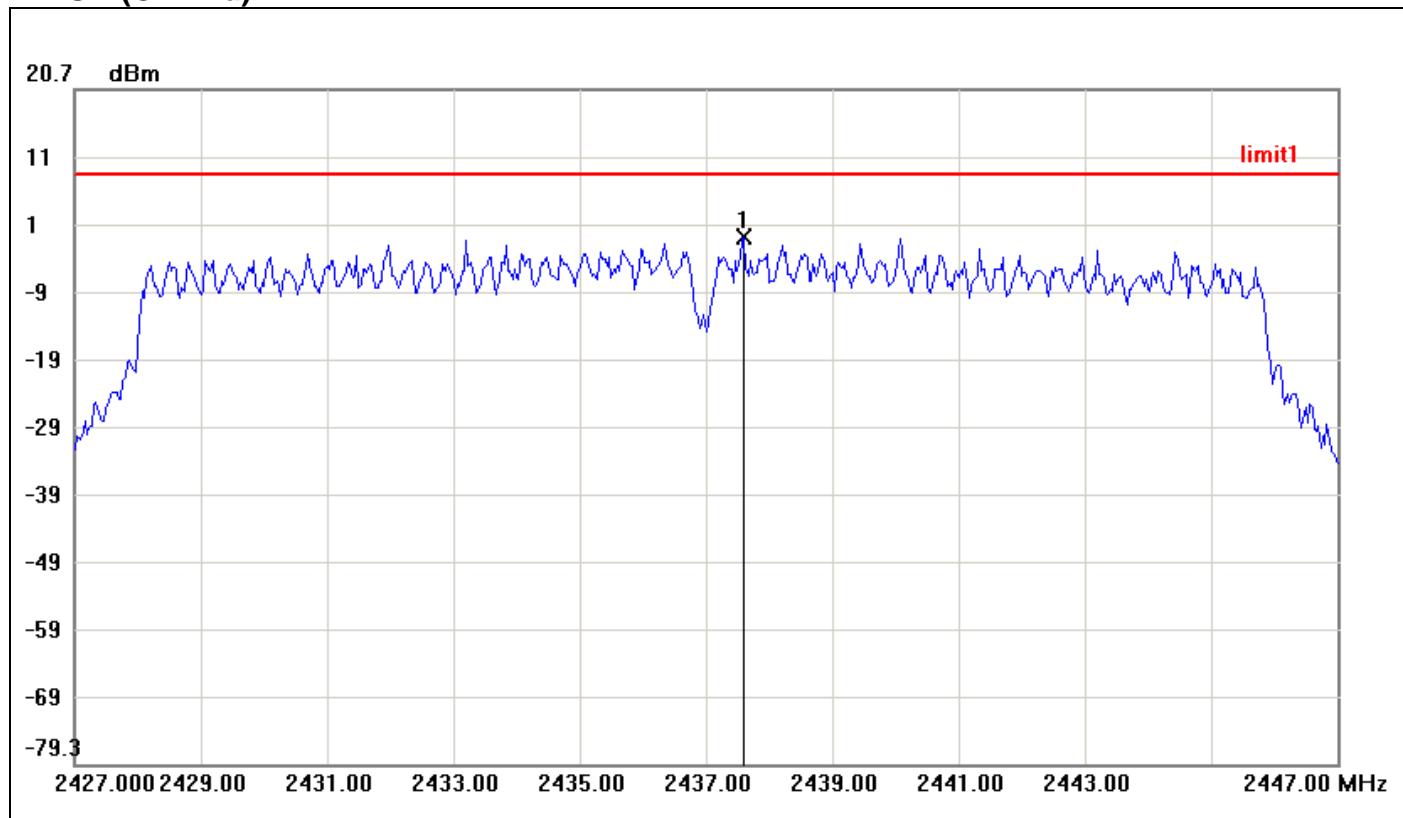
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2464.4667	-3.41	6.00	-9.41

**IEEE 802.11n HT 20 MHz mode / Chain 1**

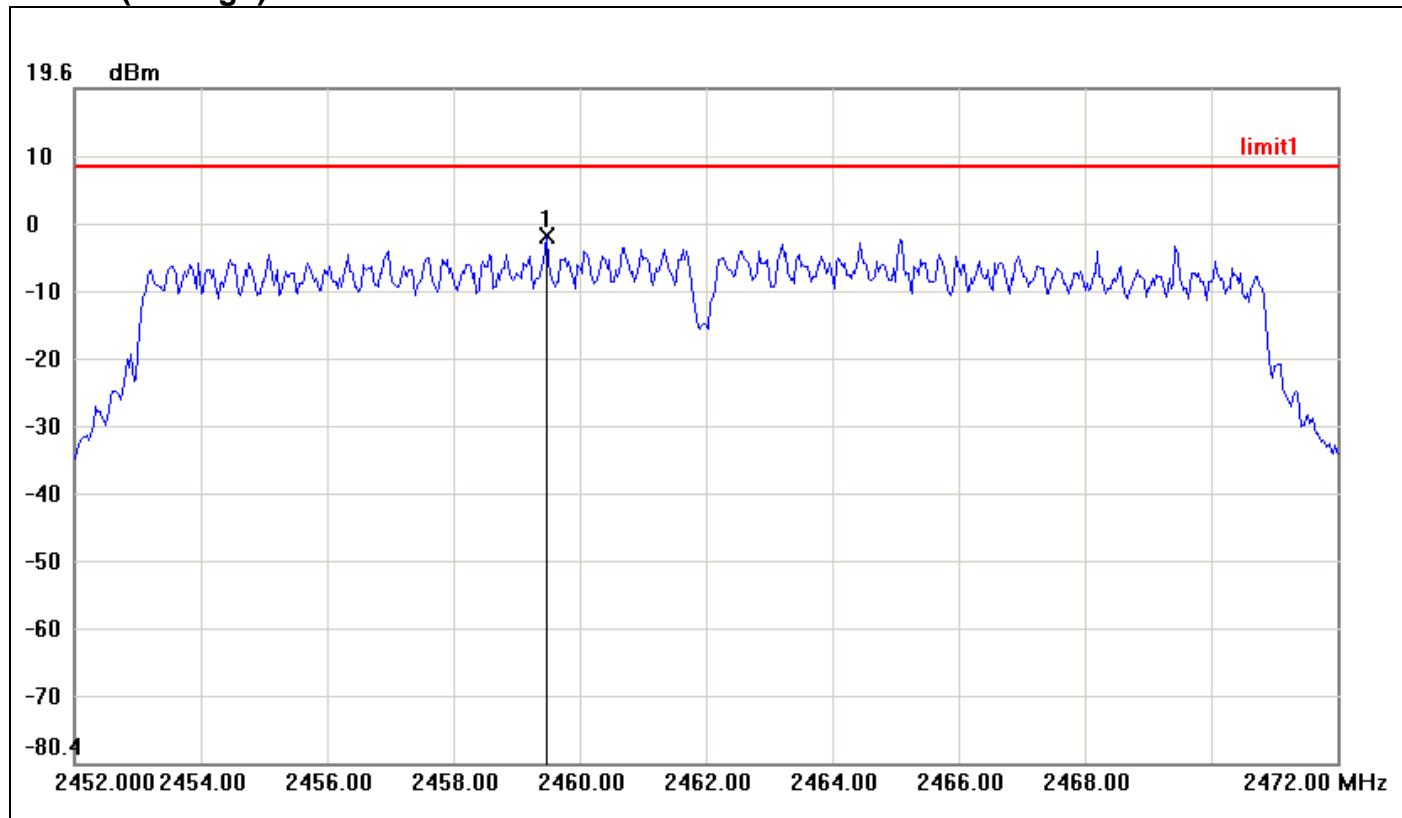
**PPSD (CH Low)**



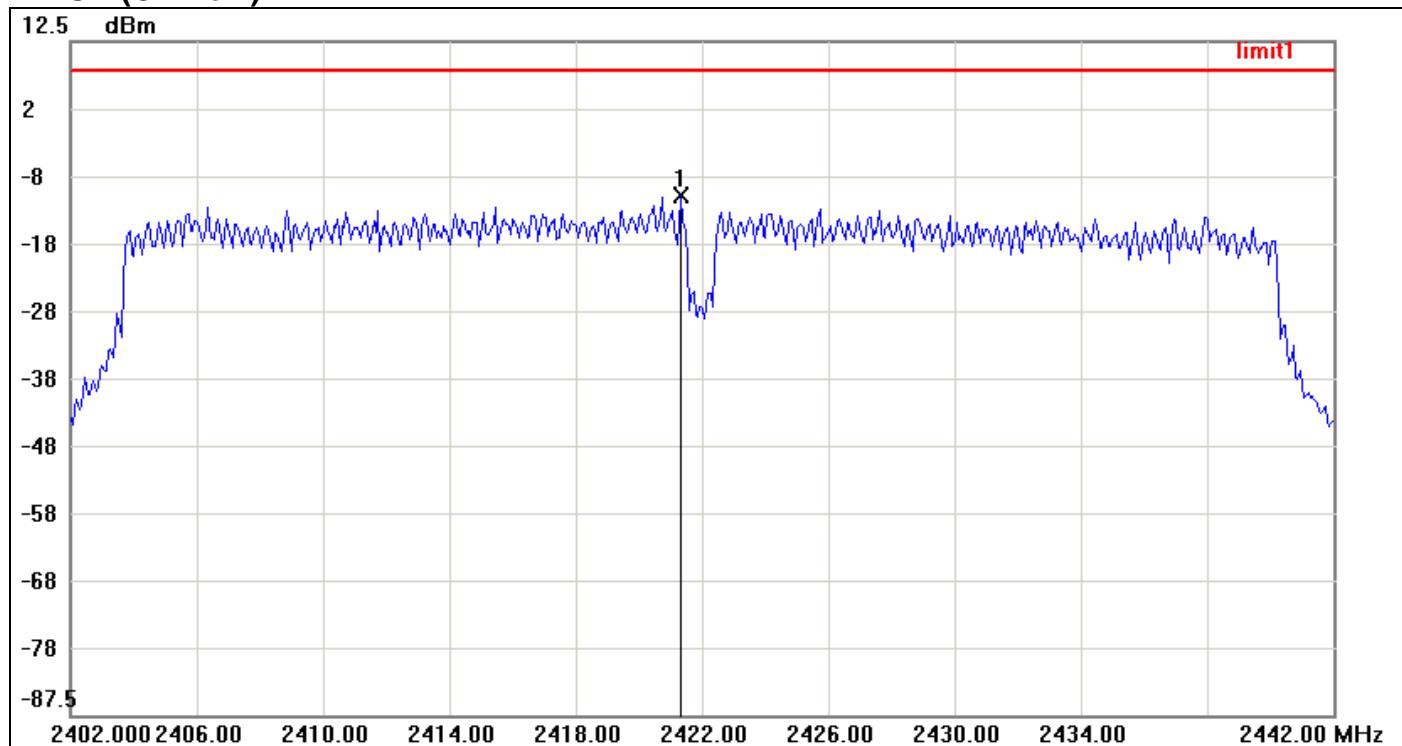
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2411.3333	-1.33	6.00	-7.33

**PPSD (CH Mid)**

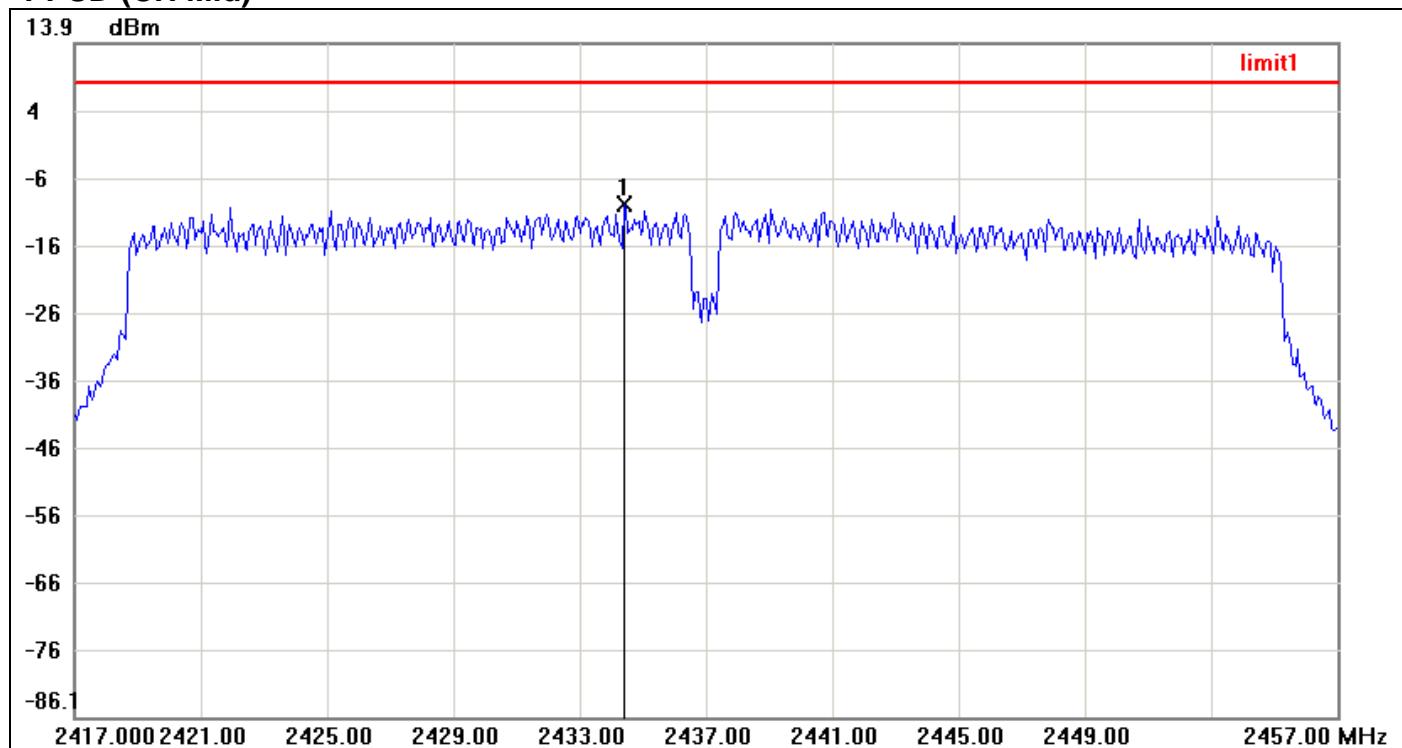
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2437.6000	-1.30	6.00	-7.30

**PPSD (CH High)**

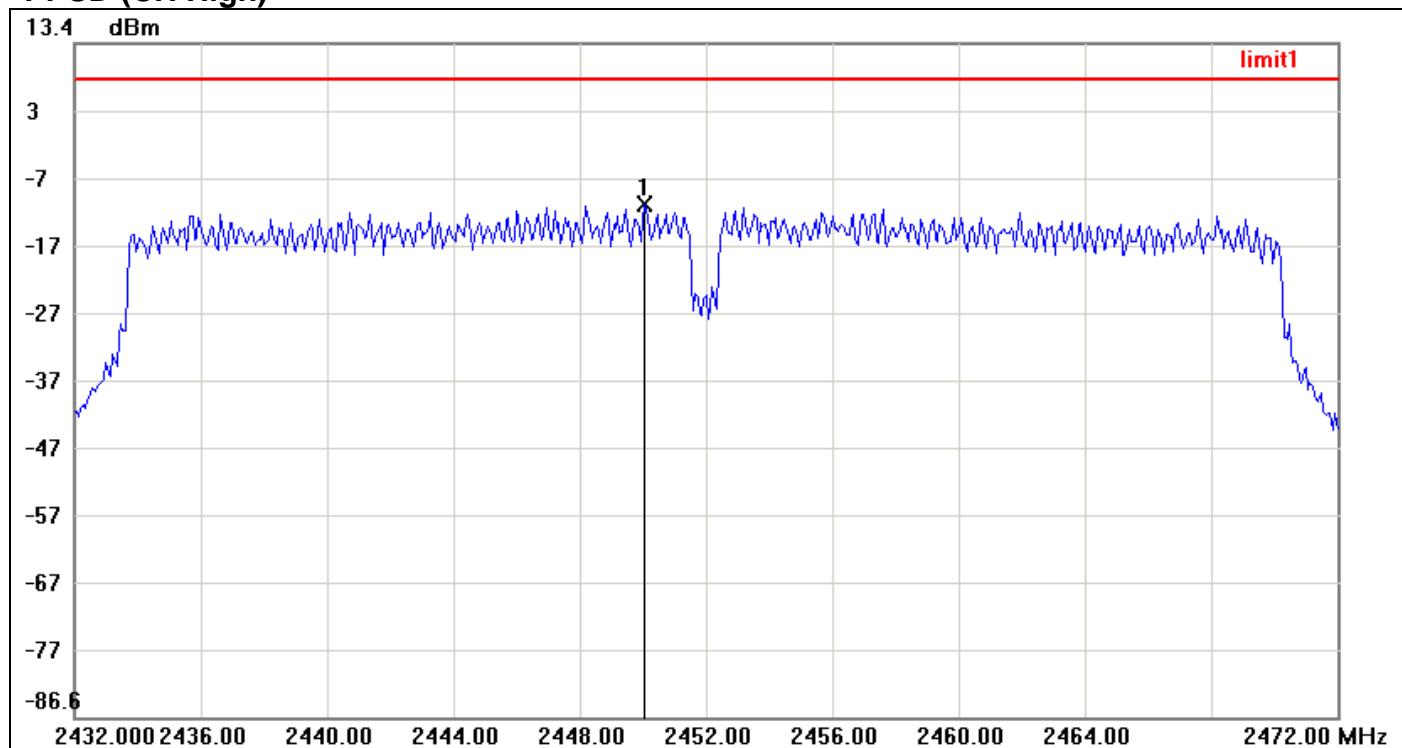
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2459.4667	-2.31	6.00	-8.31

**IEEE 802.11n HT 40 MHz mode / Chain 0****PPSD (CH Low)**

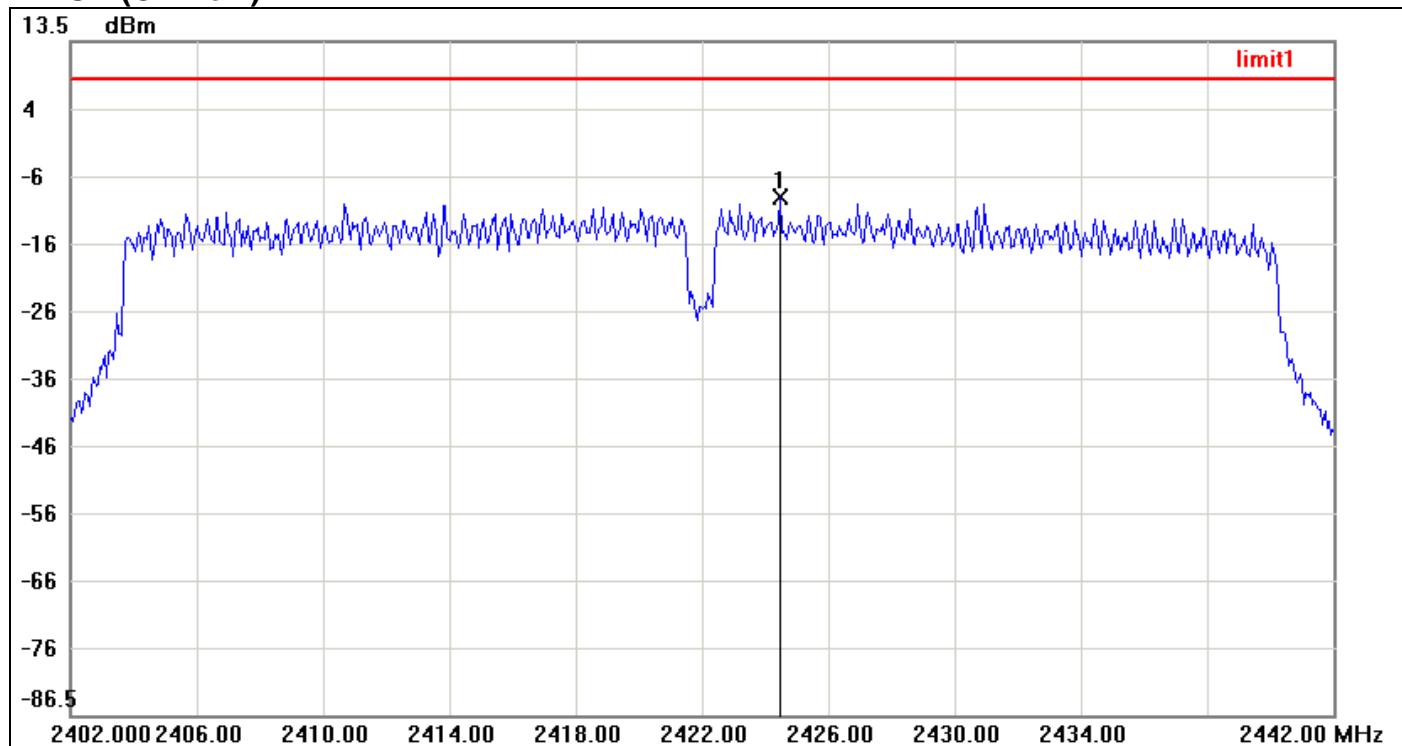
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2421.3333	-10.34	6.00	-16.34

**PPSD (CH Mid)**

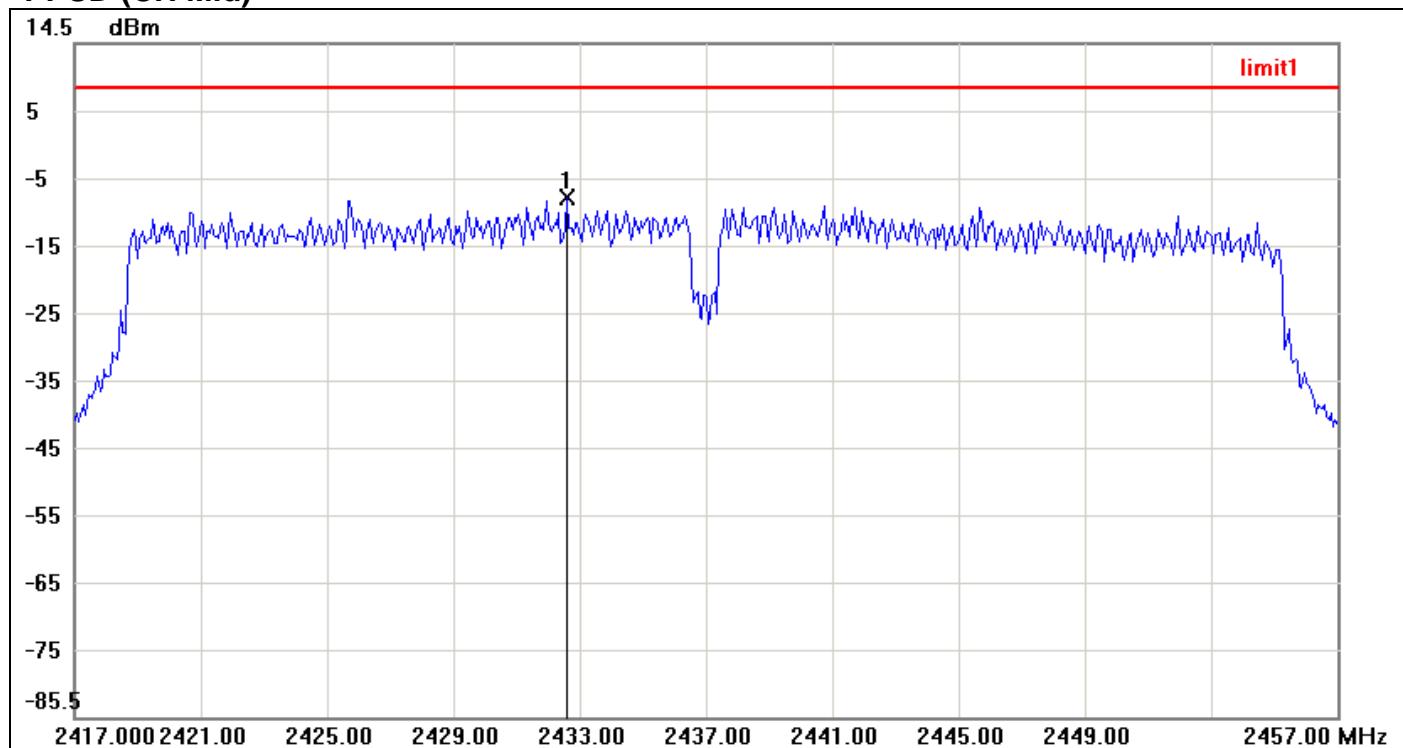
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2434.4000	-9.96	6.00	-15.96

**PPSD (CH High)**

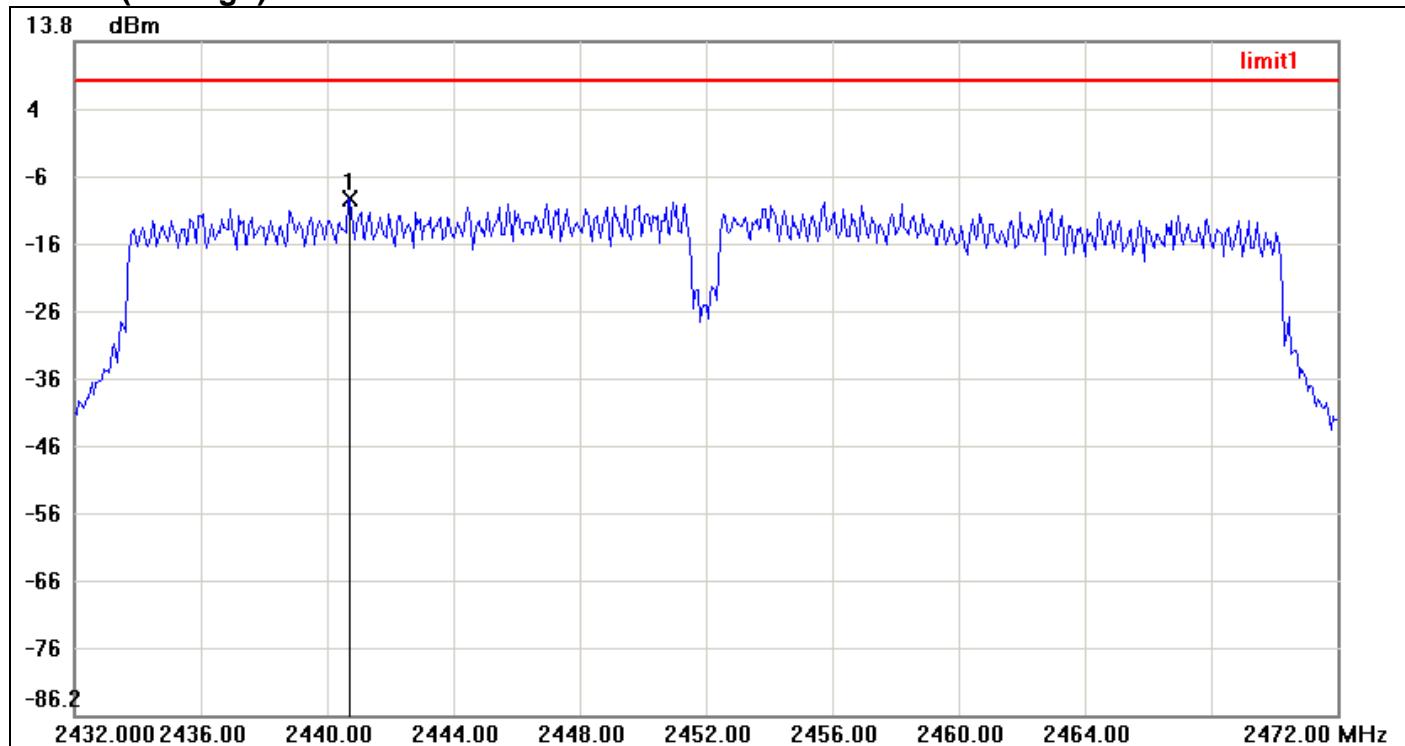
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2450.0667	-10.36	6.00	-16.36

**IEEE 802.11n HT 40 MHz mode / Chain 1****PPSD (CH Low)**

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2424.4667	-9.52	6.00	-15.52

**PPSD (CH Mid)**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2432.6000	-8.46	6.00	-14.46

**PPSD (CH High)**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.7333	-9.50	6.00	-15.50


## 7.6 SPURIOUS EMISSIONS

### 7.6.1 Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

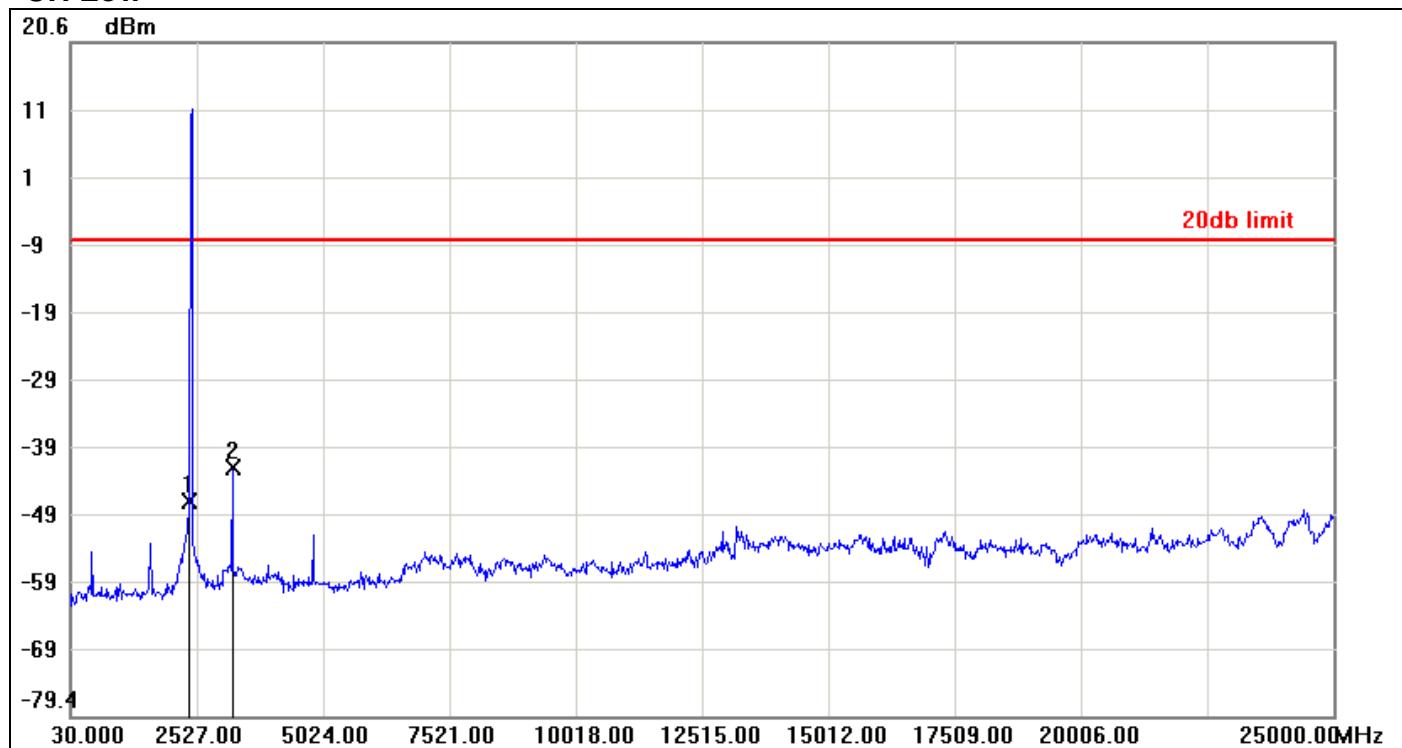
Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 25GHz range with the transmitter set to the lowest, middle, and highest channels.

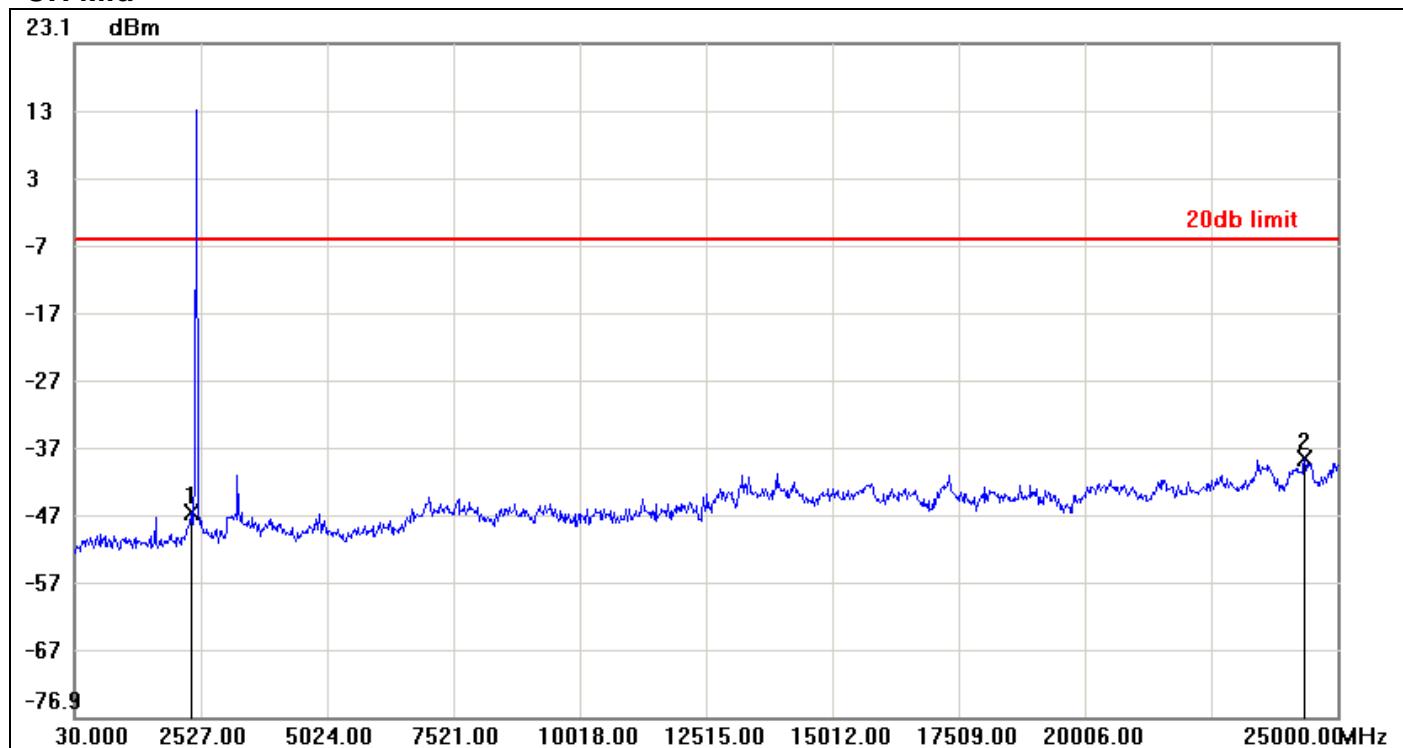
#### TEST RESULTS

*No non-compliance noted.*

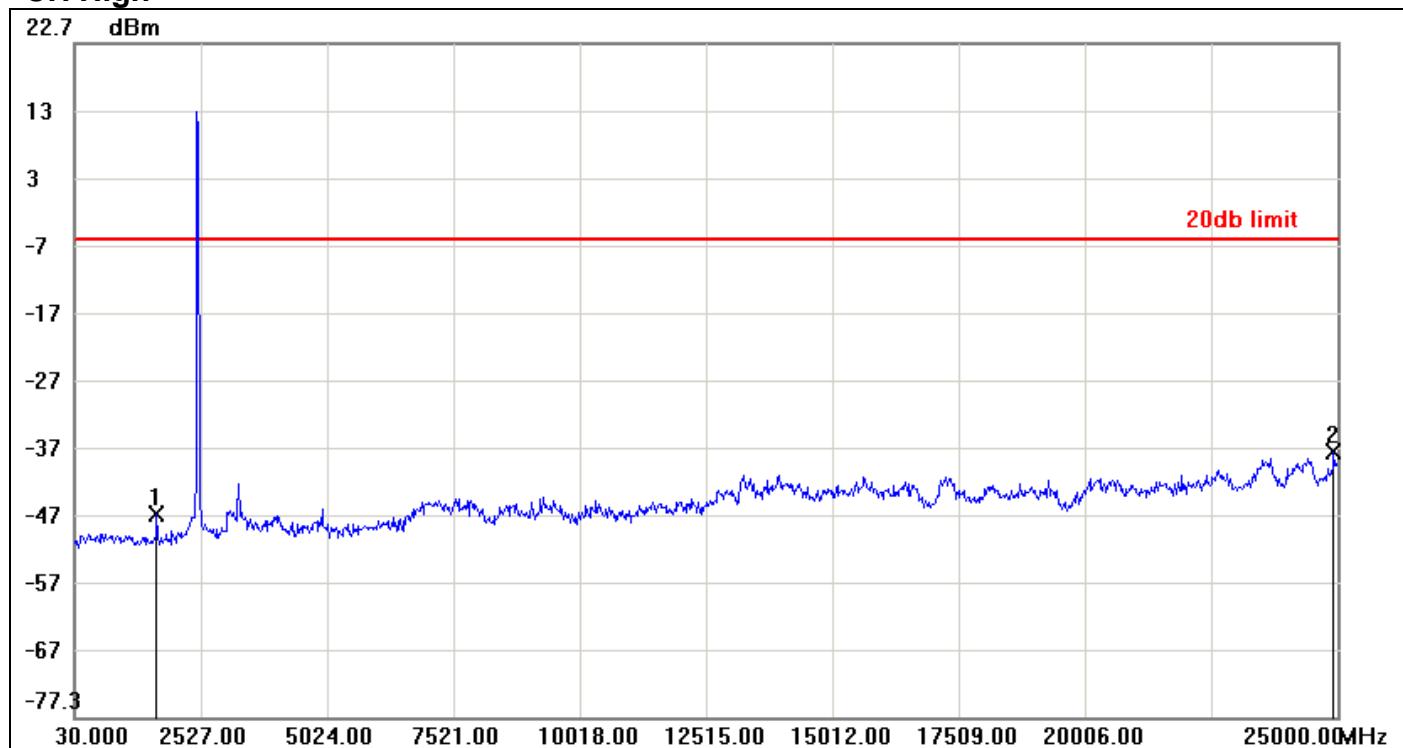
**Test Plot**
**IEEE 802.11b mode**
**CH Low**


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-47.53	-8.75	-38.78
2	3226.1600	-42.62	-8.75	-33.87

**CH Mid**



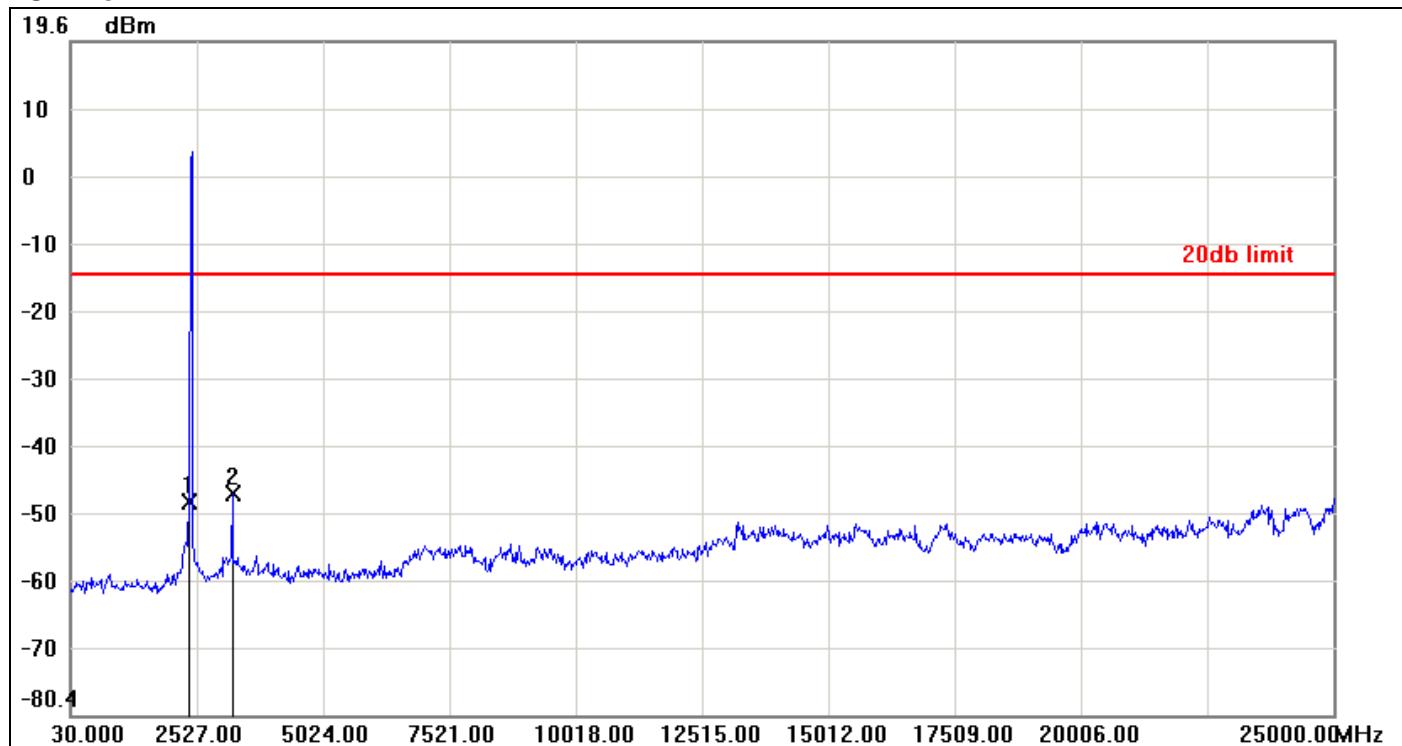
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2327.2400	-46.60	-6.13	-40.47
2	24350.7800	-38.51	-6.13	-32.38

**CH High**

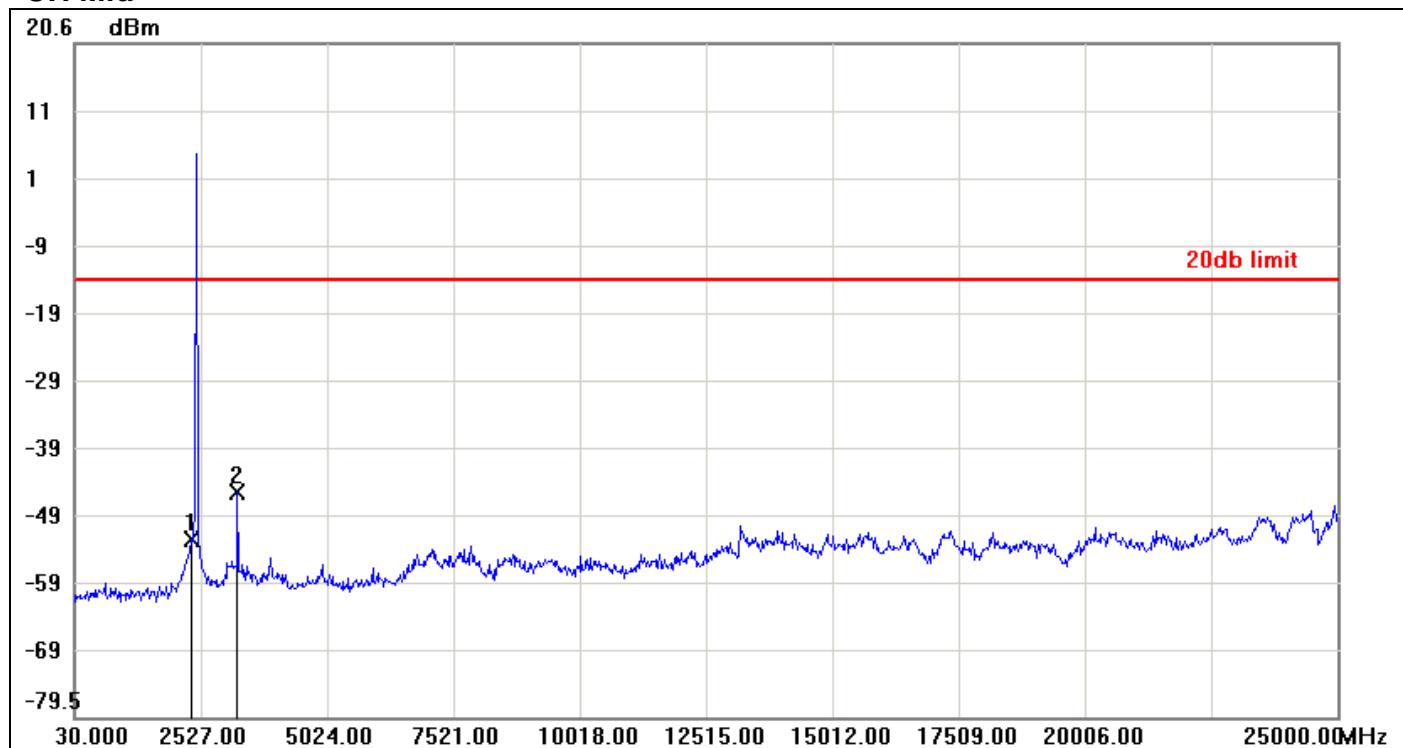
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1653.0500	-47.30	-6.50	-40.80
2	24925.0900	-38.05	-6.50	-31.55

**IEEE 802.11g mode**

**CH Low**

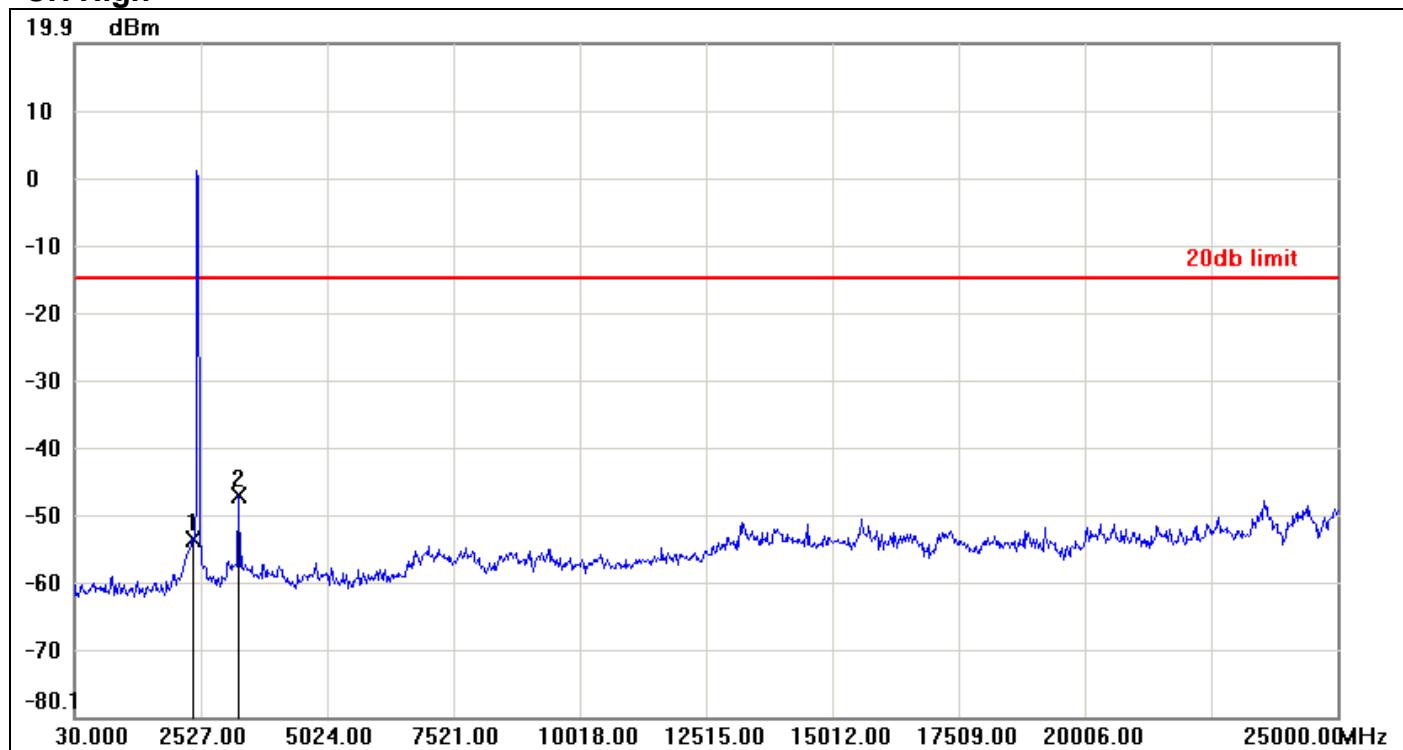


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-48.85	-15.10	-33.75
2	3226.1600	-47.42	-15.10	-32.32

**CH Mid**

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2352.2100	-53.17	-14.49	-38.68
2	3251.1300	-46.11	-14.49	-31.62

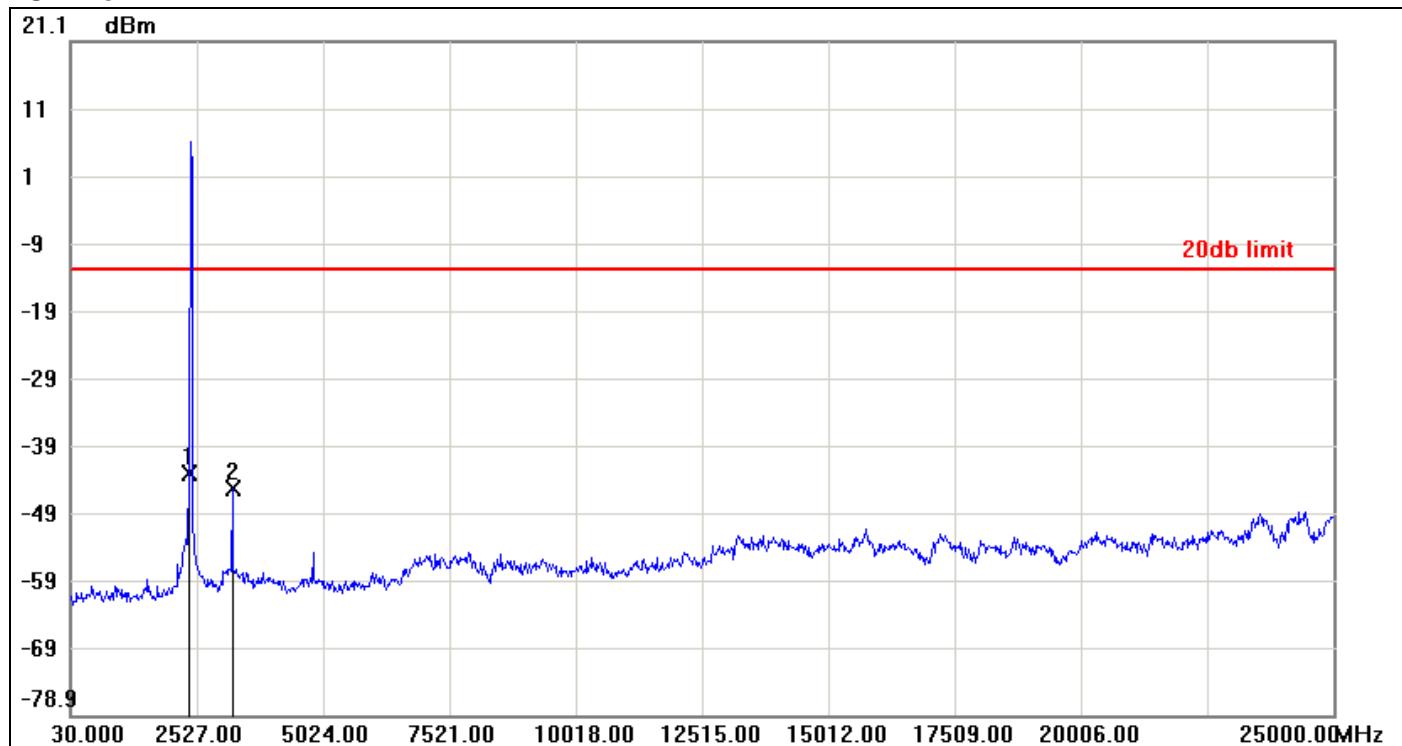
**CH High**



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-53.63	-14.92	-38.71
2	3276.1000	-47.16	-14.92	-32.24

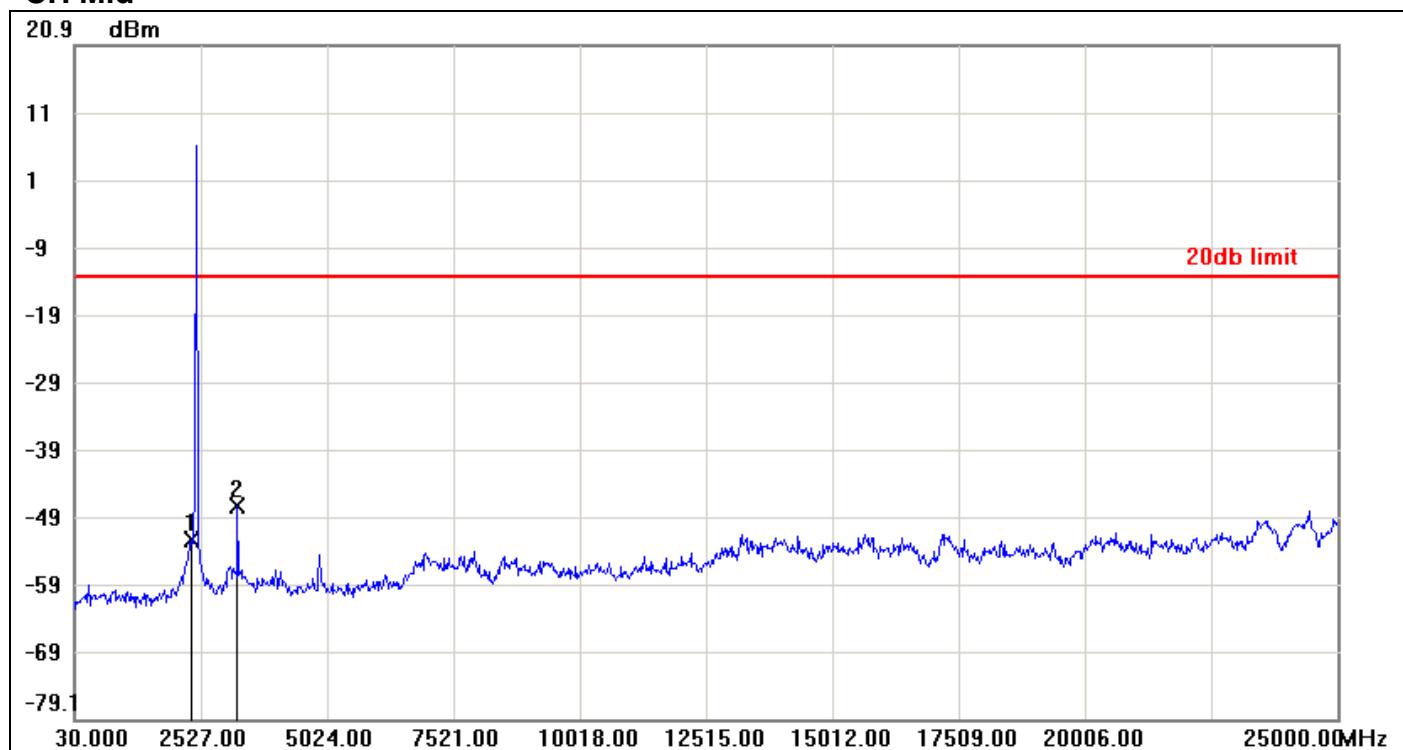
**IEEE 802.11n HT 20 MHz mode / Chain 0**

**CH Low**

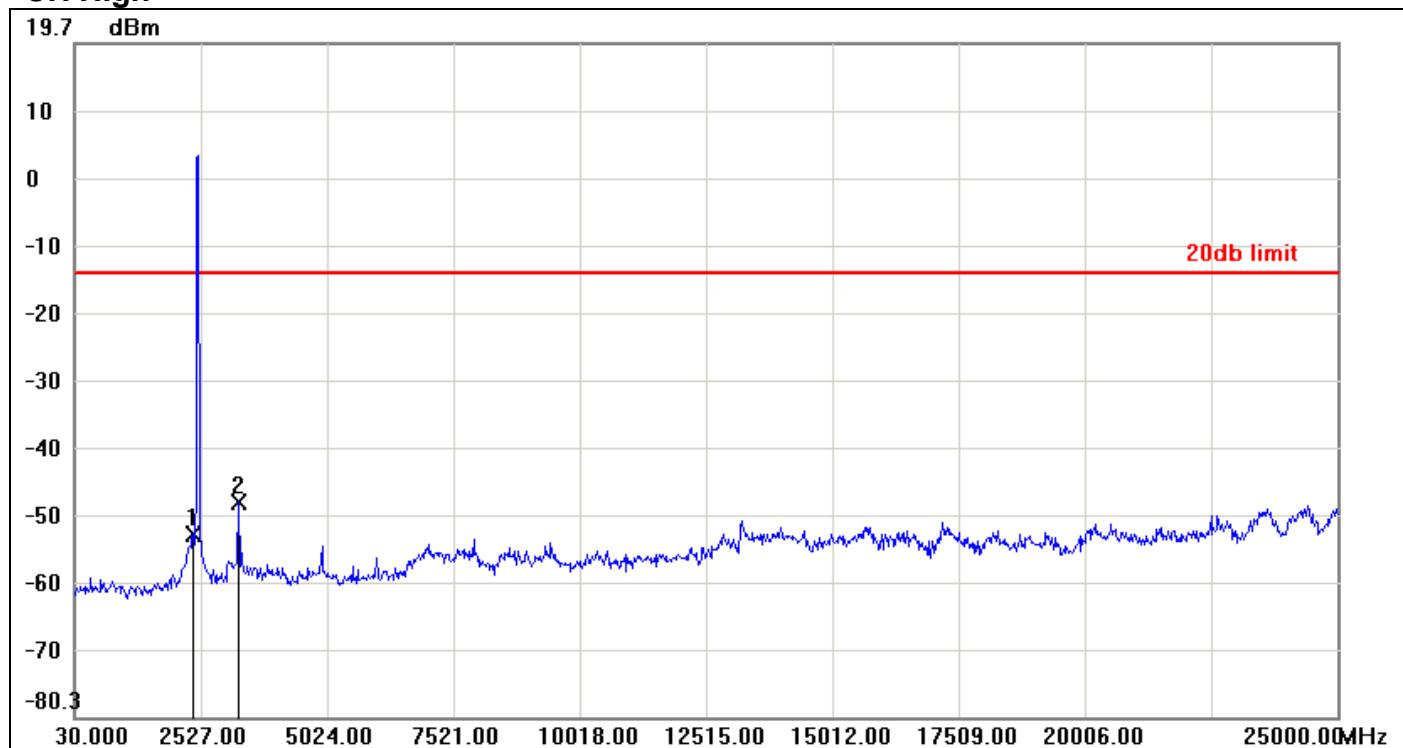


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-43.06	-12.86	-30.20
2	3226.1600	-45.25	-12.86	-32.39

## CH Mid



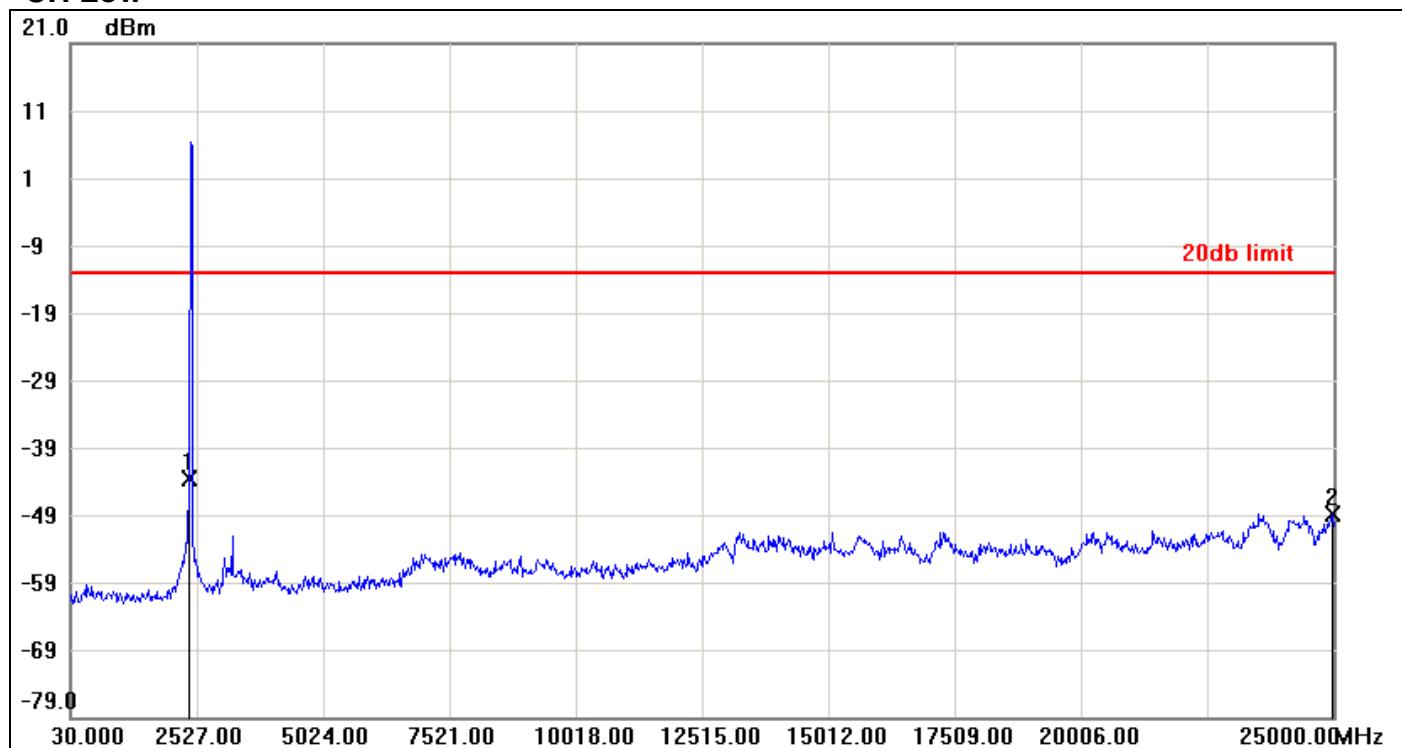
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2327.2400	-52.53	-13.36	-39.17
2	3251.1300	-47.42	-13.36	-34.06

**CH High**

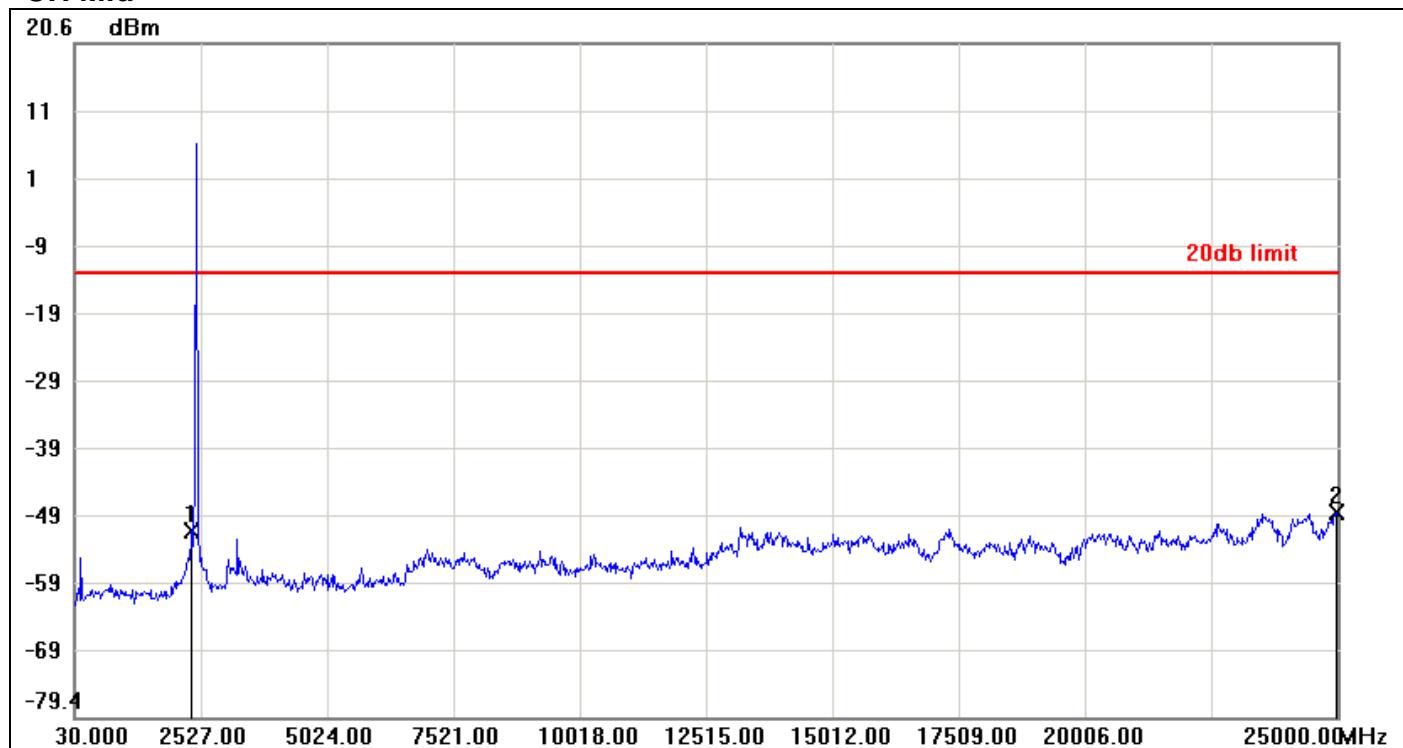
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-53.06	-14.42	-38.64
2	3276.1000	-48.37	-14.42	-33.95

**IEEE 802.11n HT 20 MHz mode / Chain 1**

**CH Low**

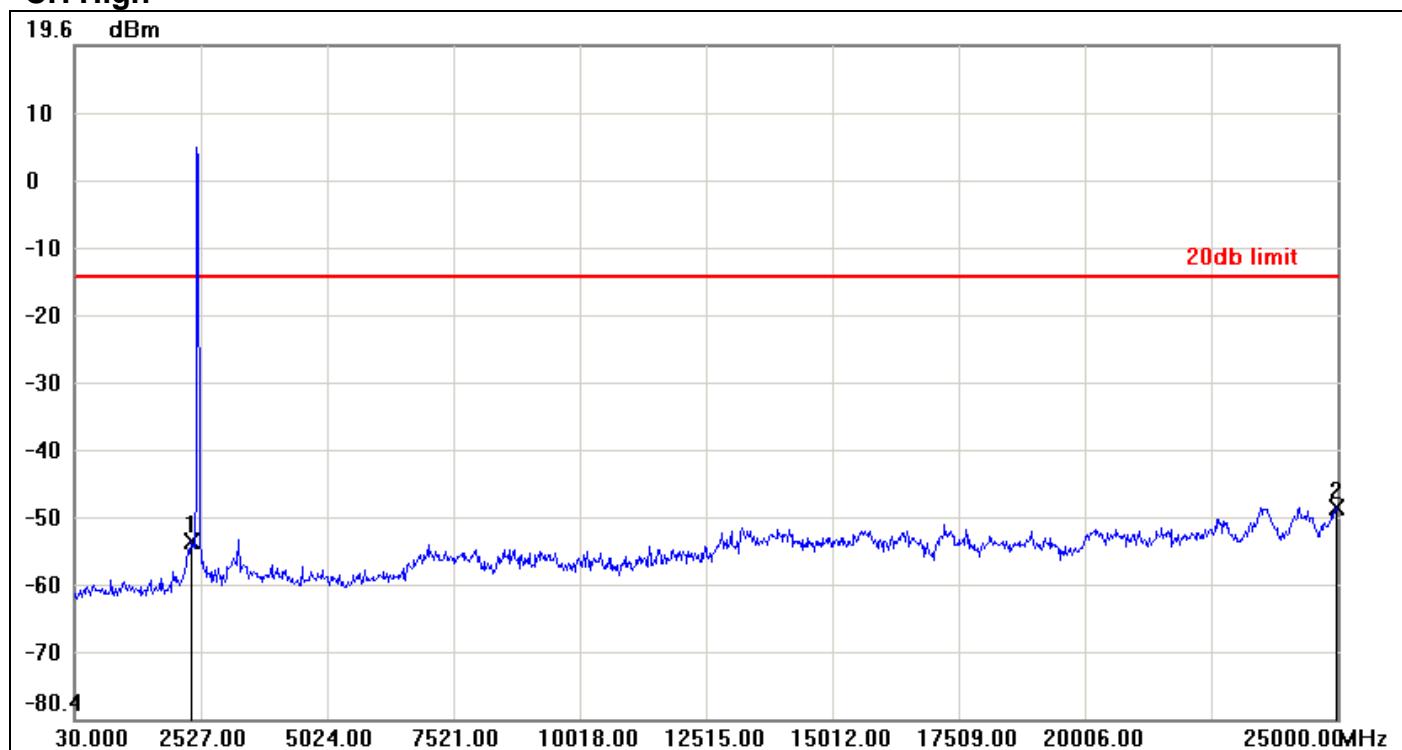


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-43.68	-13.12	-30.56
2	24975.0300	-48.86	-13.12	-35.74

**CH Mid**

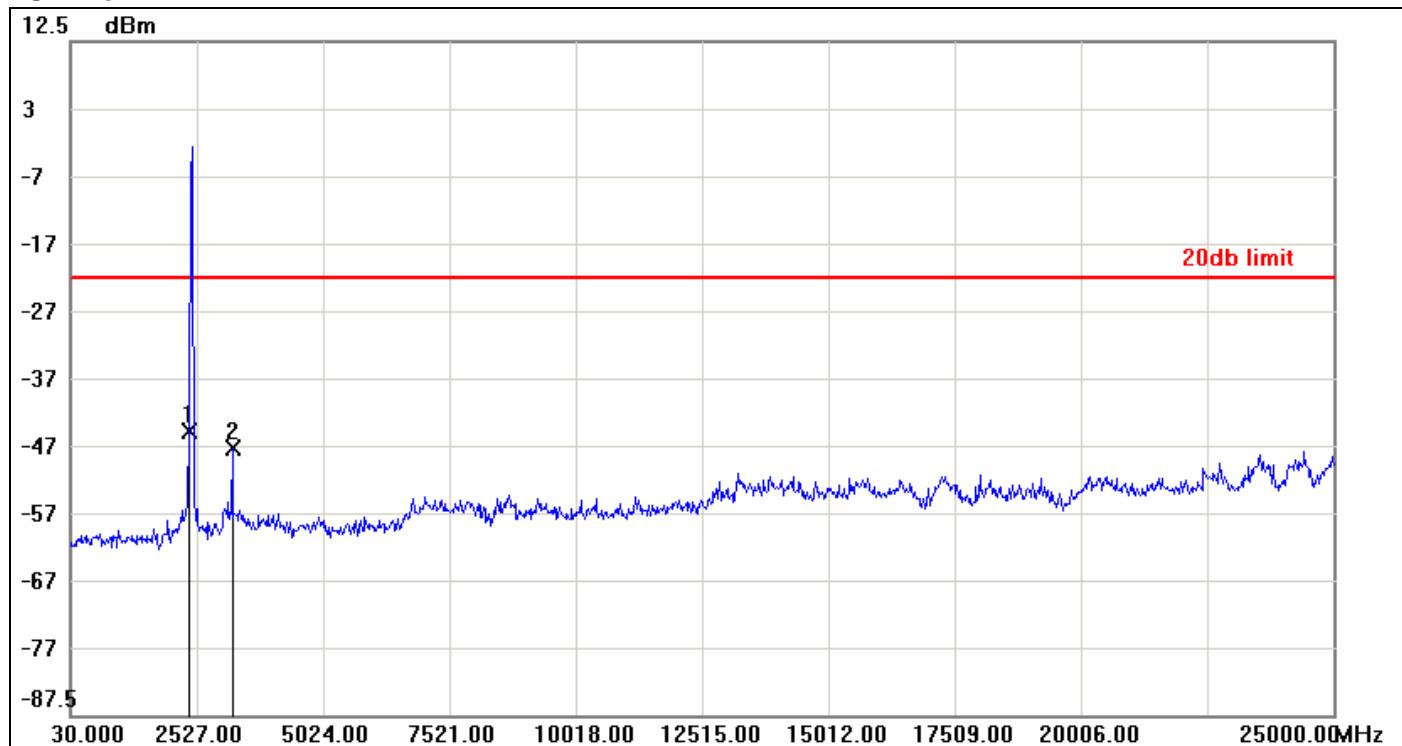
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2352.2100	-51.86	-13.46	-38.40
2	24975.0300	-49.00	-13.46	-35.54

**CH High**

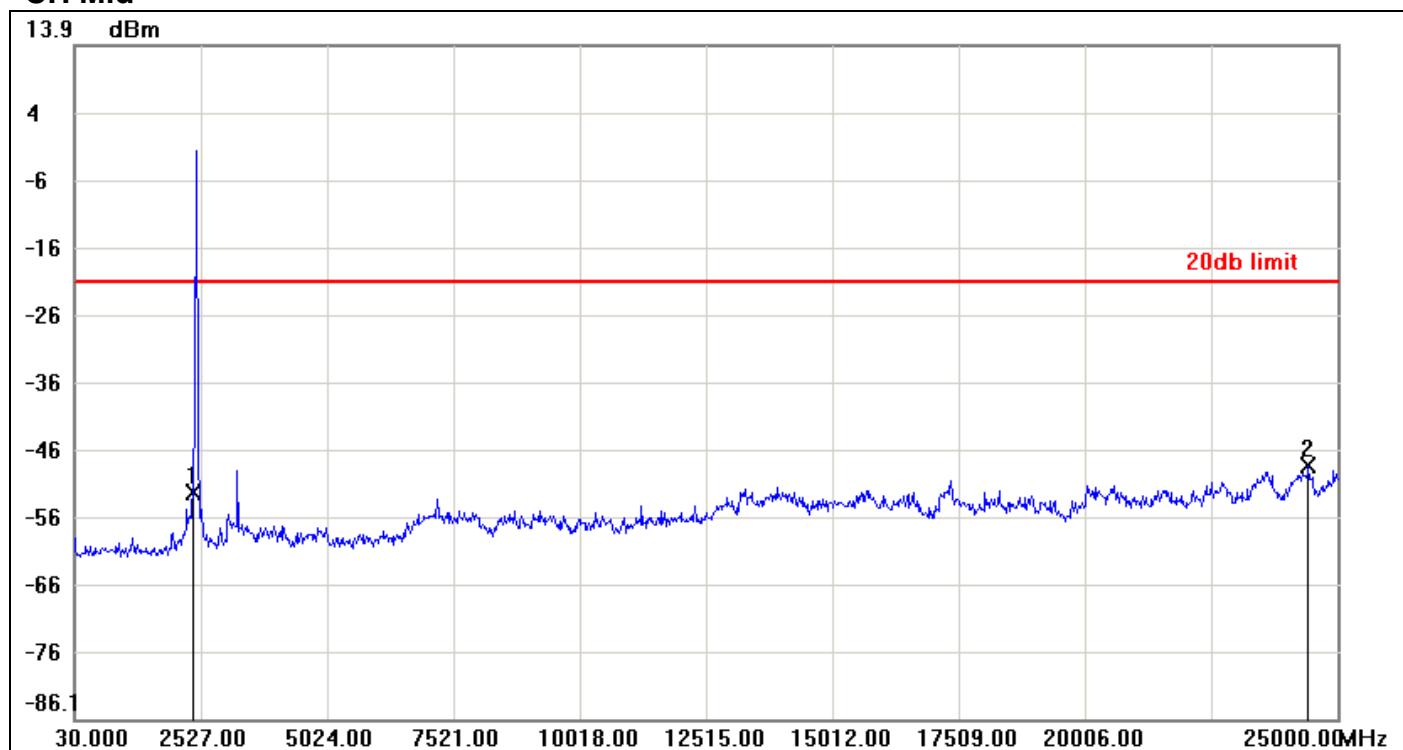


**IEEE 802.11n HT 40 MHz mode / Chain 0**

**CH Low**

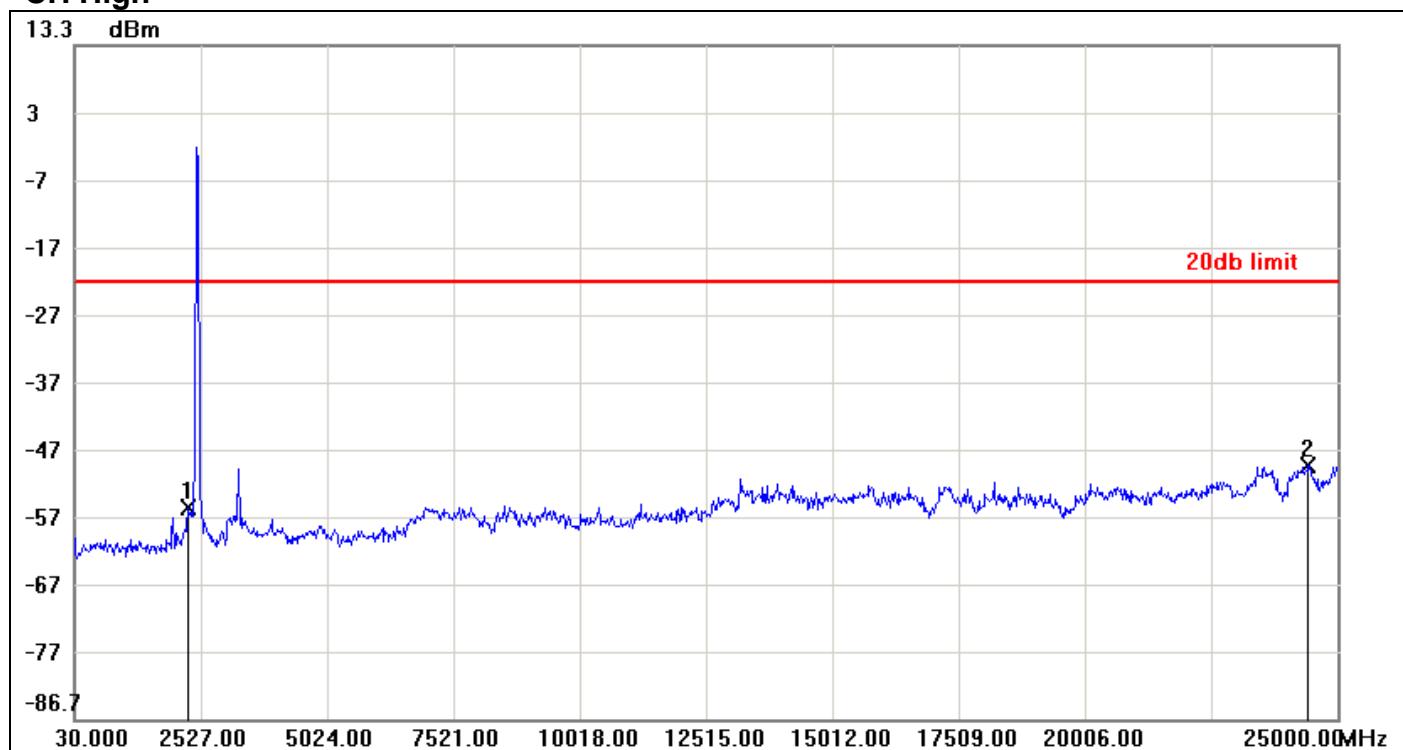


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-45.47	-22.62	-22.85
2	3226.1600	-47.83	-22.62	-25.21

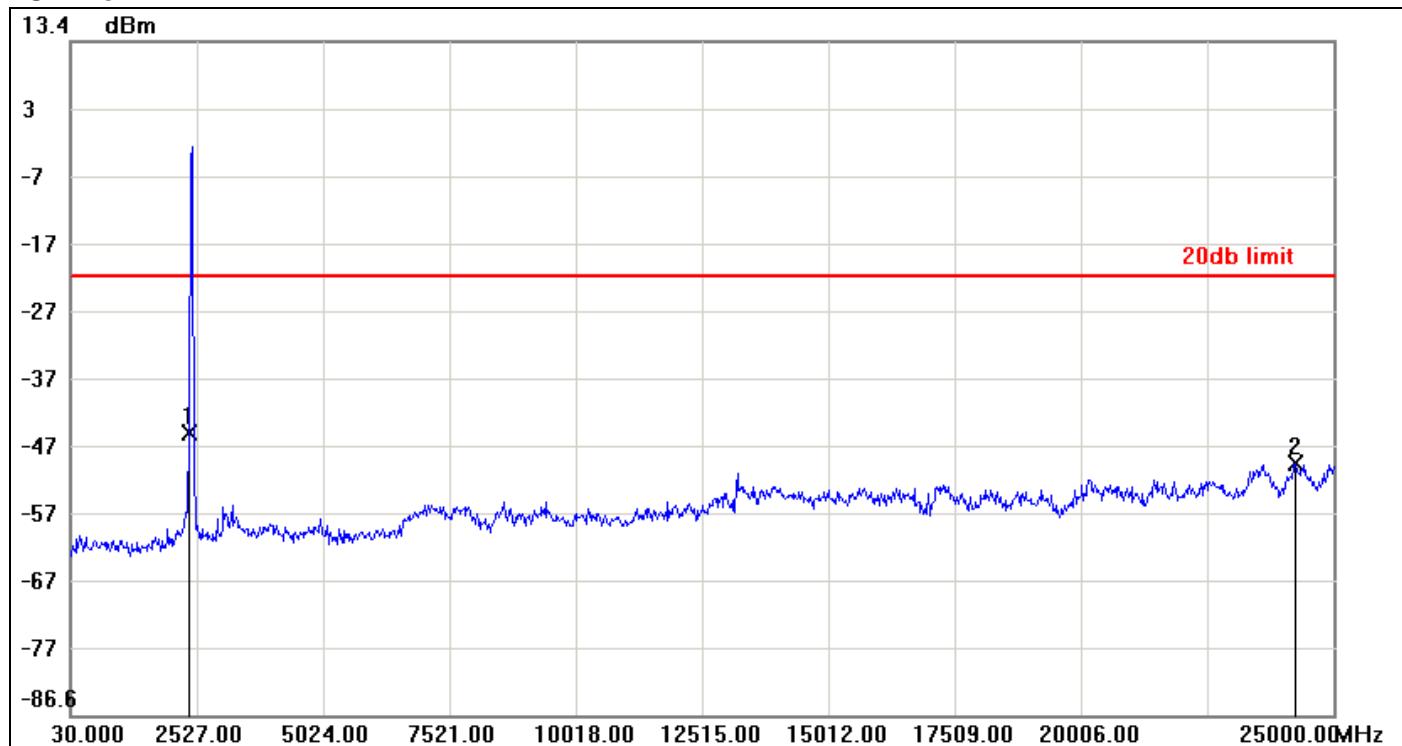
**CH Mid**

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-52.46	-21.24	-31.22
2	24425.6900	-48.46	-21.24	-27.22

**CH High**

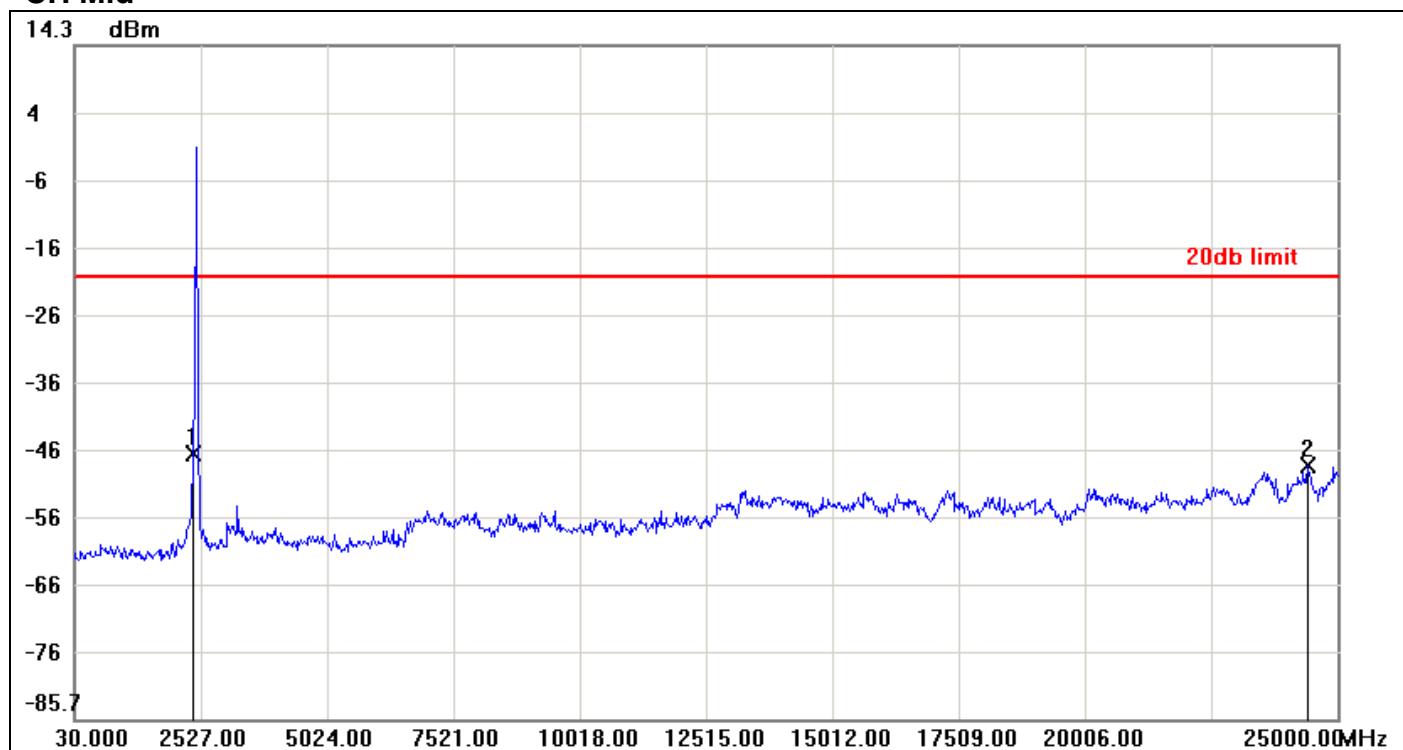


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2277.3000	-55.36	-21.68	-33.68
2	24425.6900	-48.99	-21.68	-27.31

**IEEE 802.11n HT 40 MHz mode / Chain 1****CH Low**

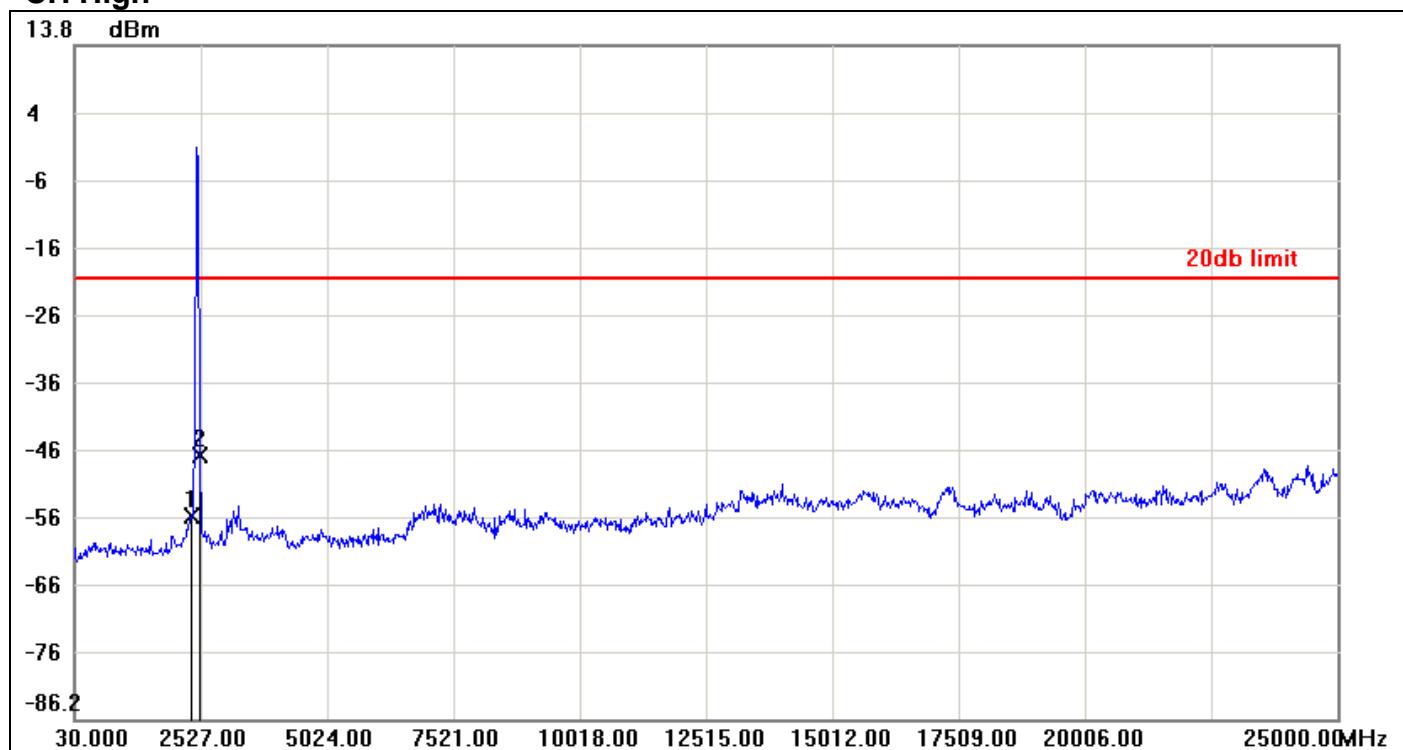
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-44.72	-21.54	-23.18
2	24250.9000	-49.20	-21.54	-27.66

**CH Mid**



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-46.20	-20.03	-26.17
2	24400.7200	-48.00	-20.03	-27.97

**CH High**



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2327.2400	-55.99	-20.69	-35.30
2	2502.0300	-47.18	-20.69	-26.49

## 7.7 RADIATED EMISSIONS

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

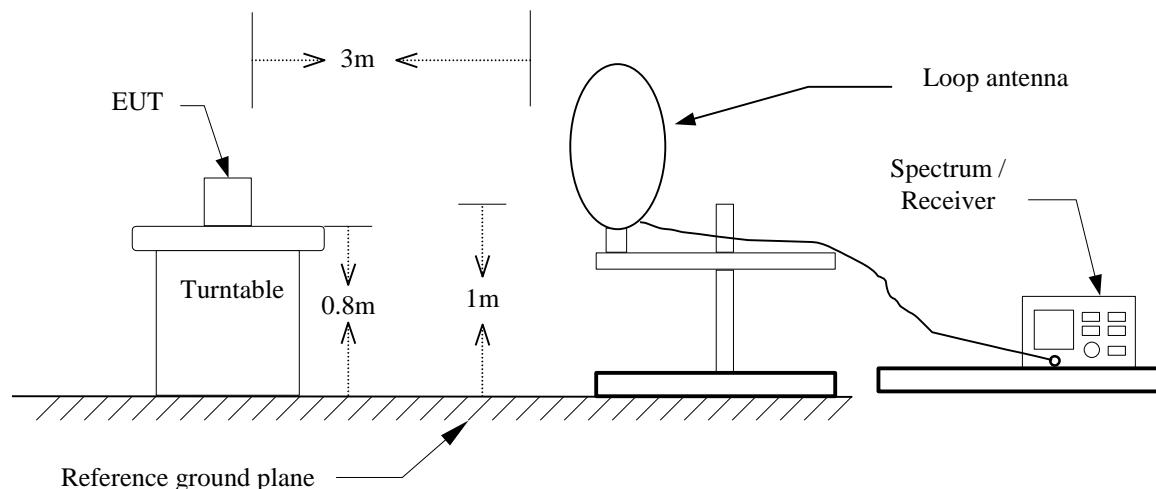
**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

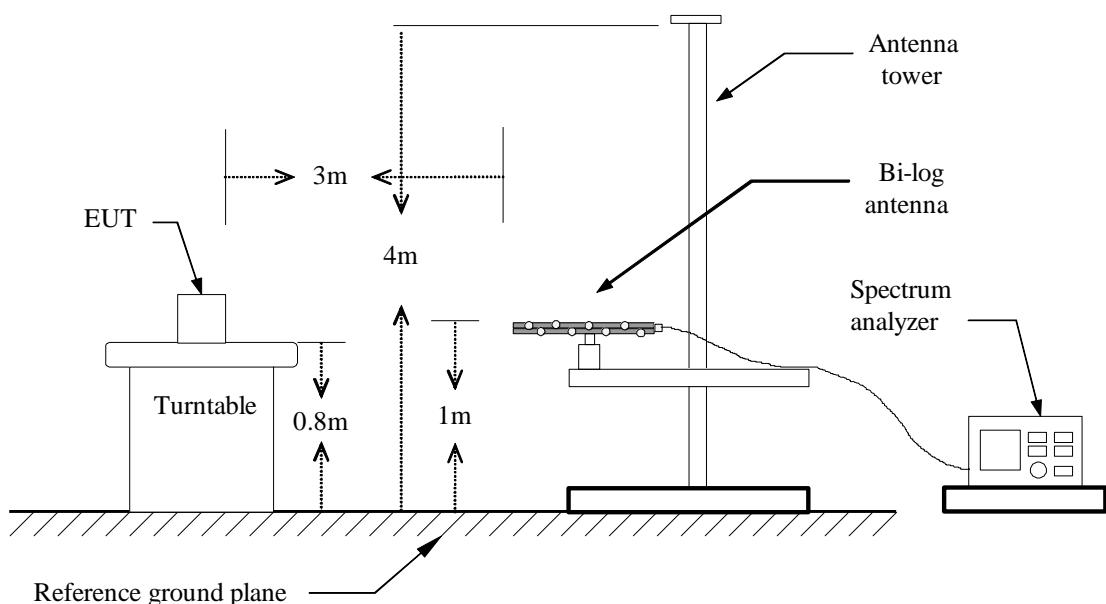
Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Configuration

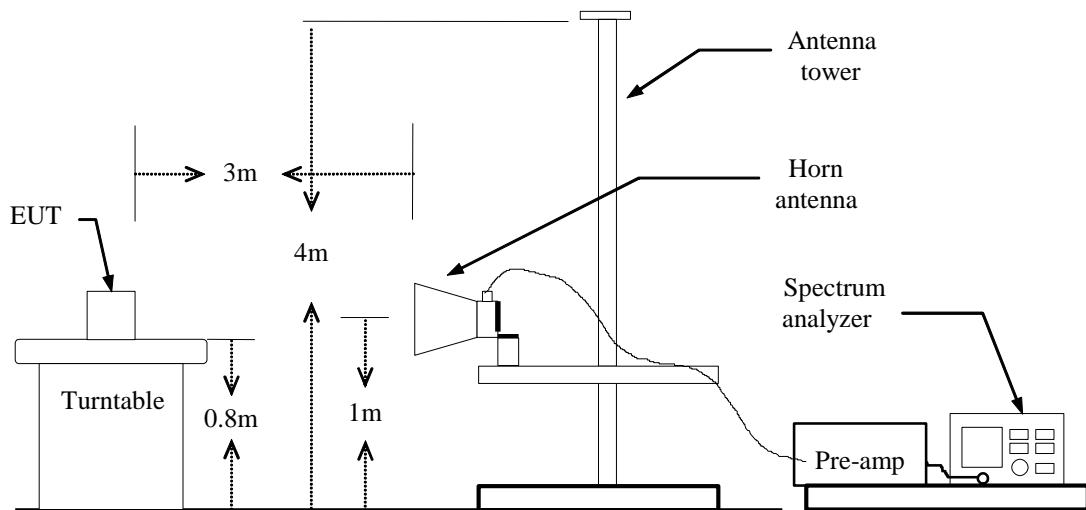
**9kHz ~ 30MHz**



**30MHz ~ 1GHz**



**Above 1 GHz**



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz,  
if duty cycle  $\geq$  98%, VBW=10Hz.  
if duty cycle < 98% VBW=1/T.

**IEEE 802.11b mode:**  $\geq$  98%, VBW=10Hz

**IEEE 802.11g mode:**  $\geq$  98%, VBW=10Hz

**IEEE 802.11n HT 20 MHz mode:**  $\geq$  98%, VBW=10Hz

**IEEE 802.11n HT 40 MHz mode:**  $\geq$  98%=VBW 10Hz

7. Repeat above procedures until the measurements for all frequencies are complete.

## **TEST RESULTS**

*No non-compliance noted.*

**For printed Antenna****Below 1GHz****Operation Mode:** Normal Link**Test Date:** December 29, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
98.8700	39.35	-21.19	18.16	43.50	-25.34	peak	V
280.2600	34.22	-16.76	17.46	46.00	-28.54	peak	V
456.8000	28.83	-12.55	16.28	46.00	-29.72	peak	V
665.3500	31.64	-9.15	22.49	46.00	-23.51	peak	V
719.6700	26.09	-8.43	17.66	46.00	-28.34	peak	V
951.5000	25.06	-5.46	19.60	46.00	-26.40	peak	V
120.2100	33.43	-17.37	16.06	43.50	-27.44	peak	H
239.5200	35.19	-18.62	16.57	46.00	-29.43	peak	H
335.5500	35.79	-15.54	20.25	46.00	-25.75	peak	H
455.8300	28.07	-12.56	15.51	46.00	-30.49	peak	H
665.3500	40.63	-9.15	31.48	46.00	-14.52	peak	H
832.1900	25.46	-6.99	18.47	46.00	-27.53	peak	H

**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** December 28, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1330.000	52.96	-8.28	44.68	74.00	-29.32	peak	V
3215.000	44.90	-1.59	43.31	74.00	-30.69	peak	V
N/A							
1334.000	51.73	-8.26	43.47	74.00	-30.53	peak	H
3215.000	45.30	-1.59	43.71	74.00	-30.29	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** December 28, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1332.000	51.88	-8.27	43.61	74.00	-30.39	peak	V
3250.000	45.29	-1.51	43.78	74.00	-30.22	peak	V
4875.000	46.82	3.92	50.74	74.00	-23.26	peak	V
N/A							
1624.000	51.35	-6.87	44.48	74.00	-29.52	peak	H
3250.000	45.67	-1.51	44.16	74.00	-29.84	peak	H
4875.000	45.69	3.92	49.61	74.00	-24.39	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** December 28, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1332.000	52.86	-8.27	44.59	74.00	-29.41	peak	V
3280.000	42.92	-1.44	41.48	74.00	-32.52	peak	V
4925.000	49.49	3.90	53.39	74.00	-20.61	peak	V
4925.000	48.45	3.90	52.35	54.00	-1.65	AVG	V
N/A							
1642.000	51.87	-6.78	45.09	74.00	-28.91	peak	H
3285.000	44.55	-1.43	43.12	74.00	-30.88	peak	H
4925.000	48.27	3.90	52.17	74.00	-21.83	peak	H
4925.000	49.03	3.90	52.93	54.00	-1.07	AVG	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** December 28, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1332.000	52.36	-8.27	44.09	74.00	-29.91	peak	V
3495.000	40.89	-0.92	39.97	74.00	-34.03	peak	V
4590.000	38.96	3.52	42.48	74.00	-31.52	peak	V
N/A							
1310.000	51.60	-8.37	43.23	74.00	-30.77	peak	H
3215.000	42.15	-1.59	40.56	74.00	-33.44	peak	H
5280.000	38.25	4.76	43.01	74.00	-30.99	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** December 28, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1404.000	51.19	-7.95	43.24	74.00	-30.76	peak	V
3250.000	42.20	-1.51	40.69	74.00	-33.31	peak	V
4755.000	38.04	3.87	41.91	74.00	-32.09	peak	V
N/A							
1832.000	49.78	-5.77	44.01	74.00	-29.99	peak	H
3250.000	43.62	-1.51	42.11	74.00	-31.89	peak	H
4870.000	37.59	3.93	41.52	74.00	-32.48	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** December 28, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1924.000	49.80	-5.28	44.52	74.00	-29.48	peak	V
3280.000	41.45	-1.44	40.01	74.00	-33.99	peak	V
6280.000	37.46	8.25	45.71	74.00	-28.29	peak	V
N/A							
1728.000	50.04	-6.32	43.72	74.00	-30.28	peak	H
3285.000	43.65	-1.43	42.22	74.00	-31.78	peak	H
4635.000	39.15	3.60	42.75	74.00	-31.25	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** December 28, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1496.000	52.96	-7.55	45.41	74.00	-28.59	peak	V
3215.000	42.78	-1.59	41.19	74.00	-32.81	peak	V
4585.000	38.78	3.50	42.28	74.00	-31.72	peak	V
N/A							
1774.000	50.41	-6.08	44.33	74.00	-29.67	peak	H
3215.000	42.46	-1.59	40.87	74.00	-33.13	peak	H
4925.000	37.88	3.90	41.78	74.00	-32.22	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** December 28, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1896.000	51.41	-5.43	45.98	74.00	-28.02	peak	V
3250.000	42.36	-1.51	40.85	74.00	-33.15	peak	V
4775.000	38.11	3.95	42.06	74.00	-31.94	peak	V
N/A							
1720.000	51.20	-6.36	44.84	74.00	-29.16	peak	H
3250.000	43.68	-1.51	42.17	74.00	-31.83	peak	H
4870.000	37.60	3.93	41.53	74.00	-32.47	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH High

**Test Date:** December 28, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2000.000	50.97	-4.88	46.09	74.00	-27.91	peak	V
3710.000	40.39	-0.01	40.38	74.00	-33.62	peak	V
4925.000	39.69	3.90	43.59	74.00	-30.41	peak	V
N/A							
1990.000	50.98	-4.93	46.05	74.00	-27.95	peak	H
3285.000	41.89	-1.43	40.46	74.00	-33.54	peak	H
5670.000	37.49	5.97	43.46	74.00	-30.54	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH Low

**Test Date:** December 28, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1684.000	50.94	-6.55	44.39	74.00	-29.61	peak	V
3230.000	41.92	-1.56	40.36	74.00	-33.64	peak	V
4835.000	38.53	3.99	42.52	74.00	-31.48	peak	V
N/A							
1332.000	50.86	-8.27	42.59	74.00	-31.41	peak	H
3230.000	44.06	-1.56	42.50	74.00	-31.50	peak	H
5420.000	36.97	5.63	42.60	74.00	-31.40	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH Mid

**Test Date:** December 28, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1330.000	53.70	-8.28	45.42	74.00	-28.58	peak	V
3250.000	41.47	-1.51	39.96	74.00	-34.04	peak	V
4875.000	38.93	3.92	42.85	74.00	-31.15	peak	V
N/A							
1974.000	52.39	-5.02	47.37	74.00	-26.63	peak	H
3250.000	42.95	-1.51	41.44	74.00	-32.56	peak	H
6130.000	37.70	7.79	45.49	74.00	-28.51	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH High

**Test Date:** December 28, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1732.000	50.01	-6.30	43.71	74.00	-30.29	peak	V
3745.000	39.08	0.14	39.22	74.00	-34.78	peak	V
4500.000	41.00	3.12	44.12	74.00	-29.88	peak	V
N/A							
1332.000	51.85	-8.27	43.58	74.00	-30.42	peak	H
3270.000	44.25	-1.46	42.79	74.00	-31.21	peak	H
4510.000	39.02	3.17	42.19	74.00	-31.81	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**For Dipole Antenna****Below 1GHz****Operation Mode:** Normal Link**Test Date:** December 27, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
57.1600	55.75	-23.64	32.11	40.00	-7.89	peak	V
205.5700	41.09	-17.94	23.15	43.50	-20.35	peak	V
335.5500	50.16	-15.54	34.62	46.00	-11.38	peak	V
498.5100	45.77	-11.85	33.92	46.00	-12.08	peak	V
665.3500	46.17	-9.15	37.02	46.00	-8.98	peak	V
914.6400	36.99	-5.96	31.03	46.00	-14.97	peak	V
57.1600	55.24	-23.64	31.60	40.00	-8.40	peak	H
239.5200	48.93	-18.62	30.31	46.00	-15.69	peak	H
365.6200	52.86	-14.82	38.04	46.00	-7.96	peak	H
566.4100	37.68	-10.84	26.84	46.00	-19.16	peak	H
665.3500	46.25	-9.15	37.10	46.00	-8.90	peak	H
832.1900	40.82	-6.99	33.83	46.00	-12.17	peak	H

**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** December 27, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1952.000	51.12	-5.13	45.99	74.00	-28.01	peak	V
3215.000	50.34	-1.59	48.75	74.00	-25.25	peak	V
N/A							
1700.000	50.48	-6.47	44.01	74.00	-29.99	peak	H
3215.000	51.48	-1.59	49.89	74.00	-24.11	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** December 27, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1334.000	52.43	-8.26	44.17	74.00	-29.83	peak	V
3250.000	51.93	-1.51	50.42	74.00	-23.58	peak	V
N/A							
1946.000	53.43	-5.17	48.26	74.00	-25.74	peak	H
3250.000	52.44	-1.51	50.93	74.00	-23.07	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** December 27, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1948.000	51.75	-5.16	46.59	74.00	-27.41	peak	V
3285.000	50.64	-1.43	49.21	74.00	-24.79	peak	V
N/A							
2122.000	50.41	-4.86	45.55	74.00	-28.45	peak	H
3285.000	52.19	-1.43	50.76	74.00	-23.24	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** December 27, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1800.000	52.45	-5.94	46.51	74.00	-27.49	peak	V
3215.000	46.96	-1.59	45.37	74.00	-28.63	peak	V
N/A							
1334.000	51.52	-8.26	43.26	74.00	-30.74	peak	H
3215.000	51.30	-1.59	49.71	74.00	-24.29	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** December 27, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1958.000	51.96	-5.10	46.86	74.00	-27.14	peak	V
3250.000	48.35	-1.51	46.84	74.00	-27.16	peak	V
N/A							
2150.000	51.03	-4.71	46.32	74.00	-27.68	peak	H
3250.000	50.94	-1.51	49.43	74.00	-24.57	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** December 27, 2014**Temperature:** 27°C**Tested by:** Andy Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1954.000	51.46	-5.12	46.34	74.00	-27.66	peak	V
3285.000	46.78	-1.43	45.35	74.00	-28.65	peak	V
N/A							
1956.000	51.67	-5.11	46.56	74.00	-27.44	peak	H
3285.000	48.19	-1.43	46.76	74.00	-27.24	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** December 27, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1996.000	51.50	-4.90	46.60	74.00	-27.40	peak	V
3215.000	50.14	-1.59	48.55	74.00	-25.45	peak	V
N/A							
2038.000	50.24	-4.92	45.32	74.00	-28.68	peak	H
3215.000	51.37	-1.59	49.78	74.00	-24.22	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** December 27, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1958.000	51.88	-5.10	46.78	74.00	-27.22	peak	V
3250.000	50.02	-1.51	48.51	74.00	-25.49	peak	V
N/A							
1498.000	51.38	-7.54	43.84	74.00	-30.16	peak	H
3250.000	50.47	-1.51	48.96	74.00	-25.04	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH High

**Test Date:** December 27, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1948.000	51.78	-5.16	46.62	74.00	-27.38	peak	V
3285.000	48.23	-1.43	46.80	74.00	-27.20	peak	V
N/A							
2000.000	51.06	-4.88	46.18	74.00	-27.82	peak	H
3285.000	47.65	-1.43	46.22	74.00	-27.78	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH Low

**Test Date:** December 27, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1948.000	51.37	-5.16	46.21	74.00	-27.79	peak	V
3230.000	48.09	-1.56	46.53	74.00	-27.47	peak	V
N/A							
1538.000	51.24	-7.33	43.91	74.00	-30.09	peak	H
3230.000	48.37	-1.56	46.81	74.00	-27.19	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH Mid

**Test Date:** December 27, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1948.000	50.09	-5.16	44.93	74.00	-29.07	peak	V
3250.000	51.14	-1.51	49.63	74.00	-24.37	peak	V
N/A							
1334.000	52.63	-8.26	44.37	74.00	-29.63	peak	H
3250.000	50.23	-1.51	48.72	74.00	-25.28	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH High

**Test Date:** December 27, 2014

**Temperature:** 27°C

**Tested by:** Andy Shi

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1332.000	52.56	-8.27	44.29	74.00	-29.71	peak	V
3270.000	49.97	-1.46	48.51	74.00	-25.49	peak	V
N/A							
1332.000	53.49	-8.27	45.22	74.00	-28.78	peak	H
3270.000	49.10	-1.46	47.64	74.00	-26.36	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

## 7.8 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

## **TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### **For printed Antenna**

#### **Test Data**

**Operation Mode:** Normal Link      **Test Date:** January 5, 2015

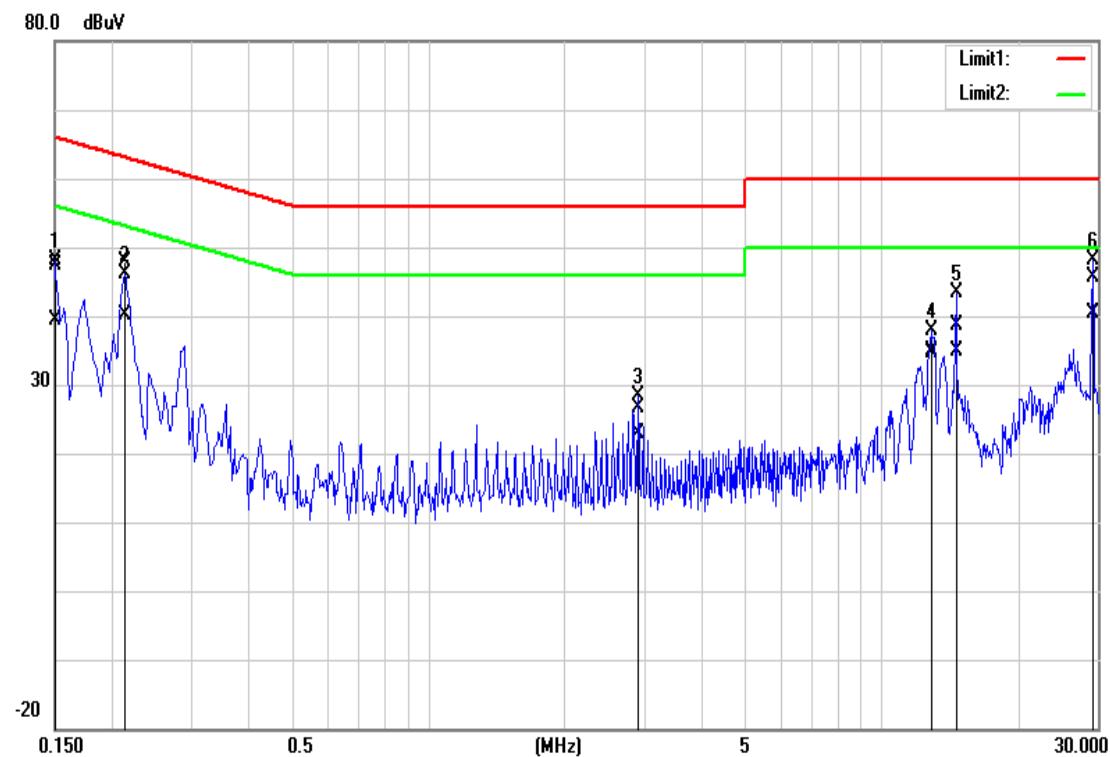
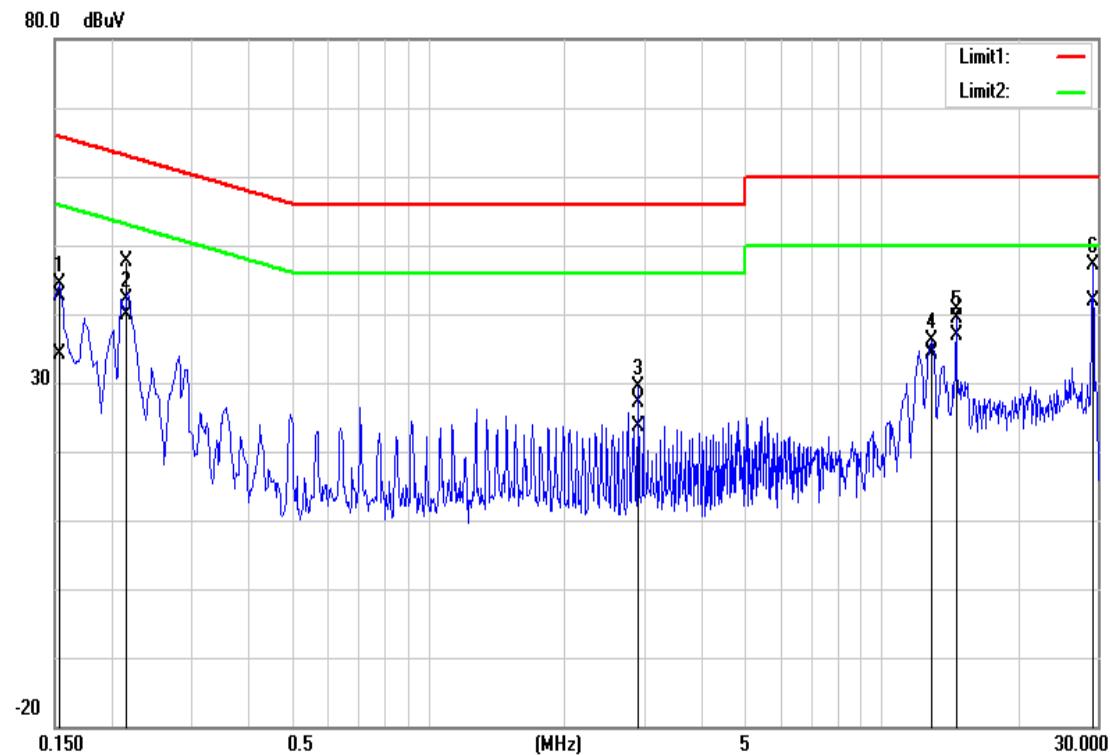
**Temperature:** 24°C      **Tested by:** Sehni Hu

**Humidity:** 50% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1500	37.49	29.61	9.87	47.36	39.48	65.99	56.00	-18.63	-16.52	L1
0.2123	38.01	30.21	9.87	47.88	40.08	63.11	53.11	-15.23	-13.03	L1
2.9095	16.71	12.95	9.98	26.69	22.93	56.00	46.00	-29.31	-23.07	L1
12.8623	24.72	24.37	10.22	34.94	34.59	60.00	50.00	-25.06	-15.41	L1
14.6266	28.33	24.57	10.26	38.59	34.83	60.00	50.00	-21.41	-15.17	L1
29.2502	34.95	29.67	10.74	45.69	40.41	60.00	50.00	-14.31	-9.59	L1
0.1539	32.97	24.50	9.63	42.60	34.13	65.78	55.79	-23.18	-21.66	L2
0.2136	37.94	30.19	9.64	47.58	39.83	63.06	53.06	-15.48	-13.23	L2
2.9103	17.32	13.83	9.76	27.08	23.59	56.00	46.00	-28.92	-22.41	L2
12.9290	24.42	23.95	10.06	34.48	34.01	60.00	50.00	-25.52	-15.99	L2
14.6262	30.40	26.67	10.11	40.51	36.78	60.00	50.00	-19.49	-13.22	L2
29.2498	36.39	31.12	10.64	47.03	41.76	60.00	50.00	-12.97	-8.24	L2

#### **Remark:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

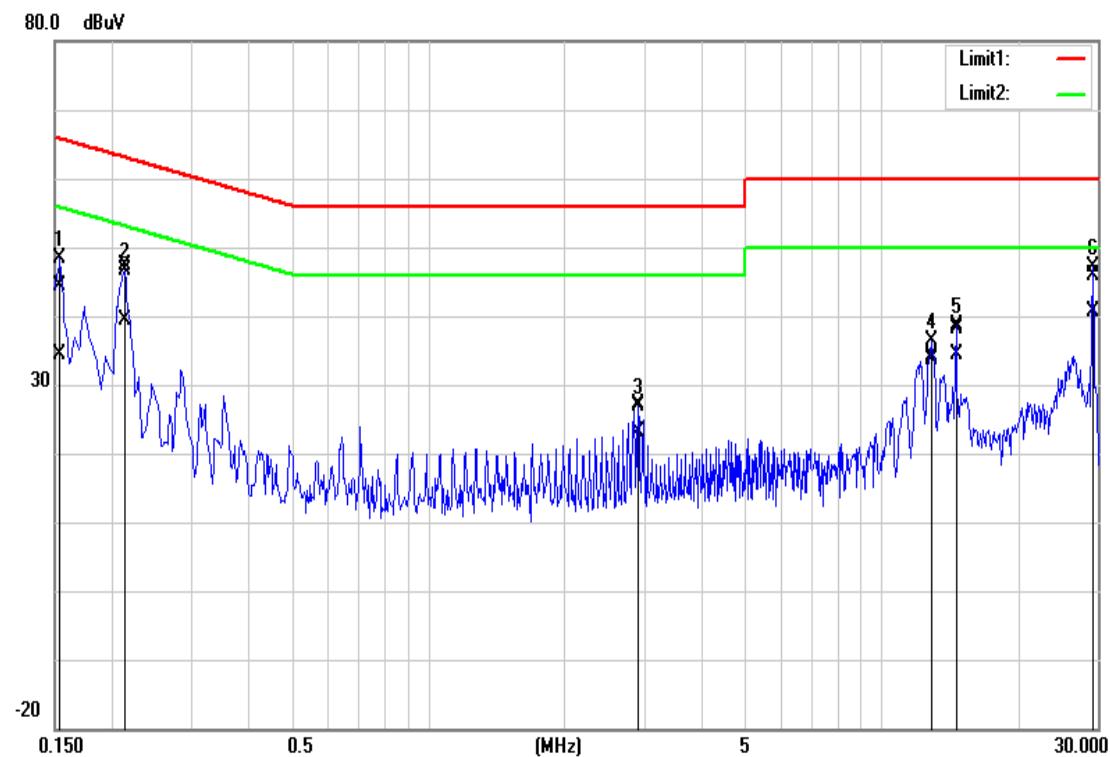
**Test Plots*****Conducted emissions (Line 1)******Conducted emissions (Line 2)***

**For Dipole Antenna****Test Data****Operation Mode:** Normal Link      **Test Date:** January 5, 2015**Temperature:** 24°C      **Tested by:** Sehni Hu**Humidity:** 50% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1539	34.40	24.61	9.87	44.27	34.48	65.78	55.79	-21.51	-21.31	L1
0.2110	37.60	29.39	9.87	47.47	39.26	63.16	53.17	-15.69	-13.91	L1
2.9089	17.03	13.10	9.98	27.01	23.08	56.00	46.00	-28.99	-22.92	L1
12.8598	23.80	23.37	10.22	34.02	33.59	60.00	50.00	-25.98	-16.41	L1
14.6243	27.86	24.14	10.26	38.12	34.40	60.00	50.00	-21.88	-15.60	L1
29.2500	35.16	29.87	10.74	45.90	40.61	60.00	50.00	-14.10	-9.39	L1
0.1539	34.11	25.47	9.63	43.74	35.10	65.78	55.79	-22.04	-20.69	L2
0.2124	38.20	30.33	9.64	47.84	39.97	63.11	53.11	-15.27	-13.14	L2
2.7670	16.21	13.15	9.76	25.97	22.91	56.00	46.00	-30.03	-23.09	L2
12.9270	25.70	25.12	10.06	35.76	35.18	60.00	50.00	-24.24	-14.82	L2
14.6250	28.54	24.79	10.11	38.65	34.90	60.00	50.00	-21.35	-15.10	L2
29.2490	35.86	30.57	10.64	46.50	41.21	60.00	50.00	-13.50	-8.79	L2

**Remark:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

**Test Plots*****Conducted emissions (Line 1)******Conducted emissions (Line 2)***