SAR TEST REPORT

For

SHENZHEN NEWDELL SCIENCE & TECHNOLOGY CO., LTD

Smart Watch

Model No.:SW151GII

Additional model No.: NW08, NW09

Prepared for : SHENZHEN NEWDELL SCIENCE & TECHNOLOGY CO., LTD

Address **:** 4/F, 3# BLD., NO. 139, ZHONGXING RD., BANTIAN,

LONGGANG DISTRICT, SHENZHEN, Guangdong Province,

China

Prepared by Shenzhen LCS Compliance Testing Laboratory Ltd.

Address 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,

Bao'an District, Shenzhen, Guangdong, China

Tel (86)755-82591330 : (86)755-82591332 Fax www.LCS-cert.com Web

Mail webmaster@LCS-cert.com

Date of receipt of test sample : September 08, 2015

Number of tested samples

Serial number : Prototype

Date of Test : September 08, 2015 - September 16, 2015

Date of Report : September 16, 2015

SAR TEST REPORT

Report Reference No...... LCS1509160844E

Date Of Issue.....: September 16, 2015

Testing Laboratory Name: Shenzhen LCS Compliance Testing Laboratory Ltd.

Address.....: 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,

Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure: Full application of Harmonised standards ■

Partial application of Harmonised standards □

Other standard testing method

Applicant's Name.....: SHENZHEN NEWDELL SCIENCE & TECHNOLOGY CO.,

LTD

LONGGANG DISTRICT, SHENZHEN, Guangdong Province,

China

Test Specification:

Scaled SAR Max. Values is: 0.910 W/Kg (10g) for Body, 0.150 W/Kg (1g) for Head.

TestStandard.....: ANSI/IEEE C95.1:2005/ANSI/IEEE C95.3:2002

IEEE1528:2003/47CFR § 2.1093

Test Report Form No.: LCSEMC-1.0

TRF Originator.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes noresponsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description....: Smart Watch

Trade Mark.....: Newsday

Model/Type Reference.....: SW151GII

Ratings: DC 3.7V, 300 mAH; Charging voltage: DC 5V

Result: Positive

Compiled by:

Supervised by:

Approved by:

Dick Su/ File administrators

Glin Lu/ Technique principal

Gavin Liang/ Manager

SAR -- TEST REPORT

Test Report No.: LCS1509160844E September 16, 2015

Date of issue

Type / Model..... : SW151GII

EUT.....: Smart Watch

Applicant.....:: SHENZHEN NEWDELL SCIENCE & TECHNOLOGY

CO., LTD

LONGGANG DISTRICT, SHENZHEN, Guangdong Province,

China

Telephone......: +86-755-26037759 Fax.....: +86-755-26037067

Manufacturer.....: : SHENZHEN NEWDELL SCIENCE & TECHNOLOGY

CO., LTD

Address.....: 4/F, 3# BLD., NO. 139, ZHONGXING RD., BANTIAN,

LONGGANG DISTRICT, SHENZHEN, Guangdong Province,

China

Telephone......: +86-755-26037759 Fax.....: +86-755-26037067

Factory.....:: SHENZHEN NEWDELL SCIENCE & TECHNOLOGY

CO., LTD

Address.....: 4/F, 3# BLD., NO. 139, ZHONGXING RD., BANTIAN,

LONGGANG DISTRICT, SHENZHEN, Guangdong Province,

China

Telephone.....: +86-755-26037759 Fax....: +86-755-26037067

Test Result Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

1. TES	ST STANDARDS AND TEST DESCRIPTION	5
1.1.	Test Standards	5
1.2.	TEST DESCRIPTION	5
1.3.	PRODUCT DESCRIPTION	6
1.4.	SUMMARY SAR RESULTS	7
1.5.	EUT OPERATION MODE	7
1.6.	EUT CONFIGURATION	7
2. TES	ST ENVIRONMENT	8
2.1.	TEST FACILITY	8
	ENVIRONMENTAL CONDITIONS	
	SAR LIMITS	
2.4.	EQUIPMENTS USED DURING THE TEST	9
3. SAR	R MEASUREMENTS SYSTEM CONFIGURATION	10
3.1.	SARMEASUREMENT SET-UP	10
3.2.		
3.3.		
3.4.		
3.5.		
3.6.		
3.7.		
3.8.		
). BASIC SAR SYSTEM VALIDATION REQUIREMENTS	
	. System setup	
3.12.	2. MEASUREMENT PROCEDURE	20
	TPUT POWER VERIFICATION	
	TEST CONDITION:	
4.3.	CONDUCTED POWER MEASUREMENT	21
5. SAR	R TEST RESULT	24
5.1.	TEST CONDITION:	24
5.2.	OPERATION MODE	24
5.3.	SAR SUMMARY TEST RESULT	25
5.4.		
	MEASUREMENT UNCERTAINTY (700MHz-3GHz)	
	System Check Results	
5.7.	SAR TEST GRAPH RESULTS	34
6. CAL	LIBRATION CERTIFICATES	40
6.1.	PROBE CALIBRATION CERITICATE	41
	SID835DIPOLE CALIBRATION CERITICATE	
	SID1900 Dipole Calibration Ceriticate	
7. SAR	R SYSTEM PHOTOGRAPHS	81
8. SET	TUP PHOTOGRAPHS	82
9. EUT	TPHOTOGRAPHS	

1.TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

The tests were performed according to following standards:

ANSI/IEEE C95.1: 2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fileds. 3 kHz to 300 GHz.

ANSI/IEEE C95.3: 2002: IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields, 100 kHz—300 GHz.

<u>IEEE1528:2003:</u>Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate.

KDB447498 D01v05r02:General RF Exposure Guidance.

KDB865664 D01v01r03:SAR measurement 100MHz to 6GHz.

KDB865664 D02v01r01:SAR Report.

KDB690783 D01v01r03:SAR lisitings on Grants.

KDB648474 D04:SAR Handsets Multi Xmiter and Ant v01

FCC Part 2:2012: frequency alloca-tions and radio treaty mat-ters; general rules and reg-ulations

1.2. Test Description

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power . And Test device is identical prototype.

1.3. Product Description

Product Name:	Smart Watch
Trade Mark:	Newsday
Model/Type reference:	SW151GII
Listed Model(s):	SW151GII, NW08, NW09
Software Version	V1.0
Hardware Version	L9_MBPCB_V2.0
Power supply:	DC 3.7V, 300 mAH; Charging voltage: DC 5V
2G	
Operation Band:	GSM850, PCS1900
Supported type:	GSM/GPRS
Power Class:	GSM850:Power Class 5
	DCS1900:Power Class 0
Modulation Type:	GMSK for GSM/GPRS
GSM Release Version	R99
GPRS Multislot Class	10
EGPRS Multislot Class	N/A
Bluetooth	
Version:	Supported BT V3.0
Modulation:	GFSK(1Mbps) , π /4-DQPSK(2Mbps) , 8-DPSK(3Mbps)
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz

1.4. Summary SAR Results

Table 1:Max. SAR Measured

(Highest Reported standalone SAR Summary)

Exposure Configuration	Technolohy Band	Highest Measured SAR (W/Kg)	limit
Next to mouth 1-g SAR	GSM850	GSM850 0.149	
(Separation Distance 10mm)	PCS1900	0.132	1g(W/Kg)
Wrist-worn 10-g SAR	GSM850	0.905	4.0
(Separation Distance 0mm)	PCS1900	0.418	10g(W/Kg)

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this devices has been tested and meets FCC RF exposure guidelines when used with any accessory that conrtains no metal and which provides a minimum separation distance of 0mm between this devices and the body of the user. User of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain iniform power output

1.5. EUT operation mode

The EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

1.6. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- O supplied by the lab

0	Power Cable	Length (m):	/
		Shield :	1
		Detachable :	1
0	Multimeter	Manufacturer:	/
		Model No.:	/

2.TEST ENVIRONMENT

2.1. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description

EMC Lab.

: CNAS Registration Number. is L4595. FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1. VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108. UL Registration Number. is 100571-492. TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	18-25 ° C
Humidity:	40-65 %
Atmospheric pressure:	950-1050mbar

2.3. SAR Limits

FCC Limit (1g Tissue)

	SAR (W/kg)			
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)		
Spatial Average(averaged over the whole body)	0.08	0.4		
Spatial Peak(averaged over any 1 g of tissue)	1.6	8.0		
Spatial Peak(hands/wrists/ feet/anklesaveraged over 10 g)	4.0	20.0		

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

2.4. Equipments Used during the Test

	Manufact			Calib	ration
Test Equipment	urer		Serial Number	Calibration Date	Calibration Due
PC	Lenovo	G5005	MY42081102	N/A	N/A
Signal Generator	Angilent	E4438C	MY42081396	09/25/2014	09/24/2015
Multimeter	Keithley	MiltiMeter 2000	4059164	10/01/2014	09/30/2015
S-parameter Network Analyzer	Agilent	8753ES	US38432944	09/25/2014	09/24/2015
Wireless Communication Test Set	R&S	CMU200	105988	06/18/2015	06/17/2016
Power Meter	R&S	NRVS	100444	06/18/2015	06/17/2016
Power Meter	R&S	NRVS	100469	06/18/2015	06/17/2016
Power Sensor	R&S	NRV-Z51	100458	06/18/2015	06/17/2016
Power Sensor	R&S	NRV-Z32	100657	06/18/2015	06/17/2016
E-Field PROBE	SATIMO	SSE5	SN 17/14 EP220	10/01/2014	09/30/2015
E-Field PROBE	SATIMO	SSE5	SN 17/14 EP221	09/01/2014	08/31/2015
DIPOLE 835	SATIMO	SID 835	SN 07/14 DIP 0G835-303	10/01/2014	09/30/2015
DIPOLE 900	SATIMO	SID 900	SN 07/14 DIP 0G900-300	10/01/2014	09/30/2015
DIPOLE 1900	SATIMO	SID 1900	SN 30/14 DIP 1G900-333	09/01/2014	08/31/2015
COMOSAR OPEN Coaxial Probe	SATIMO	OCPG 68	SN 40/14 OCPG68	10/01/2014	09/30/2015
Communication Antenna	SATIMO	ANTA57	SN 39/14 ANTA57	10/01/2014	09/30/2015
Mobile Phone POSITIONING DEVICE	SATIMO	MSH98	SN 40/14 MSH98	N/A	N/A
DUMMY PROBE	SATIMO	DP60	SN 03/14 DP60	N/A	N/A
SAM PHANTOM	SATIMO	SAM117	SN 40/14 SAM117	N/A	N/A
Simulated Tissue 900 MHzBody and Head	SATIMO	SAM-9-H	SN 21/14 HLD438	Each Time	N/A
Simulated Tissue 1900 MHz For Head	SATIMO	SAM-18-H	SN 21/14 HLF439	Each Time	N/A
PHANTOM TABLE	SATIMO	TABP98	SN 40/14 TABP98	N/A	N/A
6 AXIS ROBOT	KUKA	KR6-R900	501217	N/A	N/A
High Power Solid State Amplifier (80MHz~1000MHz)	Instrumen ts for Industry	CMC150	M631-0627	09/25/2014	09/24/2015
Medium Power Solid State Amplifier (0.8~4.2GHz)	Instrumen ts for Industry	S41-25	M629-0539	09/25/2014	09/24/2015
Wave Tube Amplifier 48 GHz at 20Watt	Hughes Aircraft Company	1277H02F00 0	102	09/25/2014	09/24/2015

3.SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1. SARMeasurement Set-up

The OPENSAR system for performing compliance tests consist of the following items:

A standard high precision 6-axis robot (KUKA) with controller and software.

KUKA Control Panel (KCP)

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System(VPS).

The stress sensor is composed with mechanical and electronic when the electronic part detects a change on the electro-mechanical switch, It sends an "Emergency signal" to the robot controller that to stop robot's moves

A computer operating Windows XP.

OPENSAR software


Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM phantom enabling testing left-hand right-hand and body usage.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes .

System validation dipoles to validate the proper functioning of the system.

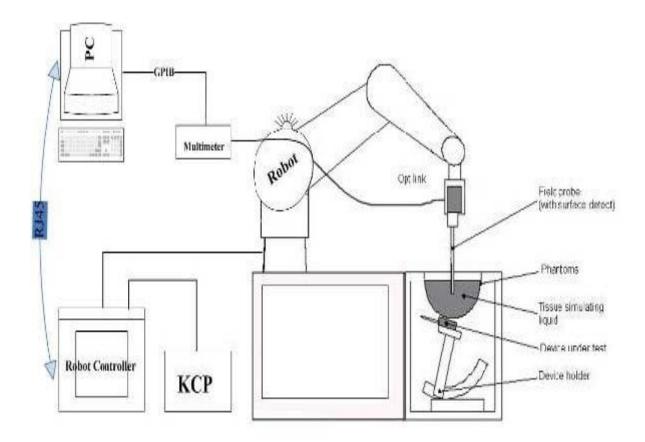

3.2. OPENSAR E-field Probe System

The SAR measurements were conducted with the dosimetric probe EP220 (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

Probe Specification

ConstructionSymmetrical design with triangular core

Interleaved sensors

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

CalibrationISO/IEC 17025 calibration service available.

Frequency 700 MHz to 3 GHz;

Linearity:0.25dB(700 MHz to 3GHz)

Directivity 0.25 dB in HSL (rotation around probe axis)

0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range 0.01W/kg to > 100 W/kg;

Linearity: 0.25 dB

Dimensions Overall length: 330 mm (Tip: 16mm)

Tip diameter: 5 mm (Body: 8 mm)

Distance from probe tip to sensor centers: 2.5 mm

Application General dosimetry up to 3 GHz


Dosimetry in strong gradient fields Compliance tests of Mobile Phones



Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

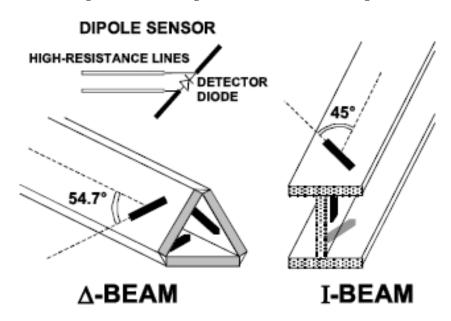

3.3. Phantoms

The SAM Phantom SAM117 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC EN62209-1, EN62209-2:2010. The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of allpredefined phantom positions and measurement grids by manually teaching three points in the robo

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

3.4. Device Holder

In combination with the Generic Twin PhantomSAM117, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device holder supplied by SATIMO

3.5. Scanning Procedure

The procedure for assessing the peak spatial-average SAR value consists of the following steps

Power Reference Measurement

The referenceand drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in OPENSAR software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 7 x 7 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more then one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

3.6. Data Storage and Evaluation

Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Normi, ai0, ai1, ai2

- Conversion factor ConvFi

- Diode compression point Dcpi

Device parameters: - Frequency f

- Crest factor cf

Media parameters: - Conductivity σ

- Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DCtransmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With Vi = compensated signal of channel i (i = x, y, z)

Ui = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field dcpi = diode compression point

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

 $\begin{array}{ll} \text{H}-\text{fieldprobes}: & H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f} \\ \text{I of channel i} & \text{(i = x, y, z)} \\ \text{channel i} & \text{(i = x, y, z)} \end{array}$

With = compensated signal of channel i Vi Normi = sensor sensitivity of channel i

> [mV/(V/m)2] for E-field Probes ConvF = sensitivity enhancement in solution

= sensor sensitivity factors for H-field probes

= carrier frequency [GHz] f

Εi = electric field strength of channel i in V/m = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units. $SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$

= local specific absorption rate in mW/g with SAR

> = total field strength in V/m Etot

= conductivity in [mho/m] or [Siemens/m]

= equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

3.7. Position of the wireless device in relation to the phantom

General considerations

This standard specifies two handset test positions against the head phantom – the "cheek" position and the "tilt" position.


The power flow density is calculated assuming the excitation field as a free space field

$$P_{\text{(pwe)}} = \frac{E_{\text{tot}}^2}{3770} \text{ or } P_{\text{(pwe)}} = H_{\text{tot}}^2.37.7$$

Where P_{pwe}=Equivalent power density of a plane wave in mW/cm2

E_{tot}=total electric field strength in V/m

H_{tot}=total magnetic field strength in A/m

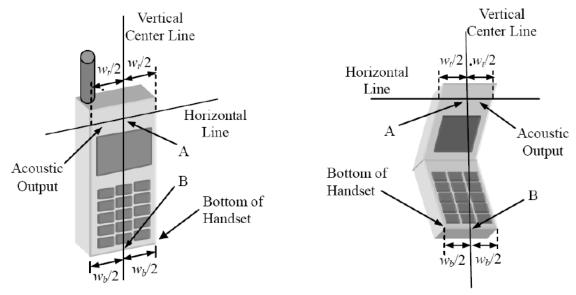


Wt Width of the handset at the level of the acoustic


W_bWidth of the bottom of the handset

- A Midpoint of the widthwtof the handset at the level of the acoustic output
- B Midpoint of the width w_b of the bottom of the handset

Picture 1-a Typical "fixed" case handset Picture 1-b Typical "clam-shell" case handset

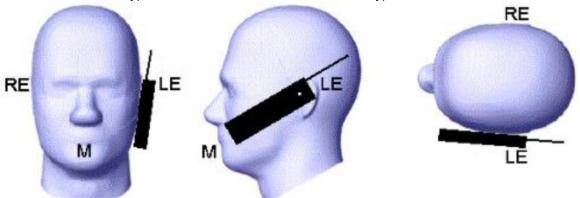

Picture 2 Cheek position of the wireless device on the left side of SAM

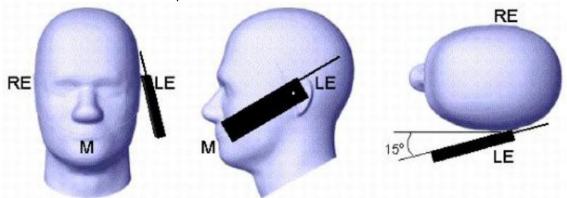

Picture 3 Tilt position of the wireless device on the left side of SAM

For body SAR test we applied to FCC KDB941225 D03v01, KDB447498 D01v05r02, KDB248227 D01v01r02, KDB616217 D04v01r01, KDB 447498 D01

3.8. Tissue Dielectric Parameters for Head and Body

The liquid used for the frequency range of 100MHz-6G consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The following Tableshows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the determine of the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Table 2. Composition of the Head Tissue Equivalent Matter

Ingredients		Frequency (MHz)						
(% by weight)	835	900	1800	2000	2450			
Water	41.45	40.92	16.33	54.89	46.70			
Sugar	56.0	56.5	/	/	/			
Salt	4.45	1.48	0.41	0.18	/			
Preventol	0.19	0.1	/	/	/			
Cellulose	0.1	0.4	/	/	/			
Clycol Monobutyl	/	/	65.3	44.93	53.3			
Dielectric ParametersTarget Value	f=835MHz ε =41.5 σ =0.90	f=900MHz $ε = 41.5$ $σ = 0.97$	f=1800MHz ε =40.0 σ =1.40	f=1950 MHz $ε = 40.0$ $σ = 1.40$	f=2450 MHz ε =39.2 σ =1.80			

Table 3. Composition of the Body Tissue Equivalent Matter

Ingredients	Frequency (MHz)						
(% by weight)	835	1800	1900	2450	2600		
Water	52.4	69.91	69.91	73.2	64.493		
Sugar	45.0	0.0	0.0	0.0	0.0		
Salt	1.4	0.13	0.13	0.04	0.024		
HEC	1.0	0.0	0.0	0.0	0.0		
Bactericide	0.1	0.0	0.0	0.0	0.0		
Triton X-100	0.0	0.0	0.0	0.0	0.0		
DGBE	0.0	29.96	29.96	26.7	32.252		
Dielectric ParametersTarget Value	f=835MHz ε =55.2 σ =0.97	f=1800MHz $ε = 53.30$ $σ = 1.52$	f=1900MHz $ε = 53.30$ $σ = 1.52$	f=2450 MHz ε =52.7 σ =1.95	f=2450 MHz ε =52.5 σ =2.16		

Table 4. Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Liquid Type (σ)	± 5% Range	Permittivity (ε)	± 5% Range
150	Head	0.76	0.72~0.80	52.3	49.69~54.92
300	Head	0.87	0.83~0.91	45.3	43.04~47.57
450	Head	0.87	0.83~0.91	43.5	41.33~45.68
835	Head	0.90	0.86~0.95	41.5	39.43~43.58
900	Head	0.97	0.92~1.02	41.5	39.43~43.58
915	Head	0.98	0.93~1.03	41.5	39.43~43.58
1450	Head	1.20	1.14~1.26	40.5	38.48~42.53
1610	Head	1.29	1.23~1.35	40.3	38.29~42.32
1800-2000	Head	1.40	1.33~1.47	40.0	38.00~42.00
2450	Head	1.80	1.71~1.89	39.2	37.24~41.16
3000	Head	2.40	2.28~2.52	38.5	36.58~40.43
5800	Head	5.27	5.01~5.53	35.3	33.54~37.07
150	Body	0.80	0.76~0.84	61.9	58.81~65.00
300	Body	0.92	0.87~0.97	58.2	55.29~61.11
450	Body	0.94	0.89~0.99	56.7	53.87~59.54
835	Body	0.97	0.92~1.02	55.2	52.44~57.96
900	Body	1.05	1.00~1.10	55.0	52.25~57.75
915	Body	1.06	1.01~1.11	55.0	52.25~57.75
1450	Body	1.30	1.24~1.37	54.0	51.30~56.70
1610	Body	1.40	1.33~1.47	53.8	51.11~56.49
1800-2000	Body	1.52	1.44~1.60	53.3	50.64~55.97
2450	Body	1.95	1.85~2.05	52.7	50.07~55.34
3000	Body	2.73	2.59~2.87	52.0	49.40~54.60
5800	Body	6.00	5.70~6.30	48.2	45.79~50.61

3.9. Dielectric Performance

Dielectric Performance of Head and Body Tissue Simulating Liquid

Measurement is made at temperature 22.0 °C and relative humidity 52%.

Liquid temperature during the test: 22.0 ℃

Measurement Date: 835 MHz September 10, 2015;1900 MHz September 11, 2015

Frequency	Body Tissue		Head Tissue			
(MHz)	O'(S/m)	εr	O'(S/m)	Er		
835	0.98	55.19	0.92	41.26		
1900	1.53	53.28	1.43	40.15		

3.10. Basic SAR system validation requirements

The SAR system must be validated against its performance specifications before it is deployed.when SAR probe and system component or sorftware are changed,upgraded or recalibrated,these must be validated with the SAR system(s) that operates with such component. Reference dipoles are used with the required tissure-equivalent media for system validation

The detailed syetem validation result are maintained by each test laboratory, which are normally not required for equip-ment approval. Only a tabulated summary of the system validation status, according to the validation date(s) measure-ment frequencies, SAR probe and tissue dielectric parameters is required in the SAR report.

LCS lab has performed the system validation at 10/28/2014, and all the measured results within \pm 10% of the system calibrated SAR targets.

3.11. System setup

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of system in order to guarantee reproducieble results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of component, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

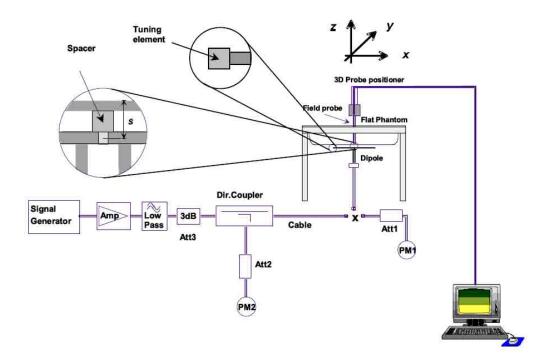




Photo of Dipole Setup

System Validation of Head

Measurement Date: 835 MHz September 10, 2015;1900 MHz September 11, 2015;

Verification	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviati	on
Results	(MHz)	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average
Pody	835	9.90	6.39	9.87	6.43	0.303	0.625
Body	1900	43.33	21.59	42.16	20.75	2.70	3.890
Head	835	9.60	6.20	9.53	6.26	0.737	0.968
	1900	39.84	20.20	38.34	20.19	1.26	0.050

3.12. Measurement procedure

The following procedure shall be performed for each of the test conditions

- 1. Measure the local SAR at a test point within 4 mm or less in the normal direction from the inner surface of the phantom.
- 2. Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of localmaximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. A maximum grip spacing of 20 mm for frequencies below 3 GHz and (60/f [GHz]) mm for frequencies of 3GHz and greater is recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz andδln(2)/2 mm for frequencies of 3 GHz and greater, whereδis theplane wave skin depth and ln(x) is the natural logarithm. The maximum variation of thesensor-phantom surface shall be ±1 mm for frequencies below 3 GHz and ±0.5 mm forfrequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than 5°. If this cannot be achieved for ameasurement distance to the phantom inner surface shorter than the probe diameter, additionalmeasurement distance to the phantom inner surface shorter than the probe diameter, additional
- 3. From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that are not within the zoom-scan volume; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR limit. This is consistent with the 2 dB threshold already stated:
- 4. Measure the three-dimensional SAR distribution at the local maxima locations identified in step
- The horizontal grid step shall be (24 / f[GHz]) mm or less but not more than 8 mm. The minimum zoom size of 30 mm by 30 mm and 30 mm for frequencies below 3 GHz. For higher frequencies, the minimum zoom size of 22 mm. by 22 mm and 22 mm. The grip step in the vertical direction shall be (8-f[GHz]) mm or less but not more than 5 mm, if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell shall be (12 / f[GHz]) mm or less but not more than 4 mm, and the spacing between father points shall increase by an incremental factor not exceeding 1.5. When variable spacing is used, extrapolation routines shall be tested with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz andδIn(2)/2 mm for frequencies of 3 GHz and greater, where δis the plane wave skin depth and In(x)is the natural logarithm. Separate grids shall be centered on each of the local SAR maxima foundin step c). Uncertainties due to field distortion between the media boundary and the dielectricenclosure of the probe should also be minimized, which is achieved is the distance between thephantom surface and physical tip of the probe is larger than probe tip diameter. Other methodsmay utilize correction procedures for these boundary effects that enable high precisionmeasurements closer than half the probe diameter. For all measurement points, the angle of theprobe with respect to the flat phantom surface shall be less than 5. If this cannot be achieved an additional uncertainty evaluation is needed.
- 6. Use post processing(e.g. interpolation and extrapolation) procedures to determine the localSAR values at the spatial resolution needed for mass averaging.

4.OUTPUT POWER VERIFICATION

4.1. Test condition:

- 1. All test measurements carried out are traceable to national standard. The uncertainty of the measurement at a confidence level of approximately 95%(in the case where distributions are nomal), with a coverage factor of 2, In the range of 30MHz-40GHz is±1.5dB.
- 2. Evironment conditions:

 $\begin{array}{lll} \mbox{Temperature} & 23 \ ^{\circ} \mbox{} \\ \mbox{Relative Humidy} & 53 \% \\ \mbox{Atmospheric Pressure} & 1019 \mbox{mbar} \end{array}$

 Test Date: September 08,2015~September 16,2015 Tested By:Dick

4.2. Test Procedure:

EUT radio output power measurement

- 1. The transmitter output port was connected to base station emulator.
- 2. Establish communication link between emulator and EUT and Set EUT to operate at maximum output power all the time.
- 3. Select lowest, middle, and highest channels for each band and different possible test mode.
- 4. Measure the conducted peak burst power and conducted average bust power from EUT antenna port.

4.3. Conducted Power Measurement

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU200) to ensure the maximum power transmission and proper modulation. Max Conducted power measurement results and power drift from the 2G report by Shenzhen LCS Compliance Testing Laboratory Ltd. **Note**: CMU200 measures GSM peak and average output power for active timeslots.for SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

Source-based Time Averaged Bust Power calculation:

Number of Time slot	1	2	3	4
Duty cycle	1:8	1:4	1:2.66	1:2
Duty cycle factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB
Crest factor	8	4	2.66	2

Remark: Time slot duty cycle factor=10*log(1/Time slot Duty Cycle)

Source based time averaged power=Maximum bust averaged power (1 Uplink)-9.03dB Source based time averaged power=Maximum bust averaged power (2 Uplink)-6.02dB Source based time averaged power=Maximum bust averaged power (3 Uplink)-4.26dB Source based time averaged power=Maximum bust averaged power (4 Uplink)-3.01dB

The signalling modes differ as follows:

Mode	Code Scheme	Modulation	Mode	Code Scheme
GPRS	CS1 to CS4	GMSK	GPRS	CS1 to CS4

Conducted power measurement results for GSM850/PCS1900

	Conducted Power (dBm)						
GSM850	Channel 128 (824.2MHz)	Channel 190 (836.6MHz)	Channel 251 (848.8MHz)				
	32.90	32.81	32.92				
		Conducted Power (dBm)					
PCS1900	Channel 512 (1850.2MHz)	Channel 661 (1880.0MHz)	Channel 810 (1909.8MHz)				
	30.45	30.44	30.45				

Conducted power measurements of GSM 850

GPRS	Meas	ured Power (dBm)	Calculation	Averaged Power (dBm)			
	824.2MHz	836.6MHz	848.8MHz	(dB)	824.2MHz	836.6MHz	848.8MHz	
1 Txslot	32.22	32.16	32.25	-9.03	23.19	23.13	23.22	
2 Txslot	31.23	31.11	31.24	-6.02	25.21	25.09	25.22	
3 Txslot	29.13	29.10	29.17	-4.26	24.87	24.84	24.91	
4 Txslot	27.34	27.31	27.33	-3.01	24.33	24.3	24.32	

Note:

- 1. The conducted power of GSM850 is measured with RMS dector.
- 2. Frame-averaged output power was calculated from the measured bust-averaged output power by converting the slot powers into liner units and calculating the energy over 8 timeslots.
- 3. According the KDB941225 D03 ,the bolded GPRS 2TX mode was selected for SAR testing according to the highest frame-averaged output power table.

Conducted power measurements of PCS 1900

GPRS	Measured Power (dBm)			Calculation	Averaged Power (dBm)			
	1850.2MHz	1880.0MHz	1909.8MHz	(dB)	1850.2MHz	1880.0MHz	1909.8MHz	
1 Txslot	29.34	29.35	29.31	-9.03	20.31	20.32	20.28	
2 Txslot	28.67	28.71	28.73	-6.02	22.65	22.69	22.71	
3 Txslot	26.55	26.51	26.58	-4.26	22.29	22.25	22.32	
4 Txslot	24.41	24.39	24.50	-3.01	21.40	21.38	21.49	

Note:

- 1. The conducted power of GSM1900 is measured with RMS dector.
- 2. Frame-averaged output power was calculated from the measured bust-averaged output power by converting the slot powers into liner units and calculating the energy over 8 timeslots.
- 3. According the KDB941225 D03, the bolded GPRS 2TX mode was selected for SAR testing according to the highest frame-averaged output power table.

Conducted power measurement of Bluetooth V3.0

Mode	channel	Frequency	Conducted output power
IVIOUE	Citatillei	(MHz)	(dBm)
	0	2402	2.893
BT V3.0 (GFSK)	39	2441	2.621
	78	2480	2.329
	0	2402	2.208
BT V3.0 (π /4-DQPSK)	39	2441	2.180
	78	2480	1.994
	0	2402	2.183
BT V3.0 (8-DPSK)	39	2441	2.105
(====,	78	2480	1.941

Note:

According to KDB447498 D01 General RF Exposure Guidence v05r01 standalone SAR test exclusion considerations,SAR test is not required in 100MHz to 6GHz at test separation distances ≤50mm , if the output of EUT satisfay the fllowing eqation:

[(max power of channel,including tune-up tolerance,mW)/(min test separation distance,mm)].[$f^{1/2}_{(GHz)}$]. \leq 3.0 For 1-g SAR and \leq 7.5 for 10-g extremity SAR.

- a. $f_{(GHz)}$ is the RF channel transmit frequency in GHz.
- b. Power and distance are rounded to the nearest mW and mm before calculation
- c. The result is rounded to one decimal place for comparison
- d. 3.5 and 7.5 are referred to as the numeric thresholds

5.SAR TEST RESULT

5.1. Test condition:

SAR Measuremnt

The distance between the EUT and the antenna of the emulator is more than 50cm and the out put power radiated from the emulator antenna is at least 30dB less than the output power of EUT.

- 2. Measurement Uncertainty: See page 36and37 for detail
- 3. Environmental Conditions

Temperature 23℃
Relative Humidity 53%
Atmospheric Pressure 1019mbar

4. Test Date: September 08,2015~September 16,2015

Test By: Dick

5.2. Operation Mode

- According to KDB 447498 D01 v05r02 ,for each exposure position, if the highest 1-g SAR is \leq 0.8 W/kg, testing for low and high channel is optional.
- Per KDB 865664 D01 v01r03,for each frequency band, if the measured SAR is ≥0.8W/Kg, testing for repeated SAR measurement is required, that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
- (1) When the original highest measured SAR is ≥0.8W/Kg, repeat that measurement once.
- (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is >1.45 W/Kg.
- (3) Perform a third repeated measurement only if the original, first and second repeated measurement is ≥
- 1.5 W/Kg and ratio of largest to smallest SAR for the original, first and second measurement is ≥1.20.
- Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be test.
- (1) the procedures explained in footnote 11 of the standard may be applied to reduce SAR test requirements for (2) when multiple slots can be used, the device should be tested to account for the maximum source-based time-averaged output power.
- (3) when the 1-g SAR is \leq 0.8 W/kg, testing for low and high channel is optional.
- Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:

Maximum Scaling SAR =tested SAR (Max.) \times [maximum turn-up power (mw)/ maximum measurement output power(mw)]

5.3. SAR summary Test result

Next to Mouth SAR Data 1-g SAR:

GSM Head SAR

Freque	ency	Tool	Tool	SAR	Power	Condu	Tune-	Scaled	Limit
MHz	Cha nnel	Test Position	Test Mode	1g(W/ kg)	Drift (%)	cted Power (dBm)	Power (dBm)		1g(W/ kg)
836.0	190	Front(10mm)	GSM850/Voice	0.149	1.58	32.81	33.00	0.150	1.60
1880.0	661	Front(10mm)	GSM1900/Voice	0.132	4.93	30.44	31.00	0.134	1.60

Note:

- 1.Per KDB 447498 D01v05r02, for each exposure position , if the highest output channel Reported SAR \leq 0.8W/Kg, Other channel SAR testing is not necessary.
- 2. Per KDB 447498 D01v05r02,next to the mouth use is evaluated with the front of the device position at 10mm From a flat phantom filled with head tissue-equivalent medium.
- Per KDB 447498 D01v05r02, Next to the mouth exposure requies 1-g SAR, and the wrist-wron condition requires 10-g extremity SAR

Wrist-Worn SAR Data 10-g SAR :

GSM Wrist-Worn SAR

Freque	ncy			SAR	Power	Cond	Tune-	Scaled	Limit
MHz	Ch an nel	Test Position	Test Mode	10g(W/k g)	Drift (%)	ucted Power (dBm)	up Power (dBm)	SAR 10g(W/ kg)	10g(W /kg)
836.0	190	Back(0mm)	GSM850/ Voice	0.905	-1.63	32.81	33.00	0.910	4.0
836.0	190	Back(0mm)	GSM850/ 2 Slots	0.881	0.93	31.11	32.00	0.906	4.0
1880.0	661	Back(0mm)	GSM1900/ Voice	0.418	2.56	30.44	31.00	0.426	4.0
1880.0	661	Back(0mm)	GSM1900/ 2 Slots	0.318	3.37	28.71	29.00	0.321	4.0

Note:

- 1.Wrist-wron exposure conditions are intended to voice call operations, therefore GSM voice call is selected to be tested.
- 2.Per KDB 447498 D01v05r02, for each exposure position , if the highest output channel Reported SAR \leq 2.0W/Kg, Other channel SAR testing is not necessary.
- 3. Per KDB 447498 D01v05r02,next to the mouth use is evaluated with the front of the device position at 10mm From a flat phantom filled with head tissue-equivalent medium.
- 4. Per KDB 447498 D01v05r02, Next to the mouth exposure requies 1-g SAR, and the wrist-wron condition requires 10-g extremity SAR
- 5. The Multi-slot Classes of EUT is Class12 which has maximum 1 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+2UL is the worse case base on the out put power measurements above.

5.4. Testreduction procedure

Simultaneous multi-band transmission

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB447498D01 General RF Exposure Guidence v05r02.

Figure 1:The diagonal dimension of the DUT

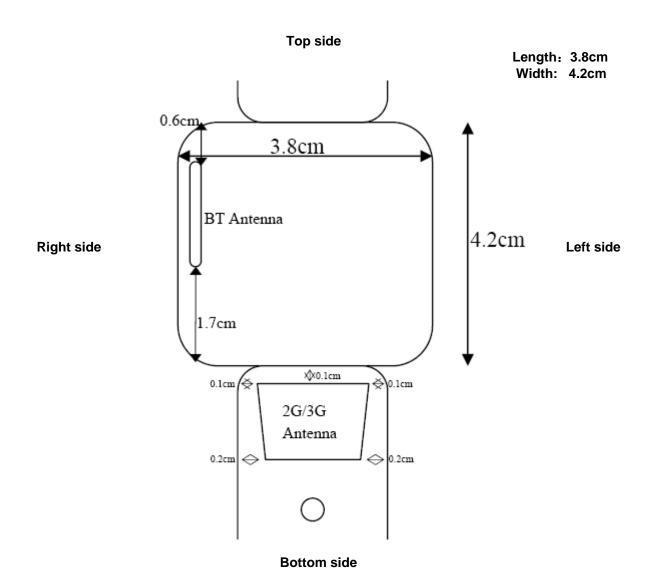


Figure1:The antenna position of the DUT

Simultaneous Transmission SAR Analysis

No	Applicable Simultaneous Transmission Combination
1.	GSM+BT

Note:

- 1) The Reported SAR summation is calculated based on the same configuration and test position.
- 2) Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - a) Scalar SAR summation < 1.6W/kg.
- b) SPLSR = (SAR1 + SAR2) 1.5 / (min. separation distance, mm), and the peak separation distance is determined from the square root of $\{(x1-x2) \ 2 + (y1-y2) \ 2 + (z1-z2) \ 2\}$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
 - c) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary
 - d) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
- 3) For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - a) (max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)] .[$\sqrt{f(GHz)/x}$] W/kg for test separation distances \leq 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - b) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - c) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.
 - d) Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

4)BT's maximum turn up conducted power is 5.0dBm(3.16mW) and the estimated SAR is listed below.

Test position	Next to Mouth(10mm)	Wrist-worn(0mm)
BT Estimated SAR(W/kg)	0.065	0.052

For Bluetooth the Estimated SAR Next to Mouth at 10mm for estimate and 0mm to Estimated Wrist-Worn SAR Estimated SAR_{Head}=((3.16mW)/10mm)*(1.5498/7.5)=0.065W/Kg

Estimated SAR_{Body}=((3.16mW)/5mm)*(1.5498/18.75)=0.052W/Kg

GSM & BT Mode

Next to Mouth Simultaneous Transmission

Test P	osition	GSM850 Reported SAR1g (W/Kg)	GSM1900 Reported SAR1g (W/Kg)	Bluetooth Estimated SAR (W/Kg)	Summation Reported SAR(1g) (W/kg)	SAR -to- peak- location Separation Ratio	Simultaneous Measurement Required?
Next to Mouth	Front	0.149	0.132	0.065	0.214	N/A	No

Wrist-worn Simultaneous Transmission

Test P	osition	GSM850 Reported SAR1g (W/Kg)	GSM1900 Reported SAR1g (W/Kg)	Bluetooth Estimated SAR (W/Kg)	Summation Reported SAR(10g) (W/kg)	SAR -to- peak- location Separation Ratio	Simultaneous Measurement Required?
Wrist- Worn	Back	0.905	0.418	0.052	0.957	N/A	No

Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the case simultaneous transmission conditions were Below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05r02

5.5. Measurement Uncertainty (700MHz-3GHz)

Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	7.2.1	5.8	N	ı	1	1	5.80	5.80	∞
Axial Isotropy	7.2.1.1	3.5	R	√3	(1- Cp)^1/2	(1- Cp)^1/2	1.43	1.43	∞
Hemispherical Isotropy	7.2.1.1	5.9	R	√3	(Cp)^1/ 2	(Cp)^1/ 2	2.41	2.41	8
Boundary effect	7.2.1.4	1.0	R	√3	1	1	0.58	0.58	8
Linearity	7.2.1.2	4.7	R	√3	1	1	2.71	2.71	8
System detection limits	7.2.1.2	1.0	R	√3	1	1	0.58	0.58	8
Modulation response	7.2.1.3	3.00	N	I	1	1	3.00	3.00	8
Readout Electronics	7.2.1.5	0.50	N	I	1	1	0.50	0.50	8
Reponse Time	7.2.1.6	0.0	R	√3	1	1	0.00	0.00	8
Integration Time	7.2.1.7	1.4	R	√3	1	1	0.81	0.81	8
RF ambient Conditions - Noise	7.2.3.7	3.0	R	√3	1	1	1.73	1.73	8
RF ambient Conditions - Reflections	7.2.3.7	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	7.2.2.1	1.4	R	√3	1	1	0.81	0.81	8
Probe positioning with respect to Phantom Shell	7.2.2.3	1.40	R	√3	1	1	0.81	0.81	8
Extrapolation, interpolation and integration Algoritms for Max. SAR Evaluation	7.2.4	2.3	R	√3	1	1	1.33	1.33	8
Test sample Related									
Test sample positioning	7.2.2.4.4	2.60	N	I	1	1	2.60	2.60	II
Device Holder Uncertainty	7.2.2.4.2 7.2.2.4.3	3.00	N	ı	1	1	3.00	3.00	
Output power Variation - SAR drift measurement	7.2.3.6	5.00	R	√3	1	1	2.89	2.89	∞
SAR scaling	7.2.5	2.00	R	√3	1	1	1.15	1.15	∞
Phantom and Tissue Parame				,,,	<u> </u>				
Phantom Uncertainty (Shape and thickness tolerances)	7.2.2.2	4.00	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	7.2.6	2.00	N	I	1	0.84	2.00	1.68	8
Liquid conductivity (temperature uncertainty)	7.2.3.5	2.50	N	ı	0.78	0.71	1.95	1.78	
Liquid conductivity - measurement uncertainty	7.2.3.3	4.00	N	I	0.23	0.26	0.92	1.04	
Liquid permittivity (temperature uncertainty)	7.2.3.5	2.50	N	ı	0.78	0.71	1.95	1.78	8
Liquid permittivity -	7.2.3.4	5.00	N	ı	0.23	0.26	1.15	1.30	
measurement uncertainty Combined Standard			RSS				10.63	10.54	
Uncertainty Expanded Uncertainty			k				21.26	21.08	
(95% Confidence interval)			I.				21.20	21.00	

5.6. System Check Results

Test mode:835MHz(Head) Product Description:Validation


Model:Dipole SID835


E-Field Probe:SSE5(SN17/14 EP220)


Test Date: September 10, 2015

Medium(liquid type)	HSL_900
Frequency (MHz)	835.0000
Relative permittivity (real part)	41.26
Conductivity (S/m)	0.92
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.86
Variation (%)	-0.010000
SAR 10g (W/Kg)	0.626382
SAR 1g (W/Kg)	0.953343

SURFACE SAR





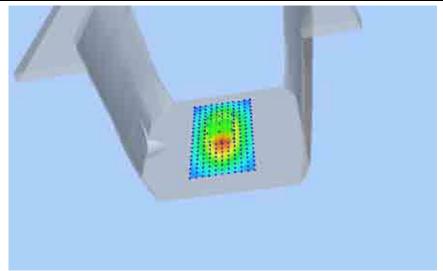

Test mode:835MHz(Body) Product Description:Validation


Model:Dipole SID835


E-Field Probe:SSE5(SN17/14 EP220)


Test Date:September 10, 2015

Medium(liquid type)	BSL_900
Frequency (MHz)	835.0000
Relative permittivity (real part)	55.19
Conductivity (S/m)	0.98
Input power	100mW
Crest Factor	1.0
Conversion Factor	5.04
Variation (%)	-0.010000
SAR 10g (W/Kg)	0.643381
SAR 1g (W/Kg)	0.987156

SURFACE SAR





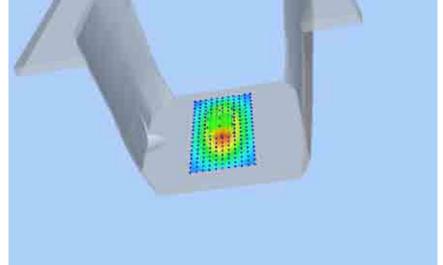

Test mode:1900MHz(Head)
Product Description:Validation


Model:Dipole SID1900


E-Field Probe:SSE5(SN17/14 EP221)


Test Date: September 11, 2015

Medium(liquid type)	HSL_1800
Frequency (MHz)	1900.0000
Relative permittivity (real part)	40.15
Conductivity (S/m)	1.43
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.71
Variation (%)	-0.240000
SAR 10g (W/Kg)	2.192452
SAR 1g (W/Kg)	3.834373

SURFACE SAR





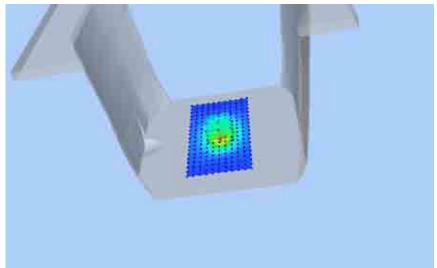

Test mode:1900MHz(Body)
Product Description:Validation


Model:Dipole SID1900


E-Field Probe:SSE5(SN17/14 EP221)


Test Date:September 11, 2015

Medium(liquid type)	BSL_1800
Frequency (MHz)	1900.0000
Relative permittivity (real part)	53.28
Conductivity (S/m)	1.53
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.85
Variation (%)	-0.240000
SAR 10g (W/Kg)	2.075454
SAR 1g (W/Kg)	4.2164373

SURFACE SAR





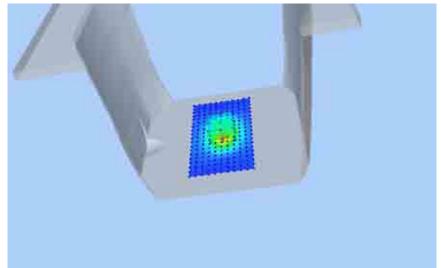

5.7. SAR Test Graph Results


Test Mode:GSM 850MHz,Mid channel(Front Next to Mouth)


Product Description: Smart Watch


Model:SW151GII

Test Date:September 10, 2015

Medium(liquid type)	HSL_900		
Frequency (MHz)	836.400024		
Relative permittivity (real part)	41.26		
Conductivity (S/m)	0.92		
E-Field Probe	SN 17/14 EP220		
Crest Factor	2.0		
Conversion Factor	4.86		
Sensor	4mm		
Area Scan	dx=8mm dy=8mm		
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm		
Variation (%)	1.580000		
SAR 10g (W/Kg)	0.096795		
SAR 1g (W/Kg)	0.149172		
SURFACE SAR	VOLUME SAR		





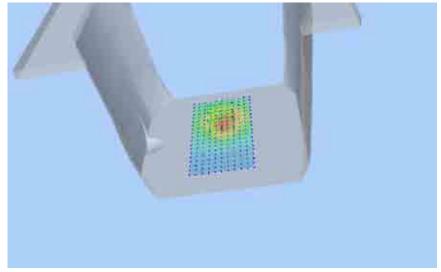

Test Mode:GSM 850 MHz,Mid channel(Back Wrist-Wron)


Product Description:Smart Watch


Model:SW151GII


Test Date: September 10, 2015

Variation (%)	-1.630000		
Area Scan Zoom Scan	dx=8mm dy=8mm $5x5x7,dx=8mm dy=8mm dz=5mm$		
Sensor	4mm		
Conversion Factor	5.04		
Crest Factor	2.0		
E-Field Probe	SN 17/14 EP220		
Conductivity (S/m)	0.98		
Relative permittivity (real part)	55.19		
Frequency (MHz)	836.400024		
Medium(liquid type)	BSL_900		

SURFACE SAR





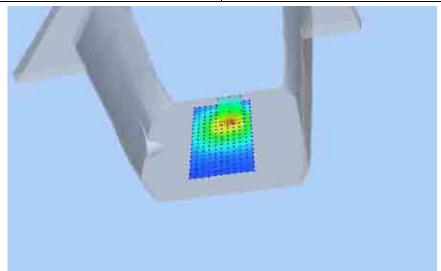

Test Mode: GPRS 850 MHz, Mid channel (Back Wrist-Wron)


Product Description:Smart Watch


Model:SW151GII


Test Date: September 10, 2015

Medium(liquid type)	BSL_900		
Frequency (MHz)	836.400024		
Relative permittivity (real part)	55.19		
Conductivity (S/m)	0.98		
E-Field Probe	SN 17/14 EP220		
Crest Factor	2.0		
Conversion Factor	5.04		
Sensor	4mm		
Area Scan	dx=8mm dy=8mm		
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm		
Variation (%)	0.930000		
SAR 10g (W/Kg)	0.880992		
SAR 1g (W/Kg)	1.478317		
SURFACE SAR	VOLUME SAR		

SURFACE SAR





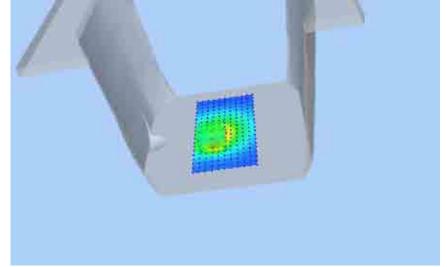

Test Mode:GSM 1900MHz,Mid channel(Front Next to Mouth)

Product Description: Smart Watch


Model:SW151GII


Test Date:September 11, 2015


Medium(liquid type)	MSL_1800		
Frequency (MHz)	1909.599976		
Relative permittivity (real part)	40.15		
Conductivity (S/m)	1.43		
E-Field Probe	SN 17/14 EP221		
Crest Factor	2.0		
Conversion Factor	4.71		
Sensor	4mm		
Area Scan	dx=8mm dy=8mm		
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm		
Variation (%)	4.930000		
SAR 10g (W/Kg)	0.078616		
SAR 1g (W/Kg)	0.131859		

SURFACE SAR

VOLUME SAR





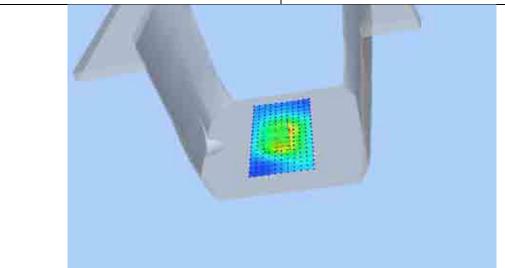

Test Mode:GSM 1900MHz,Mid channel(Back Wrist-Wron)

Product Description: Smart Watch


Model:SW151GII


Test Date:September 11, 2015


Medium(liquid type)	MSL_1800		
Frequency (MHz)	1909.599976		
Relative permittivity (real part)	53.28		
Conductivity (S/m)	1.53		
E-Field Probe	SN 17/14 EP221		
Crest Factor	2.0		
Conversion Factor	4.85		
Sensor	4mm		
Area Scan	dx=8mm dy=8mm		
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm		
Variation (%)	2.560000		
SAR 10g (W/Kg)	0.418494		
SAR 1g (W/Kg)	1.105733		

SURFACE SAR

VOLUME SAR





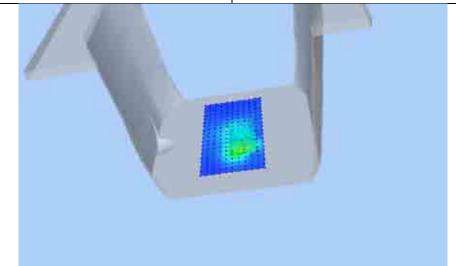

Test Mode: GPRS 1900MHz, Mid channel (Back Wrist-Wron)

Product Description: Smart Watch


Model:SW151GII


Test Date:September 11, 2015


Medium(liquid type)	MSL_1800		
Frequency (MHz)	1909.599976		
Relative permittivity (real part)	53.28		
Conductivity (S/m)	1.53		
E-Field Probe	SN 17/14 EP221		
Crest Factor	2.0		
Conversion Factor	4.85		
Sensor	4mm		
Area Scan	dx=8mm dy=8mm		
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm		
Variation (%)	3.370000		
SAR 10g (W/Kg)	0.317532		
SAR 1g (W/Kg)	0.829135		

SURFACE SAR

VOLUME SAR





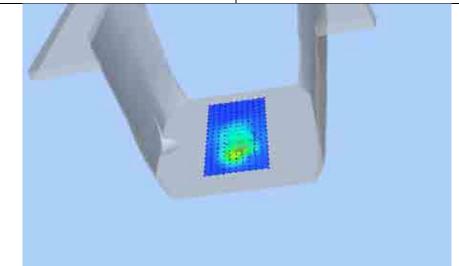

6.CALIBRATION CERTIFICATES

SARTIMO Calibration Certificate-Extended Dipole Calibrations

According to KDB 450824 D02, Dipoles must be recalibrated at least once every three years; however, immediate re-calibration is required for following conditions. The test laboratory must ensure that the required supporting information and documentation have been included in the SAR report to qualify for extended 3-year calibration interval.

- 1) When the most recent return-loss, measured at least annually, deviates by more than 20% from theprevious measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification
- 2) When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 ∩ from the previous measurement

Summary Result:

SID835					
Frquency	Return Loss(dB)	Requirement(dB)	Impedence		
835	-24.46	-20	55.4Ω+2.4jΩ		

SID1900					
Frquency	Return Loss(dB)	Requirement(dB)	Impedence		
1900	-23.68	-20	51.2Ω+6.4jΩ		

6.1. Probe Calibration Ceriticate



COMOSAR E-Field Probe Calibration Report

Ref: ACR.287.1.14.SATU.A

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD.

1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD, BAO'AN BLVD

BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 17/14 EP220

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



10/01/2014

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALISAR / CALIBAIR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.



Ref. ACR.287.1.14.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	10/14/2014	JS
Checked by :	Jérôme LUC	Product Manager	10/14/2014	JE
Approved by :	Kim RUTKOWSKI	Quality Manager	10/14/2014	them Puthoush

	Customer Name		
Distribution :	Shenzhen LCS		
	Compliance Testing		
	Laboratory Ltd.		

Issue	Date	Modifications
A	10/14/2014 Initial release	Initial release
E		

Page: 2/9



Ref. ACR.287.1.14.SATU.A

TABLE OF CONTENTS

1 De	vice Under Test	
2 Pro	oduct Description	
2.1	General Information	
3 Me	easurement Method4	
3.1	Linearity	4
3.2	Sensitivity	
3.3	Lower Detection Limit	
3.4	Isotropy	
3.5	Boundary Effect	4
4 M	easurement Uncertainty5	
5 Ca	libration Measurement Results	
5.1	Sensitivity in air	6
5.2	Linearity	
5.3	Sensitivity in liquid	
5.4	Isotropy	8
6 Lis	st of Equipment9	

Page: 3/9



Ref. ACR.287.1.14.SATU.A

1 DEVICE UNDER TEST

Device Under Test				
Device Type COMOSAR DOSIMETRIC E FIELD PROBE				
Manufacturer	Satimo			
Model	SSE5			
Serial Number	SN 17/14 EP220			
Product Condition (new / used)	New			
Frequency Range of Probe	0.7 GHz-3GHz			
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.179 MΩ			
	Dipole 2: R2=0.175 MΩ			
	Dipole 3: R3=0.180 MΩ			

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – Satimo COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	2.7 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/9



Ref. ACR 287 1.14 SATU A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis $(0^{\circ}-180^{\circ})$ in 15° increments. At each step the probe is rotated about its axis $(0^{\circ}-360^{\circ})$.

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	cí	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	√3	1	1.732%
Reflected power	3.00%	Rectangular	$\sqrt{3}$	1,	1.732%
Liquid conductivity	5.00%	Rectangular	√3	1	2.887%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1,	2.309%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	ĭ	1.732%
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%

Page: 5/9



Ref. ACR.287.1.14.SATU.A

Combined standard uncertainty	5.831%
Expanded uncertainty 95 % confidence level k = 2	12.0%

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters		
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	


5.1 SENSITIVITY IN AIR

Normx dipole		
$1 \left(\mu V / (V/m)^2 \right)$	$2 (\mu V/(V/m)^2)$	$3 (\mu V/(V/m)^2)$
6.02	5.52	5.72

DCP dipole 1	DCP dipole 2	DCP dipole 3
(mV)	(mV)	(mV)
99	98	99

Calibration curves ei=f(V) (i=1,2,3) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

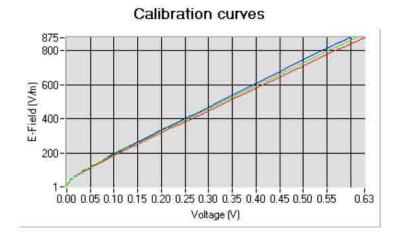


Dipole 1 Dipole 2 Dipole 3

Page: 6/9



Ref. ACR.287,1.14.SATU.A

5.2 LINEARITY

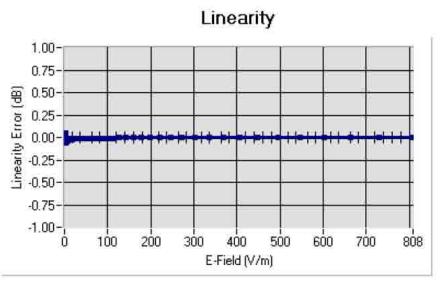

Linearity: II+/-1.47% (+/-0.06dB)

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz +/- 100MHz)	Permittivity	Epsilon (S/m)	ConvF
HL750	750	42.06	0.89	4.58
BL750	750	56.57	0.99	4.71
HL850	835	42.81	0.89	4.86
BL850	835	53.46	0.96	5.04
HL900	900	42.47	0.96	4.74
BL900	900	56.69	1.08	4.92
HL1800	1800	41.31	1.38	4.16
BL1800	1800	53.27	1.51	4.29
HL2000	2000	39.72	1.43	4.19
BL2000	2000	53.91	1.53	4.28
HL2450	2450	39.05	1.77	3.94
BL2450	2450	52.97	1.93	4.05

LOWER DETECTION LIMIT: 7mW/kg

Page: 7/9




Ref: ACR.287.1.14.SATU.A

5.4 ISOTROPY

HL900 MHz


- Axial isotropy: 0.04 dB - Hemispherical isotropy: 0.07 dB





HL1800 MHz

- Axial isotropy: 0.06 dB - Hemispherical isotropy: 0.08 dB





Page: 8/9



Ref. ACR.287.1.14.SATU.A

6 LIST OF EQUIPMENT

Equipment Summary Sheet					
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date	
Flat Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.	
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016	
Reference Probe	Satimo	EP 94 SN 37/08	10/2013	10/2014	
Multimeter	Keithley 2000	1188656	12/2013	12/2016	
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016	
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Power Meter	HP E4418A	US38261498	12/2013	12/2016	
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016	
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.	
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.	
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.	
Temperature / Humidity Sensor	Control Company	11-661-9	8/2012	8/2015	

Page: 9/9



COMOSAR E-Field Probe Calibration Report

Ref: ACR.262.1.14.SATU.A

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD.

1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD, BAO'AN BLVD

BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 17/14 EP221

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



09/01/2014

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALIBAR / CALIBAR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.



Ref: ACR.262.1.14.SATU.A

	Name	Function	Date	Signature
Prepared by:	Jěrôme LUC	Product Manager	9/19/2014	Jes
Checked by:	Jerôme LUC	Product Manager	9/19/2014	25
Approved by:	Kim RUTKOWSKI	Quality Manager	9/19/2014	A. m. Wattomak

Customer Name
Shenzhen LCS Compliance Testing
Laboratory Ltd.

Date	Modifications	
9/19/2014	Initial release	

Page: 2/9



Ref: ACR.262.1.14.5ATU A

TABLE OF CONTENTS

ı	De	vice Under Test4	
2	Pro	duct Description4	
	2.1	General Information	-4
3	Me	asurement Method4	
	3.1	Linearity	4
	3.2	Sensitivity	5
	3.3	Lower Detection Limit	
	3.4	Isotropy	.5
	3.5	Boundary Effect	
4	Me	asurement Uncertainty5	
5		libration Measurement Results	
	5.1	Sensitivity in air	6
	5.2	Linearity	7
	5.3	Sensitivity in liquid	7
	5.4	Isotropy	8
6	Lis	t of Equipment9	

Page: 3/9



Ref: ACR 262 L14 5ATU A

1 DEVICE UNDER TEST

Device Under Test		
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE	
Manufacturer	Satimo	
Model	SSE5	
Serial Number	SN 17/14 EP221	
Product Condition (new / used)	New	
Frequency Range of Probe	0.4 GHz- 6 GHz	
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.179 MΩ	
STATE OF THE STATE	Dipole 2; R2=0.167 MΩ	
	Dipole 3: R3=0.178 MΩ	

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 - Satima COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	2.7 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/9



Ref: ACR 262 1.14 5ATU A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis $(0^{\circ}-180^{\circ})$ in 15° increments. At each step the probe is rotated about its axis $(0^{\circ}-360^{\circ})$.

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	√3	1.	1.732%
Reflected power	3.00%	Rectangular	√3	T.	1.732%
Liquid conductivity	5:00%	Rectangular	√3	1.	2.887%
Liquid permittivity	4.00%	Rectangular	√3	Į.	2.309%
Field homogeneity	3.00%	Rectangular	√3	1.	1.732%
Field probe positioning	5:00%	Rectangular	√3	ĩ	2.887%
Field probe linearity	3.00%	Rectangular	√3	1	1.732%

Page: 5/9



Ref: ACR.262.1.14.5ATU A

Combined standard uncertainty	5.831%
Expanded uncertainty 95 % confidence level k = 2	12.0%

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters		
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	


5.1 SENSITIVITY IN AIR

	Normy dipole 2 (µV/(V/m) ²)	
4.81	6.15	6.02

DCP dipole 1	DCP dipole 2	DCP dipole 3
(mV)	(mV)	(mV)
95	100	20.

Calibration curves ei=f(V) (i=1,2,3) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

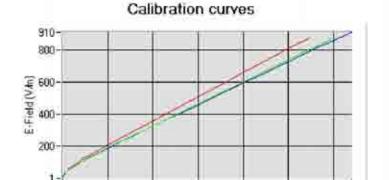

0.3

Voltage [V]

0.2

0.1

0.0



Page: 6/9

0.4


0.5

0.6 0.6



Ref: ACR.262.1.14.5ATU A

5.2 LINEARITY

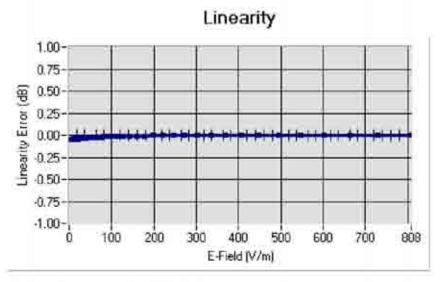

Linearity: I+/-1.16% (+/-0.05dB)

5.3 SENSITIVITY IN LIQUID

Liquid	(MHz +/- 100MHz)	Permittivity	Epsilon (S/m)	ConvF
HL450	450	43.90	0.87	4.84
BL450	450	58.63	0.98	4.98
HL750	750	42.06	0.89	4.53
BL750	750	56.57	0.99	4.70
HL850	835	42.81	0.89	4.83
BL850	835	53.46	0.96	5.02
HI,900	900	42.47	0.96	4.74
BL900	900	56.69	1.08	4.89
HL1800	1800	41.31	1.38	4.25
BL1800	1800	53.27	1.51	4.34
HL1900	1900	41.09	1.42	4.7t
BL1900	1900	54.20	1.54	4.85
HI.2000	2000	39.72	1.43	4.27
BL2000	2000	53.01	1.53	4.44
HL2450	2450	39.05	1.77	4.11
BL2450	2450	52.97	1.93	4.25
HL2600	2600	38.35	1.92	4.20
BL2600	2600	51.81	2.19	4.32

LOWER DETECTION LIMIT: 7mW/kg

Page: 7/9




Ref: ACR 262 1.14 5ATU A

5.4 ISOTROPY


HL900 MHz

- Axial isotropy: 0.04 dB - Hemispherical isotropy: 0.07 dB



HL1800 MHz

- Axial isotropy: 0.05 dB - Hemispherical isotropy: 0.08 dB



Page: 8/9



Ref: ACR 262 1.14 SATU A

6 LIST OF EQUIPMENT

Equipment Summary Sheet					
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date	
Flat Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required	Validated No ca required	
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated No ca required.	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016	
Reference Probe	Satimo	EP 94 SN 37/08	10/2013	10/2014	
Multimeter	Keithley 2000	1188656	12/2013	12/2016	
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016	
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Power Meter	HP E4418A	US38261498	12/2013	12/2016	
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016	
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Waveguide	Mega Industries	069Y7-158-13-712	Validated: No cal required	Validated No cal required	
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required	Validated No cal required	
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated No cal required	Validated No cal required	
Temperature / Humidity Sensor	Control Company	11-661-9	8/2012	8/2015	

Page: 9/9

6.2. SID835Dipole Calibration Ceriticate



SAR Reference Dipole Calibration Report

Ref: ACR.287.4.14.SATU.A

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD.

1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD, BAO'AN BLVD

BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA SATIMO COMOSAR REFERENCE DIPOLE

FREQUENCY: 835 MHZ

SERIAL NO.: SN 07/14 DIP 0G835-303

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144





10/01/2014

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



Ref. ACR 287 4.14.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	10/14/2014	JE
Checked by :	Jérôme LUC	Product Manager	10/14/2014	25
Approved by :	Kim RUTKOWSKI	Quality Manager	10/14/2014	them Purthouski

	Customer Name
	Shenzhen LCS
Distribution:	Compliance Testing
	Laboratory Ltd.

Issue	Date	Modifications	
A	10/14/2014	Initial release	

Page: 2/11



Ref. ACR.287.4.14.SATU.A

TABLE OF CONTENTS

1	Intr	oduction4	
2	Dev	rice Under Test	
3	Pro	duct Description4	
	3.1	General Information	4
4	Mea	asurement Method	
	4.1	Return Loss Requirements	5
	4.2	Mechanical Requirements	5
5	Me	asurement Uncertainty	
	5.1	Return Loss_	5
	5.2	Dimension Measurement	
	5.3	Validation Measurement	5
6	Cal	ibration Measurement Results	
	6.1	Return Loss and Impedance	6
	6.2	Mechanical Dimensions	6
7	Val	idation measurement	
	7.1	Head Liquid Measurement	7
	7.2	SAR Measurement Result With Head Liquid_	7
	7.3	Body Liquid Measurement	9
	7.4	SAR Measurement Result With Body Liquid	9
8	List	of Equipment	

Page: 3/11



Ref. ACR.287.4.14.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test		
Device Type	COMOSAR 835 MHz REFERENCE DIPOLE	
Manufacturer	Satimo	
Model	SID835	
Serial Number	SN 07/14 DIP 0G835-303	
Product Condition (new / used)	New	

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – Satimo COMOSAR Validation Dipole

Page: 4/11



Ref. ACR.287.4.14.SATU.A

4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
l g	20.3 %
10 g	20.1 %


Page: 5/11



Ref. ACR.287.4.14.SATU.A

6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE

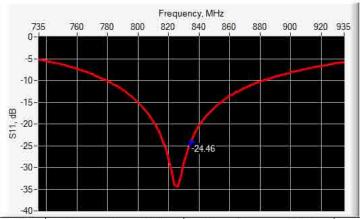

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
835	-24.46	-20	$55.4 \Omega + 2.4 j\Omega$

6.2 MECHANICAL DIMENSIONS

Frequency MHz	y MHz L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 ±1 %.		250.0 ±1 %,		6.35 ±1 %.	
450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.	PASS	89.8 ±1 %.	PASS	3.6 ±1 %.	PASS
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %,		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45,7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %,		41.7 ±1 %.		3.6 ±1 %,	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %,		37.5 ±1 %.		3.6 ±1 %,	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %,		30.4 ±1 %.		3.6 ±1 %,	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0±1 %.		26.4 ±1 %.		3.6 ±1 %,	
3700	34.7±1 %.		26.4 ±1 %.		3.6 ±1 %.	

Page: 6/11



Ref. ACR.287.4.14.SATU.A

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative per	Relative permittivity (ɛ,')		ity (σ) S/m
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	1
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %	PASS	0.90 ±5 %	PASS
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	
1800	40.0 ±5 %		1.40 ±5 %	
1900	40,0 ±5 %		1,40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1,49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4	
Phantom	SN 20/09 SAM71	
Probe	SN 18/11 EPG122	
Liquid	Head Liquid Values: eps' 42.3 sigma 0.92	
Distance between dipole center and liquid	15.0 mm	
Area scan resolution	dx=8mm/dy=8mm	


Page: 7/11



Ref. ACR.287.4:14.SATU.A

Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm	
Frequency	835 MHz	
Input power	20 dBm	
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR	(W/kg/W)
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56	9.60 (0.96)	6.22	6.20 (0.62
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	
1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

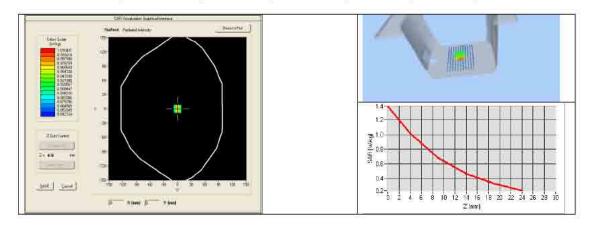

Page: 8/11



Ref. ACR.287.4.14.SATU.A

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative per	Relative permittivity (ϵ_t')		ity (σ) S/m
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %	V.	0.94 ±5 %	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %	PASS	0.97 ±5 %	PASS
900	55.0 ±5 %	W.	1.05 ±5 %	
915	55.0 ±5 %	20	1.06 ±5 %	
1450	54.0 ±5 %	1	1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %		1.52 ±5 %	
1900	53.3 ±5 %		1.52 ±5 %	
2000	53.3 ±5 %		1.52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7 ±5 %		1.95 ±5 %	
2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5,30 ±10 %	
5300	48.9 ±10 %	20	5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID


Software	OPENSAR V4	
Phantom	SN 20/09 SAM71	
Probe	SN 18/11 EPG122	
Liquid	Body Liquid Values: eps 1 54.1 sigma 10.97	
Distance between dipole center and liquid	15.0 mm	
Area scan resolution	dx=8mm/dy=8mm	
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm	
Frequency	835 MHz	
Input power	20 dBm	
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	

Page: 9/11



Ref. ACR.287 4.14.SATU.A

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
835	9.90 (0.99)	6.39 (0.64)

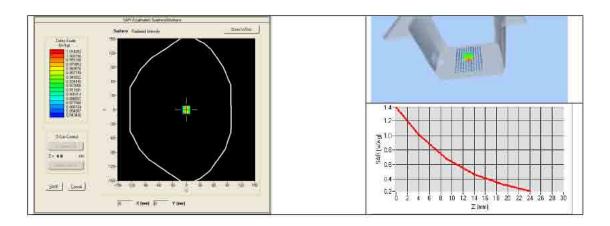

Page: 10/11



Ref. ACR.287.4.14.SATU.A

8 LIST OF EQUIPMENT

	Equi	pment Summary S	Sheet	
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Calipers	Carrera	CALIPER-01	12/2013	12/2016
Reference Probe	Satimo	EPG122 SN 18/11	10/2013	10/2014
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015

Page: 11/11

6.3. SID1900 Dipole Calibration Ceriticate



SAR Reference Dipole Calibration Report

Ref: ACR.262.8.14.SATU.A

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD.

1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD, BAO'AN BLVD BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA SATIMO COMOSAR REFERENCE DIPOLE

> FREQUENCY: 1900 MHZ SERIAL NO.: SN 30/14 DIP1G900-333

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



09/01/2014

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



Ref: ACR, 262, 8,14, SATU. A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	9/19/2014	JE
Checked by :	Jérôme LUC	Product Manager	9/19/2014	JES
Approved by :	Kim RUTKOWSKI	Quality Manager	9/19/2014	ham Pathwashi

	Customer Name		
Distribution:	Shenzhen LCS Compliance Testing Laboratory Ltd.		

Date	Modifications	
9/19/2014	Initial release	
		- The state of the

Page: 2/11



Ref: ACR.262.8.14.SATU.A

TABLE OF CONTENTS

į.	tim	roduction	
2	De	vice Under Test4	
3		duct Description4	
	3.1	General Information	4
4	Me	asurement Method	
	4.1	Return Loss Requirements	5
	4.2	Mechanical Requirements	5
5	Me	asurement Uncertainty5	
	5.1	Return Loss	5
	5.2	Dimension Measurement	
	5.3	Validation Measurement	5
6	Ca	libration Measurement Results6	
	6.1	Return Loss and Impedance In Head Liquid	6
	6.2	Return Loss and Impedance In Body Liquid	6
	6.3	Mechanical Dimensions	_6
7	Va	lidation measurement	
	7.1	Head Liquid Measurement	7
	7.2	SAR Measurement Result With Head Liquid	8
	7.3	Body Liquid Measurement	9
	7.4	SAR Measurement Result With Body Liquid	10
8	Lis	t of Equipment 11	

Page: 3/11



Ref: ACR.262.8.14.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test				
Device Type COMOSAR 1900 MHz REFERENCE DIPO				
Manufacturer	Satimo			
Model	SID1900			
Serial Number	SN 30/14 DIP1G900-333			
Product Condition (new / used)	New			

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 - Satimo COMOSAR Validation Dipole

Page: 4/11



Ref. ACR 262.8.14.SATU.A

4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency b	and	Expanded Uncertainty on Return Loss		
400-6000M	Hz	0.1 dB		

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %
10 g	20.1 %


Page: 5/11




Ref: ACR.262.8.14.SATU.A.

6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

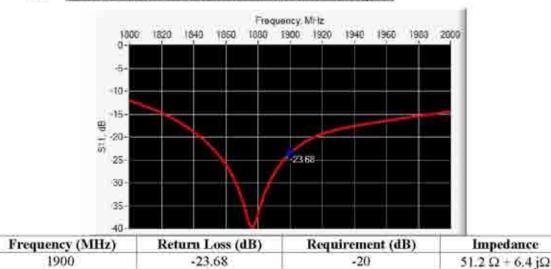

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

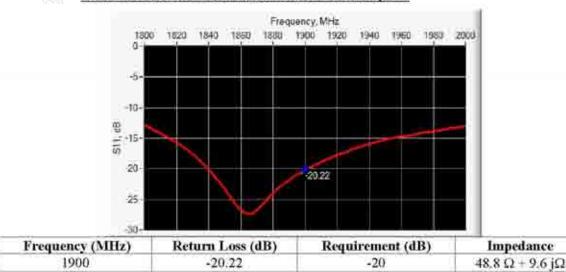

6.3 MECHANICAL DIMENSIONS

Frequency MHz	Ln	nm	hm	m	dı	nm
	required	measured	required	measured	required	measured
300	420.0 ±1 %.		250.0 ±1 %.		6.35 ±1%	
450	290.0 ±1 %.		166.7 ±1%.		6.35 ±1 %	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %	

Page: 6/11



Ref: ACR.262.8.14.SATU.A.

900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %	
1450	89.1 ±1%		51.7±1%		3.6±1%	
1500	80.5 ±1 %		50.0 ±1 %		3.6 ±1 %	
1640	79.0 ±1 %.		45:7:±1%		3.6 ±1 %	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %		41.7±1%		3.6 ±1 %	
1900	68.0 ±1 %.	PASS	39.5 ±1 %.	PASS	3.6 ±1 %.	PAS
1950	66.3 ±1 %		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %		37.5±1%		3.6±1%	
2100	61.0±1 %		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %	
2600	48.5±1%		28.8 ±1 %		3.6 ±1 %	
3000	41.5±1%		25.0 ±1 %.		3.6 ±1 %.	
3500	37,0±1 %		26.4 ±1 %		3,6 ±1 %.	
3700	34.7±1 %		26.4 ±1 %.		3.6±1 %.	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative per	mittivity (c,')	Conductiv	ity (σ) S/m
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9±5 %		0.89±5%	
835	41.5 ±5 %		0.90±5%	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5%	
1750	40.1 ±5 %		1.37 ±5 %	
1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %	PASS	1.40 ±5 %	PASS
1950	40.0 ±5 %		1.40 ±5%	
2000	40.0 ±5 %		1.40 ±5 %	

Page: 7/11



Ref: ACR.262.8.14.SATU.A.

2100	39.8 ±5 %	1.49 ±5 %
2300	39.5±5%	1.67±5%
2450	39.2 ±5 %	1.80 ±5 %
2600	39.0 ±5 %	1.96±5%
3000	38.5 ±5 %	2.40±5%
3500	37.9 ±5 %	2.91 ±5 %

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4	
Phantom	SN 20/09 SAM71	
Probe	SN 18/11 EPG122	
Liquid	Head Liquid Values: eps': 41.1 sigma: 1.42	
Distance between dipole center and liquid	10.0 mm	
Area scan resolution	dx=8mm/dy=8mm	
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm	
Frequency	1900 MHz	
Input power	20 dBm	
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	


Frequency MHz	I g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5,55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19,3	
1800	38.4		20.1	
1900	39.7	39.84 (3.98)	20.5	20.20 (2.02)
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	


Page: 8/11



Ref: ACR.262.8.14.SATU.A

2450	52.4	24
2600	55.3	24.6
3000	63.8	25.7
3500	67.1	25





7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (s,')		Conductivity (a) 5/m	
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7±5 %		0.94±5%	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %		0.97 ±5 %	
900	55.0 ±5 %		1.05 ±5 %	
915	55.0±5.%		1.06 ±5 %	
1450	54.0 ±5 %		1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %		1.52±5%	
1900	53.3 ±5 %	PASS	1.52 ±5 %	PASS
2000	53.3 ±5 %		1.52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7±5%		1.95 ±5 %	
2600	52.5 ±5 %		2.16±5%	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5%	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	

Page: 9/11




Ref: ACR.262.8.14.SATU.A

5500	48.6 ±10 %	5.65 ±10 %
5600	48.5 ±10 %	5.77±10%
5800	48.2 ±10 %	6.00 ±10 %

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4	
Phantom	SN 20/09 SAM71	
Probe	SN 18/11 EPG122	
Liquid	Body Liquid Values: eps' 54.2 sigma 1.54	
Distance between dipole center and liquid	10.0 mm	
Area scan resolution	dx=8mm/dy=8mm	
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm	
Frequency	1900 MHz	
Input power	20 dBm	
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)	
	measured	measured	
1900	43:33 (4:33)	21.59 (2.16)	

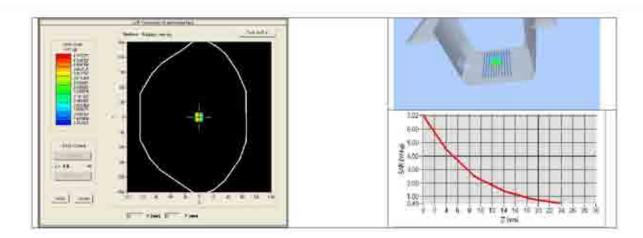

Page: 10/11



Ref: ACR.262.8.14.SATU.A

8 LIST OF EQUIPMENT

Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date	
SAM Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated No ca required	
COMOSAR Test Bench	Version 3	NA	Validated No cal required	Validated No ca required	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016	
Calipers	Carrera	CALIPER-01	12/2013	12/2016	
Reference Probe	Satimo	EPG122 SN 18/11	10/2013	10/2014	
Multimeter	Keithley 2000	1188656	12/2013	12/2016	
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016	
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.		
Power Meter	HP E4418A	US38261498	12/2013	12/2016	
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016	
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required	
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015	


Page: 11/11


7. SAR System PHOTOGRAPHS



DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN


Note:The position used in the measurement were according to IEEE1528-2003






8. SETUP PHOTOGRAPHS



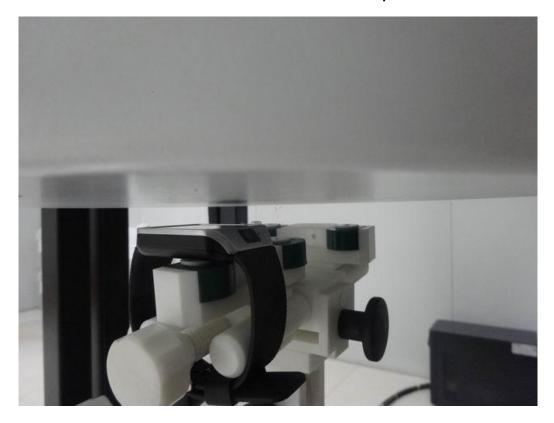

0mm Wrist-Worn Back Side Setup Photo

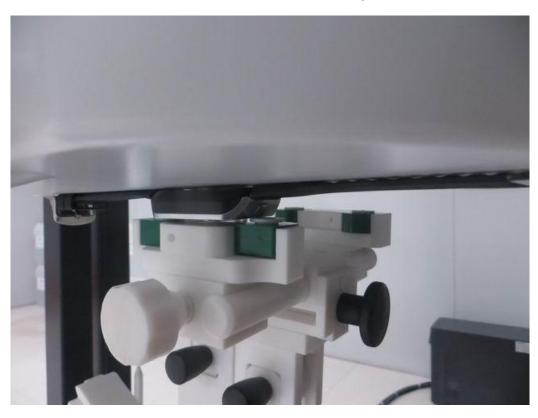

9. EUTPHOTOGRAPHS





.....The End of Test Report.....