

Test Report

Applicant	: Shenzhen FeelStorm Technology Co.,Ltd.
Address	: Floor 5th, Building C, Huawan Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen.
Product Name	: Video Baby Monitor
Brand Mark	: N/A
Model	: BM934
Series model	: N/A
FCC ID	: 2AFX2BM934-1
Report Number	: BLA-EMC-202504-A11302
Date of Receipt	: Apr. 29, 2025
Date of Test	: Apr. 29, 2025 to May 27, 2025
Test Standard	: 47 CFR Part 15, Subpart C 15.247
Test Result	: Pass

Compiled by: *Mark Chen* Review by: *Xavier*



Approved by: *Blue.Zheng*
Issued Date: Jun. 03, 2025

BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Address: Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1 General information	5
1.1 General information	5
1.2 General description of EUT	5
2 Test summary	6
3 Test Configuration	7
3.1 Test mode	7
3.2 Operation Frequency each of channel	7
3.3 Test channel	8
3.4 Auxiliary equipment	9
3.5 Test environment	9
4 Laboratory information	10
4.1 Laboratory and accreditations	10
4.2 Measurement uncertainty	10
5 Test equipment	11
6 Test result	14
6.1 Antenna requirement	14
6.2 Conducted emissions at AC power line (150 kHz-30 MHz)	15
6.3 Conducted peak output Power	19
6.4 20dB Bandwidth	20
6.5 Conducted Band Edges Measurement	21
6.6 Conducted spurious emissions	22
6.7 Carrier Frequencies Separation	23
6.8 Hopping Channel Number	24
6.9 Dwell Time	25
6.10 Radiated spurious emissions	26
6.11 Radiated emissions which fall in the restricted bands	37
7 Appendix A	44
7.1 Maximum Conducted Output Power	44
7.2 -20dB Bandwidth	47
7.3 Occupied Channel Bandwidth	50

7.4 Band Edge	53
7.5 Band Edge(Hopping)	56
7.6 Conducted RF Spurious Emission	59
7.7 Carrier Frequencies Separation	63
7.8 Number of Hopping Channel	64
7.9 Dwell Time	65
Appendix B: photographs of test setup	67
Appendix C: photographs of EUT	69

BlueAsia

Revise Record

Version No.	Date	Description
01	Jun. 03, 2025	Original

BlueAsia

1 General information

1.1 General information

Applicant	Shenzhen FeelStorm Technology Co.,Ltd.
Address	Floor 5th, Building C, Huawan Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen.
Manufacturer	Shenzhen FeelStorm Technology Co.,Ltd.
Address	Floor 5th, Building C, Huawan Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen.
Factory	Shenzhen FeelStorm Technology Co.,Ltd.
Address	Floor 5th, Building C, Huawan Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen.

1.2 General description of EUT

Product name	Video Baby Monitor
Model no.	BM934
Operation Frequency	2408MHz-2468MHz
Modulation Type	GFSK
Modulation Technique	Frequency Hopping Spread Spectrum(FHSS)
Channel Spacing	4MHz
Number of Channels	16
Antenna Type	Wire antenna
Antenna Gain	3.44dBi(Provided by customer)
Power supply	Adapter model: KA06E-0501000US INPUT: AC 100-240V, 50/60Hz 0.25A Max OUTPUT: DC 5V, 1000mA
Test Voltage	AC 120V
Hardware Version	V1.0
Software Version	V1.0
<i>Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.</i>	

2 Test summary

No.	Test item	FCC standard	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2013 Clause 6.2	Pass
3	Conducted Peak Output Power	§ 15.247 (b)(1)	ANSI C63.10-2013 Clause 7.8.5	Pass
4	20dB Bandwidth	§ 15.247 (a)(1)	ANSI C63.10-2013 Clause 6.9.2	Pass
5	Conducted Band Edges Measurement	§ 15.247 (d)	ANSI C63.10-2013 Clause 7.8.6	Pass
6	Conducted Spurious Emissions	§ 15.247 (d)	ANSI C63.10-2013 Clause 7.8.8	Pass
7	Carrier Frequencies Separation	§ 15.247 (a)(1)	ANSI C63.10-2013 Clause 7.8.2	Pass
8	Hopping Channel Number	§ 15.247 (a)(1) (iii)	ANSI C63.10-2013 Clause 7.8.3	Pass
9	Dwell Time	§ 15.247 (a)(1) (iii)	ANSI C63.10-2013 Clause 7.8.4	Pass
10	Radiated Spurious Emissions	§ 15.247 (d) § 15209	ANSI C63.10-2013 Clause 6.4,6.5,6.6	Pass
11	Radiated Emissions which fall in the restricted bands	§ 15.247 (d) § 15.205	ANSI C63.10-2013 Clause 6.10.5	Pass

3 Test Configuration

3.1 Test mode

Test Mode ^{Note 1}	Description
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non-hopping mode all have been tested)
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use; the EUT was operated in the engineering mode ^{Note 2} to fix the TX or Rx frequency that was for the purpose of the measurements.

Note 2: Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

Power level setup in software			
Test Software Name	Default		
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH1	2408	TX level : Default
	CH8	2436	
	CH16	2468	

3.2 Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2408MHz	8	2436MHz	15	2464MHz
2	2412MHz	9	2440MHz	16	2468MHz
3	2416MHz	10	2444MHz	---	---
4	2420MHz	11	2448MHz	---	---
5	2424MHz	12	2452MHz	---	---

6	2428MHz	13	2456MHz	---	---
7	2432MHz	14	2460MHz	---	---

3.3 Test channel

Channel	Frequency
The lowest channel	2408MHz
The middle channel	2436MHz
The Highest channel	2468MHz

3.4 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	Lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)
--	--	--	--	--

Note:
"--" mean no any auxiliary device during testing.

3.5 Test environment

Environment	Temperature	Voltage
Normal	25°C	AC 120V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Address:	Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
ISED CAB identifier No.:	CN0028
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2024/08/08	2025/08/07
BLA-EMC-012	Broadband antenna	VULB9168	Schwarzbeck	00836 P:00227	2022/10/12	2025/10/11
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA201804300 3	2024/08/08	2025/08/07
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2024/06/28	2025/06/27
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2024/06/28	2025/06/27
BLA-EMC-066	Amplifier	LNPA_30M01 G-30	SKET	SK202106080 1	2024/06/28	2025/06/27
BLA-EMC-086	Amplifier	LNPA_18G40 G-50dB	SKET	SK202207130 1	2024/06/28	2025/06/27
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A

BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A
-----------	---------------	-----	----------	-----	-----	-----

RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2024/06/28	2025/06/27
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2024/08/08	2025/08/07
BLA-EMC-042	Power sensor	RPR3006W	DARE	14I00889SN042	2024/08/08	2025/08/07
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2024/08/08	2025/08/07
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2024/06/28	2025/06/27
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420161	2024/08/08	2025/08/07
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS141094	2024/06/28	2025/06/27

Conducted Emissions

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-001	Shield room	8*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-011	LISN	ENV216	R&S	101372	2024/08/08	2025/08/07
BLA-EMC-033	Impedance transformer	DC-2GHz	DFXP	N/A	2024/06/28	2025/06/27
BLA-EMC-041	LISN	AT166-2	ATTEN	AKK180600003	2024/08/08	2025/08/07
BLA-EMC-045	Impedance stable network	ISNT8-cat6	TESEQ	53580	2024/08/08	2025/08/07
BLA-EMC-095	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01045	2024/06/28	2025/06/27
BLA-EMC-096	Single-channel vehicle artificial	NNBM 8124	Schwarzbeck	01075	2024/06/28	2025/06/27

	power network					
BLA-XC-05	Coaxial Cable	N/A	BlueAsia	V05	N/A	N/A

Test Software Record:

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S003	EZ-EMC	EZ	EEMC-3A1+	CE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

6 Test result

6.1 Antenna requirement


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is Wire antenna. The best case gain of the antenna is 3.44dBi.

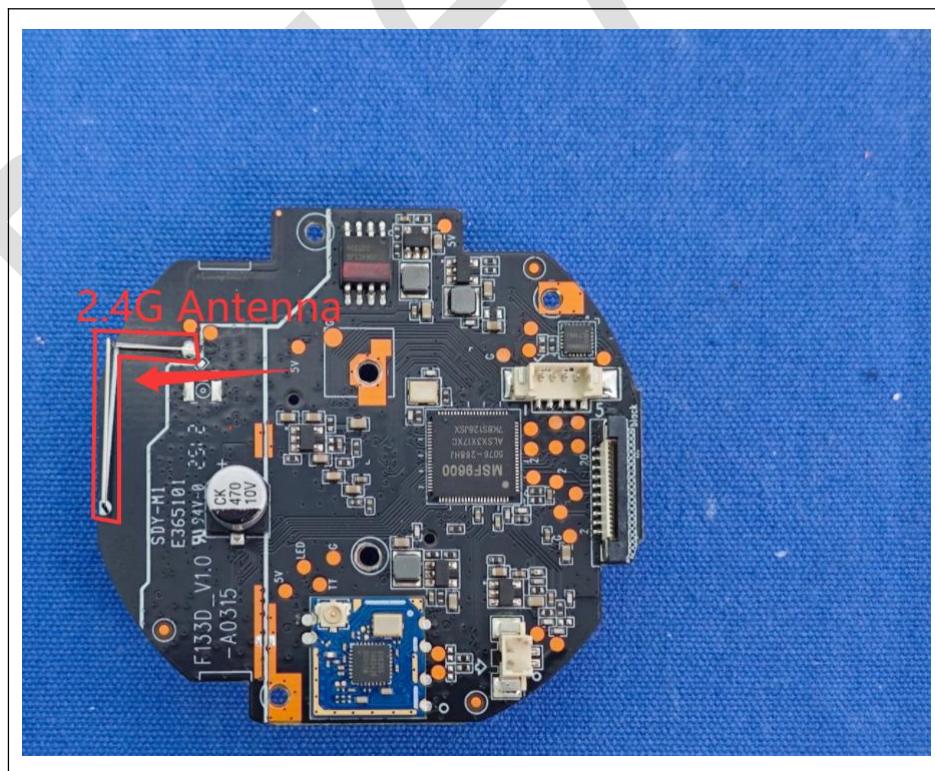

6.2 Conducted emissions at AC power line (150 kHz-30 MHz)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

6.2.2 Test setup

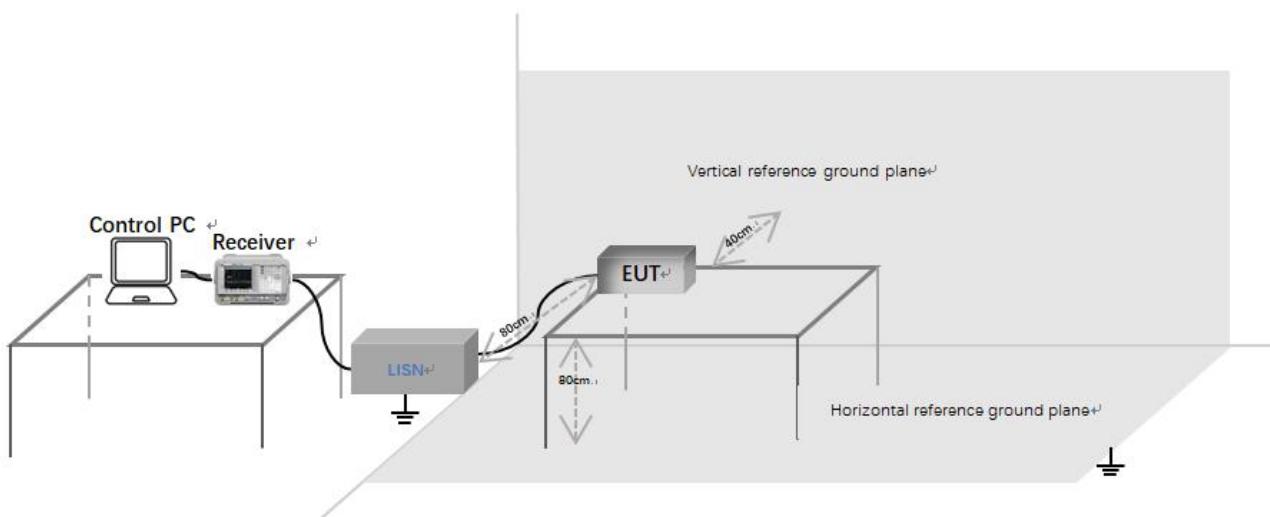

Description of test setup connection:

- Connect the control PC to the receiver through a USB to GPIB cable;
- The receiver is connected to the LISN through a coaxial line;
- Connect the power port of LISN to the EUT.


6.2.3 Procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

LISN=Read Level+ Cable Loss+ LISN Factor


6.2.4 Test data

[Test Mode: TX]; [Line: Line]

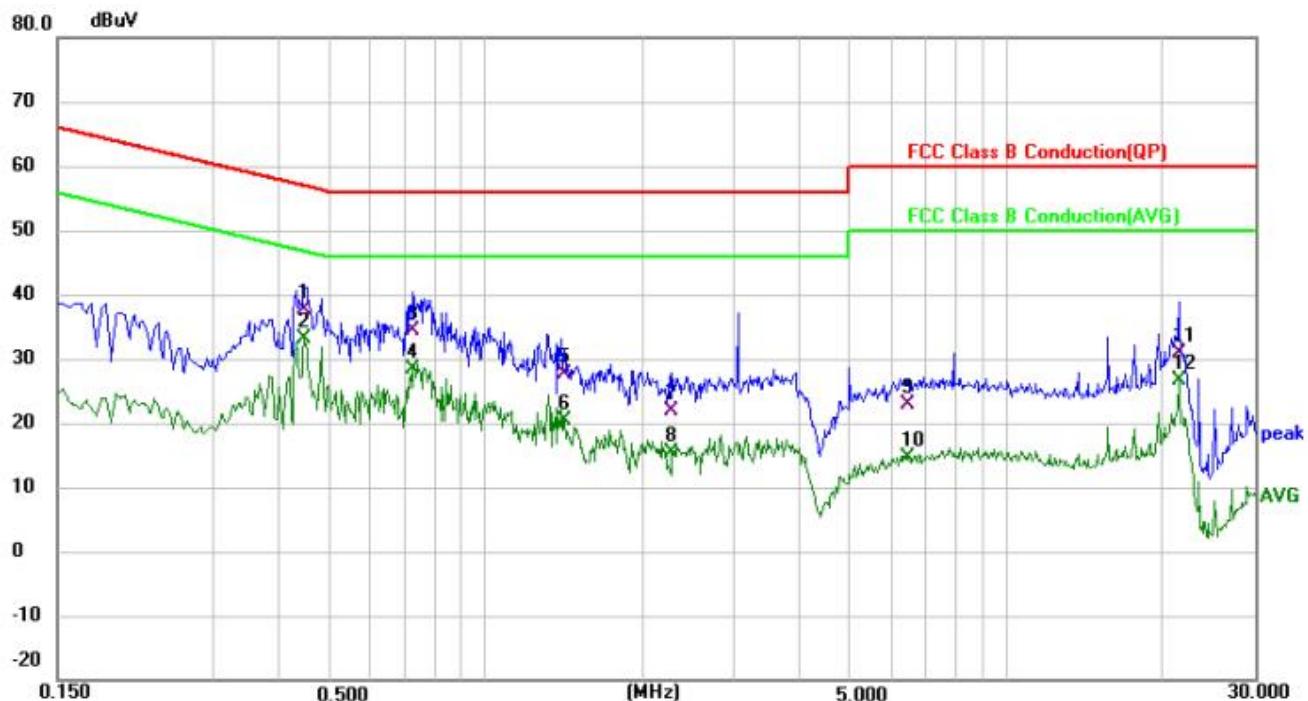

No.	Mk.	Freq.	Reading	Correct Factor	Measure-	Limit	Over
			Level		ment		
		MHz	dBuV	dB	dBuV	dB	Detector
1		0.4460	27.82	9.85	37.67	56.95	-19.28 QP
2	*	0.4460	23.24	9.85	33.09	46.95	-13.86 AVG
3		0.7259	24.50	9.76	34.26	56.00	-21.74 QP
4		0.7259	18.61	9.76	28.37	46.00	-17.63 AVG
5		1.4139	17.76	9.84	27.60	56.00	-28.40 QP
6		1.4139	10.50	9.84	20.34	46.00	-25.66 AVG
7		2.2740	12.02	9.96	21.98	56.00	-34.02 QP
8		2.2740	5.35	9.96	15.31	46.00	-30.69 AVG
9		6.4618	12.71	10.23	22.94	60.00	-37.06 QP
10		6.4618	4.38	10.23	14.61	50.00	-35.39 AVG
11		21.4740	17.87	13.08	30.95	60.00	-29.05 QP
12		21.4740	13.48	13.08	26.56	50.00	-23.44 AVG

Test Result: Pass

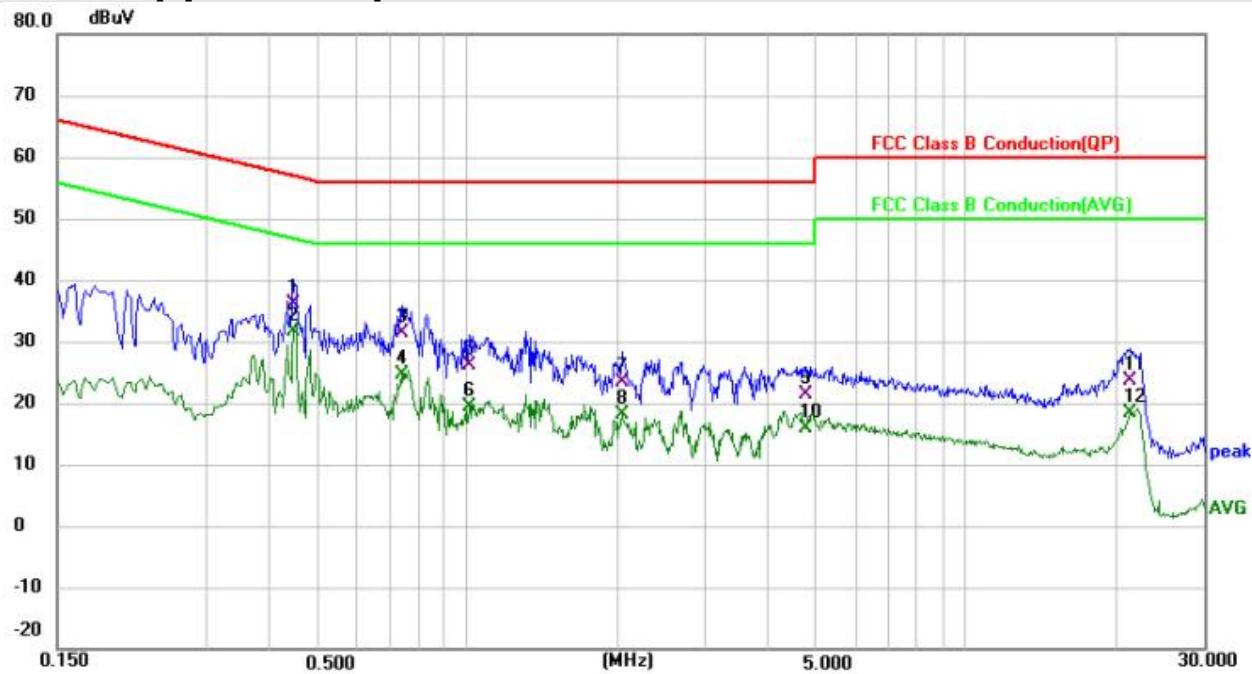[**Test Mode: TX**]; [**Line: Neutral**]


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV	dB	Detector
1		0.4460	26.25	9.78	36.03	56.95	-20.92 QP
2	*	0.4460	21.89	9.78	31.67	46.95	-15.28 AVG
3		0.7380	21.76	9.71	31.47	56.00	-24.53 QP
4		0.7380	14.97	9.71	24.68	46.00	-21.32 AVG
5		1.0100	16.53	9.72	26.25	56.00	-29.75 QP
6		1.0100	9.76	9.72	19.48	46.00	-26.52 AVG
7		2.0340	13.45	9.83	23.28	56.00	-32.72 QP
8		2.0340	8.31	9.83	18.14	46.00	-27.86 AVG
9		4.7940	11.25	10.11	21.36	56.00	-34.64 QP
10		4.7940	5.75	10.11	15.86	46.00	-30.14 AVG
11		21.3220	10.69	12.99	23.68	60.00	-36.32 QP
12		21.3220	5.41	12.99	18.40	50.00	-31.60 AVG

Test Result: Pass


6.3 Conducted peak output Power

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.3.1 Limit

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.3.2 Test setup

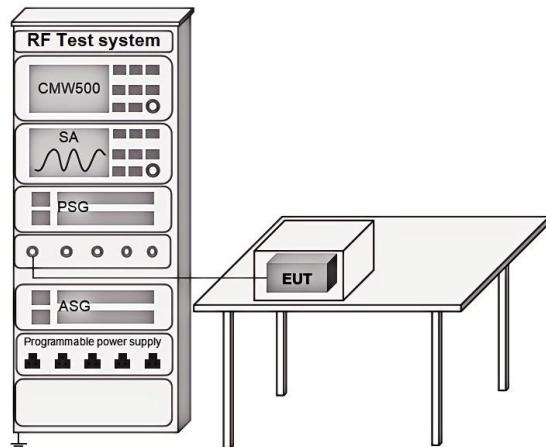


6.3.3 Test data

Pass: Please refer to appendix A for details

6.4 20dB Bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.4.1 Test setup

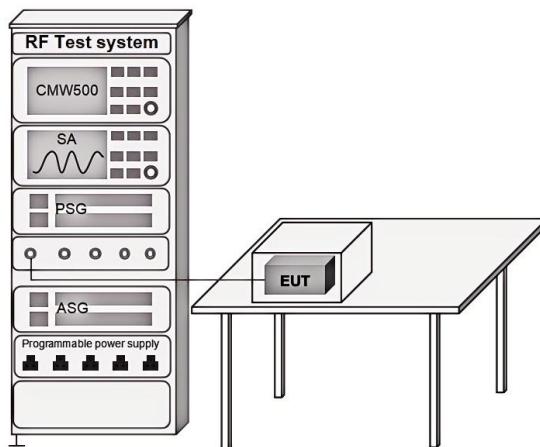

6.4.2 Test data

Pass: Please refer to appendix A for details

6.5 Conducted Band Edges Measurement

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.5.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.5.2 Test setup

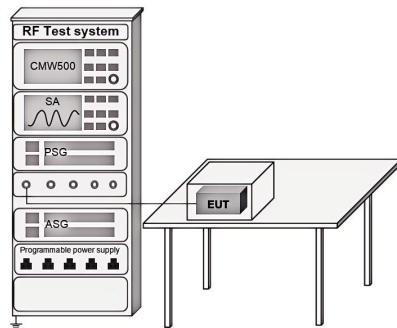

6.5.3 Test data

Pass: Please refer to appendix A for details

6.6 Conducted spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.6.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.6.2 Test setup

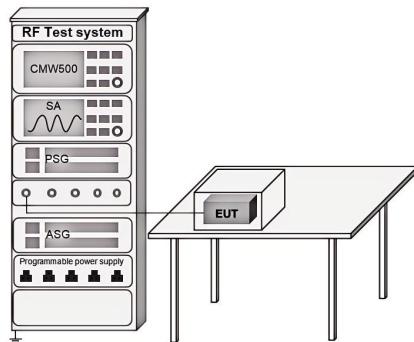

6.6.3 Test data

Pass: Please refer to appendix A for details


6.7 Carrier Frequencies Separation

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.7.1 Limit

2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

6.7.2 Test setup

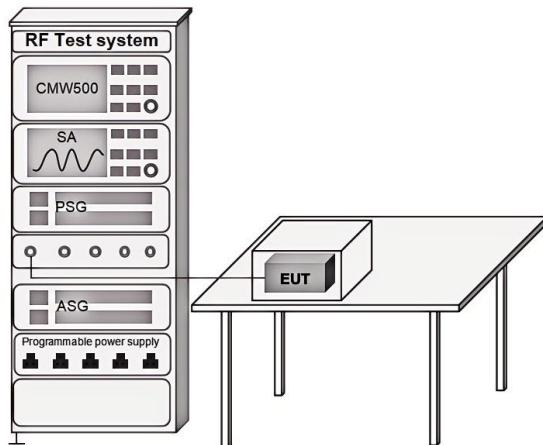

6.7.3 Test data

Pass: Please refer to appendix A for details


6.8 Hopping Channel Number

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.8.1 Limit

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth \geq 250kHz
2400-2483.5	15
5725-5850	75

6.8.2 Test setup

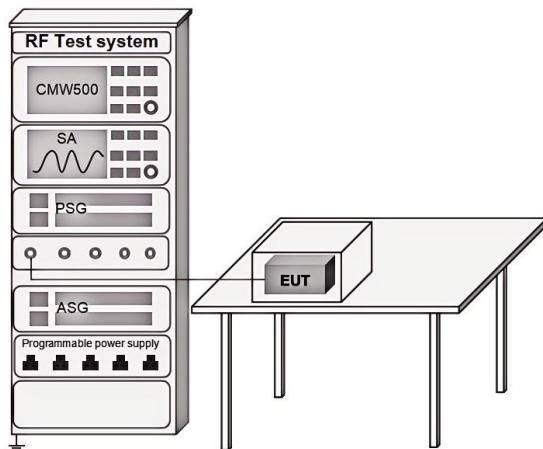

6.8.3 Test data

Pass: Please refer to appendix A for details


6.9 Dwell Time

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.9.1 Limit

Frequency(MHz)	Limit
902-928	0.4s within a 20s period(20dB bandwidth<250kHz)
	0.4s within a 10s period(20dB bandwidth≥250kHz)
2400-2483.5	0.4s within a period of 0.4s multiplied by the number of hopping channels
5725-5850	0.4s within a 30s period

6.9.2 Test setup

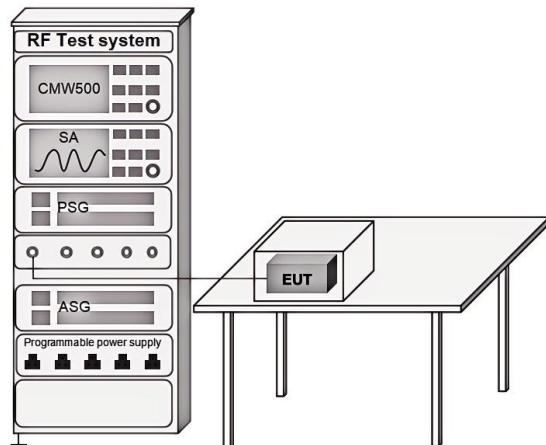

6.9.3 Test data

Pass: Please refer to appendix A for details

6.10 Radiated spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.10.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.10.2 Test setup


Below 1GHz:

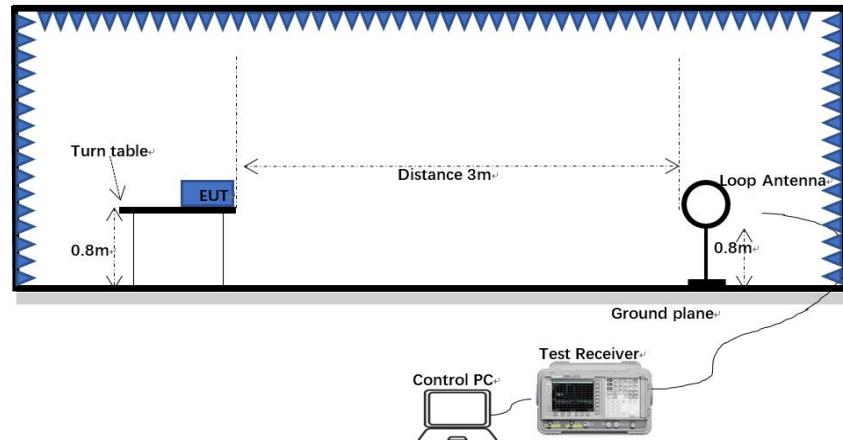

30MHz-1GHz:

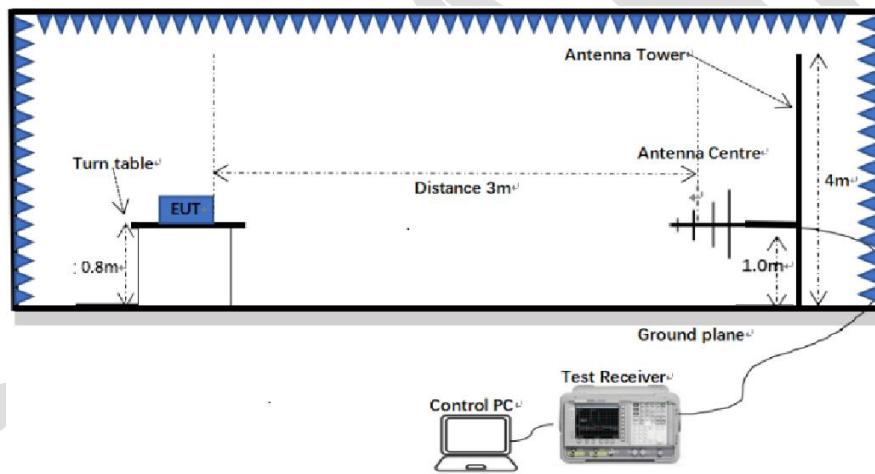

Above 1GHz:

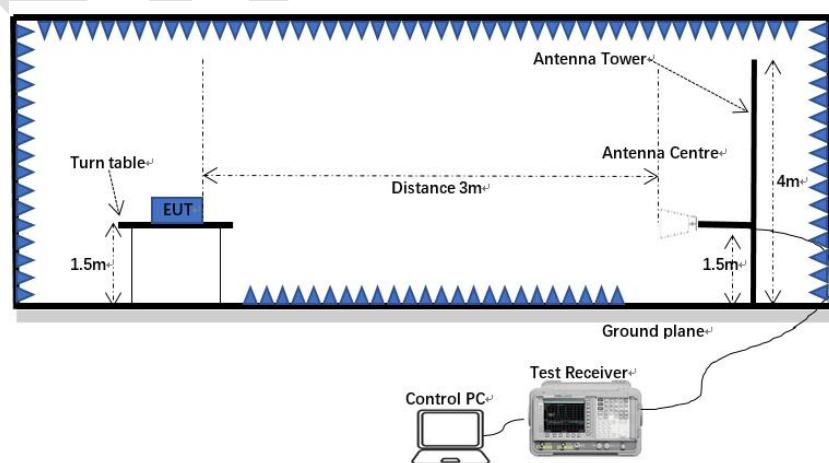

6.10.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

6.10.4 Test data

Below 1GHz

Remark: During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel for GFSK was recorded in the report.

[Test mode: TX]; [Polarity: Horizontal]



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.8260	-1.03	19.65	18.62	40.00	-21.38	QP
2	124.5690	7.92	18.87	26.79	43.50	-16.71	QP
3	209.3129	13.40	16.06	29.46	43.50	-14.04	QP
4	334.8588	14.63	21.57	36.20	46.00	-9.80	QP
5 *	502.9395	16.52	25.38	41.90	46.00	-4.10	QP
6	711.6734	10.68	28.61	39.29	46.00	-6.71	QP

Test Result: Pass

[**Test mode: TX**]; [**Polarity: Vertical**]


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.8119	11.14	19.77	30.91	40.00	-9.09	QP
2 *	54.4515	13.17	19.57	32.74	40.00	-7.26	QP
3	94.4282	16.46	15.39	31.85	43.50	-11.65	QP
4	209.3129	20.07	16.06	36.13	43.50	-7.37	QP
5	502.9395	13.04	25.38	38.42	46.00	-7.58	QP
6	711.6734	9.77	28.61	38.38	46.00	-7.62	QP

Test Result: Pass

Above 1GHz:

[Test mode: TX low channel]; [Polarity: Horizontal]



No.	Mk.	Freq.	Reading	Correct Factor	Measure- ment	Limit	Over	
			Level					
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		4818.750	42.78	6.30	49.08	74.00	-24.92	peak
2		5841.000	39.24	8.89	48.13	74.00	-25.87	peak
3		7615.250	41.29	10.59	51.88	74.00	-22.12	peak
4		8461.250	39.07	11.47	50.54	74.00	-23.46	peak
5	*	9636.250	39.53	13.35	52.88	74.00	-21.12	peak
6		10646.75	38.39	13.24	51.63	74.00	-22.37	peak


Test Result: Pass

[Test mode: TX low channel]; [Polarity: Vertical]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4818.750	42.39	6.30	48.69	74.00	-25.31	peak
2		5805.750	39.40	9.00	48.40	74.00	-25.60	peak
3		7791.500	40.66	10.67	51.33	74.00	-22.67	peak
4		8672.750	39.65	11.80	51.45	74.00	-22.55	peak
5		10071.00	38.61	13.26	51.87	74.00	-22.13	peak
6	*	10517.50	38.43	13.72	52.15	74.00	-21.85	peak

Test Result: Pass

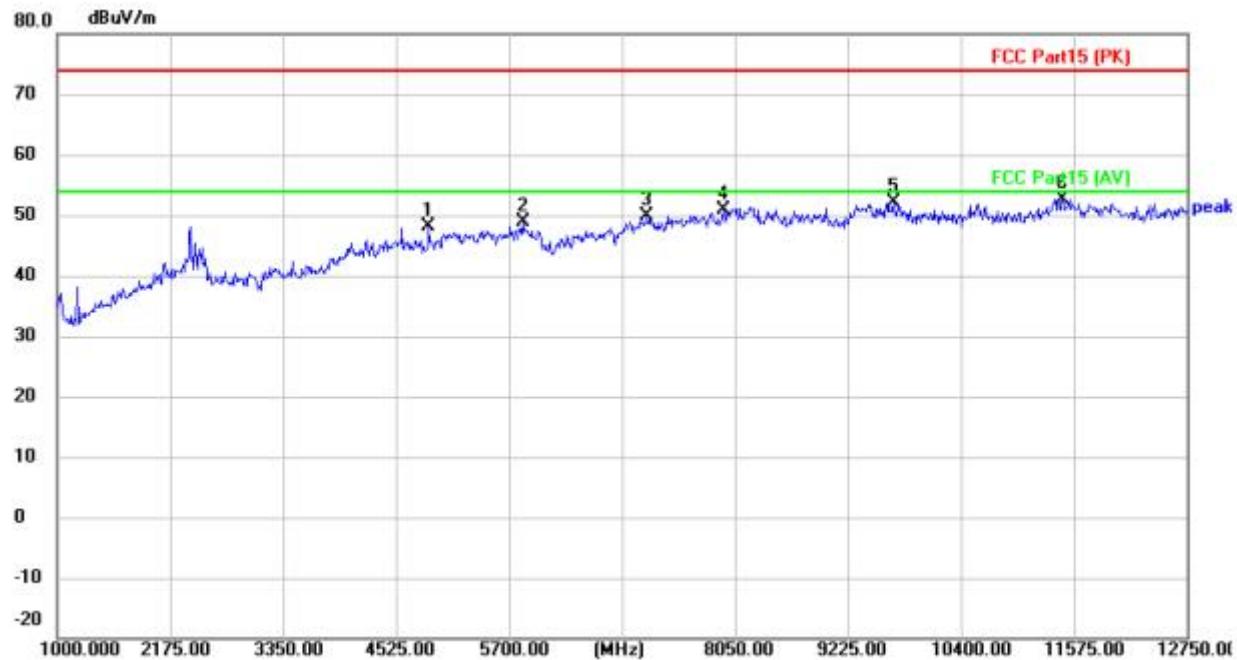[**Test mode: TX middle channel**]; [**Polarity: Horizontal**]


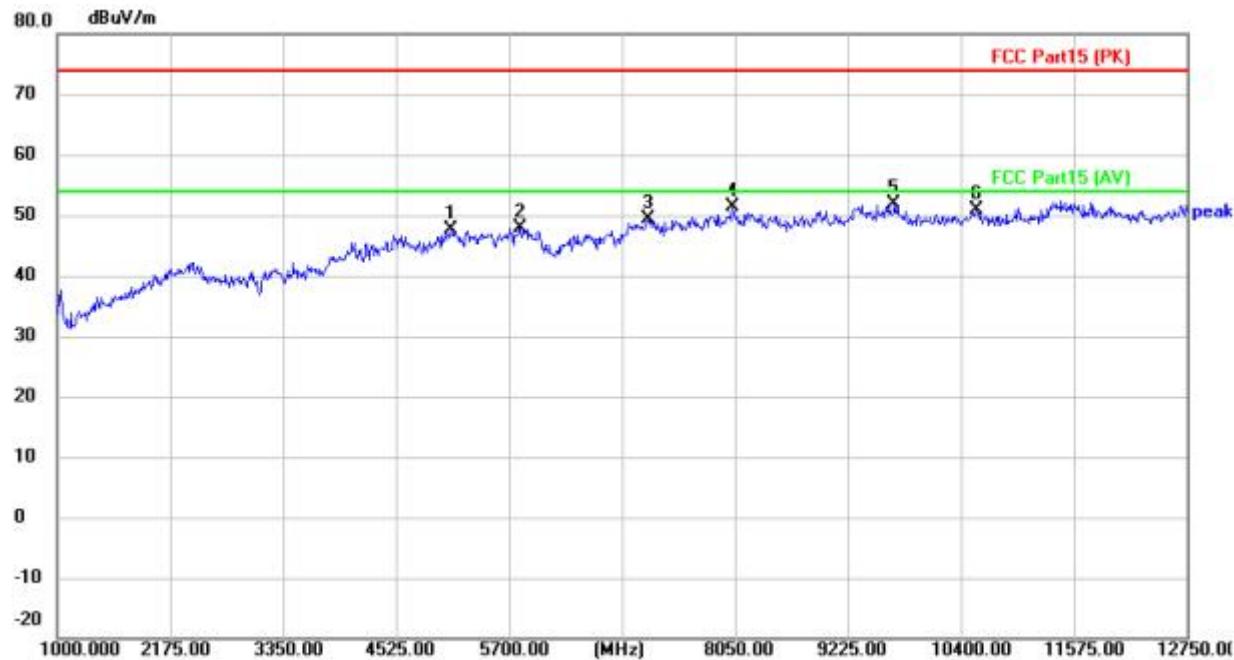
No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		4865.750	41.75	6.35	48.10	74.00	-25.90
2		5841.000	39.97	8.89	48.86	74.00	-25.14
3		7133.500	39.33	10.57	49.90	74.00	-24.10
4		7932.500	39.56	11.29	50.85	74.00	-23.15
5		9695.000	38.71	13.51	52.22	74.00	-21.78
6	*	11457.50	37.97	14.62	52.59	74.00	-21.41

Test Result: Pass

[**Test mode: TX middle channel**]; [**Polarity: Vertical**]



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		5159.500	39.62	7.97	47.59	74.00	-26.41	peak
2		6510.750	39.85	8.47	48.32	74.00	-25.68	peak
3		8003.000	39.43	11.61	51.04	74.00	-22.96	peak
4		9248.500	38.15	12.99	51.14	74.00	-22.86	peak
5		10564.50	37.34	13.66	51.00	74.00	-23.00	peak
6	*	11410.50	37.90	14.33	52.23	74.00	-21.77	peak

Test Result: Pass

[**Test mode: TX High channel**]; [**Polarity: Horizontal**]


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		5089.000	39.37	8.36	47.73	74.00	-26.27 peak
2		5817.500	39.01	8.97	47.98	74.00	-26.02 peak
3		7145.250	38.78	10.64	49.42	74.00	-24.58 peak
4		8026.500	39.70	11.65	51.35	74.00	-22.65 peak
5	*	9706.750	38.29	13.56	51.85	74.00	-22.15 peak
6		10564.50	37.25	13.66	50.91	74.00	-23.09 peak

Test Result: Pass

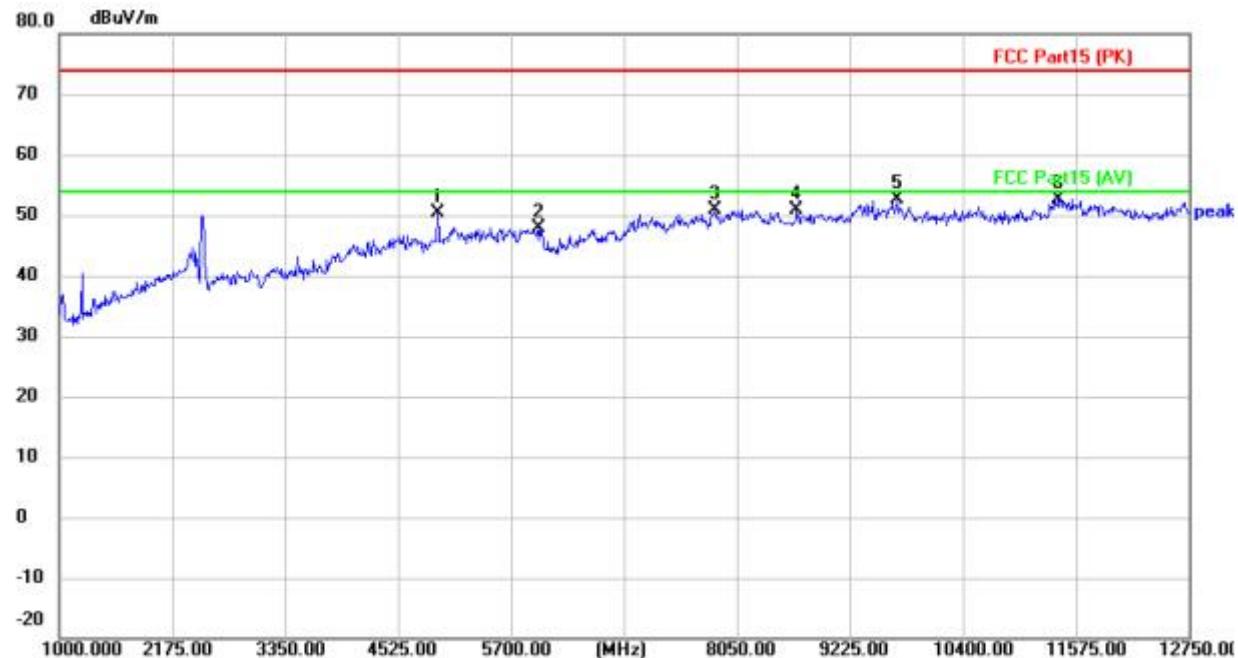[**Test mode: TX High channel]; [Polarity: Vertical]**


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4936.250	43.35	7.08	50.43	74.00	-23.57	peak
2		5982.000	39.01	8.98	47.99	74.00	-26.01	peak
3		7826.750	40.18	10.66	50.84	74.00	-23.16	peak
4		8672.750	38.97	11.80	50.77	74.00	-23.23	peak
5		9718.500	39.02	13.63	52.65	74.00	-21.35	peak
6	*	11398.75	38.41	14.26	52.67	74.00	-21.33	peak

Test Result: Pass

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

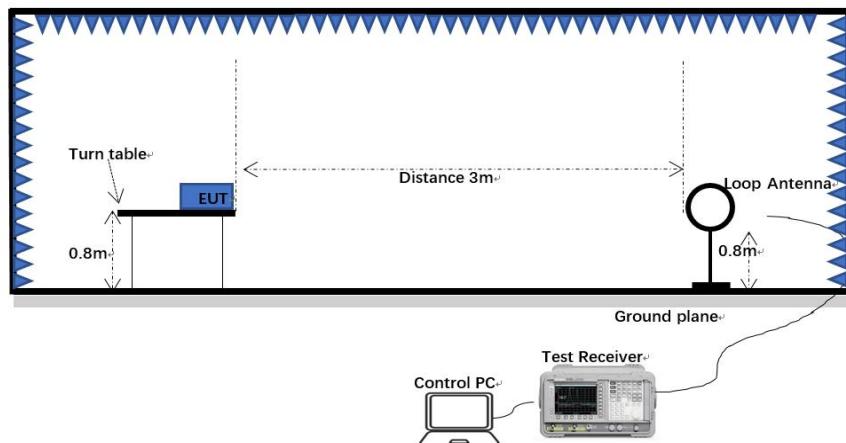

30MHz-1GHz:

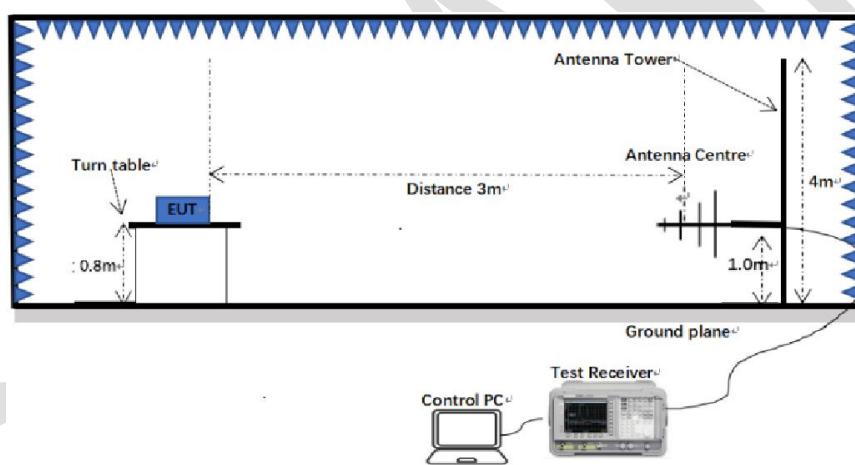

Above 1GHz:

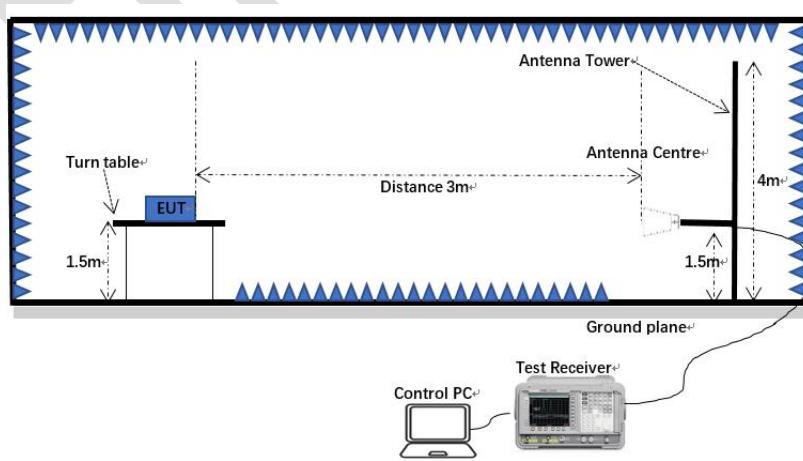

6.11.3 Procedure


- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.11.4 Test data

[Test mode: TX low channel]; [Polarity: Horizontal]

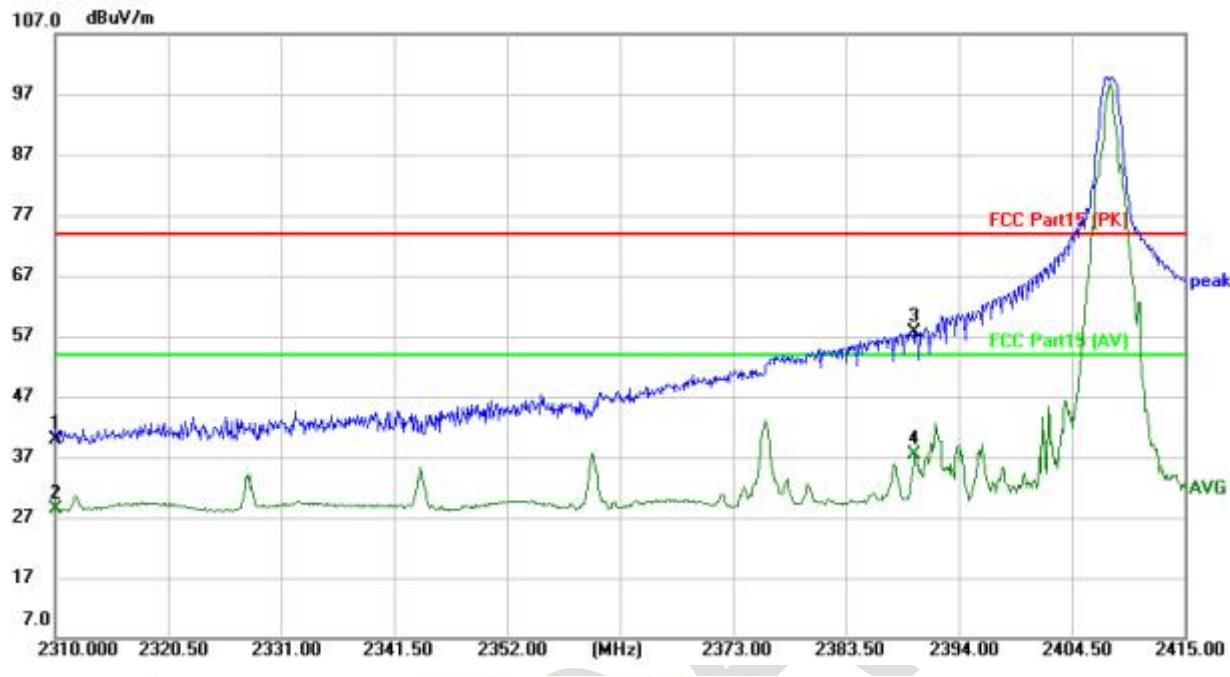

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	2310.000	42.72	-2.87	39.85	74.00	-34.15	peak	
2	2310.000	31.36	-2.87	28.49	54.00	-25.51	AVG	
3	*	2390.000	60.06	-2.44	57.62	74.00	-16.38	peak
4		2390.000	39.91	-2.44	37.47	54.00	-16.53	AVG

Test Result: Pass

[Test mode:TX low channel]; [Polarity: Vertical]




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		2310.000	42.28	-2.87	39.41	74.00	-34.59 peak
2		2310.000	31.49	-2.87	28.62	54.00	-25.38 AVG
3		2390.000	57.83	-2.44	55.39	74.00	-18.61 peak
4	*	2390.000	39.11	-2.44	36.67	54.00	-17.33 AVG

Test Result: Pass

[**Test mode: TX High channel]; [Polarity: Horizontal]**


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	58.97	-2.91	56.06	74.00	-17.94	peak
2		2483.500	34.37	-2.91	31.46	54.00	-22.54	AVG
3		2500.000	52.84	-3.00	49.84	74.00	-24.16	peak
4		2500.000	38.17	-3.00	35.17	54.00	-18.83	AVG

Test Result: Pass

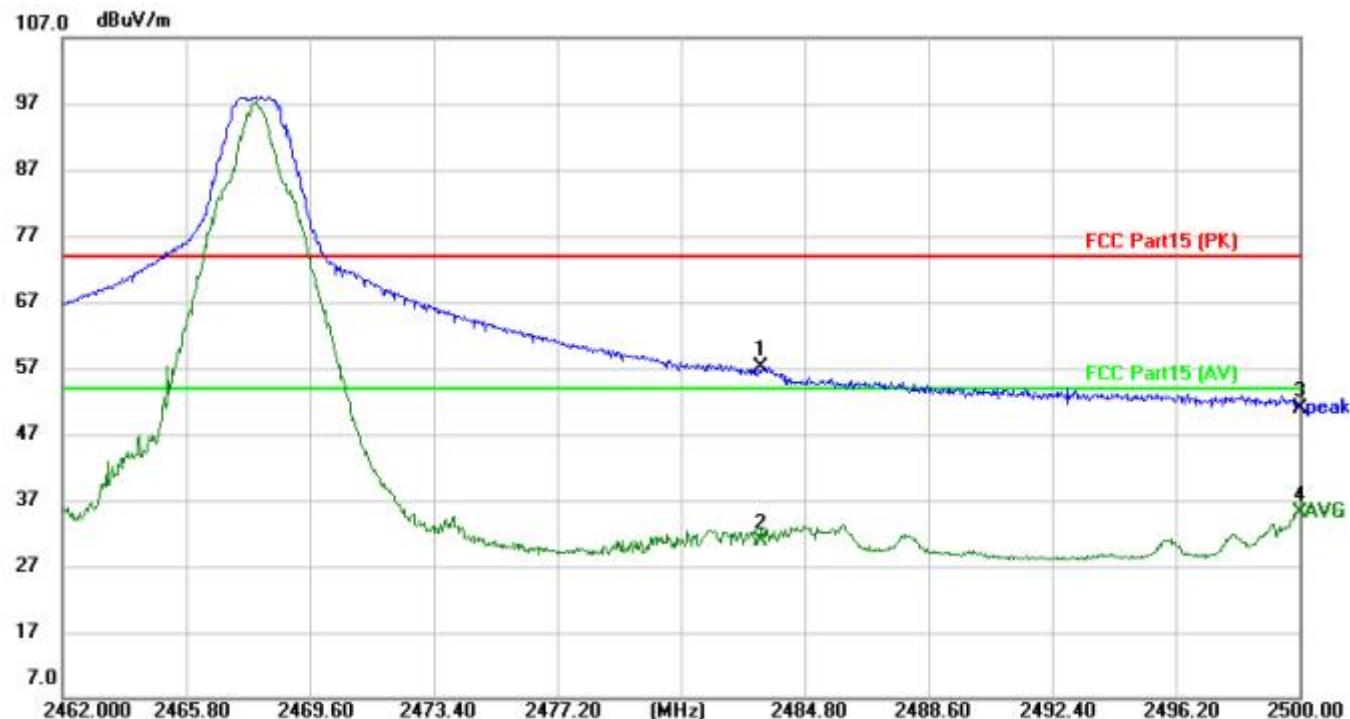[**Test mode:TX High channel]; [Polarity: Vertical]**


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	60.11	-2.91	57.20	74.00	-16.80	peak
2		2483.500	33.71	-2.91	30.80	54.00	-23.20	AVG
3		2500.000	53.78	-3.00	50.78	74.00	-23.22	peak
4		2500.000	38.01	-3.00	35.01	54.00	-18.99	AVG


Test Result: Pass

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2408	Ant1	13.736	21	Pass
NVNT	2.4G	2436	Ant1	13.767	21	Pass
NVNT	2.4G	2468	Ant1	13.831	21	Pass


Power NVNT 2.4G 2408MHz Ant1

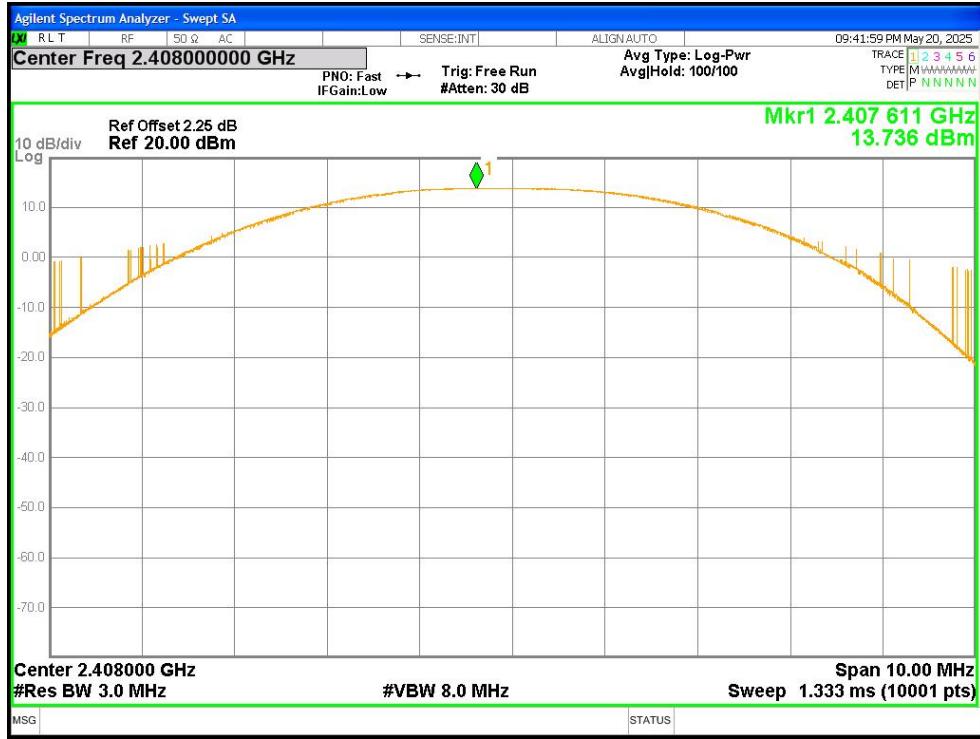

Power NVNT 2.4G 2436MHz Ant1

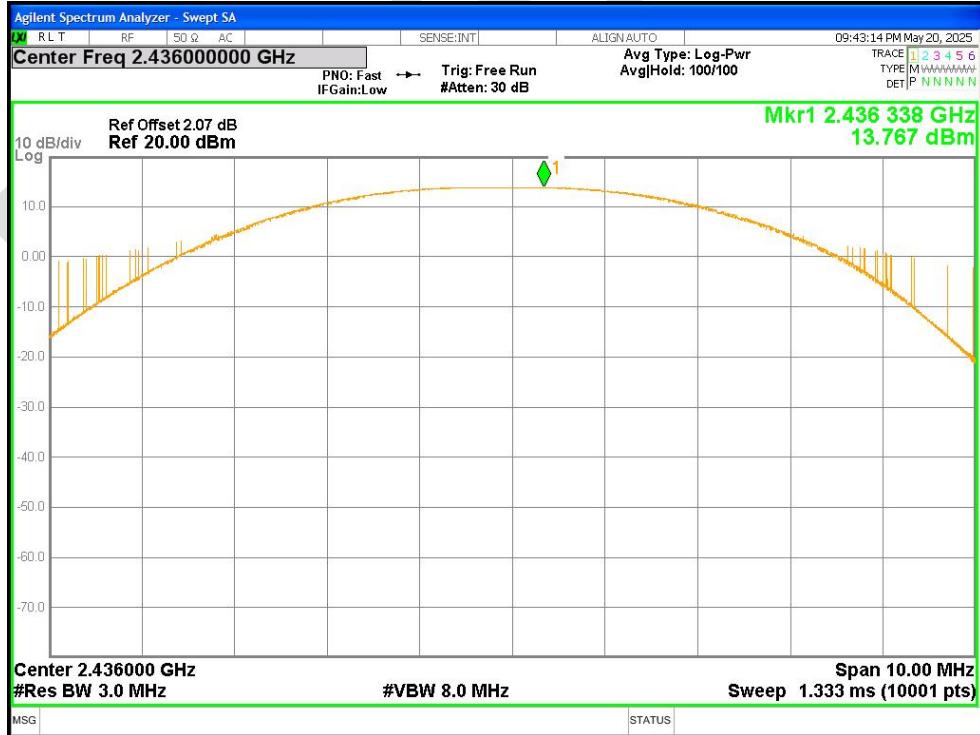


Power NVNT 2.4G 2468MHz Ant1

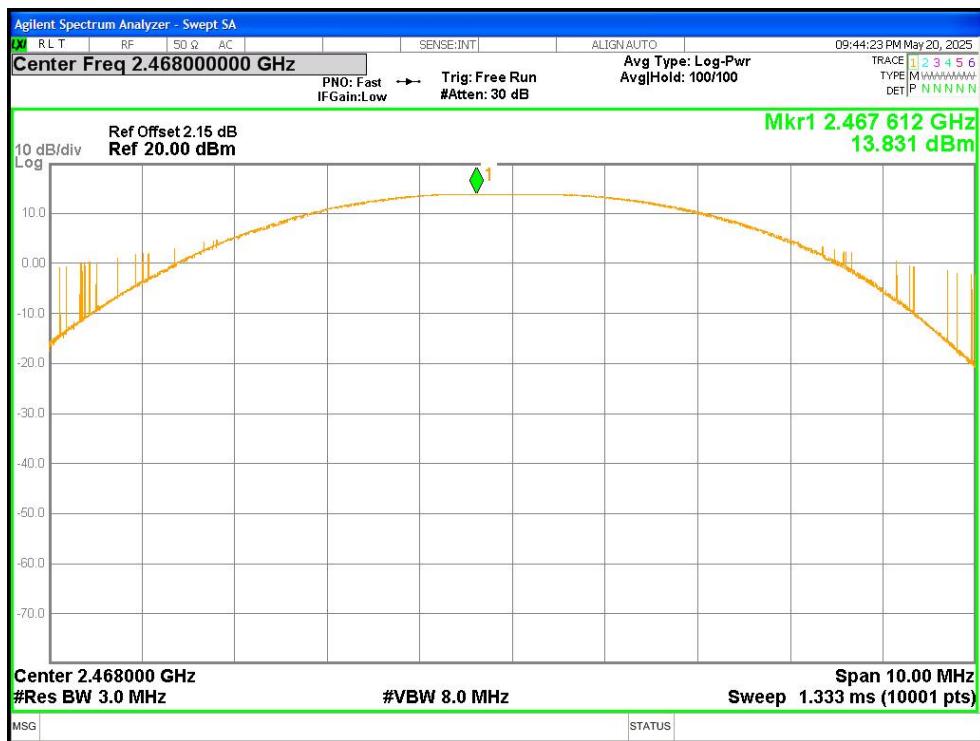


7.2-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	2.4G	2408	Ant1	2.059	N/A	Pass
NVNT	2.4G	2436	Ant1	2.068	N/A	Pass
NVNT	2.4G	2468	Ant1	2.061	N/A	Pass


-20dB Bandwidth NVNT 2.4G 2408MHz Ant1

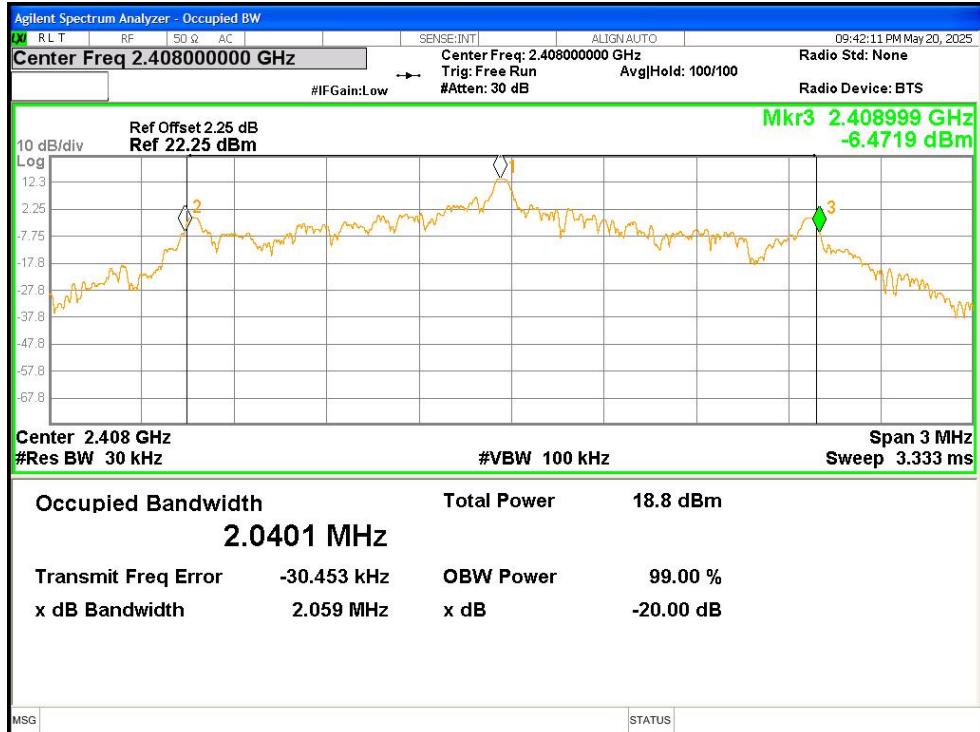

-20dB Bandwidth NVNT 2.4G 2436MHz Ant1

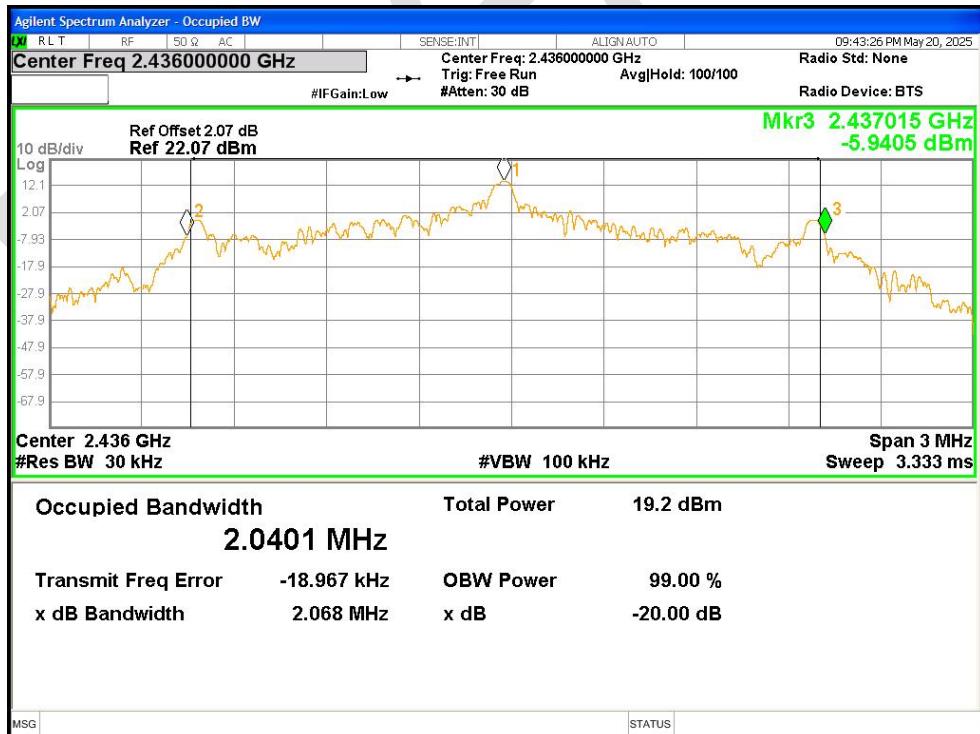

-20dB Bandwidth NVNT 2.4G 2468MHz Ant1

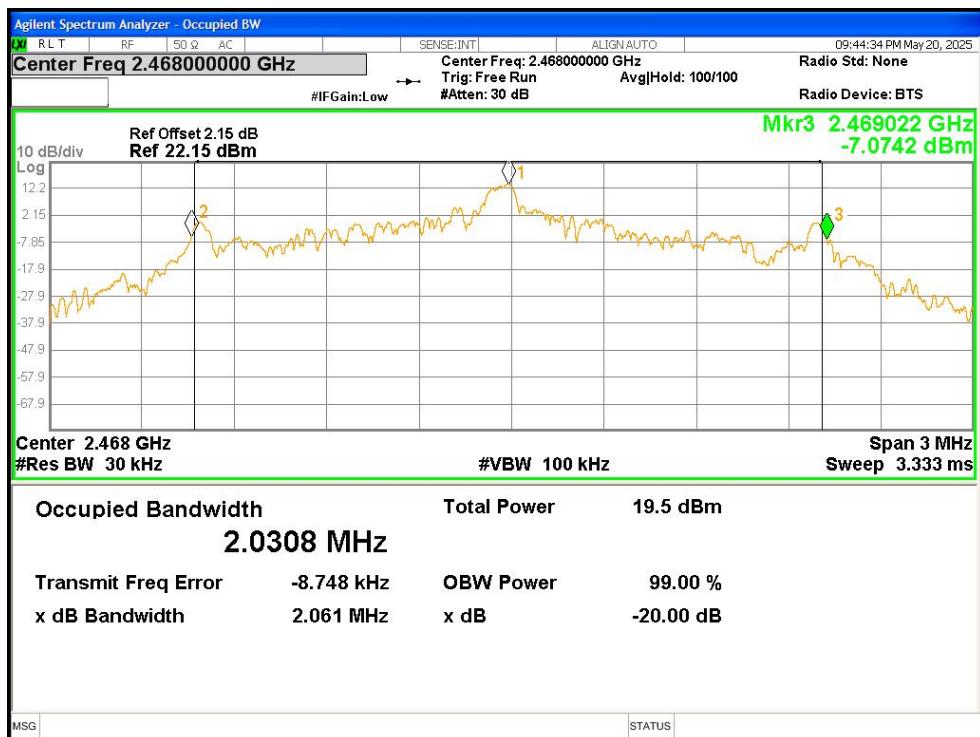

7.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	2.4G	2408	Ant1	2.0519
NVNT	2.4G	2436	Ant1	2.0349
NVNT	2.4G	2468	Ant1	2.0342

BlueAsia