



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCO
MODEL NAME : 22011211G
FCC ID : 2AFZZ211G
STANDARD : 47 CFR Part 2, 22, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Feb. 10, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Derreck Chen

Reviewed by: Derreck Chen / Supervisor

Eric Shih

Approved by: Eric Shih / Manager



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software	6
1.8 Applicable Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Test Mode	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration and system	8
3 RADIATED TEST ITEMS	9
3.1 Measuring Instruments	9
3.2 Test Setup	9
3.3 Test Result of Radiated Test	10
3.4 Radiated Spurious Emission	11
4 LIST OF MEASURING EQUIPMENT	12
5 UNCERTAINTY OF EVALUATION	13
APPENDIX A. TEST RESULTS OF RADIATED TEST	
APPENDIX B. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG1D3005I	Rev. 01	Initial issue of report	Feb. 16, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	§2.1046	Conducted Output Power	Reporting Only	PASS	1
	§22.913(a)(5)	Effective Radiated Power (5G NR n5)	ERP < 7 Watt		
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7, n38)	EIRP < 2Watt		
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n78)	EIRP < 1Watt		
-	§24.232(d) §27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	1
-	§2.1049	Occupied Bandwidth	Reporting Only	PASS	1
-	§2.1051 §22.917(a) §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n5) (5G NR n78)	< 43+10log ₁₀ (P[Watts])	PASS	1
	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n38)	§27.53(m)(4)		
-	§2.1051 §22.917(a) §27.53(l)(2)	Conducted Spurious Emission (5G NR n5) (5G NR n78)	< 43+10log ₁₀ (P[Watts])	PASS	1
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n38)	< 55+10log ₁₀ (P[Watts])		
-	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	1
	§24.235 §27.54		Within Authorized Band		
3.4	§2.1053 §22.917(a) §27.53(l)(2)	Radiated Spurious Emission (5G NR n5) (5G NR n78)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 23.45 dB at 14805.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n38)	< 55+10log ₁₀ (P[Watts])		

Remark 1 : The test items of inter band CA were cover by 5G NR single carrier due to the CA power is reduced according to 3GPP MPR.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	POCO
Model Name	22011211G
FCC ID	2AFZZ211G
IMEI Code	Radiation : 860000050055440/860000050055457
HW Version	P2
SW Version	MIUI 13
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n78: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz
Rx Frequency	5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n78: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz
Uplink CA Bands	n5A-n78A, n78A-n5A, n7A-n78A, n78A-n7A, n38A-n78A, n78A-n38A
SCS	15kHz, 30kHz
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Location	Site	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398	
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	Band	Bandwidth (MHz)						Modulation					RB #		Test Channel		
		5	10	15	20	50-90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Radiated Spurious Emission	n5	Worst Case														v	
	n7	Worst Case															
	n38	Worst Case															
	n78	Worst Case														v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																

2.2 Connection Diagram of Test System

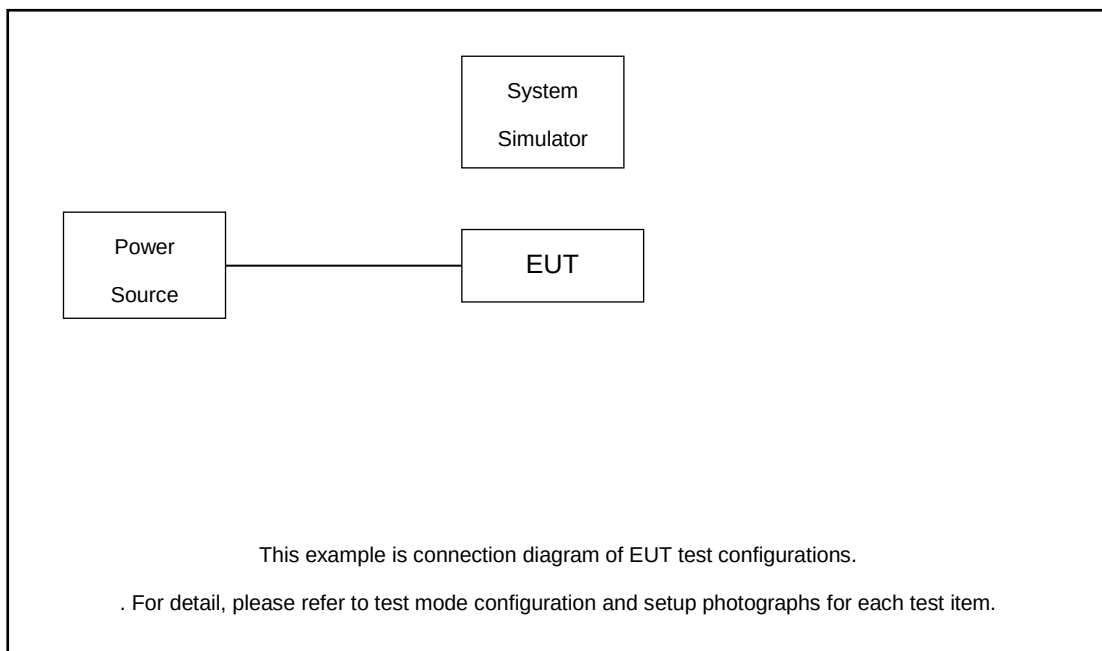

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 For radiated test below 30MHz

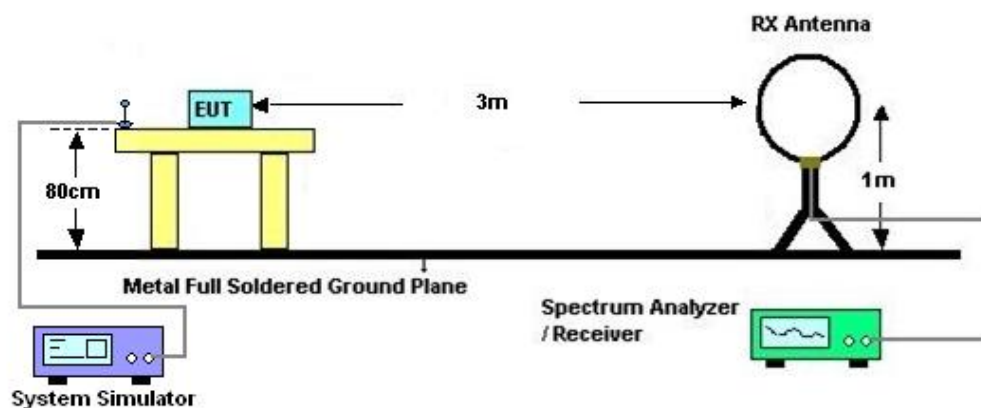

3.2.2 For radiated test from 30MHz to 1GHz

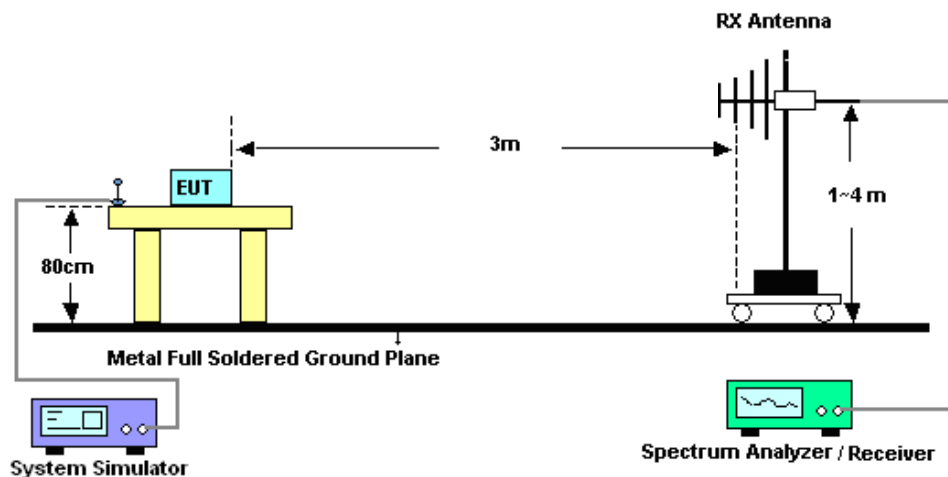

3.2.3 For radiated test above 1GHz

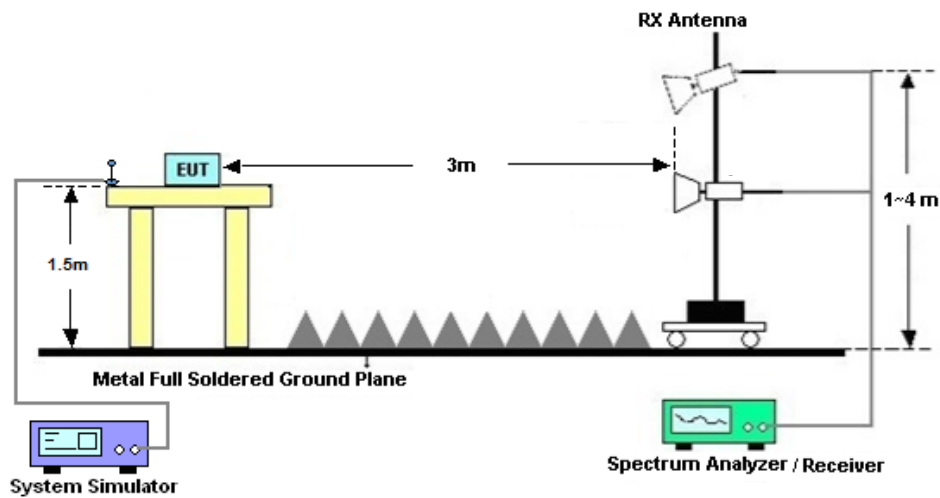

3.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

3.4 Radiated Spurious Emission

3.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 07, 2021	Feb. 10, 2022	Apr. 06, 2022	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Feb. 10, 2022	Jun. 21, 2022	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 07, 2021	Feb. 10, 2022	Apr. 06, 2022	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Jun. 22, 2020	Feb. 10, 2022	Jun. 21, 2022	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 25, 2021	Feb. 10, 2022	Apr. 24, 2022	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 22,2021	Feb. 10, 2022	Oct. 21,2022	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Oct. 22, 2021	Feb. 10, 2022	Oct. 21, 2022	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 11, 2021	Feb. 10, 2022	Apr. 10, 2022	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 29, 2021	Feb. 10, 2022	Dec. 28, 2022	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Feb. 10, 2022	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 10, 2022	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 10, 2022	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.6dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.8dB
---	-------

----- THE END -----



Appendix A. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	ZhangXu	Temperature :	22~25°C
		Relative Humidity :	48~52%

5GNR CA_n5A_n78A /QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n5 Middle	1654.5	-66.41	-13	-53.41	-72.51	-69.66	4.00	9.40	H
	2481.75	-48.37	-13	-35.37	-58.58	-51.94	4.88	10.60	H
	3309	-63.08	-13	-50.08	-75.20	-68.01	5.52	12.60	H
	1654.5	-66.68	-13	-53.68	-72.63	-69.93	4.00	9.40	V
	2481.75	-50.67	-13	-37.67	-61.24	-54.24	4.88	10.60	V
	3309	-62.49	-13	-49.49	-75.05	-67.42	5.52	12.60	V
NR n78 Middle	7402.50	-56.81	-13	-43.81	-79.46	-62.37	7.14	12.70	H
	11103.75	-48.59	-13	-35.59	-77.64	-51.89	8.30	11.60	H
	14805.00	-45.53	-13	-32.53	-77.41	-47.05	10.48	12.00	H
	7402.50	-57.35	-13	-44.35	-80.05	-62.91	7.14	12.70	V
	11103.75	-50.37	-13	-37.37	-79.12	-53.67	8.30	11.60	V
	14805.00	-45.92	-13	-32.92	-77.99	-47.44	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

5GNR CA_n78A_n5A / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n78 Middle	7402.50	-57.13	-13	-44.13	-79.78	-62.69	7.14	12.70	H
	11103.75	-48.85	-13	-35.85	-77.90	-52.15	8.30	11.60	H
	14805.00	-45.96	-13	-32.96	-77.84	-47.48	10.48	12.00	H
	7402.50	-57.15	-13	-44.15	-79.85	-62.71	7.14	12.70	V
	11103.75	-50.50	-13	-37.50	-79.25	-53.80	8.30	11.60	V
	14805.00	-46.23	-13	-33.23	-78.3	-47.75	10.48	12.00	V
NR n5 Middle	1654.5	-66.91	-13	-53.91	-73.01	-70.16	4.00	9.40	H
	2481.75	-50.00	-13	-37.00	-60.21	-53.57	4.88	10.60	H
	3309	-62.95	-13	-49.95	-75.07	-67.88	5.52	12.60	H
	1654.5	-66.03	-13	-53.03	-71.98	-69.28	4.00	9.40	V
	2481.75	-50.08	-13	-37.08	-60.65	-53.65	4.88	10.60	V
	3309	-61.73	-13	-48.73	-74.29	-66.66	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5GNR CA_n7A_n78A/QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n7 Middle	5070	-62.40	-13	-49.40	-79.78	-69.15	5.85	12.60	H
	7605	-57.07	-13	-44.07	-79.19	-62.87	7.30	13.10	H
	10140	-53.85	-13	-40.85	-80.73	-57.00	8.35	11.50	H
	5070	-62.38	-13	-49.38	-79.69	-69.13	5.85	12.60	V
	7605	-57.63	-13	-44.63	-79.53	-63.43	7.30	13.10	V
	10140	-54.38	-13	-41.38	-80.81	-57.53	8.35	11.50	V
NR n78 Middle	7402.50	-56.85	-13	-43.85	-79.50	-62.41	7.14	12.70	H
	11103.75	-50.91	-13	-37.91	-79.96	-54.21	8.30	11.60	H
	14805.00	-48.01	-13	-35.01	-79.89	-49.53	10.48	12.00	H
	7402.50	-57.17	-13	-44.17	-79.87	-62.73	7.14	12.70	V
	11103.75	-51.38	-13	-38.38	-80.13	-54.68	8.30	11.60	V
	14805.00	-48.12	-13	-35.12	-80.19	-49.64	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

5GNR CA_n78A_n7A/QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n78 Middle	7402.50	-57.68	-13	-44.68	-80.33	-63.24	7.14	12.70	H
	11103.75	-51.30	-13	-38.30	-80.35	-54.60	8.30	11.60	H
	14805.00	-48.65	-13	-35.65	-80.53	-50.17	10.48	12.00	H
	7402.50	-57.87	-13	-44.87	-80.57	-63.43	7.14	12.70	V
	11103.75	-51.65	-13	-38.65	-80.4	-54.95	8.30	11.60	V
	14805.00	-48.68	-13	-35.68	-80.75	-50.20	10.48	12.00	V
NR n7 Middle	5070	-62.53	-13	-49.53	-79.91	-69.28	5.85	12.60	H
	7605	-58.22	-13	-45.22	-80.34	-64.02	7.30	13.10	H
	10140	-54.09	-13	-41.09	-80.97	-57.24	8.35	11.50	H
	5070	-63.01	-13	-50.01	-80.32	-69.76	5.85	12.60	V
	7608	-58.28	-13	-45.28	-80.19	-64.08	7.30	13.10	V
	10140	-54.40	-13	-41.40	-80.83	-57.55	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5GNR CA_n38A_n78A/QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n38 Middle	5190.00	-63.10	-25	-38.10	-80.38	-69.85	5.85	12.60	H
	7785.00	-57.52	-25	-32.52	-80.18	-63.32	7.30	13.10	H
	10380.00	-54.08	-25	-29.08	-80.87	-57.23	8.35	11.50	H
	5190.00	-62.97	-25	-37.97	-80.2	-69.72	5.85	12.60	V
	7785.00	-57.66	-25	-32.66	-80.33	-63.46	7.30	13.10	V
	10380.00	-54.23	-25	-29.23	-80.84	-57.38	8.35	11.50	V
NR n78 Middle	7402.50	-57.78	-25	-32.78	-80.43	-63.34	7.14	12.70	H
	11103.75	-51.59	-25	-26.59	-80.64	-54.89	8.30	11.60	H
	14805.00	-48.67	-25	-23.67	-80.55	-50.19	10.48	12.00	H
	7402.50	-57.76	-25	-32.76	-80.46	-63.32	7.14	12.70	V
	11103.75	-51.81	-25	-26.81	-80.56	-55.11	8.30	11.60	V
	14805.00	-48.45	-25	-23.45	-80.52	-49.97	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

5GNR CA_n78A_n38A/QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n78 Middle	7402.50	-57.73	-25	-32.73	-80.38	-63.29	7.14	12.70	H
	11103.75	-51.75	-25	-26.75	-80.80	-55.05	8.30	11.60	H
	14805.00	-48.89	-25	-23.89	-80.77	-50.41	10.48	12.00	H
	7402.50	-57.93	-25	-32.93	-80.63	-63.49	7.14	12.70	V
	11103.75	-51.81	-25	-26.81	-80.56	-55.11	8.30	11.60	V
	14805.00	-48.78	-25	-23.78	-80.85	-50.30	10.48	12.00	V
NR n38 Middle	5190.00	-62.85	-25	-37.85	-80.13	-69.60	5.85	12.60	H
	7785.00	-57.72	-25	-32.72	-80.38	-63.52	7.30	13.10	H
	10380.00	-54.42	-25	-29.42	-81.21	-57.57	8.35	11.50	H
	5190.00	-63.16	-25	-38.16	-80.39	-69.91	5.85	12.60	V
	7785.00	-57.61	-25	-32.61	-80.28	-63.41	7.30	13.10	V
	10380.00	-54.64	-25	-29.64	-81.25	-57.79	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.