



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

[Http://www.chinattl.cn](http://www.chinattl.cn)

## Glossary:

|                       |                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                                    |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                   |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                  |
| DCP                   | diode compression point                                                                                                                     |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                                |
| A,B,C,D               | modulation dependent linearization parameters                                                                                               |
| Polarization $\Phi$   | $\Phi$ rotation around probe axis                                                                                                           |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i<br>$\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

[Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3748

### Basic Calibration Parameters

|                                                          | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|----------------------------------------------------------|----------|----------|----------|-----------|
| Norm( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.40     | 0.51     | 0.44     | ±10.0%    |
| DCP(mV) <sup>B</sup>                                     | 103.3    | 101.2    | 101.9    |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A dB | B dB $\sqrt{\mu\text{V}}$ | C   | D dB | VR mV | Unc <sup>E</sup> (k=2) |
|-----|---------------------------|---|------|---------------------------|-----|------|-------|------------------------|
| 0   | CW                        | X | 0.0  | 0.0                       | 1.0 | 0.00 | 156.9 | ±2.1%                  |
|     |                           | Y | 0.0  | 0.0                       | 1.0 |      | 181.6 |                        |
|     |                           | Z | 0.0  | 0.0                       | 1.0 |      | 161.7 |                        |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 4).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3748

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 9.15    | 9.15    | 9.15    | 0.40               | 0.80                    | ±12.1%      |
| 835                  | 41.5                               | 0.90                            | 8.80    | 8.80    | 8.80    | 0.20               | 1.20                    | ±12.1%      |
| 1750                 | 40.1                               | 1.37                            | 7.68    | 7.68    | 7.68    | 0.25               | 1.00                    | ±12.1%      |
| 1900                 | 40.0                               | 1.40                            | 7.35    | 7.35    | 7.35    | 0.25               | 1.08                    | ±12.1%      |
| 2100                 | 39.8                               | 1.49                            | 7.33    | 7.33    | 7.33    | 0.23               | 1.17                    | ±12.1%      |
| 2300                 | 39.5                               | 1.67                            | 7.19    | 7.19    | 7.19    | 0.58               | 0.70                    | ±12.1%      |
| 2450                 | 39.2                               | 1.80                            | 7.00    | 7.00    | 7.00    | 0.60               | 0.71                    | ±12.1%      |
| 2600                 | 39.0                               | 1.96                            | 6.79    | 6.79    | 6.79    | 0.66               | 0.68                    | ±12.1%      |
| 3500                 | 37.9                               | 2.91                            | 6.14    | 6.14    | 6.14    | 0.47               | 0.97                    | ±13.3%      |
| 3700                 | 37.7                               | 3.12                            | 5.95    | 5.95    | 5.95    | 0.46               | 0.96                    | ±13.3%      |
| 3900                 | 37.5                               | 3.32                            | 6.06    | 6.06    | 6.06    | 0.40               | 1.15                    | ±13.3%      |
| 4100                 | 37.2                               | 3.53                            | 5.94    | 5.94    | 5.94    | 0.40               | 1.20                    | ±13.3%      |
| 4200                 | 37.1                               | 3.63                            | 5.85    | 5.85    | 5.85    | 0.40               | 1.25                    | ±13.3%      |
| 4400                 | 36.9                               | 3.84                            | 5.76    | 5.76    | 5.76    | 0.40               | 1.23                    | ±13.3%      |
| 4600                 | 36.7                               | 4.04                            | 5.66    | 5.66    | 5.66    | 0.40               | 1.35                    | ±13.3%      |
| 4800                 | 36.4                               | 4.25                            | 5.60    | 5.60    | 5.60    | 0.40               | 1.45                    | ±13.3%      |
| 4950                 | 36.3                               | 4.40                            | 5.32    | 5.32    | 5.32    | 0.40               | 1.45                    | ±13.3%      |
| 5250                 | 35.9                               | 4.71                            | 5.05    | 5.05    | 5.05    | 0.40               | 1.50                    | ±13.3%      |
| 5600                 | 35.5                               | 5.07                            | 4.64    | 4.64    | 4.64    | 0.45               | 1.45                    | ±13.3%      |
| 5750                 | 35.4                               | 5.22                            | 4.70    | 4.70    | 4.70    | 0.45               | 1.50                    | ±13.3%      |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com)

[Http://www.chinattl.cn](http://www.chinattl.cn)

## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

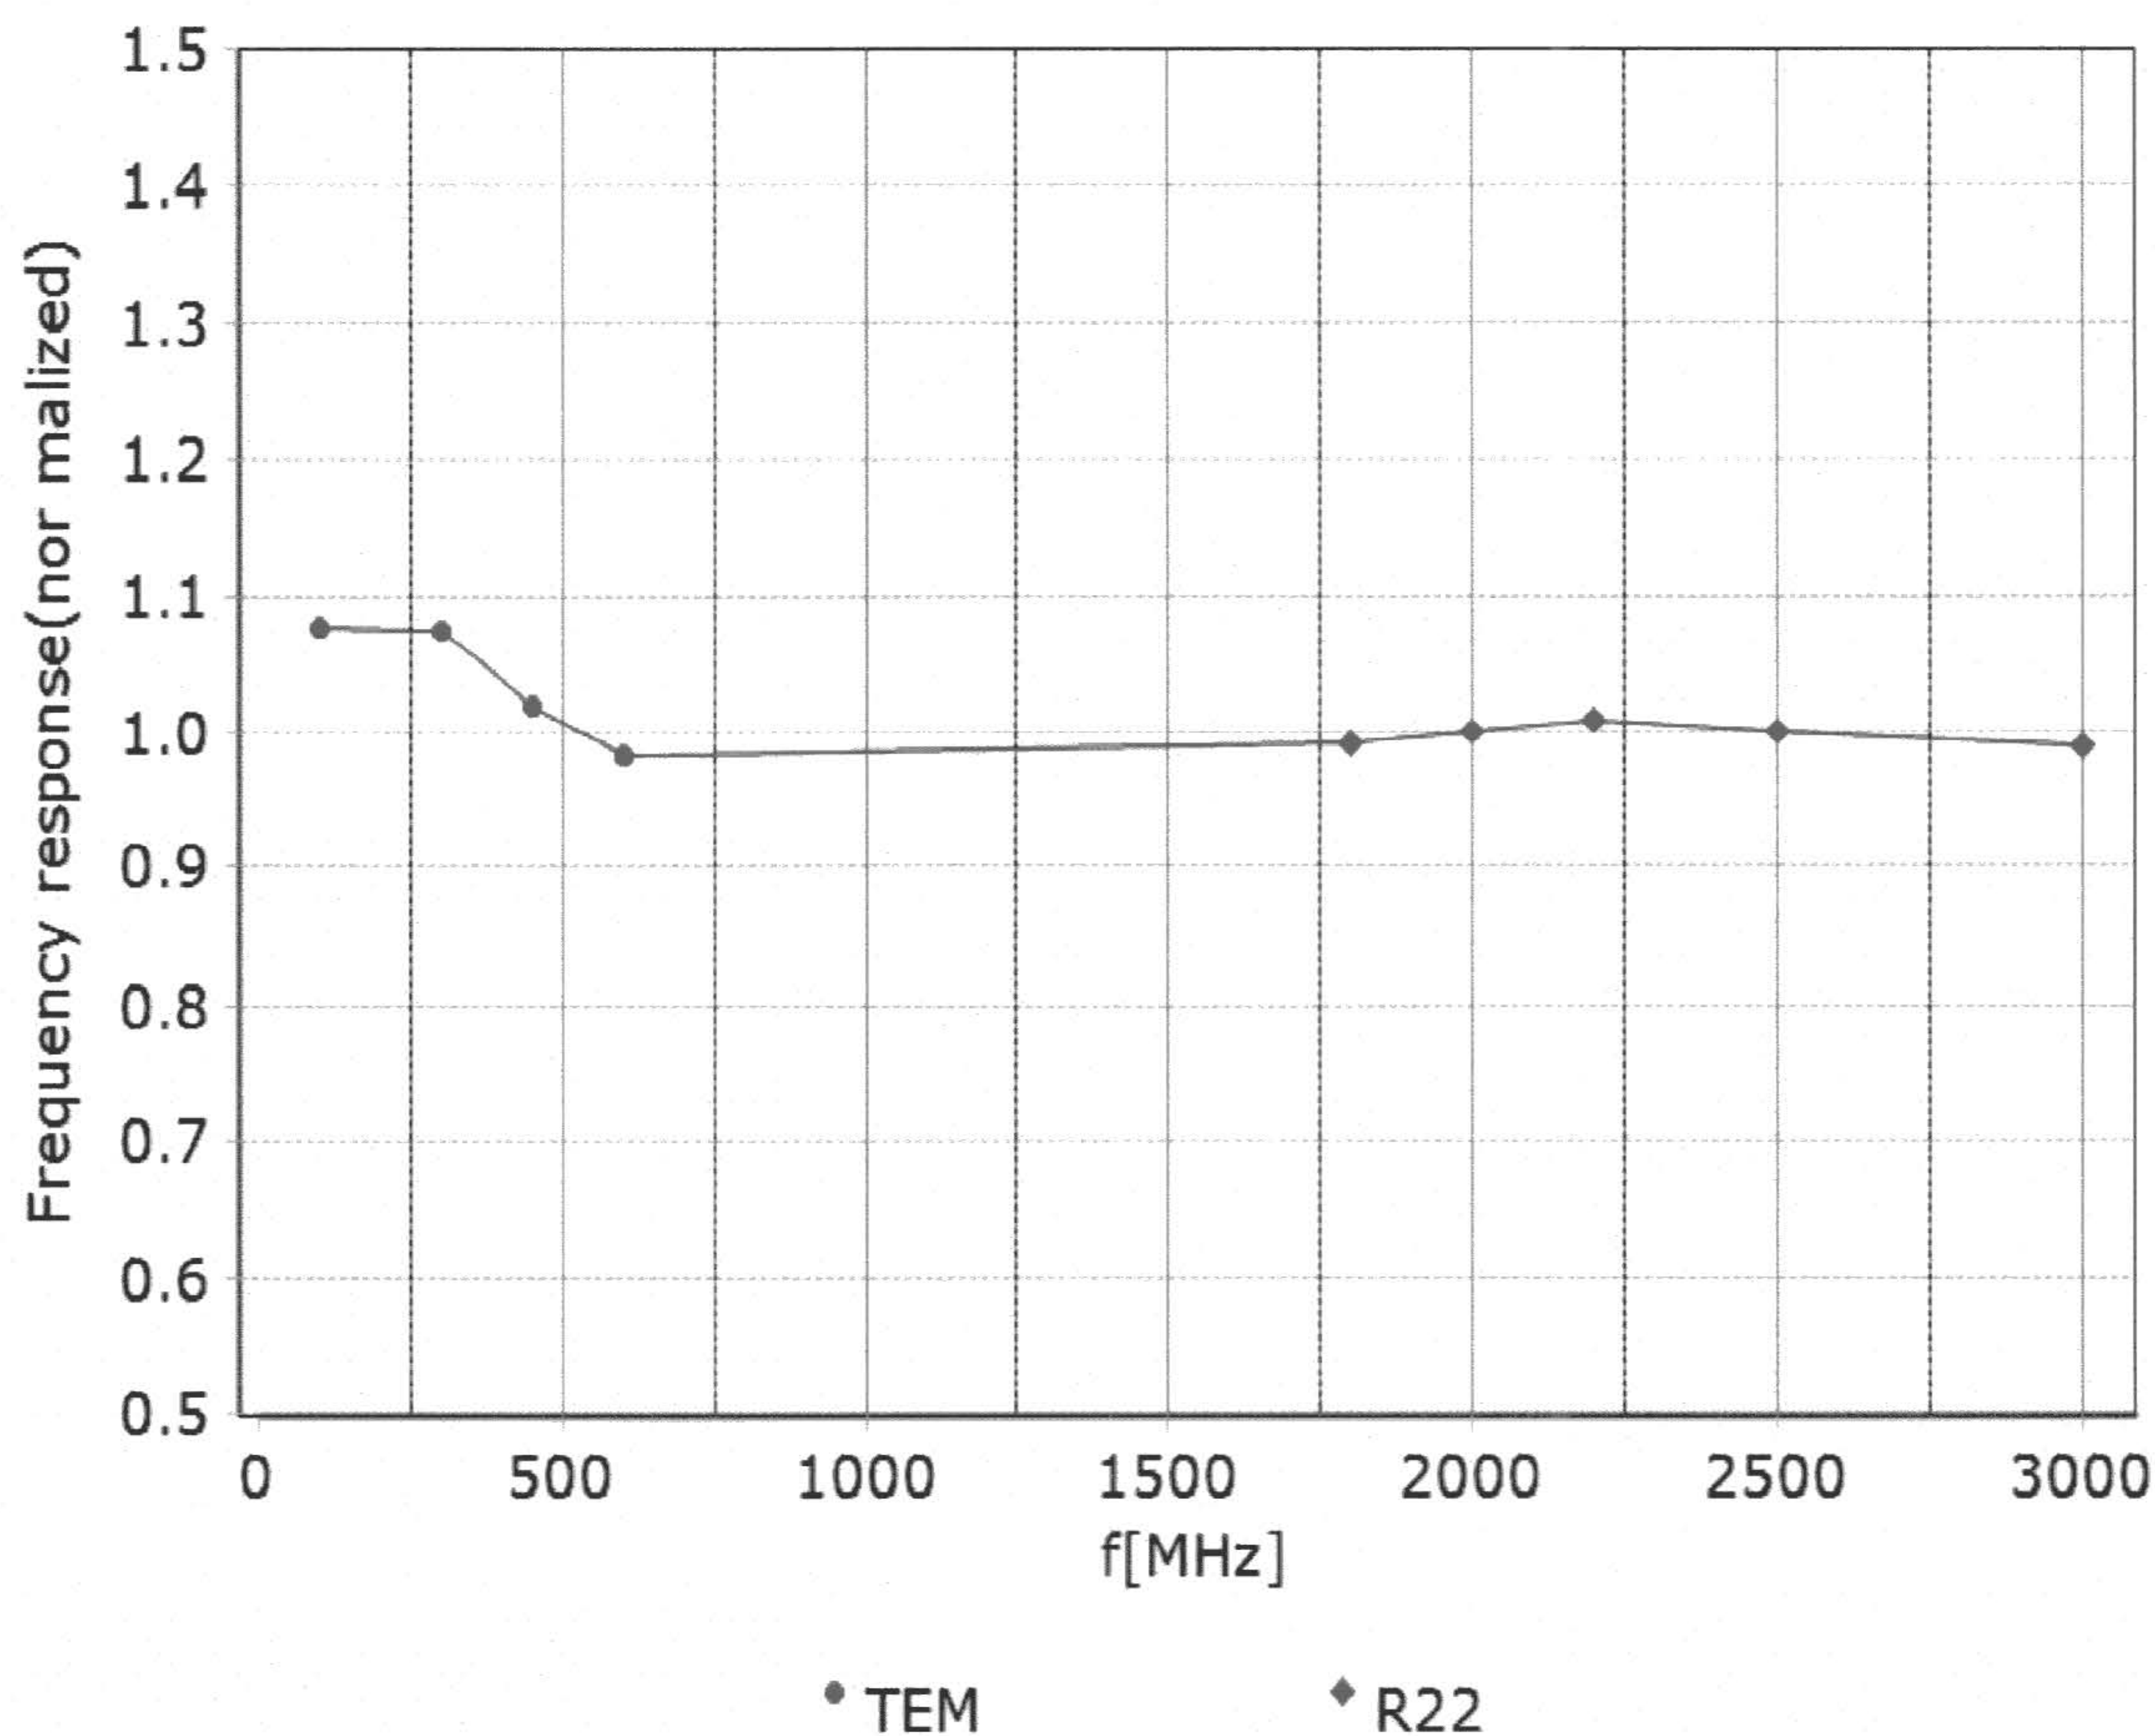

Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )




In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**

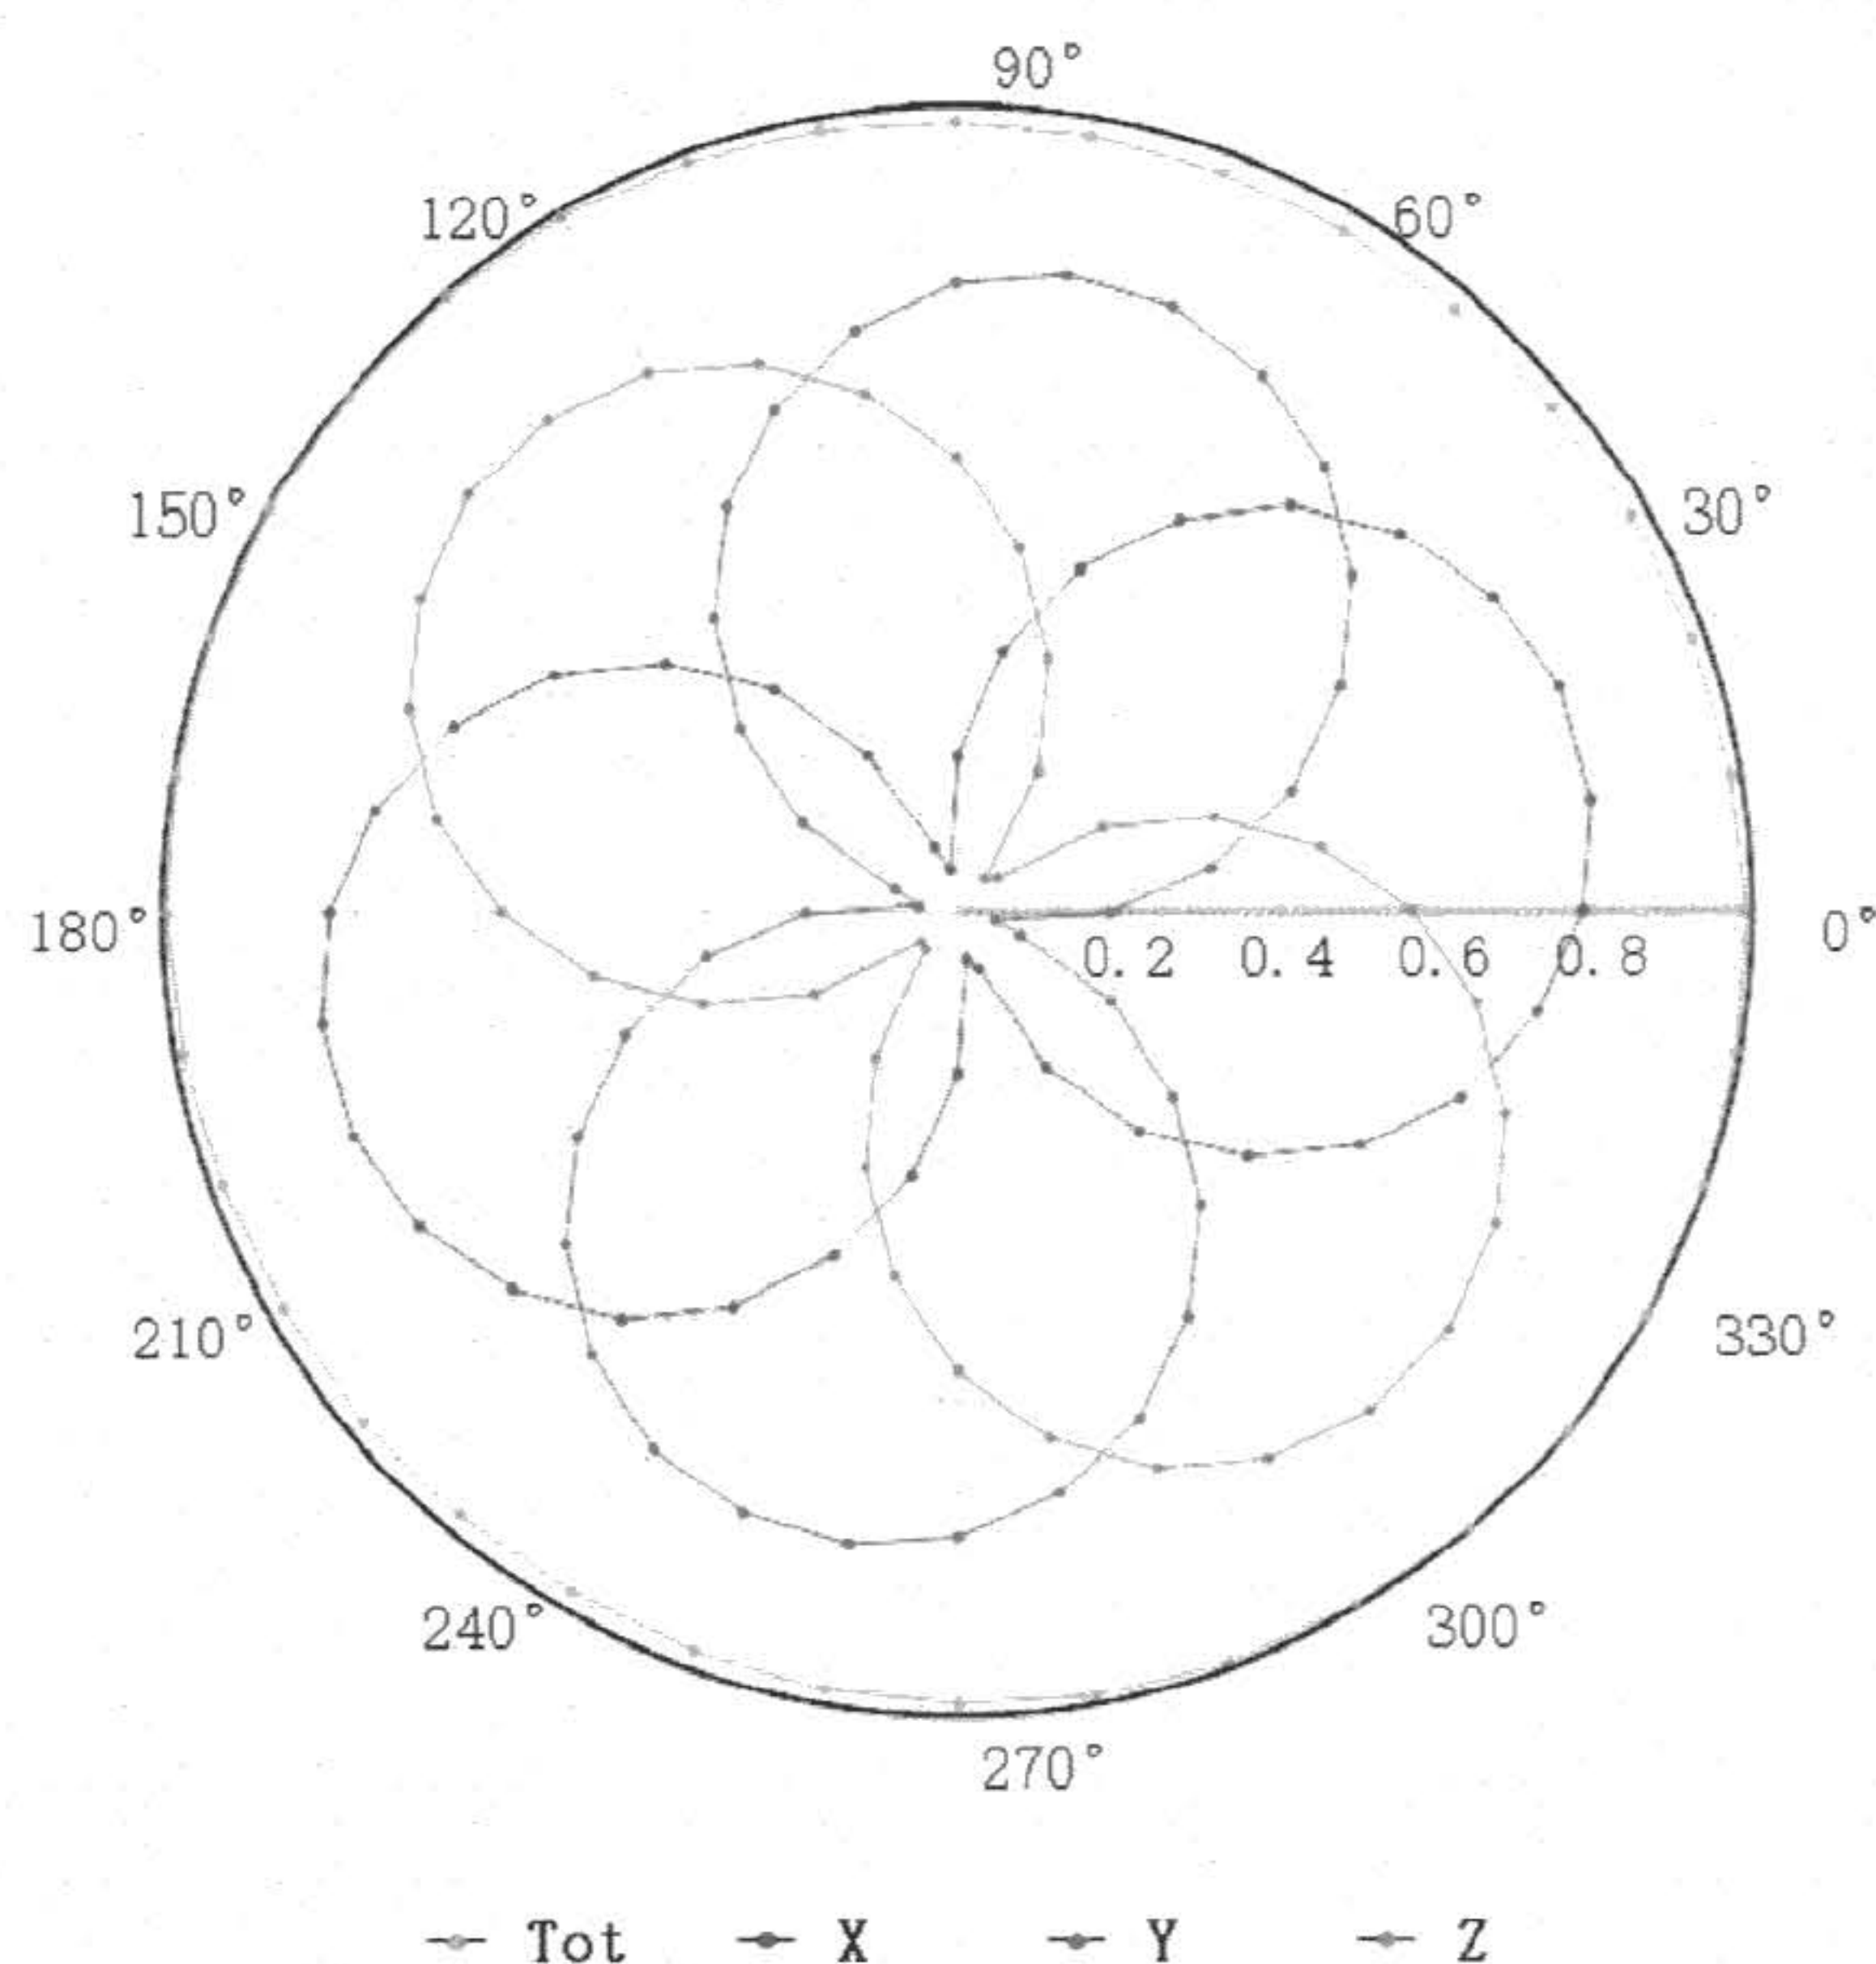

**f=1800 MHz, R22**

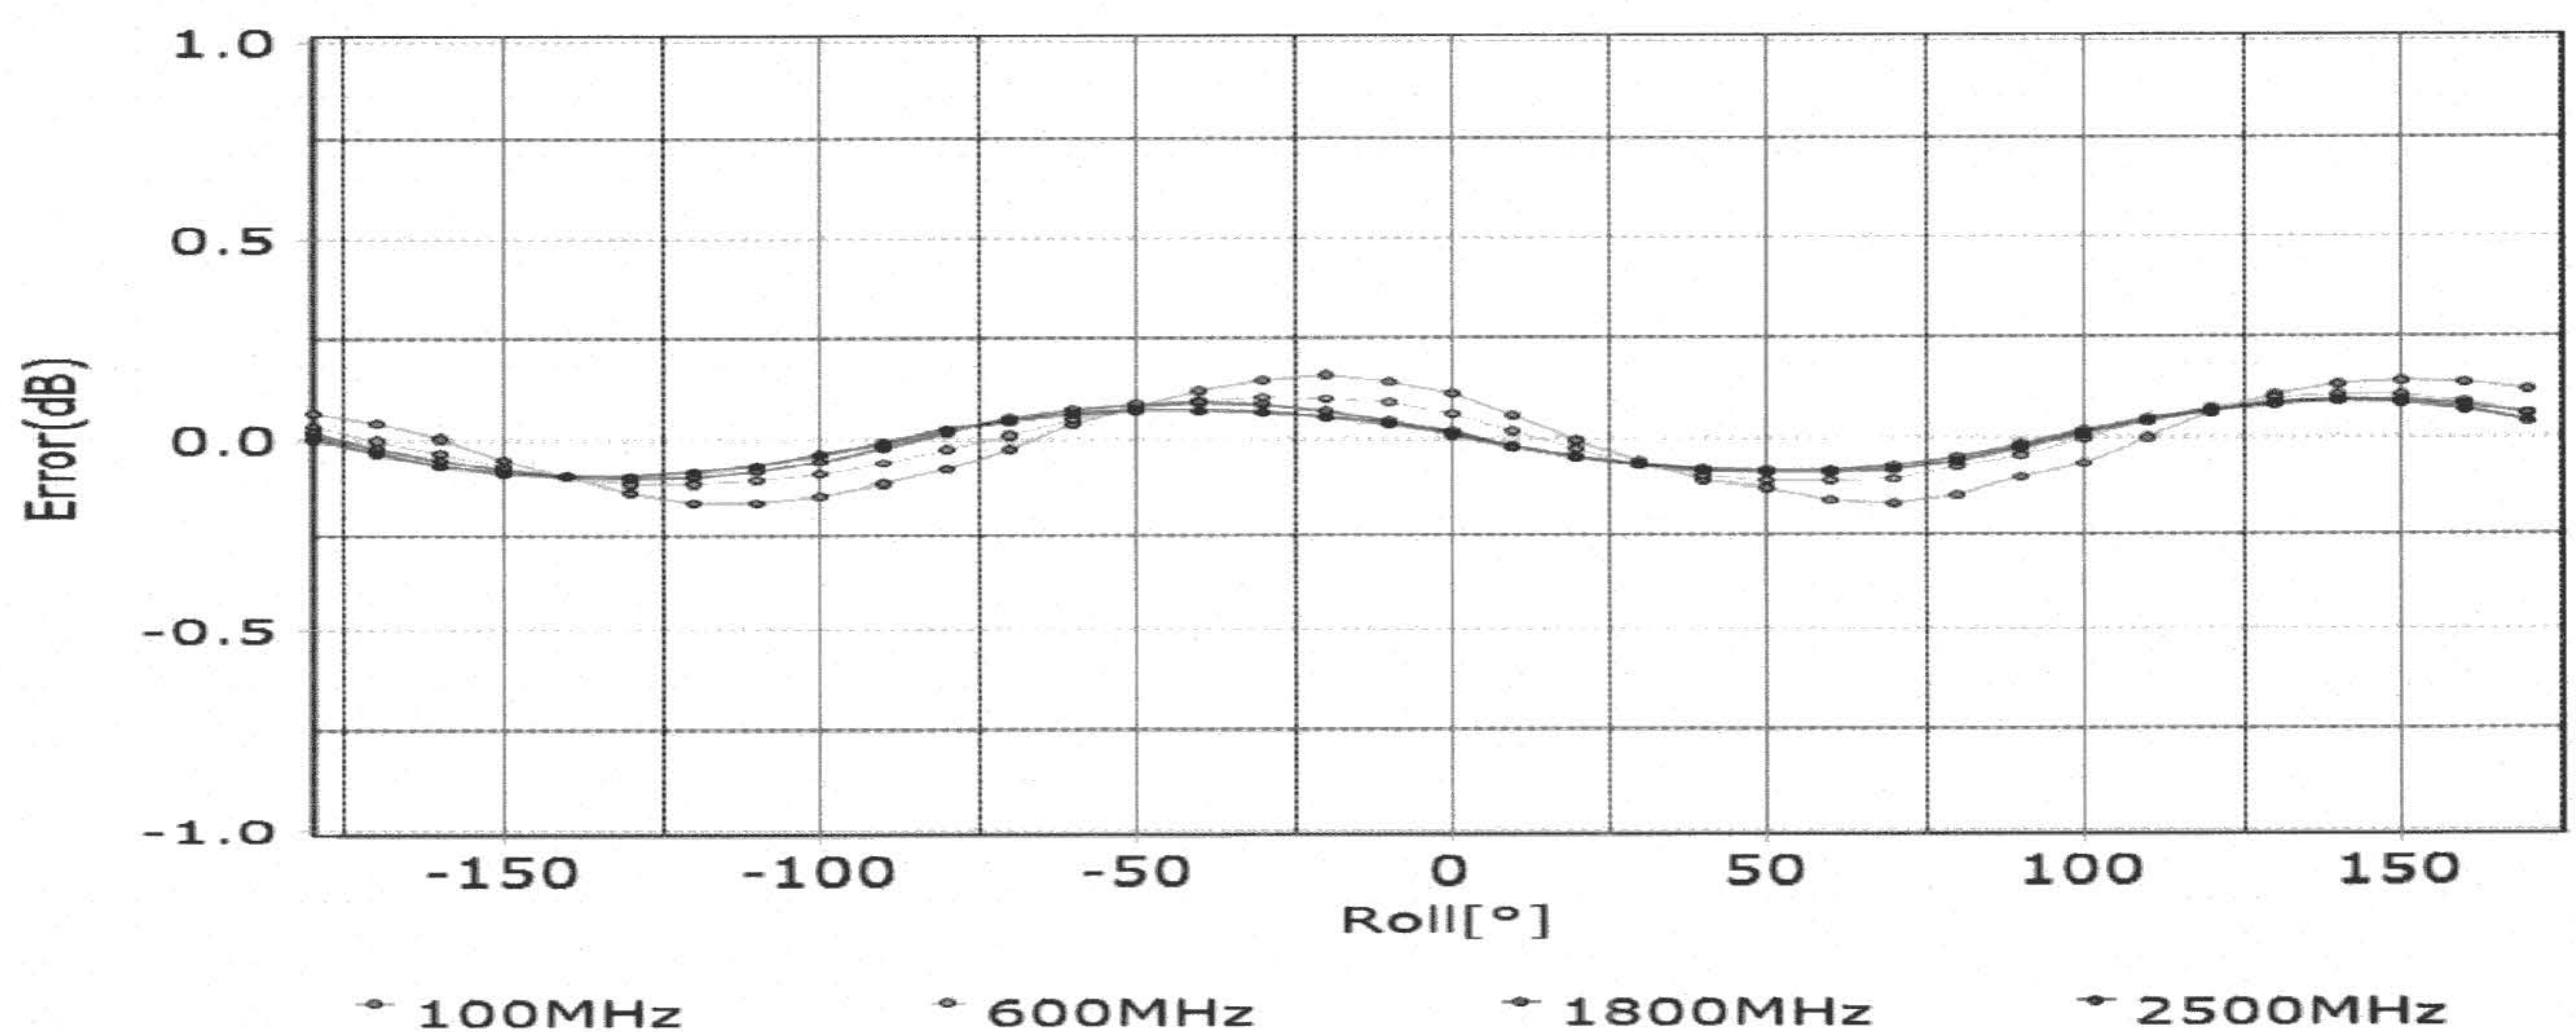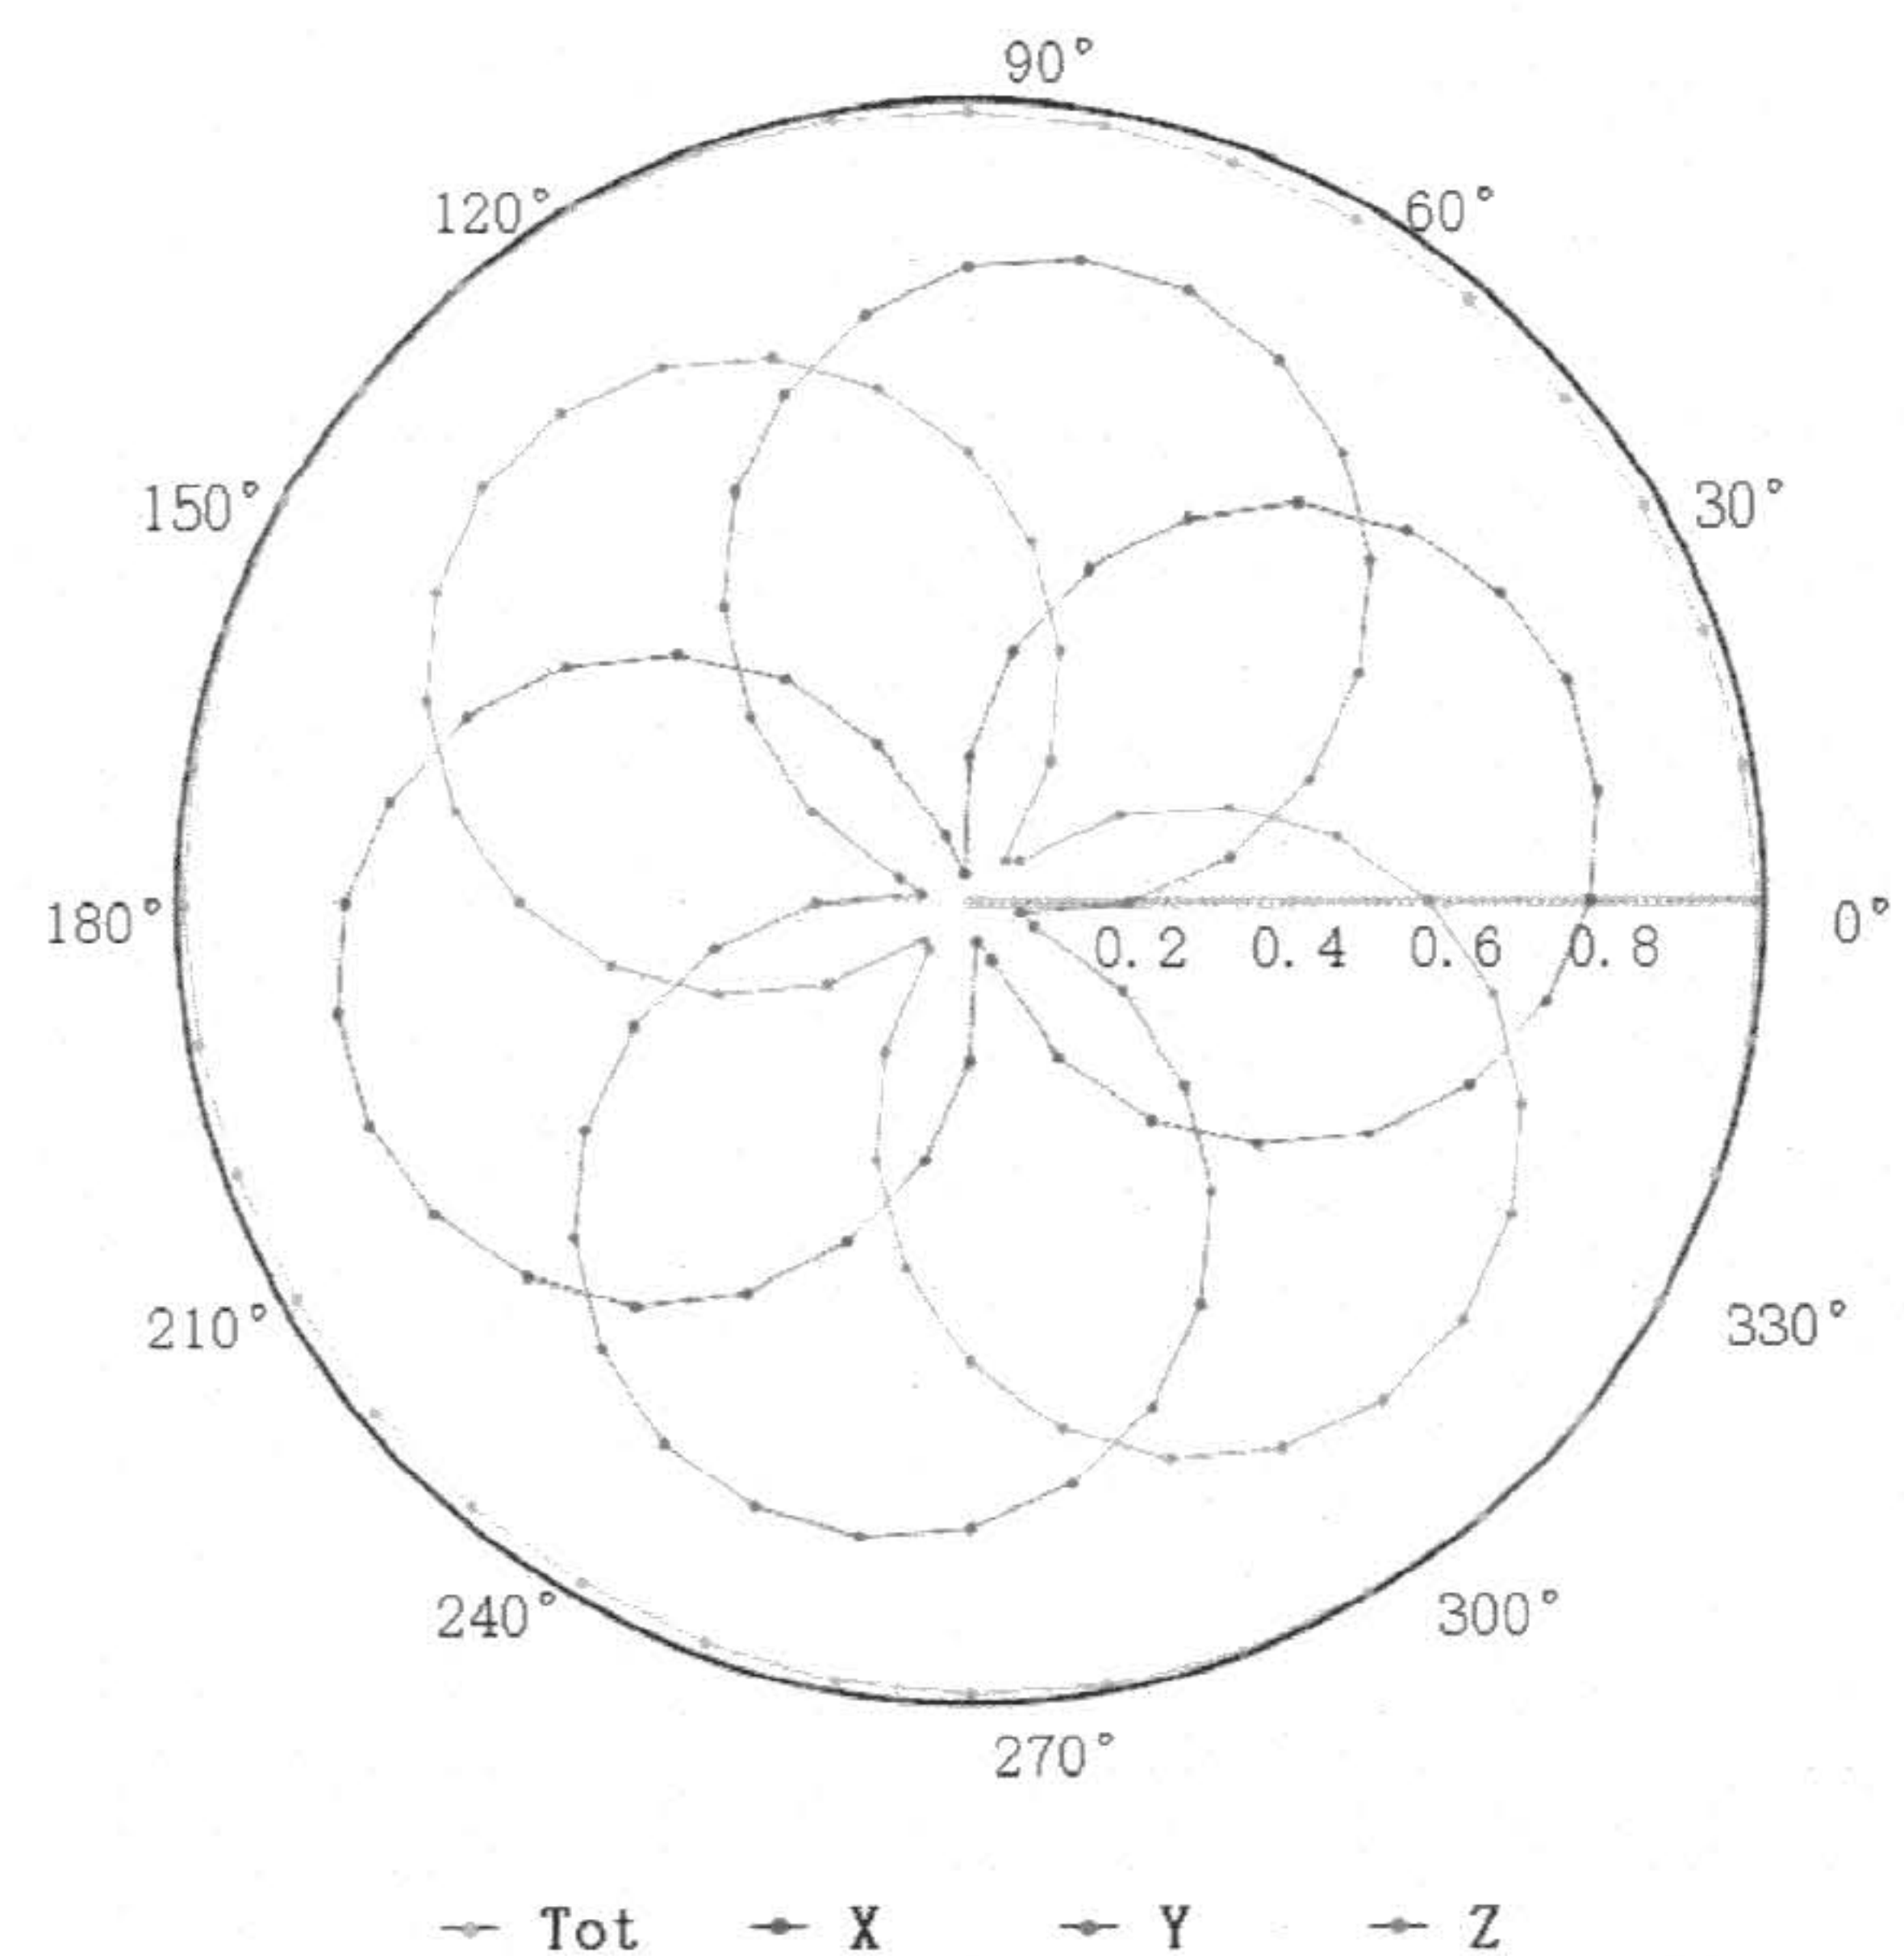



Uncertainty of Axial Isotropy Assessment:  $\pm 1.2\%$  ( $k=2$ )



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$ )

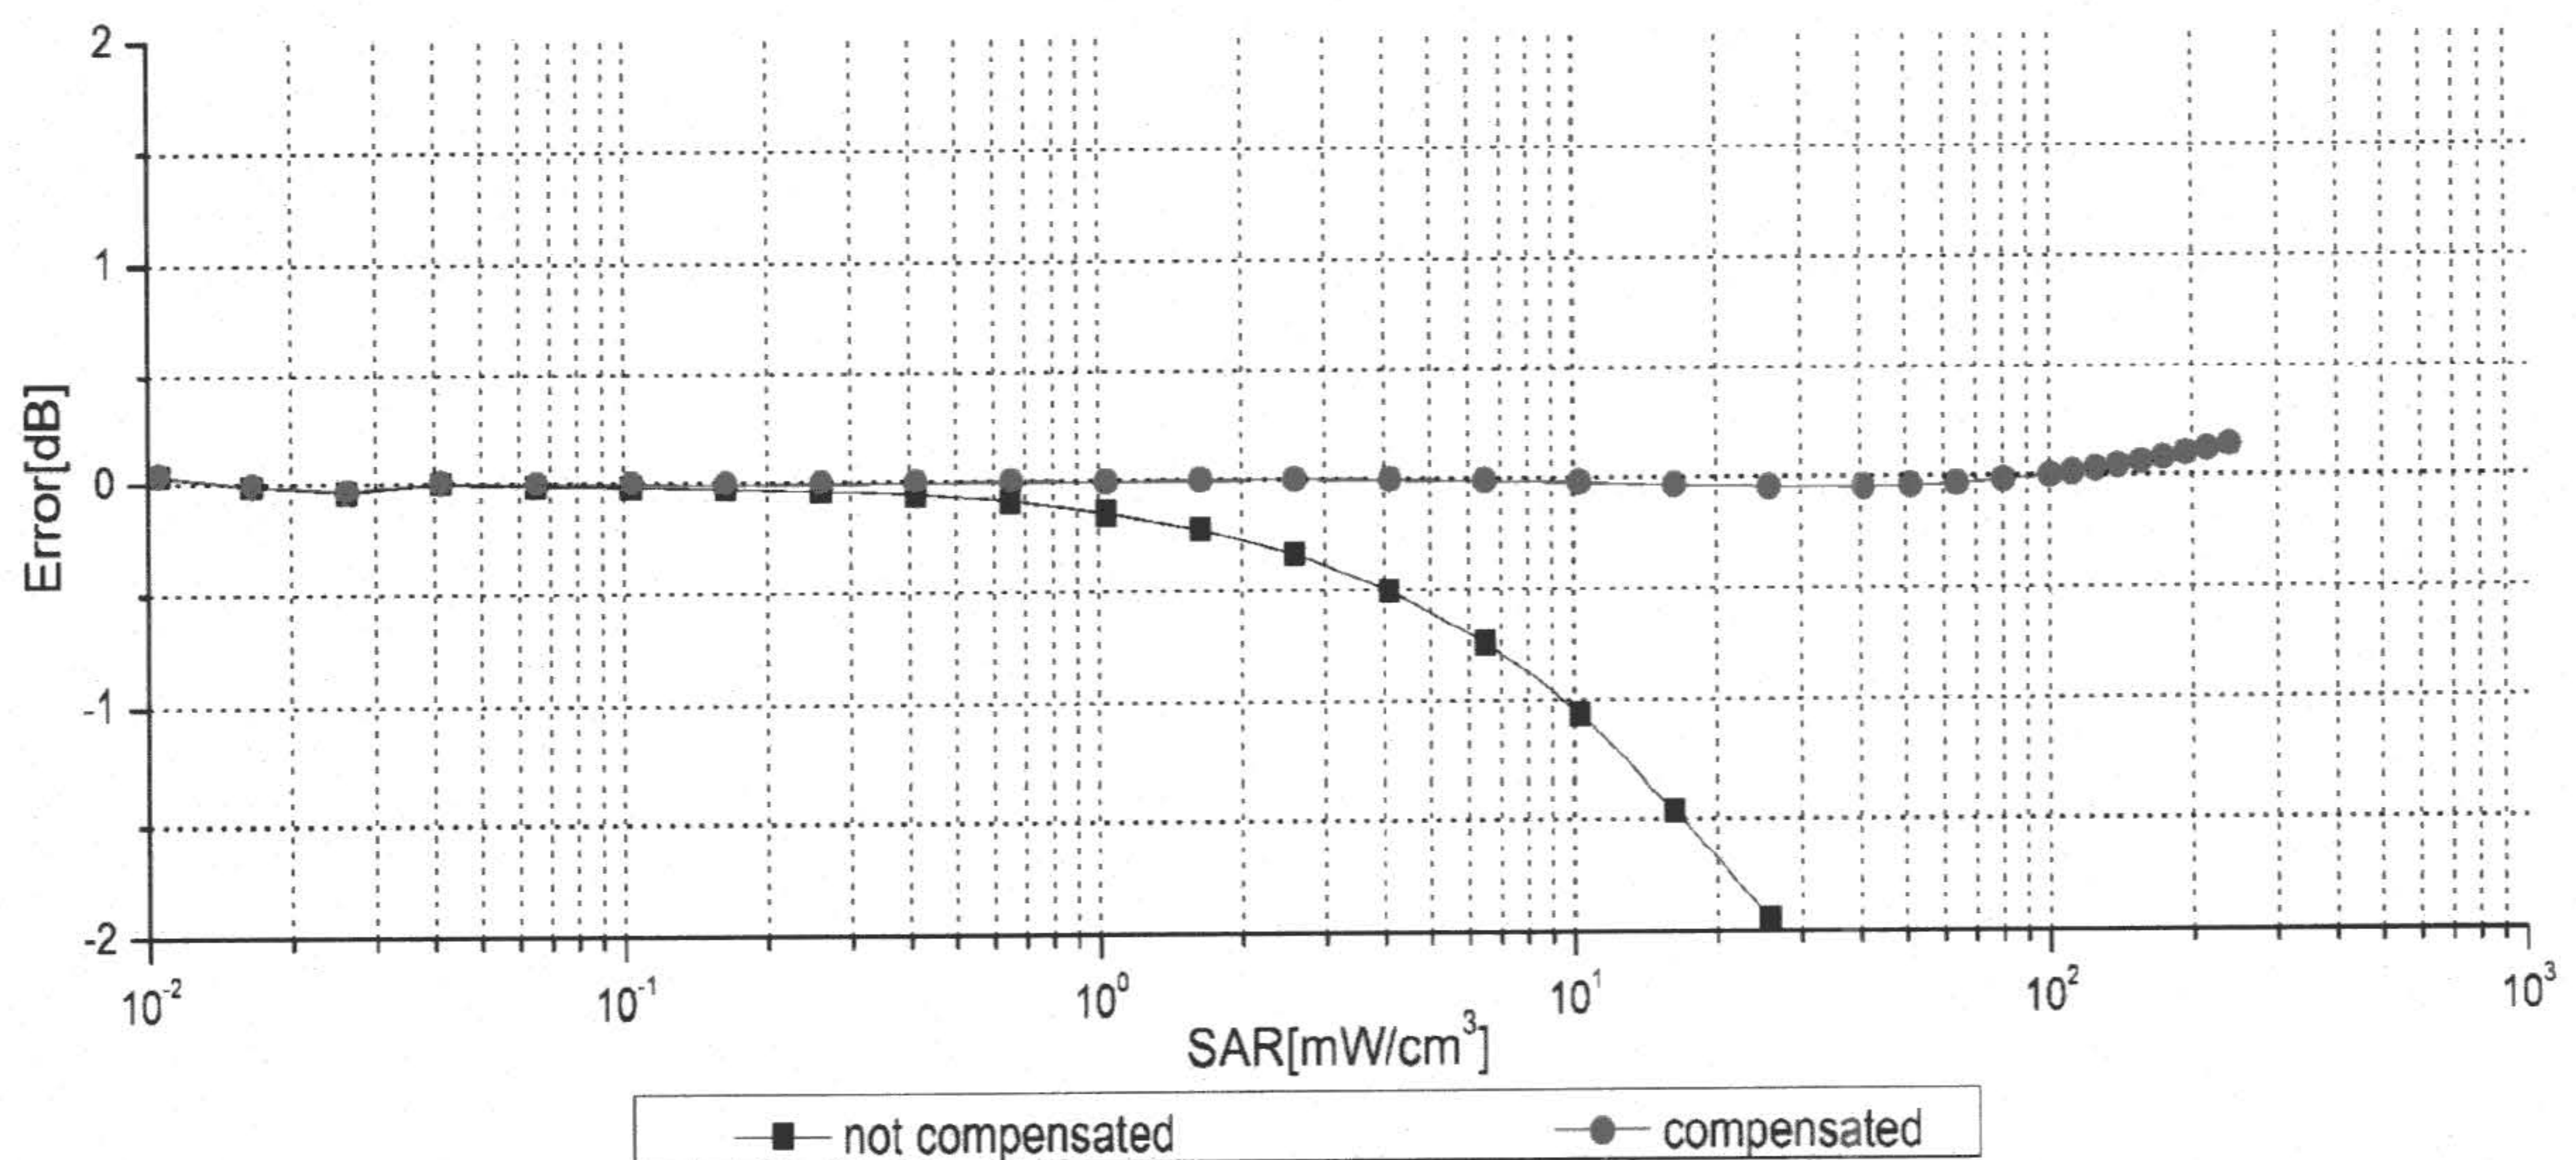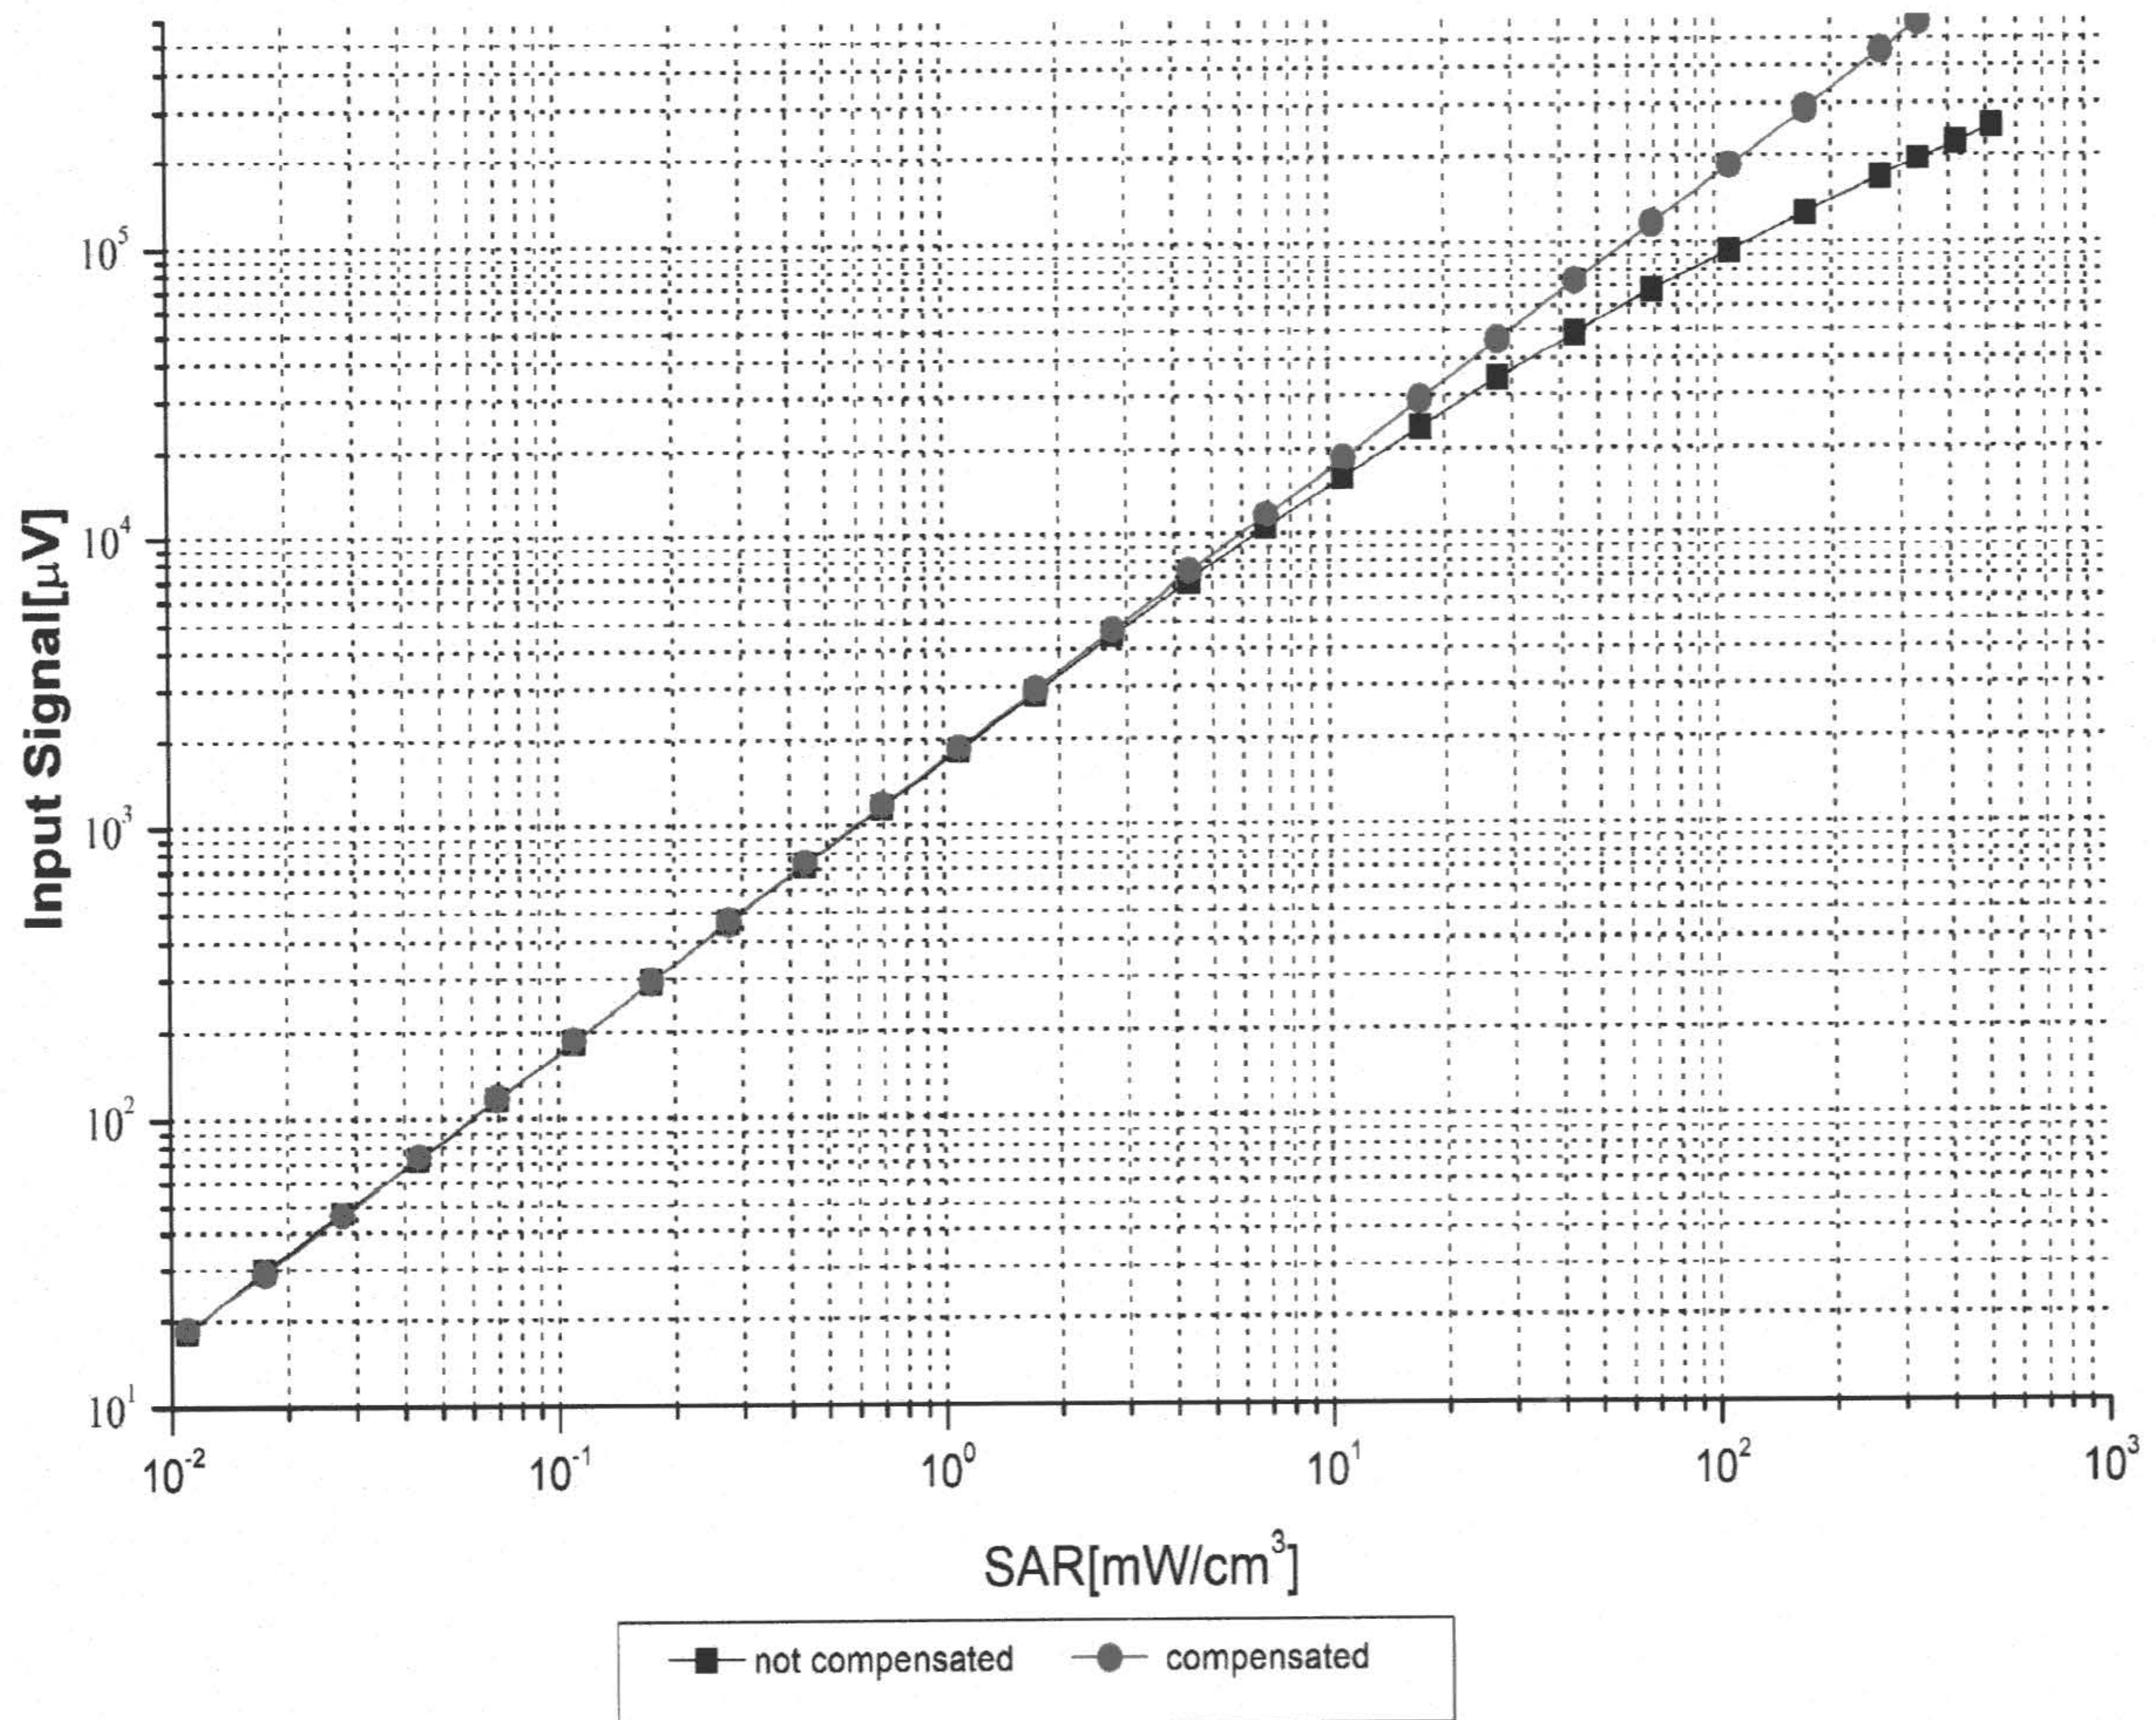

Uncertainty of Linearity Assessment:  $\pm 0.9\%$  ( $k=2$ )



In Collaboration with


**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

## Conversion Factor Assessment


**f=750 MHz,WGLS R9(H\_convF)**

**f=1750 MHz,WGLS R22(H\_convF)**

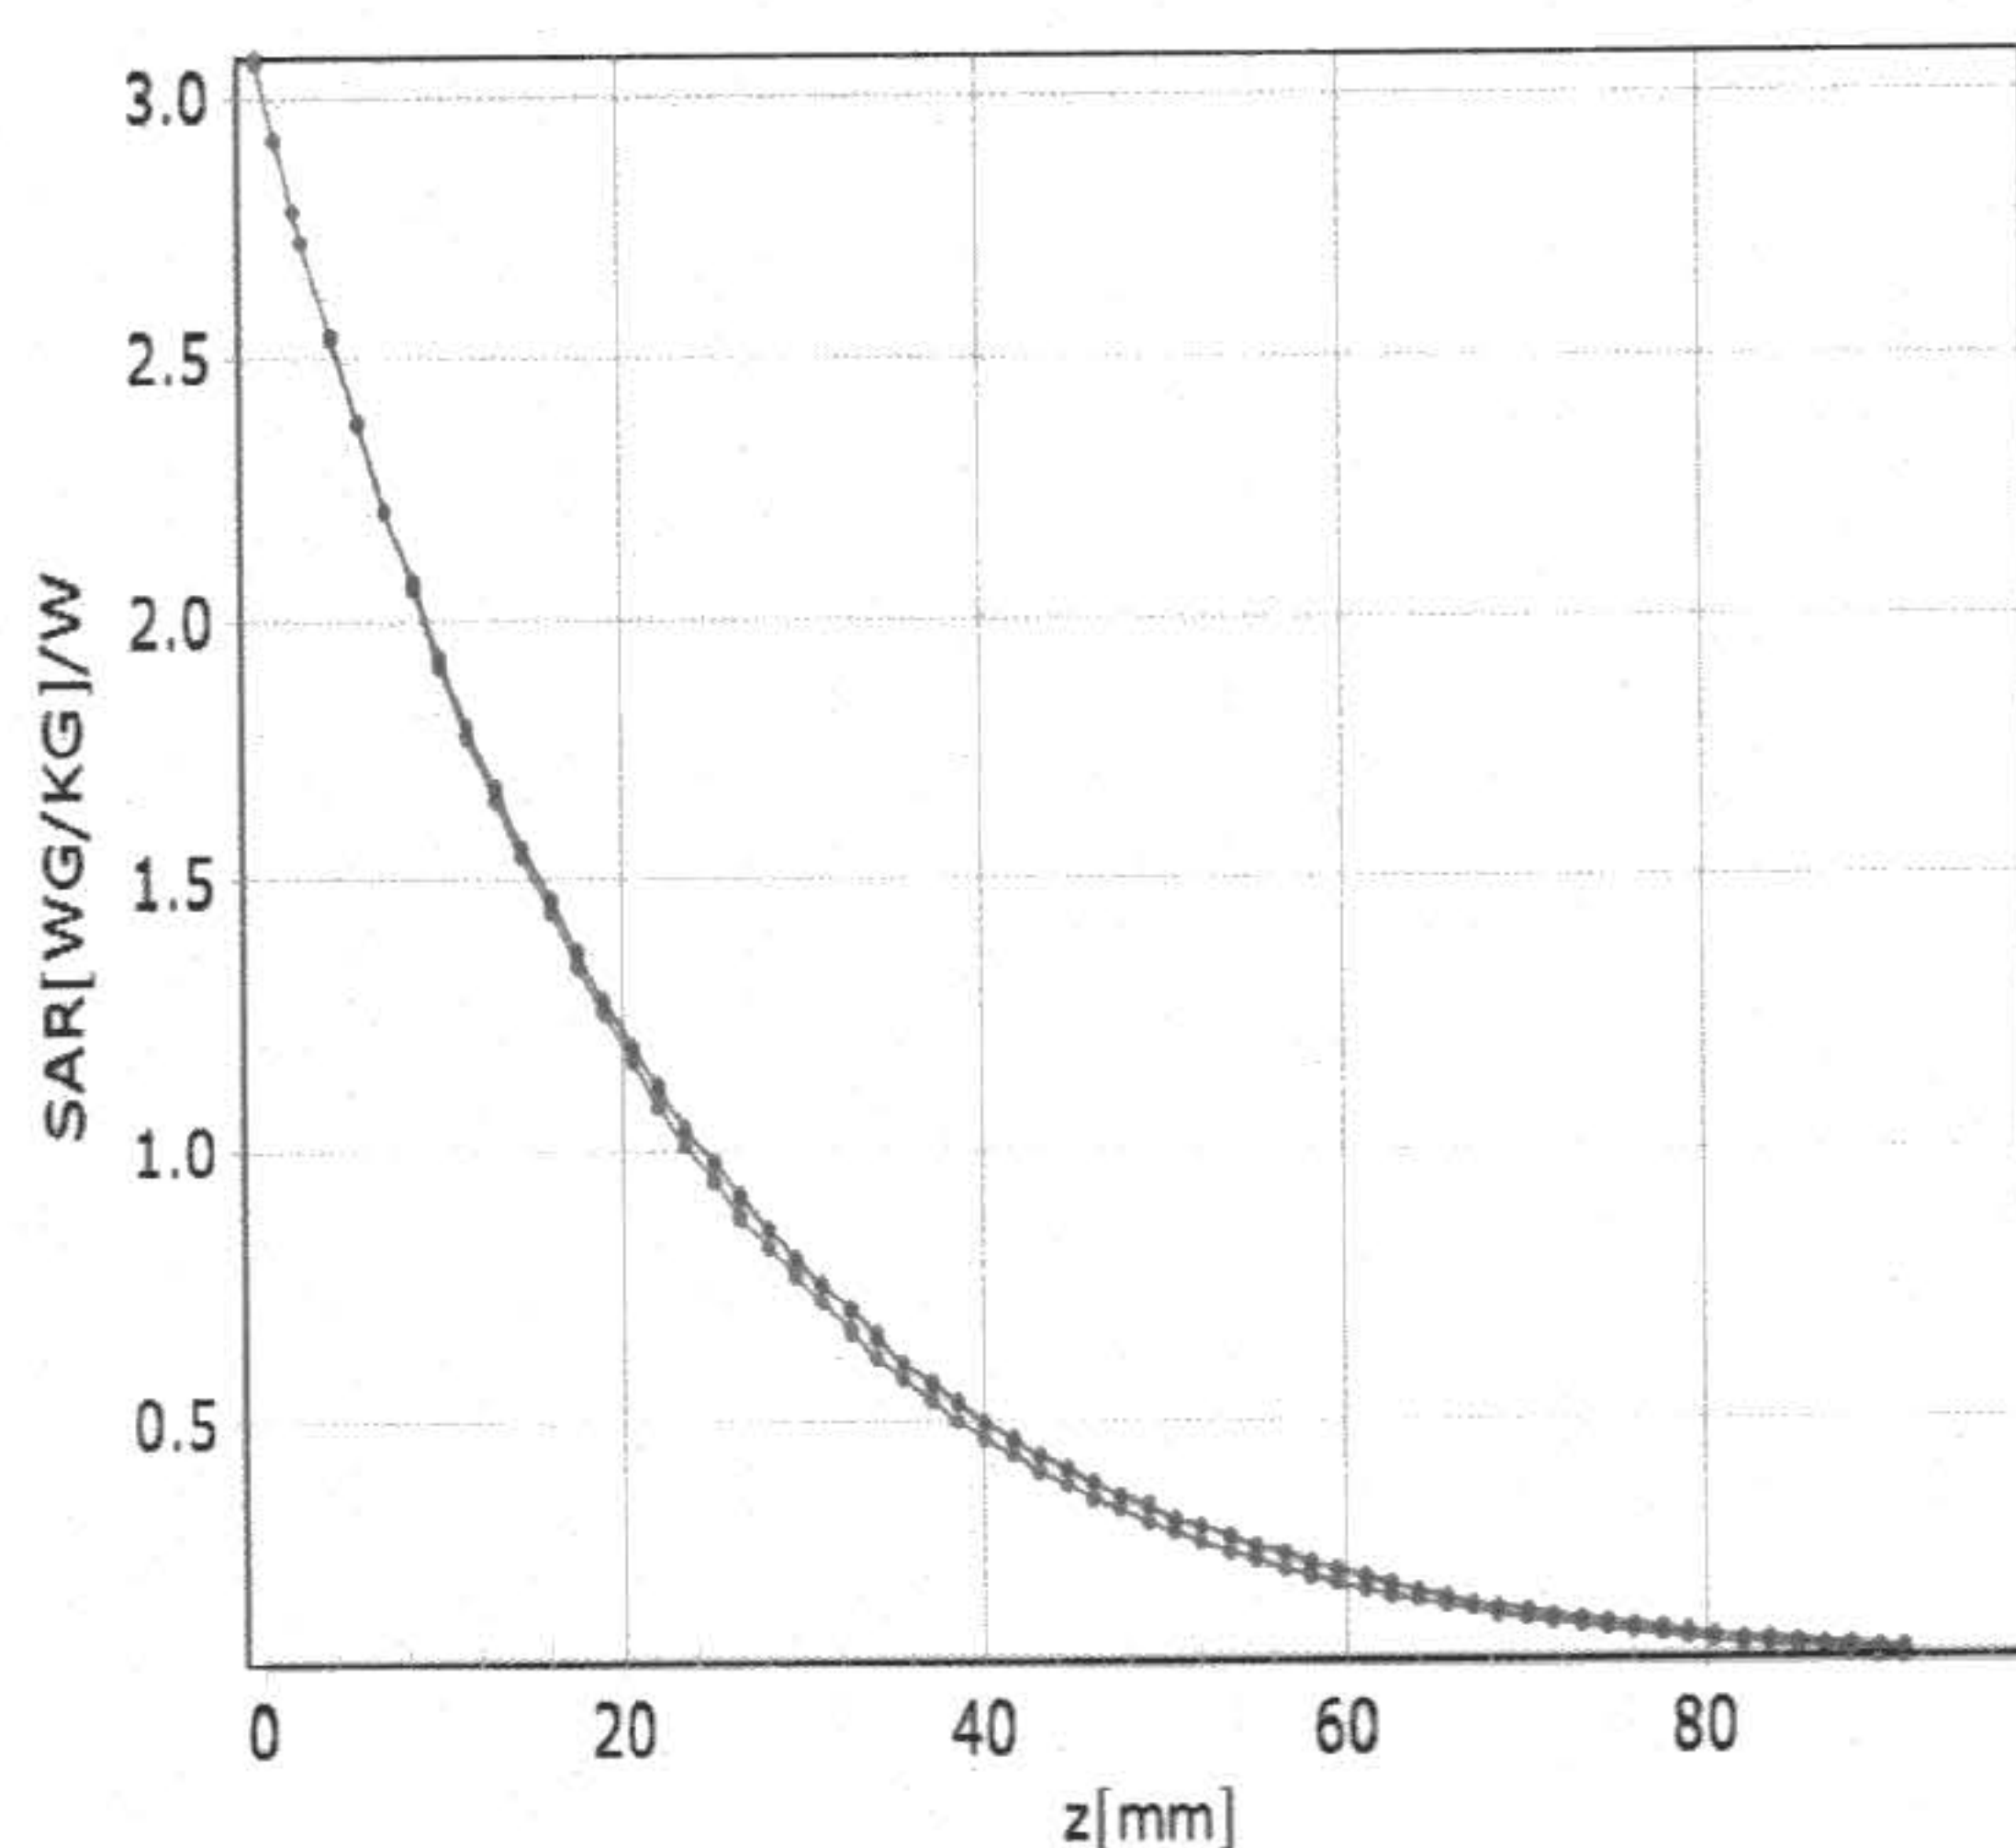

\* analytical


\* measured

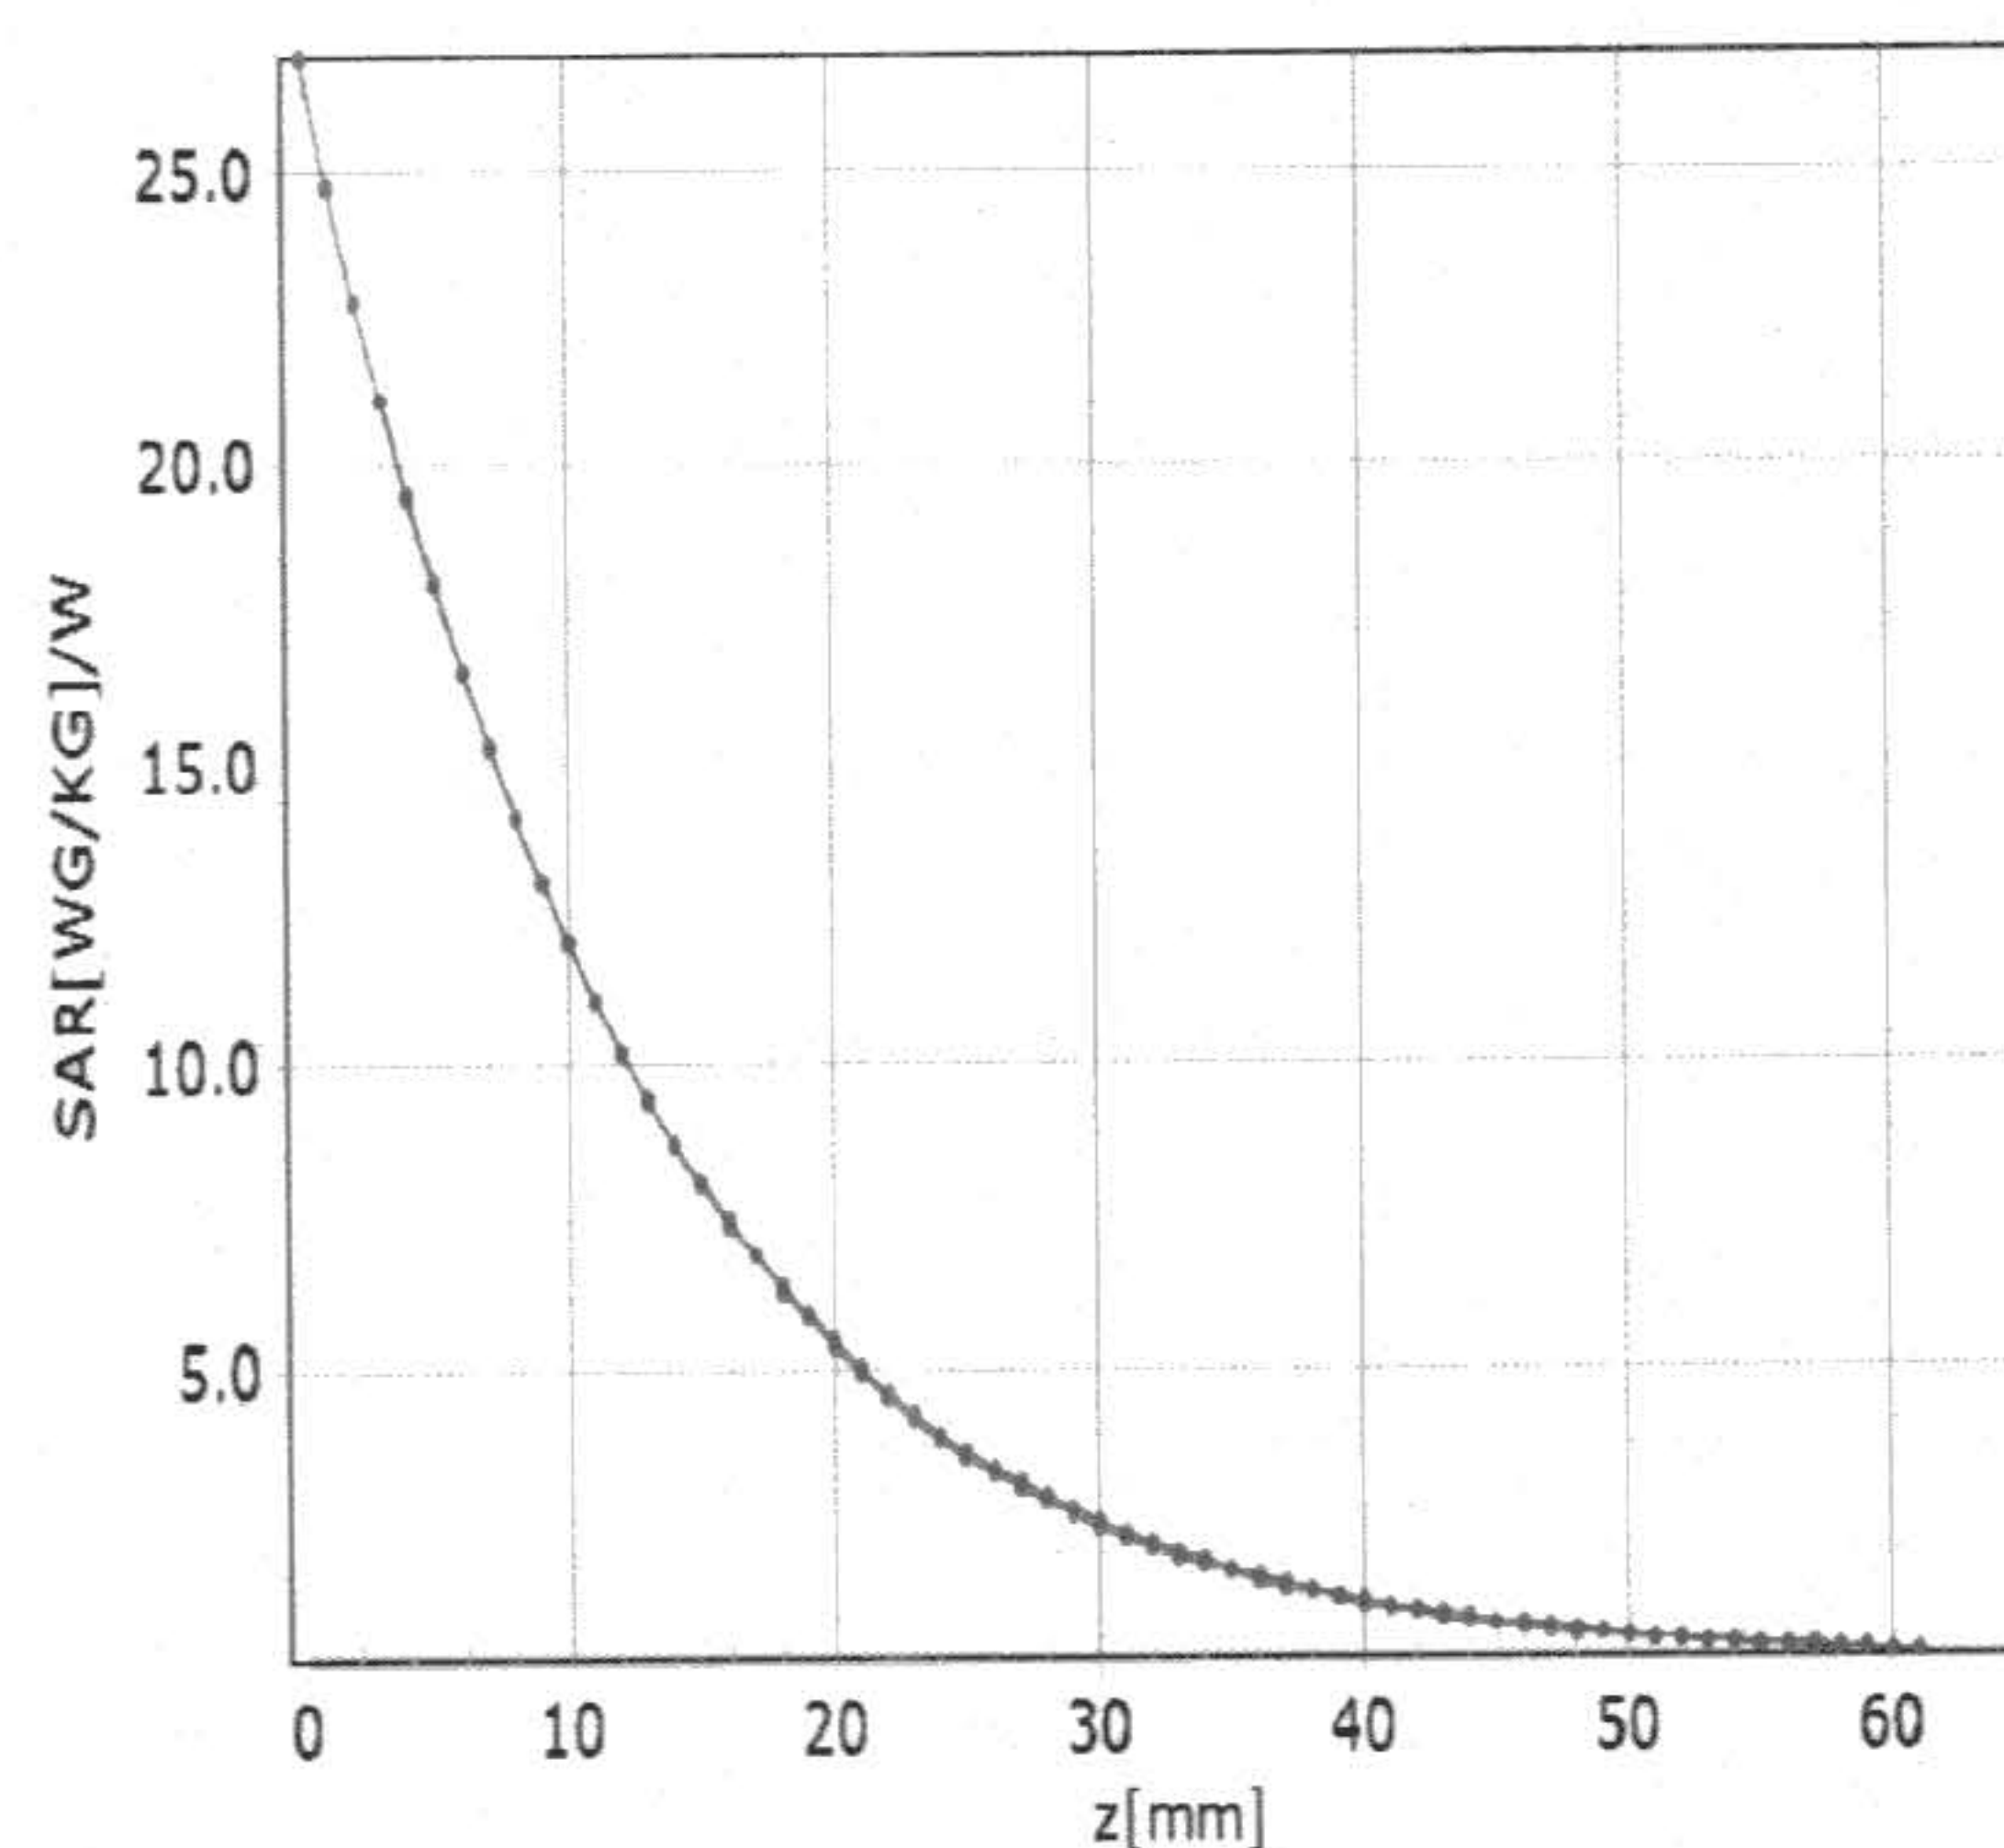

\* analytical

\* measured

## Deviation from Isotropy in Liquid

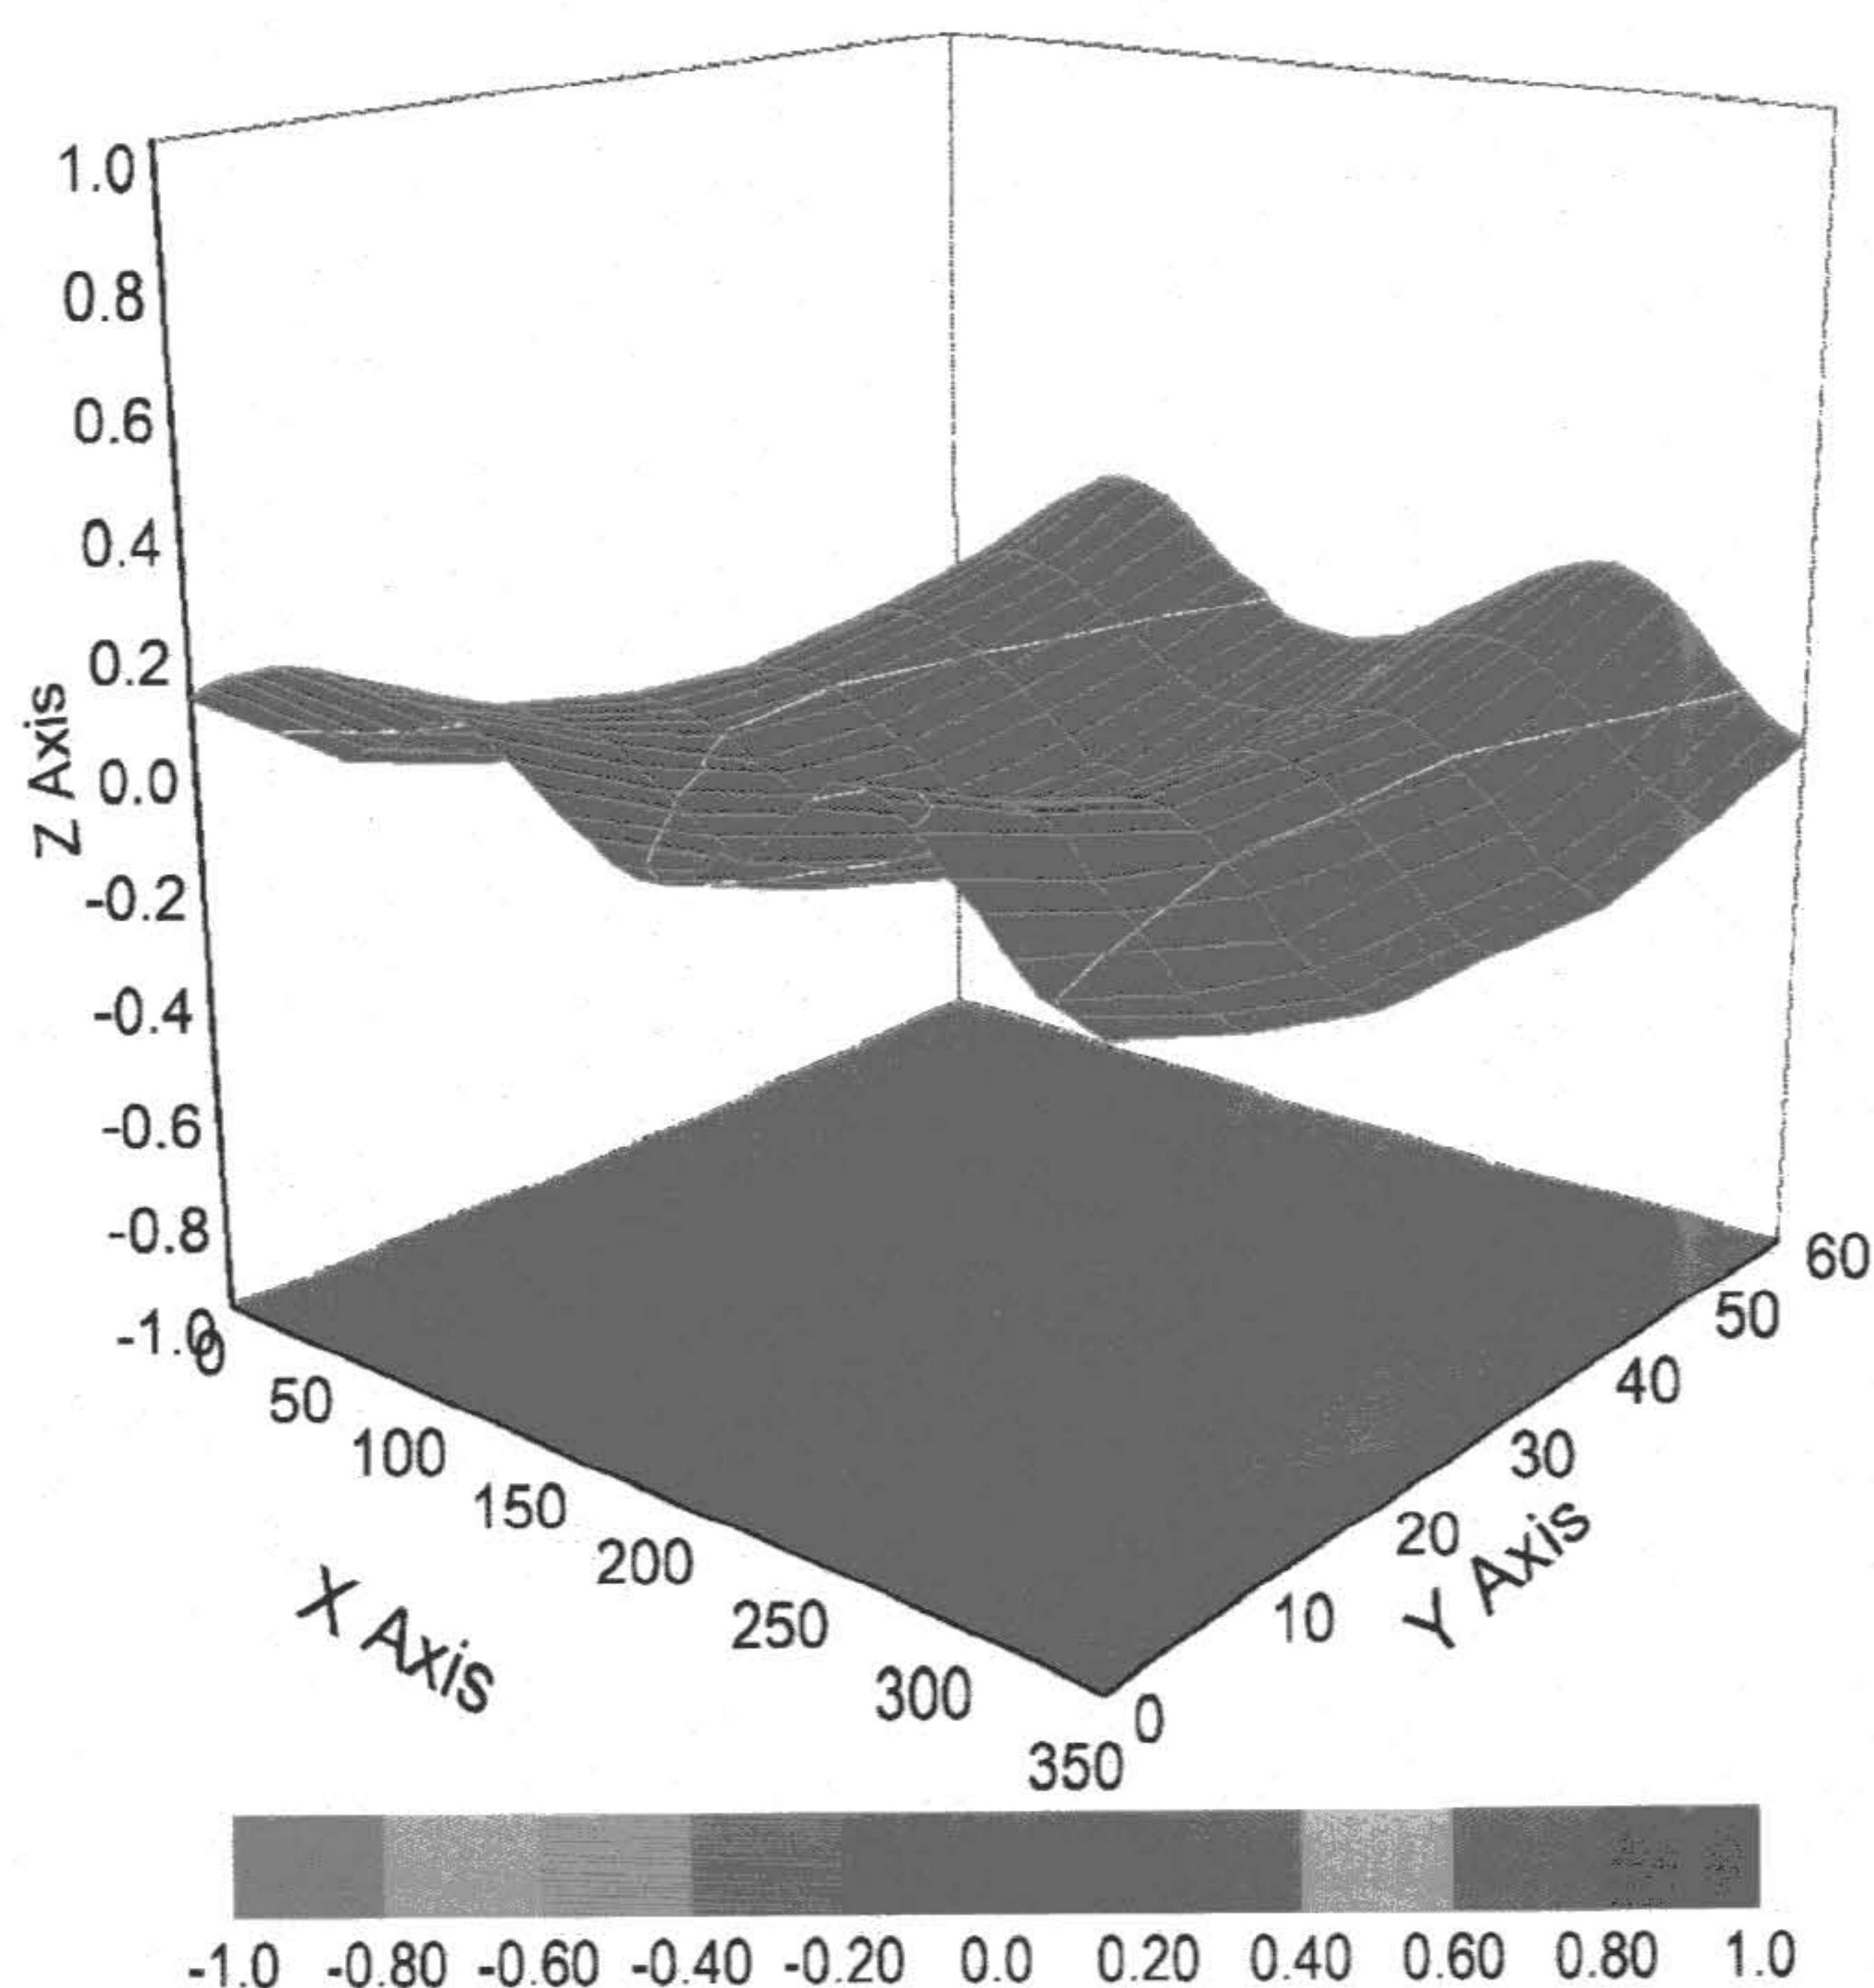

**Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  ( $k=2$ )**



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3748

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 5.7        |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disable    |
| Probe Overall Length                          | 337mm      |
| Probe Body Diameter                           | 10mm       |
| Tip Length                                    | 10mm       |
| Tip Diameter                                  | 2.5mm      |
| Probe Tip to Sensor X Calibration Point       | 1mm        |
| Probe Tip to Sensor Y Calibration Point       | 1mm        |
| Probe Tip to Sensor Z Calibration Point       | 1mm        |
| Recommended Measurement Distance from Surface | 1.4mm      |



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client

**SGS**

Certificate No: **Z20-60364**

## CALIBRATION CERTIFICATE

Object

EX3DV4 - SN : 3982

Calibration Procedure(s)

FF-Z11-004-02

Calibration Procedures for Dosimetric E-field Probes

Calibration date:

October 28, 2020

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards        | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|--------------------------|-------------|------------------------------------------|-----------------------|
| Power Meter NRP2         | 101919      | 16-Jun-20(CTTL, No.J20X04344)            | Jun-21                |
| Power sensor NRP-Z91     | 101547      | 16-Jun-20(CTTL, No.J20X04344)            | Jun-21                |
| Power sensor NRP-Z91     | 101548      | 16-Jun-20(CTTL, No.J20X04344)            | Jun-21                |
| Reference 10dBAttenuator | 18N50W-10dB | 10-Feb-20(CTTL, No.J20X00525)            | Feb-22                |
| Reference 20dBAttenuator | 18N50W-20dB | 10-Feb-20(CTTL, No.J20X00526)            | Feb-22                |
| Reference Probe EX3DV4   | SN 7307     | 29-May-20(SPEAG, No.EX3-7307_May20)      | May-21                |
| DAE4                     | SN 1556     | 4-Feb-20(SPEAG, No.DAE4-1556_Feb20)      | Feb-21                |
| Secondary Standards      | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| SignalGenerator MG3700A  | 6201052605  | 23-Jun-20(CTTL, No.J20X04343)            | Jun-21                |
| Network Analyzer E5071C  | MY46110673  | 10-Feb-20(CTTL, No.J20X00515)            | Feb-21                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: October 30, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a k**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

[Http://www.chinattl.cn](http://www.chinattl.cn)

## Glossary:

|                       |                                                                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                               |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                              |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                             |
| DCP                   | diode compression point                                                                                                                |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                           |
| A,B,C,D               | modulation dependent linearization parameters                                                                                          |
| Polarization $\Phi$   | $\Phi$ rotation around probe axis                                                                                                      |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3982

### Basic Calibration Parameters

|                                                   | Sensor X | Sensor Y | Sensor Z | Unc ( $k=2$ ) |
|---------------------------------------------------|----------|----------|----------|---------------|
| Norm( $\mu\text{V}/(\text{V/m})^2$ ) <sup>A</sup> | 0.55     | 0.56     | 0.50     | $\pm 10.0\%$  |
| DCP(mV) <sup>B</sup>                              | 102.2    | 104.8    | 102.5    |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A dB | B dB $\sqrt{\mu\text{V}}$ | C   | D dB | VR mV | Unc <sup>E</sup> ( $k=2$ ) |
|-----|---------------------------|---|------|---------------------------|-----|------|-------|----------------------------|
| 0   | CW                        | X | 0.0  | 0.0                       | 1.0 | 0.00 | 176.8 | $\pm 2.3\%$                |
|     |                           | Y | 0.0  | 0.0                       | 1.0 |      | 181.5 |                            |
|     |                           | Z | 0.0  | 0.0                       | 1.0 |      | 167.8 |                            |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 4).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

**Probe shall not be used for SAR compliance testing if measured SAR value of the DUT is below 0.025 mW/g.**



## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3982

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 10.73   | 10.73   | 10.73   | 0.40               | 0.75                    | ± 12.1%     |
| 835                  | 41.5                               | 0.90                            | 10.32   | 10.32   | 10.32   | 0.28               | 1.03                    | ± 12.1%     |
| 1750                 | 40.1                               | 1.37                            | 8.78    | 8.78    | 8.78    | 0.22               | 1.05                    | ± 12.1%     |
| 1900                 | 40.0                               | 1.40                            | 8.40    | 8.40    | 8.40    | 0.26               | 0.98                    | ± 12.1%     |
| 3300                 | 38.2                               | 2.71                            | 7.41    | 7.41    | 7.41    | 0.40               | 1.01                    | ± 13.3%     |
| 3500                 | 37.9                               | 2.91                            | 7.10    | 7.10    | 7.10    | 0.45               | 0.93                    | ± 13.3%     |
| 3700                 | 37.7                               | 3.12                            | 6.78    | 6.78    | 6.78    | 0.41               | 1.05                    | ± 13.3%     |
| 4100                 | 37.2                               | 3.53                            | 6.71    | 6.71    | 6.71    | 0.40               | 1.20                    | ± 13.3%     |
| 4400                 | 36.9                               | 3.84                            | 6.48    | 6.48    | 6.48    | 0.35               | 1.35                    | ± 13.3%     |
| 4600                 | 36.7                               | 4.04                            | 6.34    | 6.34    | 6.34    | 0.45               | 1.25                    | ± 13.3%     |
| 4800                 | 36.4                               | 4.25                            | 6.30    | 6.30    | 6.30    | 0.45               | 1.30                    | ± 13.3%     |
| 4950                 | 36.3                               | 4.40                            | 5.99    | 5.99    | 5.99    | 0.45               | 1.30                    | ± 13.3%     |
| 5250                 | 35.9                               | 4.71                            | 5.70    | 5.70    | 5.70    | 0.45               | 1.30                    | ± 13.3%     |
| 5600                 | 35.5                               | 5.07                            | 5.12    | 5.12    | 5.12    | 0.50               | 1.20                    | ± 13.3%     |
| 5750                 | 35.4                               | 5.22                            | 5.14    | 5.14    | 5.14    | 0.50               | 1.20                    | ± 13.3%     |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

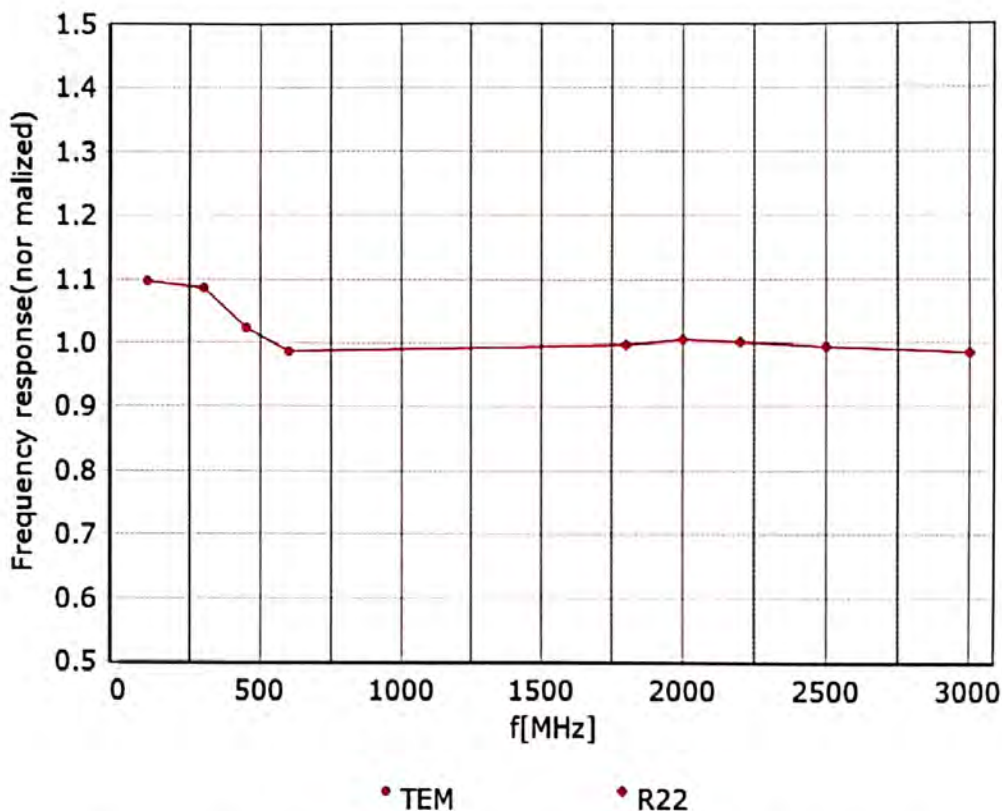

Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )




In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**

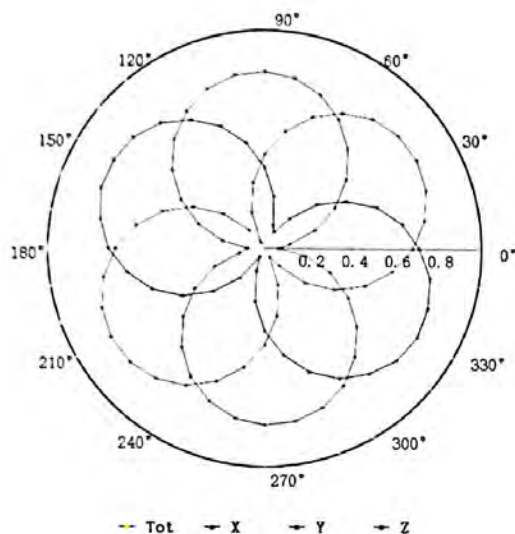

**f=1800 MHz, R22**

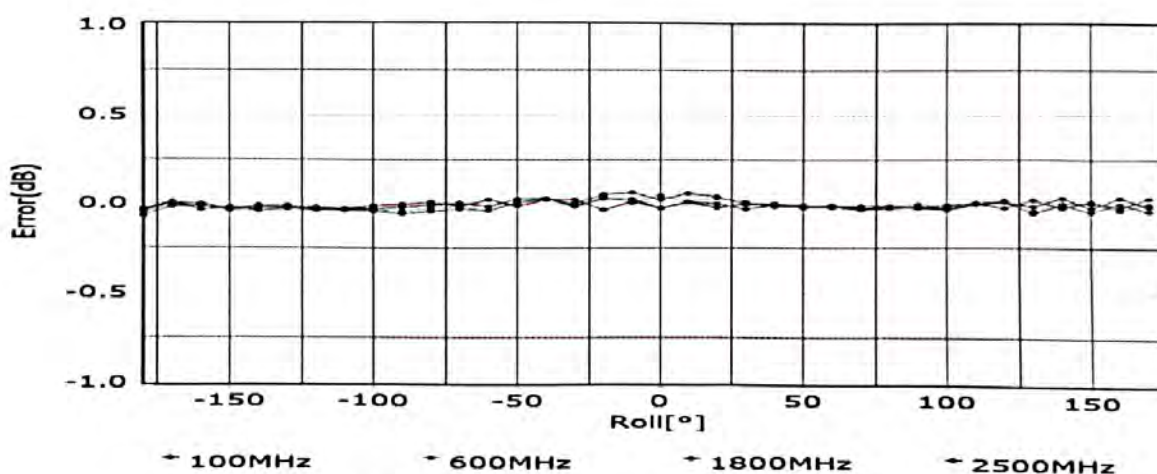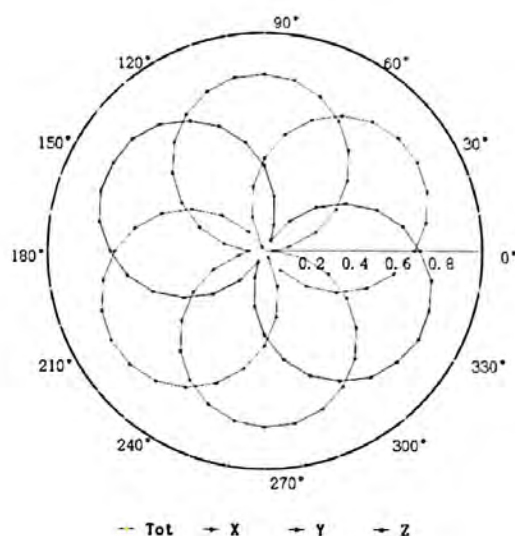



Uncertainty of Axial Isotropy Assessment:  $\pm 1.2\%$  ( $k=2$ )



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$ )

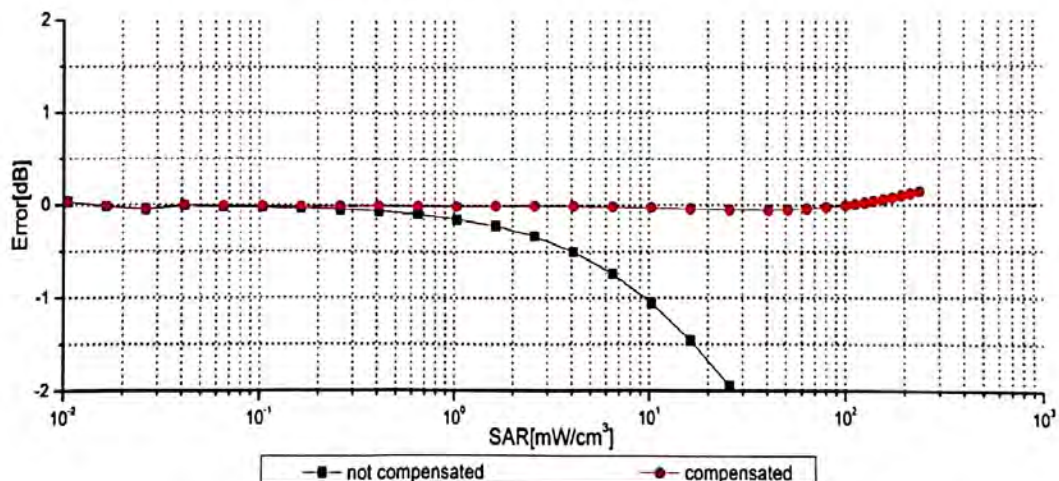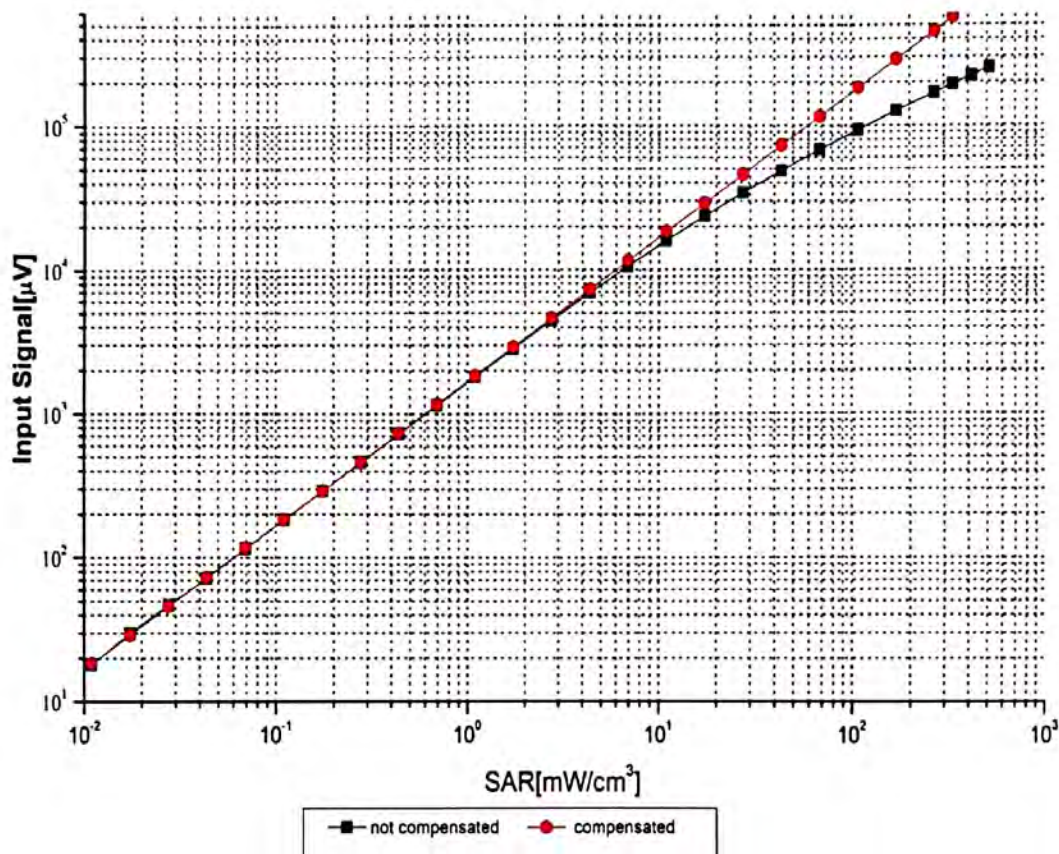

Uncertainty of Linearity Assessment:  $\pm 0.9\%$  ( $k=2$ )





In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


## Conversion Factor Assessment

**f=750 MHz,WGLS R9(H\_convF)**

**f=1750 MHz,WGLS R22(H\_convF)**

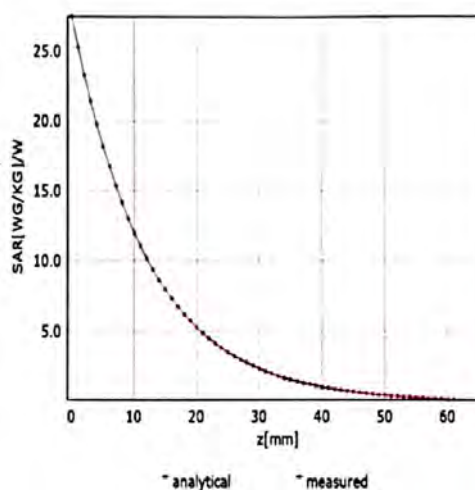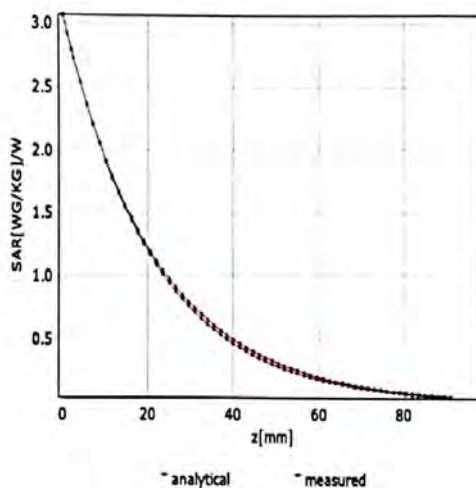

## Deviation from Isotropy in Liquid

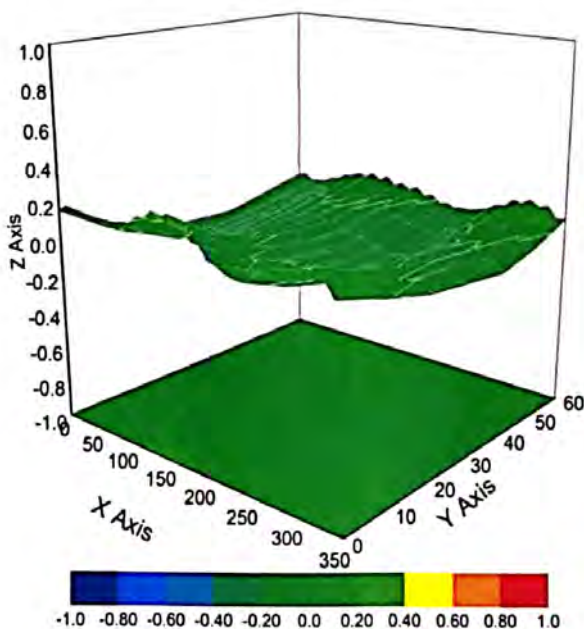

**Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  ( $k=2$ )**



In Collaboration with  
**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## **DASY/EASY – Parameters of Probe: EX3DV4 – SN:3982**

### **Other Probe Parameters**

|                                                      |                   |
|------------------------------------------------------|-------------------|
| <b>Sensor Arrangement</b>                            | <b>Triangular</b> |
| <b>Connector Angle (°)</b>                           | <b>170.7</b>      |
| <b>Mechanical Surface Detection Mode</b>             | <b>enabled</b>    |
| <b>Optical Surface Detection Mode</b>                | <b>disable</b>    |
| <b>Probe Overall Length</b>                          | <b>337mm</b>      |
| <b>Probe Body Diameter</b>                           | <b>10mm</b>       |
| <b>Tip Length</b>                                    | <b>10mm</b>       |
| <b>Tip Diameter</b>                                  | <b>2.5mm</b>      |
| <b>Probe Tip to Sensor X Calibration Point</b>       | <b>1mm</b>        |
| <b>Probe Tip to Sensor Y Calibration Point</b>       | <b>1mm</b>        |
| <b>Probe Tip to Sensor Z Calibration Point</b>       | <b>1mm</b>        |
| <b>Recommended Measurement Distance from Surface</b> | <b>1.4mm</b>      |

| Dipole D750V3 SN 1160 |                 |            |                        |                |
|-----------------------|-----------------|------------|------------------------|----------------|
| Head Liquid           |                 |            |                        |                |
| Date of Measurement   | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-05-22            | -29.1           | /          | 51.8                   | /              |
| 2020-05-21            | -29.4           | 1.03%      | 52.2                   | 0.4 $\Omega$   |

| Dipole D835V2 SN 4d105 |                 |            |                        |                |
|------------------------|-----------------|------------|------------------------|----------------|
| Head Liquid            |                 |            |                        |                |
| Date of Measurement    | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-12-17             | -26.0           | /          | 49.5                   | /              |
| 2020-12-16             | -27.0           | 3.85%      | 51.4                   | 1.9 $\Omega$   |

| Dipole D1750V2 SN 1149 |                 |            |                        |                |
|------------------------|-----------------|------------|------------------------|----------------|
| Head Liquid            |                 |            |                        |                |
| Date of Measurement    | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-05-21             | -31.8           | /          | 47.6                   | /              |
| 2020-05-20             | -32.3           | 1.57%      | 48.9                   | 1.3 $\Omega$   |

| Dipole D1900V2 SN 5d028 |                 |            |                        |                |
|-------------------------|-----------------|------------|------------------------|----------------|
| Head Liquid             |                 |            |                        |                |
| Date of Measurement     | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-12-17              | -22.2           | /          | 51.2                   | /              |
| 2020-12-16              | -23.0           | 3.60%      | 53.3                   | 2.1 $\Omega$   |

| Dipole D2450V2 SN 733 |                 |            |                        |                |
|-----------------------|-----------------|------------|------------------------|----------------|
| Head Liquid           |                 |            |                        |                |
| Date of Measurement   | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-12-17            | -27.2           | /          | 52.2                   | /              |
| 2020-12-16            | -27.8           | 2.21%      | 53.4                   | 1.2 $\Omega$   |

| Dipole D2600V2 SN 1125 |                 |            |                        |                |
|------------------------|-----------------|------------|------------------------|----------------|
| Head Liquid            |                 |            |                        |                |
| Date of Measurement    | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-05-20             | -25.7           | /          | 48.9                   | /              |
| 2020-05-19             | -26.6           | 3.50%      | 50.8                   | 1.9 $\Omega$   |

| Dipole D3700V2 SN 1046 |                 |            |                        |                |
|------------------------|-----------------|------------|------------------------|----------------|
| Head Liquid            |                 |            |                        |                |
| Date of Measurement    | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-09-06             | -28.2           | /          | 43.3                   | /              |
| 2020-09-05             | -29.1           | 3.19%      | 44.7                   | 1.4 $\Omega$   |

| Dipole D3900V2 SN 1026 |                     |                 |            |                        |                |
|------------------------|---------------------|-----------------|------------|------------------------|----------------|
| Head Liquid            |                     |                 |            |                        |                |
| Frequency(MHz)         | Date of Measurement | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 3900                   | 2019-09-03          | -23.4           | /          | 46.7                   | /              |
|                        | 2020-09-02          | -24.2           | 3.42%      | 47.8                   | 1.1 $\Omega$   |
| 4100                   | 2019-09-03          | -21.7           | /          | 59.0                   | /              |
|                        | 2020-09-02          | -22.2           | 2.30%      | 59.6                   | 0.6 $\Omega$   |

| Dipole D5GHzV2 SN 1165 |                 |            |                        |                |
|------------------------|-----------------|------------|------------------------|----------------|
| 5250MHz Head Liquid    |                 |            |                        |                |
| Date of Measurement    | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-12-20             | -25.5           | /          | 45.2                   | /              |
| 2020-12-19             | -26.3           | 3.14%      | 47.1                   | 1.9 $\Omega$   |
| 5600MHz Head Liquid    |                 |            |                        |                |
| Date of Measurement    | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-12-20             | 26.8            | /          | 52.0                   | /              |
| 2020-12-19             | -27.6           | 2.99%      | 53.7                   | 1.7 $\Omega$   |
| 5750MHz Head Liquid    |                 |            |                        |                |
| Date of Measurement    | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2019-12-20             | -27.5           | /          | 50.0                   | /              |
| 2020-12-19             | -28.4           | 3.27%      | 52.6                   | 2.6 $\Omega$   |