



Spot Check Evaluation

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCO
MODEL NAME : 24095PCADG
FCC ID : 2AFZZRA8EG
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(O),
27(Q), Part96
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Aug. 15, 2024 ~ Oct. 16, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

1 GENERAL DESCRIPTION..... 4

 1.1 Applicant 4

 1.2 Manufacturer..... 4

 1.3 Product Feature of Equipment Under Test..... 4

 1.4 Modification of EUT 4

 1.5 Testing Site..... 5

 1.6 Test Software..... 5

 1.7 Applicable Standards..... 5

2 RE-USE OF MEASURED DATA..... 6

 2.1 Introduction Section 6

 2.2 Model Difference Information 6

 2.3 Reference detail Section: 7

 2.4 Spot Check Verification Data Section..... 8

3 LIST OF MEASURING EQUIPMENT..... 16

4 MEASUREMENT UNCERTAINTY 18

APPENDIX A. RADIATED SPURIOUS EMISSION TEST DATA

APPENDIX B. SETUP PHOTOGRAPHS

APPENDIX C. REFERENCE REPORT



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	POCO
Model Name	24095PCADG
FCC ID	2AFZZRA8EG
IMEI Code	Conducted: 862769070026585/862769070026593 for BT/WLAN 862769070029589/862769070029597 for WWAN Radiation: 862769070028524 for BT/WLAN 862769070029282/862769070029290 for WWAN Conduction: 862669070025702/862769070025710 DFS: 862769070026585/862769070026593
HW Version	135300O16
SW Version	Xiaomi HyperOS 1.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS TH01-KS DFS01-KS 03CH03-KS 03CH04-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	DFS01-KS	Sporton	Test Tools	1.0
3.	CO01-KS	AUDIX	E3	6.2009-8-24
4.	03CH03-KS	AUDIX	E3	210616
5.	03CH04-KS	AUDIX	E3	210616

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(O), 27(Q), Part96
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 24095PCADG, FCC ID: 2AFZZRA8EG) is electrically identical to the reference device (Model: 24090RA29G, FCC ID: 2AFZZRA29G) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA471506-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: 2AFZZRA8EG .

2.2 Model Difference Information

The **main** difference between FCC ID: 2AFZZRA29G and FCC ID: 2AFZZRA8EG is as below:

- Removed LTE Band 12/13/17/26/32
- Removed TX1 B20 alternative path of B20 which used for low band + low band CA and ENDC

Other differences and all the details of similarity and difference can be found in the confidential documents (2AFZZRA8EG Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	2AFZZRA29G	Full test	FR471506A	2AFZZRA8EG	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	2AFZZRA29G	Full test	FR471506B	2AFZZRA8EG	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	2AFZZRA29G	Full test	FR471506C	2AFZZRA8EG	Spot check	Y, All test items
15E	U-NII	5180~5240	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5260~5320	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5500~5720	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5745~5825	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5260~5320 5500~5720	2AFZZRA29G	Full test	FZ471506	2AFZZRA8EG	Spot check	Y, All test items
22, 24, 27, 96,	PCE (GSM)	GSM 850/1900	2AFZZRA29G	Full test	FG471506A	2AFZZRA8EG	Spot check	Y, All test items
	PCE (WCDMA)	Band II, IV, V	2AFZZRA29G	Full test	FG471506A	2AFZZRA8EG	Spot check	Y, All test items
	PCE/CBE (LTE)	B2/4/7/7C/38/38C/41/42/48/66	2AFZZRA29G	Full test	FG471506B FG471506C FG471506E FG471506F FG471506G	2AFZZRA8EG	Spot check	Y, All test items
	PCE/CBE (NR)	n2/n5/n7/n38/n41/n48/n66/n77/n78	2AFZZRA29G	Full test	FG471506I FG471506J FG471506K FG471506L FG471506M FG471506N	2AFZZRA8EG	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit



2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \tag{1}$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \tag{2}$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (DH5-CH00)	Number of Channels (N)	79	79	0	3
	Hopping Channel Separation (MHz)	1.004	1.002	0.002	3
	Dwell Time of Each Channel(s)	0.31	0.31	0	3
	20dB Bandwidth(MHz)	0.86	0.86	0	3
	99% Bandwidth(MHz)	0.76	0.76	0	3
	Conducted Band Edges(dBm)	-48.06	-49.2	1.14	3
	Conducted Spurious Emission(dBm)	-50.22	-50.55	0.33	3
BT (Ch78)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	51.51	51.02	0.49	3
BT	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
BLE 1Mbps (CH00)	6dB Bandwidth (MHz)	0.7	0.69	0.01	3
	99% Bandwidth (MHz)	1.04	1.04	0	3
	Power Spectral Density (dBm/3KHz)	-8.4	-8.6	0.2	3
	Conducted Band Edges and Spurious Emission (dBm)	-51.86	-52.32	0.46	3
	Conducted Spurious Emission (dBm)	-50.91	-51.88	0.97	3
BLE (CH38)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	40.2	40.22	0.02	3
BLE	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth (MHz)	8.04	8.02	0.02	3
	99% Bandwidth (MHz)	13.23	13.14	0.09	3
	Power Spectral Density (dBm/3KHz)	-7.64	-7.88	0.24	3
	Conducted Band Edges and Spurious Emission (dBm)	-34.74	-35.55	0.81	3
	Conducted Spurious Emission (dBm)	-41.41	-42.08	0.67	3
WIFI 2.4G (802.11ax HE20 CH01)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.96	50.50	0.46	3
WLAN 2.4G	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
WIFI 5G (802.11a CH116)	26dB Emission Bandwidth (MHz)	23.73	23.66	0.07	3
	99% Occupied Bandwidth (MHz)	17.41	17.38	0.03	3
	Power Spectral Density (dBm/MHz)	6.9	6.88	0.02	3
WIFI 5G (802.11ax HE80 CH42)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.86	50.89	0.03	3
WLAN 5G	AC Conducted Emission (dBuV)	38.5	40.8	2.3	3
WLAN 5G	DFS (S)	0.846028	0.848428	0.0024	3



Mode	Test Item	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 22/24/27 (LTE Band 48)	Peak-to-Average Ratio (dB)	5.42	5.16	0.26	3
	Occupied Bandwidth (MHz)	17.94	17.90	0.04	3
	Conducted Band Edge (dBm/MHz)	-14.08	-14.87	0.79	3
	Conducted Spurious Emission (dBm/MHz)	-42.80	-44.75	1.95	3
	Frequency Stability (ppm)	0.0016	0.0003	0.0013	3
Part 96 (LTE Band 48)	Radiated Spurious Emission (dBm)	-47.27	-49.88	2.61	3



Conducted power for Unlicensed bands

Test Item	Mode	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR -CH 00-DH5	10.09	8.65	1.44	3
	BT BR/EDR -CH 39-DH5	8.29	7.04	1.25	3
	BT BR/EDR -CH 78-DH5	11.29	9.64	1.65	3
	BT BR/EDR -CH 00-2DH1	9.09	7.72	1.37	3
	BT BR/EDR -CH 39-2DH1	7.19	6.20	0.99	3
	BT BR/EDR -CH 78-2DH1	10.36	8.96	1.40	3
	BT BR/EDR -CH 00-3DH1	8.89	7.56	1.33	3
	BT BR/EDR -CH 39-3DH1	6.95	6.04	0.91	3
	BT BR/EDR -CH 78-3DH1	10.19	8.80	1.39	3
	BLE 1Mbps -CH00	6.49	7.02	0.31	3
	BLE 1Mbps -CH19	7.33	5.88	0.43	3
	BLE 1Mbps -CH39	6.31	6.12	0.43	3
	BLE 2Mbps -CH00	6.55	6.12	0.43	3
	BLE 2Mbps -CH19	7.37	7.05	0.32	3
	BLE 2Mbps -CH39	6.49	6.08	0.41	3
	11b-CH 01	17.18	16.87	0.31	3
	11b-CH 06	20.52	20.28	0.24	3
	11b-CH 11	16.96	16.64	0.32	3
	11g-CH 01	24.5	24.46	0.04	3
	11g-CH 06	24.88	24.42	0.46	3
	11g-CH 11	24.4	23.98	0.42	3
	11n HT20-CH 01	25.15	24.86	0.29	3
	11n HT20-CH 06	25	24.65	0.35	3
	11n HT20-CH 11	24.88	24.53	0.35	3
	11ax HE20-CH 01	24.4	24.08	0.32	3
	11ax HE20-CH 06	24.66	24.35	0.31	3
	11ax HE20-CH 11	24.31	24.02	0.29	3
	11a-CH 36	16.98	16.51	0.47	3
	11a-CH 44	16.91	16.58	0.33	3
	11a-CH 48	16.89	16.49	0.40	3
	11a-CH 52	16.88	16.65	0.23	3
	11a-CH 60	16.96	16.54	0.42	3
	11a-CH 64	16.82	16.59	0.23	3
	11a-CH 100	16.85	16.45	0.40	3
	11a-CH 116	17.06	16.91	0.15	3
	11a-CH 140	12.49	12.45	0.04	3
	11a-CH 149	17.17	16.91	0.26	3
	11a-CH 157	17.29	16.97	0.32	3
	11a-CH 165	17.21	16.92	0.29	3
	11n HT20-CH 36	16.02	15.65	0.37	3
	11n HT20-CH 44	16.00	15.53	0.47	3
	11n HT20-CH 48	15.79	15.32	0.47	3
	11n HT20-CH 52	15.72	15.42	0.30	3
	11n HT20-CH 60	15.87	15.45	0.42	3
	11n HT20-CH 64	15.84	15.51	0.33	3
11n HT20-CH 100	15.89	15.40	0.49	3	
11n HT20-CH 116	16.13	16.04	0.09	3	
11n HT20-CH 140	11.50	11.48	0.02	3	
11n HT20-CH 149	16.06	16.00	0.06	3	
11n HT20-CH 157	16.26	15.96	0.30	3	



11n HT20-CH 165	16.20	16.02	0.18	3
11ac VHT20-CH 36	16.08	15.68	0.40	3
11ac VHT20-CH 44	16.06	15.58	0.48	3
11ac VHT20-CH 48	15.85	15.45	0.40	3
11ac VHT20-CH 52	15.79	15.45	0.34	3
11ac VHT20-CH 60	15.90	15.47	0.43	3
11ac VHT20-CH 64	15.87	15.54	0.33	3
11ac VHT20-CH 100	15.94	15.46	0.48	3
11ac VHT20-CH 116	16.17	16.06	0.11	3
11ac VHT20-CH 140	11.58	11.52	0.06	3
11ac VHT20-CH 149	16.12	16.01	0.11	3
11ac VHT20-CH 157	16.33	15.98	0.35	3
11ac VHT20-CH 165	16.24	16.04	0.20	3
11ax HE20-CH 36	16.18	15.76	0.42	3
11ax HE20-CH 44	16.14	15.67	0.47	3
11ax HE20-CH 48	15.94	15.53	0.41	3
11ax HE20-CH 52	15.86	15.53	0.33	3
11ax HE20-CH 60	16.00	15.57	0.43	3
11ax HE20-CH 64	15.97	15.62	0.35	3
11ax HE20-CH 100	16.06	15.59	0.47	3
11ax HE20-CH 116	16.24	16.13	0.11	3
11ax HE20-CH 140	11.64	11.60	0.04	3
11ax HE20-CH 149	16.24	16.10	0.14	3
11ax HE20-CH 157	16.41	16.06	0.35	3
11ax HE20-CH 165	16.35	16.13	0.22	3
11n HT40-CH 38	14.11	13.65	0.46	3
11n HT40-CH 46	15.06	14.57	0.49	3
11n HT40-CH 54	15.01	14.60	0.41	3
11n HT40-CH 62	14.52	14.20	0.32	3
11n HT40-CH 102	13.80	13.62	0.18	3
11n HT40-CH 110	14.77	14.62	0.15	3
11n HT40-CH 134	15.23	15.06	0.17	3
11n HT40-CH 151	15.32	15.13	0.19	3
11n HT40-CH 159	15.36	15.09	0.27	3
11ac VHT40-CH 38	14.34	14.16	0.18	3
11ac VHT40-CH 46	15.80	15.32	0.48	3
11ac VHT40-CH 54	15.88	15.40	0.48	3
11ac VHT40-CH 62	14.44	14.07	0.37	3
11ac VHT40-CH 102	13.72	13.44	0.28	3
11ac VHT40-CH 110	15.76	15.39	0.37	3
11ac VHT40-CH 134	15.51	15.40	0.11	3
11ac VHT40-CH 151	16.10	15.94	0.16	3
11ac VHT40-CH 159	16.24	15.86	0.38	3
11ax40-CH 38	14.24	13.76	0.48	3
11ax40-CH 46	15.17	14.69	0.48	3
11ax40-CH 54	15.12	14.70	0.42	3
11ax40-CH 62	14.65	14.29	0.36	3
11ax40-CH 102	13.94	13.70	0.24	3
11ax40-CH 110	14.88	14.73	0.15	3
11ax40-CH 134	15.35	15.16	0.19	3
11ax40-CH 151	15.41	15.21	0.20	3
11ax40-CH 159	15.47	15.19	0.28	3
11ac VHT80-CH 042	13.40	12.98	0.42	3
11ac VHT80-CH 058	12.70	12.53	0.17	3
11ac VHT80-CH 106	13.30	13.08	0.22	3



	11ac VHT80-CH 122	14.15	13.86	0.29	3
	11ac VHT80-CH 138	14.01	13.93	0.08	3
	11ac VHT80-CH 155	14.21	13.88	0.33	3
	11ax HE80-CH 042	13.57	13.09	0.48	3
	11ax HE80-CH 058	12.84	12.63	0.21	3
	11ax HE80-CH 106	13.43	13.16	0.27	3
	11ax HE80-CH 122	14.24	13.97	0.27	3
	11ax HE80-CH 138	14.13	14.02	0.11	3
	11ax HE80-CH 155	14.33	13.98	0.35	3

Conducted power/ERP/EIRP for Licensed bands

Test Item	Mode	Bandwidth	Channel	Frequency	Modulation	2AFZZRA29G Parent Worst mode Test Result		2AFZZRA8EG Variant Check Test Result		Deviation (dB)	Deviation Limit (dB)
						Coducted (dBm)	ERP/EIRP (W)	Coducted (dBm)	ERP/EIRP (W)		
Conducted Power /ERP/EIRP	GSM 850	/	128	824.2	GMSK	32.4	1.7378	32.15	1.6406	0.25	3
	GSM 850	/	189	836.4	GMSK	32.46	1.7620	32.26	1.6827	0.2	3
	GSM 850	/	251	848.8	GMSK	32.45	1.7579	32.28	1.6904	0.17	3
	GSM 1900	/	512	1850.2	GMSK	29.31	0.8531	29.12	0.8166	0.19	3
	GSM 1900	/	661	1880	GMSK	29.45	0.8810	29.22	0.8356	0.23	3
	GSM 1900	/	810	1909.8	GMSK	29.43	0.8770	29.18	0.8279	0.25	3
	WCDMA 850	/	4132	826.4	BPSK	24.48	0.2805	24.36	0.2729	0.12	3
	WCDMA 850	/	4182	836.4	BPSK	24.5	0.2818	24.38	0.2742	0.12	3
	WCDMA 850	/	4233	846.6	BPSK	24.44	0.2780	24.29	0.2685	0.15	3
	WCDMA1900	/	9262	1852.4	BPSK	22.91	0.1954	22.85	0.1928	0.06	3
	WCDMA1900	/	9400	1880	BPSK	22.98	0.1986	22.90	0.1950	0.08	3
	WCDMA1900	/	9538	1907.6	BPSK	22.93	0.1963	22.82	0.1914	0.11	3
	WCDMA1700	/	1312	1712.4	BPSK	23.91	0.2460	23.69	0.2339	0.22	3
	WCDMA1700	/	1413	1732.6	BPSK	23.96	0.2489	23.75	0.2371	0.21	3
	WCDMA1700	/	1513	1752.6	BPSK	23.92	0.2466	23.63	0.2307	0.29	3
	B2	20M	18700	1860	QPSK	23.01	0.2000	22.61	0.1824	0.4	3
	B2	20M	18900	1880	QPSK	23.05	0.2018	22.67	0.1849	0.38	3
	B2	20M	19100	1900	QPSK	22.98	0.1986	22.65	0.1841	0.33	3
	B4	20M	20050	1720	QPSK	23.81	0.2404	23.75	0.2371	0.06	3
	B4	20M	20175	1732.5	QPSK	23.86	0.2432	23.80	0.2399	0.06	3
	B4	20M	20300	1745	QPSK	23.83	0.2415	23.72	0.2355	0.11	3
	B66	20M	132072	1720	QPSK	23.83	0.2415	23.68	0.2333	0.15	3
	B66	20M	132322	1745	QPSK	23.94	0.2477	23.73	0.2360	0.21	3
	B66	20M	132572	1770	QPSK	23.93	0.2472	23.65	0.2317	0.28	3
	B7	20M	20850	2510	QPSK	23.68	0.2333	23.64	0.2312	0.04	3
	B7	20M	21100	2535	QPSK	23.75	0.2371	23.68	0.2333	0.07	3
	B7	20M	21350	2560	QPSK	23.66	0.2323	23.61	0.2296	0.05	3
	B7C	20M+20M	20850_21048	2510_2529.8	QPSK	23.24	0.2109	23.22	0.2099	0.02	3
	B7C	20M+20M	21001_21199	2525.1_2544.9	QPSK	23.29	0.2133	23.24	0.2109	0.05	3
	B7C	20M+20M	21152_21350	2540.2_2560	QPSK	23.28	0.2128	23.13	0.2056	0.15	3
	B38	20M	37850	2580	QPSK	23.43	0.2203	23.40	0.2188	0.03	3
	B38	20M	38000	2595	QPSK	23.52	0.2249	23.43	0.2203	0.09	3



B38	20M	38150	2610	QPSK	23.48	0.2228	23.38	0.2178	0.1	3
B41	20M	39750	2506	QPSK	23.44	0.2208	23.40	0.2188	0.04	3
B41	20M	40620	2593	QPSK	23.6	0.2291	23.49	0.2234	0.11	3
B41	20M	41490	2680	QPSK	23.54	0.2259	23.39	0.2183	0.15	3
B38C-20M+20M	20M+20M	37850_38048	2580_2599.8	QPSK	23.38	0.2178	23.31	0.2143	0.07	3
B38C-20M+20M	20M+20M	37901_38099	2585.1_2604.9	QPSK	23.39	0.2183	23.35	0.2163	0.04	3
B38C-20M+20M	20M+20M	37952_38150	2590.2_2610	QPSK	23.36	0.2168	23.27	0.2123	0.09	3
B42	20M	42190	3460	QPSK	24.56	0.2858	24.34	0.2716	0.22	3
B42	20M	42590	3500	QPSK	24.59	0.2877	24.45	0.2786	0.14	3
B42	20M	42990	3540	QPSK	24.54	0.2844	24.47	0.2799	0.07	3
B48	20M	55340	3560	QPSK	24.41	0.2761	24.33	0.2710	0.08	3
B48	20M	55830	3609	QPSK	24.48	0.2805	24.36	0.2729	0.12	3
B48	20M	56640	3690	QPSK	24.38	0.2742	24.29	0.2685	0.09	3
N2-L	20M	372000	1860	PI/2 BPSK	22.83	0.1919	22.78	0.1897	0.05	3
N2-M	20M	376000	1880	PI/2 BPSK	22.78	0.1897	22.72	0.1871	0.06	3
N2-H	20M	380000	1900	PI/2 BPSK	22.64	0.1837	22.61	0.1824	0.03	3
N5-L	20M	166800	834	PI/2 BPSK	24.37	0.2735	24.33	0.2710	0.04	3
N5-M	20M	167300	836.5	PI/2 BPSK	24.46	0.2793	24.41	0.2761	0.05	3
N5-H	20M	167800	839	PI/2 BPSK	24.4	0.2754	24.28	0.2679	0.12	3
N7-L	50M	505000	2525	PI/2 BPSK	22.85	0.1928	22.81	0.1910	0.04	3
N7-M	50M	507000	2535	PI/2 BPSK	23.01	0.2000	22.98	0.1986	0.03	3
N7-H	50M	509000	2545	PI/2 BPSK	23.3	0.2138	23.13	0.2056	0.17	3
N38-L	40M	518000	2590	QPSK	23.16	0.2070	23.11	0.2046	0.05	3
N38-M	40M	519000	2595	QPSK	23.16	0.2070	23.09	0.2037	0.07	3
N38-H	40M	520000	2600	QPSK	23.18	0.2080	23.15	0.2065	0.03	3
N41-L	100M	509202	2546.01	QPSK	23.16	0.2070	23.11	0.2046	0.05	3
N41-M	100M	518598	2592.99	QPSK	23.23	0.2104	23.18	0.2080	0.05	3
N41-H	100M	528000	2640	QPSK	23.03	0.2009	22.98	0.1986	0.05	3
N66-L	40M	346000	1730	PI/2 BPSK	24.2	0.2630	24.16	0.2606	0.04	3
N66-M	40M	349000	1745	PI/2 BPSK	24	0.2512	23.96	0.2489	0.04	3
N66-H	40M	352000	1760	PI/2 BPSK	24.09	0.2564	24.03	0.2529	0.06	3
N48-L	40M	638000	3570	PI/2 BPSK	24.23	0.2649	24.14	0.2594	0.09	3
N48-M	40M	641666	3624.99	PI/2 BPSK	24.58	0.2871	24.48	0.2805	0.1	3
N48-H	40M	645332	3679.98	PI/2 BPSK	24.15	0.2600	24.10	0.2570	0.05	3
N77 27O-L	100M	650000	3750	PI/2 BPSK	26.17	0.4140	26.14	0.4111	0.03	3
N77 27O-M	100M	656000	3840	PI/2 BPSK	26.19	0.4159	26.13	0.4102	0.06	3
N77 27O-H	100M	662000	3930	PI/2 BPSK	26.4	0.4365	26.31	0.4276	0.09	3
N78 27O	100M	650000	3750	QPSK	26.31	0.4276	26.27	0.4236	0.04	3
N77 27Q	100M	633334	3500.01	PI/2 BPSK	26.3	0.4266	26.25	0.4217	0.05	3
N78 27Q	100M	633334	3500.01	PI/2 BPSK	26.28	0.4246	26.11	0.4083	0.17	3



Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 28, 2024~ Oct. 16, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024		Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 28, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 28, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr 17, 2024	Aug. 30, 2024	Apr 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Aug. 30, 2024	NCR	Conducted (DFS01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-1GHz	Dec. 06, 2023	Aug. 15, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 15, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 15, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz~1000MHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required.



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 28, 2024~ Oct. 16, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024		Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 28, 2024~ Oct. 16, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Aug. 18, 2024	Aug. 22, 2024~ Oct. 15, 2024	Aug. 17, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz-18Ghz	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz-18Ghz	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required.



4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------



03CH03-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22dB
---	--------

03CH04-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.82 dB
---	---------

-THE END-



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Jake Zhou	Relative Humidity :	53-58%
		Temperature :	23-26°C

Radiated Spurious Emission Test Modes for Co-location

Mode	Band	Band	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	Co-location	2.4G WIFI	6	802.11ax HE20	01	2412	MCS0	Full	-
		WWAN	3	Part 96 LTE Band 48 BW=20M					
Mode 2	Co-location	5G U-NII-1	6	802.11ax HE80	42	5210	MCS0	Full	-
		-	6	Bluetooth-LE	38	2478	2Mbps	Full	-
		WWAN	3	Part 96 LTE Band 48 BW=20M					





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ax HE20	01	2389.95	50.83	54.00	-3.17	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	01	4824.00	44.42	74.00	-29.58	H	PEAK	Pass	Harmonic
2	802.11ax HE80	42	5149.76	50.67	54.00	-3.33	H	AVERAGE	Pass	Band Edge
	802.11ax HE80	42	10420.00	44.50	68.20	-23.70	V	PEAK	Pass	Harmonic
	Bluetooth-LE	38	2485.24	40.48	54.00	-13.52	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	4956.00	46.87	54.00	-7.13	H	AVERAGE	Pass	Harmonic



	1																																																																																			
Mode	Band Edge																																																																																			
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																																																			
ANT	6																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>66.56</td> <td>74.00</td> <td>-7.44</td> <td>58.32</td> <td>31.94</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>206</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	66.56	74.00	-7.44	58.32	31.94	7.16	36.86	6.00	206	311	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>105.97</td> <td>-----</td> <td>-----</td> <td>97.49</td> <td>32.14</td> <td>7.20</td> <td>36.86</td> <td>6.00</td> <td>206</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.97	-----	-----	97.49	32.14	7.20	36.86	6.00	206	311	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.82	66.56	74.00	-7.44	58.32	31.94	7.16	36.86	6.00	206	311	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	105.97	-----	-----	97.49	32.14	7.20	36.86	6.00	206	311	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>50.83</td> <td>54.00</td> <td>-3.17</td> <td>42.59</td> <td>31.94</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>206</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.83	54.00	-3.17	42.59	31.94	7.16	36.86	6.00	206	311	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>95.94</td> <td>-----</td> <td>-----</td> <td>87.42</td> <td>32.17</td> <td>7.21</td> <td>36.86</td> <td>6.00</td> <td>206</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.94	-----	-----	87.42	32.17	7.21	36.86	6.00	206	311	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	50.83	54.00	-3.17	42.59	31.94	7.16	36.86	6.00	206	311	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	95.94	-----	-----	87.42	32.17	7.21	36.86	6.00	206	311	AVERAGE																																																																								

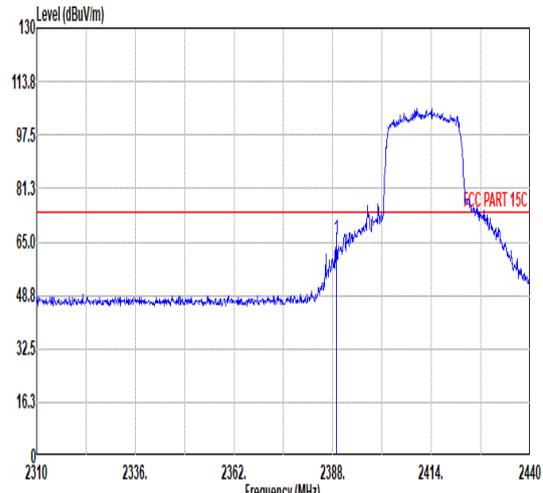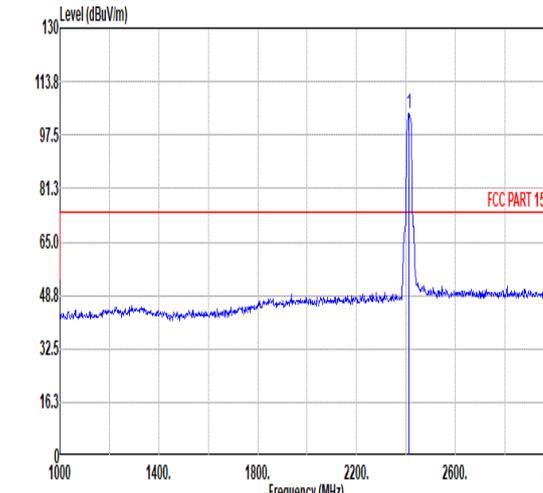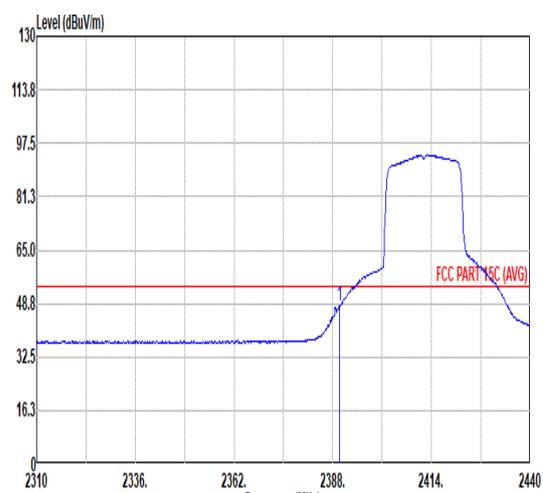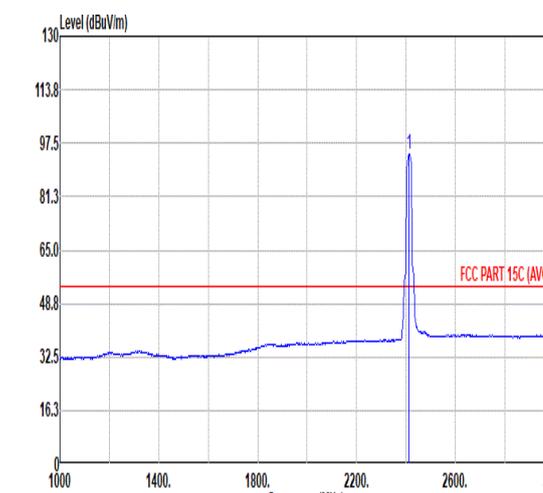

Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																																																			
ANT	6																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>2310 2336 2362 2388 2414 2440</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.91</td> <td>65.71</td> <td>74.00</td> <td>-8.29</td> <td>57.48</td> <td>31.93</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>312</td> <td>52</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	65.71	74.00	-8.29	57.48	31.93	7.16	36.86	6.00	312	52	PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 1400 1800 2200 2600 3000</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.99</td> <td>-----</td> <td>-----</td> <td>95.51</td> <td>32.14</td> <td>7.20</td> <td>36.86</td> <td>6.00</td> <td>312</td> <td>52</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.99	-----	-----	95.51	32.14	7.20	36.86	6.00	312	52	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2388.91	65.71	74.00	-8.29	57.48	31.93	7.16	36.86	6.00	312	52	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	103.99	-----	-----	95.51	32.14	7.20	36.86	6.00	312	52	PEAK																																																																								
Avg	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>2310 2336 2362 2388 2414 2440</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>48.00</td> <td>54.00</td> <td>-6.00</td> <td>39.76</td> <td>31.94</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>312</td> <td>52</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	48.00	54.00	-6.00	39.76	31.94	7.16	36.86	6.00	312	52	AVERAGE	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 1400 1800 2200 2600 3000</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>93.97</td> <td>-----</td> <td>-----</td> <td>85.49</td> <td>32.14</td> <td>7.20</td> <td>36.86</td> <td>6.00</td> <td>312</td> <td>52</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.97	-----	-----	85.49	32.14	7.20	36.86	6.00	312	52	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.82	48.00	54.00	-6.00	39.76	31.94	7.16	36.86	6.00	312	52	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	93.97	-----	-----	85.49	32.14	7.20	36.86	6.00	312	52	AVERAGE																																																																								



Mode	1																																																																																				
	Harmonic																																																																																				
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																																																				
ANT	6																																																																																				
Pol.	Horizontal	Vertical																																																																																			
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>64.97</td> <td>34.40</td> <td>10.29</td> <td>65.24</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.42	74.00	-29.58	64.97	34.40	10.29	65.24	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>43.04</td> <td>74.00</td> <td>-30.96</td> <td>63.59</td> <td>34.40</td> <td>10.29</td> <td>65.24</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	43.04	74.00	-30.96	63.59	34.40	10.29	65.24	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	4824.00	44.42	74.00	-29.58	64.97	34.40	10.29	65.24	0.00	--	--	PEAK																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	4824.00	43.04	74.00	-30.96	63.59	34.40	10.29	65.24	0.00	--	--	PEAK																																																																									



Mode	2																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																																										
ANT	6																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.96</td> <td>60.84</td> <td>74.00</td> <td>-13.16</td> <td>52.93</td> <td>34.60</td> <td>10.65</td> <td>37.34</td> <td>0.00</td> <td>101</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.96	60.84	74.00	-13.16	52.93	34.60	10.65	37.34	0.00	101	236	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2476.00</td> <td>87.52</td> <td>-----</td> <td>84.45</td> <td>32.60</td> <td>7.32</td> <td>36.85</td> <td>0.00</td> <td>101</td> <td>236</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3616.00</td> <td>109.54</td> <td>-----</td> <td>104.37</td> <td>32.86</td> <td>8.89</td> <td>36.58</td> <td>0.00</td> <td>101</td> <td>236</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5210.00</td> <td>98.23</td> <td>-----</td> <td>90.15</td> <td>34.68</td> <td>10.72</td> <td>37.32</td> <td>0.00</td> <td>101</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2476.00	87.52	-----	84.45	32.60	7.32	36.85	0.00	101	236	Peak	2	3616.00	109.54	-----	104.37	32.86	8.89	36.58	0.00	101	236	Peak	3	5210.00	98.23	-----	90.15	34.68	10.72	37.32	0.00	101	236	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5148.96	60.84	74.00	-13.16	52.93	34.60	10.65	37.34	0.00	101	236	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2476.00	87.52	-----	84.45	32.60	7.32	36.85	0.00	101	236	Peak																																																																																																
2	3616.00	109.54	-----	104.37	32.86	8.89	36.58	0.00	101	236	Peak																																																																																																
3	5210.00	98.23	-----	90.15	34.68	10.72	37.32	0.00	101	236	PEAK																																																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>50.67</td> <td>54.00</td> <td>-3.33</td> <td>42.76</td> <td>34.60</td> <td>10.65</td> <td>37.34</td> <td>0.00</td> <td>101</td> <td>236</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	50.67	54.00	-3.33	42.76	34.60	10.65	37.34	0.00	101	236	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2476.00</td> <td>88.52</td> <td>-----</td> <td>85.45</td> <td>32.60</td> <td>7.32</td> <td>36.85</td> <td>0.00</td> <td>101</td> <td>236</td> <td>Average</td> </tr> <tr> <td>2</td> <td>3616.00</td> <td>106.02</td> <td>-----</td> <td>100.85</td> <td>32.86</td> <td>8.89</td> <td>36.58</td> <td>0.00</td> <td>101</td> <td>236</td> <td>Average</td> </tr> <tr> <td>3</td> <td>5210.00</td> <td>88.73</td> <td>-----</td> <td>80.65</td> <td>34.69</td> <td>10.71</td> <td>37.32</td> <td>0.00</td> <td>101</td> <td>236</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2476.00	88.52	-----	85.45	32.60	7.32	36.85	0.00	101	236	Average	2	3616.00	106.02	-----	100.85	32.86	8.89	36.58	0.00	101	236	Average	3	5210.00	88.73	-----	80.65	34.69	10.71	37.32	0.00	101	236	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5149.76	50.67	54.00	-3.33	42.76	34.60	10.65	37.34	0.00	101	236	AVERAGE																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2476.00	88.52	-----	85.45	32.60	7.32	36.85	0.00	101	236	Average																																																																																																
2	3616.00	106.02	-----	100.85	32.86	8.89	36.58	0.00	101	236	Average																																																																																																
3	5210.00	88.73	-----	80.65	34.69	10.71	37.32	0.00	101	236	AVERAGE																																																																																																



Mode	2																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																		
ANT	6																																																		
Pol.	Horizontal	Fundamental																																																	
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.50</td> <td>49.25</td> <td>74.00</td> <td>-24.75</td> <td>40.90</td> <td>34.80</td> <td>10.84</td> <td>37.29</td> <td>0.00</td> <td>101</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB								cm	deg	1	5350.50	49.25	74.00	-24.75	40.90	34.80	10.84	37.29	0.00	101	236	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																											
							cm	deg																																											
1	5350.50	49.25	74.00	-24.75	40.90	34.80	10.84	37.29	0.00	101	236	PEAK																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5361.12</td> <td>39.34</td> <td>54.00</td> <td>-14.66</td> <td>31.02</td> <td>34.76</td> <td>10.85</td> <td>37.29</td> <td>0.00</td> <td>101</td> <td>236</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB								cm	deg	1	5361.12	39.34	54.00	-14.66	31.02	34.76	10.85	37.29	0.00	101	236	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																											
							cm	deg																																											
1	5361.12	39.34	54.00	-14.66	31.02	34.76	10.85	37.29	0.00	101	236	AVERAGE																																							



Mode	2																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																																										
ANT	6																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.36</td> <td>51.34</td> <td>74.00</td> <td>-22.66</td> <td>43.40</td> <td>34.63</td> <td>10.65</td> <td>37.34</td> <td>0.00</td> <td>376</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5143.36	51.34	74.00	-22.66	43.40	34.63	10.65	37.34	0.00	376	116	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2476.00</td> <td>88.86</td> <td>-----</td> <td>85.79</td> <td>32.60</td> <td>7.32</td> <td>36.85</td> <td>0.00</td> <td>376</td> <td>116</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3616.00</td> <td>108.67</td> <td>-----</td> <td>103.50</td> <td>32.86</td> <td>8.89</td> <td>36.58</td> <td>0.00</td> <td>376</td> <td>116</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5210.00</td> <td>89.32</td> <td>-----</td> <td>81.24</td> <td>34.68</td> <td>10.72</td> <td>37.32</td> <td>0.00</td> <td>376</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2476.00	88.86	-----	85.79	32.60	7.32	36.85	0.00	376	116	Peak	2	3616.00	108.67	-----	103.50	32.86	8.89	36.58	0.00	376	116	Peak	3	5210.00	89.32	-----	81.24	34.68	10.72	37.32	0.00	376	116	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5143.36	51.34	74.00	-22.66	43.40	34.63	10.65	37.34	0.00	376	116	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2476.00	88.86	-----	85.79	32.60	7.32	36.85	0.00	376	116	Peak																																																																																																
2	3616.00	108.67	-----	103.50	32.86	8.89	36.58	0.00	376	116	Peak																																																																																																
3	5210.00	89.32	-----	81.24	34.68	10.72	37.32	0.00	376	116	PEAK																																																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>42.48</td> <td>54.00</td> <td>-11.52</td> <td>34.57</td> <td>34.60</td> <td>10.65</td> <td>37.34</td> <td>0.00</td> <td>376</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	42.48	54.00	-11.52	34.57	34.60	10.65	37.34	0.00	376	116	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2476.00</td> <td>86.75</td> <td>-----</td> <td>83.68</td> <td>32.60</td> <td>7.32</td> <td>36.85</td> <td>0.00</td> <td>376</td> <td>116</td> <td>Average</td> </tr> <tr> <td>2</td> <td>3616.00</td> <td>94.11</td> <td>-----</td> <td>88.94</td> <td>32.86</td> <td>8.89</td> <td>36.58</td> <td>0.00</td> <td>376</td> <td>116</td> <td>Average</td> </tr> <tr> <td>3</td> <td>5210.00</td> <td>80.75</td> <td>-----</td> <td>77.68</td> <td>32.60</td> <td>7.32</td> <td>36.85</td> <td>0.00</td> <td>376</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2476.00	86.75	-----	83.68	32.60	7.32	36.85	0.00	376	116	Average	2	3616.00	94.11	-----	88.94	32.86	8.89	36.58	0.00	376	116	Average	3	5210.00	80.75	-----	77.68	32.60	7.32	36.85	0.00	376	116	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5149.76	42.48	54.00	-11.52	34.57	34.60	10.65	37.34	0.00	376	116	AVERAGE																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2476.00	86.75	-----	83.68	32.60	7.32	36.85	0.00	376	116	Average																																																																																																
2	3616.00	94.11	-----	88.94	32.86	8.89	36.58	0.00	376	116	Average																																																																																																
3	5210.00	80.75	-----	77.68	32.60	7.32	36.85	0.00	376	116	AVERAGE																																																																																																



	2																																									
Mode	Band Edge - R																																									
ANT	6																																									
Pol.	Vertical	Fundamental																																								
Peak	<table border="1" data-bbox="268 1115 775 1238"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5369.40</td> <td>48.08</td> <td>74.00</td> <td>-25.92</td> <td>39.79</td> <td>34.72</td> <td>10.86</td> <td>37.29</td> <td>0.00</td> <td>376</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5369.40	48.08	74.00	-25.92	39.79	34.72	10.86	37.29	0.00	376	116	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	5369.40	48.08	74.00	-25.92	39.79	34.72	10.86	37.29	0.00	376	116	PEAK																														
Avg	<table border="1" data-bbox="268 1798 775 1921"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.72</td> <td>38.67</td> <td>54.00</td> <td>-15.33</td> <td>30.33</td> <td>34.78</td> <td>10.85</td> <td>37.29</td> <td>0.00</td> <td>376</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5355.72	38.67	54.00	-15.33	30.33	34.78	10.85	37.29	0.00	376	116	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	5355.72	38.67	54.00	-15.33	30.33	34.78	10.85	37.29	0.00	376	116	AVERAGE																														



Mode	2																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>44.20</td> <td>68.20</td> <td>-24.00</td> <td>57.82</td> <td>37.60</td> <td>15.33</td> <td>66.55</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10420.00	44.20	68.20	-24.00	57.82	37.60	15.33	66.55	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>44.50</td> <td>68.20</td> <td>-23.70</td> <td>58.09</td> <td>37.62</td> <td>15.34</td> <td>66.55</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10420.00	44.50	68.20	-23.70	58.09	37.62	15.34	66.55	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10420.00	44.20	68.20	-24.00	57.82	37.60	15.33	66.55	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10420.00	44.50	68.20	-23.70	58.09	37.62	15.34	66.55	0.00	--	PEAK																																																																						



Mode	2																																																																																			
	Band Edge																																																																																			
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																			
ANT	6																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.44</td> <td>50.27</td> <td>74.00</td> <td>-23.73</td> <td>41.18</td> <td>32.60</td> <td>7.34</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.44	50.27	74.00	-23.73	41.18	32.60	7.34	36.85	6.00	163	301	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>100.04</td> <td>-----</td> <td>-----</td> <td>90.97</td> <td>32.60</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	100.04	-----	-----	90.97	32.60	7.32	36.85	6.00	163	301	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2489.44	50.27	74.00	-23.73	41.18	32.60	7.34	36.85	6.00	163	301	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2478.00	100.04	-----	-----	90.97	32.60	7.32	36.85	6.00	163	301	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2492.00</td> <td>40.02</td> <td>54.00</td> <td>-13.98</td> <td>30.92</td> <td>32.60</td> <td>7.35</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.00	40.02	54.00	-13.98	30.92	32.60	7.35	36.85	6.00	163	301	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>97.84</td> <td>-----</td> <td>-----</td> <td>88.77</td> <td>32.60</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	97.84	-----	-----	88.77	32.60	7.32	36.85	6.00	163	301	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2492.00	40.02	54.00	-13.98	30.92	32.60	7.35	36.85	6.00	163	301	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2478.00	97.84	-----	-----	88.77	32.60	7.32	36.85	6.00	163	301	AVERAGE																																																																								



Mode	2																																																																																			
	Band Edge																																																																																			
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																			
ANT	6																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.96</td> <td>50.36</td> <td>74.00</td> <td>-23.64</td> <td>41.26</td> <td>32.60</td> <td>7.35</td> <td>36.85</td> <td>6.00</td> <td>303</td> <td>56</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.96	50.36	74.00	-23.64	41.26	32.60	7.35	36.85	6.00	303	56	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>97.33</td> <td>-----</td> <td>-----</td> <td>88.26</td> <td>32.60</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>303</td> <td>56</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	97.33	-----	-----	88.26	32.60	7.32	36.85	6.00	303	56	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2494.96	50.36	74.00	-23.64	41.26	32.60	7.35	36.85	6.00	303	56	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2478.00	97.33	-----	-----	88.26	32.60	7.32	36.85	6.00	303	56	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.24</td> <td>40.48</td> <td>54.00</td> <td>-13.52</td> <td>31.40</td> <td>32.60</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>303</td> <td>56</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.24	40.48	54.00	-13.52	31.40	32.60	7.33	36.85	6.00	303	56	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>95.32</td> <td>-----</td> <td>-----</td> <td>86.25</td> <td>32.60</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>303</td> <td>56</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	95.32	-----	-----	86.25	32.60	7.32	36.85	6.00	303	56	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2485.24	40.48	54.00	-13.52	31.40	32.60	7.33	36.85	6.00	303	56	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2478.00	95.32	-----	-----	86.25	32.60	7.32	36.85	6.00	303	56	AVERAGE																																																																								




Mode	2																																																																																																																										
	Harmonic																																																																																																																										
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																																																										
ANT	6																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>51.92</td> <td>74.00</td> <td>-22.08</td> <td>72.55</td> <td>34.56</td> <td>10.44</td> <td>65.63</td> <td>0.00</td> <td>100</td> <td>234</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4956.00</td> <td>46.87</td> <td>54.00</td> <td>-7.13</td> <td>67.50</td> <td>34.56</td> <td>10.44</td> <td>65.63</td> <td>0.00</td> <td>100</td> <td></td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>5222.00</td> <td>54.27</td> <td>74.00</td> <td>-19.73</td> <td>74.58</td> <td>34.66</td> <td>10.73</td> <td>65.70</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	51.92	74.00	-22.08	72.55	34.56	10.44	65.63	0.00	100	234	PEAK	2	4956.00	46.87	54.00	-7.13	67.50	34.56	10.44	65.63	0.00	100		AVERAGE	3	5222.00	54.27	74.00	-19.73	74.58	34.66	10.73	65.70	0.00	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>46.02</td> <td>74.00</td> <td>-27.98</td> <td>66.65</td> <td>34.56</td> <td>10.44</td> <td>65.63</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5224.00</td> <td>48.44</td> <td>74.00</td> <td>-25.56</td> <td>68.76</td> <td>34.65</td> <td>10.73</td> <td>65.70</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	46.02	74.00	-27.98	66.65	34.56	10.44	65.63	0.00	--	--	PEAK	2	5224.00	48.44	74.00	-25.56	68.76	34.65	10.73	65.70	0.00	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4956.00	51.92	74.00	-22.08	72.55	34.56	10.44	65.63	0.00	100	234	PEAK																																																																																																															
2	4956.00	46.87	54.00	-7.13	67.50	34.56	10.44	65.63	0.00	100		AVERAGE																																																																																																															
3	5222.00	54.27	74.00	-19.73	74.58	34.66	10.73	65.70	0.00	--	--	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4956.00	46.02	74.00	-27.98	66.65	34.56	10.44	65.63	0.00	--	--	PEAK																																																																																																															
2	5224.00	48.44	74.00	-25.56	68.76	34.65	10.73	65.70	0.00	--	--	Peak																																																																																																															

Note: For all plots above, the over limit line signals are Fundamental signal which can be ignored.



LTE Band 48 / 20MHz / QPSK / Ant.5								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7231	-58.82	-40	-18.82	-70.28	2.84	14.30	H
	10850	-56.40	-40	-16.40	-66.34	3.49	13.43	H
	14469	-61.02	-40	-21.02	-71.26	3.85	14.09	H
	7231	-60.93	-40	-20.93	-72.39	2.84	14.30	V
	10850	-49.88	-40	-9.88	-59.82	3.49	13.43	V
	14469	-57.38	-40	-17.38	-67.62	3.85	14.09	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

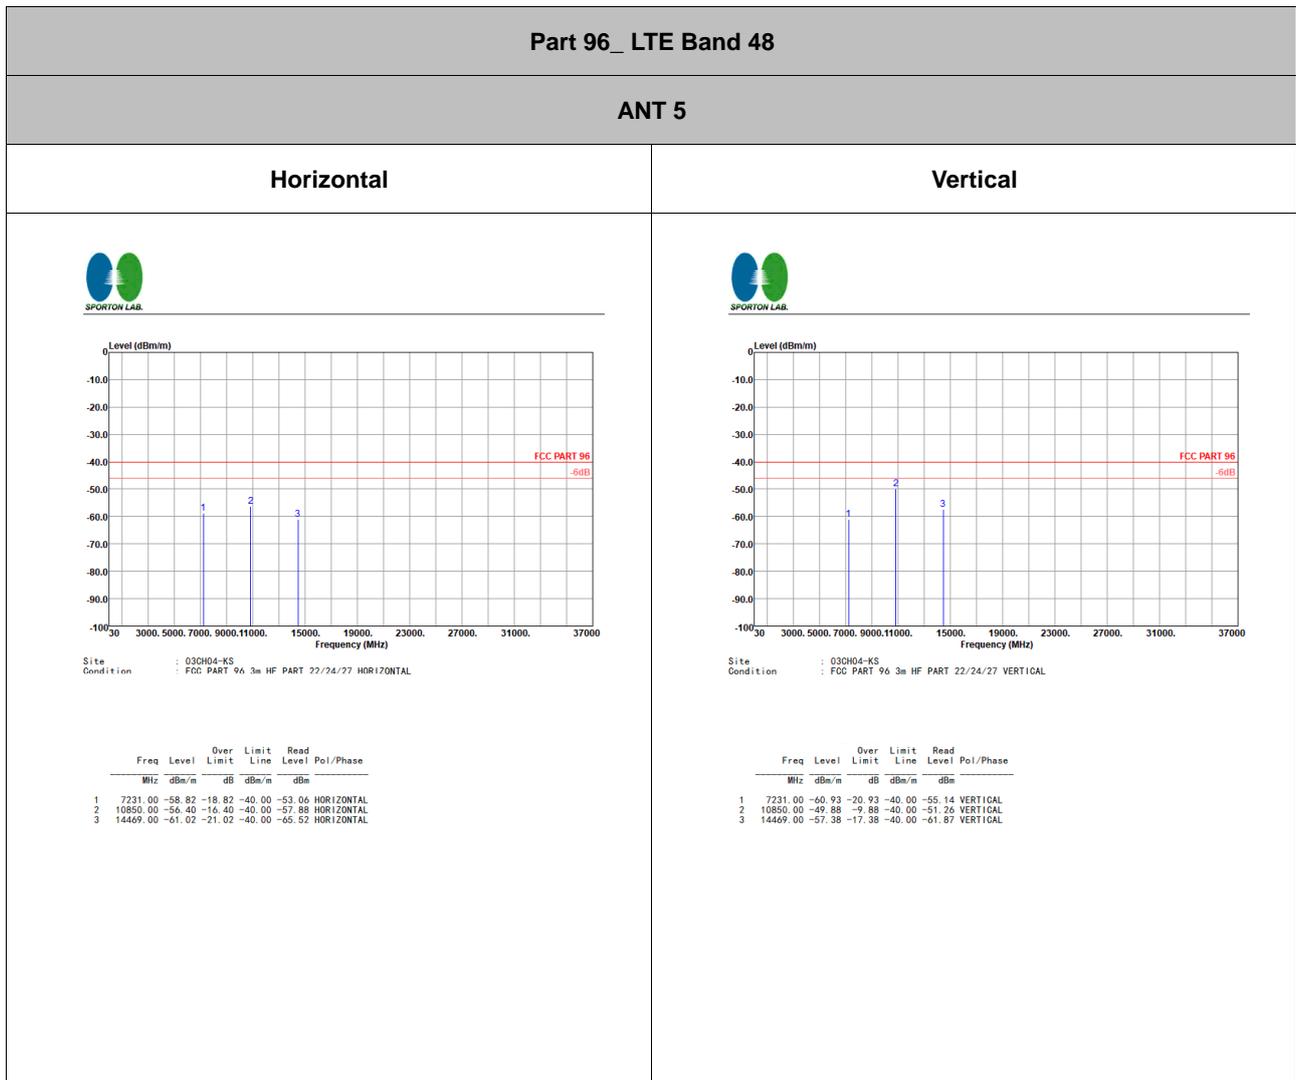



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 24090RA29G
FCC ID : 2AFZZRA29G
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 18, 2024 ~ Jul. 28, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 5

 1.6 Testing Location 6

 1.7 Test Software..... 6

 1.8 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 TEST RESULT 11

 3.1 6dB and 99% Bandwidth Measurement 11

 3.2 Output Power Measurement..... 12

 3.3 Power Spectral Density Measurement 13

 3.4 Conducted Band Edges and Spurious Emission Measurement 14

 3.5 Radiated Band Edges and Spurious Emission Measurement 15

 3.6 AC Conducted Emission Measurement..... 19

 3.7 Antenna Requirements 21

4 LIST OF MEASURING EQUIPMENT 22

5 MEASUREMENT UNCERTAINTY 23

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR471506B	Rev. 01	Initial issue of report	Aug. 19, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 13.80 dB at 2495.32 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.07 dB at 15.146 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:
<ol style="list-style-type: none"> The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	24090RA29G
FCC ID	2AFZZRA29G
IMEI Code	Conducted: 861793070040843/861793070040850 Conduction: 861793070038664/861793070038672 Radiation: 861793070038607
HW Version	135300O16
SW Version	Xiaomi HyperOS 1.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 7.33 dBm (0.0054 W) BLE 2Mbps: 7.37 dBm (0.0055 W)
99% Occupied Bandwidth	BLE 1Mbps: 1.035 MHz BLE 2Mbps: 2.054 MHz
Antenna Type / Gain	PIFA Antenna type with gain -1.6 dBi
Type of Modulation	Bluetooth LE : GFSK

Note: BLE 2M does not support CH00/CH12/CH39.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH03-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps
AC Conducted Emission	Mode 1: GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 3 + Adapter 3
Remark: For Radiated Test Cases, The tests were performance with Adapter and USB Cable.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

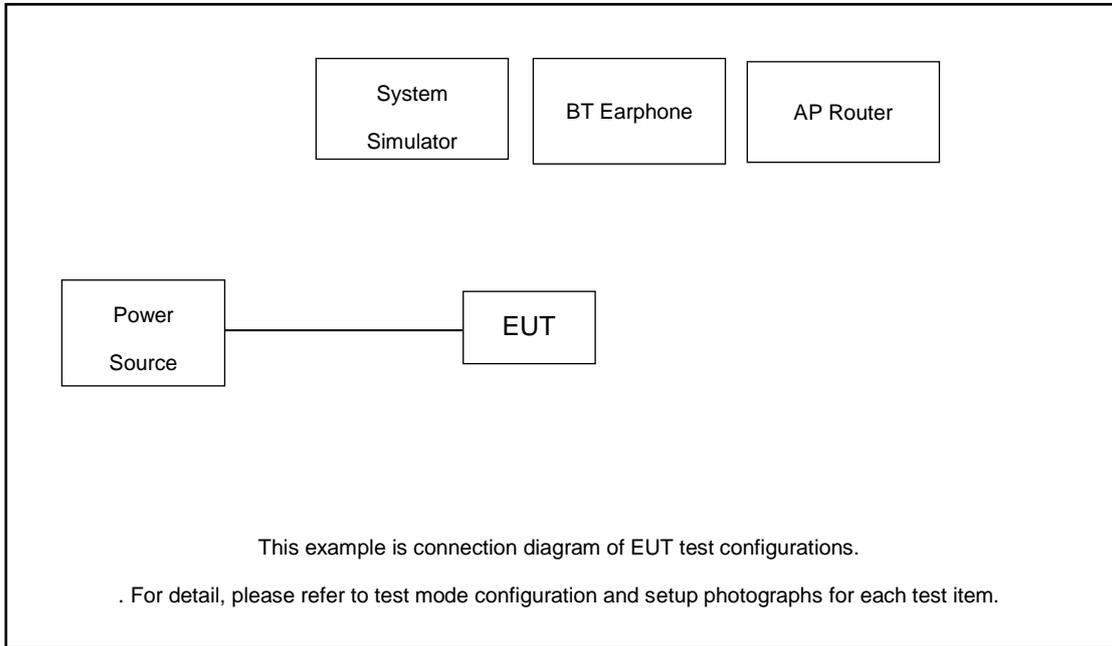

Radiated Emission:

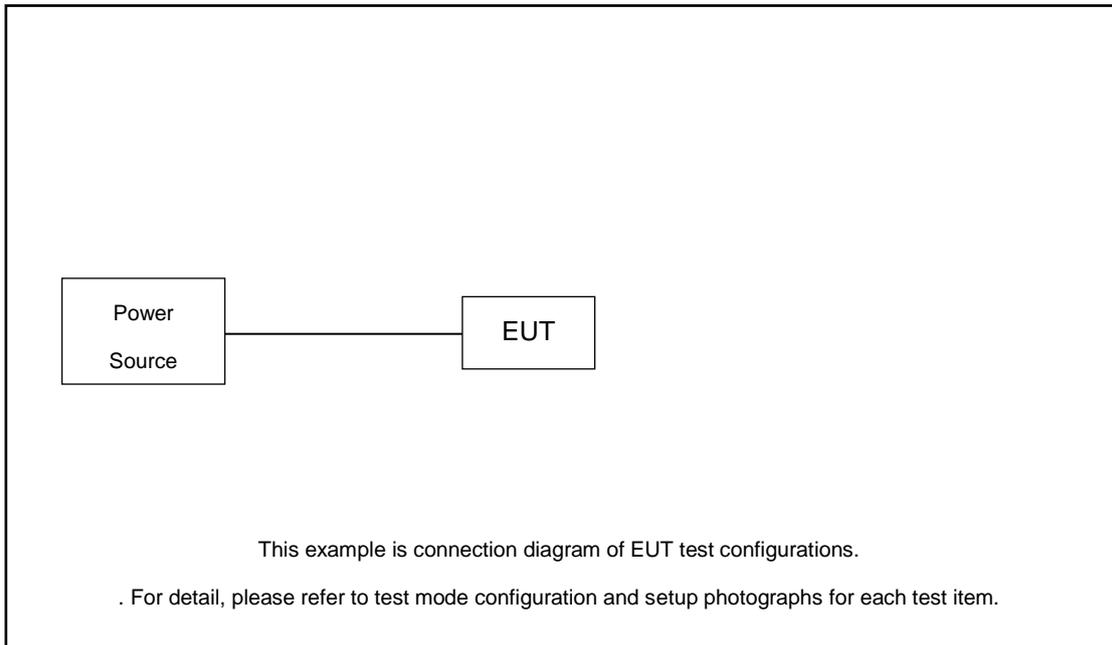



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
2.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$Offset = RF\ cable\ loss + attenuator\ factor.$$

Following shows an offset computation example with cable loss 12.26 dB and 10dB attenuator.

$$\begin{aligned}
Offset(dB) &= RF\ cable\ loss(dB) + attenuator\ factor(dB). \\
&= 12.26 + 10 = 22.26\ (dB)
\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

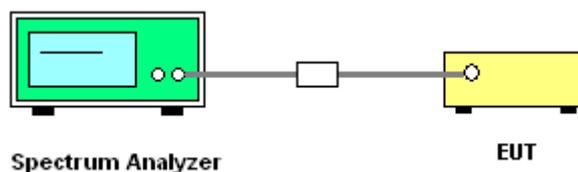

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

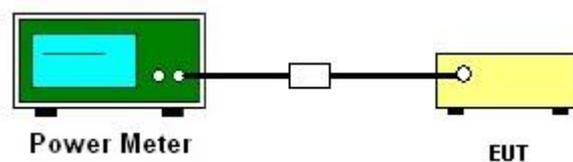

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

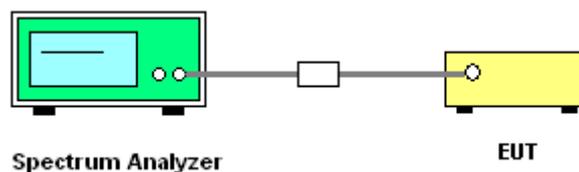

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

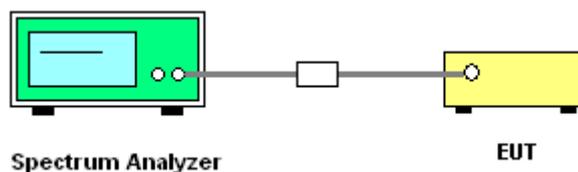

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

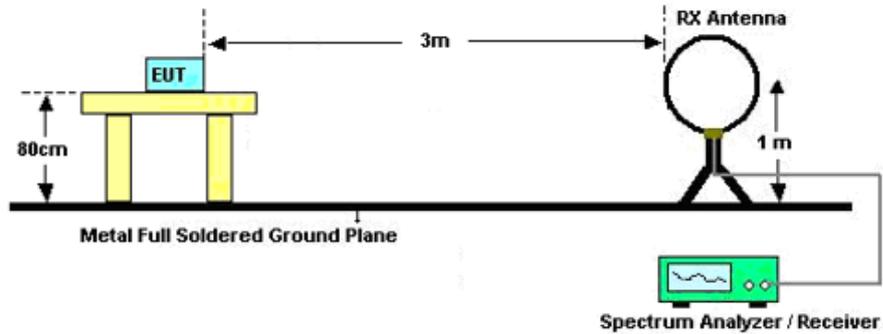

For radiated emissions from 30MHz to 1GHz

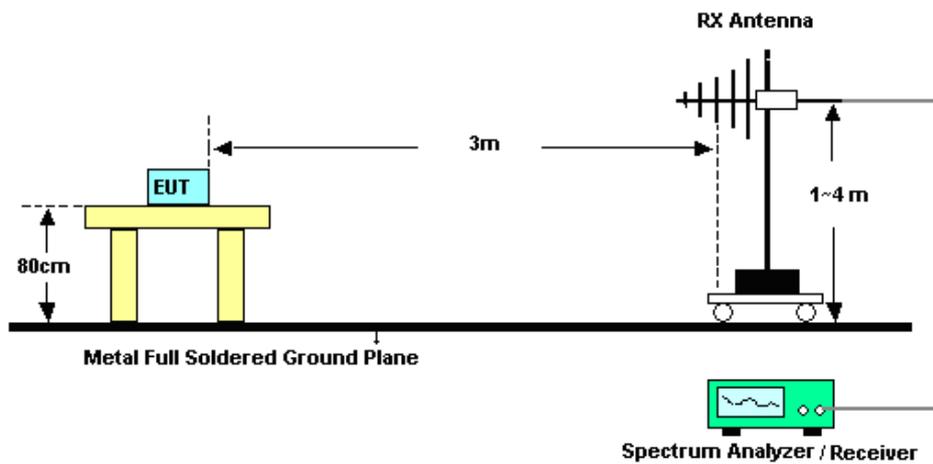

For radiated emissions above 1GHz

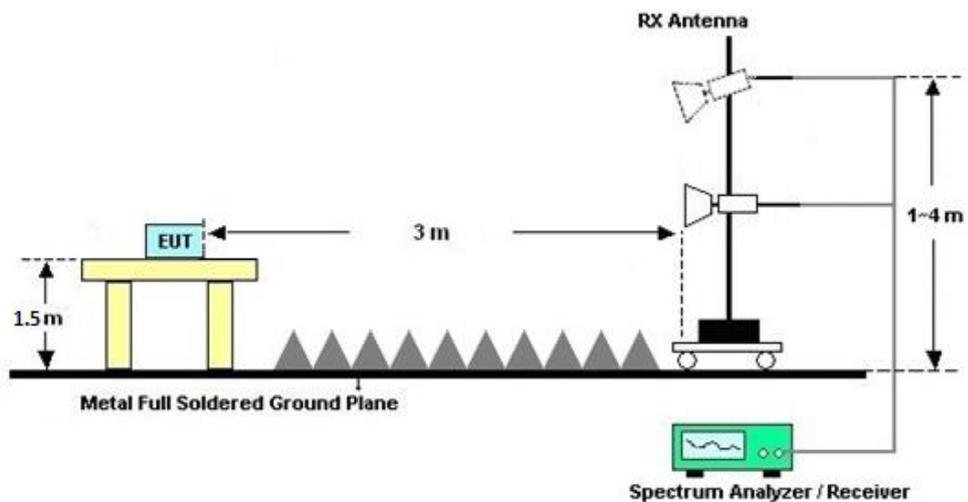



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

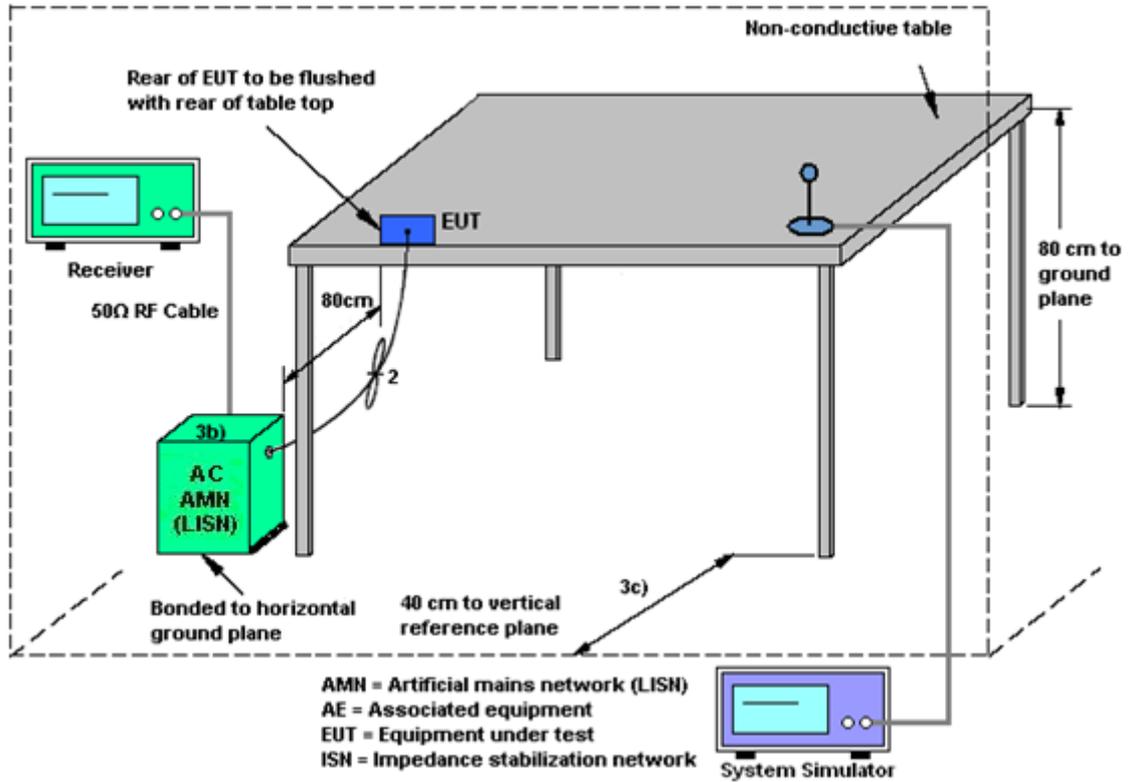

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;M ax 30dBm	Oct. 11, 2023	Jul. 18, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY553705 28	10Hz-44GHz	Oct. 11, 2023	Jul. 18, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Jul. 18, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-1GHz	Dec. 06, 2023	Jul. 18, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Jul. 18, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Jul. 18, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Jul. 18, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 03, 2024	Jul. 18, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Jul. 18, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY532703 19	1GHz~26.5GHz	Oct. 11, 2023	Jul. 18, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jul. 18, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 18, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 18, 2024	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr 18, 2024	Jul. 28, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jul. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr 18, 2024	Jul. 28, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jul. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 19, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Jul. 19, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Jul. 19, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.04ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: <u>25</u> °C, <u>45</u> %RH	
Test Date: <u>2024/7/19</u>	Test Engineer: <u>albert shi</u>


DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant6	2402	0.70	2401.65	2402.35	0.5	PASS
		2440	0.69	2439.65	2440.34	0.5	PASS
		2480	0.69	2479.66	2480.34	0.5	PASS
BLE_2M	Ant6	2404	1.18	2403.42	2404.59	0.5	PASS
		2440	1.18	2439.41	2440.59	0.5	PASS
		2478	1.18	2477.42	2478.59	0.5	PASS




Test Graphs

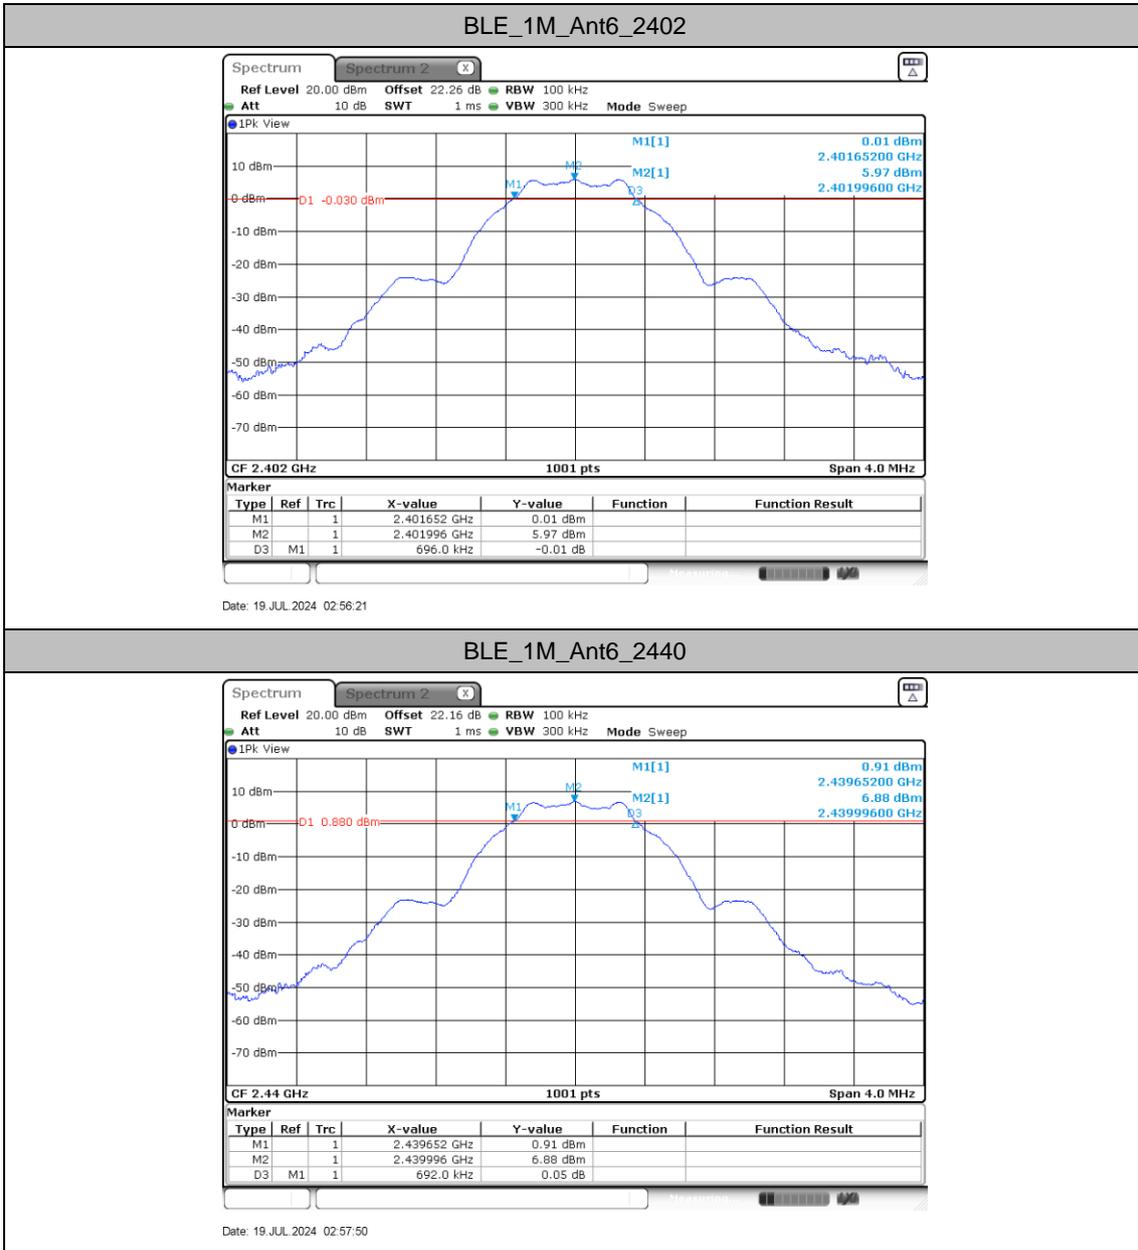




BLE_1M_Ant6_2480

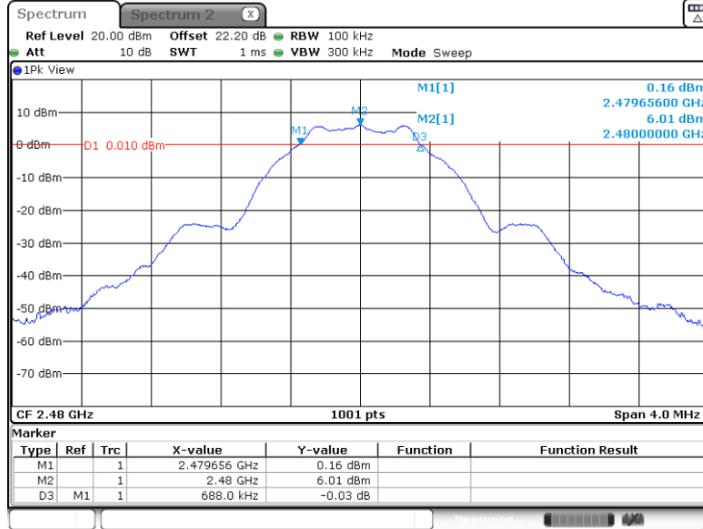

Date: 19 JUL 2024 02:59:01


BLE_2M_Ant6_2404

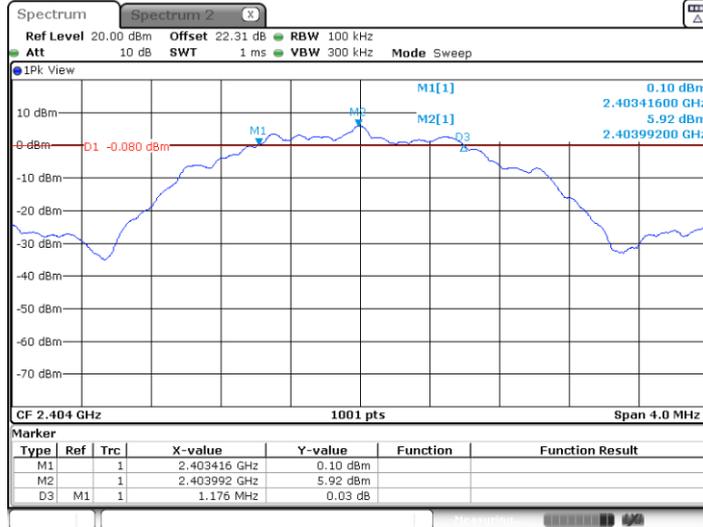

Date: 19 JUL 2024 03:00:34




BLE_2M_Ant6_2440

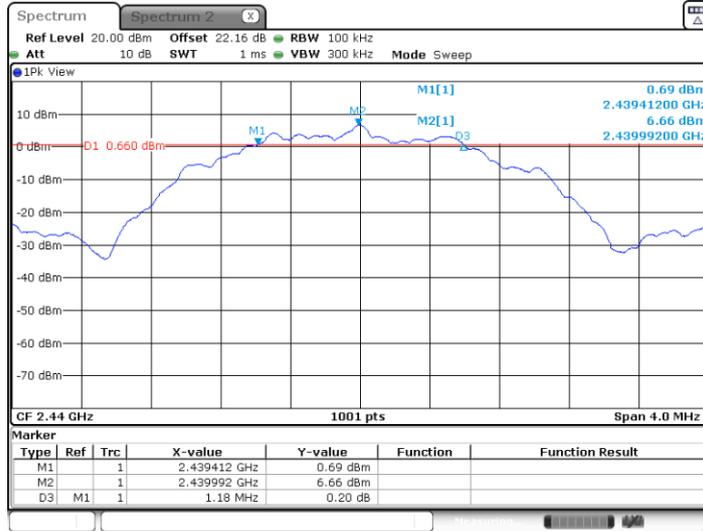

Date: 19 JUL 2024 03:01:51

BLE_2M_Ant6_2478

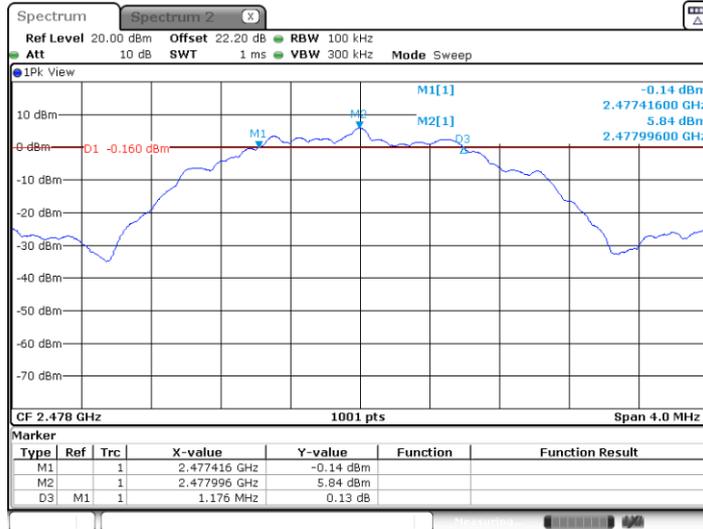

Date: 19 JUL 2024 03:02:58




Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
BLE_1M	Ant6	2402	1.035	2401.4925	2402.5275
		2440	1.035	2439.4925	2440.5275
		2480	1.035	2479.4925	2480.5275
BLE_2M	Ant6	2404	2.054	2402.9930	2405.0470
		2440	2.054	2438.9930	2441.0470
		2478	2.05	2476.9970	2479.0470




Test Graphs

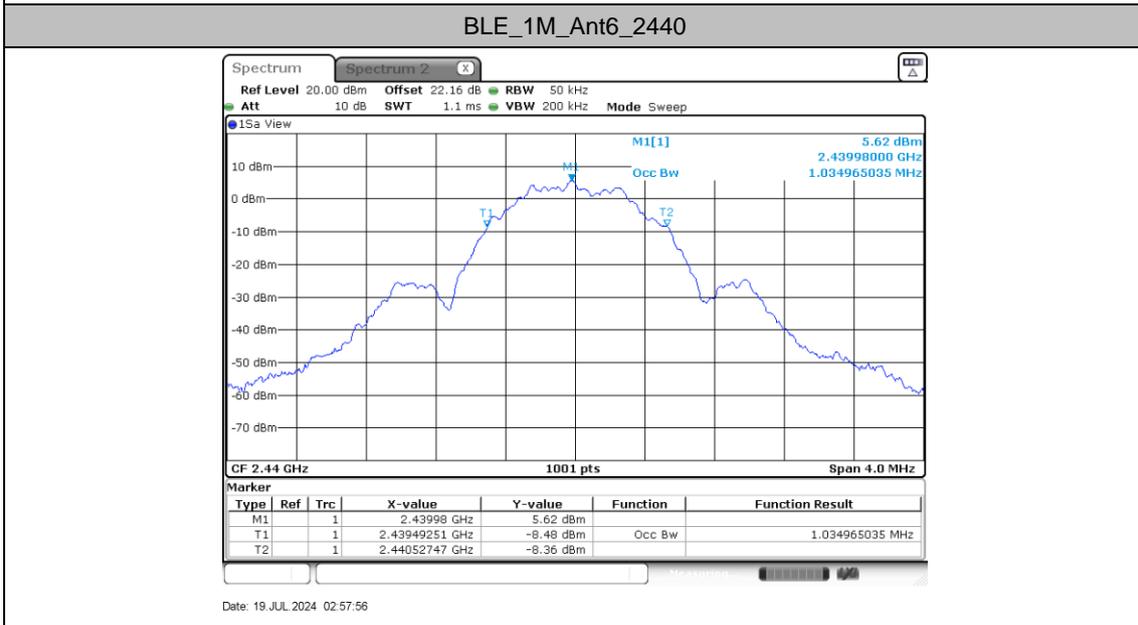




BLE_1M_Ant6_2480

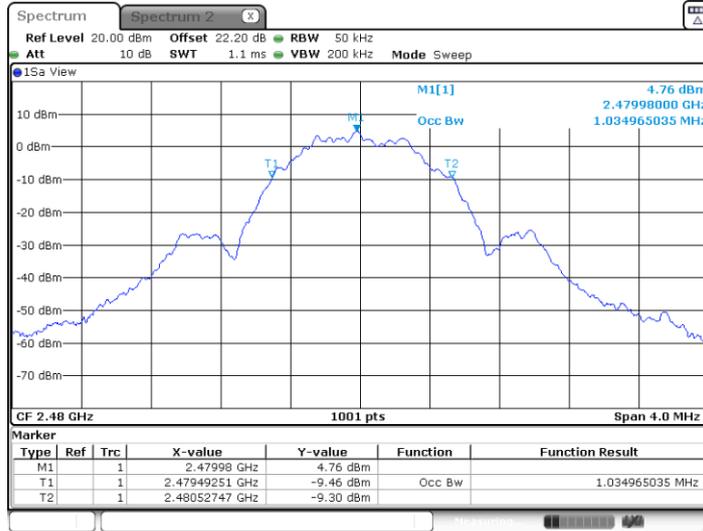

Date: 19 JUL 2024 02:59:07


BLE_2M_Ant6_2404

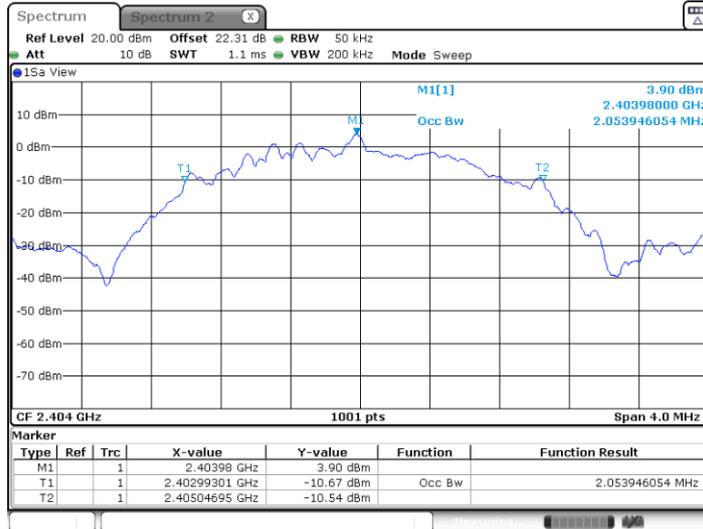

Date: 19 JUL 2024 03:00:40




BLE_2M_Ant6_2440

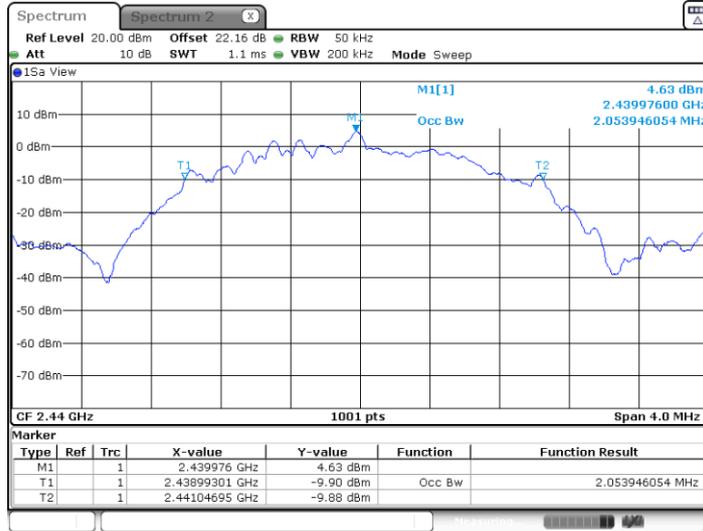

Date: 19 JUL 2024 03:01:56

BLE_2M_Ant6_2478

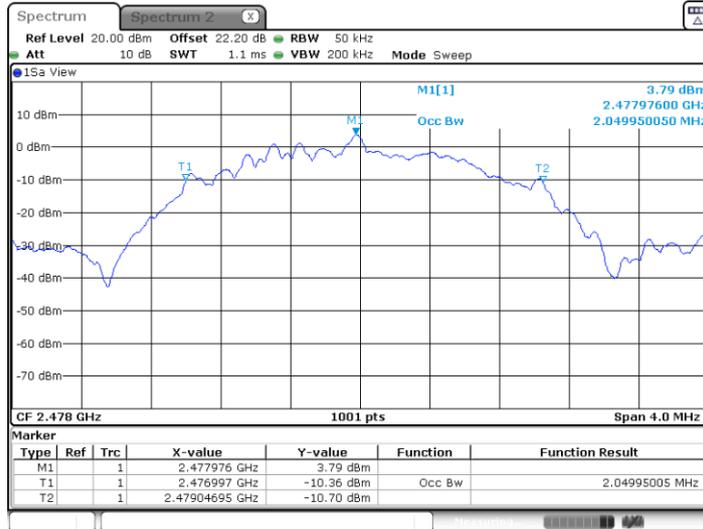

Date: 19 JUL 2024 03:03:03



Maximum conducted output power

Test Result Peak

TestMode	Antenna	CH.	Peak Conducted Power (dBm)	Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit	Pass/Fail
BLE1M	Ant6	0	6.49	30.00	-1.6	4.89	36.00	Pass
		19	7.33	30.00	-1.6	5.73	36.00	Pass
		39	6.31	30.00	-1.6	4.71	36.00	Pass
BLE2M	Ant6	01	6.55	30.00	-1.6	4.95	36.00	Pass
		19	7.37	30.00	-1.6	5.77	36.00	Pass
		38	6.49	30.00	-1.6	4.89	36.00	Pass

Test Result Average (Reference only)

TestMode	Antenna	CH.	Duty Factor (dB)	Average Conducted Power (dBm)
BLE1M	Ant6	0	2.17	6.25
		19	2.17	6.91
		39	2.17	6.06
BLE2M	Ant6	01	5.02	6.09
		19	5.02	7.06
		38	5.02	6.04





Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant6	2402	-8.4	≤8.00	PASS
		2440	-7.51	≤8.00	PASS
		2480	-8.36	≤8.00	PASS
BLE_2M	Ant6	2404	-10.39	≤8.00	PASS
		2440	-9.66	≤8.00	PASS
		2478	-10.51	≤8.00	PASS




Test Graphs

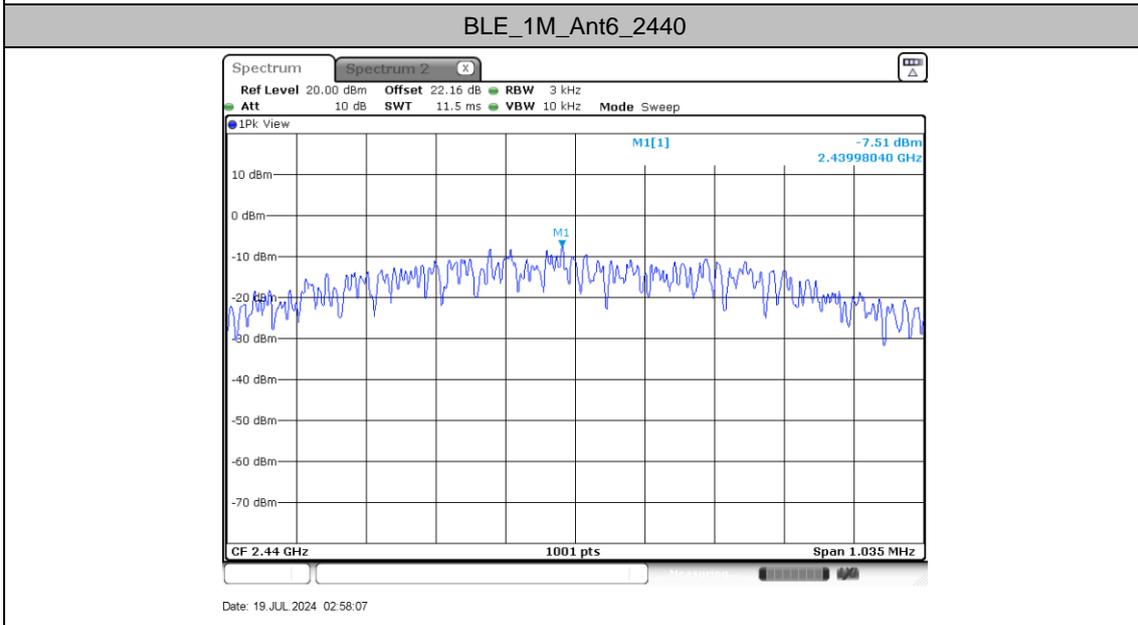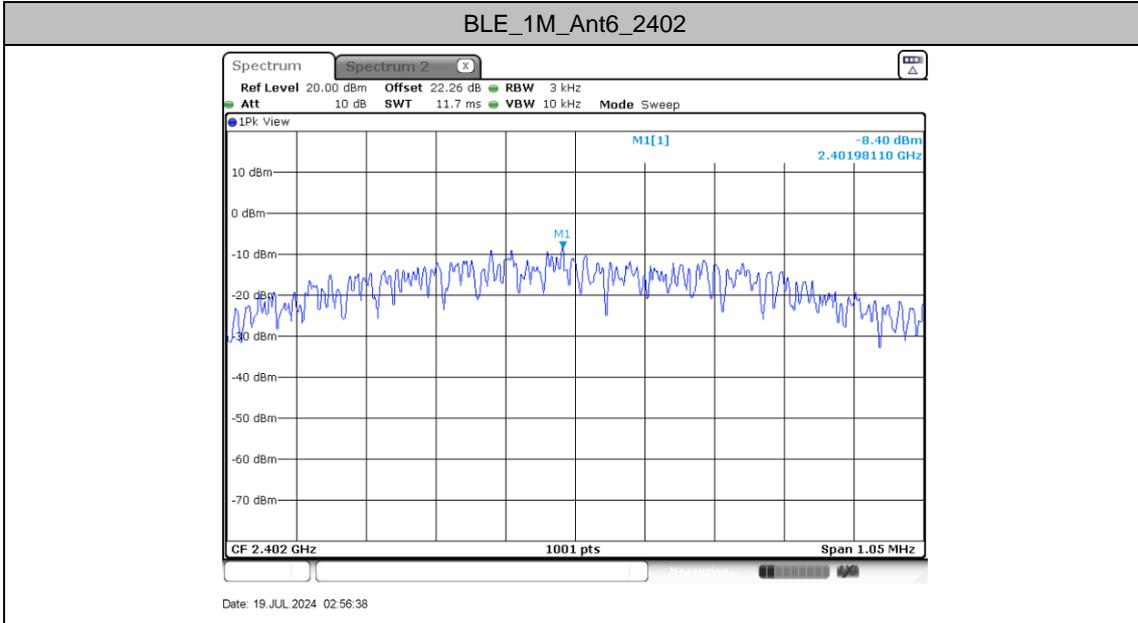




BLE_1M_Ant6_2480

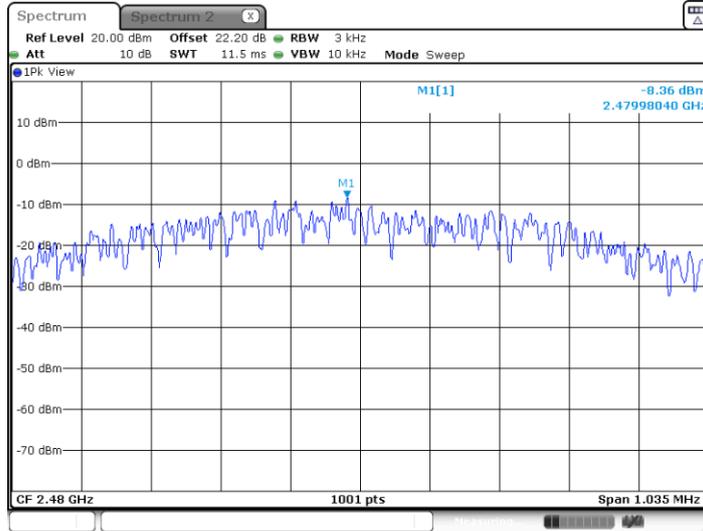

Date: 19 JUL 2024 02:59:18


BLE_2M_Ant6_2404

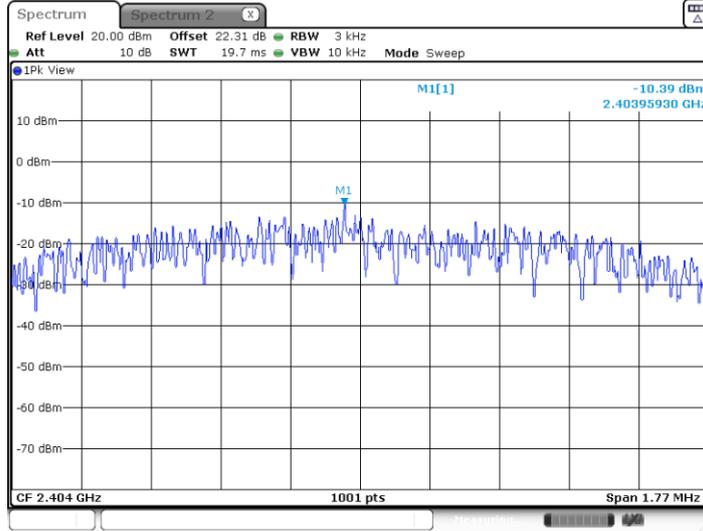

Date: 19 JUL 2024 03:00:50




BLE_2M_Ant6_2440

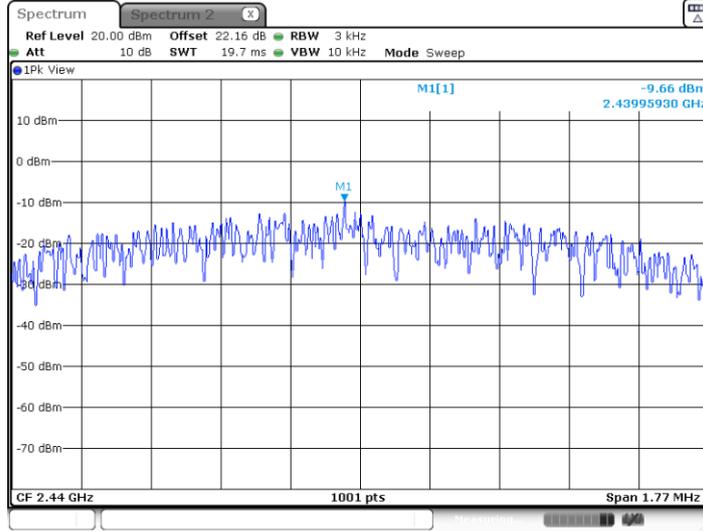

Date: 19 JUL 2024 03:02:07

BLE_2M_Ant6_2478

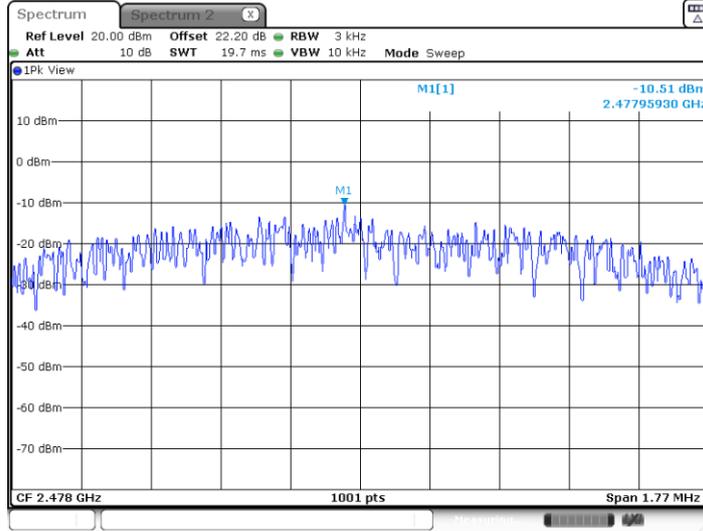

Date: 19 JUL 2024 03:03:15



Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	Ant6	2402	2402.00	5.96
		2440	2440.00	6.85
		2480	2480.00	5.98
BLE_2M	Ant6	2404	2403.99	5.91
		2440	2439.99	6.64
		2478	2477.99	5.81




Test Graphs






BLE_1M_Ant6_2480


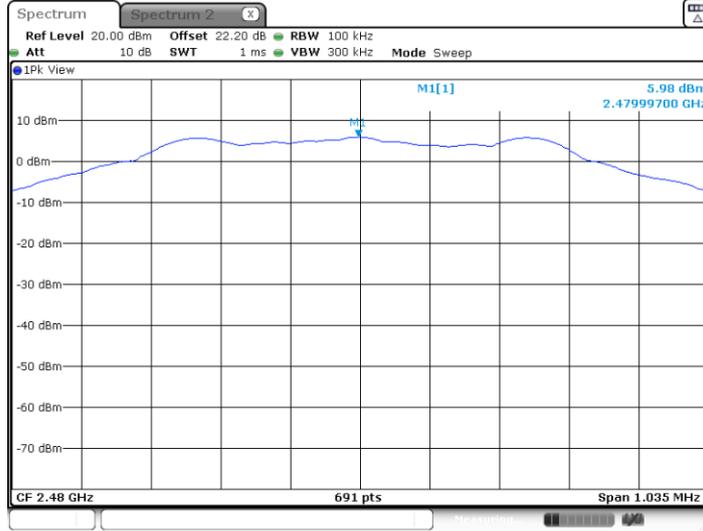


Date: 19 JUL 2024 02:59:25

BLE_2M_Ant6_2404

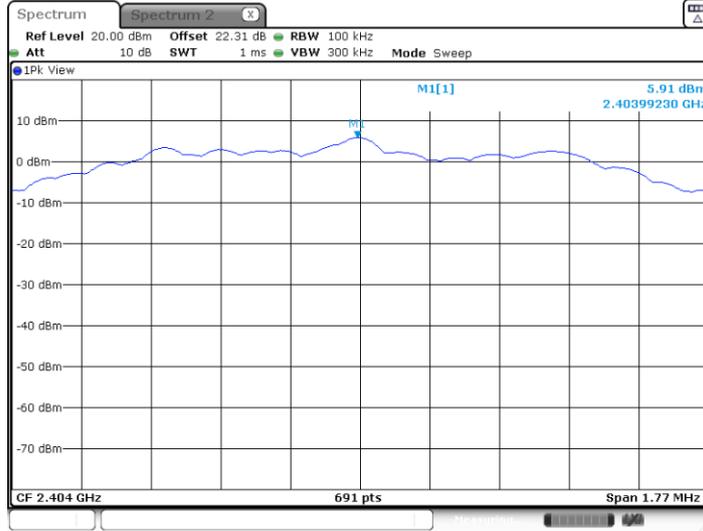

Date: 19 JUL 2024 03:00:58

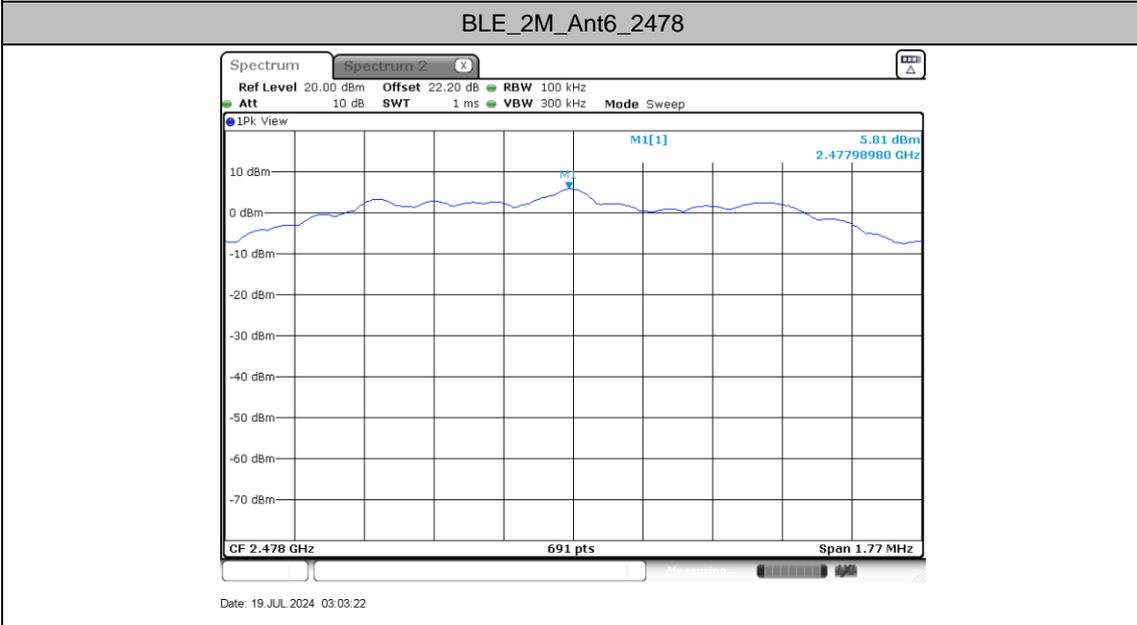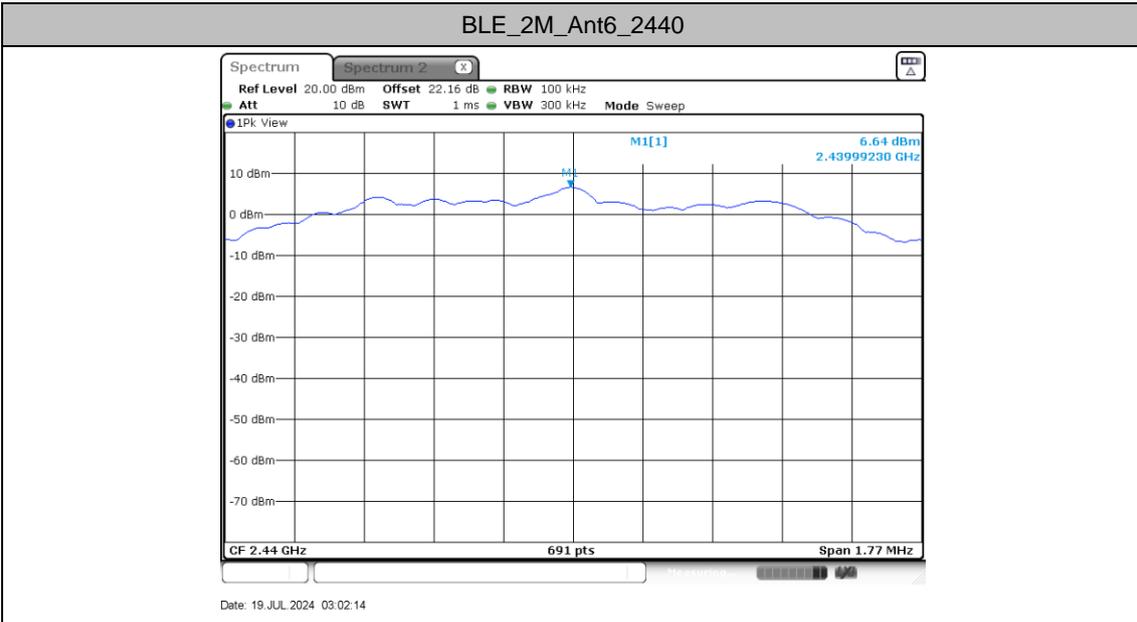





Band edge measurements



Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant6	Low	2402	5.96	-51.86	≤-14.04	PASS
		High	2480	5.98	-55.31	≤-14.02	PASS
BLE_2M	Ant6	Low	2404	5.91	-52.4	≤-14.09	PASS
		High	2478	5.81	-55.76	≤-14.19	PASS



Test Graphs

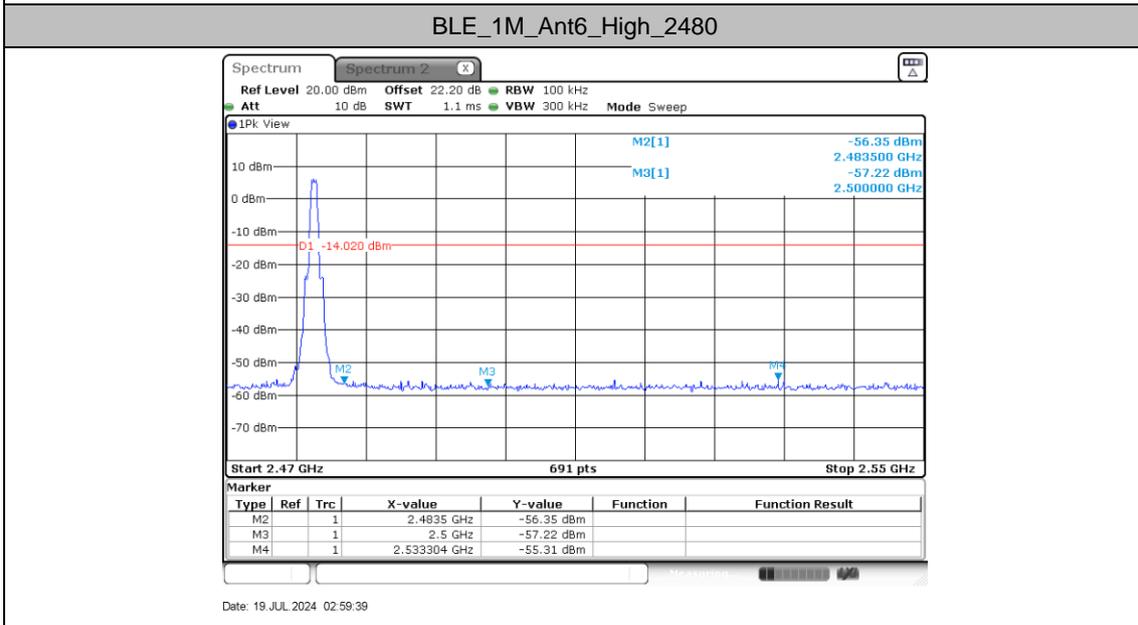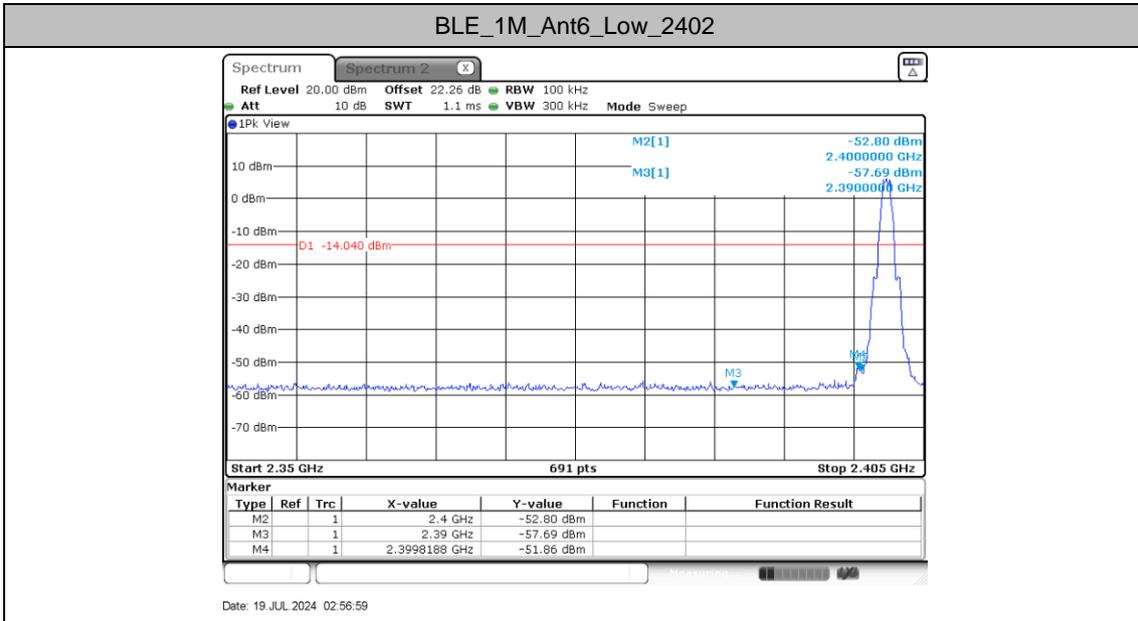

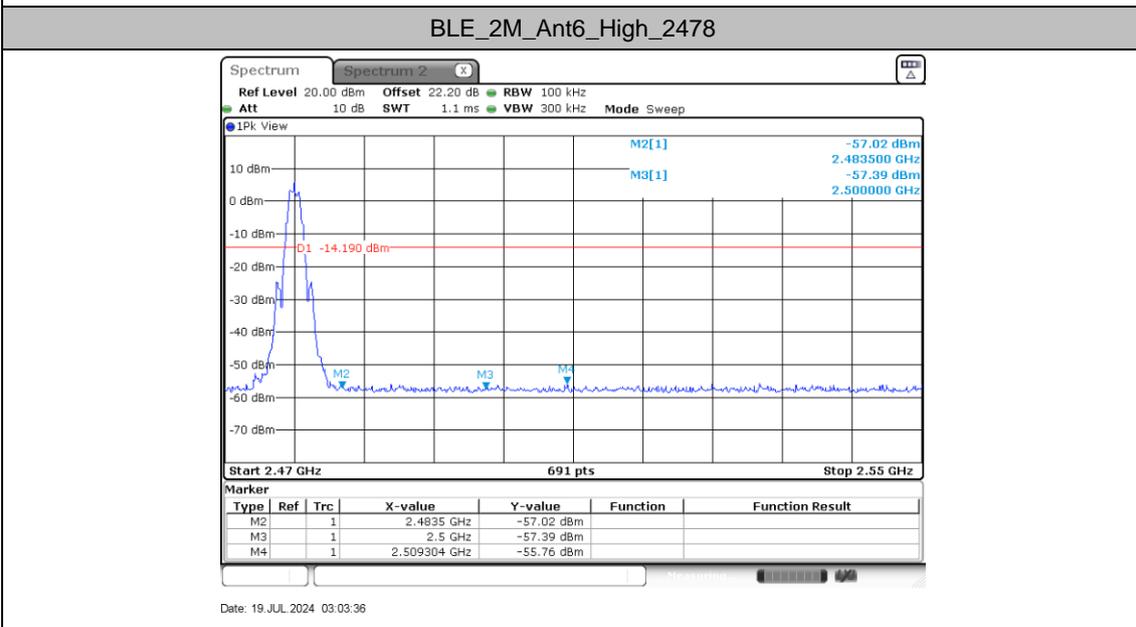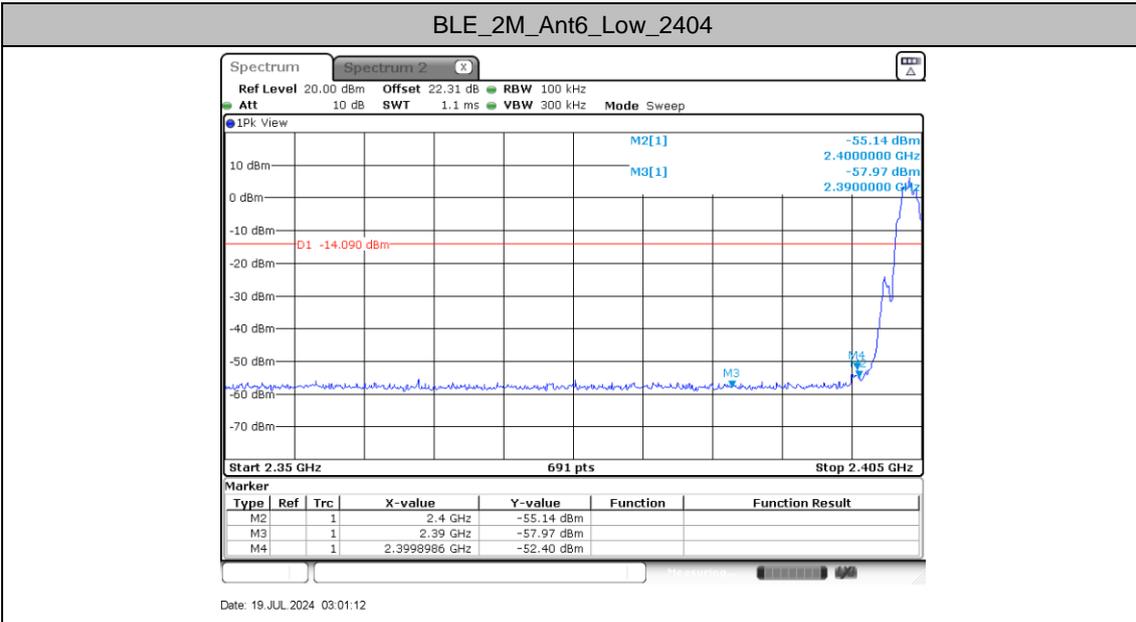




Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant6	2402	30~1000	5.96	-55.88	≤-14.04	PASS
			1000~26500	5.96	-50.91	≤-14.04	PASS
		2440	30~1000	6.85	-55.2	≤-13.15	PASS
			1000~26500	6.85	-49.34	≤-13.15	PASS
		2480	30~1000	5.98	-55.91	≤-14.02	PASS
			1000~26500	5.98	-49.05	≤-14.02	PASS
BLE_2M	Ant6	2404	30~1000	5.91	-55.88	≤-14.09	PASS
			1000~26500	5.91	-49.51	≤-14.09	PASS
		2440	30~1000	6.64	-56.23	≤-13.36	PASS
			1000~26500	6.64	-50.55	≤-13.36	PASS
		2478	30~1000	5.81	-55.78	≤-14.19	PASS
			1000~26500	5.81	-50.79	≤-14.19	PASS




Test Graphs

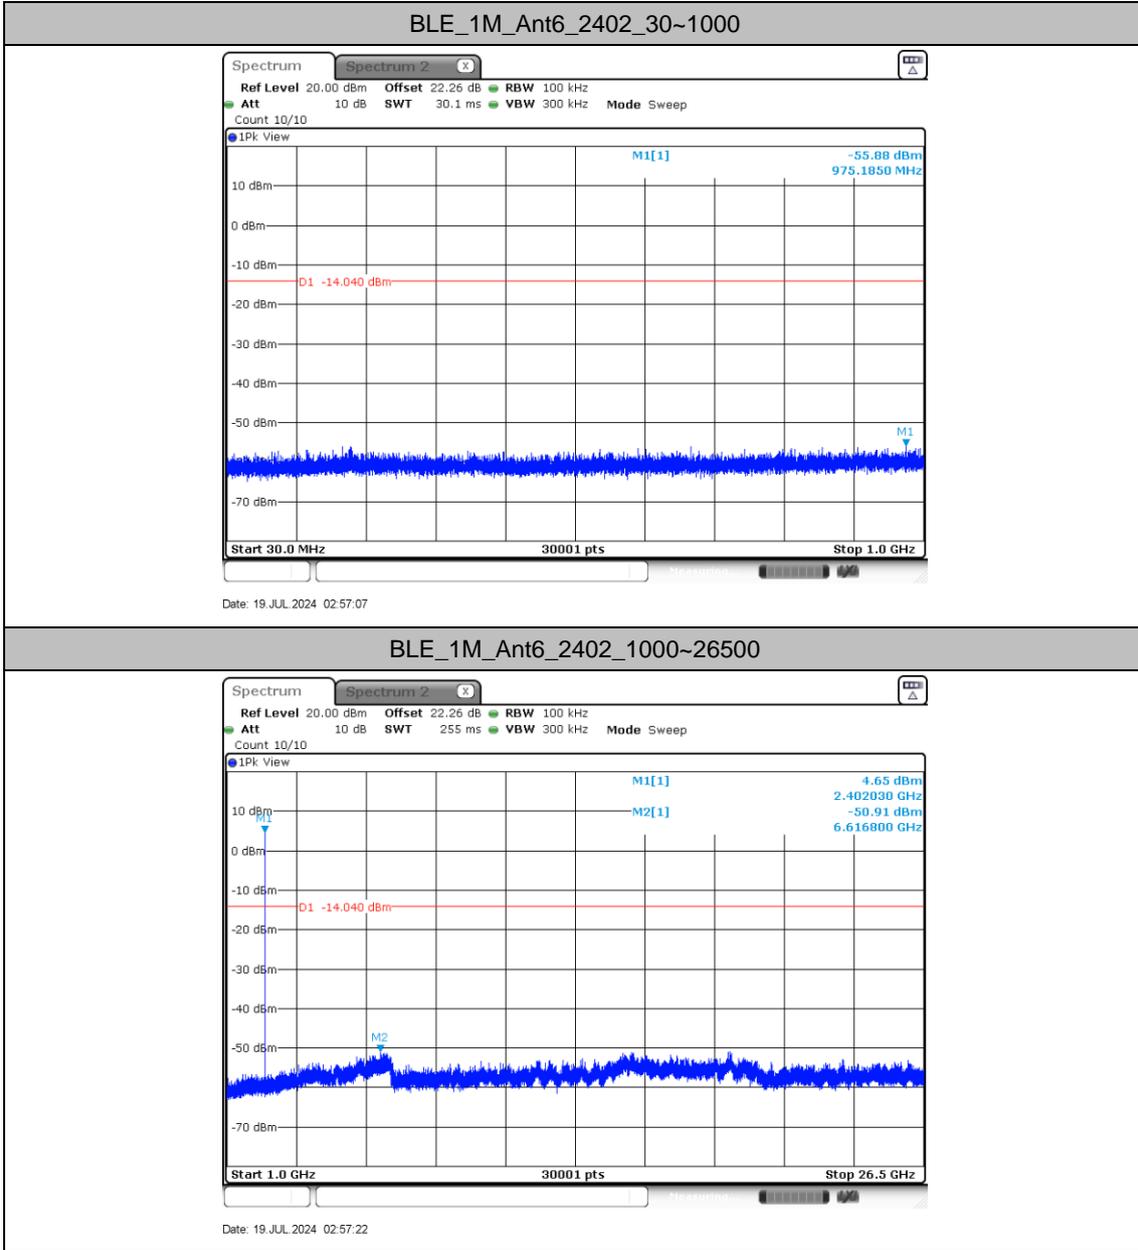




BLE_1M_Ant6_2440_30~1000

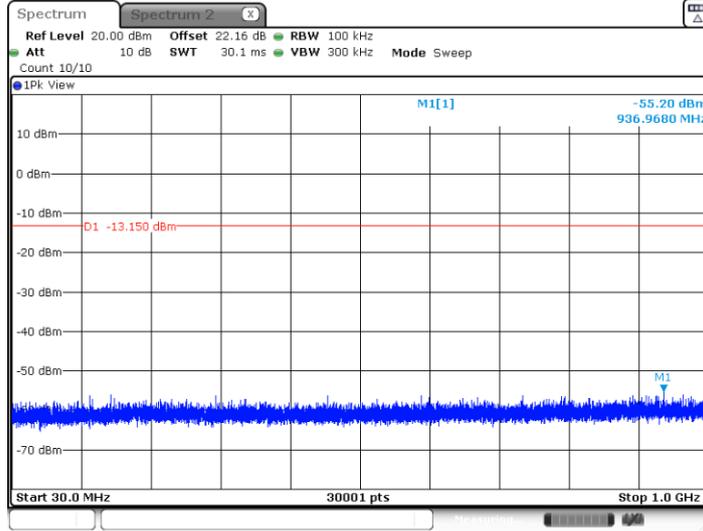

Date: 19 JUL 2024 02:58:21


BLE_1M_Ant6_2440_1000~26500

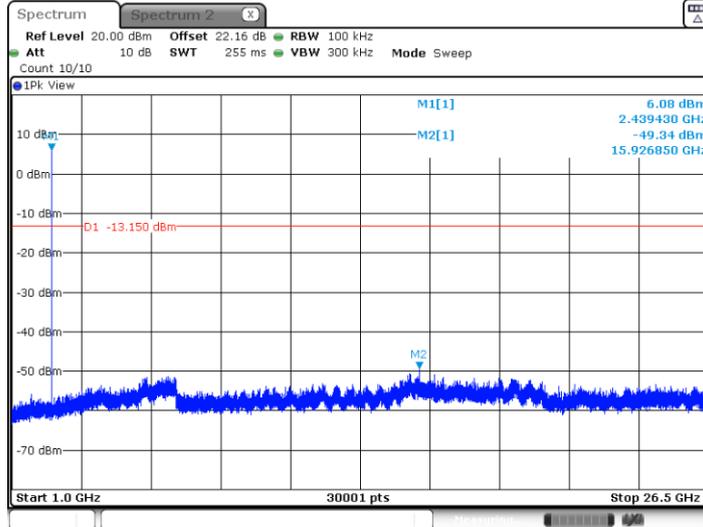

Date: 19 JUL 2024 02:58:37




BLE_1M_Ant6_2480_30~1000

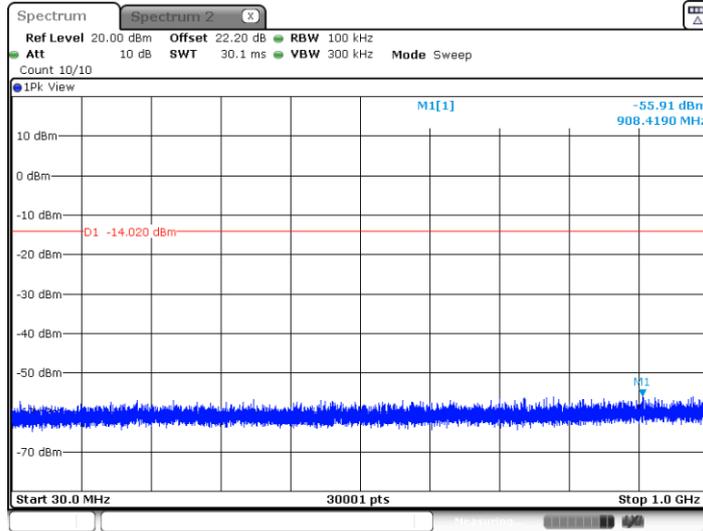

Date: 19 JUL 2024 02:59:46


BLE_1M_Ant6_2480_1000~26500

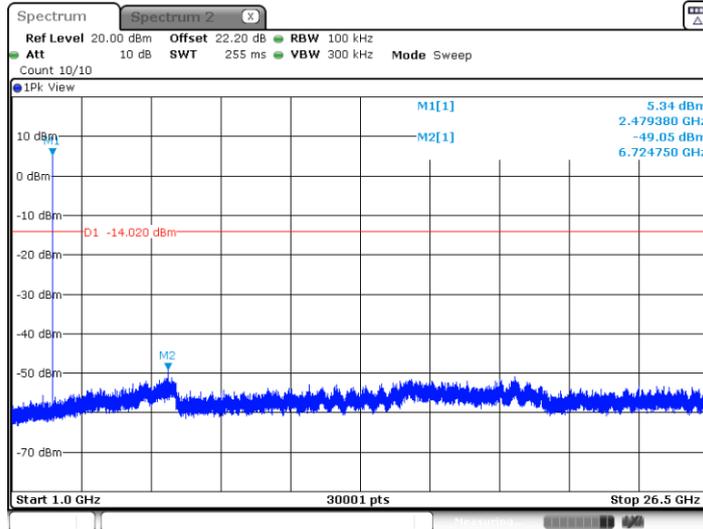

Date: 19 JUL 2024 03:00:01




BLE_2M_Ant6_2404_30~1000

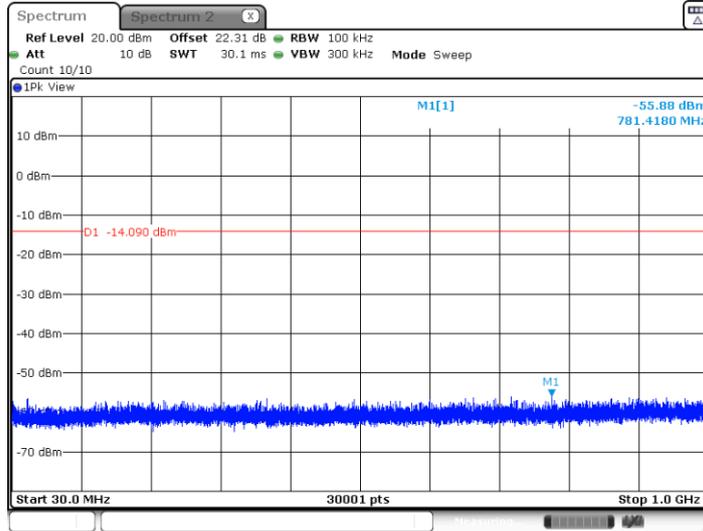

Date: 19 JUL 2024 03:01:18


BLE_2M_Ant6_2404_1000~26500

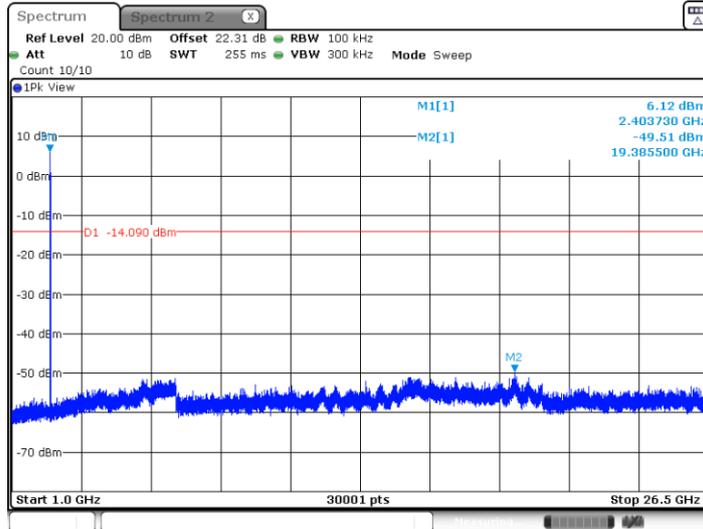

Date: 19 JUL 2024 03:01:34




BLE_2M_Ant6_2440_30~1000

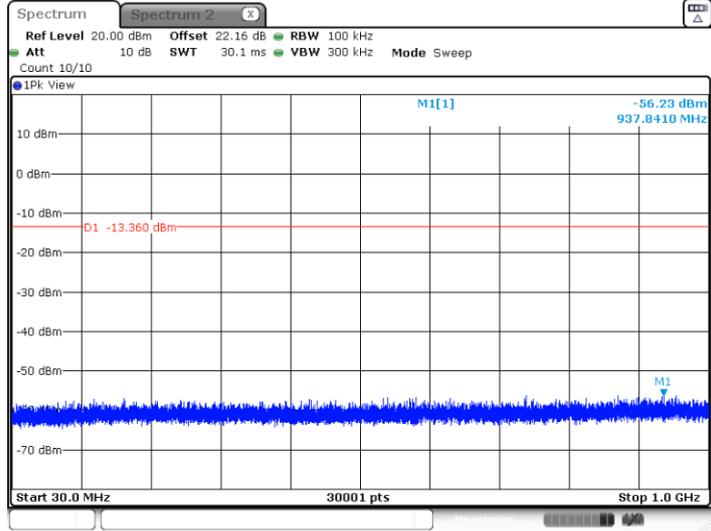

Date: 19 JUL 2024 03:02:20


BLE_2M_Ant6_2440_1000~26500

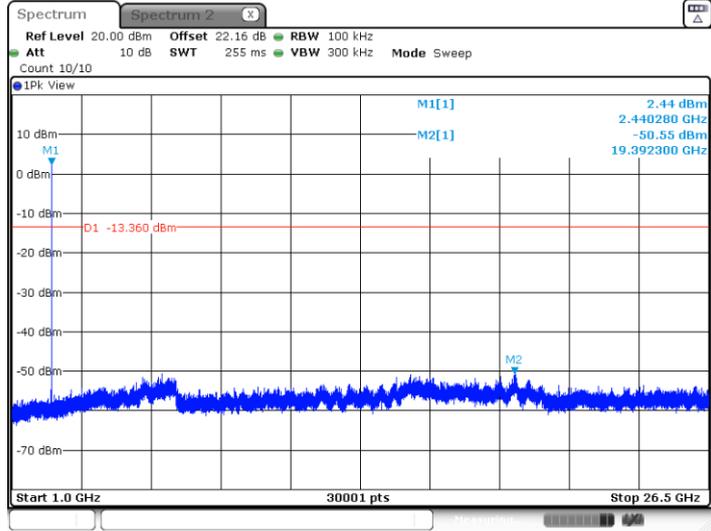

Date: 19 JUL 2024 03:02:35




BLE_2M_Ant6_2478_30~1000

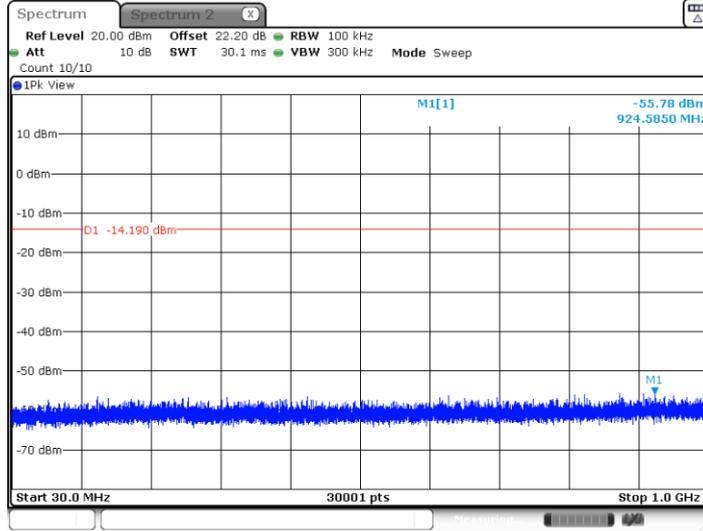

Date: 19 JUL 2024 03:03:43

BLE_2M_Ant6_2478_1000~26500

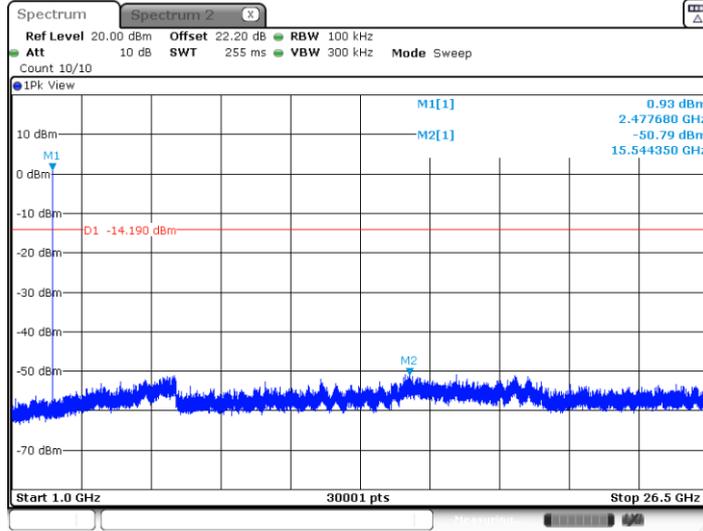


Date: 19 JUL 2024 03:03:58



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

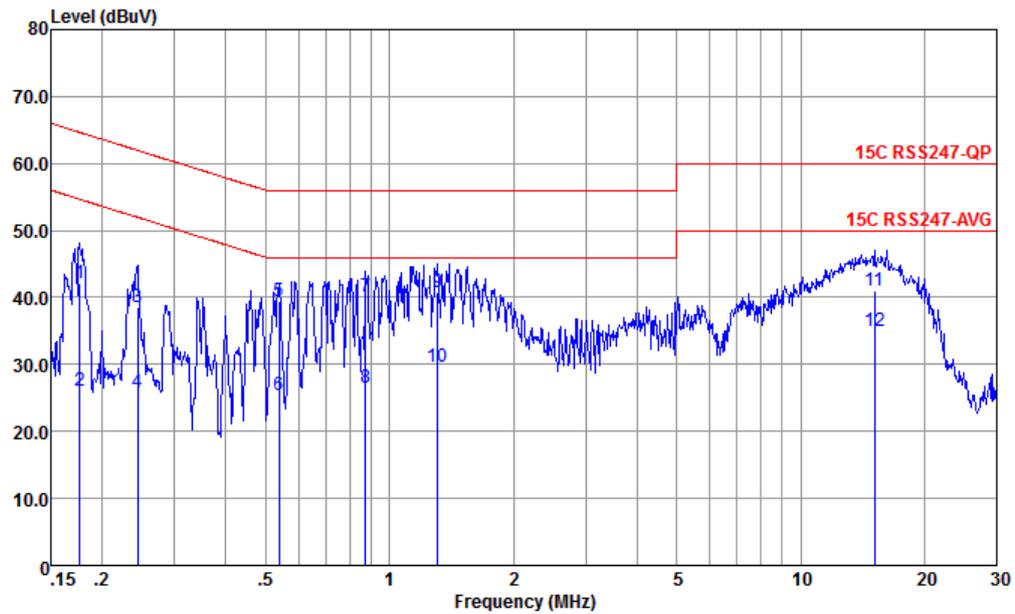


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.177	42.01	-22.63	64.64	31.50	0.10	10.41	QP
2	0.177	26.01	-28.63	54.64	15.50	0.10	10.41	Average
3	0.244	38.66	-23.29	61.95	28.20	0.09	10.37	QP
4	0.244	25.76	-26.19	51.95	15.30	0.09	10.37	Average
5	0.538	39.38	-16.62	56.00	29.30	-0.12	10.20	QP
6	0.538	25.38	-20.62	46.00	15.30	-0.12	10.20	Average
7	0.876	40.03	-15.97	56.00	30.10	-0.17	10.10	QP
8	0.876	26.43	-19.57	46.00	16.50	-0.17	10.10	Average
9	1.310	40.69	-15.31	56.00	30.81	-0.20	10.08	QP
10	1.310	29.69	-16.31	46.00	19.81	-0.20	10.08	Average
11	15.146	40.93	-19.07	60.00	29.91	-0.19	11.21	QP
12 *	15.146	34.93	-15.07	50.00	23.91	-0.19	11.21	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

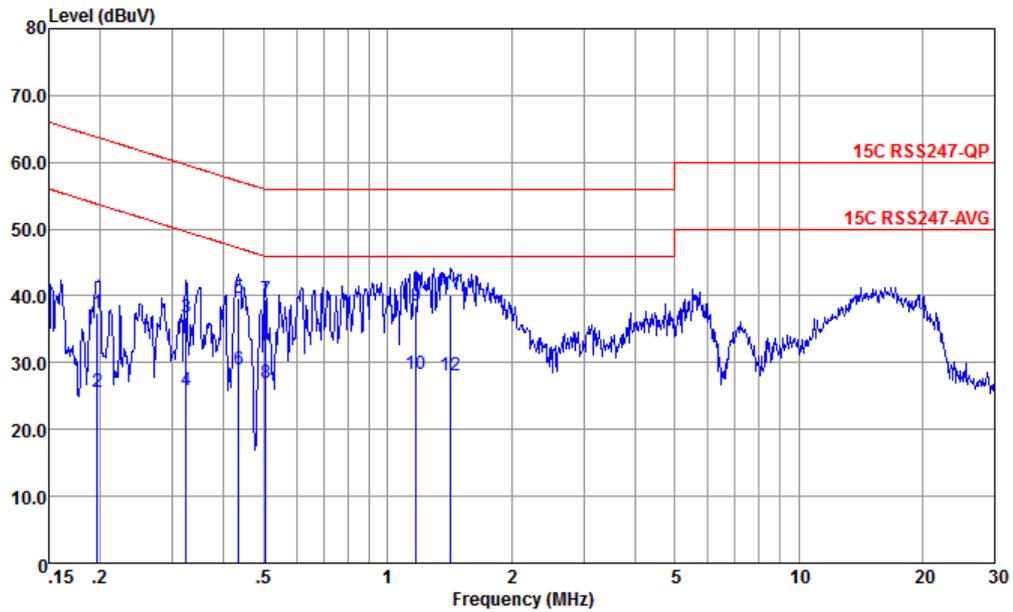

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.197	37.34	-26.42	63.76	26.80	0.13	10.41	QP
2	0.197	25.64	-28.12	53.76	15.10	0.13	10.41	Average
3	0.323	36.79	-22.83	59.62	26.59	-0.12	10.32	QP
4	0.323	25.79	-23.83	49.62	15.59	-0.12	10.32	Average
5	0.435	39.72	-17.43	57.15	29.60	-0.14	10.26	QP
6	0.435	29.02	-18.13	47.15	18.90	-0.14	10.26	Average
7	0.505	39.47	-16.53	56.00	29.40	-0.15	10.22	QP
8	0.505	26.87	-19.13	46.00	16.80	-0.15	10.22	Average
9	1.172	38.60	-17.40	56.00	28.69	-0.18	10.09	QP
10	1.172	28.20	-17.80	46.00	18.29	-0.18	10.09	Average
11 *	1.426	40.10	-15.90	56.00	30.21	-0.19	10.08	QP
12	1.426	28.10	-17.90	46.00	18.21	-0.19	10.08	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jake zhou	Relative Humidity :	52~56%
		Temperature :	22~25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	6	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	6	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	6	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	6	Bluetooth-LE	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	6	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	6	Bluetooth-LE	38	2478	2Mbps	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2388.52	38.35	54.00	-15.65	V	AVERAGE	Pass	Band Edge
1	Bluetooth-LE	00	4804.00	41.20	74.00	-32.80	H	PEAK	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE	19	7320.00	41.89	74.00	-32.11	V	PEAK	Pass	Harmonic
3	Bluetooth-LE	39	2483.56	39.28	54.00	-14.72	H	AVERAGE	Pass	Band Edge
3	Bluetooth-LE	39	4960.00	42.41	74.00	-31.59	V	PEAK	Pass	Harmonic
4	Bluetooth-LE	01	2383.19	39.24	54.00	-14.76	H	AVERAGE	Pass	Band Edge
4	Bluetooth-LE	01	4808.00	41.21	74.00	-32.79	H	PEAK	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE	19	7320.00	42.78	74.00	-31.22	H	PEAK	Pass	Harmonic
6	Bluetooth-LE	38	2495.32	40.20	54.00	-13.80	H	AVERAGE	Pass	Band Edge
6	Bluetooth-LE	38	4956.00	42.05	74.00	-31.95	H	PEAK	Pass	Harmonic



Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																			
ANT	6																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2358.62</td> <td>48.95</td> <td>74.00</td> <td>-25.05</td> <td>41.10</td> <td>31.61</td> <td>7.11</td> <td>36.87</td> <td>6.00</td> <td>305</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2358.62	48.95	74.00	-25.05	41.10	31.61	7.11	36.87	6.00	305	300	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>100.01</td> <td>-----</td> <td>-----</td> <td>91.78</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>305</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.01	-----	-----	91.78	31.91	7.18	36.86	6.00	305	300	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2358.62	48.95	74.00	-25.05	41.10	31.61	7.11	36.87	6.00	305	300	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	100.01	-----	-----	91.78	31.91	7.18	36.86	6.00	305	300	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.35</td> <td>38.19</td> <td>54.00</td> <td>-15.81</td> <td>30.08</td> <td>31.61</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>305</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.35	38.19	54.00	-15.81	30.08	31.61	7.16	36.86	6.00	305	300	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>98.95</td> <td>-----</td> <td>-----</td> <td>90.72</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>305</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	98.95	-----	-----	90.72	31.91	7.18	36.86	6.00	305	300	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2387.35	38.19	54.00	-15.81	30.08	31.61	7.16	36.86	6.00	305	300	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	98.95	-----	-----	90.72	31.91	7.18	36.86	6.00	305	300	AVERAGE																																																																								



Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
ANT	6																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2382.41</td> <td>48.89</td> <td>74.00</td> <td>-25.11</td> <td>40.82</td> <td>31.78</td> <td>7.15</td> <td>36.86</td> <td>6.00</td> <td>361</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2382.41	48.89	74.00	-25.11	40.82	31.78	7.15	36.86	6.00	361	48	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>99.01</td> <td>-----</td> <td>-----</td> <td>90.78</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>361</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	99.01	-----	-----	90.78	31.91	7.18	36.86	6.00	361	48	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2382.41	48.89	74.00	-25.11	40.82	31.78	7.15	36.86	6.00	361	48	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2402.00	99.01	-----	-----	90.78	31.91	7.18	36.86	6.00	361	48	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.52</td> <td>38.35</td> <td>54.00</td> <td>-15.65</td> <td>30.23</td> <td>31.82</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>361</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2388.52	38.35	54.00	-15.65	30.23	31.82	7.16	36.86	6.00	361	48	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>98.05</td> <td>-----</td> <td>-----</td> <td>89.82</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>361</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	98.05	-----	-----	89.82	31.91	7.18	36.86	6.00	361	48	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2388.52	38.35	54.00	-15.65	30.23	31.82	7.16	36.86	6.00	361	48	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2402.00	98.05	-----	-----	89.82	31.91	7.18	36.86	6.00	361	48	AVERAGE																																																																						



Mode	1																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
ANT	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>41.20</td> <td>74.00</td> <td>-32.80</td> <td>60.32</td> <td>34.09</td> <td>10.27</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.20	74.00	-32.80	60.32	34.09	10.27	63.48	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>40.73</td> <td>74.00</td> <td>-33.27</td> <td>59.85</td> <td>34.09</td> <td>10.27</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.73	74.00	-33.27	59.85	34.09	10.27	63.48	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4804.00	41.20	74.00	-32.80	60.32	34.09	10.27	63.48	0.00	--	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4804.00	40.73	74.00	-33.27	59.85	34.09	10.27	63.48	0.00	--	PEAK																																																																							







Mode	2																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>39.72</td> <td>74.00</td> <td>-34.28</td> <td>58.91</td> <td>33.94</td> <td>10.35</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>41.84</td> <td>74.00</td> <td>-32.16</td> <td>57.13</td> <td>35.60</td> <td>12.79</td> <td>63.68</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4880.00	39.72	74.00	-34.28	58.91	33.94	10.35	63.48	0.00	--	--	PEAK	2	7320.00	41.84	74.00	-32.16	57.13	35.60	12.79	63.68	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>40.68</td> <td>74.00</td> <td>-33.32</td> <td>59.87</td> <td>33.94</td> <td>10.35</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>41.89</td> <td>74.00</td> <td>-32.11</td> <td>57.18</td> <td>35.60</td> <td>12.79</td> <td>63.68</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4880.00	40.68	74.00	-33.32	59.87	33.94	10.35	63.48	0.00	--	--	PEAK	2	7320.00	41.89	74.00	-32.11	57.18	35.60	12.79	63.68	0.00	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	4880.00	39.72	74.00	-34.28	58.91	33.94	10.35	63.48	0.00	--	--	PEAK																																																																																																
2	7320.00	41.84	74.00	-32.16	57.13	35.60	12.79	63.68	0.00	--	--	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	4880.00	40.68	74.00	-33.32	59.87	33.94	10.35	63.48	0.00	--	--	PEAK																																																																																																
2	7320.00	41.89	74.00	-32.11	57.18	35.60	12.79	63.68	0.00	--	--	PEAK																																																																																																



Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																			
ANT	6																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2495.08</td> <td>50.05</td> <td>74.00</td> <td>-23.95</td> <td>41.27</td> <td>32.28</td> <td>7.35</td> <td>36.85</td> <td>6.00</td> <td>164</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.08	50.05	74.00	-23.95	41.27	32.28	7.35	36.85	6.00	164	300	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>100.64</td> <td>-----</td> <td>-----</td> <td>91.95</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>164</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	100.64	-----	-----	91.95	32.22	7.32	36.85	6.00	164	300	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2495.08	50.05	74.00	-23.95	41.27	32.28	7.35	36.85	6.00	164	300	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	100.64	-----	-----	91.95	32.22	7.32	36.85	6.00	164	300	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>39.28</td> <td>54.00</td> <td>-14.72</td> <td>30.57</td> <td>32.23</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>164</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	39.28	54.00	-14.72	30.57	32.23	7.33	36.85	6.00	164	300	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>99.59</td> <td>-----</td> <td>-----</td> <td>90.90</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>164</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.59	-----	-----	90.90	32.22	7.32	36.85	6.00	164	300	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.56	39.28	54.00	-14.72	30.57	32.23	7.33	36.85	6.00	164	300	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	99.59	-----	-----	90.90	32.22	7.32	36.85	6.00	164	300	AVERAGE																																																																								

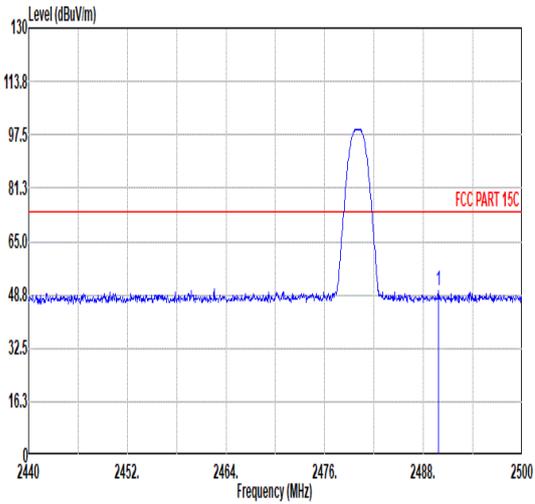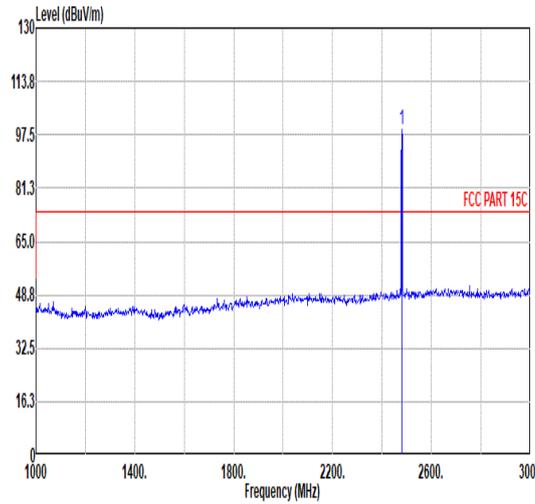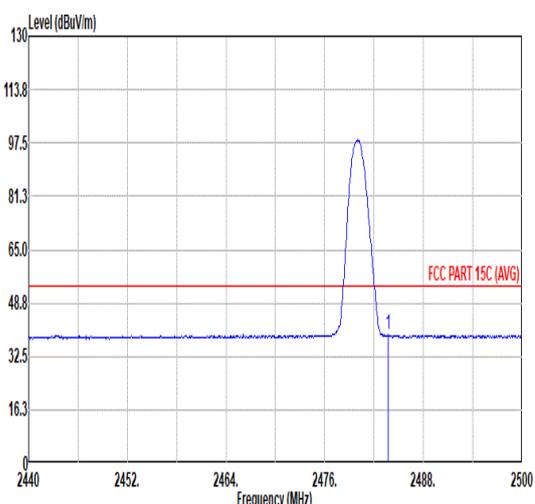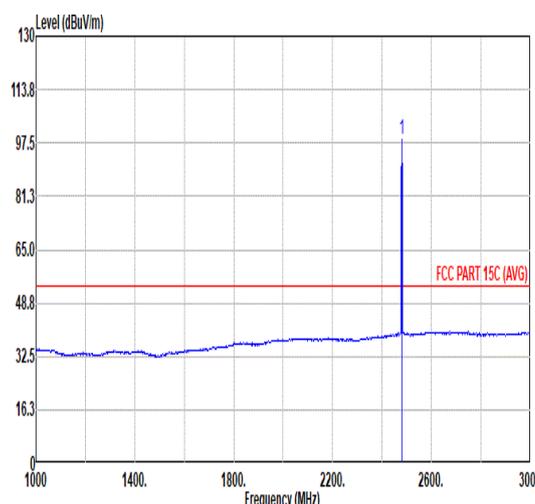

Mode	3																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <table border="1" data-bbox="263 1120 798 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.80</td> <td>50.10</td> <td>74.00</td> <td>-23.90</td> <td>41.35</td> <td>32.26</td> <td>7.34</td> <td>36.85</td> <td>6.00</td> <td>379</td> <td>47 PEAK</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2489.80	50.10	74.00	-23.90	41.35	32.26	7.34	36.85	6.00	379	47 PEAK	 <table border="1" data-bbox="901 1120 1436 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>99.29</td> <td>-----</td> <td>90.60</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>379</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	99.29	-----	90.60	32.22	7.32	36.85	6.00	379	47	PEAK
		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2489.80	50.10	74.00	-23.90	41.35	32.26	7.34	36.85	6.00	379	47 PEAK																																																															
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2480.00	99.29	-----	90.60	32.22	7.32	36.85	6.00	379	47	PEAK																																																															
Avg	 <table border="1" data-bbox="263 1792 798 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>39.05</td> <td>54.00</td> <td>-14.95</td> <td>30.34</td> <td>32.23</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>379</td> <td>47 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.68	39.05	54.00	-14.95	30.34	32.23	7.33	36.85	6.00	379	47 AVERAGE	 <table border="1" data-bbox="901 1792 1436 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>98.39</td> <td>-----</td> <td>89.70</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>379</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	98.39	-----	89.70	32.22	7.32	36.85	6.00	379	47	AVERAGE
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2483.68	39.05	54.00	-14.95	30.34	32.23	7.33	36.85	6.00	379	47 AVERAGE																																																															
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2480.00	98.39	-----	89.70	32.22	7.32	36.85	6.00	379	47	AVERAGE																																																															







Mode	3																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																					
ANT	6																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.62</td> <td>74.00</td> <td>-32.38</td> <td>60.70</td> <td>33.96</td> <td>10.44</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>41.53</td> <td>74.00</td> <td>-32.47</td> <td>56.71</td> <td>35.64</td> <td>12.93</td> <td>63.75</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	41.62	74.00	-32.38	60.70	33.96	10.44	63.48	0.00	--	--	PEAK	2	7440.00	41.53	74.00	-32.47	56.71	35.64	12.93	63.75	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.41</td> <td>74.00</td> <td>-31.59</td> <td>61.49</td> <td>33.96</td> <td>10.44</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>41.49</td> <td>74.00</td> <td>-32.51</td> <td>56.67</td> <td>35.64</td> <td>12.93</td> <td>63.75</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	42.41	74.00	-31.59	61.49	33.96	10.44	63.48	0.00	--	--	PEAK	2	7440.00	41.49	74.00	-32.51	56.67	35.64	12.93	63.75	0.00	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	4960.00	41.62	74.00	-32.38	60.70	33.96	10.44	63.48	0.00	--	--	PEAK																																																																																										
2	7440.00	41.53	74.00	-32.47	56.71	35.64	12.93	63.75	0.00	--	--	PEAK																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	4960.00	42.41	74.00	-31.59	61.49	33.96	10.44	63.48	0.00	--	--	PEAK																																																																																										
2	7440.00	41.49	74.00	-32.51	56.67	35.64	12.93	63.75	0.00	--	--	PEAK																																																																																										



Mode	4																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																			
ANT	6																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2353.68</td> <td>49.26</td> <td>74.00</td> <td>-24.74</td> <td>41.44</td> <td>31.58</td> <td>7.11</td> <td>36.87</td> <td>6.00</td> <td>304</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2353.68	49.26	74.00	-24.74	41.44	31.58	7.11	36.87	6.00	304	297	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>100.20</td> <td>-----</td> <td>-----</td> <td>91.95</td> <td>31.92</td> <td>7.19</td> <td>36.86</td> <td>6.00</td> <td>304</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	100.20	-----	-----	91.95	31.92	7.19	36.86	6.00	304	297	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2353.68	49.26	74.00	-24.74	41.44	31.58	7.11	36.87	6.00	304	297	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2404.00	100.20	-----	-----	91.95	31.92	7.19	36.86	6.00	304	297	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2383.19</td> <td>39.24</td> <td>54.00</td> <td>-14.76</td> <td>31.17</td> <td>31.78</td> <td>7.15</td> <td>36.86</td> <td>6.00</td> <td>304</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.19	39.24	54.00	-14.76	31.17	31.78	7.15	36.86	6.00	304	297	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>97.91</td> <td>-----</td> <td>-----</td> <td>89.66</td> <td>31.92</td> <td>7.19</td> <td>36.86</td> <td>6.00</td> <td>304</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	97.91	-----	-----	89.66	31.92	7.19	36.86	6.00	304	297	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2383.19	39.24	54.00	-14.76	31.17	31.78	7.15	36.86	6.00	304	297	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2404.00	97.91	-----	-----	89.66	31.92	7.19	36.86	6.00	304	297	AVERAGE																																																																								

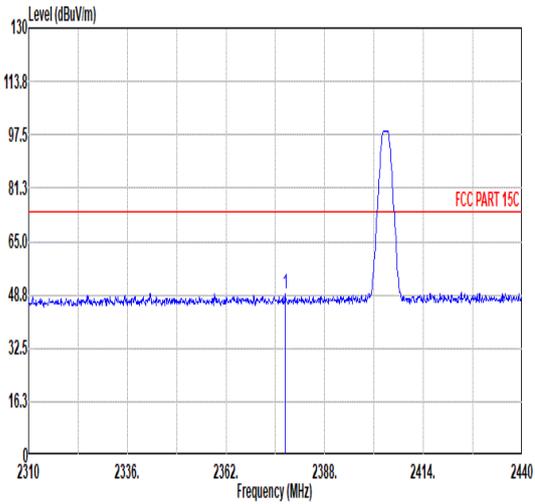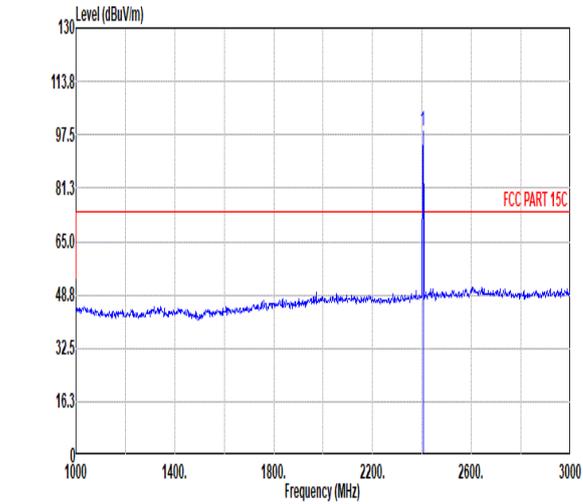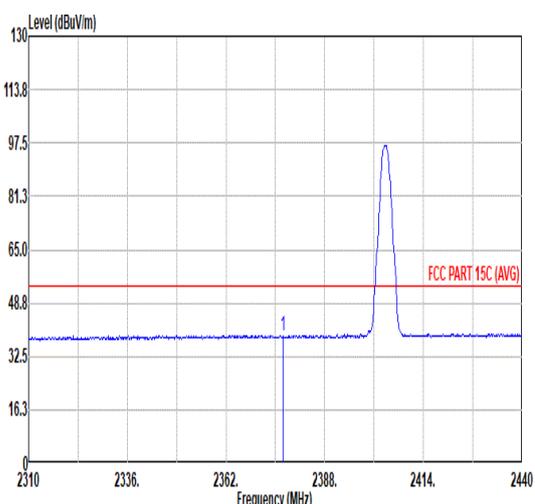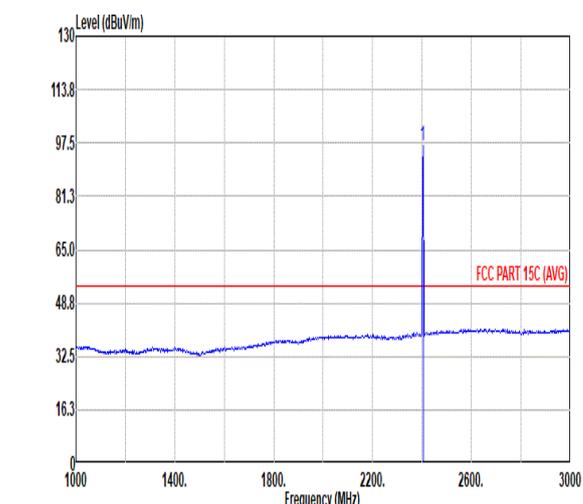

Mode	4																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																			
ANT	6																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	 <table border="1" data-bbox="263 1120 798 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2377.60</td> <td>49.22</td> <td>74.00</td> <td>-24.78</td> <td>41.20</td> <td>31.74</td> <td>7.14</td> <td>36.86</td> <td>6.00</td> <td>361</td> <td>49</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	2377.60	49.22	74.00	-24.78	41.20	31.74	7.14	36.86	6.00	361	49	PEAK	 <table border="1" data-bbox="861 1120 1444 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>98.73</td> <td>-----</td> <td>-----</td> <td>90.48</td> <td>31.92</td> <td>7.19</td> <td>36.86</td> <td>6.00</td> <td>361</td> <td>49</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	2404.00	98.73	-----	-----	90.48	31.92	7.19	36.86	6.00	361	49	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																											
1	2377.60	49.22	74.00	-24.78	41.20	31.74	7.14	36.86	6.00	361	49	PEAK																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																											
1	2404.00	98.73	-----	-----	90.48	31.92	7.19	36.86	6.00	361	49	PEAK																																																								
Avg	 <table border="1" data-bbox="263 1792 798 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2376.95</td> <td>38.94</td> <td>54.00</td> <td>-15.06</td> <td>30.92</td> <td>31.74</td> <td>7.14</td> <td>36.86</td> <td>6.00</td> <td>361</td> <td>49</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	2376.95	38.94	54.00	-15.06	30.92	31.74	7.14	36.86	6.00	361	49	AVERAGE	 <table border="1" data-bbox="861 1792 1444 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>96.71</td> <td>-----</td> <td>-----</td> <td>88.46</td> <td>31.92</td> <td>7.19</td> <td>36.86</td> <td>6.00</td> <td>361</td> <td>49</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	2404.00	96.71	-----	-----	88.46	31.92	7.19	36.86	6.00	361	49	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																											
1	2376.95	38.94	54.00	-15.06	30.92	31.74	7.14	36.86	6.00	361	49	AVERAGE																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																											
1	2404.00	96.71	-----	-----	88.46	31.92	7.19	36.86	6.00	361	49	AVERAGE																																																								



Mode	4																																																																															
	Harmonic																																																																															
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>40.62</td> <td>74.00</td> <td>-33.38</td> <td>59.74</td> <td>34.08</td> <td>10.28</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	40.62	74.00	-33.38	59.74	34.08	10.28	63.48	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>41.21</td> <td>74.00</td> <td>-32.79</td> <td>60.33</td> <td>34.08</td> <td>10.28</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	41.21	74.00	-32.79	60.33	34.08	10.28	63.48	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	40.62	74.00	-33.38	59.74	34.08	10.28	63.48	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	41.21	74.00	-32.79	60.33	34.08	10.28	63.48	0.00	--	PEAK																																																																						



Mode	5																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																					
ANT	6																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>39.93</td> <td>74.00</td> <td>-34.07</td> <td>59.12</td> <td>33.94</td> <td>10.35</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>42.78</td> <td>74.00</td> <td>-31.22</td> <td>58.07</td> <td>35.60</td> <td>12.79</td> <td>63.68</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4880.00	39.93	74.00	-34.07	59.12	33.94	10.35	63.48	0.00	--	--	PEAK	2	7320.00	42.78	74.00	-31.22	58.07	35.60	12.79	63.68	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>39.96</td> <td>74.00</td> <td>-34.04</td> <td>59.15</td> <td>33.94</td> <td>10.35</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>42.27</td> <td>74.00</td> <td>-31.73</td> <td>57.56</td> <td>35.60</td> <td>12.79</td> <td>63.68</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4880.00	39.96	74.00	-34.04	59.15	33.94	10.35	63.48	0.00	--	--	PEAK	2	7320.00	42.27	74.00	-31.73	57.56	35.60	12.79	63.68	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	4880.00	39.93	74.00	-34.07	59.12	33.94	10.35	63.48	0.00	--	--	PEAK																																																																																										
2	7320.00	42.78	74.00	-31.22	58.07	35.60	12.79	63.68	0.00	--	--	PEAK																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	4880.00	39.96	74.00	-34.04	59.15	33.94	10.35	63.48	0.00	--	--	PEAK																																																																																										
2	7320.00	42.27	74.00	-31.73	57.56	35.60	12.79	63.68	0.00	--	--	PEAK																																																																																										



Mode	6																																																																																							
	Band Edge																																																																																							
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																							
ANT	6																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.08</td> <td>50.55</td> <td>74.00</td> <td>-23.45</td> <td>41.75</td> <td>32.29</td> <td>7.36</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.08	50.55	74.00	-23.45	41.75	32.29	7.36	36.85	6.00	163	300	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>100.00</td> <td>-----</td> <td>-----</td> <td>92.20</td> <td>32.21</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	100.00	-----	-----	92.20	32.21	7.32	36.85	6.00	163	300	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2498.08	50.55	74.00	-23.45	41.75	32.29	7.36	36.85	6.00	163	300	PEAK																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	100.00	-----	-----	92.20	32.21	7.32	36.85	6.00	163	300	PEAK																																																																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2495.32</td> <td>40.20</td> <td>54.00</td> <td>-13.80</td> <td>31.42</td> <td>32.28</td> <td>7.35</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.32	40.20	54.00	-13.80	31.42	32.28	7.35	36.85	6.00	163	300	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>98.65</td> <td>-----</td> <td>-----</td> <td>89.97</td> <td>32.21</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	98.65	-----	-----	89.97	32.21	7.32	36.85	6.00	163	300	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2495.32	40.20	54.00	-13.80	31.42	32.28	7.35	36.85	6.00	163	300	AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	98.65	-----	-----	89.97	32.21	7.32	36.85	6.00	163	300	AVERAGE																																																																												





Mode	6																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																			
ANT	6																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2492.98</td> <td>49.50</td> <td>74.00</td> <td>-24.50</td> <td>40.73</td> <td>32.27</td> <td>7.35</td> <td>36.85</td> <td>6.00</td> <td>380</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.98	49.50	74.00	-24.50	40.73	32.27	7.35	36.85	6.00	380	48	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>99.61</td> <td>-----</td> <td>-----</td> <td>90.93</td> <td>32.21</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>380</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	99.61	-----	-----	90.93	32.21	7.32	36.85	6.00	380	48	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2492.98	49.50	74.00	-24.50	40.73	32.27	7.35	36.85	6.00	380	48	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2478.00	99.61	-----	-----	90.93	32.21	7.32	36.85	6.00	380	48	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.76</td> <td>40.00</td> <td>-14.00</td> <td>31.25</td> <td>32.26</td> <td>7.34</td> <td>36.85</td> <td>6.00</td> <td>380</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.76	40.00	-14.00	31.25	32.26	7.34	36.85	6.00	380	48	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>97.29</td> <td>-----</td> <td>-----</td> <td>88.61</td> <td>32.21</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>380</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	97.29	-----	-----	88.61	32.21	7.32	36.85	6.00	380	48	AVERAGE	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2490.76	40.00	-14.00	31.25	32.26	7.34	36.85	6.00	380	48	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2478.00	97.29	-----	-----	88.61	32.21	7.32	36.85	6.00	380	48	AVERAGE																																																																								



Mode	6																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																									
ANT	6																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>42.05</td> <td>74.00</td> <td>-31.95</td> <td>61.13</td> <td>33.96</td> <td>10.44</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>41.36</td> <td>74.00</td> <td>-32.64</td> <td>56.55</td> <td>35.63</td> <td>12.93</td> <td>63.75</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	42.05	74.00	-31.95	61.13	33.96	10.44	63.48	0.00	--	--	PEAK	2	7434.00	41.36	74.00	-32.64	56.55	35.63	12.93	63.75	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>41.07</td> <td>74.00</td> <td>-32.93</td> <td>60.15</td> <td>33.96</td> <td>10.44</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>41.55</td> <td>74.00</td> <td>-32.45</td> <td>56.74</td> <td>35.63</td> <td>12.93</td> <td>63.75</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	41.07	74.00	-32.93	60.15	33.96	10.44	63.48	0.00	--	--	PEAK	2	7434.00	41.55	74.00	-32.45	56.74	35.63	12.93	63.75	0.00	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4956.00	42.05	74.00	-31.95	61.13	33.96	10.44	63.48	0.00	--	--	PEAK																																																																																														
2	7434.00	41.36	74.00	-32.64	56.55	35.63	12.93	63.75	0.00	--	--	PEAK																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4956.00	41.07	74.00	-32.93	60.15	33.96	10.44	63.48	0.00	--	--	PEAK																																																																																														
2	7434.00	41.55	74.00	-32.45	56.74	35.63	12.93	63.75	0.00	--	--	PEAK																																																																																														

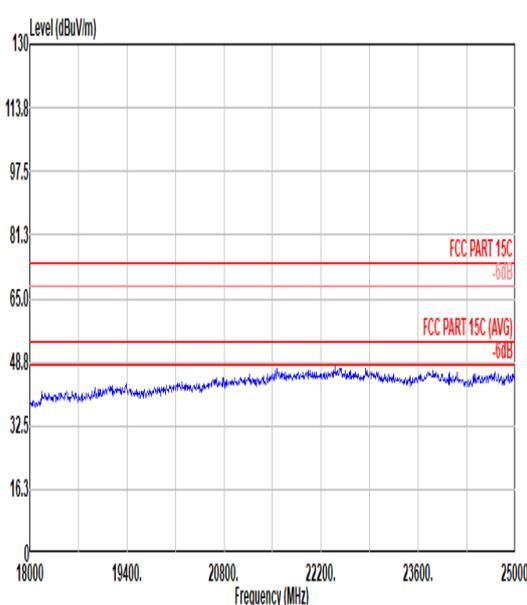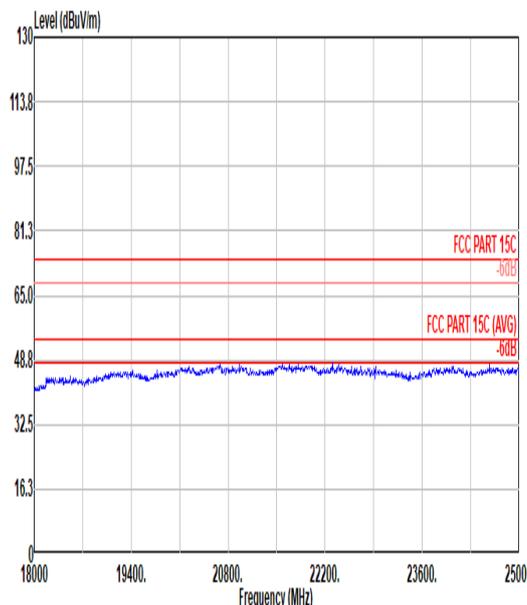

Mode	6	
	18G-25G	
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg		




Mode	6																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																																																																																																																									
ANT	1																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Antenna Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>92.08</td><td>20.89</td><td>-22.61</td><td>43.50</td><td>37.34</td><td>14.88</td><td>1.35</td><td>32.68</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>148.34</td><td>20.46</td><td>-23.04</td><td>43.50</td><td>34.22</td><td>17.16</td><td>1.79</td><td>32.71</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>187.14</td><td>21.02</td><td>-22.48</td><td>43.50</td><td>37.11</td><td>14.65</td><td>2.01</td><td>32.75</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>470.38</td><td>23.72</td><td>-22.28</td><td>46.00</td><td>30.41</td><td>23.27</td><td>3.14</td><td>33.10</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5 p</td><td>858.38</td><td>29.64</td><td>-16.36</td><td>46.00</td><td>28.41</td><td>29.47</td><td>4.30</td><td>32.54</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>980.60</td><td>32.07</td><td>-21.93</td><td>54.00</td><td>27.95</td><td>30.81</td><td>4.65</td><td>31.34</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	92.08	20.89	-22.61	43.50	37.34	14.88	1.35	32.68	---	---	Peak	2	148.34	20.46	-23.04	43.50	34.22	17.16	1.79	32.71	---	---	Peak	3	187.14	21.02	-22.48	43.50	37.11	14.65	2.01	32.75	---	---	Peak	4	470.38	23.72	-22.28	46.00	30.41	23.27	3.14	33.10	---	---	Peak	5 p	858.38	29.64	-16.36	46.00	28.41	29.47	4.30	32.54	---	---	Peak	6	980.60	32.07	-21.93	54.00	27.95	30.81	4.65	31.34	---	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Antenna Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1 p</td><td>41.64</td><td>33.60</td><td>-6.40</td><td>40.00</td><td>47.04</td><td>18.49</td><td>0.90</td><td>32.83</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>91.11</td><td>25.94</td><td>-17.56</td><td>43.50</td><td>42.53</td><td>14.75</td><td>1.35</td><td>32.69</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>153.19</td><td>26.07</td><td>-17.43</td><td>43.50</td><td>40.12</td><td>16.85</td><td>1.81</td><td>32.71</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>560.59</td><td>24.72</td><td>-21.28</td><td>46.00</td><td>28.57</td><td>26.10</td><td>3.29</td><td>33.24</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>669.23</td><td>26.65</td><td>-19.35</td><td>46.00</td><td>29.91</td><td>26.17</td><td>3.82</td><td>33.25</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>985.45</td><td>31.04</td><td>-22.96</td><td>54.00</td><td>26.96</td><td>30.71</td><td>4.66</td><td>31.29</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1 p	41.64	33.60	-6.40	40.00	47.04	18.49	0.90	32.83	---	---	Peak	2	91.11	25.94	-17.56	43.50	42.53	14.75	1.35	32.69	---	---	Peak	3	153.19	26.07	-17.43	43.50	40.12	16.85	1.81	32.71	---	---	Peak	4	560.59	24.72	-21.28	46.00	28.57	26.10	3.29	33.24	---	---	Peak	5	669.23	26.65	-19.35	46.00	29.91	26.17	3.82	33.25	---	---	Peak	6	985.45	31.04	-22.96	54.00	26.96	30.71	4.66	31.29	---	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																														
1	92.08	20.89	-22.61	43.50	37.34	14.88	1.35	32.68	---	---	Peak																																																																																																																																																															
2	148.34	20.46	-23.04	43.50	34.22	17.16	1.79	32.71	---	---	Peak																																																																																																																																																															
3	187.14	21.02	-22.48	43.50	37.11	14.65	2.01	32.75	---	---	Peak																																																																																																																																																															
4	470.38	23.72	-22.28	46.00	30.41	23.27	3.14	33.10	---	---	Peak																																																																																																																																																															
5 p	858.38	29.64	-16.36	46.00	28.41	29.47	4.30	32.54	---	---	Peak																																																																																																																																																															
6	980.60	32.07	-21.93	54.00	27.95	30.81	4.65	31.34	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1 p	41.64	33.60	-6.40	40.00	47.04	18.49	0.90	32.83	---	---	Peak																																																																																																																																																															
2	91.11	25.94	-17.56	43.50	42.53	14.75	1.35	32.69	---	---	Peak																																																																																																																																																															
3	153.19	26.07	-17.43	43.50	40.12	16.85	1.81	32.71	---	---	Peak																																																																																																																																																															
4	560.59	24.72	-21.28	46.00	28.57	26.10	3.29	33.24	---	---	Peak																																																																																																																																																															
5	669.23	26.65	-19.35	46.00	29.91	26.17	3.82	33.25	---	---	Peak																																																																																																																																																															
6	985.45	31.04	-22.96	54.00	26.96	30.71	4.66	31.29	---	---	Peak																																																																																																																																																															



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	60.65	0.380	2.634	2.7KHz
Bluetooth LE 2Mbps	31.48	0.197	5.074	5.1KHz


Bluetooth LE 1Mbps

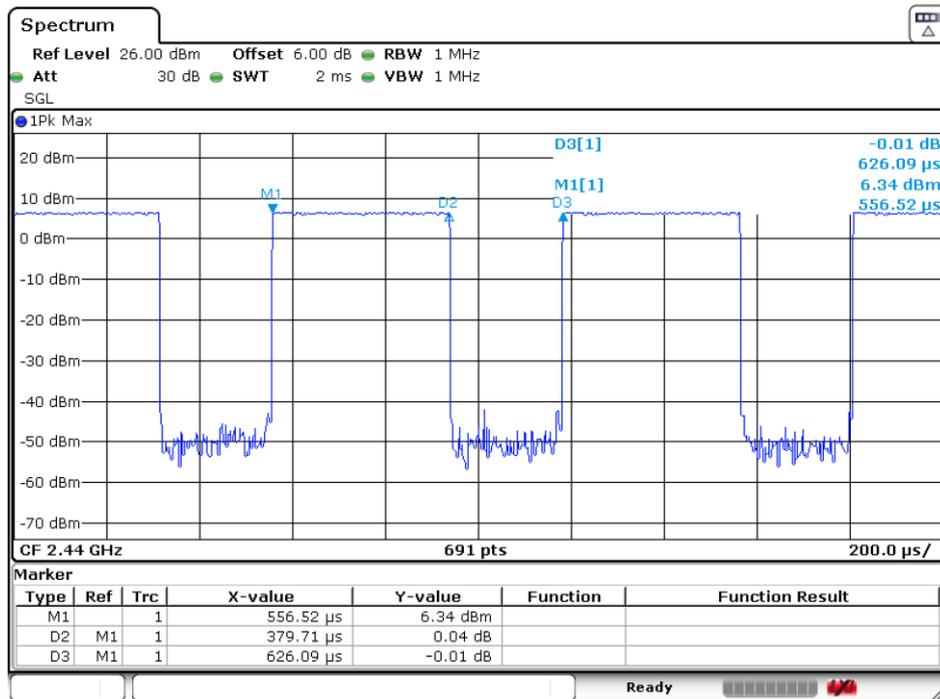

Date: 18.JUL.2024 04:26:19



Bluetooth LE 2Mbps

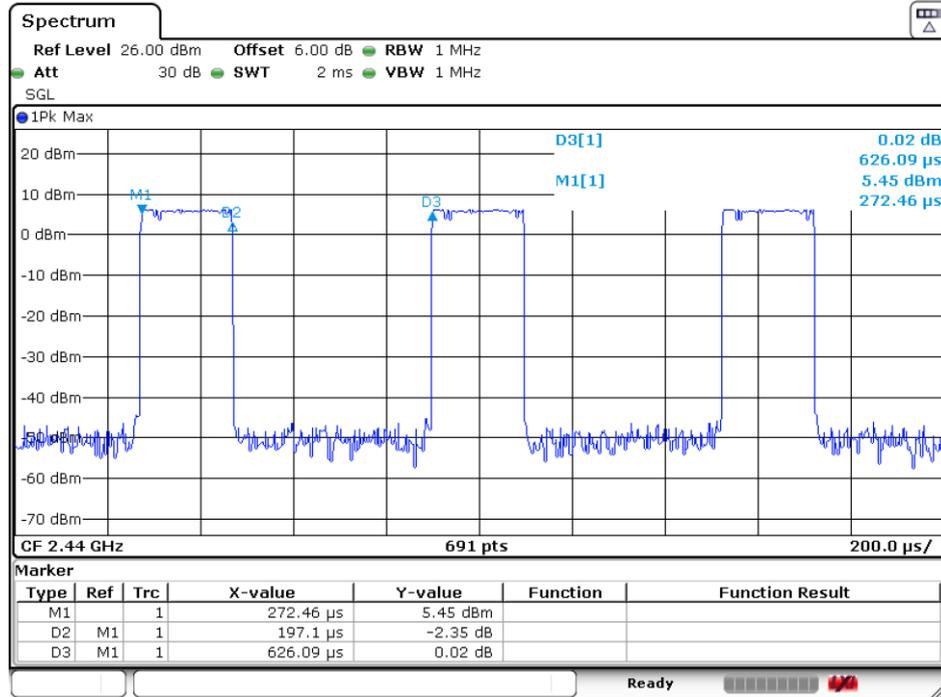

Date: 18.JUL.2024 04:27:00