

SAR TEST REPORT

For

Plusone Marketing Ltd.

Smart phone

Model No.: FTU152D

Prepared for : Plusone Marketing Ltd.
Address : Sumitomofudosan Hibiya building 2F, 2-8-6Shinbashi,
Minatoku, Tokyo, Japan

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an
Avenue, Bao'an District, Shenzhen, Guangdong, China
Tel : (86)755-82591330
Fax : (86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : December 16, 2015
Number of tested samples : 1
Serial number : Prototype
Date of Test : December 16, 2015 –January 20, 2016
Date of Report : February 19, 2016

SAR TEST REPORT**Report Reference No. : LCS1512211978E**

Date Of Issue : January 22, 2016

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name..... : Plusone Marketing Ltd.**Address : Sumitomofudosan Hibiya building 2F, 2-8-6Shinbashi, Minatoku,
Tokyo, Japan**Test Specification:**Standard : IEEE 1528:2013/KDB865664
47CFR §2.1093

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2014-09


Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Smart phone

Trade Mark : FREETEL

Model/Type Reference : FTU152D

Operation Frequency : GSM 850/PCS1900, WCDMA Band II/IV/V, LTE
Band2/4/7/12/17, WLAN2.4G/5G, Bluetooth4.0Modulation Type : GSM(GMSK,8PSK), WCDMA/HSDPA/HSUPA(QPSK),
LTE(QPSK,16QAM), WIFI(DSSS,OFDM),
Bluetooth(GFSK,8DPSK,PI/4DQPSK)Ratings : DC 3.8V by Lithium ion polymer battery(2600mAh)
Recharged by DC 5V/1A Travel Charger**Result : Positive****Compiled by:****Supervised by:****Approved by:**

Cherry Chen/ File administrators

Glin Lu/ Technique principal

Gavin Liang/ Manager

SAR -- TEST REPORT

Test Report No. : LCS1512211978EFebruary 19, 2016
Date of issue

Type / Model..... : FTU152D

EUT..... : Smart phone

Applicant..... : Plusone Marketing Ltd.Address..... : Sumitomofudosan Hibiya building 2F, 2-8-6Shinbashi,
Minatoku, Tokyo, Japan

Telephone..... : /

Fax..... : /

Manufacturer..... : Toro-tech Company LimitedAddress..... : A802, Block2, Tianan Cyberpark, Longgang, Shenzhen,
China

Telephone..... : /

Fax..... : /

Factory..... : Toro-tech Company LimitedAddress..... : A802, Block2, Tianan Cyberpark, Longgang, Shenzhen,
China

Telephone..... : /

Fax..... : /

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	2016-01-22	Initial Issue	Gavin Liang
01	2016-02-19	1. Adjust report values refer to turn up tolerance 2. Add SAR test results as revised report SAR values>0.8W/Kg 3. Revised channel number and frequency by mistake.	Gavin Liang

TABLE OF CONTENTS

1. TEST STANDARDS AND TEST DESCRIPTION.....	6
1.1. TEST STANDARDS	6
1.2. TEST DESCRIPTION.....	6
1.3. GENERAL REMARKS	6
1.4. PRODUCT DESCRIPTION	6
1.5. STATEMENT OF COMPLIANCE	8
2. TEST ENVIRONMENT	9
2.1. TEST FACILITY.....	9
2.2. ENVIRONMENTAL CONDITIONS	9
2.3. SAR LIMITS	9
2.4. EQUIPMENTS USED DURING THE TEST	10
3. SAR MEASUREMENTS SYSTEM CONFIGURATION	12
3.1. SARMEASUREMENT SET-UP.....	12
3.2. OPENSAR E-FIELD PROBE SYSTEM.....	13
3.3. PHANTOMS	14
3.4. DEVICE HOLDER.....	14
3.5. SCANNING PROCEDURE	15
3.6. DATA STORAGE AND EVALUATION.....	16
3.7. POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM.....	17
3.8. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	19
3.9. TISSUE EQUIVALENT LIQUID PROPERTIES	19
3.10. SYSTEM CHECK	20
3.11. SAR MEASUREMENT PROCEDURE	22
4. TEST CONDITIONS AND RESULTS.....	28
4.1. CONDUCTED POWER RESULTS	28
4.2. MANUFACTURING TOLERANCE	41
4.3. TRANSMIT ANTENNAS AND SAR MEASUREMENT POSITION.....	52
4.4. SAR MEASUREMENT RESULTS	53
4.5. SIMULTANEOUS TX SAR CONSIDERATIONS	60
4.6. SAR MEASUREMENT VARIABILITY	63
4.7. GENERAL DESCRIPTION OF TEST PROCEDURES	63
4.8. MEASUREMENT UNCERTAINTY (300MHz-3GHz).....	64
4.9. SYSTEM CHECK RESULTS	65
5.1. SAR TEST GRAPH RESULTS.....	81
6. CALIBRATION CERTIFICATES	107
5.1 PROBE-EP220 CALIBRATION CERTIFICATE	107
5.2 PROBE-EP221 CALIBRATION CERTIFICATE	116
5.3 PROBE-EPG214 CALIBRATION CERTIFICATE	125
5.4 SID750DIPOLE CALIBRATION CERTIFICATE	135
5.5 SID835DIPOLE CALIBRATION CERTIFICATE	146
5.6 SID1800 DIPOLE CALIBRATION CERTIFICATE.....	157
5.7 SID1900 DIPOLE CALIBRATION CERTIFICATE.....	168
5.8 SID2450 DIPOLE CALIBRATION CERTIFICATE.....	179
5.9 SID2600 DIPOLE CALIBRATION CERTIFICATE.....	190
5.10 SID5-6G DIPOLE CALIBRATION CERTIFICATE.....	201
7. EUT PHOTOGRAPHS	214

1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

[IEEE Std C95.1, 2005](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation](#): Portable Devices

[KDB447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB648474 D04, Handset SAR v01r03](#): SAR Evaluation Considerations for Wireless Handsets

[KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

[KDB941225 D01 3G SAR Procedures v03r01](#): 3G SAR MEAUREMENT PROCEDURES

[KDB 941225 D06 Hotspot Mode v02r01](#): SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES

[KDB 941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations for LTE Devices

1.2. Test Description

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power . And Test device is identical prototype.

1.3. General Remarks

Date of receipt of test sample	:	December 16, 2015
Testing commenced on	:	December 16, 2015
Testing concluded on	:	January 20, 2016

1.4. Product Description

The **Bluebird Inc.'s** Model: SF550 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

General Description	
Product Name:	Smart phone
Trade Mark:	FREETEL
Model/Type reference:	FTU152D
Listed Model(s):	FTU152D
Modulation Type:	GMSK for GSM/GPRS and 8PSK for EGPRS;QPSK for WCDMA; QPSK/16QAM for LTE; DSSS/OFDM for WIFI2.4G and OFDM for WIFI5G; GFSK/8DPSK/π/4DQPSK for Bluetooth
Device category:	Portable Device
Exposure category:	General population/uncontrolled environment
EUT Type:	Production Unit
Hardware Version	Y991_MB_V3.1
Software Version:	Freetel_FTU152D_20151208
Power supply:	DC 3.8V by Lithium ion polymer battery(3450mAh) Recharged by DC 5V/1500mA Travel Charger
Hotspot:	Supported, power not reduced when Hotspot open
The EUT is GSM,WCDMA,LTE, mobile phone. the mobile phone is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EDGE class 12 for GSM850, PCS1900, WCDMA Band II, Band IV,Band V, LTE Band2, Band7, Band12, Band17, and Bluetooth, WiFi2.4G, WiFi5.2G, WiFi5.8G and camera functions. For more information see the following datasheet	

Technical Characteristics	
GSM	
Support Networks	GSM, GPRS, EDGE
Support Band	GSM850, PCS1900
Frequency	GSM850: 824.2~848.8MHz GSM1900: 1850.2~1909.8MHz
Power Class:	GSM850:Power Class 5 PCS1900:Power Class 0
Modulation Type:	GMSK for GSM/GPRS; GMSK/8PSK For EGPRS
Antenna Type	Internal Antenna, 0dBi(Max.)
GSM Release Version	R99
GPRS Multislot Class	12
EGPRS Multislot Class	12
DTM Mode	Not Supported
UMTS	
Support Networks	WCDMA RMC12.2K,HSDPA,HSUPA
Operation Band:	WCDMA Band II, Band IV, Band V
Frequency Range	WCDMA Band II: 1852.4 ~ 1907.6MHz WCDMA Band IV: 1712.6 ~ 1782.4MHz WCDMA Band V: 826.4 ~ 846.6MHz
Modulation Type:	QPSK for WCDMA/HSUPA/HSDPA
Power Class:	Class 3
WCDMA Release Version:	R99
HSDPA Release Version:	R8
HSUPA Release Version:	R8
DC-HSUPA Release Version:	Not Supported
Antenna Type	Internal Antenna, 0dBi(Max.)
LTE	
Support Band	LTE Band2, Band4, Band7, Band12, Band17
Frequency Range	LTE Band2:1850 ~ 1910MHz LTE Band4:1710 ~ 1755MHz LTE Band7:2500 ~ 2570MHz LTE Band12:699 ~ 716MHz LTE Band17:704 ~ 716MHz
Power Class:	Class 3
Modulation Type:	QPSK/16QAM
LTE Release Version:	R9
Antenna Type	Internal Antenna, 0dBi(Max.)
WIFI 2.4G	
Supported Standards:	802.11b/802.11g/802.11n(HT20&HT40)
Operation frequency:	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Channel number:	802.11b/802.11g/802.11n(HT20): 11; 802.11n(HT40): 7
Channel separation:	5MHz
Antenna Description	PIFA Antenna, 0dBi(Max.)
WIFI 5G	
Channel Number:	9 Channels for 20MHz Bandwidth (802.11a/n(HT20)) 4 channels for 40MHz Bandwidth (802.11a/n(HT40))
Frequency Range :	5180—5240MHz; 5745—5825MHz
Type of Modulation:	OFDM
Antenna Description	PIFA Antenna, 0dBi(Max.)
Bluetooth	
Bluetooth Version:	V4.0
Modulation:	GFSK(1Mbps) , $\pi/4$ -DQPSK(2Mbps), 8DPSK(3Mbps)
Operation frequency:	2402MHz~2480MHz
Channel number:	40/79
Channel separation:	1MHz/2MHz
Antenna Description	PIFA Antenna, 0dBi(Max.)

1.5. Statement of Compliance

The maximum of results of SAR found during testing for SF550 are follows:

<Highest Reported standalone SAR Summary>

Classment Class	Frequency Band	Head (Report 1g SAR(W/Kg)	Hotspot (Report 1g SAR(W/Kg)	Body-worn (Report 1g SAR(W/Kg)
PCE	GSM 850	0.395	0.870	0.870
	GSM1900	0.136	0.693	0.693
	WCDMA Band V	0.221	0.768	0.768
	WCDMA Band IV	0.145	0.786	0.786
	WCDMA Band II	0.200	0.844	0.844
	LTE Band2	0.118	0.553	0.553
	LTE Band4	0.098	0.401	0.401
	LTE Band7	0.116	0.772	0.772
	LTE Band12	0.130	0.547	0.547
	LTE Band17	0.206	0.850	0.850
DTS	WIFI2.4G	0.182	0.374	0.374
UNI	WIFI5.2G	0.354	0.697	0.697
	WIFI5.8G	0.278	0.328	0.328

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

<Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Classment Class	Highest Reported Simultaneous Transmission 1-g SAR (W/kg)
Hotspot	GSM 850	0.870	PCE	1.567
	WIFI5.2G	0.697	UNI	

2.TEST ENVIRONMENT

2.1. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description

EMC Lab.

: CNAS Registration Number. is L4595.
FCC Registration Number. is 899208.
Industry Canada Registration Number. is 9642A-1.
VCCI Registration Number. is C-4260 and R-3804.
ESMD Registration Number. is ARCB0108.
UL Registration Number. is 100571-492.
TUV SUD Registration Number. is SCN1081.
TUV RH Registration Number. is UA 50296516-001.

2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	18-25 ° C
Humidity:	40-65 %
Atmospheric pressure:	950-1050mbar

2.3. SAR Limits

EXPOSURE LIMITS	FCC Limit (1g Tissue)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average(averaged over the whole body)	0.08	0.4
Spatial Peak(averaged over any 1 g of tissue)	1.6	8.0
Spatial Peak(hands/wrists/ feet/anklesaveraged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Type/Model	Serial Number	Calibration	
				Calibration Date	Calibration Due
PC	Lenovo	G5005	MY42081102	N/A	N/A
Signal Generator	Angilent	E4438C	MY42081396	09/25/2015	09/24/2016
Multimeter	Keithley	MiltiMeter 2000	4059164	10/01/2015	09/30/2016
S-parameter Network Analyzer	Agilent	8753ES	US38432944	09/25/2015	09/24/2016
Wireless Communication Test Set	R & S	CMU200	105988	09/25/2015	09/24/2016
Wideband Radia Communication Tester	R&S	CMW500	1201.0002K50	03/06/2015	03/05/2016
Power Meter	Agilent	E4407B	MY41440754	09/25/2015	09/24/2016
E-Field PROBE	SATIMO	SSE5	SN 17/14 EP220	10/01/2015	09/30/2016
E-Field PROBE	SATIMO	SSE5	SN 17/14 EP221	09/01/2015	08/31/2016
E-Field PROBE	SATIMO	SSE5	SN 13/14 EPG214	10/01/2015	09/31/2016
DIPOLE 750	SATIMO	SID 750	SN 30/14 DIP 0G750-331	10/01/2015	09/30/2016
DIPOLE 835	SATIMO	SID 835	SN 07/14 DIP 0G835-303	10/01/2015	09/30/2016
DIPOLE 1800	SATIMO	SID 1800	SN 07/14 DIP 1G800-301	10/01/2015	9/30/2016
DIPOLE 1900	SATIMO	SID 1900	SN 30/14 DIP 1G900-333	09/01/2015	08/31/2016
DIPOLE 2450	SATIMO	SID 2450	SN 07/14 DIP 2G450-306	10/01/2015	09/30/2016
DIPOLE 2600	SATIMO	SID 2600	SN 07/14 DIP 2G600-336	09/01/2015	08/31/2016
DIPOLE 5-6G	SATIMO	SID 5G	SN 13/14 WAG32	10/01/2015	09/30/2016
COMOSAR OPEN Coaxial Probe	SATIMO	OCPG 68	SN 40/14 OCPG68	10/01/2015	09/30/2016
Communication Antenna	SATIMO	ANTA57	SN 39/14 ANTA57	10/01/2015	09/30/2016
Mobile Phone POSITIONING DEVICE	SATIMO	MSH98	SN 40/14 MSH98	N/A	N/A
DUMMY PROBE	SATIMO	DP60	SN 03/14 DP60	N/A	N/A
SAM PHANTOM	SATIMO	SAM117	SN 40/14 SAM117	N/A	N/A
Simulated Tissue 900 MHz Body and Head	SATIMO	SAM-9-H	SN 21/14 HLD438	Each Time	N/A
Simulated Tissue 1800 MHz For Head	SATIMO	SAM-18-H	SN 21/14 HLF439	Each Time	N/A
Simulated Tissue 1900 MHz For Head	SATIMO	SAM-18-H	SN 21/14 HLF439	Each Time	N/A
Simulated Tissue 2450 MHz Body and Head	SATIMO	SAM-24-H	SN 21/14 HLJ445	Each Time	N/A

Simulated Tissue 2600 MHz For Head	SATIMO	SAM-26-H	SN 21/14 HLJ446	Each Time	N/A
Simulated Tissue 5000 MHz Body and Head	SATIMO	SAM-50-H	SN 18/11	Each Time	N/A
PHANTOM TABLE	SATIMO	TABP98	SN 40/14 TABP98	N/A	N/A
6 AXIS ROBOT	KUKA	KR6-R900	501217	N/A	N/A
High Power Solid State Amplifier (80MHz~1000MHz)	Instruments for Industry	CMC150	M631-0627	09/25/2015	09/24/2016
Medium Power Solid State Amplifier (0.8~4.2GHz)	Instruments for Industry	S41-25	M629-0539	09/25/2015	09/24/2016
Wave Tube Amplifier 48 GHz at 20Watt	Hughes Aircraft Company	1277H02F000	102	09/25/2015	09/24/2016

Note:

- 1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three year extended calibration interval. Each measured dipole is expected to evaluate with following criteria at least on annual interval.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated values;
 - c) The most recent return-loss results, measured at least annually, deviates by no more than 20% from the previous measurement;
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3.SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1. SARMeasurement Set-up

The OPENSAR system for performing compliance tests consist of the following items:

A standard high precision 6-axis robot (KUKA) with controller and software.

KUKA Control Panel (KCP)

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System(VPS).

The stress sensor is composed with mechanical and electronic when the electronic part detects a change on the electro-mechanical switch,It sends an "Emergency signal" to the robot controller that to stop robot's moves

A computer operating Windows XP.

OPENSAR software


Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM phantom enabling testing left-hand right-hand and body usage.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes .

System validation dipoles to validate the proper functioning of the system.

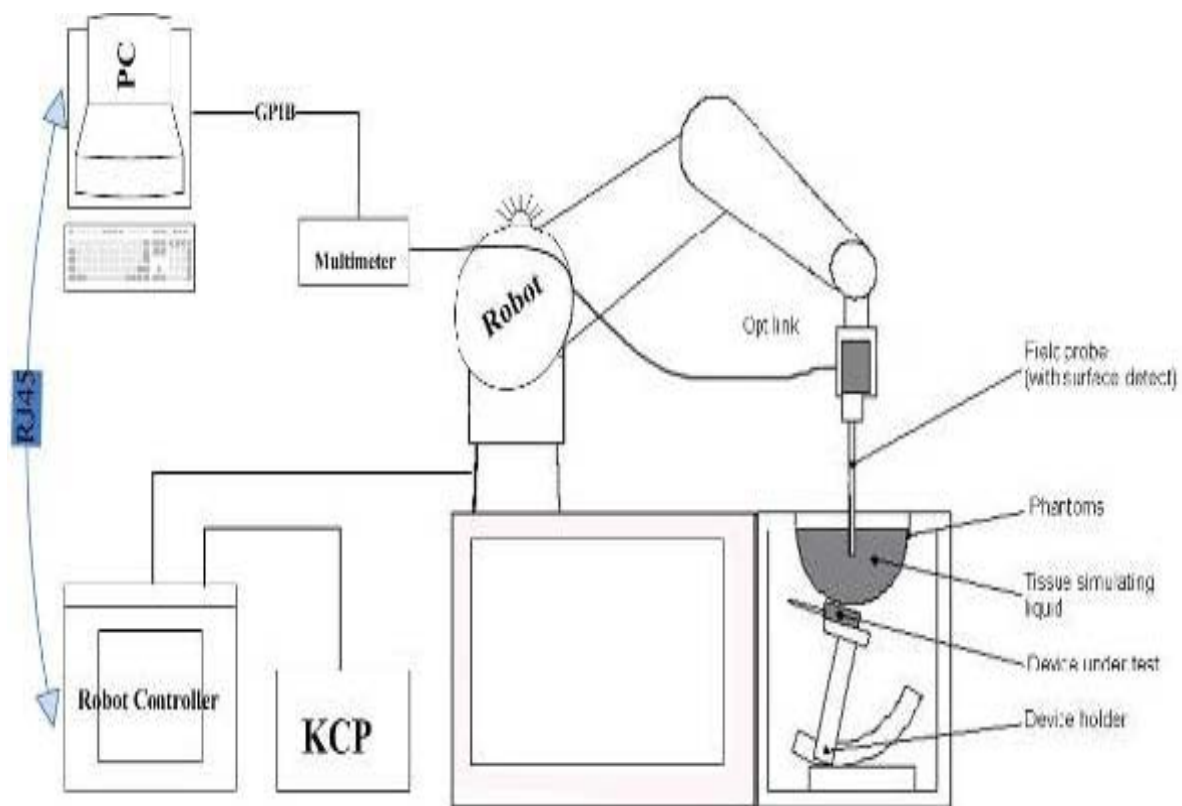

3.2. OPENSAR E-field Probe System

The SAR measurements were conducted with the dosimetric probe EP220 (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

Probe Specification

Construction Symmetrical design with triangular core

Interleaved sensors

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.


Frequency	700 MHz to 3 GHz; Linearity: 0.25dB(700 MHz to 3GHz)
Directivity	0.25 dB in HSL (rotation around probe axis) 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	0.01W/kg to > 100 W/kg; Linearity: 0.25 dB
Dimensions	Overall length: 330 mm (Tip: 16mm) Tip diameter: 5 mm (Body: 8 mm) Distance from probe tip to sensor centers: 2.5 mm
Application	General dosimetry up to 3 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones



Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.


The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

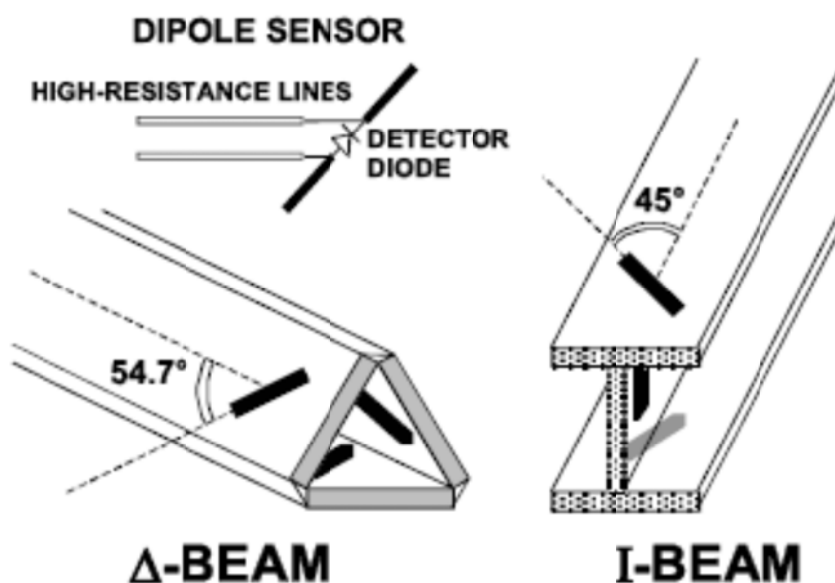

3.3. Phantoms

The SAM Phantom SAM117 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC EN62209-1, EN62209-2:2010. The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

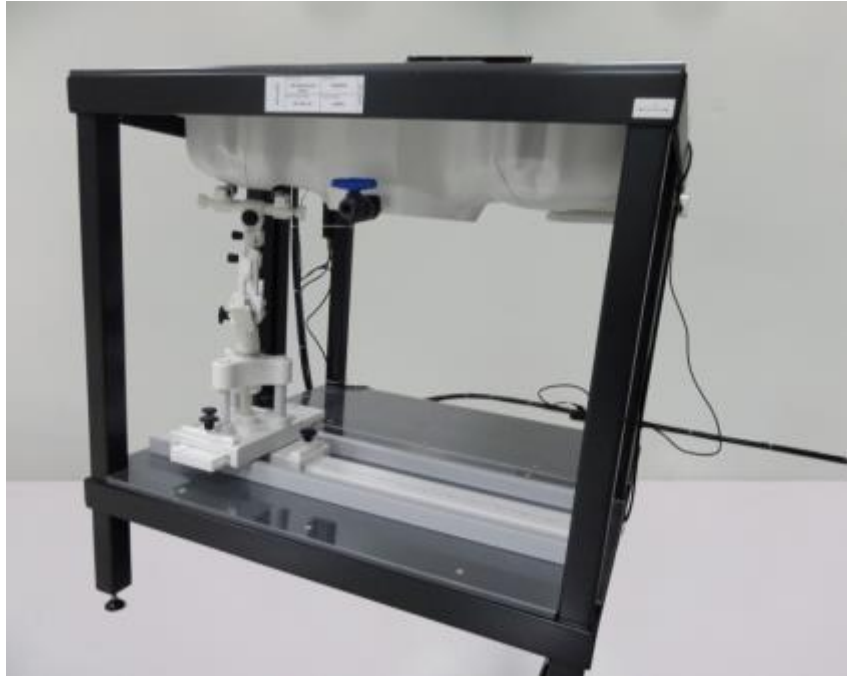

SAM Twin Phantom

3.4. Device Holder

In combination with the Generic Twin Phantom SAM117, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device holder supplied by SATIMO

3.5. Scanning Procedure

The procedure for assessing the peak spatial-average SAR value consists of the following steps

Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

3.6. Data Storage and Evaluation

Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field

dcp_i = diode compression point

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i ($i = x, y, z$)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

- a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

- with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

3.7. Position of the wireless device in relation to the phantom

General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.


The power flow density is calculated assuming the excitation field as a free space field

$$P_{(pwe)} = \frac{E_{tot}^2}{3770} \text{ or } P_{(pwe)} = H_{tot}^2 \cdot 37.7$$

Where P_{pwe} = Equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

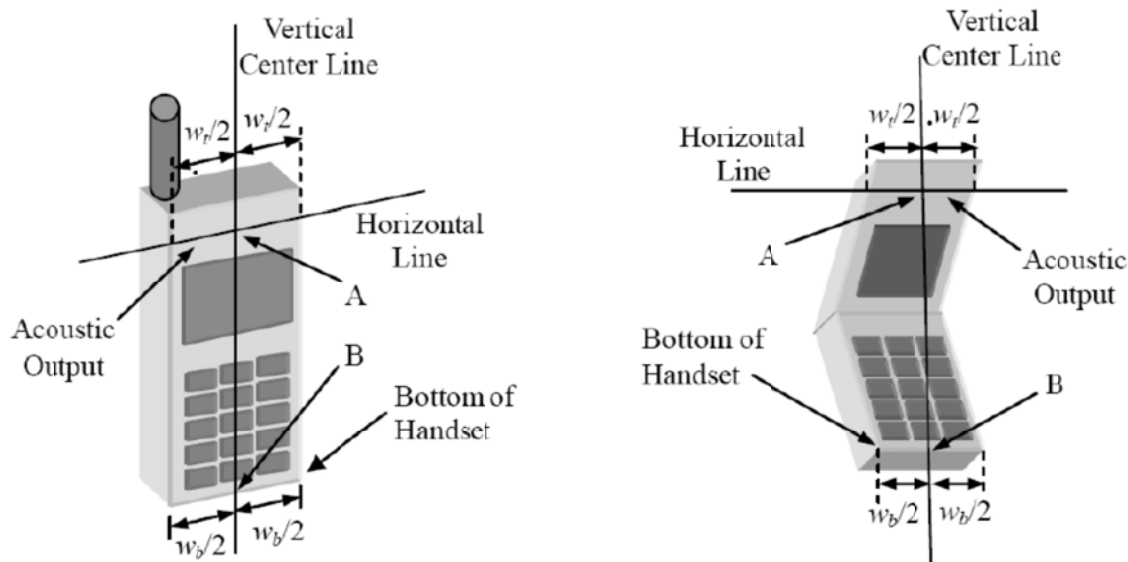


w_t Width of the handset at the level of the acoustic

w_b Width of the bottom of the handset


A Midpoint of the width w_t of the handset at the level of the acoustic output

B Midpoint of the width w_b of the bottom of the handset

Picture 1-a Typical “fixed” case handset Picture 1-b Typical “clam-shell” case handset

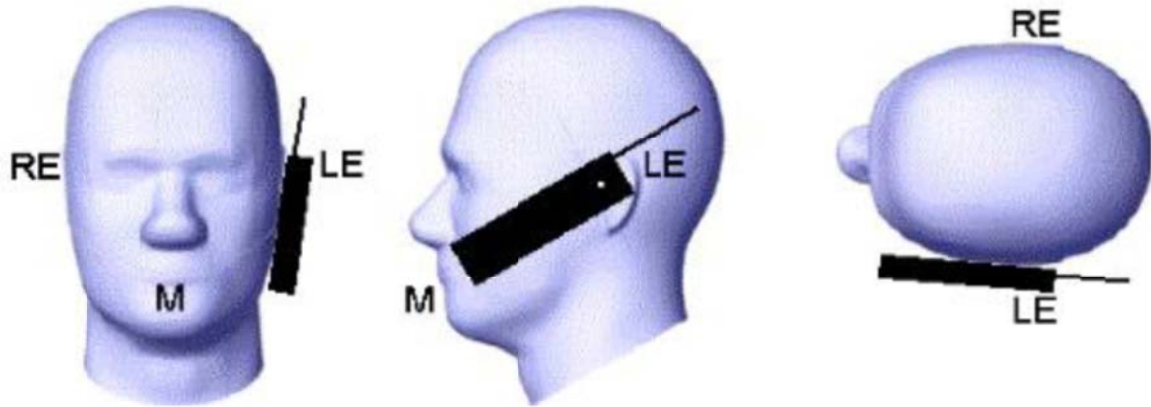

Picture 2 Cheek position of the wireless device on the left side of SAM

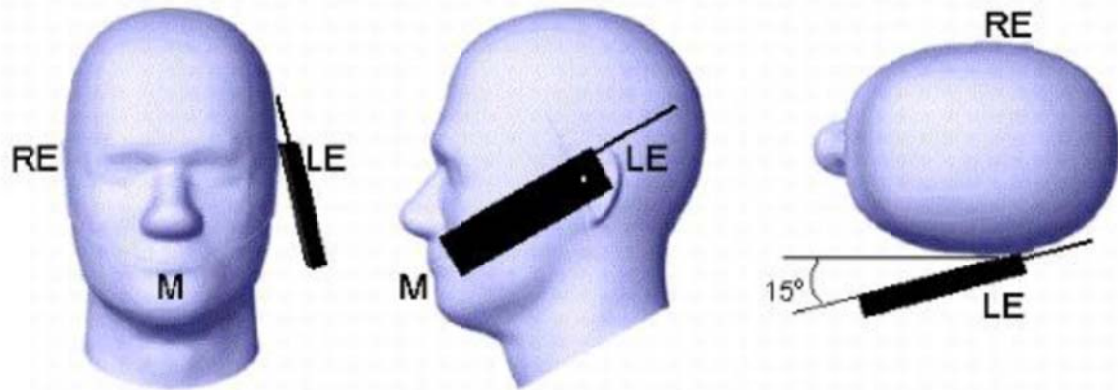

Picture 3 Tilt position of the wireless device on the left side of SAM

For body SAR test we applied to FCC KDB941225 D03v01, KDB447498 D01v06, KDB248227 D01v02r02, KDB616217 D04v01r03.

3.8. Tissue Dielectric Parameters for Head and Body Phantoms

The liquid is consisted of water,salt,Glycol,Sugar,Preventol and Cellulose.The liquid has previously been proven to be suited for worst-case.It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

The composition of the tissue simulating liquid

Ingredient (% Weight)	750MHz		835MHz		1800 MHz		1900 MHz		2450MHz		2600MHz		5000MHz	
	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	39.28	51.3	41.45	52.5	54.5	40.2	54.9	40.4	62.7	73.2	60.3	71.4	65.5	78.6
Preventol	0.10	0.10	0.10	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HEC	1.00	1.00	1.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
DGBE	0.00	0.00	0.00	0.00	45.33	59.31	44.92	59.10	36.80	26.70	39.10	28.40	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17.2	10.7

Target Frequency (MHz)	Head		Body	
	ϵ_r	$\sigma(S/m)$	ϵ_r	$\sigma(S/m)$
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

3.9. Tissue equivalent liquid properties


Dielectric Performance of Head and Body Tissue Simulating Liquid

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue				Liquid Temp.	Test Data
		ϵ_r	σ	ϵ_r	Dev.	σ	Dev.		
750H	750	0.89	42.06	0.86	-3.37	42.21	0.36	21.0	12/16/2015
835H	835	0.89	42.81	0.91	2.25	42.68	-0.30	21.0	12/17/2015
1800H	1800	1.38	41.31	1.36	-1.45	41.13	-0.44	21.0	12/18/2015
1900H	1900	1.42	41.09	1.41	-0.70	41.25	0.39	21.0	12/21/2015
2450H	2450	1.77	39.05	1.79	1.13	39.11	0.15	21.0	12/22/2015
5000H	5200	4.66	36.00	4.63	-0.64	36.18	0.50	21.0	12/23/2015
2600H	2600	1.92	38.35	1.85	-3.65	38.27	-0.21	21.0	12/25/2015
750B	750	0.99	56.57	0.95	-4.04	56.71	0.25	21.0	12/16/2015
835B	835	0.96	53.46	0.94	-2.08	53.24	-0.41	21.0	12/17/2015
1800B	1800	1.38	53.27	1.33	-3.62	53.09	-0.34	21.0	12/18/2015
1900B	1900	1.54	54.20	1.52	-1.30	54.46	0.48	21.0	12/21/2015
2450B	2450	1.93	52.97	1.94	0.52	52.78	-0.36	21.0	12/22/2015
5000B	5000	5.30	49.00	5.25	-0.94	49.66	1.35	21.0	12/23/2015
2600B	2600	2.19	51.81	2.24	2.28	52.36	1.06	21.0	12/25/2015

3.10. System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

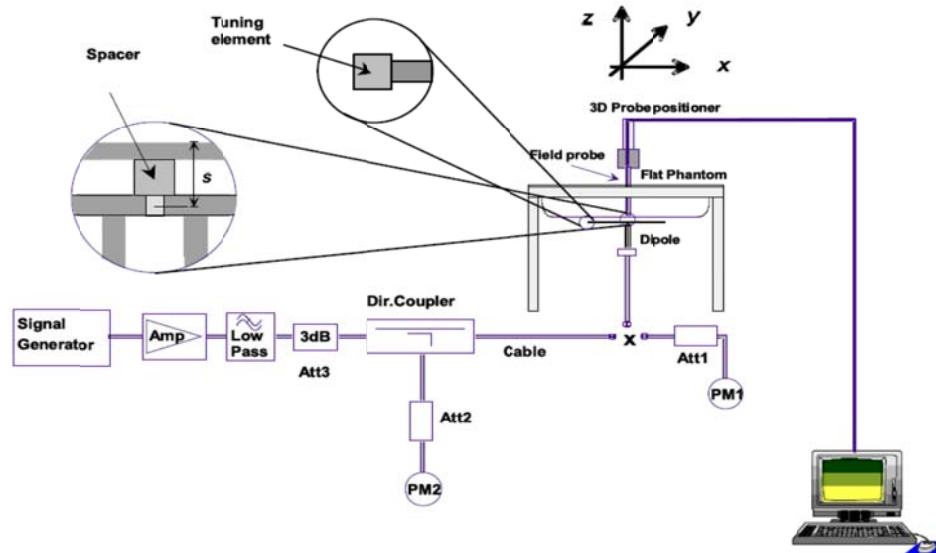

The output power on dipole port must be calibrated to 20 dBm (100mW) before dipole is connected.



Photo of Dipole Setup

Mixture Type	Frequency (MHz)	Power	SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	Drift (%)	1W Target		Difference percentage		Liquid Temp	Date
						SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	1g	10g		
Head	750	100 mW	0.840	0.551	2.15	8.38	5.53	0.24	-0.36	21.0	12/16/2015
		Normalize to 1 Watt	8.40	5.51							
Body	750	100 mW	0.875	0.574	-0.87	8.77	5.78	-0.23	-0.69	21.0	12/16/2015
		Normalize to 1 Watt	8.75	5.74							
Head	835	100 mW	0.955	0.623	3.01	9.60	6.20	-0.52	0.48	21.0	12/17/2015
		Normalize to 1 Watt	9.55	6.23							
Body	835	100 mW	0.987	0.634	1.45	9.90	6.39	-0.30	-0.78	21.0	12/17/2015
		Normalize to 1 Watt	9.87	6.34							
Head	1800	100 mW	3.816	2.027	0.78	38.13	20.20	0.08	0.35	21.0	12/18/2015
		Normalize to 1 Watt	38.16	20.27							
Body	1800	100 mW	3.895	2.059	-0.44	39.03	20.65	-0.20	-0.29	21.0	12/18/2015
		Normalize to 1 Watt	38.95	20.59							
Head	1900	100 mW	3.977	2.014	2.16	39.84	20.20	-0.18	-0.30	21.0	12/21/2015
		Normalize to 1 Watt	39.77	20.14							
Body	1900	100 mW	4.338	2.146	0.97	43.33	21.59	0.12	-0.60	21.0	12/21/2015
		Normalize to 1 Watt	43.38	21.46							
Head	2450	100 mW	5.392	2.422	-3.14	53.89	24.15	0.06	0.29	21.0	12/22/2015
		Normalize to 1 Watt	53.92	24.22							
Body	2450	100 mW	5.457	2.463	4.32	54.65	24.58	-0.15	0.20	21.0	12/22/2015
		Normalize to 1 Watt	54.57	24.63							
Head	5200	100 mW	16.264	5.614	-0.07	163.88	57.29	-0.76	-2.01	21.0	12/23/2015
		Normalize to 1 Watt	162.64	56.14							
Body	5200	100 mW	15.439	5.332	2.56	158.49	55.40	-2.59	-3.75	21.0	12/23/2015
		Normalize to 1 Watt	154.39	53.32							
Head	5800	100 mW	18.006	5.893	1.58	181.20	61.50	-0.63	-4.18	21.0	12/24/2015
		Normalize to 1 Watt	180.06	58.93							
Body	5800	100 mW	18.971	5.827	-0.33	183.06	61.62	3.63	-2.19	21.0	12/24/2015
		Normalize to 1 Watt	189.71	60.27							
Head	2600	100 mW	5.473	2.341	1.64	56.19	24.08	-3.13	-2.78	21.0	12/25/2015
		Normalize to 1 Watt	54.73	23.41							
Body	2600	100 mW	5.488	2.439	3.72	57.49	24.88	-4.57	-1.97	21.0	12/25/2015
		Normalize to 1 Watt	54.88	24.39							

3.11. SAR measurement procedure

The measurement procedures are as follows:

3.11.1 Conducted power measurement

- a. For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- b. Read the WWAN RF power level from the base station simulator.
- c. For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- d. Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

3.11.2 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using CMU200 the power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5. the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

3.11.3 UMTS Test Configuration

3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.³ This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

1)

2) Body-Worn Accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

3) Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 2: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Rightarrow \beta_{hs} = 30/15 * \beta_c$ Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices" section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Table 3: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Rightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

3.11.4 LTE Test Configuration

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.⁸ When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.⁹

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

3.11.5 WIFI Test Configuration

The SAR measurement and test reduction procedures are structured according to either the DSSS or OFDM transmission mode configurations used in each standalone frequency band and aggregated band. For devices that operate in exposure configurations that require multiple test positions, additional SAR test reduction may be applied. The maximum output power specified for production units, including tune-up tolerance, are used to determine initial SAR test requirements for the 802.11 transmission modes in a frequency band. SAR is measured using the highest measured maximum output power channel for the initial test configuration. SAR measurement and test reduction for the remaining 802.11 modes and test channels are determined according to measured or specified maximum output power and reported SAR of the initial measurements. The general test reduction and SAR measurement approaches are summarized in the following:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. Channels with measured maximum output power within $\frac{1}{4}$ dB are considered to have the same maximum output.
2. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, an "initial test configuration" is first determined for each standalone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units.
 - a. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
 - b. SAR is measured for OFDM configurations using the initial test configuration procedures. Additional frequency band specific SAR test reduction may be considered for individual frequency bands
 - c. Depending on the reported SAR of the highest maximum output power channel tested in the initial test configuration, SAR test reduction may apply to subsequent highest output channels in the initial test configuration to reduce the number of SAR measurements.
3. The Initial test configuration does not apply to DSSS. The 2.4 GHz band SAR test requirements and 802.11b DSSS procedures are used to establish the transmission configurations required for SAR measurement.
4. An "initial test position" is applied to further reduce the number of SAR tests for devices operating in next to the ear, UMPC mini-tablet or hotspot mode exposure configurations that require multiple test positions .
 - a. SAR is measured for 802.11b according to the 2.4 GHz DSSS procedure using the exposure condition established by the initial test position.
 - b. SAR is measured for 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration. 802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel.
5. The Initial test position does not apply to devices that require a fixed exposure test position. SAR is measured in a fixed exposure test position for these devices in 802.11b according to the 2.4 GHz DSSS procedure or in 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration procedures .
6. The "subsequent test configuration" procedures are applied to determine if additional SAR measurements are required for the remaining OFDM transmission modes that have not been tested in the initial test configuration.

SAR test exclusion is determined according to reported SAR in the initial test configuration and maximum output power specified or measured for these other OFDM configurations.

2.4 GHz and 5GHz SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in section 5.2.2.

1. 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- a. When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

1. 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3). SAR is not required for the following 2.4 GHz OFDM conditions.

- a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration
- b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

2. SAR Test Requirements for OFDM Configurations

When SAR measurement is required for 802.11 a/g/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements.²⁰ In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

3. OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures (section 4). When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- a. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- b. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- c. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- d. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

- a. Channels with measured maximum output power within $\frac{1}{4}$ dB of each other are considered to have the same maximum output.
- b. When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement.

- c. When there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode.²³ For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

4. Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, the procedures in section 5.3.2 are applied to determine the test configuration. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- a. When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- b. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- c. The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - 1). SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - 2). SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested.
 - a) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
 - d. SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - 1) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - 2) replace "initial test configuration" with "all tested higher output power configurations."

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Power Results

Max Conducted power measurement results and power drift from tune-up tolerance provide by manufacturer:

Conducted power measurement results for GSM850/PCS1900

GSM 850		Burst Conducted power (dBm)			/	Average power (dBm)		
		Channel/Frequency(MHz)				Channel/Frequency(MHz)		
		128/824.2	190/836.6	251/848.8		128/824.2	190/836.6	251/848.8
GSM		32.77	32.90	32.72	-9.03dB	23.74	23.87	23.69
GPRS (GMSK)	1TX slot	32.59	32.76	32.79	-9.03dB	23.56	23.73	23.76
	2TX slot	30.24	30.26	30.15	-6.02dB	24.22	24.24	24.13
	3TX slot	29.04	29.09	28.97	-4.26dB	24.78	24.83	24.71
	4TX slot	27.13	27.06	27.11	-3.01dB	24.12	24.05	24.1
EGPRS (8PSK)	1TX slot	26.33	26.39	26.41	-9.03dB	17.3	17.36	17.38
	2TX slot	23.67	23.78	23.65	-6.02dB	17.65	17.76	17.63
	3TX slot	22.16	22.20	22.14	-4.26dB	17.9	17.94	17.88
	4TX slot	20.43	20.47	20.53	-3.01dB	17.42	17.46	17.52
GSM 1900		Burst Conducted power (dBm)			/	Average power (dBm)		
		Channel/Frequency(MHz)				Channel/Frequency(MHz)		
		512/ 1850.2	661/ 1880	810/ 1909.8		512/ 1850.2	661/ 1880	810/ 1909.8
GSM		29.88	30.01	29.92	-9.03dB	20.85	20.98	20.89
GPRS (GMSK)	1TX slot	29.74	29.81	29.69	-9.03dB	20.71	20.78	20.66
	2TX slot	27.47	27.70	27.63	-6.02dB	21.45	21.68	21.61
	3TX slot	25.94	26.14	26.08	-4.26dB	21.68	21.88	21.82
	4TX slot	24.48	24.65	24.53	-3.01dB	21.47	21.64	21.52
EGPRS (8PSK)	1TX slot	25.61	25.68	25.55	-9.03dB	16.58	16.65	16.52
	2TX slot	23.23	23.36	23.25	-6.02dB	17.21	17.34	17.23
	3TX slot	21.64	21.71	21.53	-4.26dB	17.38	17.45	17.27
	4TX slot	19.40	19.44	19.47	-3.01dB	16.39	16.43	16.46

Notes:

1. Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.00dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.00dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.00dB

2. According to the conducted power as above, the GPRS measurements are performed with 3Txslot for GPRS850 and 3Txslot GPRS1900.

Conducted Power Measurement Results(WCDMA Band II/IV/V)

Item	band	WCDMA Band II result (dBm)			WCDMA Band IV result (dBm)			WCDMA Band V result (dBm)		
		Channel/Frequency(MHz)			Channel/Frequency(MHz)			Channel/Frequency(MHz)		
	ARFCN	9262/ 1852.4	9400/ 1880	9538/ 1907.6	1313/ 1712.6	1450/ 1740.0	1512/ 1752.4	4132/ 826.4	4183/ 836.6	4233/ 846.6
RMC	12.2kbps RMC	23.63	23.72	23.62	23.08	23.28	23.21	23.65	23.71	23.62
	64kbps RMC	23.61	23.64	23.59	22.99	23.22	23.13	23.60	23.70	23.57
	144kbps RMC	23.57	23.61	23.54	22.95	23.15	23.08	23.51	23.63	23.54
	384kbps RMC	23.57	23.58	23.50	22.88	23.09	23.06	23.51	23.58	23.50
HSDP A	Sub – Test 1	23.30	23.44	23.49	22.90	23.03	22.89	23.38	23.43	23.48
	Sub – Test 2	22.45	22.67	22.54	22.07	22.23	22.19	22.52	22.69	22.50
	Sub – Test 3	21.92	22.03	21.96	21.52	21.69	21.53	21.98	22.08	22.00
	Sub – Test 4	21.49	21.66	21.65	21.02	21.19	21.18	21.50	21.65	21.58
HSUP A	Sub – Test 1	22.66	22.69	22.59	22.17	22.29	22.18	22.59	22.79	22.65
	Sub – Test 2	21.38	21.41	21.32	20.86	20.96	20.93	21.39	21.37	21.39
	Sub – Test 3	22.04	22.09	22.01	21.58	21.54	21.67	22.06	22.05	22.03
	Sub – Test 4	20.91	21.09	21.05	20.50	20.51	20.51	20.85	21.08	20.98
	Sub – Test 5	21.40	21.39	21.36	20.97	21.06	20.96	21.37	21.47	21.38

Note: When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

LTE Band2

BW (MHz)	Frequency (MHz)	RB Configuration		Average Power [dBm]	
		Size	Offset	QPSK	16QAM
1.4	1850.7	1	0	21.98	21.21
		1	3	22.05	21.35
		1	5	21.95	21.22
		3	0	22.08	21.22
		3	2	22.06	21.13
		3	3	22.07	21.18
		6	0	21.14	20.04
	1880.0	1	0	22.06	21.35
		1	3	22.12	21.44
		1	5	22.03	21.34
		3	0	22.14	21.11
		3	2	22.04	21.06
		3	3	22.11	21.13
		6	0	21.19	20.03
	1909.3	1	0	21.60	20.63
		1	3	21.62	20.75
		1	5	21.53	20.60
		3	0	21.57	20.50
		3	2	21.53	20.46
		3	3	21.51	20.46
		6	0	21.17	20.07
3	1851.5	1	0	22.49	21.24
		1	7	22.58	21.32
		1	14	22.49	21.22
		8	0	21.63	20.18
		8	4	21.61	20.19
		8	7	21.63	20.16
		15	0	21.60	20.09
	1880.0	1	0	22.51	21.24
		1	7	22.60	21.35
		1	14	22.48	21.21
		8	0	21.64	20.20
		8	4	21.62	20.18
		8	7	21.65	20.18
		15	0	21.63	20.14
	1908.5	1	0	22.10	20.79
		1	7	22.16	20.81
		1	14	21.77	20.64
		8	0	21.62	20.13
		8	4	21.61	20.18
		8	7	21.63	20.18
		15	0	21.59	20.16
5	1852.5	1	0	22.61	21.45
		1	12	22.71	21.49
		1	24	22.59	21.38
		12	0	21.70	20.35
		12	6	21.70	20.34
		12	13	21.70	20.32
		25	0	21.65	20.21
	1880.0	1	0	22.64	21.43
		1	12	22.63	21.50
		1	24	22.56	21.36
		12	0	21.69	20.33
		12	6	21.69	20.33
		12	13	21.68	20.32
		25	0	21.64	20.19
	1907.5	1	0	22.28	20.59
		1	12	22.20	20.61
		1	24	21.84	20.40
		12	0	21.15	20.17
		12	6	21.13	20.14
		12	13	21.11	20.09
		25	0	21.11	20.11

10	1855.0	1	0	22.59	21.33
		1	24	22.61	21.33
		1	49	22.61	21.28
		25	0	21.64	20.18
		25	12	21.62	20.13
		25	25	21.60	20.13
		50	0	21.64	20.17
	1880.0	1	0	22.47	21.28
		1	24	22.59	21.35
		1	49	22.24	21.07
		25	0	21.62	20.16
		25	12	21.62	20.15
		25	25	21.62	20.14
		50	0	21.65	20.19
	1905.0	1	0	21.60	20.54
		1	24	22.01	20.89
		1	49	21.40	20.43
		25	0	21.13	20.15
25		12	21.11	20.11	
25		25	21.09	20.08	
50		0	21.13	20.14	
15	1857.5	1	0	22.62	21.35
		1	37	22.70	21.40
		1	74	22.67	21.28
		37	0	21.78	20.24
		37	18	21.82	20.26
		37	38	21.82	20.23
		75	0	21.84	20.26
	1880.0	1	0	22.57	21.31
		1	37	22.58	21.38
		1	74	22.54	21.29
		37	0	21.83	20.25
		37	18	21.73	20.22
		37	38	21.70	20.21
		75	0	21.80	20.26
	1902.5	1	0	22.38	21.11
		1	37	21.80	20.66
		1	74	21.81	20.70
		37	0	21.31	20.21
37		18	21.14	20.08	
37		38	21.27	20.03	
75		0	21.28	20.09	
20	1860.0	1	0	22.74	21.40
		1	49	22.81	21.36
		1	99	22.62	21.30
		50	0	21.70	20.18
		50	25	21.63	20.12
		50	50	21.65	20.10
		100	0	21.65	20.13
	1880.0	1	0	22.83	21.40
		1	49	22.69	21.36
		1	99	22.67	21.29
		50	0	21.68	20.14
		50	25	21.67	20.18
		50	50	21.68	20.20
		100	0	21.67	20.16
	1900.0	1	0	22.73	21.41
		1	49	21.78	20.71
		1	99	21.85	20.78
		50	0	21.44	20.32
50		25	21.23	20.14	
50		50	21.17	20.08	
100		0	21.34	20.18	

LTE Band4

BW (MHz)	Frequency (MHz)	RB Configuration		Average Power [dBm]	
		Size	Offset	QPSK	16QAM
1.4	1710.7	1	0	22.40	21.66
		1	3	22.47	21.78
		1	5	22.34	21.65
		3	0	22.44	21.58
		3	2	22.42	21.53
		3	3	22.42	21.54
		6	0	21.47	20.45
	1732.5	1	0	21.37	21.66
		1	3	21.34	21.66
		1	5	21.36	21.65
		3	0	21.41	21.35
		3	2	21.33	20.32
		3	3	21.36	20.34
		6	0	21.23	20.17
	1754.3	1	0	21.62	20.72
		1	3	21.53	20.70
		1	5	21.53	20.61
		3	0	21.62	20.60
		3	2	21.56	20.51
		3	3	21.52	20.51
3	1711.5	6	0	21.17	20.10
		1	0	22.38	21.67
		1	7	22.36	21.65
		1	14	22.16	21.44
		8	0	21.47	20.54
		8	4	21.39	20.50
	1732.5	8	7	21.36	20.42
		15	0	21.40	20.38
		1	0	22.27	21.48
		1	7	22.32	21.56
		1	14	22.25	21.49
		8	0	21.40	20.42
	1753.5	8	4	21.40	20.45
		8	7	21.40	20.41
		15	0	21.39	20.33
		1	0	22.83	21.99
		1	7	22.69	21.84
		1	14	22.50	21.72
5	1712.0	8	0	21.83	20.73
		8	4	21.75	20.64
		8	7	21.70	20.59
		15	0	21.65	20.60
		1	0	22.43	21.82
		1	12	22.31	21.67
	1732.5	1	24	21.99	21.32
		12	0	21.44	20.57
		12	6	21.34	20.47
		12	13	21.23	20.36
		25	0	21.26	20.27
		1	0	22.37	21.64
	1752.5	1	12	22.36	21.68
		1	24	22.28	21.62
		12	0	21.41	20.51
		12	6	21.40	20.51
		12	13	21.39	20.51
		25	0	21.32	20.36
		1	0	22.93	21.91
		1	12	22.89	21.74
		1	24	22.63	21.44
		12	0	21.92	20.91
		12	6	21.82	20.81
		12	13	21.71	20.68
		25	0	21.77	20.75

10	1715.0	1	0	22.92	21.61
		1	24	22.72	21.19
		1	49	22.24	20.47
		25	0	22.19	20.17
		25	12	21.96	20.24
		25	25	21.64	20.12
		50	0	21.89	20.08
	1732.5	1	0	22.37	21.62
		1	24	22.27	21.51
		1	49	22.33	21.61
		25	0	21.36	20.34
		25	12	21.34	20.33
		25	25	21.33	20.34
		50	0	21.24	20.16
	1750.0	1	0	22.95	21.23
		1	24	22.96	21.24
		1	49	22.48	20.79
		25	0	21.41	20.30
		25	12	21.34	20.55
		25	25	21.28	20.34
15	1717.5	50	0	21.17	20.18
		1	0	22.45	21.84
		1	37	22.22	21.71
		1	74	22.10	21.58
		37	0	21.46	20.64
		37	18	21.31	20.55
	1732.5	37	38	21.13	20.34
		75	0	21.09	20.12
		1	0	22.57	21.75
		1	37	22.26	21.51
		1	74	22.50	21.78
		37	0	21.55	20.46
	1747.5	37	18	21.41	20.36
		37	38	21.46	20.42
		75	0	21.13	20.28
		1	0	22.49	21.50
		1	37	22.33	21.28
		1	74	22.21	21.19
20	1720.0	37	0	21.39	20.99
		37	18	21.51	20.48
		37	38	21.34	20.35
		75	0	21.13	20.17
		1	0	22.40	21.60
		1	49	21.35	20.44
	1732.5	1	99	21.30	20.47
		50	0	21.86	20.82
		50	25	21.26	20.21
		50	50	21.19	20.12
		100	0	21.24	20.30
		1	0	22.55	21.05
	1745.0	1	49	21.37	20.49
		1	99	21.27	20.96
		50	0	21.51	20.46
		50	25	21.34	20.31
		50	50	21.48	20.47
		100	0	21.51	20.36
	1745.0	1	0	22.48	21.03
		1	49	21.44	20.56
		1	99	21.47	20.46
		50	0	21.55	20.39
		50	25	21.47	20.11
		50	50	21.35	20.18
		100	0	21.24	20.14

LTE Band7

BW (MHz)	Frequency (MHz)	RB Configuration		Average Power [dBm]	
		Size	Offset	QPSK	16QAM
5	2502.5	1	0	22.19	21.57
		1	12	22.39	21.76
		1	24	22.28	21.64
		12	0	21.41	20.61
		12	6	21.42	20.63
		12	13	21.49	20.65
		25	0	21.46	20.51
	2535.0	1	0	22.84	21.67
		1	12	22.96	21.78
		1	24	22.86	21.66
		12	0	21.80	20.79
		12	6	21.81	20.79
		12	13	21.82	20.82
		25	0	21.80	20.77
	2567.5	1	0	22.55	21.64
		1	12	22.76	21.78
		1	24	22.81	21.84
		12	0	21.76	20.79
		12	6	21.82	20.85
		12	13	21.92	20.92
		25	0	21.76	20.82
10	2505.0	1	0	22.35	21.68
		1	24	22.50	21.80
		1	49	22.46	21.76
		25	0	21.59	20.59
		25	12	21.60	20.62
		25	25	21.60	20.61
		50	0	21.61	20.62
	2535.0	1	0	22.73	21.96
		1	24	22.69	21.97
		1	49	22.39	21.88
		25	0	21.82	20.76
		25	12	21.92	20.82
		25	25	21.89	20.83
		50	0	21.88	20.81
	2565.0	1	0	22.31	21.63
		1	24	22.62	21.88
		1	49	22.79	21.91
		25	0	21.54	20.54
		25	12	21.65	20.65
		25	25	21.82	20.82
		1	0	21.68	20.72
15	2507.5	1	0	22.40	21.71
		1	37	22.63	21.92
		1	74	22.42	21.70
		37	0	21.72	20.67
		37	18	21.74	20.69
		37	38	21.72	20.65
		75	0	21.74	20.68
	2535.0	1	0	22.72	21.89
		1	37	22.46	21.99
		1	74	22.41	21.93
		37	0	22.04	20.87
		37	18	22.01	20.95
		37	38	21.88	20.93
		75	0	22.07	20.93
	2562.5	1	0	22.22	21.41
		1	37	22.51	21.68
		1	74	22.93	21.85
		37	0	21.45	20.43
		37	18	21.62	20.56
		37	38	21.86	20.82
		75	0	21.70	20.64

20	2510.0	1	0	22.56	21.76
		1	49	22.73	21.82
		1	99	22.57	21.65
		50	0	21.74	20.69
		50	25	21.66	20.63
		50	50	21.59	20.54
		100	0	21.64	20.60
	2535.0	1	0	22.81	21.85
		1	49	22.51	21.87
		1	99	22.38	21.73
		50	0	21.86	20.74
		50	25	21.92	20.84
		50	50	21.81	20.83
		100	0	21.90	20.80
	2560	1	0	22.33	21.66
		1	49	22.41	21.64
		1	99	22.85	21.79
		50	0	21.35	20.39
		50	25	21.46	20.47
		50	50	21.66	20.69
		100	0	21.51	20.51

LTE Band12

BW (MHz)	Frequency (MHz)	RB Configuration		Average Power [dBm]	
		Size	Offset	QPSK	16QAM
1.4	699.7	1	0	21.95	21.21
		1	3	22.07	21.44
		1	5	21.99	21.35
		3	0	22.07	21.21
		3	2	22.10	21.22
		3	3	22.15	21.27
		6	0	21.06	20.08
	707.5	1	0	22.51	21.85
		1	3	22.60	21.92
		1	5	22.55	21.86
		3	0	22.59	21.53
		3	2	22.57	21.56
		3	3	22.62	21.61
		6	0	21.55	20.49
	715.3	1	0	22.23	21.46
		1	3	22.25	21.55
		1	5	22.13	21.34
		3	0	22.29	21.32
		3	2	22.25	21.25
		3	3	22.21	21.26
		6	0	21.29	20.42
3	700.5	1	0	21.92	21.23
		1	7	22.18	21.55
		1	14	22.16	21.55
		8	0	21.12	20.25
		8	4	21.24	20.38
		8	7	21.30	20.41
		15	0	21.22	20.24
	707.5	1	0	22.43	21.71
		1	7	22.62	21.92
		1	14	22.52	21.81
		8	0	21.64	20.67
		8	4	21.66	20.71
		8	7	21.68	20.73
		15	0	21.63	20.57
	715.3	1	0	22.30	21.74
		1	7	22.25	21.62
		1	14	22.01	21.34
		8	0	21.37	20.41
		8	4	21.30	20.29
		8	7	21.24	20.24
		15	0	21.25	20.31
5	701.5	1	0	22.06	21.45
		1	12	22.37	21.82
		1	24	22.45	21.89
		12	0	21.29	20.48
		12	6	21.40	20.57
		12	13	21.55	20.77
		25	0	21.35	20.46
	707.5	1	0	22.54	21.92
		1	12	22.56	21.99
		1	24	22.58	21.98
		12	0	21.68	20.81
		12	6	21.71	20.83
		12	13	21.52	20.71
		25	0	21.59	20.66
	714.5	1	0	22.54	21.62
		1	12	22.48	21.53
		1	24	22.12	21.04
		12	0	21.59	20.69
		12	6	21.46	20.57
		12	13	21.28	20.38
		25	0	21.42	20.53

10	704	1	0	22.03	21.33
		1	24	22.51	21.84
		1	49	22.49	21.85
		25	0	21.41	20.48
		25	12	21.59	20.64
		25	25	21.67	20.70
	707.5	50	0	21.55	20.58
		1	0	22.37	21.76
		1	24	22.46	21.81
		1	49	22.40	21.81
		25	0	21.60	20.66
		25	12	21.61	20.66
	713.5	25	25	21.51	20.57
		50	0	21.56	20.57
		1	0	22.61	21.98
		1	24	22.49	21.92
		1	49	22.10	21.43
		25	0	21.62	20.70
		25	12	21.53	20.62
		25	25	21.43	20.52
		50	0	21.55	20.65

LTE Band17

BW (MHz)	Frequency (MHz)	RB Configuration		Average Power [dBm]	
		Size	Offset	QPSK	16QAM
5	706.5	1	0	22.18	21.78
		1	12	22.40	21.88
		1	24	22.28	21.73
		12	0	21.50	20.69
		12	6	21.49	20.67
		12	13	21.51	20.67
		25	0	21.46	20.54
	710	1	0	22.53	21.55
		1	12	22.57	21.61
		1	24	22.32	21.41
		12	0	21.56	20.63
		12	6	21.54	20.64
		12	13	21.56	20.66
		25	0	21.49	20.58
	713.5	1	0	22.31	21.60
		1	12	22.30	21.57
		1	24	21.95	21.09
		12	0	21.48	20.61
		12	6	21.40	20.52
		12	13	21.29	20.38
		25	0	21.35	20.48
10	709	1	0	22.42	21.78
		1	24	22.51	21.84
		1	49	22.21	21.58
		25	0	21.48	20.57
		25	12	21.51	20.57
		25	25	21.51	20.62
		50	0	21.46	20.49
	710	1	0	22.45	21.77
		1	24	22.46	21.82
		1	49	22.10	21.41
		25	0	21.48	20.57
		25	12	21.52	20.60
		25	25	21.45	20.53
		50	0	21.49	20.52
	711	1	0	22.56	21.93
		1	24	22.45	21.93
		1	49	22.04	21.42
		25	0	21.55	20.62
		25	12	21.54	20.64
		25	25	21.37	20.48
		50	0	21.47	20.57

Conducted power measurement of WLAN2.4G

Mode	Channel	Frequency (MHz)	Worst case Data rate of worst case	Conducted Average Output Power (dBm)
802.11b	1	2412	1Mbps	13.47
	6	2437	1Mbps	13.64
	11	2462	1Mbps	13.31
802.11g	1	2412	6Mbps	11.17
	6	2437	6Mbps	11.72
	11	2462	6Mbps	11.59
802.11n HT20	1	2412	6.5 Mbps	10.80
	6	2437	6.5 Mbps	10.09
	11	2462	6.5 Mbps	10.52
802.11n HT40	3	2422	13.5 Mbps	9.29
	6	2437	13.5 Mbps	9.10
	9	2452	13.5 Mbps	8.81

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

The conducted power measurement results for WLAN(5.2G)

Mode	Channel	Frequency (MHz)	Conducted Output Power(dBm)
802.11a	36	5180	14.03
	40	5200	13.63
	48	5240	13.60
802.11n(20MHz)	36	5180	13.60
	40	5200	13.43
	48	5240	13.45
802.11n(40MHz)	38	5190	13.50
	46	5230	13.42
802.11ac(VHT20)	36	5180	14.57
	40	5200	14.06
	48	5240	13.70
802.11ac(VHT40)	38	5190	13.43
	46	5230	13.48
802.11ac(VHT80)	42	5210	14.06

The conducted power measurement results for WLAN(5.8G)

Mode	Channel	Frequency (MHz)	Conducted Output Power(dBm)
802.11a	36	5180	14.17
	40	5200	14.45
	48	5240	14.37
802.11n(20MHz)	36	5180	14.03
	40	5200	14.22
	48	5240	14.22
802.11n(40MHz)	38	5190	14.00
	46	5230	14.08
802.11ac(VHT20)	36	5180	13.83
	40	5200	13.86
	48	5240	14.44
802.11ac(VHT40)	38	5190	14.44
	46	5230	13.89
802.11ac(VHT80)	42	5210	13.98

Conducted power measurement of BluetoothV4.0

Mode	channel	Frequency (MHz)	Conducted output power	
			Average (dBm)	Peak (dBm)
BT-LE	0	2402	-1.32	0.61
	19	2440	-0.11	2.04
	39	2480	-3.33	-1.01
GFSK	0	2402	4.77	5.93
	39	2441	4.92	6.90
	78	2480	4.34	5.68
$\pi/4$ -DQPSK	0	2402	3.38	4.46
	39	2441	4.73	6.17
	78	2480	3.12	4.47
8DPSK	0	2402	3.06	4.51
	39	2441	4.71	6.22
	78	2480	3.23	4.57

Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Bluetooth Turn up Power (dBm)	Separation Distance (mm)	Frequency (GHz)	Exclusion Thresholds
5.0	5	2.45	1.0

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 1.0 which is < 3 , SAR testing is not required.

4.2. Manufacturing tolerance

GSM Speech

GSM 850 (GMSK) (Burst Average Power)			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	33.0	33.0	33.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
GSM 1900 (GMSK) (Burst Average Power)			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	30.0	30.0	30.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

GSM 850 GPRS (GMSK) (Burst Average Power)				
Channel		128	190	251
1 Txslot	Target (dBm)	33.0	33.0	33.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
2 Txslot	Target (dBm)	31.0	31.0	31.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
3 Txslot	Target (dBm)	28.5	28.5	28.5
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
4 Txslot	Target (dBm)	27.0	27.0	27.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
GSM 850 EDGE (8PSK) (Burst Average Power)				
Channel		128	190	251
1 Txslot	Target (dBm)	26.0	26.0	26.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
2 Txslot	Target (dBm)	24.0	24.0	24.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
3 Txslot	Target (dBm)	22.0	22.0	22.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
4 Txslot	Target (dBm)	20.0	20.0	20.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
GSM 1900 GPRS (GMSK) (Burst Average Power)				
Channel		512	661	810
1 Txslot	Target (dBm)	30.0	30.0	30.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
2 Txslot	Target (dBm)	28.0	28.0	28.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
3 Txslot	Target (dBm)	26.0	26.0	26.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
4 Txslot	Target (dBm)	24.0	24.0	24.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
GSM 1900 EDGE (8PSK) (Burst Average Power)				
Channel		512	661	810
1 Txslot	Target (dBm)	25.0	25.0	25.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
2 Txslot	Target (dBm)	23.0	23.0	23.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
3 Txslot	Target (dBm)	21.0	21.0	21.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
4 Txslot	Target (dBm)	19.0	19.0	19.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0

UMTS

UMTS Band V			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	23.0	23.0	23.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band V HSDPA(sub-test 1)			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	23.0	23.0	23.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band V HSDPA(sub-test 2)			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	22.0	22.0	22.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band V HSDPA(sub-test 3)			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band V HSDPA(sub-test 4)			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band V HSUPA(sub-test 1)			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	22.0	22.0	22.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band V HSUPA(sub-test 2)			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band V HSUPA(sub-test 3)			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band V HSUPA(sub-test 4)			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	20.0	20.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band V HSUPA(sub-test 5)			
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

UMTS Band IV			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	23.0	23.0	23.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band IV HSDPA(sub-test 1)			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	23.0	23.0	23.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band IV HSDPA(sub-test 2)			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	22.0	22.0	22.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band IV HSDPA(sub-test 3)			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band IV HSDPA(sub-test 4)			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band I V HSUPA(sub-test 1)			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	22.0	22.0	22.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band IV HSUPA(sub-test 2)			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band IV HSUPA(sub-test 3)			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band IV HSUPA(sub-test 4)			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	20.0	20.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band IV HSUPA(sub-test 5)			
Channel	Channel 1313	Channel 1450	Channel 1512
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

UMTS Band II			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band II HSDPA(sub-test 1)			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band II HSDPA(sub-test 2)			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	22.0	22.0	22.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band II HSDPA(sub-test 3)			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band II HSDPA(sub-test 4)			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band II HSUPA(sub-test 1)			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	22.0	22.0	22.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band II HSUPA(sub-test 2)			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band II HSUPA(sub-test 3)			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band II HSUPA(sub-test 4)			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	20.0	20.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
UMTS Band II HSUPA(sub-test 5)			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	21.0	21.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

LTE Band 2

BW:1.4MHz [<RB=1>]						
Channel	Channel 18607		Channel 18900		Channel 19193	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:1.4MHz [<RB=3>, <RB=6>]						
Channel	Channel 18607		Channel 18900		Channel 19193	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:3MHz [<RB=1>]						
Channel	Channel 18615		Channel 18900		Channel 19185	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:3MHz [<RB=8>, <RB=15>]						
Channel	Channel 18615		Channel 18900		Channel 19185	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:5MHz [<RB=1>]						
Channel	Channel 18625		Channel 18900		Channel 19175	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:5MHz [<RB=12>, <RB=25>]						
Channel	Channel 18625		Channel 18900		Channel 19175	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:10MHz [<RB=1>]						
Channel	Channel 18650		Channel 18900		Channel 19150	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:10MHz [<RB=25>, <RB=50>]						
Channel	Channel 18650		Channel 18900		Channel 19150	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:15MHz [<RB=1>]						
Channel	Channel 18675		Channel 18900		Channel 19125	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:15MHz [<RB=37>, <RB=75>]						
Channel	Channel 18675		Channel 18900		Channel 19125	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:20MHz [<RB=1>]						
Channel	Channel 18700		Channel 18900		Channel 19100	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:20MHz [<RB=50>, <RB=100>]						
Channel	Channel 18700		Channel 18900		Channel 19100	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

LTE Band 4

BW:1.4MHz [<RB=1>]						
Channel	Channel 19957		Channel 20175		Channel 20393	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:1.4MHz [<RB=3>, <RB=6>]						
Channel	Channel 19957		Channel 20175		Channel 20393	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	21.0	21.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:3MHz [<RB=1>]						
Channel	Channel 19965		Channel 20175		Channel 20385	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:3MHz [<RB=8>, <RB=15>]						
Channel	Channel 19965		Channel 20175		Channel 20385	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:5MHz [<RB=1>]						
Channel	Channel 19975		Channel 20175		Channel 20375	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:5MHz [<RB=12>, <RB=25>]						
Channel	Channel 19975		Channel 20175		Channel 20375	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:10MHz [<RB=1>]						
Channel	Channel 20000		Channel 20175		Channel 20350	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:10MHz [<RB=25>, <RB=50>]						
Channel	Channel 20000		Channel 20175		Channel 20350	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:15MHz [<RB=1>]						
Channel	Channel 20025		Channel 20175		Channel 20325	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:15MHz [<RB=37>, <RB=75>]						
Channel	Channel 20025		Channel 20175		Channel 20325	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:20MHz [<RB=1>]						
Channel	Channel 20050		Channel 20175		Channel 20300	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:20MHz [<RB=50>, <RB=100>]						
Channel	Channel 20050		Channel 20175		Channel 20300	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

LTE Band 7**BW:5MHz [<RB=1>]**

Channel	Channel 20775		Channel 21100		Channel 21425	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:5MHz [<RB=12>, <RB=25>]

Channel	Channel 20775		Channel 21100		Channel 21425	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:10MHz [<RB=1>]

Channel	Channel 20800		Channel 21100		Channel 21400	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:10MHz [<RB=25>, <RB=50>]

Channel	Channel 20800		Channel 21100		Channel 21400	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:15MHz [<RB=1>]

Channel	Channel 20825		Channel 21100		Channel 21375	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:15MHz [<RB=37>, <RB=75>]

Channel	Channel 20825		Channel 21100		Channel 21375	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	22.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:20MHz [<RB=1>]

Channel	Channel 20850		Channel 21100		Channel 21350	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:20MHz [<RB=50>, <RB=100>]

Channel	Channel 20850		Channel 21100		Channel 21350	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

LTE Band 12

BW:1.4MHz [<RB=1>]						
Channel	Channel 23017		Channel 23095		Channel 23173	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:1.4MHz [<RB=3>, <RB=6>]						
Channel	Channel 23017		Channel 23095		Channel 23173	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:3MHz [<RB=1>]						
Channel	Channel 23025		Channel 23095		Channel 23165	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:3MHz [<RB=8>, <RB=15>]						
Channel	Channel 23025		Channel 23095		Channel 23165	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:5MHz [<RB=1>]						
Channel	Channel 23035		Channel 23095		Channel 23155	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:5MHz [<RB=12>, <RB=25>]						
Channel	Channel 23035		Channel 23095		Channel 23155	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:10MHz [<RB=1>]						
Channel	Channel 23065		Channel 23095		Channel 23130	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0
BW:10MHz [<RB=25>, <RB=50>]						
Channel	Channel 23065		Channel 23095		Channel 23130	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

LTE Band 17**BW:5MHz [<RB=1>]**

Channel	Channel 23755		Channel 23790		Channel 23825	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:5MHz [<RB=12>, <RB=25>]

Channel	Channel 23755		Channel 23790		Channel 23825	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:10MHz [<RB=1>]

Channel	Channel 23780		Channel 23790		Channel 23800	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	22.0	21.0	22.0	21.0	22.0	21.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

BW:10MHz [<RB=25>, <RB=50>]

Channel	Channel 23780		Channel 23790		Channel 23800	
	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Target (dBm)	21.0	20.0	21.0	20.0	21.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0	1.0	1.0	1.0

WiFi 2.4G**802.11b (Average)**

Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	13.0	13.0	13.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

802.11g (Average)

Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	11.0	11.0	11.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

802.11n HT20 (Average)

Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	10.0	10.0	10.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

802.11n HT40 (Average)

Channel	Channel 3	Channel 6	Channel 9
Target (dBm)	9.0	9.0	9.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

WiFi 5.2G

802.11a (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	13.5	13.5	13.5
Tolerance $\pm$ (dB)	1.0	1.0	1.0
802.11n HT20 (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	13.0	13.0	13.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
802.11n HT40 (Average)			
Channel	Channel 38	Channel 46	
Target (dBm)	13.0	13.0	
Tolerance $\pm$ (dB)	1.0	1.0	
802.11ac(VHT20) (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	14.0	14.5	13.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
802.11ac(VHT40) (Average)			
Channel	Channel 38	Channel 46	
Target (dBm)	14.0	14.0	
Tolerance $\pm$ (dB)	1.0	1.0	
802.11ac(VHT80) (Average)			
Channel	Channel 42		
Target (dBm)	13.5		
Tolerance $\pm$ (dB)	1.0		

WiFi 5.8G

802.11a (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	13.5	13.5	13.5
Tolerance $\pm$ (dB)	1.0	1.0	1.0
802.11n HT20 (Average)			
Channel	Channel 149	Channel 157	Channel 165
Target (dBm)	13.5	13.5	13.5
Tolerance $\pm$ (dB)	1.0	1.0	1.0
802.11n HT40 (Average)			
Channel	Channel 151	Channel 159	
Target (dBm)	13.5	13.5	
Tolerance $\pm$ (dB)	1.0	1.0	
802.11ac(VHT20) (Average)			
Channel	Channel 36	Channel 40	Channel 48
Target (dBm)	13.5	13.5	13.5
Tolerance $\pm$ (dB)	1.0	1.0	1.0
802.11ac(VHT40) (Average)			
Channel	Channel 38	Channel 46	
Target (dBm)	13.5	13.5	
Tolerance $\pm$ (dB)	1.0	1.0	
802.11ac(VHT80) (Average)			
Channel	Channel 42		
Target (dBm)	13.0		
Tolerance $\pm$ (dB)	1.0		

Bluetooth V4.0**BLE-GFSK (Average)**

Channel	Channel 0	Channel 19	Channel 39
Target (dBm)	-1.0	0.0	-3.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

GFSK (Average)

Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	4.0	4.0	4.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0


8DPSK (Average)

Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	3.0	4.0	3.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

 $\pi/4$ DQPSK (Average)

Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	3.0	4.0	3.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

4.3. Transmit Antennas and SAR Measurement Position

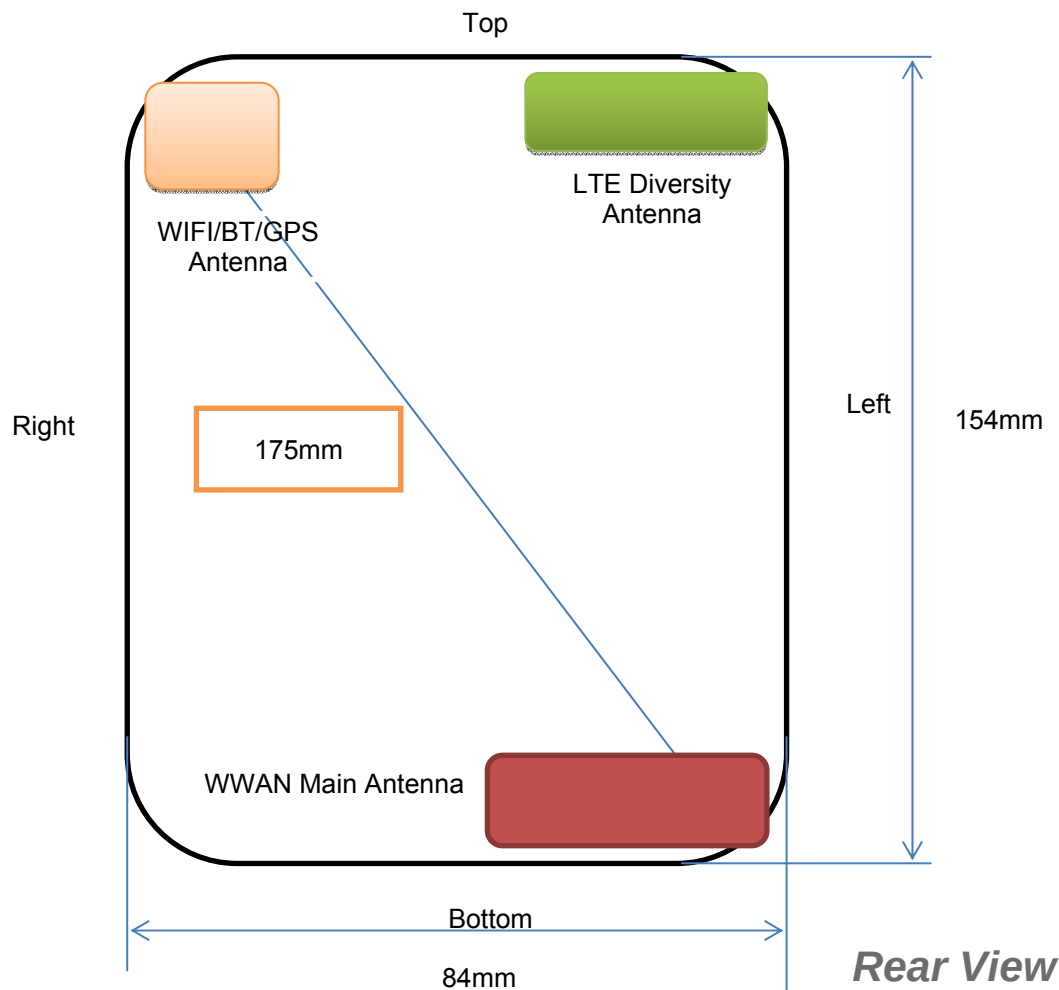

Antenna information:

WWAN Main Antenna	GSM/UMTS/LTE TX/RX
LTEDiversity antenna	Only RX
WLAN/GPS/BT Antenna	WLAN/BT TX/RX

Note:

- 1). Per KDB648474 D04, because the overall diagonal distance of this devices is 175mm>160mm, it is considered as "Phablet" device.
- 2). Per KDB648474 D04, 10-g extremity SAR is not required when Body-Worn mode 1-g reported SAR < 1.2 W/Kg.
- 3). According to the KDB941225 D06 Hot Spot SAR v02, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

Distance of The Antenna to the EUT surface and edge (mm)						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WWAN	<5	<5	141	<5	<5	49
BT/WLAN	<5	<5	<5	143	59	<5

Positions for SAR tests; Hotspot mode						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WWAN	Yes	Yes	No	Yes	Yes	No
BT/WLAN	Yes	Yes	Yes	No	No	Yes

General Note: Referring to KDB 941225 D06 v02, When the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10mm, SAR must be measured for all sides and surfaces with a transmitting antenna located with 25mm from that surface or edge.

4.4. SAR Measurement Results

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Scaling factor} = 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Reported SAR} = \text{Measured SAR} \times \text{Scaling factor}$$

Where

P_{target} is the power of manufacturing upper limit;

P_{measured} is the measured power;

Measured SAR is measured SAR at measured power which including power drift)

Reported SAR which including Power Drift and Scaling factor

The product with 2 SIMs and 2 SIMs(SIM1 and SIM2) can not used Simultaneous, we tested 2 SIMs(SIM1 and SIM2) and recorded worst case at SIM 1

Duty Cycle

Test Mode	Duty Cycle
Speech for GSM850/1900	1:8
GPRS850	1:2.67
GPRS1900	1:2.67
UMTS	1:1
LTE	1:1
WiFi2450/5200/5800	1:1

5.3.1 SAR Results

SAR Values [GSM 850]

Ch.	Freq. (MHz)	Time slots	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
190	836.6	Voice	Left Cheek	32.90	34.00	-1.09	1.29	0.285	0.368	
190	836.6	Voice	Left Tilt	32.90	34.00	0.47	1.29	0.101	0.130	
190	836.6	Voice	Right Cheek	32.90	34.00	-2.38	1.29	0.306	0.395	Plot 1
190	836.6	Voice	Right Tilt	32.90	34.00	1.85	1.29	0.106	0.137	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
190	836.6	3Txslots	Front	29.09	29.50	0.86	1.10	0.587	0.646	
190	836.6	3Txslots	Rear	29.09	29.50	-1.40	1.10	0.791	0.870	Plot 2
128	824.2	3Txslots	Rear	29.04	29.50	-1.85	1.13	0.620	0.701	
251	848.8	3Txslots	Rear	28.97	29.50	2.11	1.10	0.593	0.652	
190	836.6	3Txslots	Left	29.09	29.50	-3.51	1.10	0.533	0.586	
190	836.6	3Txslots	Bottom	29.09	29.50	0.24	1.10	0.561	0.617	

SAR Values [GSM 1900]

Ch.	Freq. (MHz)	time slots	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
661	1880.0	Voice	Left Cheek	30.01	31.00	1.89	1.26	0.105	0.132	
661	1880.0	Voice	Left Tilt	30.01	31.00	3.64	1.26	0.056	0.071	
661	1880.0	Voice	Right Cheek	30.01	31.00	-0.73	1.26	0.108	0.136	Plot 3
661	1880.0	Voice	Right Tilt	30.01	31.00	0.20	1.26	0.062	0.078	
measured / reported SAR numbers – Body (hotspot open, distance 10mm)										
661	1880.0	3Txslots	Front	26.14	27.00	-1.43	1.22	0.404	0.493	
661	1880.0	3Txslots	Rear	26.14	27.00	-0.11	1.22	0.568	0.693	Plot 4
661	1880.0	3Txslots	Left	26.14	27.00	0.37	1.22	0.376	0.459	
661	1880.0	3Txslots	Bottom	26.14	27.00	0.02	1.22	0.374	0.456	

SAR Values [WCDMA Band V]

Ch.	Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
4183	836.6	RMC	Left Cheek	23.71	24.00	-2.48	1.07	0.188	0.201	
4183	836.6	RMC	Left Tilt	23.71	24.00	-3.19	1.07	0.121	0.129	
4183	836.6	RMC	Right Cheek	23.71	24.00	-0.90	1.07	0.207	0.221	Plot 5
4183	836.6	RMC	Right Tilt	23.71	24.00	0.77	1.07	0.126	0.135	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
4183	836.6	RMC	Front	23.71	24.00	1.59	1.07	0.542	0.580	
4183	836.6	RMC	Rear	23.71	24.00	-0.20	1.07	0.718	0.768	Plot 6
4183	836.6	RMC	Left	23.71	24.00	0.35	1.07	0.506	0.541	
4183	836.6	RMC	Bottom	23.71	24.00	2.18	1.07	0.513	0.549	

SAR Values [WCDMA Band IV]

Ch.	Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
1450	1740.0	RMC	Left Cheek	23.28	24.00	-1.11	1.18	0.123	0.145	Plot 7
1450	1740.0	RMC	Left Tilt	23.28	24.00	0.48	1.18	0.048	0.057	
1450	1740.0	RMC	Right Cheek	23.28	24.00	-0.79	1.18	0.119	0.140	
1450	1740.0	RMC	Right Tilt	23.28	24.00	-2.81	1.18	0.046	0.054	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
1450	1740.0	RMC	Front	23.28	24.00	0.66	1.18	0.510	0.602	
1450	1740.0	RMC	Rear	23.28	24.00	-0.22	1.18	0.666	0.786	Plot 8
1450	1740.0	RMC	Left	23.28	24.00	1.84	1.18	0.425	0.502	
1450	1740.0	RMC	Bottom	23.28	24.00	-0.07	1.18	0.437	0.516	

SAR Values [WCDMA Band II]

Ch.	Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
9400	1800.0	RMC	Left Cheek	23.72	24.00	-2.00	1.07	0.187	0.200	Plot 9
9400	1800.0	RMC	Left Tilt	23.72	24.00	0.18	1.07	0.078	0.083	
9400	1800.0	RMC	Right Cheek	23.72	24.00	0.43	1.07	0.174	0.186	
9262	1852.4	RMC	Right Tilt	23.72	24.00	-4.01	1.07	0.076	0.081	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
9400	1800.0	RMC	Front	23.72	24.00	1.97	1.07	0.603	0.645	
9400	1800.0	RMC	Rear	23.72	24.00	2.51	1.07	0.789	0.844	Plot 10
9262	1852.4	RMC	Rear	23.63	24.00	-2.85	1.09	0.731	0.797	
9538	1907.6	RMC	Rear	23.62	24.00	3.61	1.09	0.688	0.750	
9400	1800.0	RMC	Left	23.72	24.00	0.63	1.07	0.529	0.566	
9400	1800.0	RMC	Bottom	23.72	24.00	-0.85	1.07	0.541	0.579	

SAR Values [LTE Band 2]

Ch.	Freq. (MHz)	Channel Type (20M)	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
18900	1880	1RB	Left Cheek	22.83	23.00	-0.25	1.04	0.113	0.118	Plot 11
18900	1880	1RB	Left Tilt	22.83	23.00	0.41	1.04	0.052	0.054	
18900	1880	1RB	Right Cheek	22.83	23.00	-3.18	1.04	0.105	0.109	
18900	1880	1RB	Right Tilt	22.83	23.00	-0.97	1.04	0.043	0.045	
18700	1860	50%RB	Left Cheek	21.70	22.00	2.22	1.07	0.097	0.104	
18700	1860	50%RB	Left Tilt	21.70	22.00	2.78	1.07	0.041	0.044	
18700	1860	50%RB	Right Cheek	21.70	22.00	-3.65	1.07	0.095	0.102	
18700	1860	50%RB	Right Tilt	21.70	22.00	0.52	1.07	0.039	0.042	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
18900	1880	1RB	Front	22.83	23.00	0.78	1.04	0.428	0.445	
18900	1880	1RB	Rear	22.83	23.00	1.31	1.04	0.532	0.553	Plot 12
18900	1880	1RB	Left	22.83	23.00	-2.97	1.04	0.384	0.399	
18900	1880	1RB	Bottom	22.83	23.00	1.64	1.04	0.397	0.413	
18700	1860	50%RB	Front	21.70	22.00	0.47	1.07	0.346	0.370	
18700	1860	50%RB	Rear	21.70	22.00	-0.05	1.07	0.484	0.518	
18700	1860	50%RB	Left	21.70	22.00	1.93	1.07	0.357	0.382	
18700	1860	50%RB	Bottom	21.70	22.00	0.82	1.07	0.371	0.397	

SAR Values [LTE Band 4]

Ch.	Freq. (MHz)	Channel Type (20M)	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
20175	1732.5	1RB	Left Cheek	22.55	23.00	0.00	1.11	0.088	0.098	Plot 13
20175	1732.5	1RB	Left Tilt	22.55	23.00	-3.71	1.11	0.039	0.043	
20175	1732.5	1RB	Right Cheek	22.55	23.00	0.29	1.11	0.084	0.093	
20175	1732.5	1RB	Right Tilt	22.55	23.00	-0.01	1.11	0.038	0.042	
20050	1720.0	50%RB	Left Cheek	21.86	22.00	-1.52	1.03	0.081	0.083	
20050	1720.0	50%RB	Left Tilt	21.86	22.00	-0.02	1.03	0.035	0.036	
20050	1720.0	50%RB	Right Cheek	21.86	22.00	1.67	1.03	0.078	0.080	
20050	1720.0	50%RB	Right Tilt	21.86	22.00	-3.28	1.03	0.033	0.034	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
20175	1732.5	1RB	Front	22.55	23.00	1.54	1.11	0.226	0.251	
20175	1732.5	1RB	Rear	22.55	23.00	-0.47	1.11	0.361	0.401	Plot 14
20175	1732.5	1RB	Left	22.55	23.00	2.90	1.11	0.189	0.210	
20175	1732.5	1RB	Bottom	22.55	23.00	-0.72	1.11	0.197	0.219	
20050	1720.0	50%RB	Front	21.86	22.00	1.48	1.03	0.202	0.208	
20050	1720.0	50%RB	Rear	21.86	22.00	-0.69	1.03	0.340	0.350	
20050	1720.0	50%RB	Left	21.86	22.00	-3.27	1.03	0.179	0.184	
20050	1720.0	50%RB	Bottom	21.86	22.00	1.45	1.03	0.193	0.199	

SAR Values [LTE Band 7]

Ch.	Freq. (MHz)	Channel Type (20M)	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
21350	2560.0	1RB	Left Cheek	22.85	23.00	-2.86	1.04	0.108	0.109	Plot 15
21350	2560.0	1RB	Left Tilt	22.85	23.00	-1.77	1.04	0.066	0.067	
21350	2560.0	1RB	Right Cheek	22.85	23.00	0.19	1.04	0.115	0.116	
21350	2560.0	1RB	Right Tilt	22.85	23.00	3.02	1.04	0.069	0.070	
21100	2535.0	50%RB	Left Cheek	21.92	22.00	1.98	1.02	0.097	0.099	
21100	2535.0	50%RB	Left Tilt	21.92	22.00	-3.54	1.02	0.058	0.059	
21100	2535.0	50%RB	Right Cheek	21.92	22.00	0.18	1.02	0.111	0.113	
21100	2535.0	50%RB	Right Tilt	21.92	22.00	0.62	1.02	0.060	0.061	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
21350	2560.0	1RB	Front	22.85	23.00	2.48	1.04	0.602	0.626	Plot 16
21350	2560.0	1RB	Rear	22.85	23.00	1.60	1.04	0.742	0.772	
21350	2560.0	1RB	Left	22.85	23.00	3.26	1.04	0.524	0.545	
21350	2560.0	1RB	Bottom	22.85	23.00	0.17	1.04	0.530	0.551	
21100	2535.0	50%RB	Front	21.92	22.00	-2.91	1.02	0.578	0.590	
21100	2535.0	50%RB	Rear	21.92	22.00	0.84	1.02	0.722	0.736	
21100	2535.0	50%RB	Left	21.92	22.00	-0.02	1.02	0.501	0.511	
21100	2535.0	50%RB	Bottom	21.92	22.00	1.67	1.02	0.508	0.518	

SAR Values [LTE Band 12]

Ch.	Freq. (MHz)	Channel Type (20M)	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
23095	713.5	1RB	Left Cheek	22.61	23.00	3.04	1.09	0.119	0.130	Plot 17
23095	713.5	1RB	Left Tilt	22.61	23.00	0.05	1.09	0.064	0.070	
23095	713.5	1RB	Right Cheek	22.61	23.00	2.69	1.09	0.113	0.123	
23095	713.5	1RB	Right Tilt	22.61	23.00	-3.17	1.09	0.058	0.063	
23060	704.0	50%RB	Left Cheek	21.67	22.00	0.16	1.08	0.112	0.121	
23060	704.0	50%RB	Left Tilt	21.67	22.00	-1.58	1.08	0.061	0.066	
23060	704.0	50%RB	Right Cheek	21.67	22.00	-2.43	1.08	0.108	0.117	
23060	704.0	50%RB	Right Tilt	21.67	22.00	-1.09	1.08	0.062	0.067	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
23095	713.5	1RB	Front	22.61	23.00	2.81	1.09	0.368	0.401	
23095	713.5	1RB	Rear	22.61	23.00	-0.56	1.09	0.502	0.547	Plot 18
23095	713.5	1RB	Left	22.61	23.00	1.64	1.09	0.312	0.340	
23095	713.5	1RB	Bottom	22.61	23.00	2.33	1.09	0.327	0.356	
23060	704.0	50%RB	Front	21.67	23.00	-0.15	1.08	0.339	0.366	
23060	704.0	50%RB	Rear	21.67	23.00	-0.72	1.08	0.476	0.514	
23060	704.0	50%RB	Left	21.67	23.00	3.05	1.08	0.305	0.329	
23060	704.0	50%RB	Bottom	21.67	23.00	2.14	1.08	0.313	0.338	

SAR Values [LTE Band 17]

Ch.	Freq. (MHz)	Channel Type (20M)	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
23800	711.0	1RB	Left Cheek	22.56	23.00	-1.25	1.11	0.186	0.206	Plot 19
23800	711.0	1RB	Left Tilt	22.56	23.00	-4.13	1.11	0.100	0.111	
23800	711.0	1RB	Right Cheek	22.56	23.00	0.64	1.11	0.179	0.199	
23800	711.0	1RB	Right Tilt	22.56	23.00	-2.66	1.11	0.096	0.107	
23800	711.0	50%RB	Left Cheek	21.55	22.00	0.82	1.11	0.155	0.172	
23800	711.0	50%RB	Left Tilt	21.55	22.00	-1.11	1.11	0.091	0.101	
23800	711.0	50%RB	Right Cheek	21.55	22.00	-0.67	1.11	0.147	0.163	
23800	711.0	50%RB	Right Tilt	21.55	22.00	3.15	1.11	0.087	0.097	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
23800	711.0	1RB	Front	22.56	23.00	1.63	1.11	0.657	0.729	Plot 20
23800	711.0	1RB	Rear	22.56	23.00	2.50	1.11	0.766	0.850	
23800	711.0	1RB	Rear	22.45	23.00	-1.98	1.14	0.711	0.811	
23800	711.0	1RB	Left	22.56	23.00	0.46	1.11	0.599	0.665	
23800	711.0	1RB	Bottom	22.56	23.00	-0.92	1.11	0.612	0.679	
23800	711.0	50%RB	Front	21.55	22.00	-1.54	1.11	0.642	0.713	
23800	711.0	50%RB	Rear	21.55	22.00	0.86	1.11	0.748	0.830	
23800	711.0	50%RB	Left	21.55	22.00	3.07	1.11	0.573	0.636	
23800	711.0	50%RB	Bottom	21.55	22.00	-2.26	1.11	0.591	0.656	

SAR Values [WIFI2.4G]

Ch.	Freq. (MHz)	Service	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
6	2437	DSSS	Left Cheek	13.64	14.00	0.16	1.09	0.162	0.177	
6	2437	DSSS	Left Tilt	13.64	14.00	-2.57	1.09	0.094	0.102	
6	2437	DSSS	Right Cheek	13.64	14.00	-2.15	1.09	0.167	0.182	Plot 21
6	2437	DSSS	Right Tilt	13.64	14.00	1.89	1.09	0.098	0.107	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
6	2437	DSSS	Front	13.64	14.00	3.01	1.09	0.245	0.267	
6	2437	DSSS	Rear	13.64	14.00	0.81	1.09	0.343	0.374	Plot 22
6	2437	DSSS	Right	13.64	14.00	-2.41	1.09	0.161	0.175	
6	2437	DSSS	Top	13.64	14.00	1.62	1.09	0.218	0.238	

SAR Values [WIFI5.2G]

Ch.	Freq. (MHz)	Service	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
36	5180	802.11a	Left Cheek	14.03	14.50	-3.11	1.11	0.305	0.339	Plot 23
36	5180	802.11a	Left Tilt	14.03	14.50	0.25	1.11	0.152	0.169	
36	5180	802.11a	Right Cheek	14.03	14.50	1.77	1.11	0.319	0.354	
36	5180	802.11a	Right Tilt	14.03	14.50	0.81	1.11	0.158	0.175	
36	5180	802.11ac	Left Cheek	14.57	15.00	2.01	1.10	0.288	0.317	
36	5180	802.11ac	Left Tilt	14.57	15.00	-1.86	1.10	0.129	0.142	
36	5180	802.11ac	Right Cheek	14.57	15.00	0.62	1.10	0.301	0.331	
36	5180	802.11ac	Right Tilt	14.57	15.00	-4.23	1.10	0.144	0.158	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
36	5180	802.11a	Front	14.03	14.50	-1.64	1.11	0.467	0.518	Plot 24
36	5180	802.11a	Rear	14.03	14.50	-4.61	1.11	0.628	0.697	
36	5180	802.11a	Right	14.03	14.50	4.00	1.11	0.479	0.532	
36	5180	802.11a	Top	14.03	14.50	3.27	1.11	0.421	0.467	
36	5180	802.11ac	Front	14.57	15.00	0.02	1.10	0.414	0.455	
36	5180	802.11ac	Rear	14.57	15.00	3.14	1.10	0.616	0.678	
36	5180	802.11ac	Right	14.57	15.00	-1.78	1.10	0.413	0.454	
36	5180	802.11ac	Top	14.57	15.00	-3.65	1.10	0.402	0.442	

SAR Values [WIFI5.8G]

Ch.	Freq. (MHz)	Service	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
157	5785	802.11a	Left Cheek	14.45	14.50	-3.52	1.01	0.275	0.278	Plot 25
157	5785	802.11a	Left Tilt	14.45	14.50	0.55	1.01	0.129	0.130	
157	5785	802.11a	Right Cheek	14.45	14.50	-1.48	1.01	0.256	0.259	
157	5785	802.11a	Right Tilt	14.45	14.50	0.32	1.01	0.115	0.116	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
157	5785	802.11a	Front	14.45	14.50	-1.64	1.01	0.217	0.219	
157	5785	802.11a	Rear	14.45	14.50	3.60	1.01	0.325	0.328	Plot 26
157	5785	802.11a	Right	14.45	14.50	2.13	1.01	0.188	0.190	
157	5785	802.11a	Top	14.45	14.50	-0.54	1.01	0.193	0.195	

Note:

1. The value with black color is the maximum Reported SAR Value of each test band.
2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).
3. Per KDB 941225 D02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is < 0.25 dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2 W/kg, HSDPA/HSUPA SAR evaluation can be excluded.
4. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
5. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
6. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
7. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
8. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

9. Per KDB 248227-SAR is measured using the highest measured maximum output power channel for the initial test configuration.
10. Per KDB 248227- Channels with measured maximum output power within ¼ dB of each other are considered to have the same maximum output, When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement. And when there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.
11. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. So ODFM SAR test is not required.
12. Per KDB 648474 D04, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

5.3.3 Standalone SAR Test Exclusion Considerations and Estimated SAR

Per KDB447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion;

- (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] • [$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤ 1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

Estimated stand alone SAR

Communication system	Frequency (MHz)	Configuration	Maximum Power (including tune-up tolerance) (dBm)	Separation Distance (mm)	Estimated SAR _{1-g} (W/kg)
Bluetooth*	2450	Head	5.0	5	0.132
Bluetooth*	2450	Hotspot	5.0	10	0.066

Bluetooth*- Including Lower power Bluetooth

4.5. Simultaneous TX SAR Considerations

5.5.1 Introduction

The following procedures adopted from "FCC SAR Considerations for Cell Phones with Multiple Transmitters" are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For the DUT, the BT and WiFi modules sharing same antenna, GSM/WCDMA and LTE modules sharing same single antenna;

The 2.4G WLAN and 5.8G WLAN share same antenna, cannot transmit simultaneous.

Application Simultaneous Transmission information:

Air-Interface	Band (MHz)	Type	Simultaneous Transmissions	Voice over Digital Transport(Data)
GSM	850	VO	Yes, WLAN or BT/BLE	N/A
	1900	VO		
	GPRS/EDGE	DT	Yes, WLAN or BT/BLE	N/A
WCDMA	Band II/BandIV/ BandV	DT	Yes, WLAN or BT/BLE	N/A
LTE	Band2/Band4/ Band7/Band12/ Band17	DT	Yes, WLAN or BT/BLE	N/A
WLAN	2450/5200/5800	DT	Yes, GSM, GPRS, EDGE, UMTS, LTE	Yes
BT/BLE	2450	DT	Yes, GSM, GPRS, EDGE, UMTS, LTE	N/A

Note: VO-Voice Service only; DT-Digital Transport

Note: BT and WLAN can be active at the same time, but only with interleaving of packages switched on board level. That means that they don't transmit at the same time.

BLE-Bluetooth low energy;

BT- Classical Bluetooth

5.5.2 Evaluation of Simultaneous SAR

Head Exposure Conditions

Simultaneous transmission SAR for WiFi and GSM

Test Position	GSM850 Reported SAR _{1-q} (W/Kg)	GSM1900 Reported SAR _{1-q} (W/Kg)	WiFi2.4G Reported SAR _{1-q} (W/Kg)	WiFi5.2G Reported SAR _{1-q} (W/Kg)	WiFi5.8G Reported SAR _{1-q} (W/Kg)	MAX. ΣSAR _{1-q} (W/Kg)	SAR _{1-q} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.368	0.132	0.177	0.339	0.278	0.646	1.6	no	no
Left Tilt	0.130	0.071	0.102	0.169	0.130	0.299	1.6	no	no
Right Cheek	0.395	0.136	0.182	0.354	0.259	0.749	1.6	no	no
Right Tilt	0.137	0.078	0.107	0.175	0.116	0.312	1.6	no	no

Simultaneous transmission SAR for WiFi and UMTS

Test Position	UMTS Band V Reported SAR _{1-q} (W/Kg)	UMTS Band IV Reported SAR _{1-q} (W/Kg)	UMTS Band II Reported SAR _{1-q} (W/Kg)	WiFi2.4G Reported SAR _{1-q} (W/Kg)	WiFi5.2G Reported SAR _{1-q} (W/Kg)	WiFi5.8G Reported SAR _{1-q} (W/Kg)	MAX. ΣSAR _{1-q} (W/Kg)	SAR _{1-q} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.201	0.145	0.200	0.177	0.339	0.278	0.540	1.6	no	no
Left Tilt	0.129	0.057	0.083	0.102	0.169	0.130	0.298	1.6	no	no
Right Cheek	0.221	0.140	0.186	0.182	0.354	0.259	0.575	1.6	no	no
Right Tilt	0.135	0.054	0.081	0.107	0.175	0.116	0.310	1.6	no	no

Simultaneous transmission SAR for WiFi and LTE

Test Position	LTE Band2 Reported SAR _{1-g} (W/Kg)	LTE Band4 Reported SAR _{1-g} (W/Kg)	LTE Band7 Reported SAR _{1-g} (W/Kg)	LTE Band12 Reported SAR _{1-g} (W/Kg)	LTE Band17 Reported SAR _{1-g} (W/Kg)	WiFi2.4G Reported SAR _{1-g} (W/Kg)	WiFi5.2G Reported SAR _{1-g} (W/Kg)	WiFi5.8G Reported SAR _{1-g} (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.118	0.098	0.109	0.130	0.206	0.177	0.339	0.278	0.545	1.6	no	no
Left Tilt	0.054	0.043	0.067	0.070	0.111	0.102	0.169	0.130	0.280	1.6	no	no
Right Cheek	0.109	0.093	0.116	0.123	0.199	0.182	0.354	0.259	0.553	1.6	no	no
Right Tilt	0.045	0.042	0.070	0.063	0.107	0.107	0.175	0.116	0.282	1.6	no	no

Simultaneous transmission SAR for BT and GSM

Test Position	GSM850 Reported SAR _{1-g} (W/Kg)	GSM1900 Reported SAR _{1-g} (W/Kg)	BT Estimated SAR _{1-g} (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.368	0.132	0.132	0.500	1.6	no	no
Left Tilt	0.130	0.071	0.132	0.262	1.6	no	no
Right Cheek	0.395	0.136	0.132	0.527	1.6	no	no
Right Tilt	0.137	0.078	0.132	0.269	1.6	no	no

Simultaneous transmission SAR for BT and UMTS

Test Position	UMTS Band V Reported SAR _{1-g} (W/Kg)	UMTS Band IV Reported SAR _{1-g} (W/Kg)	UMTS Band II Reported SAR _{1-g} (W/Kg)	BT Estimated SAR _{1-g} (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.201	0.145	0.200	0.132	0.332	1.6	no	no
Left Tilt	0.129	0.057	0.083	0.132	0.261	1.6	no	no
Right Cheek	0.221	0.140	0.186	0.132	0.353	1.6	no	no
Right Tilt	0.135	0.054	0.081	0.132	0.267	1.6	no	no

Simultaneous transmission SAR for BT and LTE

Test Position	LTE Band2 Reported SAR _{1-g} (W/Kg)	LTE Band4 Reported SAR _{1-g} (W/Kg)	LTE Band7 Reported SAR _{1-g} (W/Kg)	LTE Band12 Reported SAR _{1-g} (W/Kg)	LTE Band17 Reported SAR _{1-g} (W/Kg)	BT Estimated SAR _{1-g} (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.118	0.098	0.109	0.130	0.206	0.132	0.338	1.6	no	no
Left Tilt	0.054	0.043	0.067	0.070	0.111	0.132	0.243	1.6	no	no
Right Cheek	0.109	0.093	0.116	0.123	0.199	0.132	0.331	1.6	no	no
Right Tilt	0.045	0.042	0.070	0.063	0.107	0.132	0.239	1.6	no	no

Body Hotspot Exposure Conditions**Simultaneous transmission SAR for WiFi and GSM**

Test Position	GSM850 Reported SAR _{1-g} (W/Kg)	GSM1900 Reported SAR _{1-g} (W/Kg)	WiFi2.4G Reported SAR _{1-g} (W/Kg)	WiFi5.2G Reported SAR _{1-g} (W/Kg)	WiFi5.8G Reported SAR _{1-g} (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Front	0.646	0.493	0.267	0.518	0.219	1.164	1.6	no	no
Rear	0.870	0.693	0.374	0.697	0.328	1.567	1.6	no	no
Left	0.586	0.459	/	/	/	0.586	1.6	no	no
Right	/	/	0.175	0.532	0.190	0.532	1.6	no	no
Bottom	0.617	0.456	/	/	/	0.617	1.6	no	no
Top	/	/	0.238	0.467	0.195	0.467	1.6	no	no

Simultaneous transmission SAR for WiFi and UMTS

Test Position	UMTS Band V Reported SAR _{1-g} (W/Kg)	UMTS Band IV Reported SAR _{1-g} (W/Kg)	UMTS Band II Reported SAR _{1-g} (W/Kg)	WiFi2.4G Reported SAR _{1-g} (W/Kg)	WiFi5.2G Reported SAR _{1-g} (W/Kg)	WiFi5.8G Reported SAR _{1-g} (W/Kg)	MAX. Σ SAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Front	0.580	0.602	0.645	0.267	0.518	0.219	1.163	1.6	no	no
Rear	0.768	0.786	0.844	0.374	0.697	0.328	1.541	1.6	no	no
Left	0.541	0.502	0.566	/	/	/	0.566	1.6	no	no
Right	/	/	/	0.175	0.532	0.190	0.532	1.6	no	no
Bottom	0.549	0.516	0.579	/	/	/	0.579	1.6	no	no
Top	/	/	/	0.238	0.467	0.195	0.467	1.6	no	no

Simultaneous transmission SAR for WiFi and LTE

Test Position	LTE Band2 Reported SAR _{1-g} (W/Kg)	LTE Band4 Reported SAR _{1-g} (W/Kg)	LTE Band7 Reported SAR _{1-g} (W/Kg)	LTE Band12 Reported SAR _{1-g} (W/Kg)	LTE Band17 Reported SAR _{1-g} (W/Kg)	WiFi2.4G Reported SAR _{1-g} (W/Kg)	WiFi5.2G Reported SAR _{1-g} (W/Kg)	WiFi5.8G Reported SAR _{1-g} (W/Kg)	MAX. Σ SAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Front	0.445	0.251	0.626	0.401	0.729	0.267	0.518	0.219	1.247	1.6	no	no
Rear	0.553	0.401	0.772	0.547	0.850	0.374	0.697	0.328	1.547	1.6	no	no
Left	0.399	0.210	0.545	0.340	0.665	/	/	/	0.665	1.6	no	no
Right	/	/	/	/	/	0.175	0.532	0.190	0.532	1.6	no	no
Bottom	0.413	0.219	0.551	0.356	0.679	/	/	/	0.679	1.6	no	no
Top	/	/	/	/	/	0.238	0.467	0.195	0.467	1.6	no	no

Simultaneous transmission SAR for BT and GSM

Test Position	GSM850 Reported SAR _{1-g} (W/Kg)	GSM1900 Reported SAR _{1-g} (W/Kg)	BT Estimated SAR _{1-g} (W/Kg)	MAX. Σ SAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Front	0.646	0.493	0.066	0.712	1.6	no	no
Rear	0.870	0.693	0.066	0.936	1.6	no	no
Left	0.586	0.459	/	0.586	1.6	no	no
Right	/	/	0.066	0.066	1.6	no	no
Bottom	0.617	0.456	/	0.617	1.6	no	no
Top	/	/	0.066	0.617	1.6	no	no

Simultaneous transmission SAR for BT and UMTS

Test Position	UMTS Band V Reported SAR _{1-g} (W/Kg)	UMTS Band IV Reported SAR _{1-g} (W/Kg)	UMTS Band II Reported SAR _{1-g} (W/Kg)	BT Estimated SAR _{1-g} (W/Kg)	MAX. Σ SAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Front	0.580	0.602	0.645	0.066	0.711	1.6	no	no
Rear	0.768	0.786	0.844	0.066	0.910	1.6	no	no
Left	0.541	0.502	0.566	/	0.566	1.6	no	no
Right	/	/	/	0.066	0.066	1.6	no	no
Bottom	0.549	0.516	0.579	/	0.579	1.6	no	no
Top	/	/	/	0.066	0.066	1.6	no	no

Simultaneous transmission SAR for BT and LTE

Test Position	LTE Band2 Reported SAR _{1-g} (W/Kg)	LTE Band4 Reported SAR _{1-g} (W/Kg)	LTE Band7 Reported SAR _{1-g} (W/Kg)	LTE Band12 Reported SAR _{1-g} (W/Kg)	LTE Band17 Reported SAR _{1-g} (W/Kg)	BT Estimated SAR _{1-g} (W/Kg)	MAX. Σ SAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Peak location separation ratio	Simut Meas. Required
Front	0.445	0.251	0.626	0.401	0.729	0.066	0.795	1.6	no	no
Rear	0.553	0.401	0.772	0.547	0.850	0.066	0.916	1.6	no	no
Left	0.399	0.210	0.545	0.340	0.665	/	0.665	1.6	no	no
Right	/	/	/	/	/	0.066	0.066	1.6	no	no
Bottom	0.413	0.219	0.551	0.356	0.679	/	0.679	1.6	no	no
Top	/	/	/	/	/	0.066	0.066	1.6	no	no

Note:

1. The WiFi and BT share same antenna, so cannot transmit at same time.
2. The value with block color is the maximum values of standalone
3. The value with blue color is the maximum values of Σ SAR_{1-g}

4.6. SAR Measurement Variability

According to KDB865664, Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. A second repeated measurement is required only if the measured result for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties. The following procedures are applied to determine if repeated measurements are required. The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.¹⁹ The repeated measurement results must be clearly identified in the SAR report. All measured SAR, including the repeated results, must be considered to determine compliance and for reporting according to KDB 690783. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

- 4) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 5) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 6) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 7) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4.7. General description of test procedures

1. The DUT is tested using CMU 200 communications testers as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.
2. Test positions as described in the tables above are in accordance with the specified test standard.
3. Tests in body position were performed in that configuration, which generates the highest time based averaged output power (see conducted power results).
4. Tests in head position with GSM were performed in voice mode with 1 timeslot unless GPRS/EGPRS/DTM function allows parallel voice and data traffic on 2 or more timeslots.
5. UMTS was tested in RMC mode with 12.2 kbit/s and TPC bits set to 'all 1'.
6. WiFi was tested in 802.11b/g/n mode with 1 Mbit/s and 6 Mbit/s. According to KDB 248227 the SAR testing for 802.11g/n is not required since When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
7. Required WiFi test channels were selected according to KDB 248227
8. According to FCC KDB pub 248227 D01, Channels with measured maximum output power within $\frac{1}{4}$ dB of each other are considered to have the same maximum output, When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement and when there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.
9. According to FCC KDB pub 941225 D06 this device has been tested with 10 mm distance to the phantom for operation in WiFi hot spot mode.
10. Per FCC KDB pub 941225 D06 the edges with antennas within 2.5 cm are required to be evaluated for SAR to cover WiFi hot spot function.
11. According to IEEE 1528 the SAR test shall be performed at middle channel. Testing of top and bottom channel is optional.
12. According to KDB 447498 D01 testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
13. IEEE 1528-2003 require the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
14. Per KDB648474 D04 require when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is < 1.2 W/kg.

15. Per KDB648474 D04 require when the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, using the same wireless mode test configuration for voice and data, such as UMTS, LTE and Wi-Fi, and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface)
16. 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg.
17. Per KDB648474 D04 require for phablet SAR test considerations, For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
18. 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg.

4.8. Measurement Uncertainty (300MHz-3GHz)

Not required as SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR according to KDB865664D01.

4.9. System Check Results

Test mode:750MHz(Head)




Product Description:Validation

Model:Dipole SID750

E-Field Probe:SSE5(SN17/14 EP221)




Test Date: December 16, 2015

Medium(liquid type)	HSL 750
Frequency (MHz)	750.000000
Relative permittivity (real part)	42.21
Conductivity (S/m)	0.86
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.53
Variation (%)	-0.9400000
SAR 10g (W/Kg)	0.6275682
SAR 1g (W/Kg)	0.9433641
SURFACE SAR	VOLUME SAR

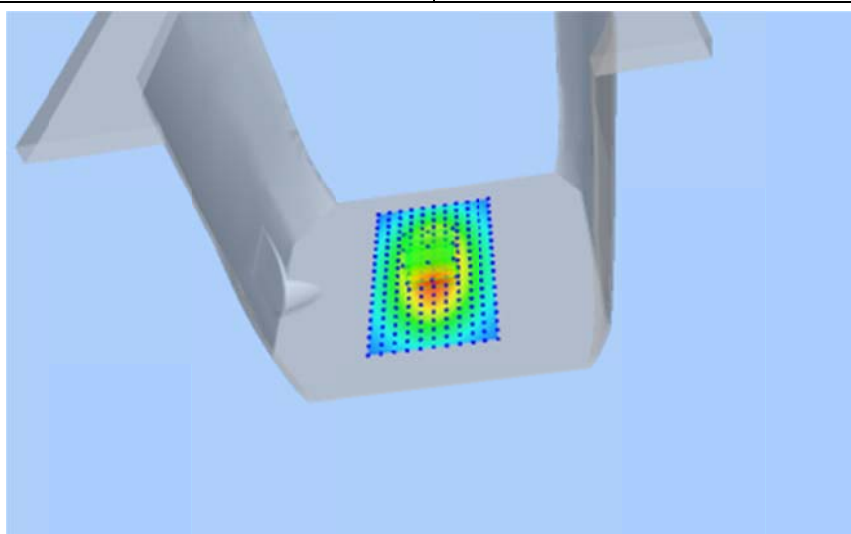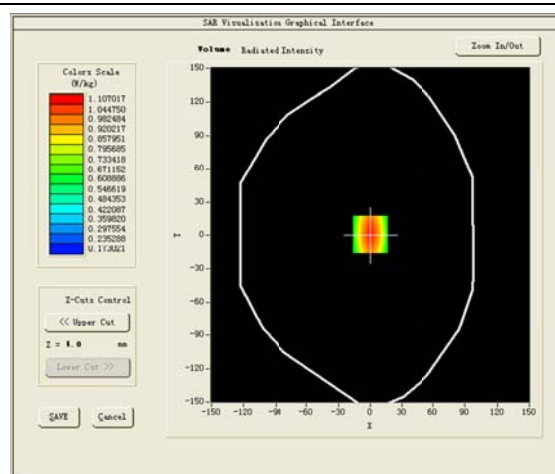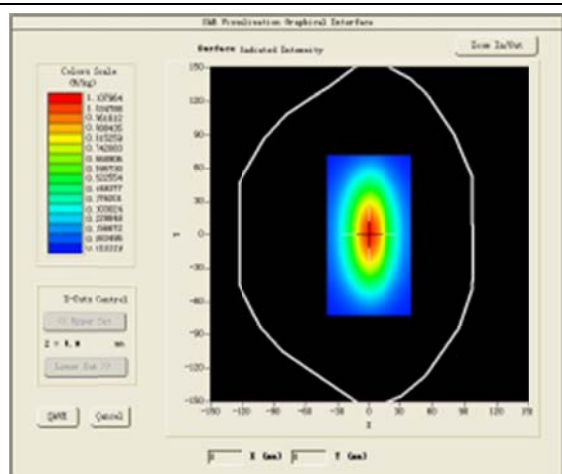




Test mode:750MHz(Body)
 Product Description:Validation
 Model:Dipole SID750
 E-Field Probe:SSE5(SN17/14 EP221)
 Test Date: December 16, 2015

Medium(liquid type)	MSL_750
Frequency (MHz)	750.0000
Relative permittivity (real part)	56.71
Conductivity (S/m)	0.95
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.70
Variation (%)	1.0800000
SAR 10g (W/Kg)	0.6611235
SAR 1g (W/Kg)	0.9756340

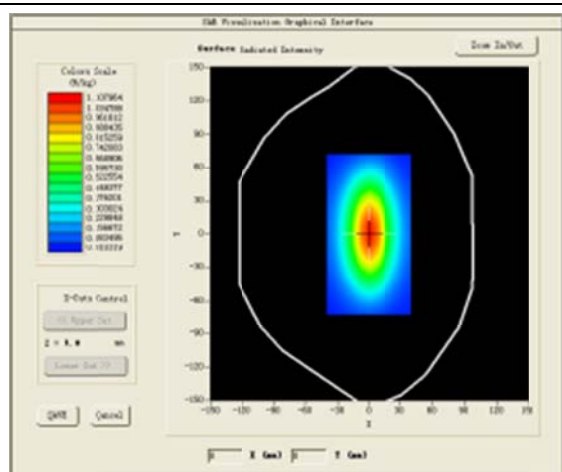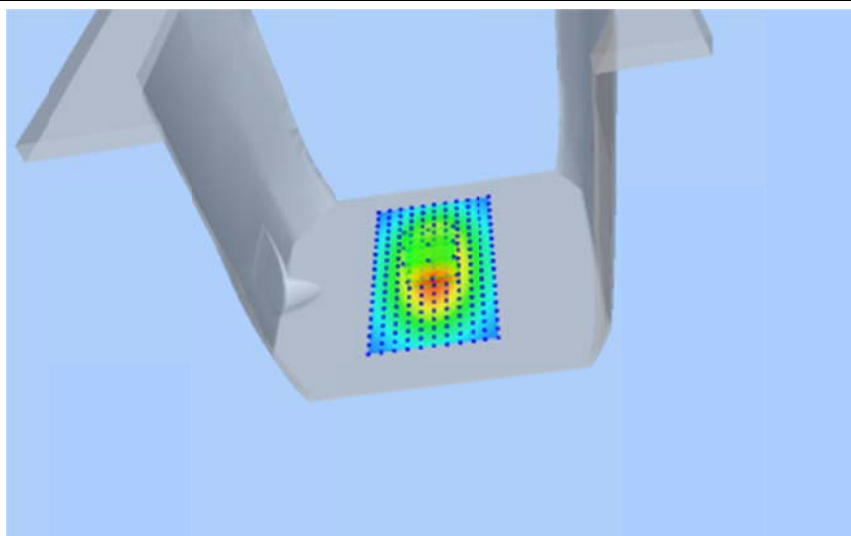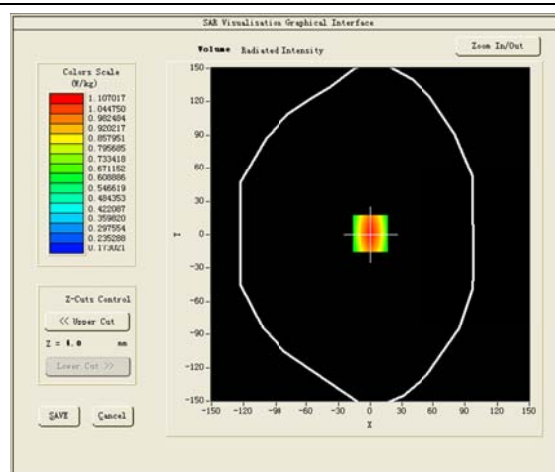SURFACE SAR**VOLUME SAR**




Test mode:835MHz(Head)
 Product Description:Validation
 Model:Dipole SID835
 E-Field Probe:SSE5(SN17/14 EP220)
 Test Date: December 17, 2015

Medium(liquid type)	HSL_900
Frequency (MHz)	835.000000
Relative permittivity (real part)	42.68
Conductivity (S/m)	0.91
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.86
Variation (%)	0.5100000
SAR 10g (W/Kg)	0.6341423
SAR 1g (W/Kg)	0.9548732
SURFACE SAR	VOLUME SAR

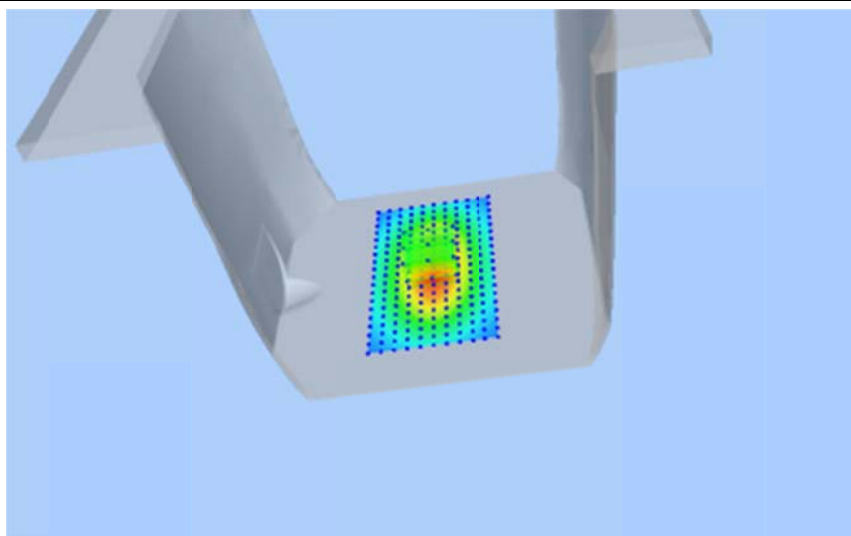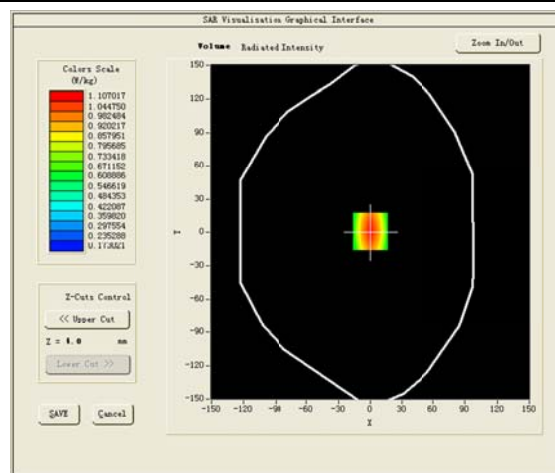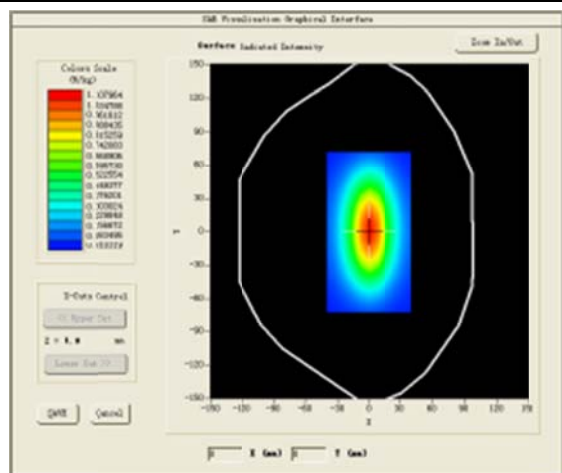




Test mode:835MHz(Body)
 Product Description:Validation
 Model:Dipole SID835
 E-Field Probe:SSE5(SN17/14 EP220)
 Test Date: December 17, 2015

Medium(liquid type)	MSL_900
Frequency (MHz)	835.0000
Relative permittivity (real part)	53.24
Conductivity (S/m)	0.94
Input power	100mW
Crest Factor	1.0
Conversion Factor	5.04
Variation (%)	1.0600000
SAR 10g (W/Kg)	0.6348979
SAR 1g (W/Kg)	0.9768104
SURFACE SAR	VOLUME SAR

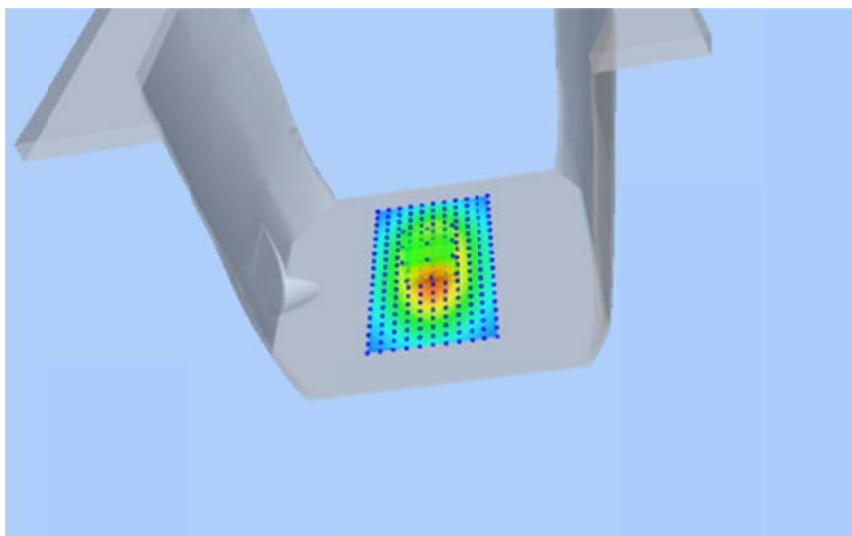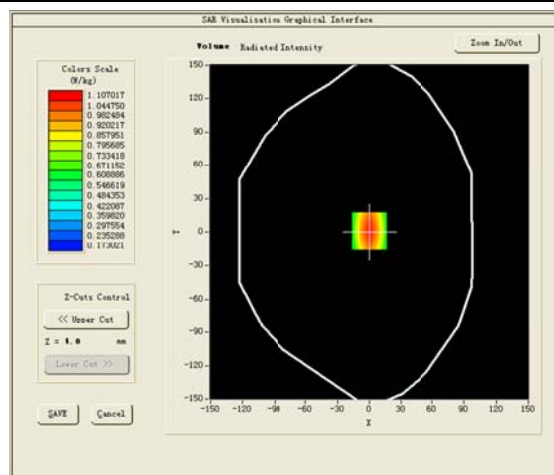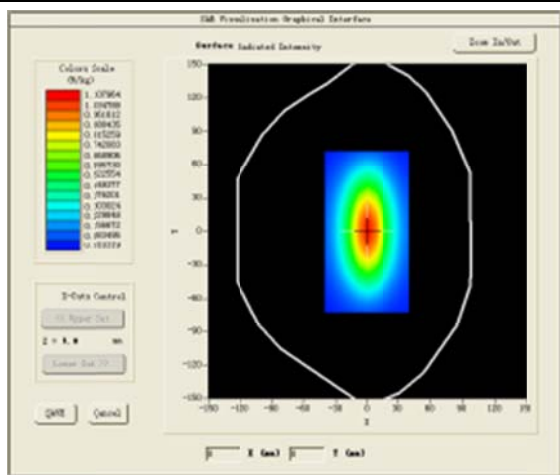

Test mode:1800MHz(Head)
 Product Description:Validation
 Model :Dipole SID1800
 E-Field Probe:SSE5(SN17/14 EP220)
 Test Date: December 18, 2015




Medium(liquid type)	HSL_1800
Frequency (MHz)	1800.000000
Relative permittivity (real part)	41.13
Conductivity (S/m)	1.36
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.25
Variation (%)	-1.5500000
SAR 10g (W/Kg)	1.8531472
SAR 1g (W/Kg)	4.0087396

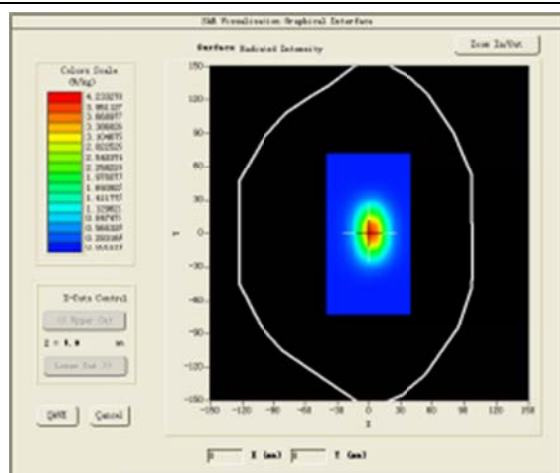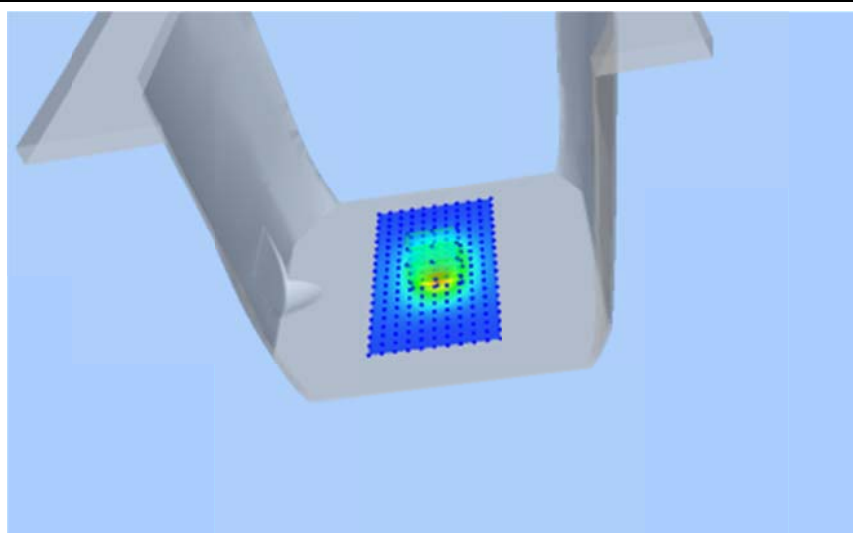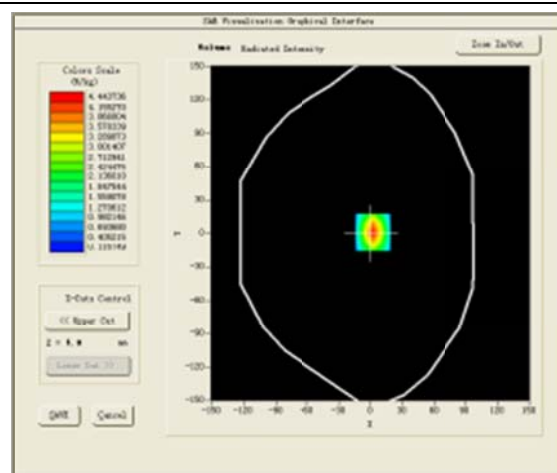SURFACE SAR**VOLUME SAR**

Test mode:1800MHz(Body)
Product Description:Validation
Model :Dipole SID1800
E-Field Probe:SSE5(SN17/14 EP220)
Test Date: December 18, 2015




Medium(liquid type)	MSL_1800
Frequency (MHz)	1800.000000
Relative permittivity (real part)	53.09
Conductivity (S/m)	1.33
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.34
Variation (%)	4.0200000
SAR 10g (W/Kg)	2.1647896
SAR 1g (W/Kg)	4.2305571

VOLUME SAR

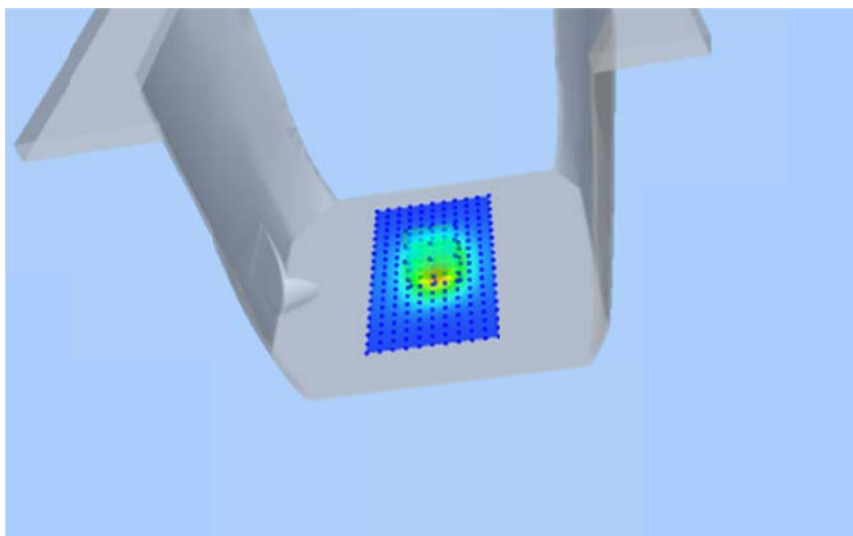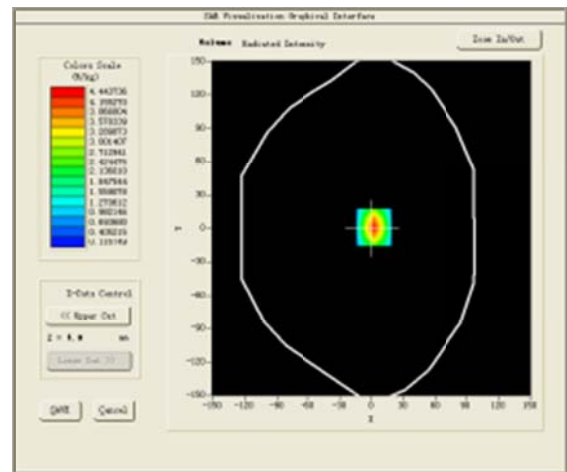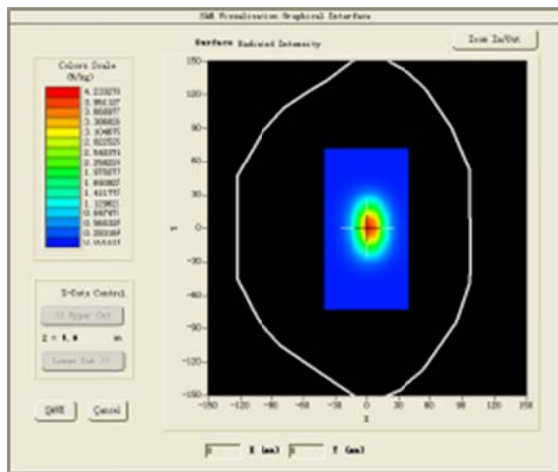




Test mode:1900MHz(Head)
 Product Description:Validation
 Model :Dipole SID1900
 E-Field Probe:SSE5(SN17/14 EP221)
 Test Date: December 21, 2015

Medium(liquid type)	HSL_1900
Frequency (MHz)	1900.0000
Relative permittivity (real part)	41.25
Conductivity (S/m)	1.41
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.71
Variation (%)	2.3900000
SAR 10g (W/Kg)	2.2087497
SAR 1g (W/Kg)	3.9201154
SURFACE SAR	VOLUME SAR

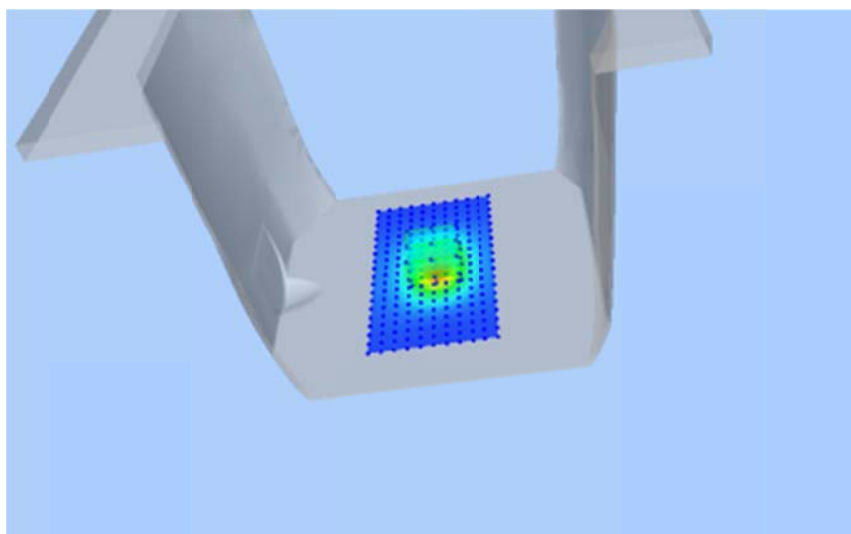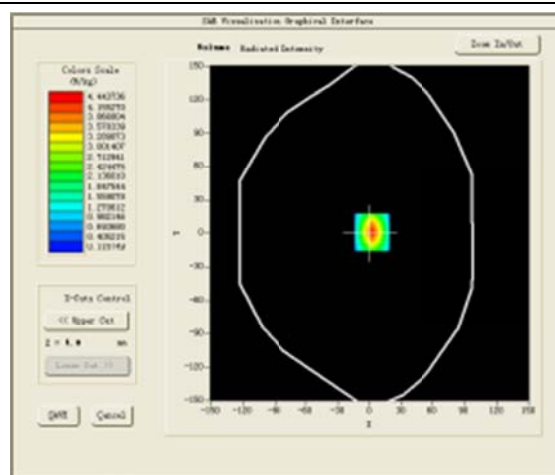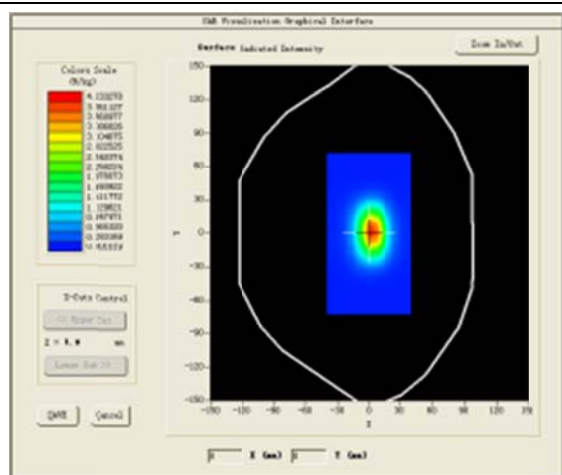




Test mode:1900MHz(Body)
 Product Description:Validation
 Model :Dipole SID1900
 E-Field Probe:SSE5(SN17/14 EP221)
 Test Date: December 21, 2015

Medium(liquid type)	MSL_1900
Frequency (MHz)	1900.0000
Relative permittivity (real part)	54.46
Conductivity (S/m)	1.52
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.85
Variation (%)	-0.3200000
SAR 10g (W/Kg)	1.9743882
SAR 1g (W/Kg)	4.0762697
SURFACE SAR	VOLUME SAR

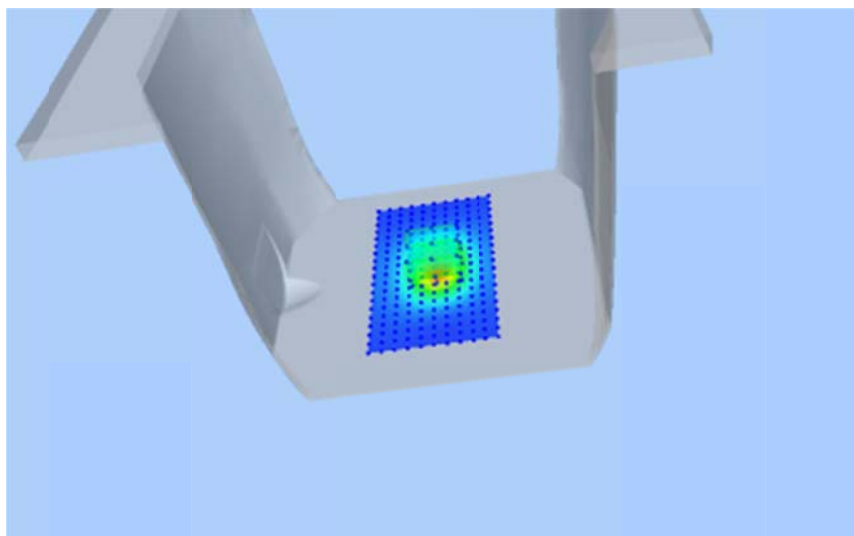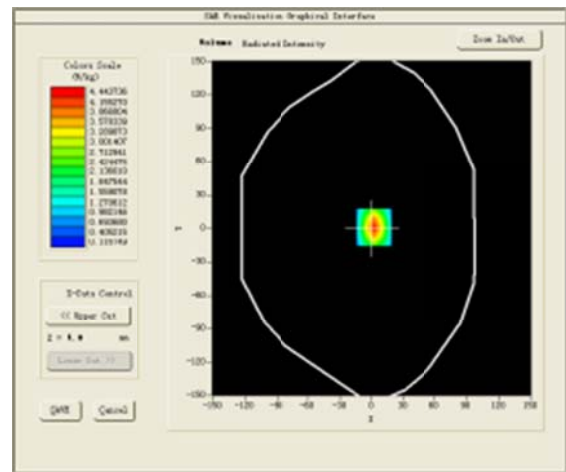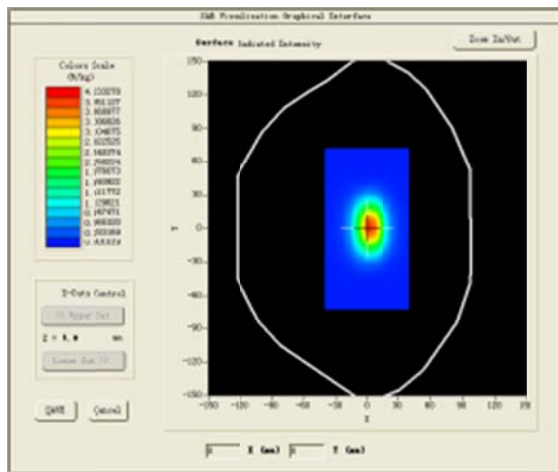




Test mode:2450MHz(Head)
 Product Description:Validation
 Model:Dipole SID2450
 E-Field Probe:SSE5(SN17/14 EP221)
 Test Date: December 22, 2015

Medium(liquid type)	HSL_2450
Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.11
Conductivity (S/m)	1.79
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.11
Variation (%)	2.5900000
SAR 10g (W/Kg)	2.3768495
SAR 1g (W/Kg)	4.9673667
SURFACE SAR	VOLUME SAR

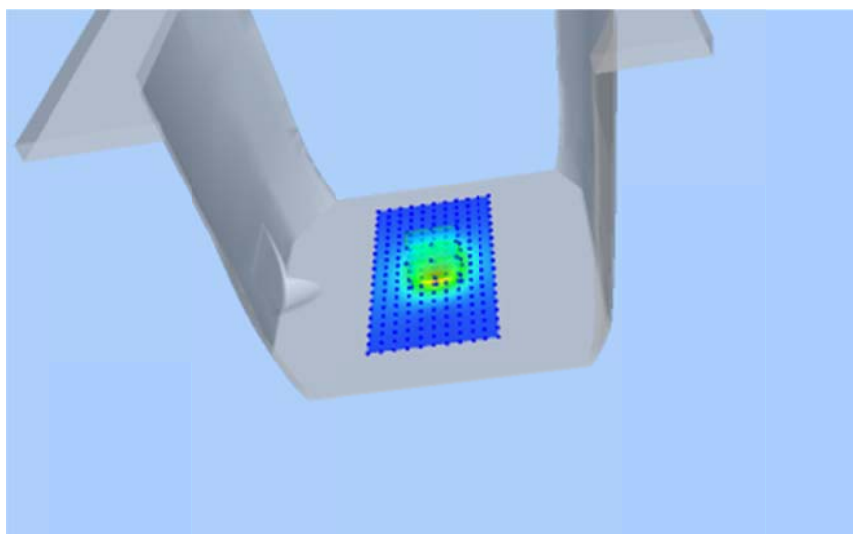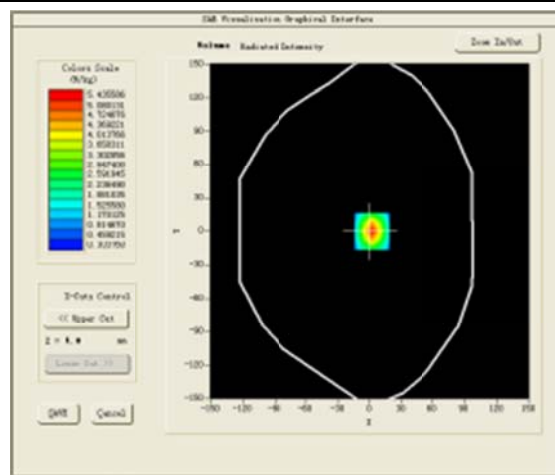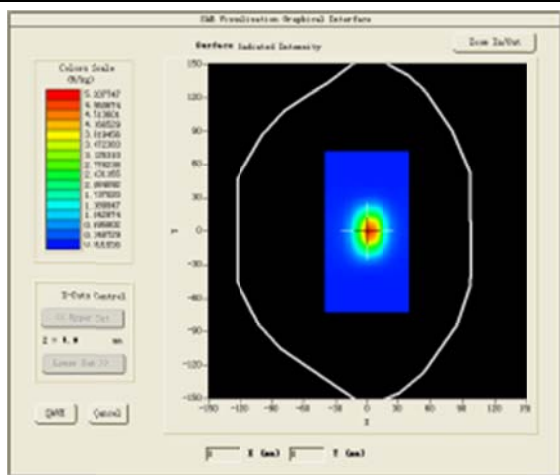




Test mode:2450MHz(Body)
 Product Description:Validation
 Model:Dipole SID2450
 E-Field Probe:SSE5(SN17/14 EP221)
 Test Date: December 22, 2015

Medium(liquid type)	MSL_2450
Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.78
Conductivity (S/m)	1.94
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.25
Variation (%)	4.1700000
SAR 10g (W/Kg)	2.3301966
SAR 1g (W/Kg)	5.0196472
SURFACE SAR	VOLUME SAR

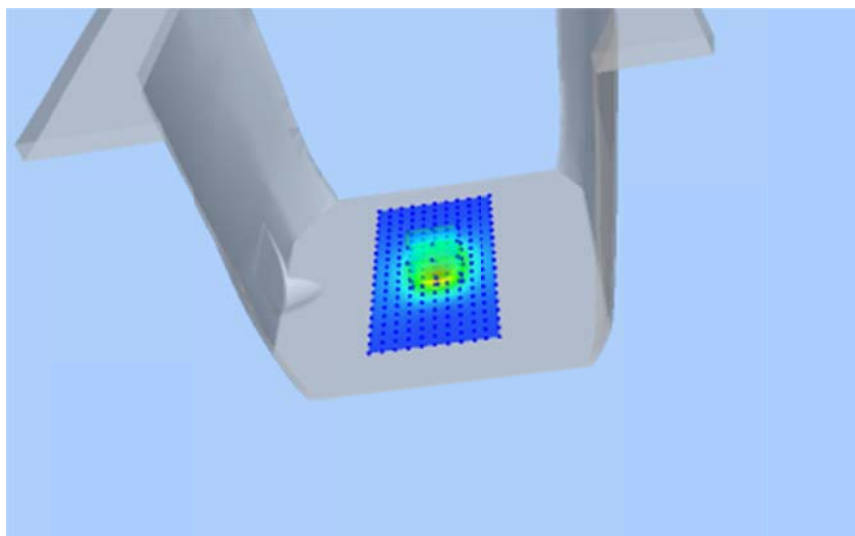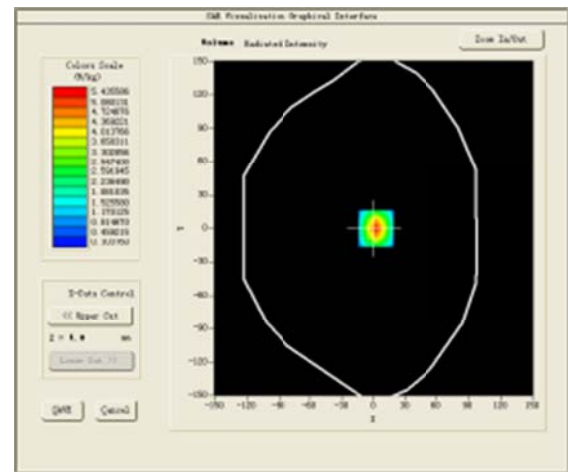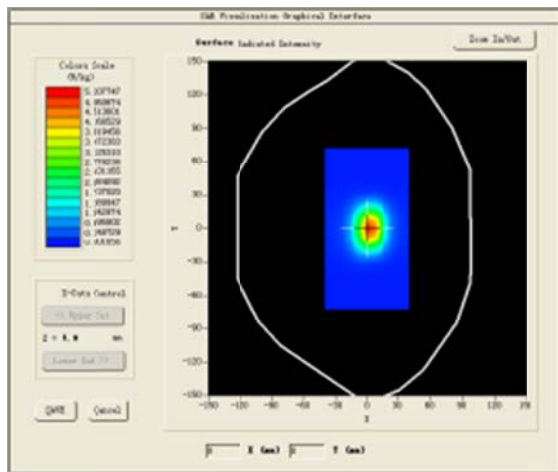




Test mode:2600MHz(Head)
 Product Description:Validation
 Model:Dipole SID2450
 E-Field Probe:SSE5(SN17/14 EP221)
 Test Date: December 25, 2015

Medium(liquid type)	HSL_2600
Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.27
Conductivity (S/m)	1.85
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.20
Variation (%)	-2.6100000
SAR 10g (W/Kg)	2.1495327
SAR 1g (W/Kg)	4.7326188
SURFACE SAR	VOLUME SAR

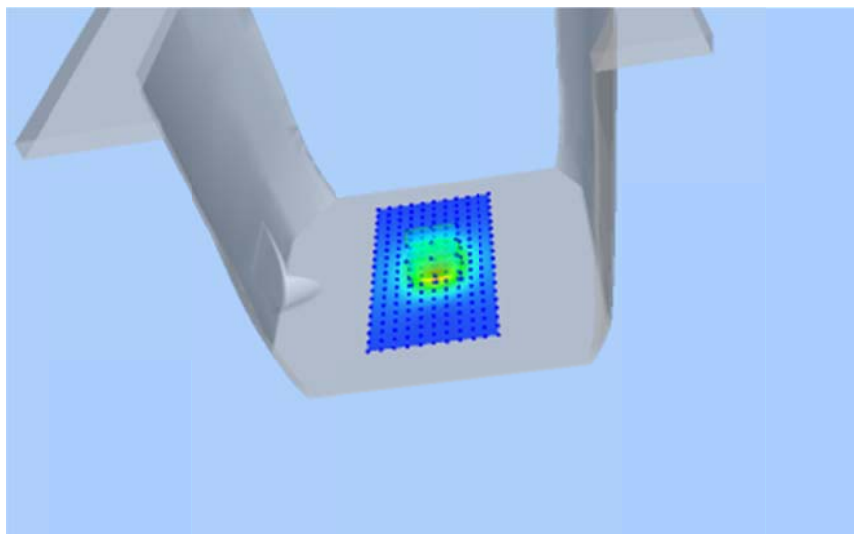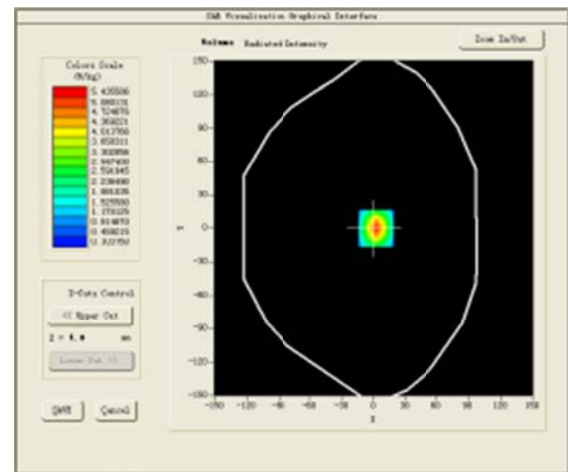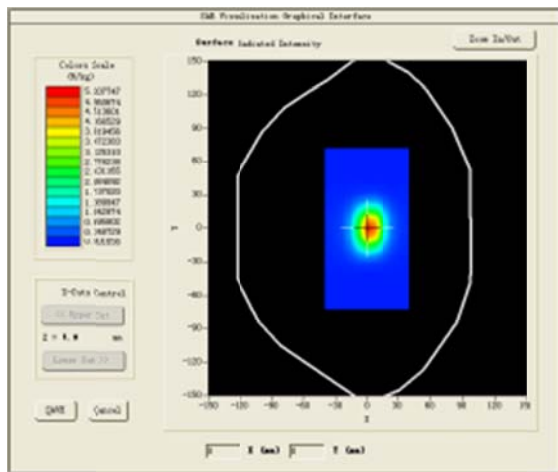




Test mode:2600MHz(Body)
 Product Description:Validation
 Model:Dipole SID2450
 E-Field Probe:SSE5(SN17/14 EP221)
 Test Date: December 25, 2015

Medium(liquid type)	MSL_2450
Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.36
Conductivity (S/m)	2.24
Input power	100mW
Crest Factor	1.0
Conversion Factor	4.32
Variation (%)	0.9300000
SAR 10g (W/Kg)	2.1085742
SAR 1g (W/Kg)	4.8215567
SURFACE SAR	VOLUME SAR

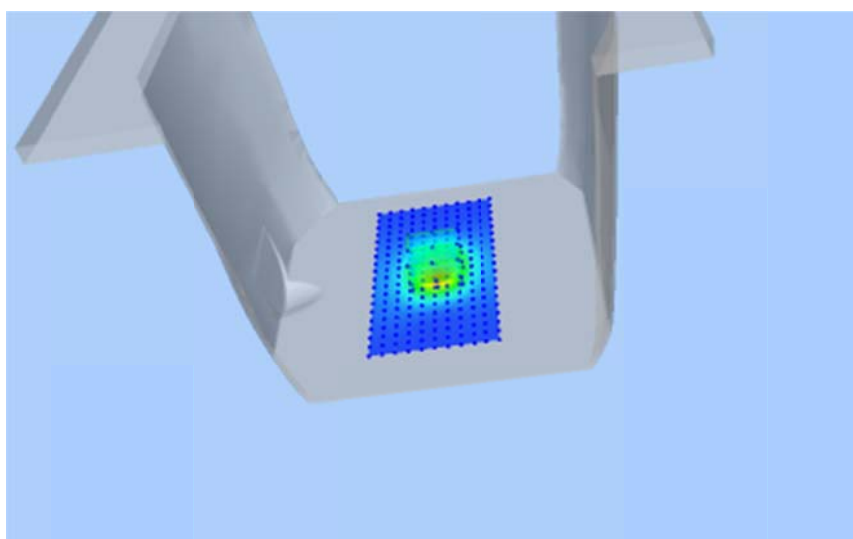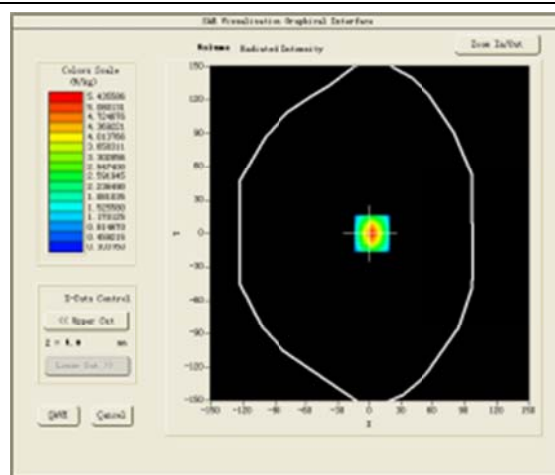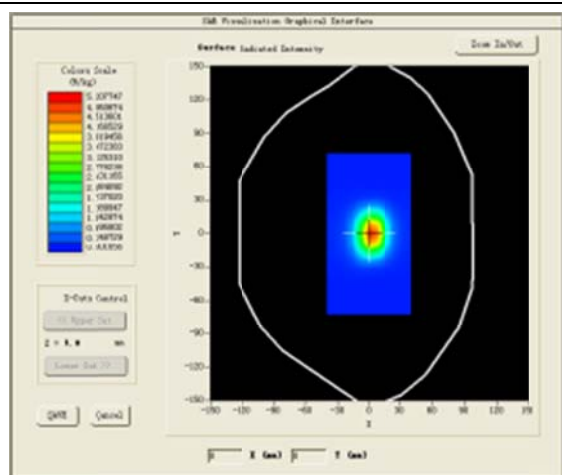




Test mode:5200MHz(Head)
 Product Description:Validation
 Model:Dipole SID5000
 E-Field Probe:SSE5(SN13/14 EPG214)
 Test Date: December 23, 2015

Medium(liquid type)	HSL_5000
Frequency (MHz)	5200.0000
Relative permittivity (real part)	36.18
Conductivity (S/m)	4.63
Input power	100mW
Crest Factor	1.0
Conversion Factor	16.88
Variation (%)	0.5400000
SAR 10g (W/Kg)	2.2461573
SAR 1g (W/Kg)	4.4687281
SURFACE SAR	VOLUME SAR

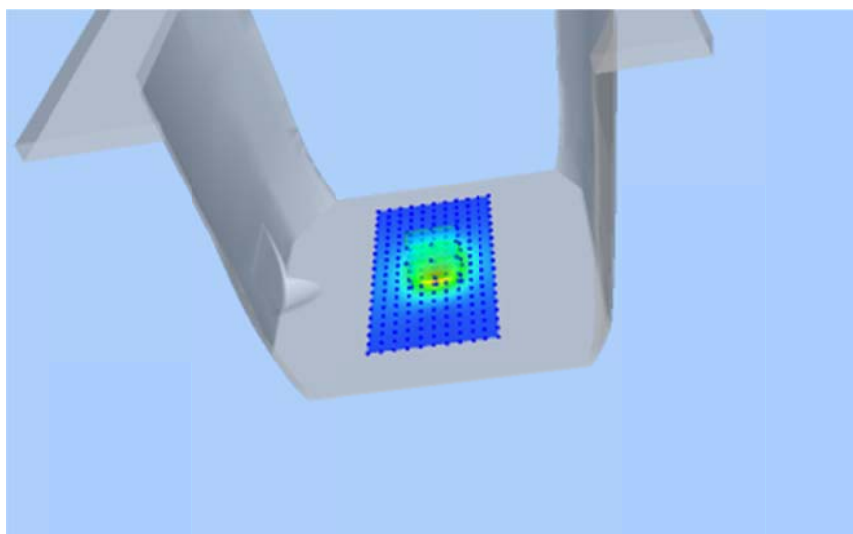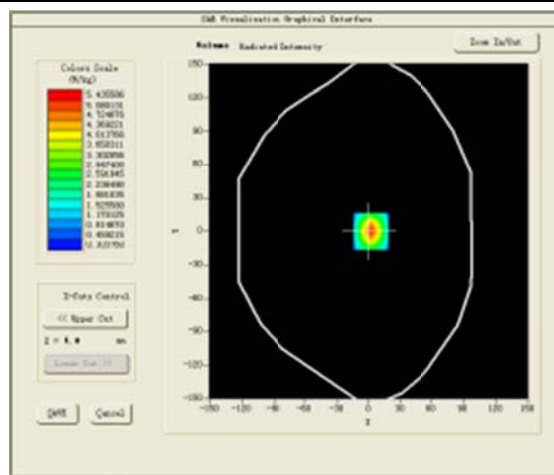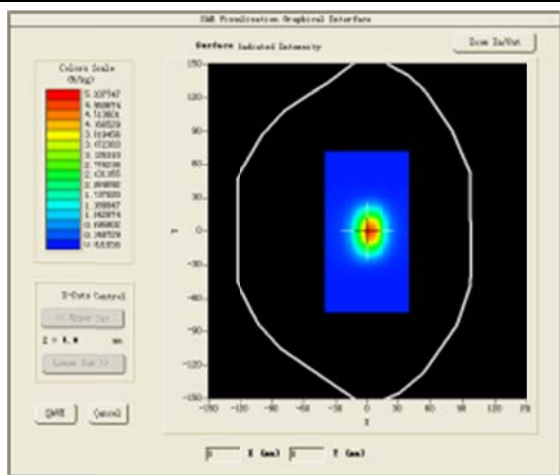




Test mode:5200MHz(Body)
 Product Description:Validation
 Model:Dipole SID5000
 E-Field Probe:SSE5(SN13/14 EPG214)
 Test Date: December 23, 2015

Medium(liquid type)	MSL_5000
Frequency (MHz)	5200.0000
Relative permittivity (real part)	49.66
Conductivity (S/m)	5.25
Input power	100mW
Crest Factor	1.0
Conversion Factor	17.36
Variation (%)	1.3700000
SAR 10g (W/Kg)	2.1976343
SAR 1g (W/Kg)	5.1987269
SURFACE SAR	VOLUME SAR

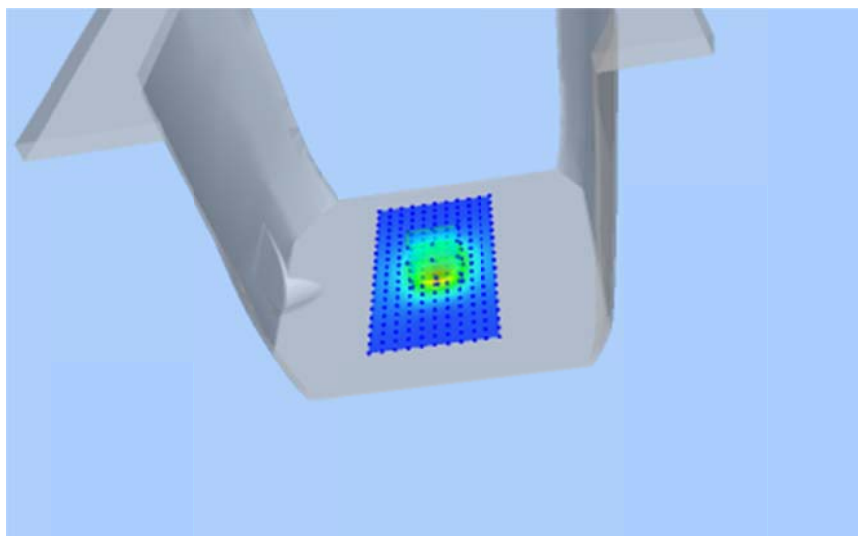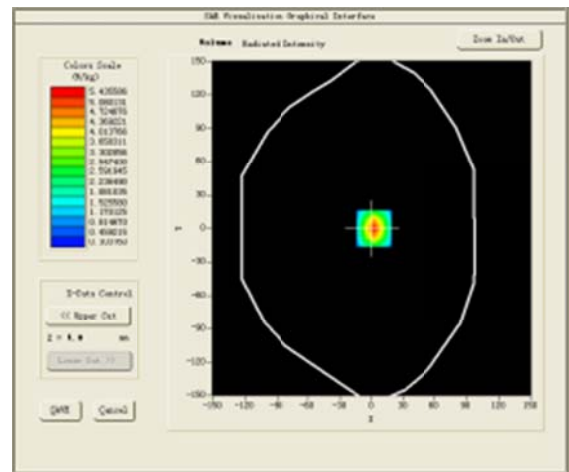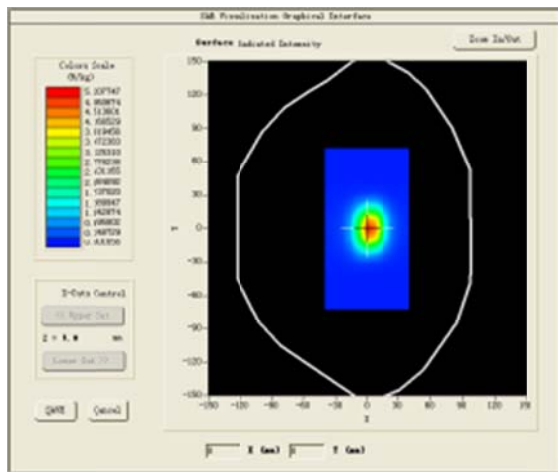




Test mode:5800MHz(Head)
 Product Description:Validation
 Model:Dipole SID5000
 E-Field Probe:SSE5(SN13/14 EPG214)
 Test Date: December 24, 2015

Medium(liquid type)	HSL_5000
Frequency (MHz)	5800.0000
Relative permittivity (real part)	36.18
Conductivity (S/m)	4.63
Input power	100mW
Crest Factor	1.0
Conversion Factor	16.24
Variation (%)	0.5400000
SAR 10g (W/Kg)	2.2461573
SAR 1g (W/Kg)	4.4687281
SURFACE SAR	VOLUME SAR

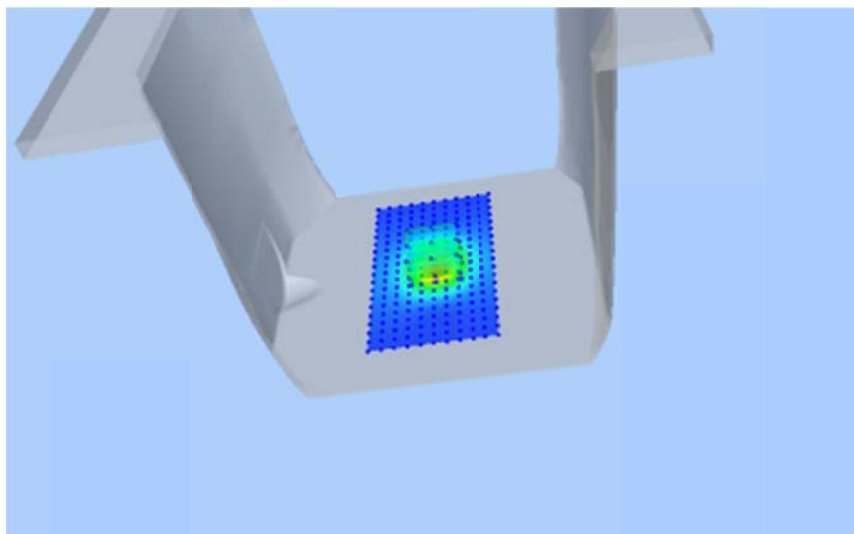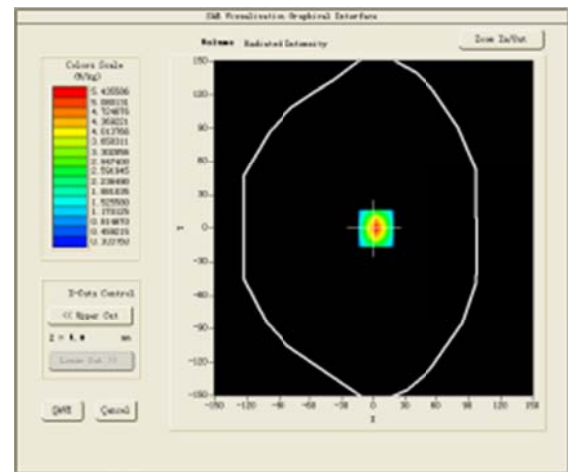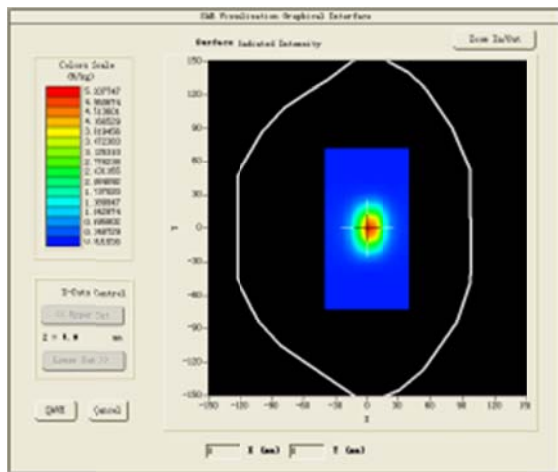

Test mode:5800MHz(Body)
 Product Description:Validation
 Model:Dipole SID5000
 E-Field Probe:SSE5(SN13/14 EPG214)
 Test Date: December 24, 2015

Medium(liquid type)	MSL_5000
Frequency (MHz)	5800.0000
Relative permittivity (real part)	49.66
Conductivity (S/m)	5.25
Input power	100mW
Crest Factor	1.0
Conversion Factor	16.79
Variation (%)	1.3700000
SAR 10g (W/Kg)	2.1976343
SAR 1g (W/Kg)	5.1987269
SURFACE SAR	VOLUME SAR

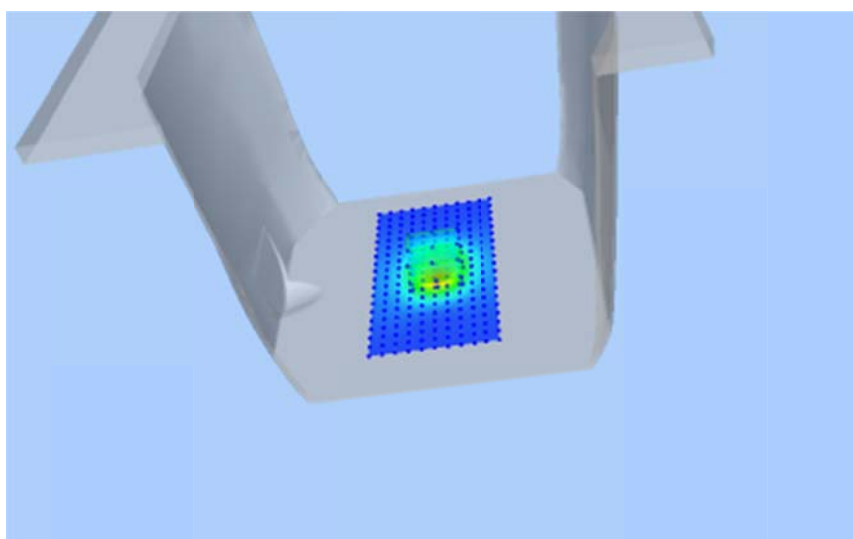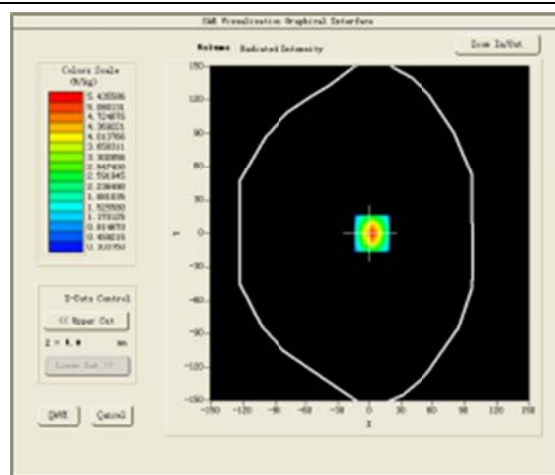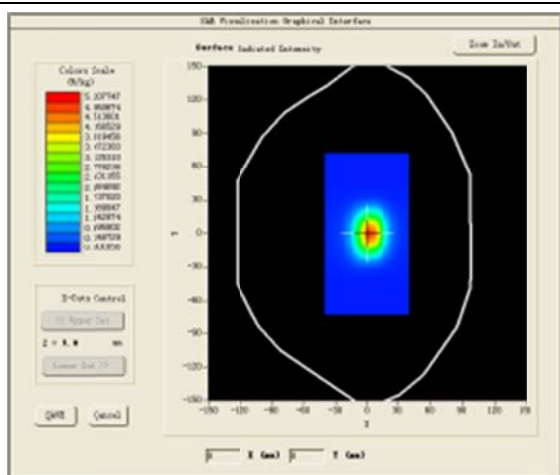

5.1. SAR Test Graph Results

SAR plots for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination according to FCC KDB 865664 D02

#1




Test Mode:GSM 850MHz,Mid channel(Head Right Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL_900
Frequency (MHz)	836.600000
Relative permittivity (real part)	42.81
Conductivity (S/m)	0.89
E-Field Probe	SN 17/14 EP220
Crest Factor	8.0
Conversion Factor	4.83
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-2.380000
SAR 10g (W/Kg)	0.219114
SAR 1g (W/Kg)	0.305981
SURFACE SAR	VOLUME SAR

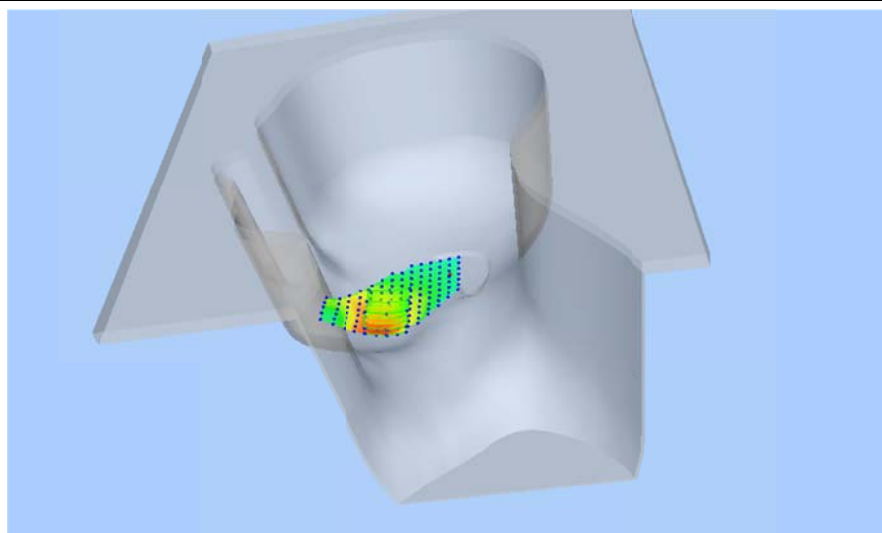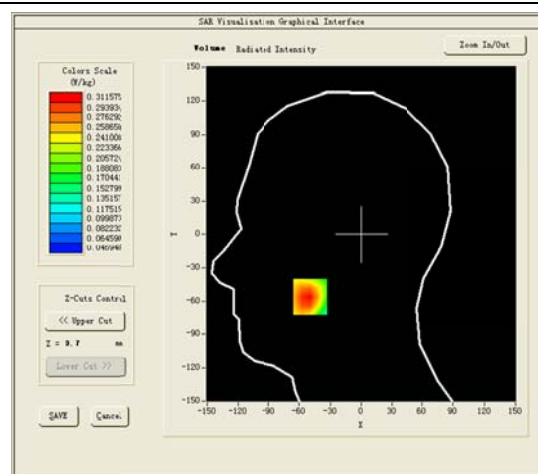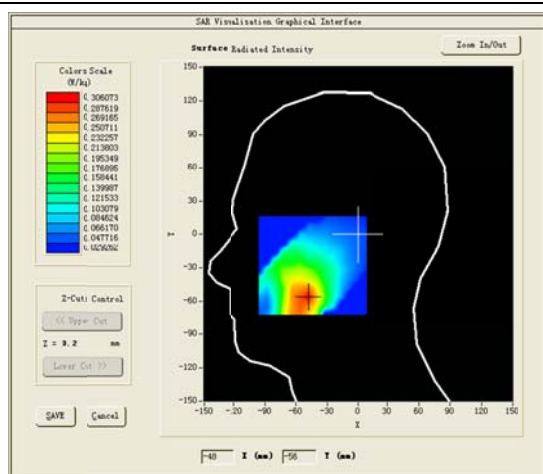

#2




Test Mode: Hotspot GSM850MHz,Mid channel(Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL_900
Frequency (MHz)	836.600000
Relative permittivity (real part)	53.46
Conductivity (S/m)	0.96
E-Field Probe	SN 17/14 EP220
Crest Factor	6.02
Conversion Factor	5.02
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.400000
SAR 10g (W/Kg)	0.423008
SAR 1g (W/Kg)	0.791483
SURFACE SAR	VOLUME SAR

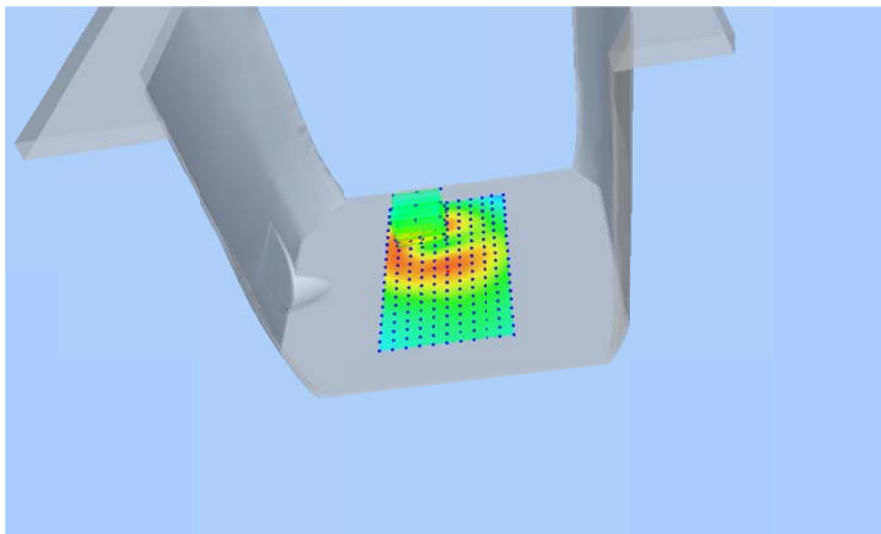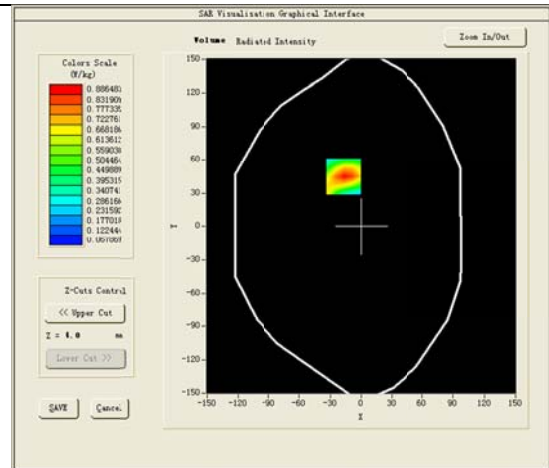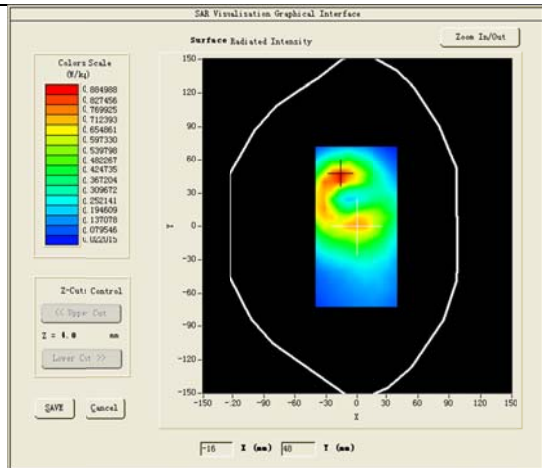

#3




Test Mode:GSM 1900MHz,Mid channel(Head Right Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 21, 2015

Medium(liquid type)	MSL 1900
Frequency (MHz)	1880.000000
Relative permittivity (real part)	41.09
Conductivity (S/m)	1.42
E-Field Probe	SN17/14 EP221
Crest Factor	8.0
Conversion Factor	4.71
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.730000
SAR 10g (W/Kg)	0.075155
SAR 1g (W/Kg)	0.108012

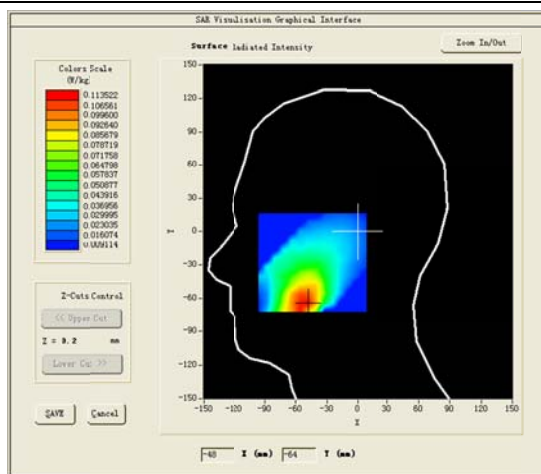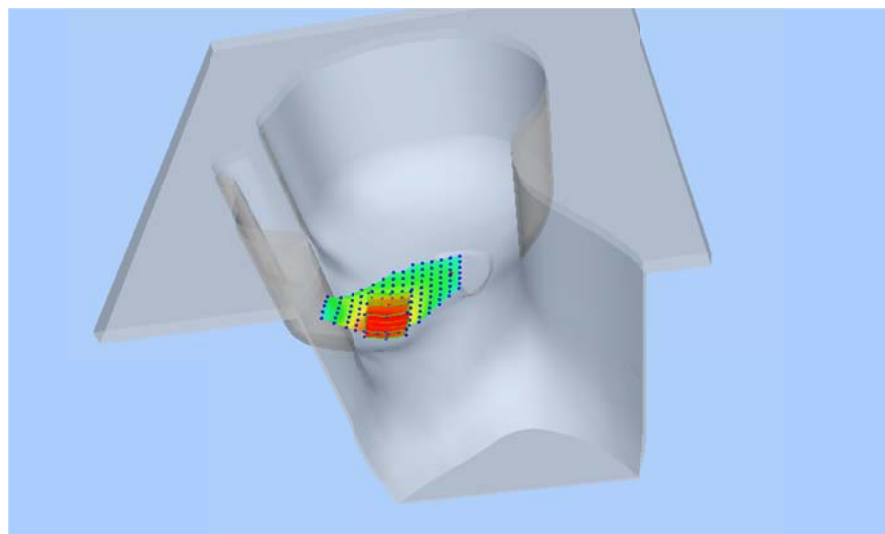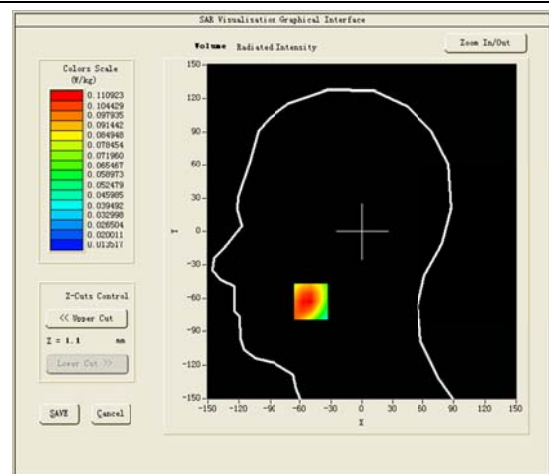SURFACE SAR**VOLUME SAR**

#4




Test Mode: Hotspot GPRS1900MHz,Mid channel(Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 21, 2015

Medium(liquid type)	MSL 1900
Frequency (MHz)	1880.000000
Relative permittivity (real part)	54.20
Conductivity (S/m)	1.54
E-Field Probe	SN17/14 EP221
Crest Factor	4.06
Conversion Factor	4.85
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.110000
SAR 10g (W/Kg)	0.316688
SAR 1g (W/Kg)	0.567872
SURFACE SAR	VOLUME SAR

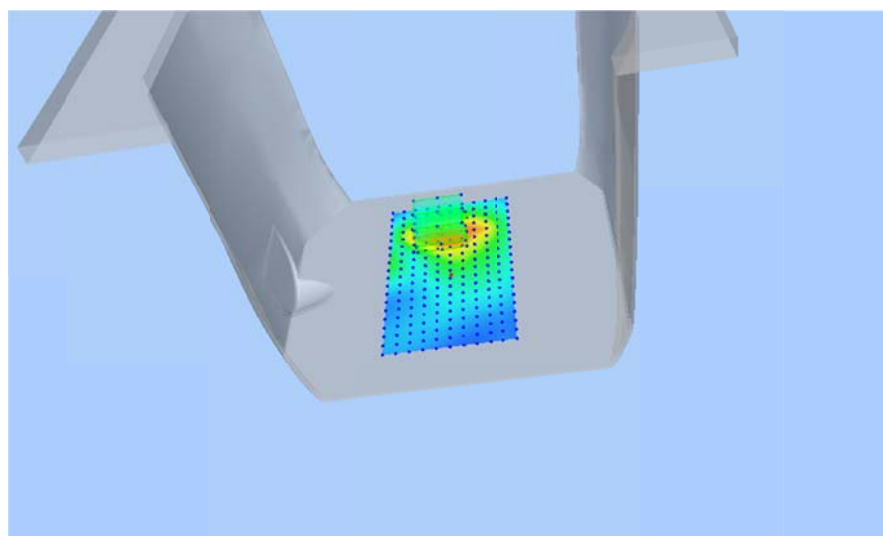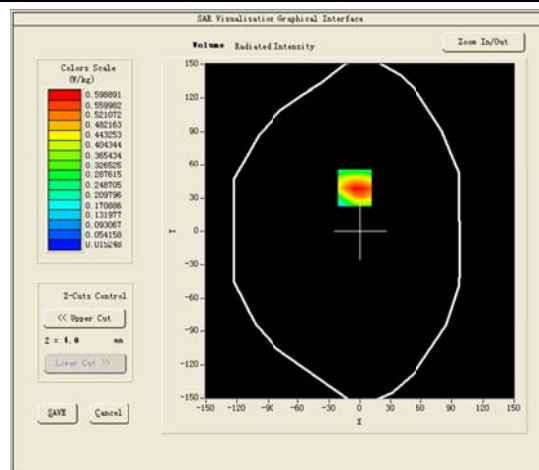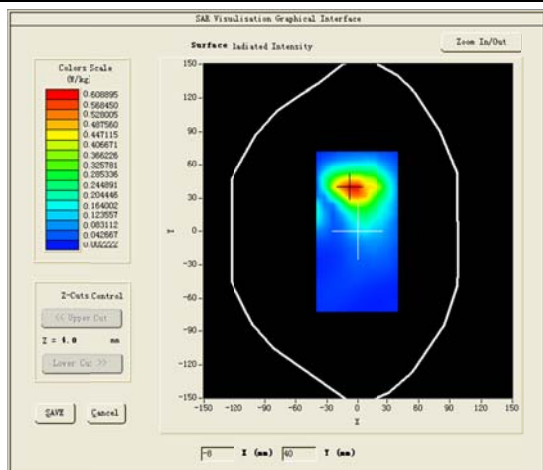

#5




Test Mode:WCDMA Band V, Mid channel(Head Right Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL_900
Frequency (MHz)	836.600000
Relative permittivity (real part)	42.81
Conductivity (S/m)	0.89
E-Field Probe	SN 17/14 EP220
Crest Factor	1.0
Conversion Factor	4.83
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-0.900000
SAR 10g (W/Kg)	0.152286
SAR 1g (W/Kg)	0.206583
SURFACE SAR	VOLUME SAR

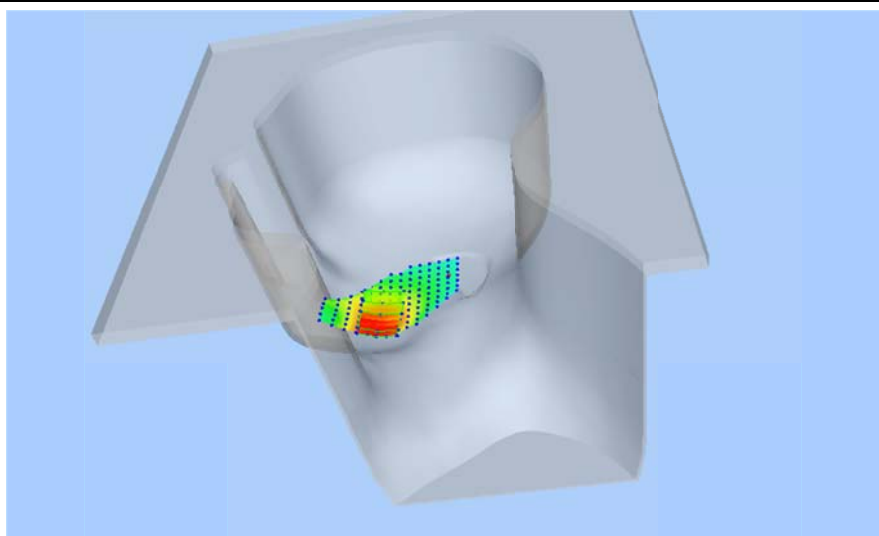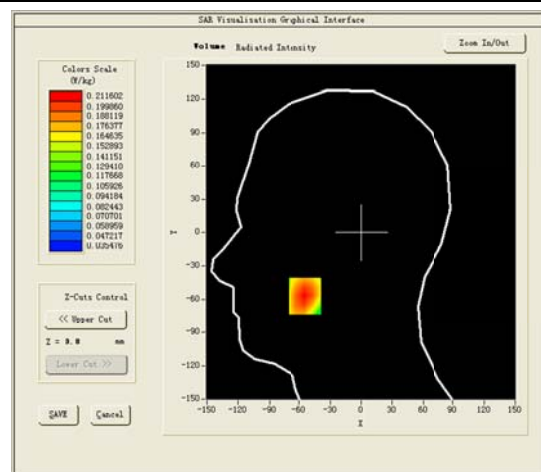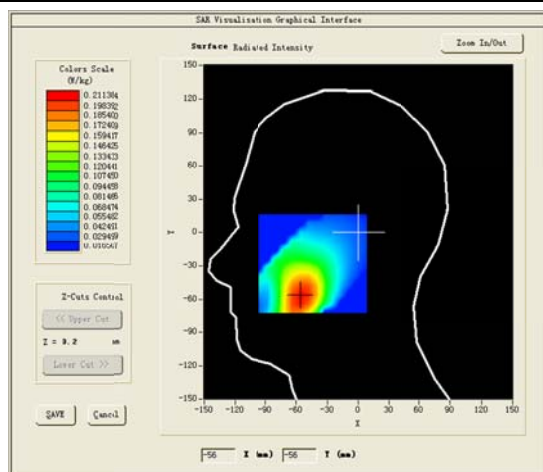

#6




Test Mode: Hotspot WCDMA Band V, Mid channel (Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL_900
Frequency (MHz)	836.600000
Relative permittivity (real part)	53.46
Conductivity (S/m)	0.96
E-Field Probe	SN 17/14 EP220
Crest Factor	1.0
Conversion Factor	5.02
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-0.200000
SAR 10g (W/Kg)	0.424212
SAR 1g (W/Kg)	0.718287
SURFACE SAR	VOLUME SAR

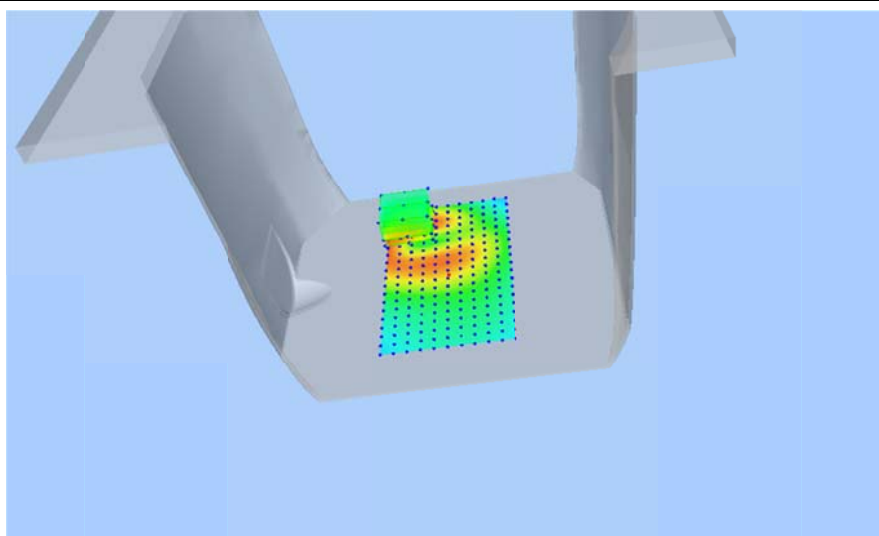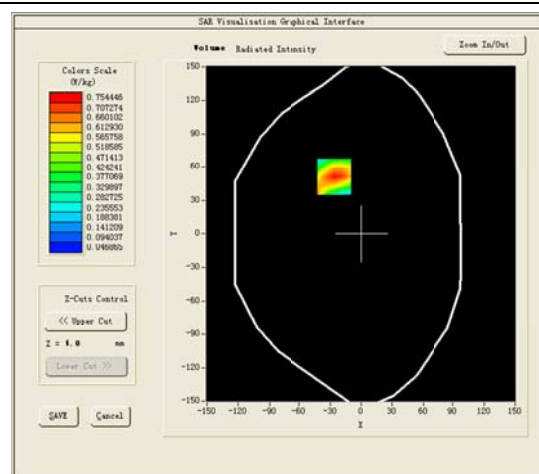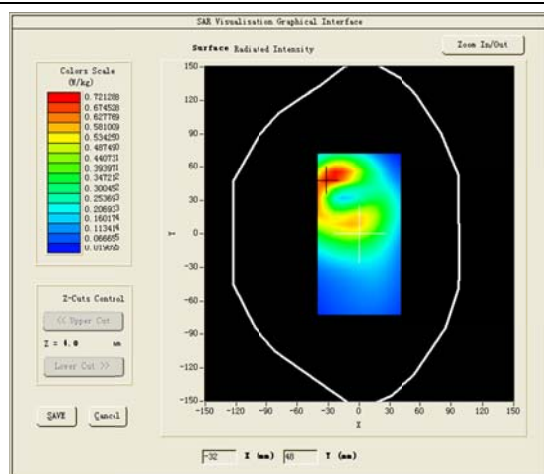

#7




Test Mode:WCDMA Band IV, Mid channel(Head Left Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL 1800
Frequency (MHz)	1740.000000
Relative permittivity (real part)	41.31
Conductivity (S/m)	1.38
E-Field Probe	SN 17/14 EP220
Crest Factor	1.0
Conversion Factor	4.25
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.110000
SAR 10g (W/Kg)	0.091913
SAR 1g (W/Kg)	0.123247

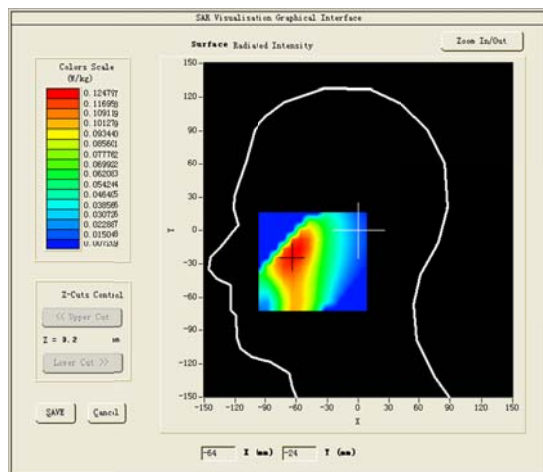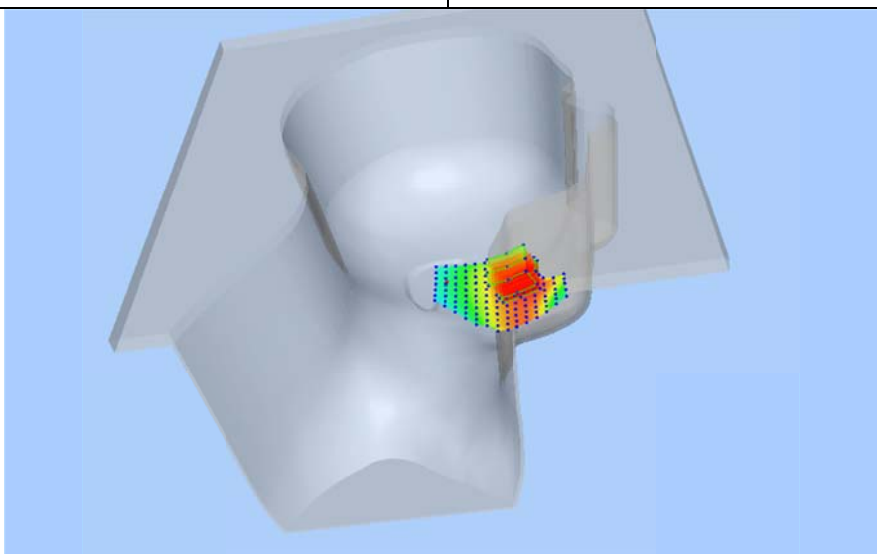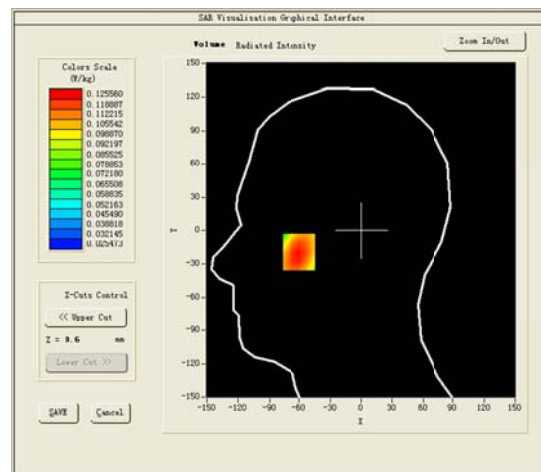SURFACE SAR**VOLUME SAR**

#8




Test Mode: Hotspot WCDMA Band IV, Mid channel (Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL_1800
Frequency (MHz)	1740.000000
Relative permittivity (real part)	53.27
Conductivity (S/m)	1.51
E-Field Probe	SN 17/14 EP220
Crest Factor	1.0
Conversion Factor	4.34
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-0.220000
SAR 10g (W/Kg)	0.393289
SAR 1g (W/Kg)	0.666202
SURFACE SAR	VOLUME SAR

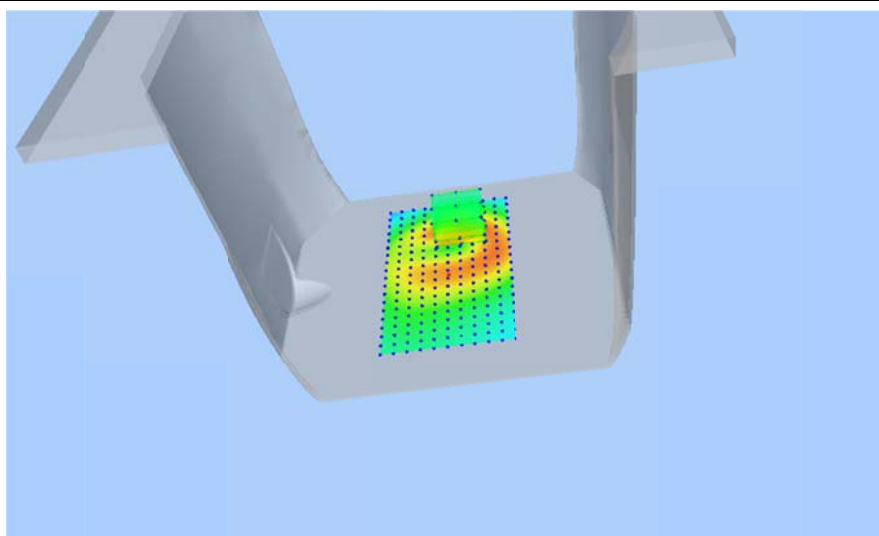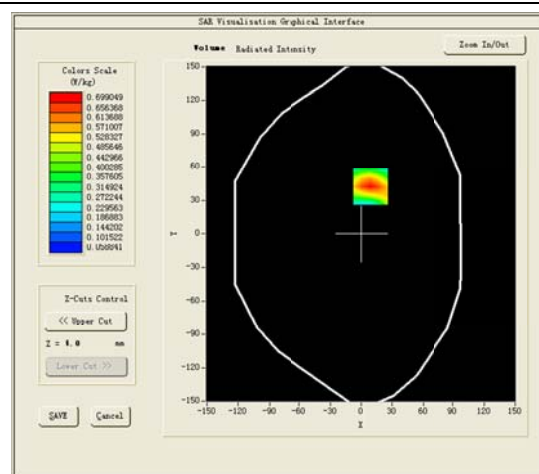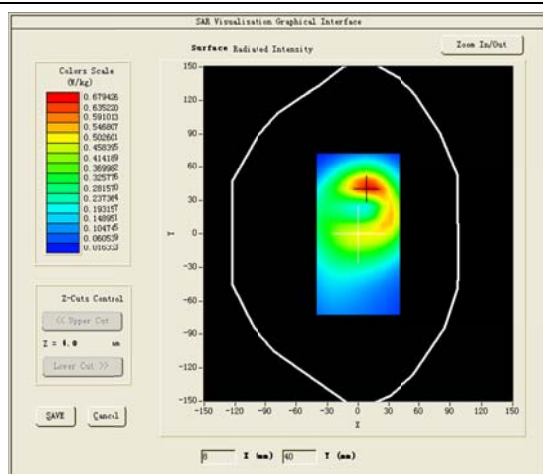

#9




Test Mode:WCDMA Band II,Mid channel(Head Left Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 21, 2015

Medium(liquid type)	MSL 1900
Frequency (MHz)	1880.000000
Relative permittivity (real part)	41.09
Conductivity (S/m)	1.42
E-Field Probe	SN17/14 EP221
Crest Factor	1.0
Conversion Factor	4.71
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-2.000000
SAR 10g (W/Kg)	0.134283
SAR 1g (W/Kg)	0.187306
SURFACE SAR	VOLUME SAR

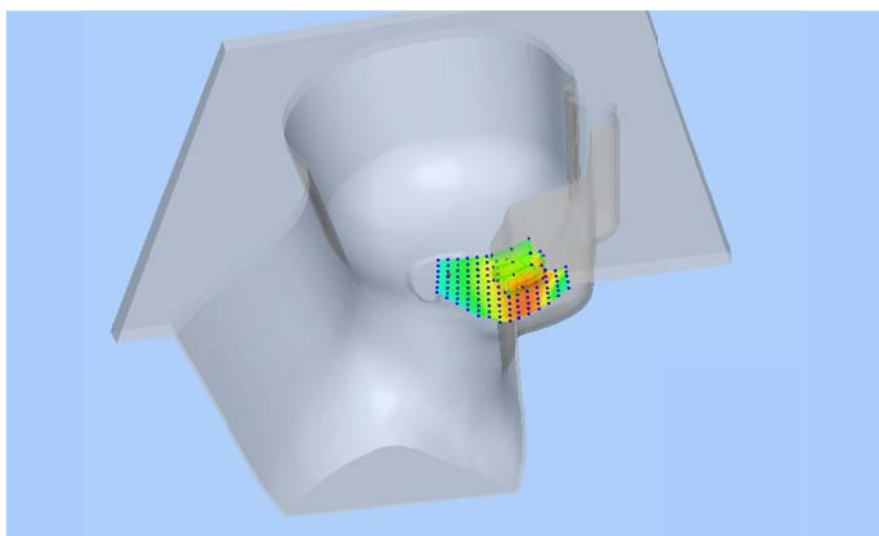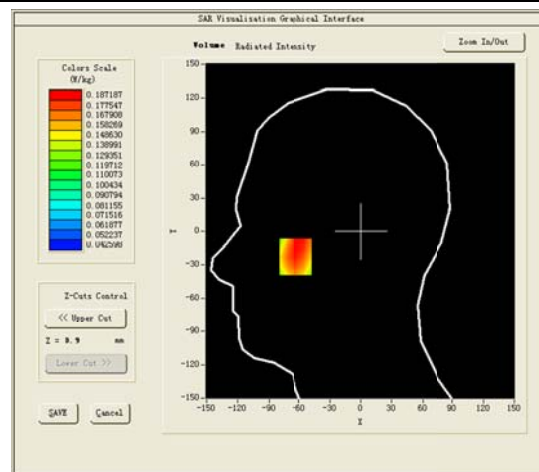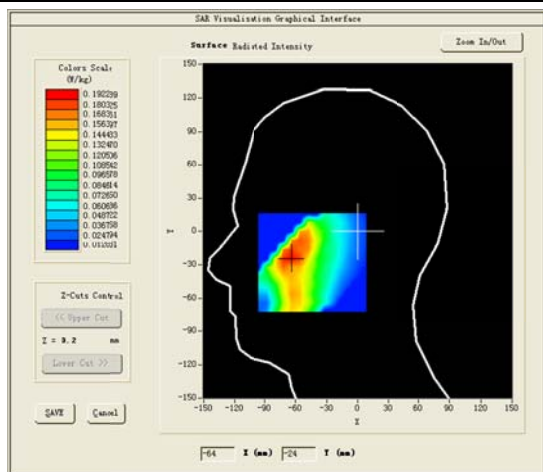

#10




Test Mode: Hotspot WCDMA Band II, Mid channel (Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 21, 2015

Medium (liquid type)	MSL 1900
Frequency (MHz)	1880.000000
Relative permittivity (real part)	54.20
Conductivity (S/m)	1.54
E-Field Probe	SN17/14 EP221
Crest Factor	1.0
Conversion Factor	4.85
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	2.510000
SAR 10g (W/Kg)	0.467770
SAR 1g (W/Kg)	0.788585
SURFACE SAR	VOLUME SAR

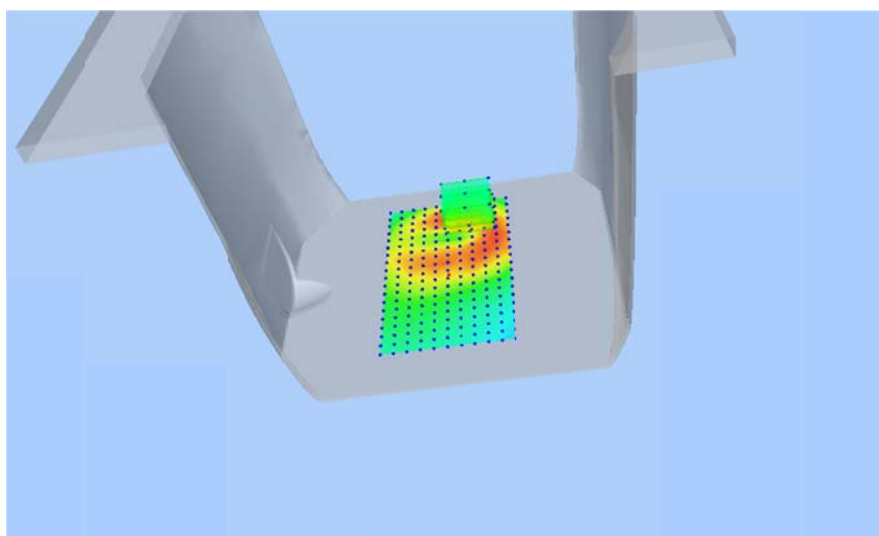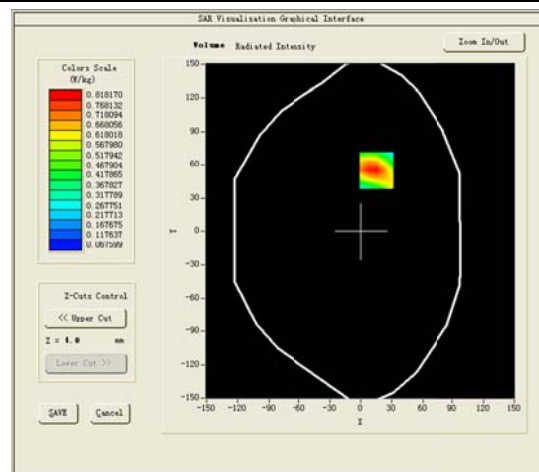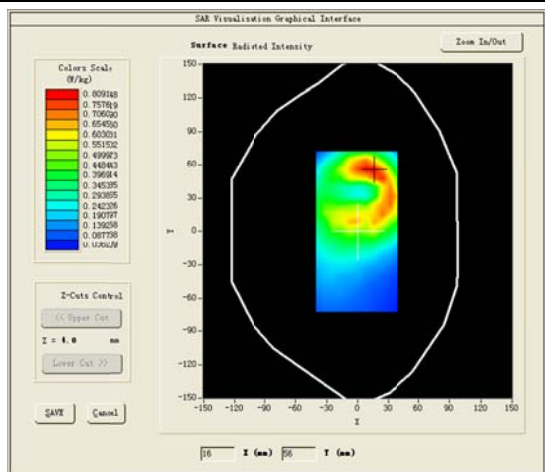

#11




Test Mode: LTE Band 2, Mid channel(Head Left Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 21, 2015

Medium(liquid type)	MSL 1900
Frequency (MHz)	1880.000000
Relative permittivity (real part)	41.09
Conductivity (S/m)	1.42
E-Field Probe	SN17/14 EP221
Crest Factor	1.0
Conversion Factor	4.71
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.250000
SAR 10g (W/Kg)	0.084894
SAR 1g (W/Kg)	0.112810

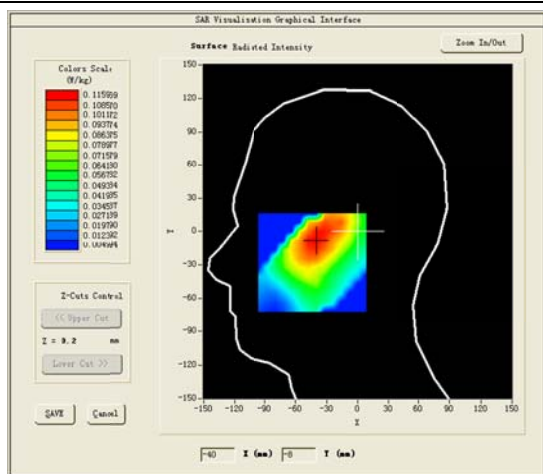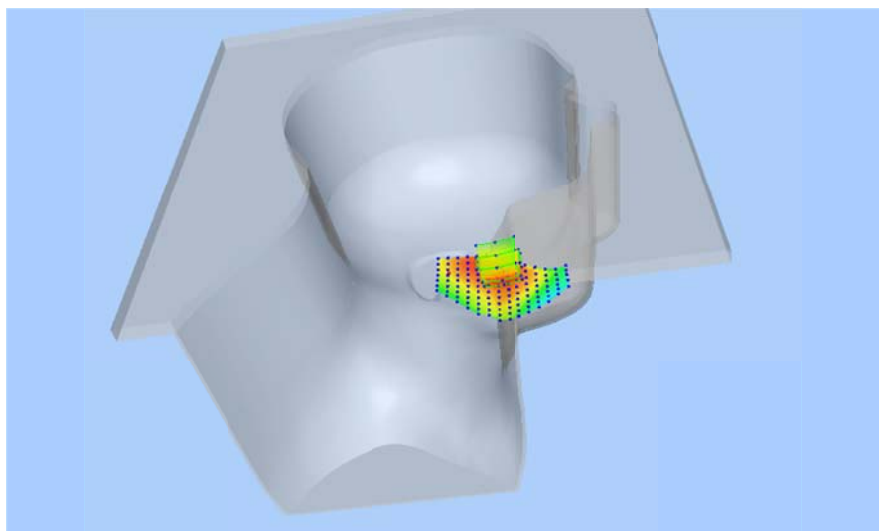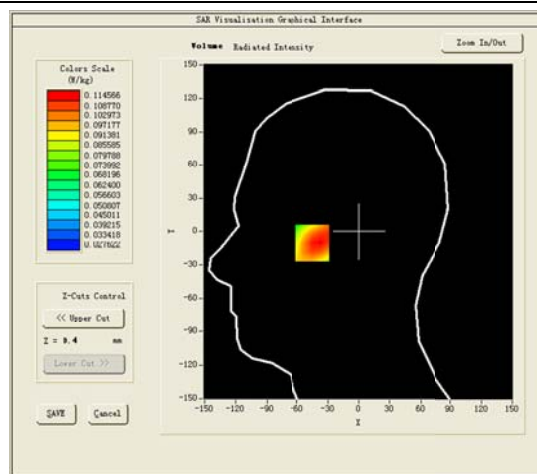SURFACE SAR**VOLUME SAR**

#12




Test Mode: Hotspot LTE Band 2, Mid channel(Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 21, 2015

Medium(liquid type)	MSL 1900
Frequency (MHz)	1880.000000
Relative permittivity (real part)	54.20
Conductivity (S/m)	1.54
E-Field Probe	SN 17/14 EP221
Crest Factor	1.0
Conversion Factor	4.85
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.310000
SAR 10g (W/Kg)	0.327276
SAR 1g (W/Kg)	0.531934
SURFACE SAR	VOLUME SAR

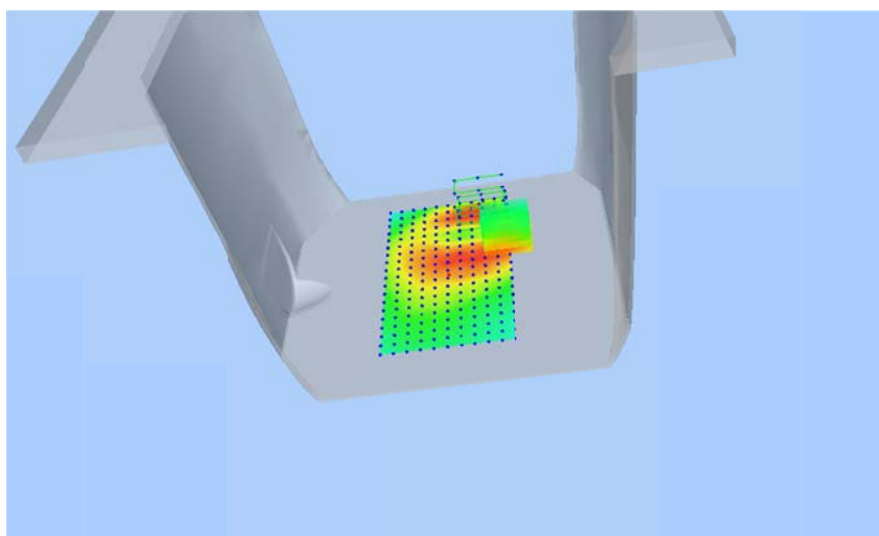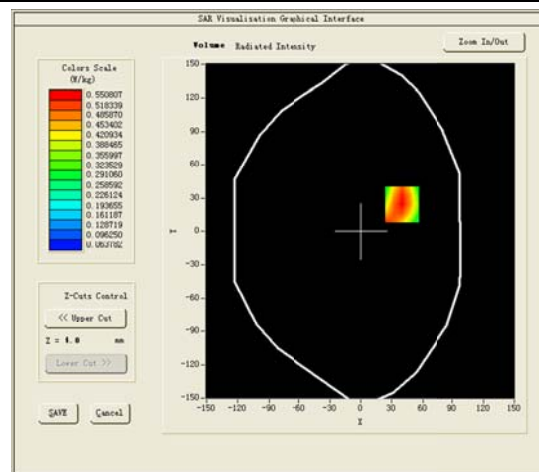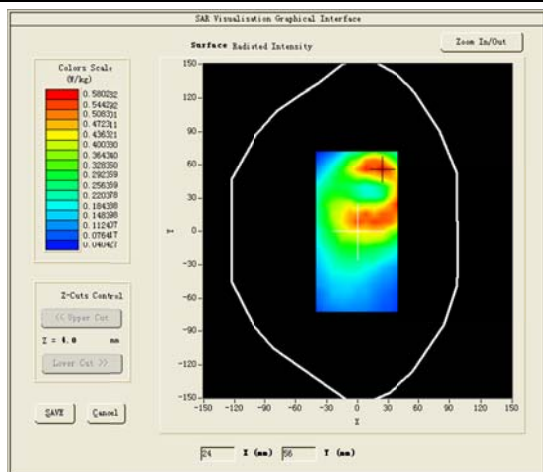

#14




Test Mode: Hotspot LTE Band 4, Middle channel(Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 18, 2015

Medium(liquid type)	MSL 1800
Frequency (MHz)	1732.500000
Relative permittivity (real part)	53.27
Conductivity (S/m)	1.51
E-Field Probe	SN 17/14 EP220
Crest Factor	1.0
Conversion Factor	4.34
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.470000
SAR 10g (W/Kg)	0.209906
SAR 1g (W/Kg)	0.361131

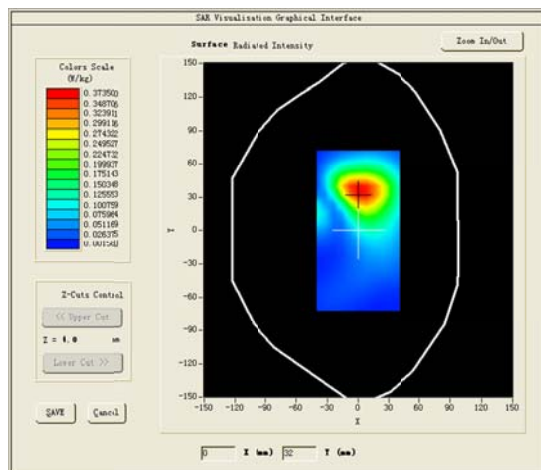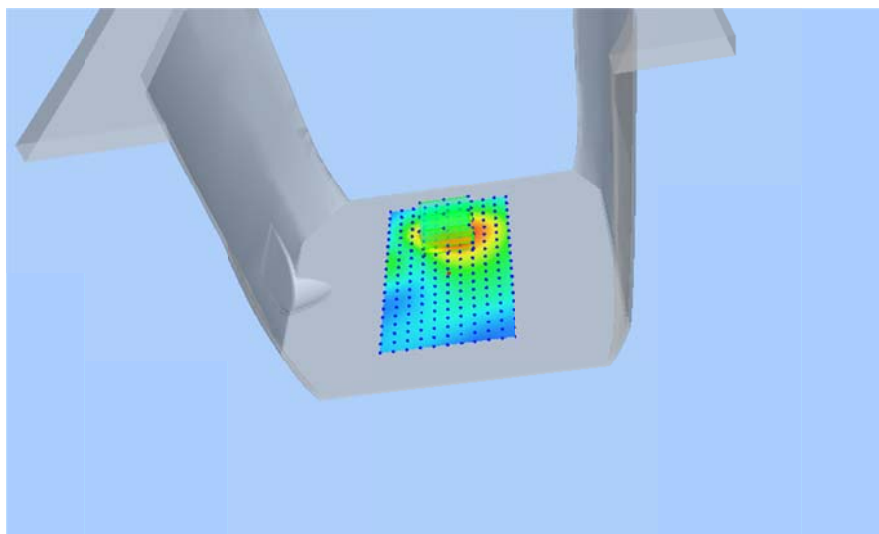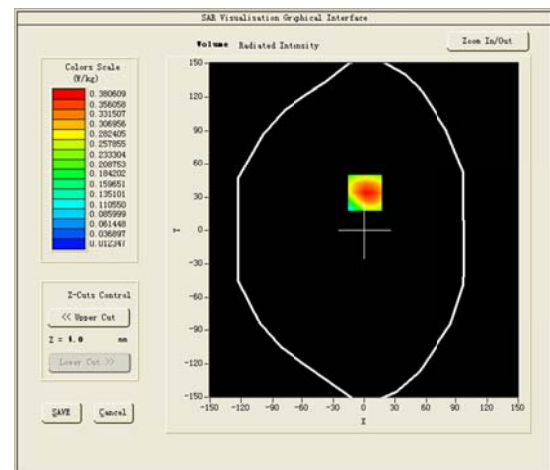SURFACE SAR**VOLUME SAR**

#15




Test Mode: LTE Band 7, Mid channel(Head Right Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL_2600
Frequency (MHz)	2560.00000000
Relative permittivity (real part)	38.35
Conductivity (S/m)	1.92
E-Field Probe	SN 17/14 EP221
Crest Factor	1.0
Conversion Factor	4.20
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.190000
SAR 10g (W/Kg)	0.084267
SAR 1g (W/Kg)	0.115074

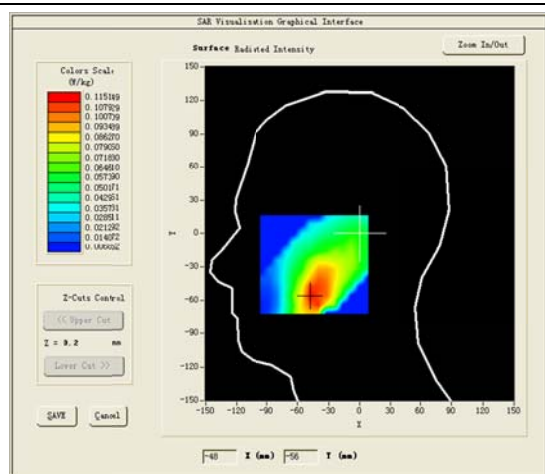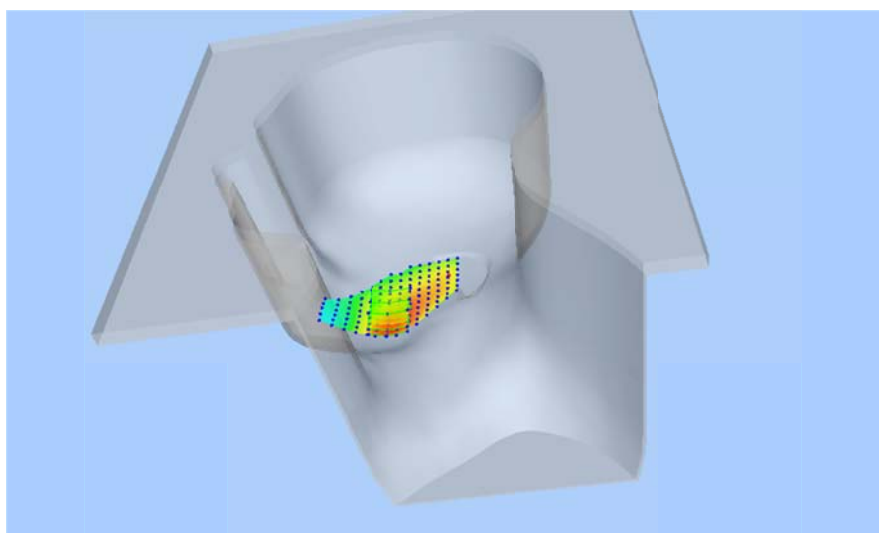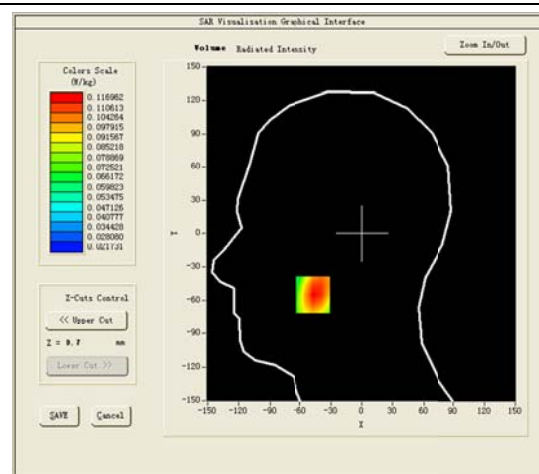SURFACE SAR**VOLUME SAR**

#16




Test Mode: Hotspot LTE Band 7, Mid channel(Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL 2600
Frequency (MHz)	2560.00000000
Relative permittivity (real part)	51.81
Conductivity (S/m)	2.19
E-Field Probe	SN 17/14 EP221
Crest Factor	1.0
Conversion Factor	4.32
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.600000
SAR 10g (W/Kg)	0.434866
SAR 1g (W/Kg)	0.741788
SURFACE SAR	VOLUME SAR

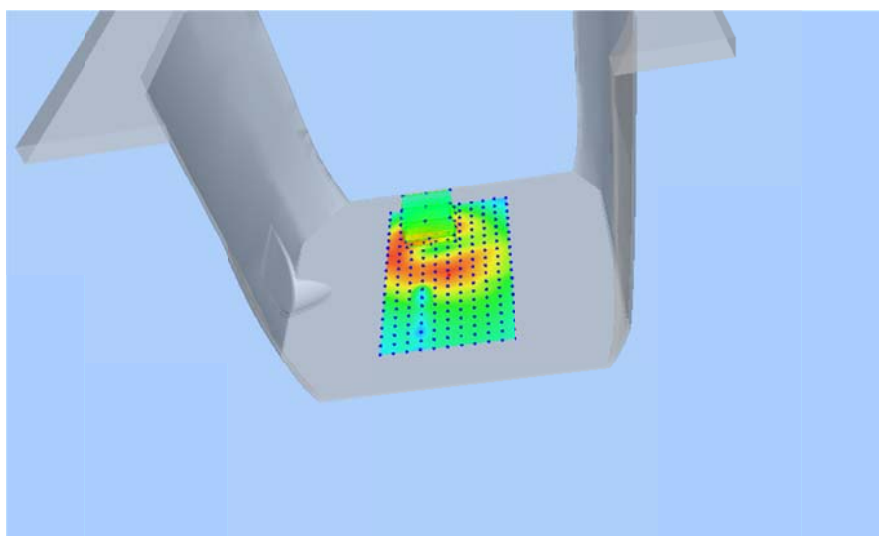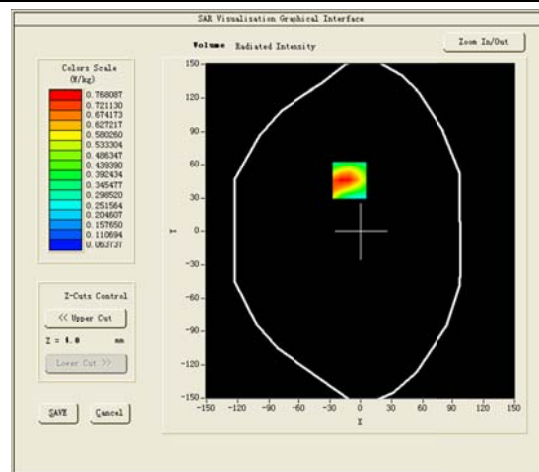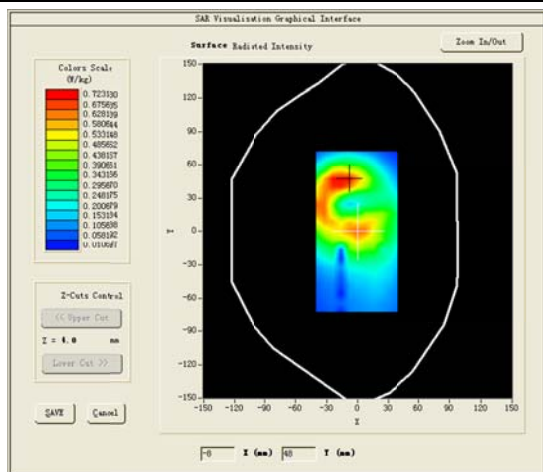

#17




Test Mode: LTE Band 12, Mid channel(Head Left Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL_750
Frequency (MHz)	713.50000000
Relative permittivity (real part)	42.06
Conductivity (S/m)	0.89
E-Field Probe	SN 17/14 EP221
Crest Factor	1.0
Conversion Factor	4.53
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	3.040000
SAR 10g (W/Kg)	0.089017
SAR 1g (W/Kg)	0.119075

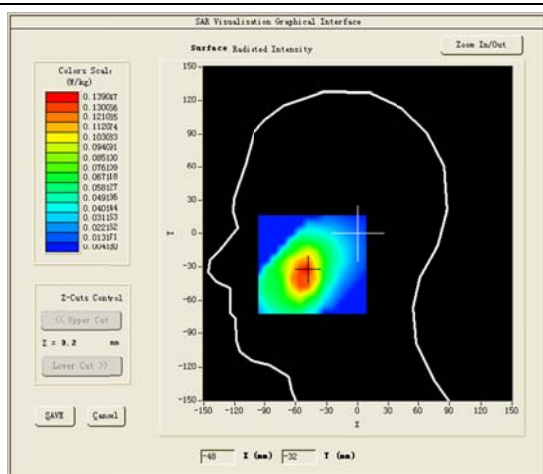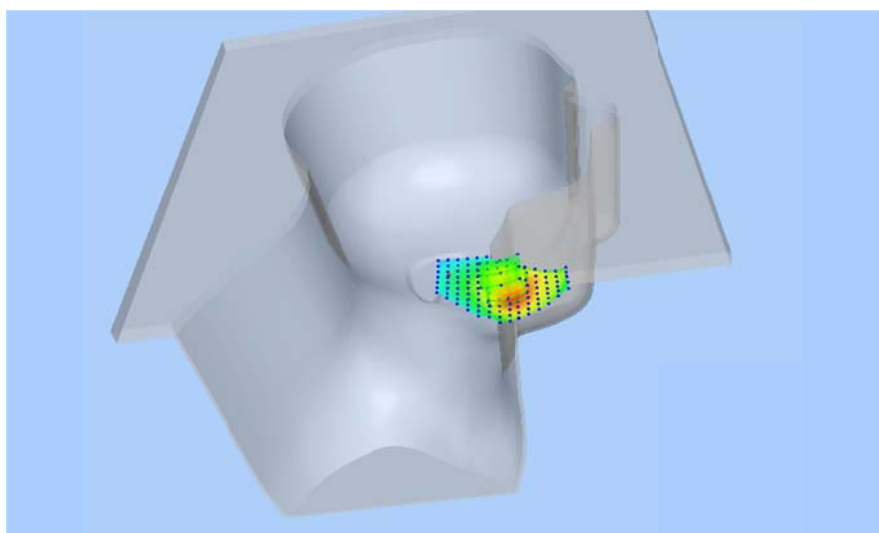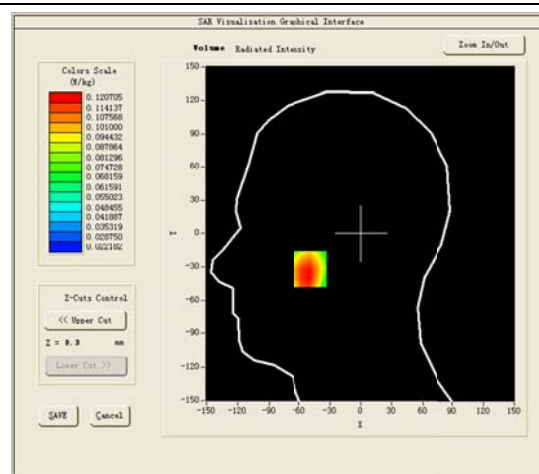SURFACE SAR**VOLUME SAR**

#18




Test Mode: Hotspot LTE Band 12, Mid channel(Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 17, 2015

Medium(liquid type)	MSL_750
Frequency (MHz)	713.50000000
Relative permittivity (real part)	56.57
Conductivity (S/m)	0.99
E-Field Probe	SN 17/14 EP221
Crest Factor	1.0
Conversion Factor	4.70
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.560000
SAR 10g (W/Kg)	0.359601
SAR 1g (W/Kg)	0.502163
SURFACE SAR	VOLUME SAR

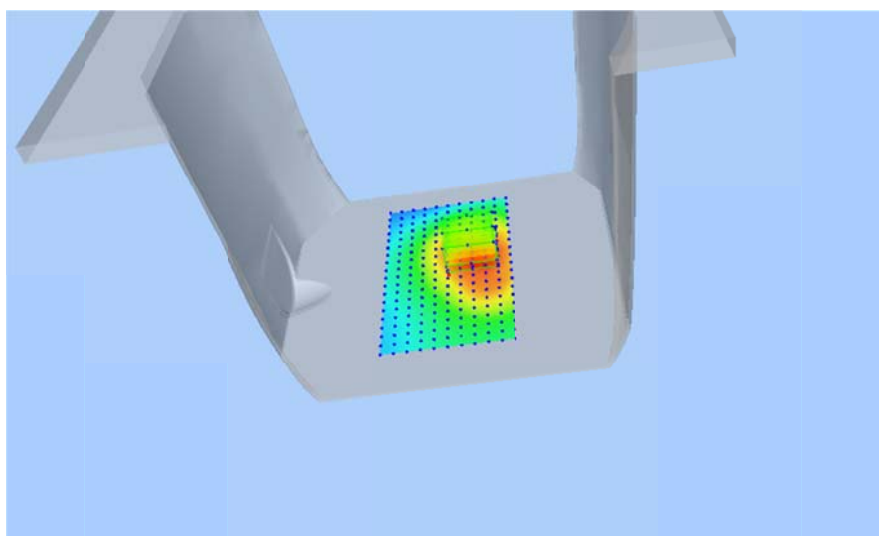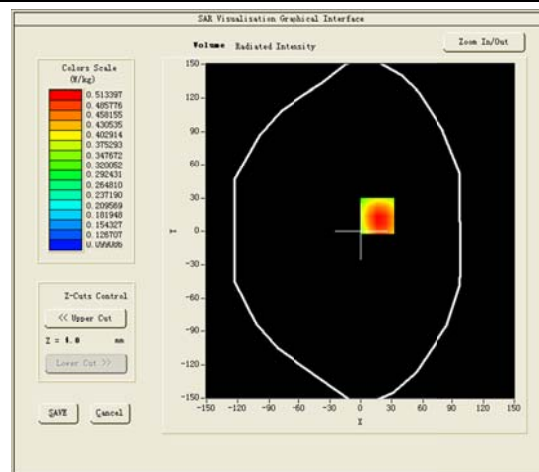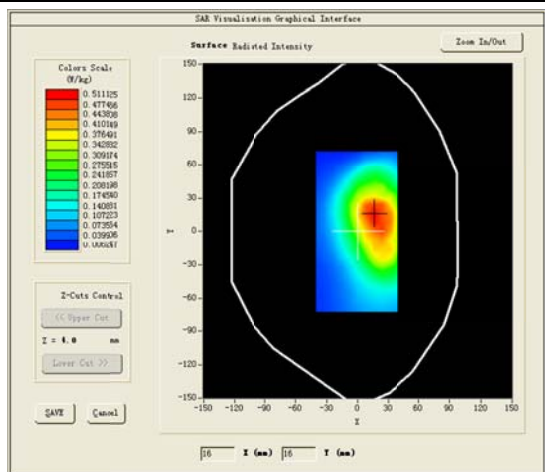

#19




Test Mode:LTE Band 17, Mid channel(Head Left Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 16, 2015

Medium(liquid type)	MSL_750
Frequency (MHz)	711.000000
Relative permittivity (real part)	42.06
Conductivity (S/m)	0.89
E-Field Probe	SN 17/14 EP221
Crest Factor	1.0
Conversion Factor	4.53
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.250000
SAR 10g (W/Kg)	0.148444
SAR 1g (W/Kg)	0.185939

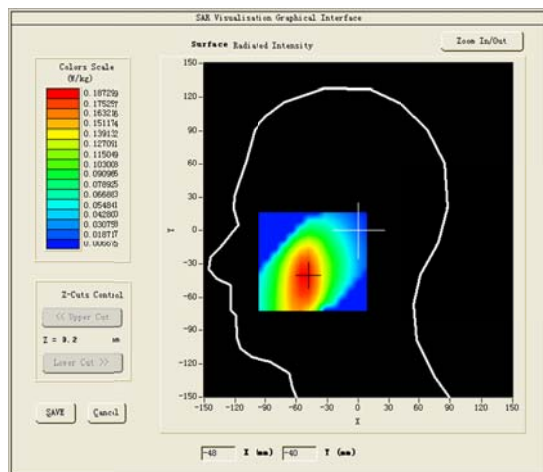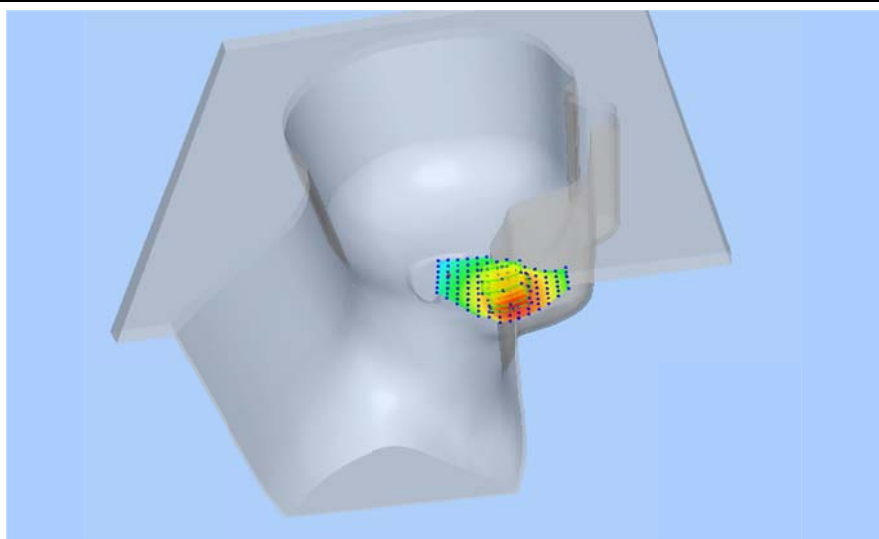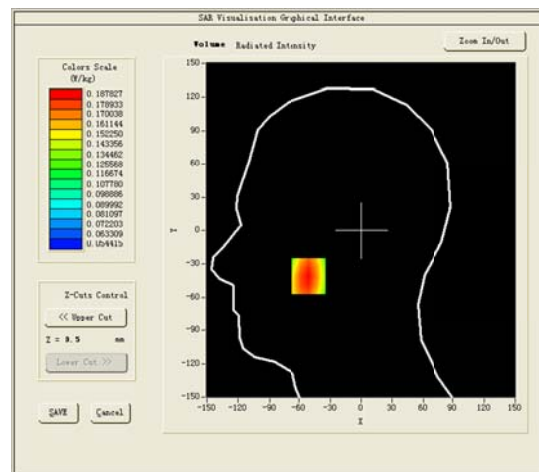SURFACE SAR**VOLUME SAR**

#21




Test Mode:802.11b(WiFi2.4G),Mid channel(Head Right Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 22, 2015

Medium(liquid type)	MSL 2450
Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.05
Conductivity (S/m)	1.77
E-Field Probe	SN 17/14 EP221
Crest Factor	1.0
Conversion Factor	4.11
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-2.150000
SAR 10g (W/Kg)	0.095318
SAR 1g (W/Kg)	0.166561
SURFACE SAR	VOLUME SAR

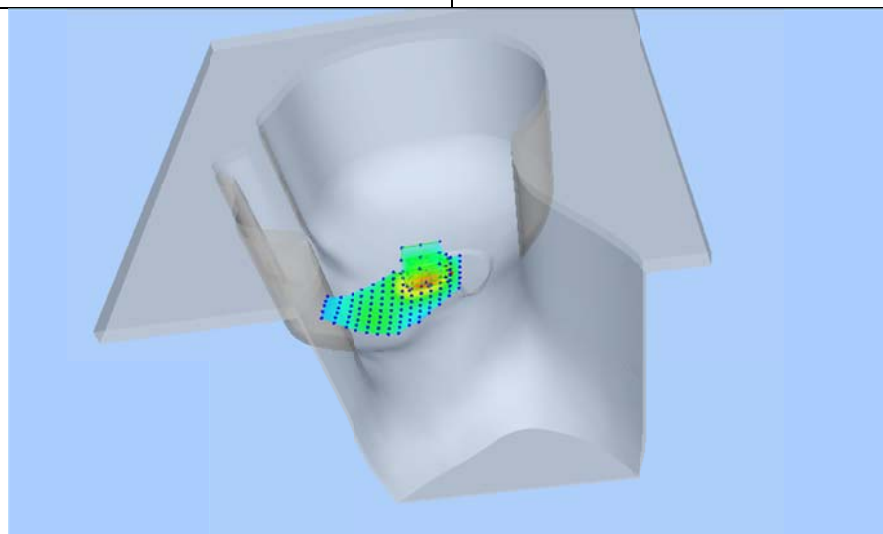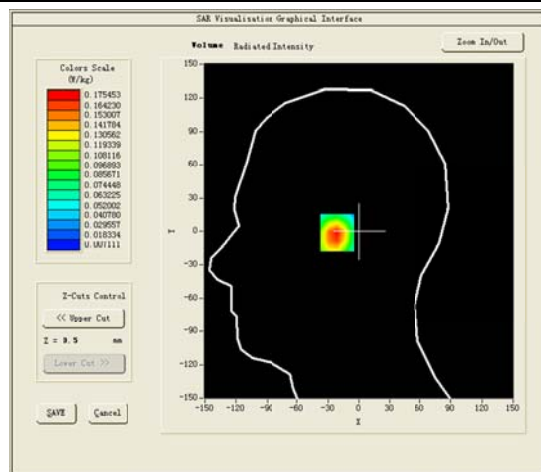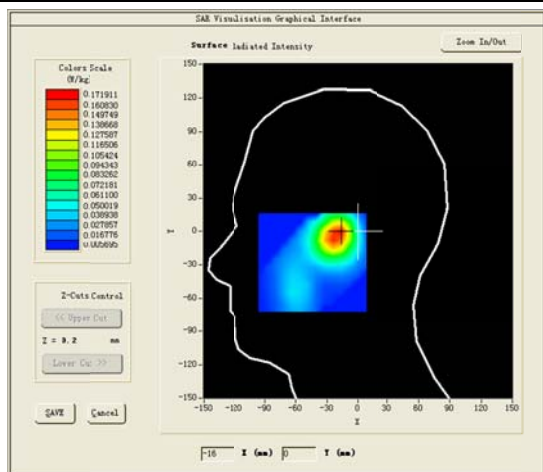

#22




Test Mode: Hotspot 802.11b(WiFi2.4G),Mid channel (Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 22, 2015

Medium(liquid type)	MSL 2450
Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.97
Conductivity (S/m)	1.93
E-Field Probe	SN 17/14 EP221
Crest Factor	1.0
Conversion Factor	4.25
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.810000
SAR 10g (W/Kg)	0.217993
SAR 1g (W/Kg)	0.343383
SURFACE SAR	VOLUME SAR

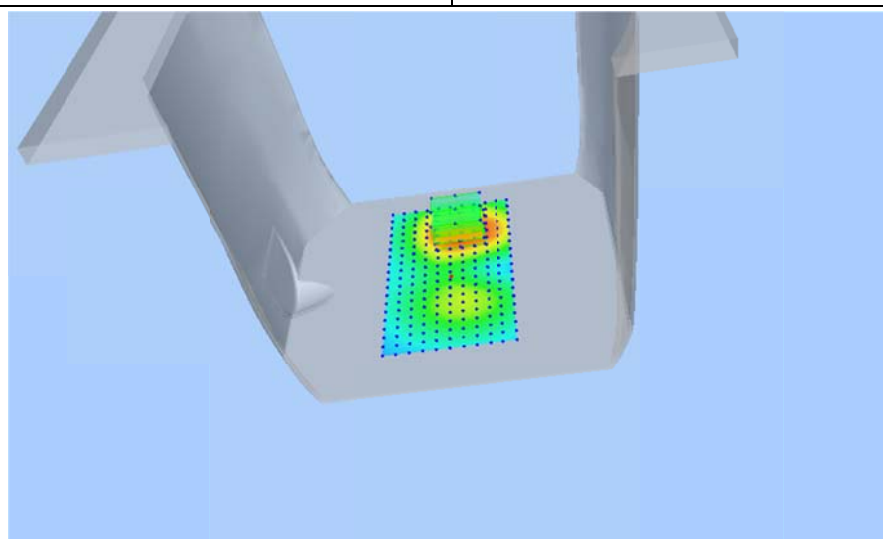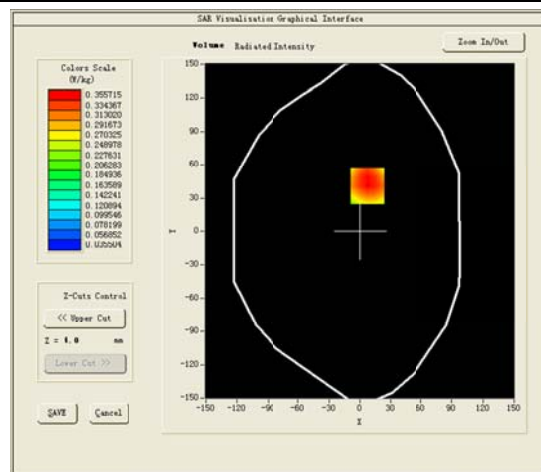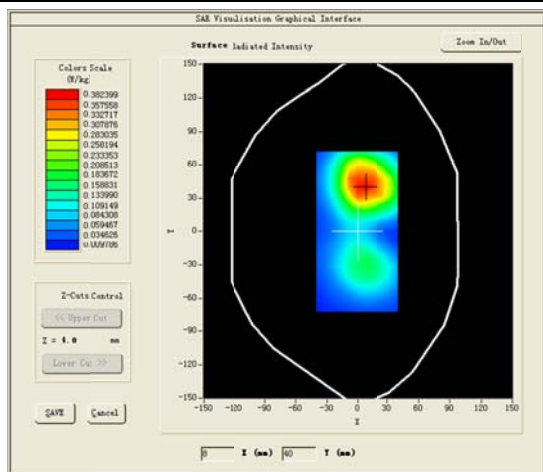

#23




Test Mode:802.11a(WiFi5.2G), Mid channel(Head Right Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 23, 2015

Medium(liquid type)	MSL 5000
Frequency (MHz)	5180.000000
Relative permittivity (real part)	36.62
Conductivity (S/m)	4.93
E-Field Probe	SN13/14 EPG214
Crest Factor	1.0
Conversion Factor	16.88
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.770000
SAR 10g (W/Kg)	0.240331
SAR 1g (W/Kg)	0.319135
SURFACE SAR	VOLUME SAR

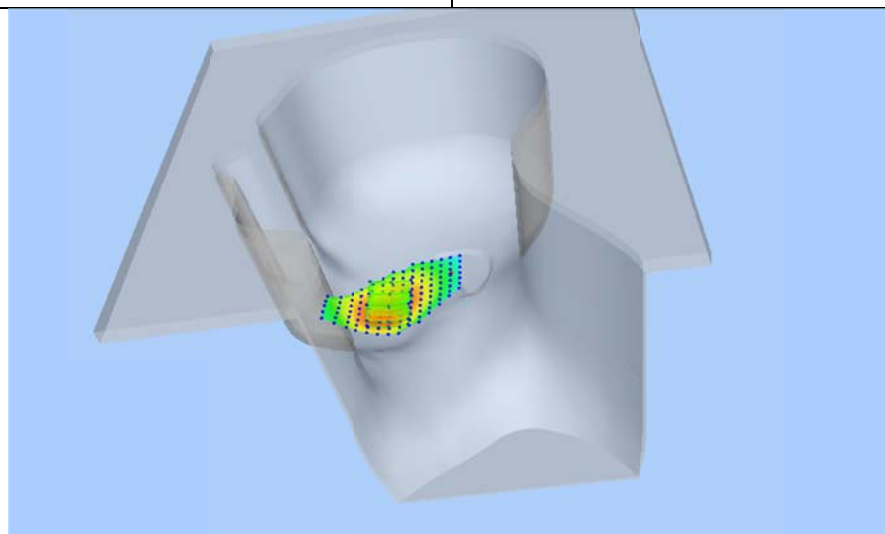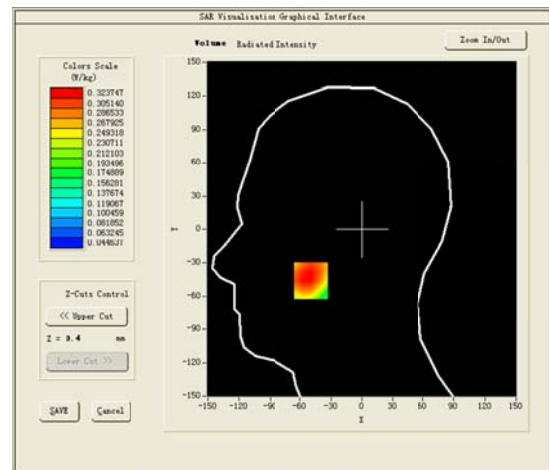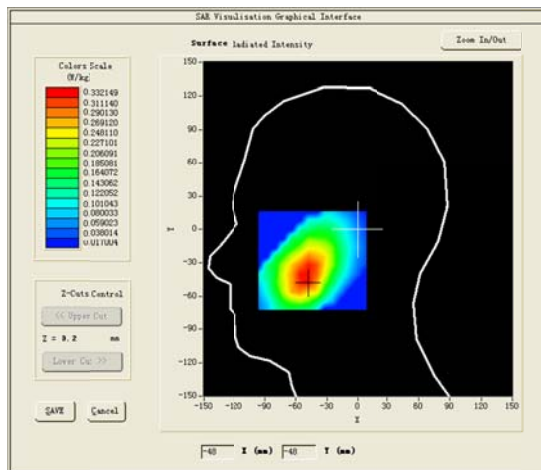

#24




Test Mode: Hotspot 802.11a(WiFi5.2G), Mid channel (Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 23, 2015

Medium(liquid type)	MSL 5000
Frequency (MHz)	5180.000000
Relative permittivity (real part)	50.69
Conductivity (S/m)	4.98
E-Field Probe	SN13/14 EPG214
Crest Factor	1.0
Conversion Factor	17.36
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-4.610000
SAR 10g (W/Kg)	0.385618
SAR 1g (W/Kg)	0.628321
SURFACE SAR	VOLUME SAR

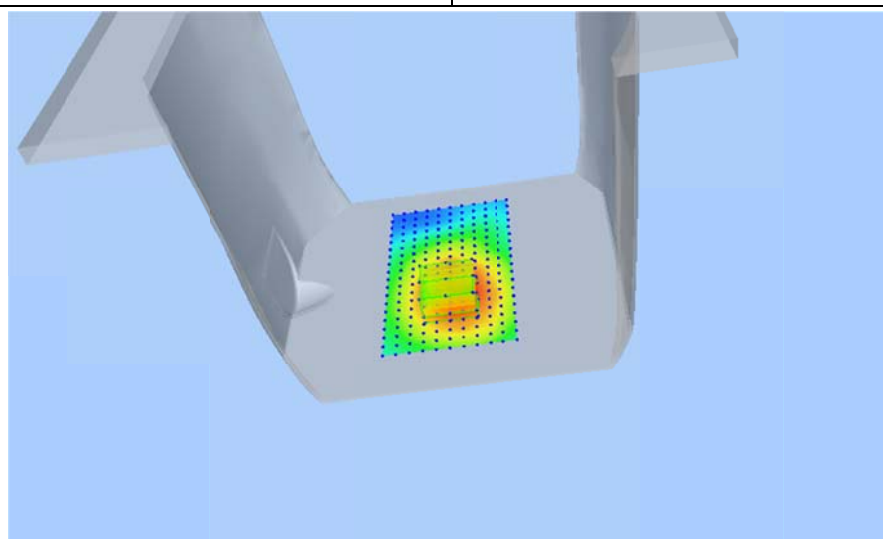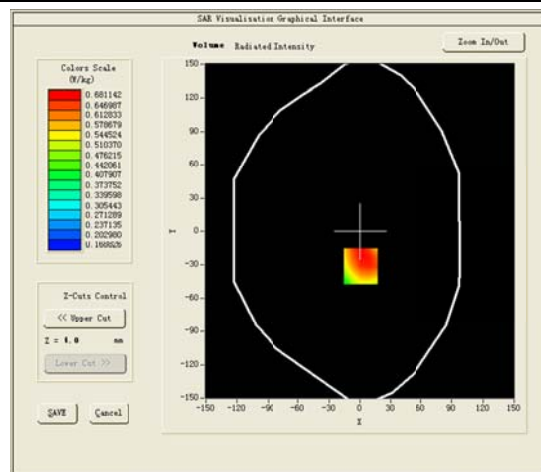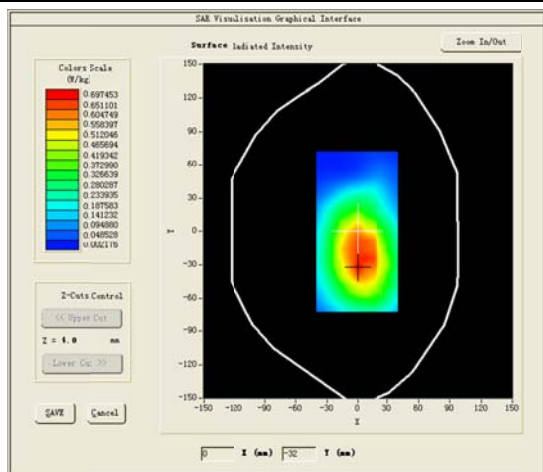

#25




Test Mode:802.11a(WiFi5.8G), Mid channel(Head Left Cheek)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 23, 2015

Medium(liquid type)	MSL 5000
Frequency (MHz)	5785.000000
Relative permittivity (real part)	34.73
Conductivity (S/m)	5.74
E-Field Probe	SN13/14 EPG214
Crest Factor	1.0
Conversion Factor	16.24
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-3.520000
SAR 10g (W/Kg)	0.203231
SAR 1g (W/Kg)	0.275300
SURFACE SAR	VOLUME SAR

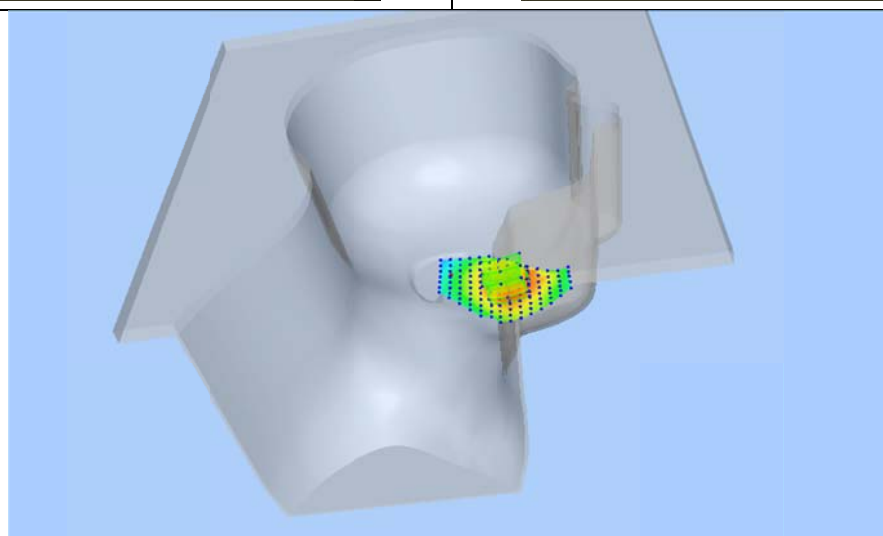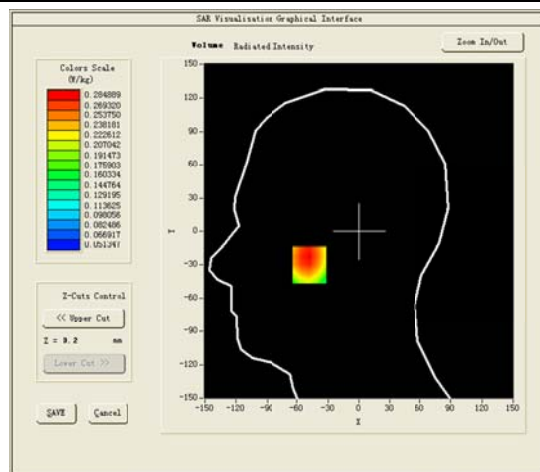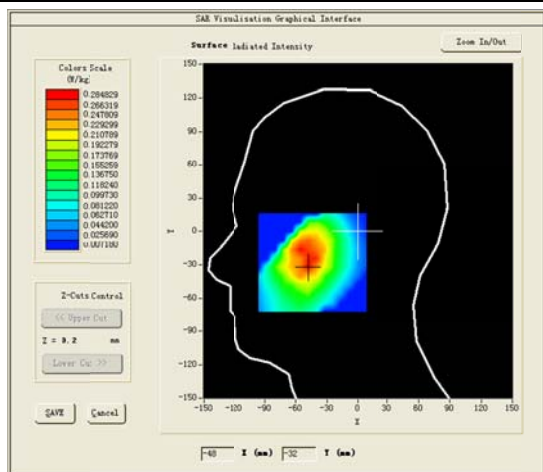

#26




Test Mode: Hotspot 802.11a(WiFi5.8G), Mid channel (Body Front Side)

Product Description: Smart Full Touch Handheld Computer

Model: SF550

Test Date: December 23, 2015

Medium(liquid type)	MSL 5000
Frequency (MHz)	5785.000000
Relative permittivity (real part)	48.19
Conductivity (S/m)	6.45
E-Field Probe	SN13/14 EPG214
Crest Factor	1.0
Conversion Factor	16.79
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	3.600000
SAR 10g (W/Kg)	0.202951
SAR 1g (W/Kg)	0.324845
SURFACE SAR	VOLUME SAR

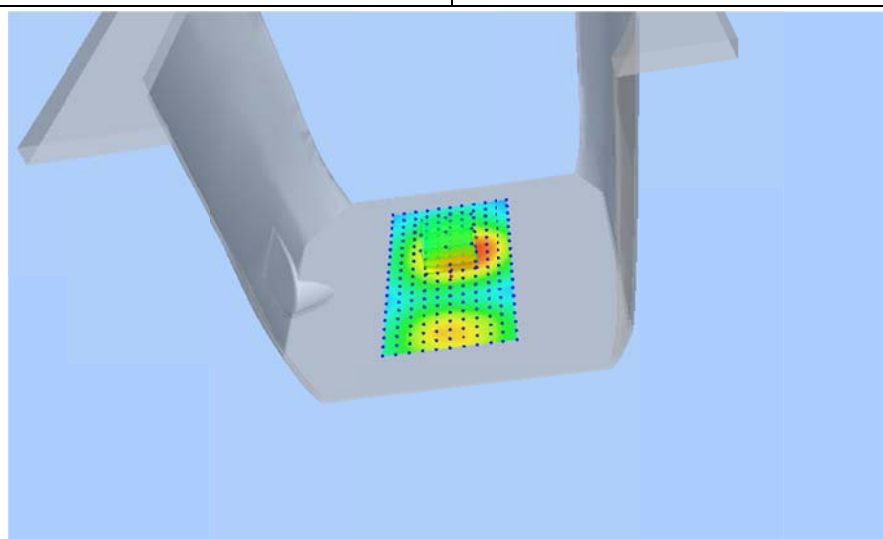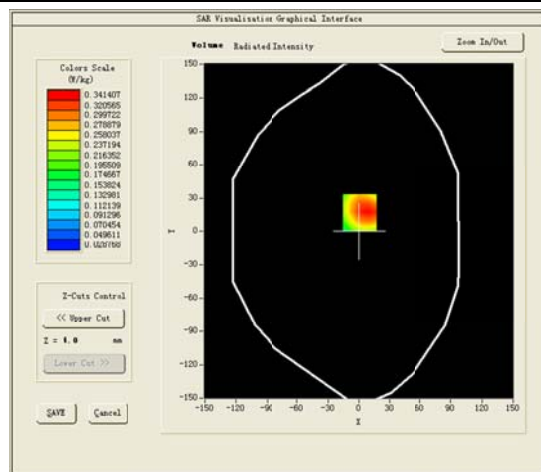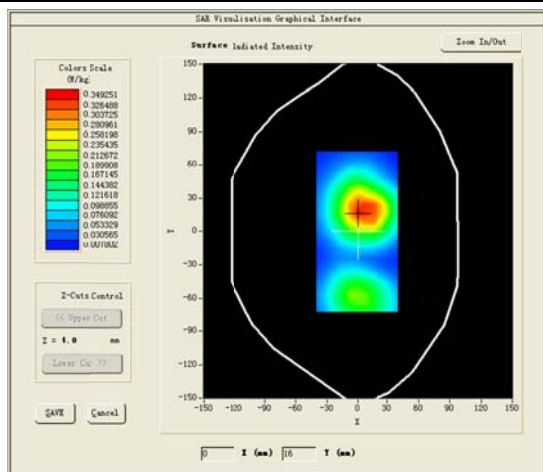

6.CALIBRATION CERTIFICATES

5.1 Probe-EP220 Calibration Certificate



COMOSAR E-Field Probe Calibration Report

Ref : ACR.287.1.14.SATU.A

**SHENZHEN LCS COMPLIANCE TESTING
LABORATORY LTD.**
**1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD,
BAO'AN BLVD**
BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA
SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 17/14 EP220

Calibrated at SATIMO US
2105 Barrett Park Dr. - Kennesaw, GA 30144



10/01/2015

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALISAR / CALIBAIR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.287.1.14.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	10/14/2015	
Checked by :	Jérôme LUC	Product Manager	10/14/2015	
Approved by :	Kim RUTKOWSKI	Quality Manager	10/14/2015	

	Customer Name
Distribution :	Shenzhen LCS Compliance Testing Laboratory Ltd.

Issue	Date	Modifications
A	10/14/2015	Initial release

Page: 2/9

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of SATIMO.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.287.1.14.SATU.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.5	Boundary Effect	5
4	Measurement Uncertainty	5
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	7
5.4	Isotropy	8
6	List of Equipment	9

Page: 3/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of SATIMO.*



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.287.1.14.SATU.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	Satimo
Model	SSE5
Serial Number	SN 17/14 EP220
Product Condition (new / used)	New
Frequency Range of Probe	0.7 GHz-3GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.179 MΩ Dipole 2: R2=0.175 MΩ Dipole 3: R3=0.180 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – Satimo COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	2.7 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*