



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V03

Report Template Revision Date: Mar.1st, 2017

# Test Report

**Report No. :** CQASZ20190500017EX-01

**Applicant:** Hangzhou Meari Technology Co., Ltd.

**Address of Applicant:** No.91, Chutian Road,Xixing Block, Binjiang, Hangzhou, 310051 Zhejiang, CHINA

**Manufacturer:** Hangzhou Meari Technology Co., Ltd.

**Address of Manufacturer:** No.91, Chutian Road,Xixing Block, Binjiang, Hangzhou, 310051 Zhejiang, CHINA

**Equipment Under Test (EUT):**

**Product:** IP Camera

**All Models:** Bullet 2S, Bullet 2

**Test Model No.:** Bullet 2S

**Brand Name:** N/A

**FCC ID:** 2AG7C-BULLET2S

**Standards:** 47 CFR FCC Part 15 Subpart C 15.247

**Date of Test:** May 06, 2019 to May 30, 2019

**Date of Issue:** May 30, 2019

**Test Result :** PASS

**Tested By:**

*Daisy Qin*

(Daisy Qin)

**Reviewed By:**

*Aaron Ma*

(Aaron Ma)

**Approved By:**

*Jack Ai*

( Jack Ai)



\* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

## 2 Version

### Revision History Of Report

| Report No.            | Version | Description    | Issue Date   |
|-----------------------|---------|----------------|--------------|
| CQASZ20190500017EX-01 | Rev.01  | Initial report | May 30, 2019 |

### 3 Test Summary

| Test Item                                                         | Test Requirement                                    | Test method      | Result |
|-------------------------------------------------------------------|-----------------------------------------------------|------------------|--------|
| Antenna Requirement                                               | 47 CFR Part 15, Subpart C Section 15.203/15.247 (c) | ANSI C63.10 2013 | PASS   |
| AC Power Line Conducted Emission                                  | 47 CFR Part 15, Subpart C Section 15.207            | ANSI C63.10 2013 | PASS   |
| Conducted Peak & Average Output Power                             | 47 CFR Part 15, Subpart C Section 15.247 (b)(3)     | ANSI C63.10 2013 | PASS   |
| 6dB Occupied Bandwidth                                            | 47 CFR Part 15, Subpart C Section 15.247 (a)(2)     | ANSI C63.10 2013 | PASS   |
| Power Spectral Density                                            | 47 CFR Part 15, Subpart C Section 15.247 (e)        | ANSI C63.10 2013 | PASS   |
| Band-edge for RF Conducted Emissions                              | 47 CFR Part 15, Subpart C Section 15.247(d)         | ANSI C63.10 2013 | PASS   |
| RF Conducted Spurious Emissions                                   | 47 CFR Part 15, Subpart C Section 15.247(d)         | ANSI C63.10 2013 | PASS   |
| Radiated Spurious Emissions                                       | 47 CFR Part 15, Subpart C Section 15.205/15.209     | ANSI C63.10 2013 | PASS   |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section 15.205/15.209     | ANSI C63.10 2013 | PASS   |

## 4 Contents

|                                                         | Page |
|---------------------------------------------------------|------|
| 1 COVER PAGE.....                                       | 1    |
| 2 VERSION .....                                         | 2    |
| 3 TEST SUMMARY .....                                    | 3    |
| 4 CONTENTS .....                                        | 4    |
| 5 GENERAL INFORMATION.....                              | 5    |
| 5.1 CLIENT INFORMATION .....                            | 5    |
| 5.2 GENERAL DESCRIPTION OF EUT .....                    | 5    |
| 5.3 TEST ENVIRONMENT .....                              | 7    |
| 5.4 DESCRIPTION OF SUPPORT UNITS .....                  | 7    |
| 5.5 TEST LOCATION .....                                 | 7    |
| 5.6 TEST FACILITY .....                                 | 7    |
| 5.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....      | 8    |
| 5.8 DEVIATION FROM STANDARDS .....                      | 8    |
| 5.9 ABNORMALITIES FROM STANDARD CONDITIONS .....        | 8    |
| 5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....  | 8    |
| 5.11 EQUIPMENT LIST .....                               | 9    |
| 6 TEST RESULTS AND MEASUREMENT DATA.....                | 10   |
| 6.1 ANTENNA REQUIREMENT .....                           | 10   |
| 6.2 CONDUCTED EMISSIONS .....                           | 11   |
| 6.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER .....         | 14   |
| 6.4 6dB OCCUPY BANDWIDTH .....                          | 15   |
| 6.5 POWER SPECTRAL DENSITY .....                        | 20   |
| 6.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....          | 25   |
| 6.7 RF CONDUCTED SPURIOUS EMISSIONS .....               | 29   |
| 6.8 RADIATED SPURIOUS EMISSIONS.....                    | 43   |
| 6.8.1 Radiated emission below 1GHz.....                 | 46   |
| 6.8.2 Transmitter emission above 1GHz .....             | 48   |
| 6.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY ..... | 50   |
| 7 PHOTOGRAPHS - EUT TEST SETUP .....                    | 56   |
| 8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....        | 58   |

## 5 General Information

### 5.1 Client Information

|                          |                                                                              |
|--------------------------|------------------------------------------------------------------------------|
| Applicant:               | Hangzhou Meari Technology Co., Ltd.                                          |
| Address of Applicant:    | No.91, Chutian Road,Xixing Block, Binjiang, Hangzhou, 310051 Zhejiang, CHINA |
| Manufacturer:            | Hangzhou Meari Technology Co., Ltd.                                          |
| Address of Manufacturer: | No.91, Chutian Road,Xixing Block, Binjiang, Hangzhou, 310051 Zhejiang, CHINA |

### 5.2 General Description of EUT

|                       |                                                                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:         | IP Camera                                                                                                                          |
| Model No.:            | Bullet 2S                                                                                                                          |
| Trade Mark:           | N/A                                                                                                                                |
| Hardware version:     | V1.1                                                                                                                               |
| Software version:     | V1.0                                                                                                                               |
| Operation Frequency:  | IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz<br>IEEE 802.11n(H40): 2422MHz~2452MHz                                                   |
| Channel Numbers:      | IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels<br>IEEE 802.11n HT40: 7                                                             |
| Channel Separation:   | 5MHz                                                                                                                               |
| Type of Modulation:   | IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE for 802.11g : OFDM<br>IEEE for 802.11n(HT20): OFDM<br>IEEE for 802.11n(HT40): OFDM |
| Product Type:         | <input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location                 |
| Test Software of EUT: | RF test (manufacturer declare )                                                                                                    |
| Antenna Type          | Internal Antenna                                                                                                                   |
| Antenna Gain          | 2.5dBi                                                                                                                             |
| Power Supply:         | DC 12V from adapter                                                                                                                |
| Adapter Information:  | MODEL: KA1201A-1201000US<br>INPUT:100~240V ~50/60Hz 0.4A Max<br>OUTPUT: 12V 1000mA                                                 |

Note: Please refer to the instruction manual for details.

| Operation Frequency each of channel(802.11b/g/n HT20) |           |         |           |         |           |         |           |
|-------------------------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                                               | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                                     | 2412MHz   | 4       | 2427MHz   | 7       | 2442MHz   | 10      | 2457MHz   |
| 2                                                     | 2417MHz   | 5       | 2432MHz   | 8       | 2447MHz   | 11      | 2462MHz   |
| 3                                                     | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   | /       | /         |

| Operation Frequency each of channel(802.11n HT40) |           |         |           |         |           |         |           |
|---------------------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                                           | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| /                                                 | /         | 4       | 2427MHz   | 7       | 2442MHz   | /       | /         |
| /                                                 | /         | 5       | 2432MHz   | 8       | 2447MHz   | /       | /         |
| 3                                                 | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   | /       | /         |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2412MHz   |
| The Middle channel  | 2437MHz   |
| The Highest channel | 2462MHz   |

For 802.11n (HT40):

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2422MHz   |
| The Middle channel  | 2437MHz   |
| The Highest channel | 2452MHz   |

Note: Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

### 5.3 Test Environment

| Operating Environment: |                                                                                                                                                                                                  |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature:           | 25.0 °C                                                                                                                                                                                          |
| Humidity:              | 53 % RH                                                                                                                                                                                          |
| Atmospheric Pressure:  | 1010mbar                                                                                                                                                                                         |
| Transmitting mode:     | Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.<br>Note: In the process of transmitting of EUT, the duty cycle >98%. |

### 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

| Description | Manufacturer | Model No.         | Remark | FCC certification |
|-------------|--------------|-------------------|--------|-------------------|
| AC Adapter  | /            | KA1201A-1201000US | AC/DC  | FCC SDOC          |
|             |              |                   |        |                   |

### 5.5 Test Location

All tests were performed at:

**Shenzhen Huaxia Testing Technology Co., Ltd.,**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 5.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

| No. | Item                               | Uncertainty        | Notes |
|-----|------------------------------------|--------------------|-------|
| 1   | Radiated Emission (Below 1GHz)     | ±5.12dB            | (1)   |
| 2   | Radiated Emission (Above 1GHz)     | ±4.60dB            | (1)   |
| 3   | Conducted Disturbance (0.15~30MHz) | ±3.34dB            | (1)   |
| 4   | Radio Frequency                    | $3 \times 10^{-8}$ | (1)   |
| 5   | Duty cycle                         | 0.6 %.             | (1)   |
| 6   | Occupied Bandwidth                 | 1.1%               | (1)   |
| 7   | RF conducted power                 | 0.86dB             | (1)   |
| 8   | RF power density                   | 0.74               | (1)   |
| 9   | Conducted Spurious emissions       | 0.86dB             | (1)   |
| 10  | Temperature test                   | 0.8℃               | (1)   |
| 11  | Humidity test                      | 2.0%               | (1)   |
| 12  | Supply voltages                    | 0.5 %.             | (1)   |
| 13  | time                               | 0.6 %.             | (1)   |
| 14  | Frequency Error                    | 5.5 Hz             | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 5.8 Deviation from Standards

None.

## 5.9 Abnormalities from Standard Conditions

None.

## 5.10 Other Information Requested by the Customer

None.



## 5.11 Equipment List


| Test Equipment                            | Manufacturer | Model No.              | Instrument No. | Calibration Date | Calibration Due Date |
|-------------------------------------------|--------------|------------------------|----------------|------------------|----------------------|
| EMI Test Receiver                         | R&S          | ESR7                   | CQA-005        | 2018/9/26        | 2019/9/25            |
| Spectrum analyzer                         | R&S          | FSU26                  | CQA-038        | 2018/10/28       | 2018/10/27           |
| Preamplifier                              | MITEQ        | AFS4-00010300-18-10P-4 | CQA-035        | 2018/9/26        | 2019/9/25            |
| Preamplifier                              | MITEQ        | AMF-6D-02001800-29-20P | CQA-036        | 2018/11/2        | 2019/11/1            |
| Loop antenna                              | Schwarzbeck  | FMZB1516               | CQA-087        | 2018/10/28       | 2020/10/27           |
| Bilog Antenna                             | R&S          | HL562                  | CQA-011        | 2018/9/26        | 2020/9/25            |
| Horn Antenna                              | R&S          | HF906                  | CQA-012        | 2018/9/26        | 2020/9/25            |
| Horn Antenna                              | Schwarzbeck  | BBHA 9170              | CQA-088        | 2018/9/26        | 2020/9/25            |
| Coaxial Cable (Above 1GHz)                | CQA          | N/A                    | C019           | 2018/9/26        | 2019/9/25            |
| Coaxial Cable (Below 1GHz)                | CQA          | N/A                    | C020           | 2018/9/26        | 2019/9/25            |
| Spectrum analyzer                         | Agilent      | E4440A                 | CQA-103        | 2018/10/28       | 2019/10/27           |
| Antenna Connector                         | CQA          | RFC-01                 | CQA-080        | 2018/9/26        | 2019/9/25            |
| RF cable(9KHz~40GHz)                      | CQA          | RF-01                  | CQA-079        | 2018/9/26        | 2019/9/25            |
| Power Sensor                              | KEYSIGHT     | U2021XA                | CQA-30         | 2018/9/26        | 2019/9/25            |
| N1918A Power Analysis Manager Power Panel | Agilent      | N1918A                 | CQA-074        | 2018/9/26        | 2019/9/25            |
| Power divider                             | MIDWEST      | PWD-2533-02-SMA-79     | CQA-067        | 2018/9/26        | 2019/9/25            |
| EMI Test Receiver                         | R&S          | ESPI3                  | CQA-013        | 2018/9/26        | 2019/9/25            |
| LISN                                      | R&S          | ENV216                 | CQA-003        | 2018/11/5        | 2019/11/4            |
| Coaxial cable                             | CQA          | N/A                    | CQA-C009       | 2018/9/26        | 2019/9/25            |

## 6 Test results and Measurement Data

### 6.1 Antenna Requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Standard requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 47 CFR Part 15C Section 15.203 /247(c)                                                              |
| <p>15.203 requirement:<br/> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:<br/> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |                                                                                                     |
| EUT<br>Antenna:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <p>Antenna</p>  |
| The antenna is internal antenna. The best case gain of the antenna is 2.5dBi.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                     |


## 6.2 Conducted Emissions
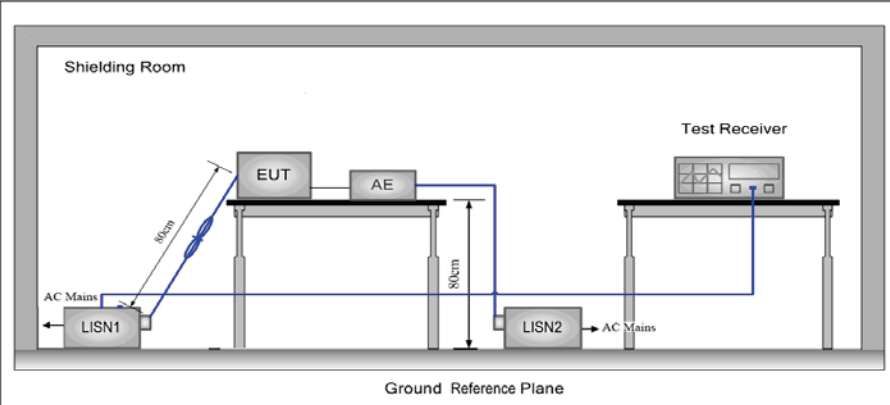
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | 47 CFR Part 15C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |           |
| Test Method:                                     | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Test Frequency Range:                            | 150kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
| Test Procedure:                                  | <ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol> |              |           |
| Test Setup:                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |              |           |
| Exploratory Test Mode:                           | Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |              |           |

|                  |                                                                                                                                             |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Final Test Mode: | Through Pre-scan, find the 1Mbps of rate of 802.11b at highest channel is the worst case.<br>Only the worst case is recorded in the report. |
| Test Voltage:    | AC120V/60Hz                                                                                                                                 |
| Test Results:    | Pass                                                                                                                                        |

## Measurement Data


Live Line:

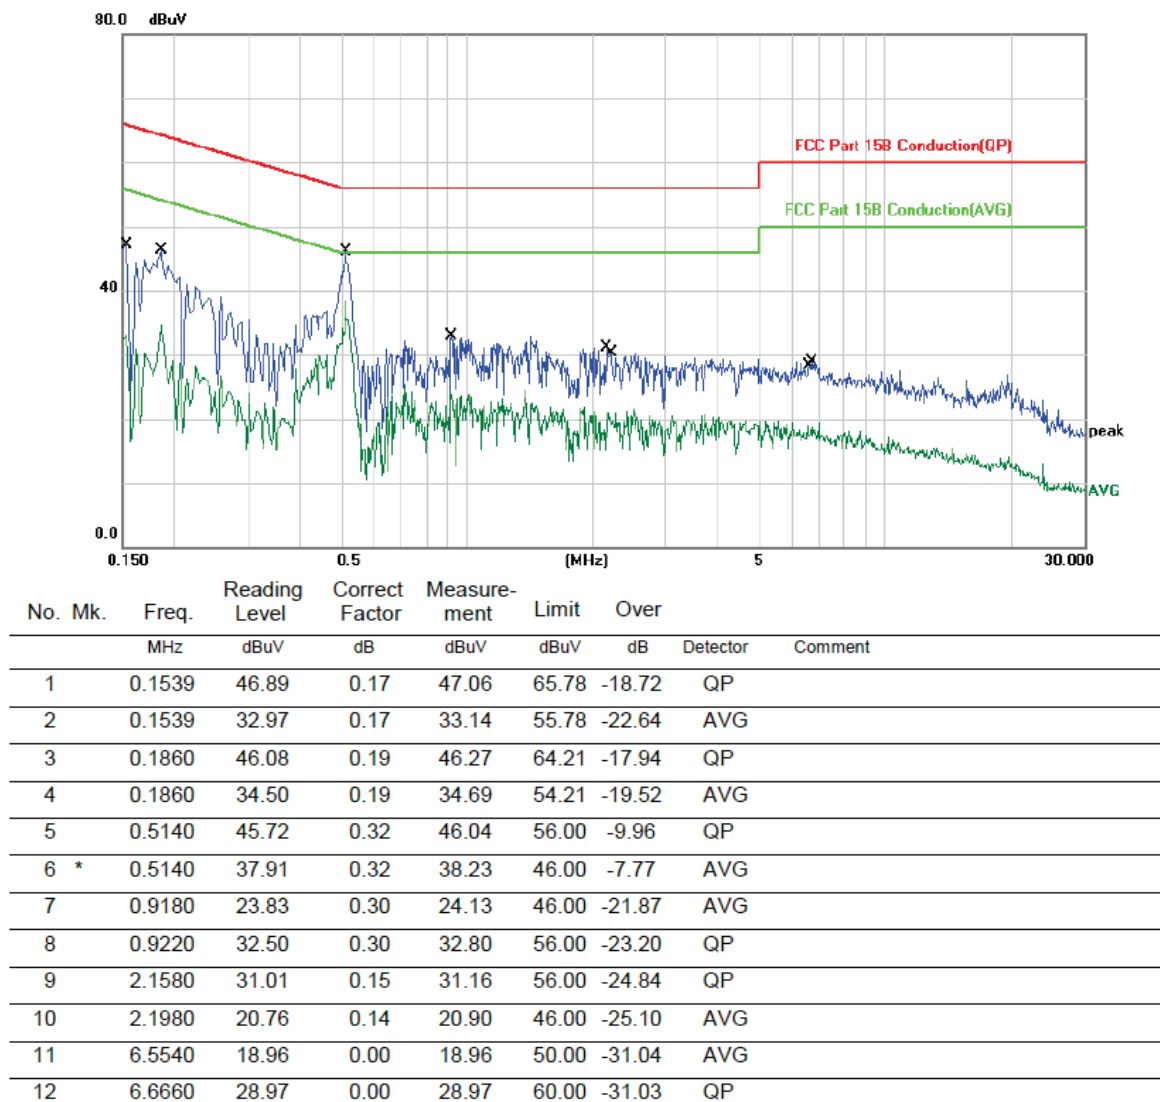

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

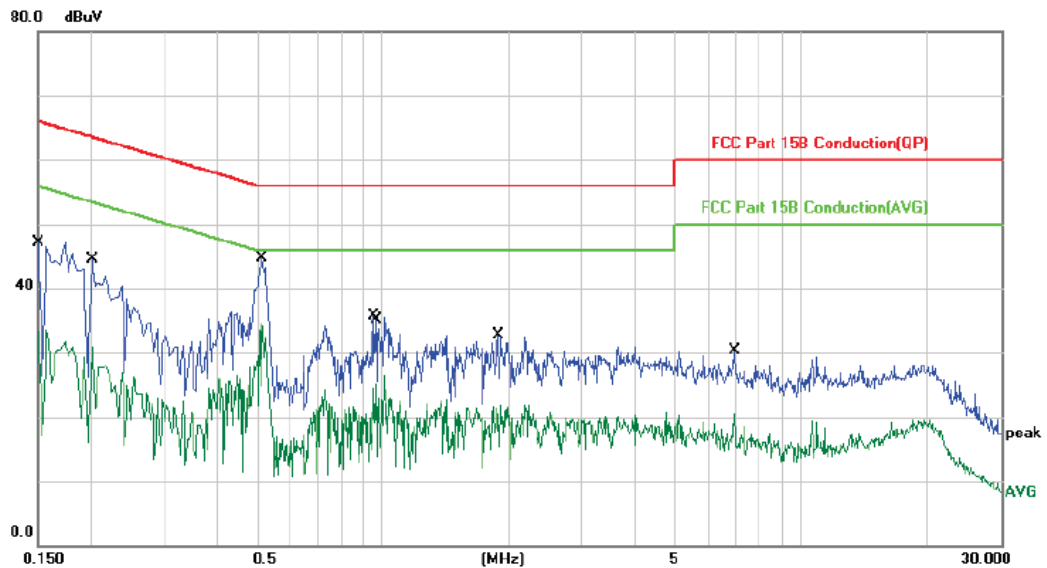


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1       | 0.1500       | 46.99                    | 0.17                    | 47.16                    | 65.99         | -18.83     | QP       |         |
| 2       | 0.1516       | 26.63                    | 0.17                    | 26.80                    | 55.91         | -29.11     | AVG      |         |
| 3       | 0.2007       | 25.88                    | 0.19                    | 26.07                    | 53.58         | -27.51     | AVG      |         |
| 4       | 0.2020       | 44.37                    | 0.19                    | 44.56                    | 63.52         | -18.96     | QP       |         |
| 5 *     | 0.5180       | 44.46                    | 0.32                    | 44.78                    | 56.00         | -11.22     | QP       |         |
| 6       | 0.5180       | 34.13                    | 0.32                    | 34.45                    | 46.00         | -11.55     | AVG      |         |
| 7       | 0.9500       | 35.34                    | 0.30                    | 35.64                    | 56.00         | -20.36     | QP       |         |
| 8       | 0.9660       | 24.86                    | 0.29                    | 25.15                    | 46.00         | -20.85     | AVG      |         |
| 9       | 1.8740       | 21.03                    | 0.18                    | 21.21                    | 46.00         | -24.79     | AVG      |         |
| 10      | 1.8940       | 32.44                    | 0.17                    | 32.61                    | 56.00         | -23.39     | QP       |         |
| 11      | 6.9380       | 30.34                    | -0.02                   | 30.32                    | 60.00         | -29.68     | QP       |         |
| 12      | 6.9380       | 20.61                    | -0.02                   | 20.59                    | 50.00         | -29.41     | AVG      |         |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

### 6.3 Conducted Peak & Average Output Power


|                        |                                                                                                                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (b)(3)                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                          |
| Test Setup:            |                                                                                                                                                                                          |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                      |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report. |
| Limit:                 | 30dBm                                                                                                                                                                                                                                                                      |
| Test Results:          | Pass                                                                                                                                                                                                                                                                       |

#### WIFI

| Type          | Test channel | Peak Output Power (dBm) | Average Output Power dBm) | Limit (dBm) | Result |
|---------------|--------------|-------------------------|---------------------------|-------------|--------|
| 802.11b       | Lowest       | 14.114                  | 10.08                     | 30.00       | Pass   |
|               | Middle       | 14.355                  | 10.13                     |             |        |
|               | Highest      | 15.270                  | 10.24                     |             |        |
| 802.11g       | Lowest       | 14.170                  | 10.06                     | 30.00       | Pass   |
|               | Middle       | 12.847                  | 9.43                      |             |        |
|               | Highest      | 12.987                  | 9.39                      |             |        |
| 802.11n(HT20) | Lowest       | 13.282                  | 9.61                      | 30.00       | Pass   |
|               | Middle       | 13.284                  | 9.55                      |             |        |
|               | Highest      | 13.341                  | 9.58                      |             |        |
| 802.11n(HT40) | Lowest       | 13.743                  | 9.47                      | 30.00       | Pass   |
|               | Middle       | 12.763                  | 9.34                      |             |        |
|               | Highest      | 12.568                  | 9.26                      |             |        |

Note: 1.The test results including the cable lose.

## 6.4 6dB Occupy Bandwidth

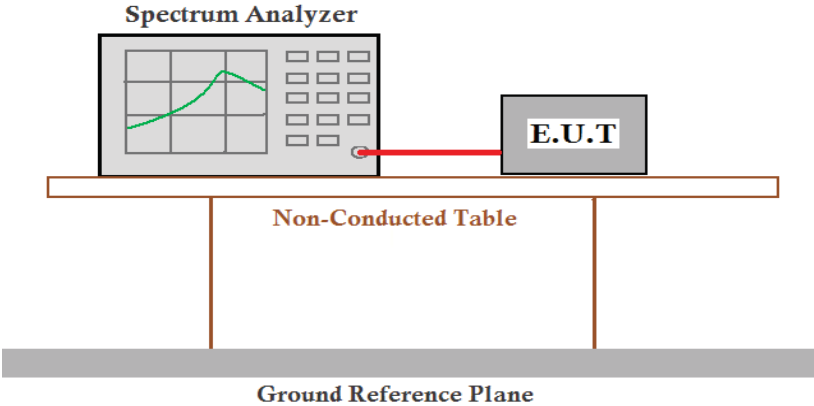
|                        |                                                                                                                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (a)(2)                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                          |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                            |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                      |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report. |
| Limit:                 | $\geq 500$ kHz                                                                                                                                                                                                                                                             |
| Test Results:          | Pass                                                                                                                                                                                                                                                                       |

### Measurement Data




| Type          | hannel  | 6dB Bandwidth (MHz) | Limit (KHz) | Result |
|---------------|---------|---------------------|-------------|--------|
| 8 2.11b       | Lowest  | 10.108              | $\geq 500$  | Pass   |
|               | Middle  | 10.085              |             |        |
|               | Highest | 10.104              |             |        |
| 802.11g       | Lowest  | 16.587              | $\geq 500$  | Pass   |
|               | Middle  | 16.571              |             |        |
|               | Highest | 16.624              |             |        |
| 802.11n(HT20) | Lowest  | 17.835              | $\geq 500$  | Pass   |
|               | Middle  | 17.855              |             |        |
|               | Highest | 17.936              |             |        |
| 802.11n(HT40) | Lowest  | 36.509              | $\geq 500$  | Pass   |
|               | M ddle  | 36.514              |             |        |
|               | Highest | 36.519              |             |        |









Test plot as follows:

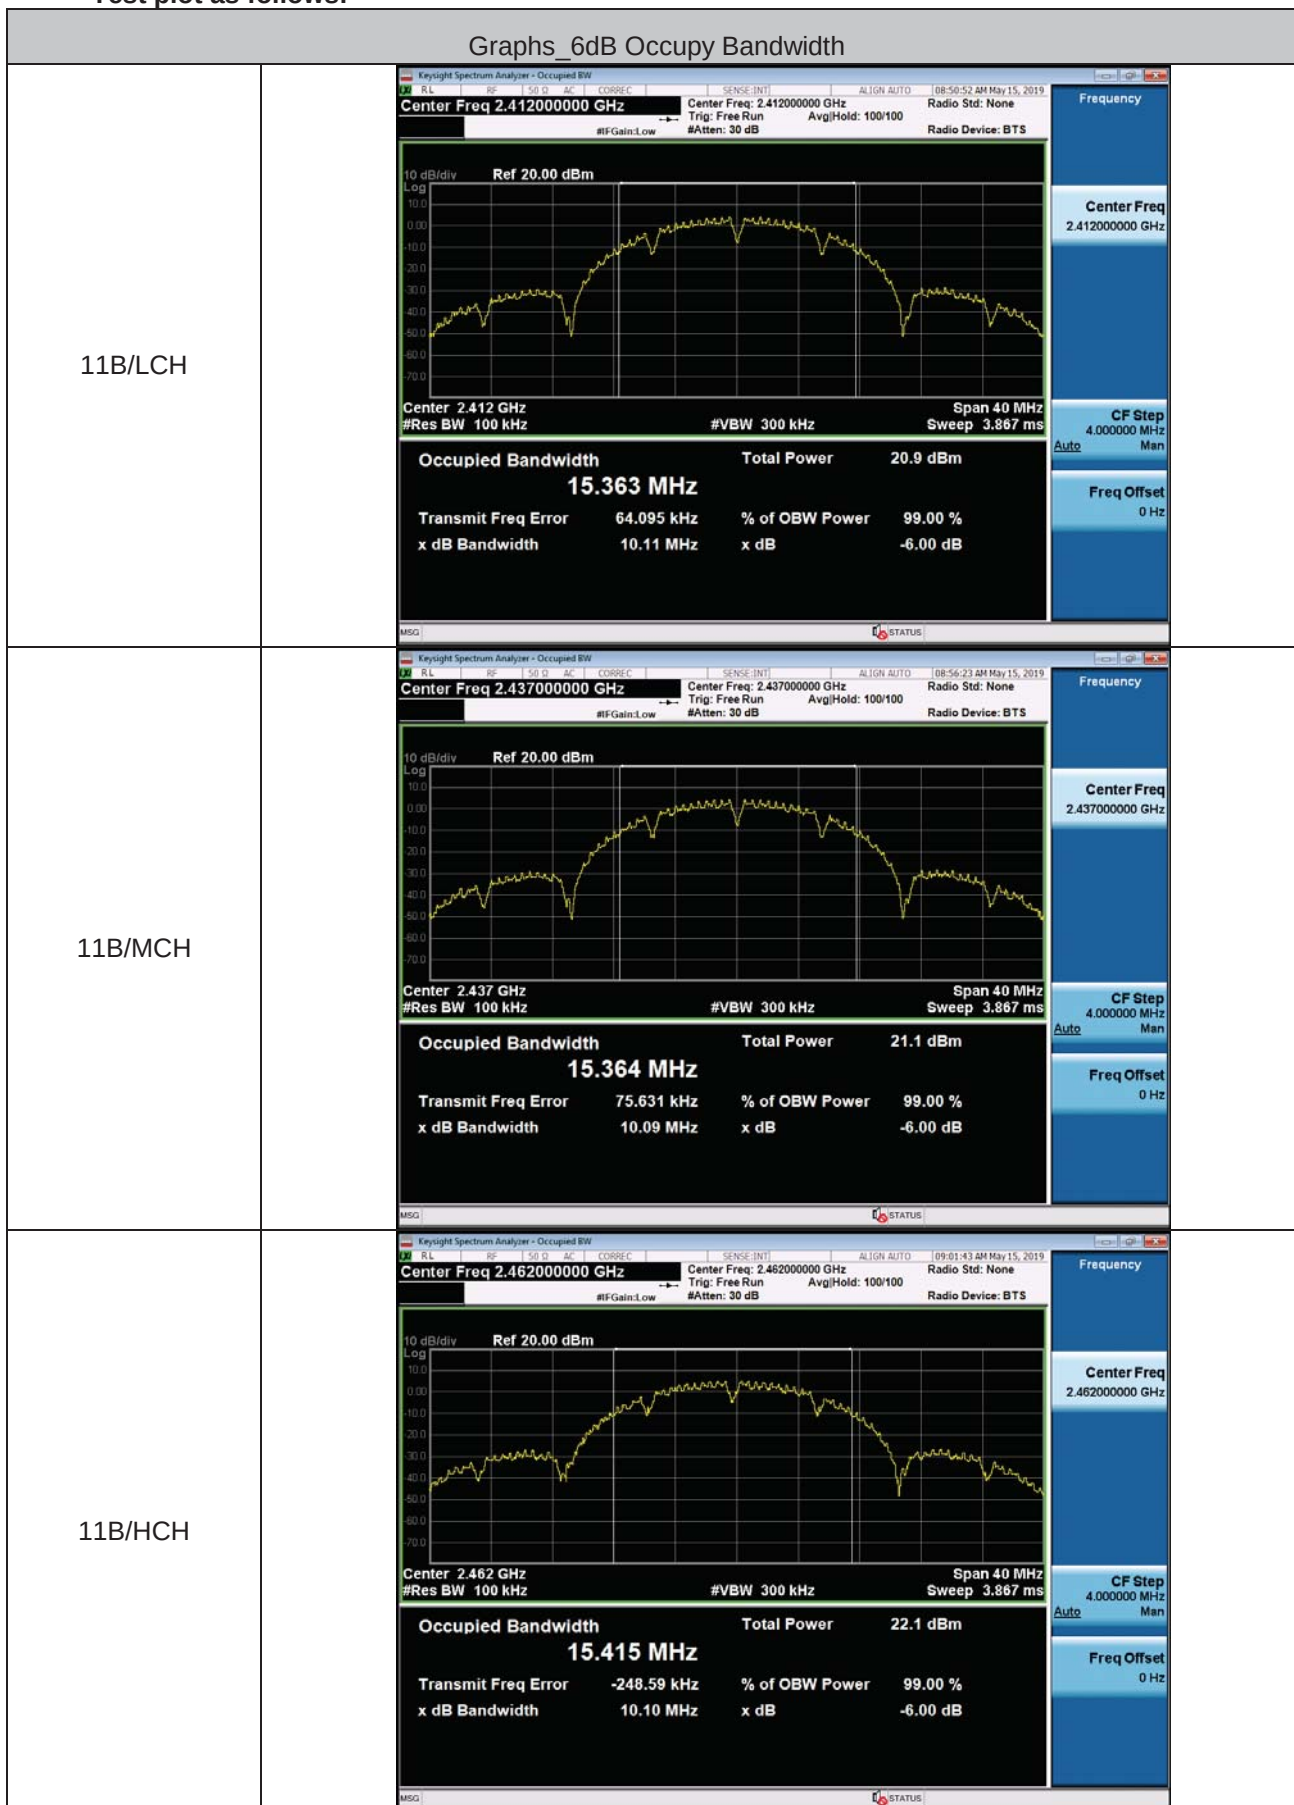

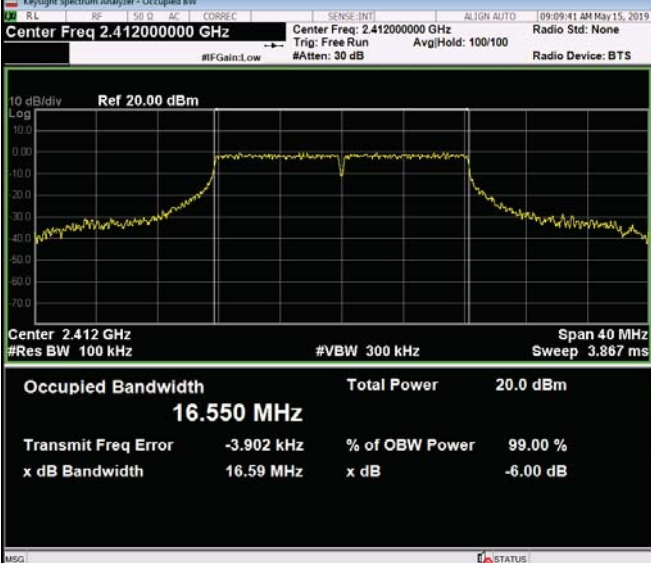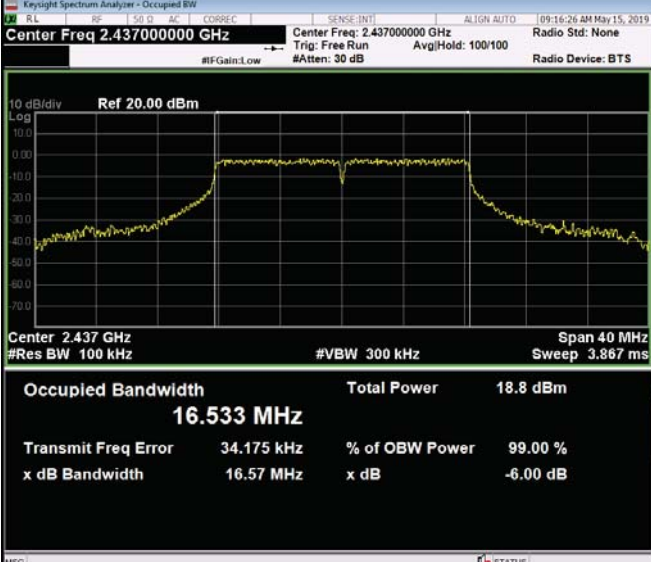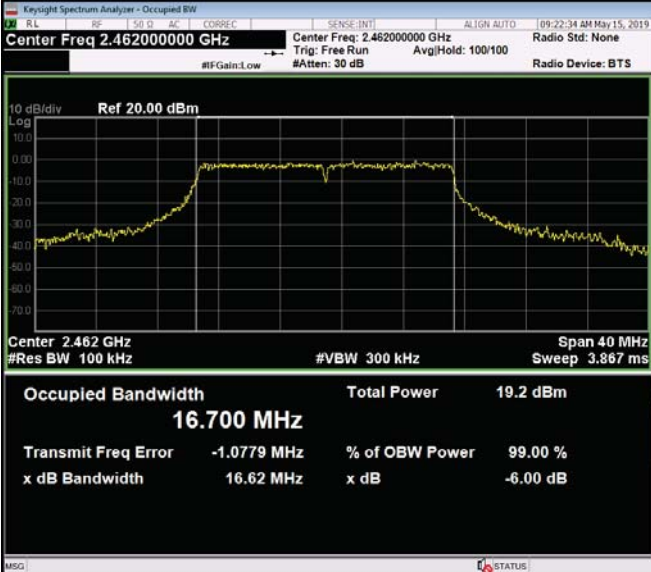


|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11G/LCH |  <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 20.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.550 MHz</p> <p>Total Power 20.0 dBm</p> <p>Transmit Freq Error -3.902 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 16.59 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.412000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>    |
| 11G/MCH |  <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 20.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.533 MHz</p> <p>Total Power 18.8 dBm</p> <p>Transmit Freq Error 34.175 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 16.57 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.437000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>   |
| 11G/HCH |  <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 20.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.700 MHz</p> <p>Total Power 19.2 dBm</p> <p>Transmit Freq Error -1.0779 MHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 16.62 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.462000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p> |
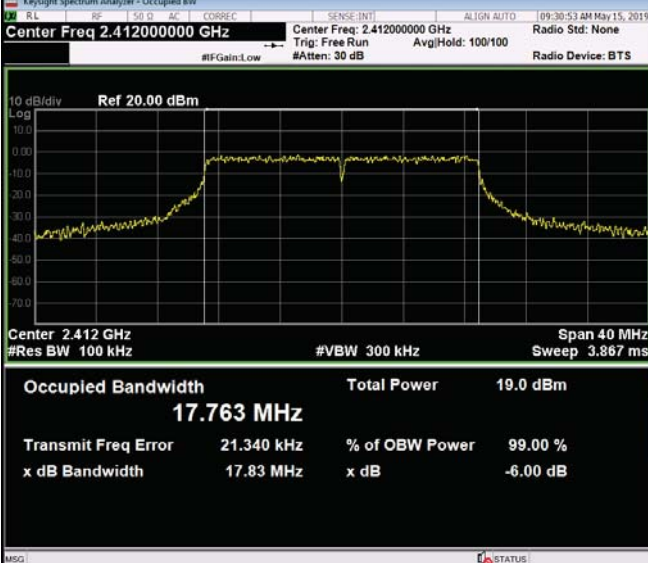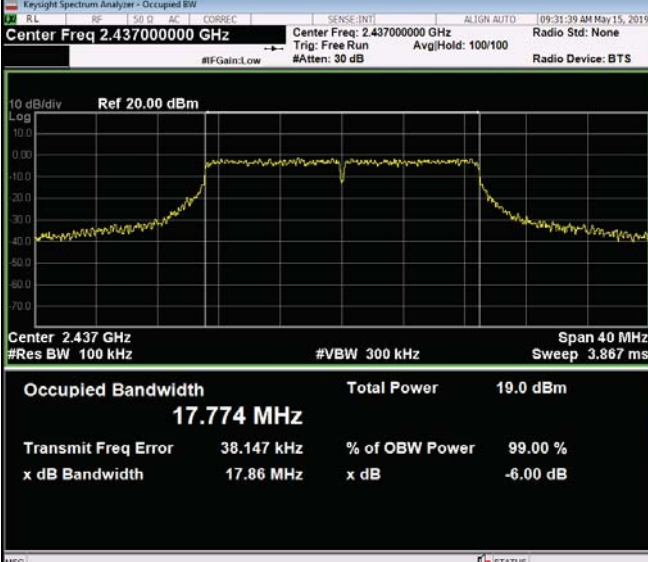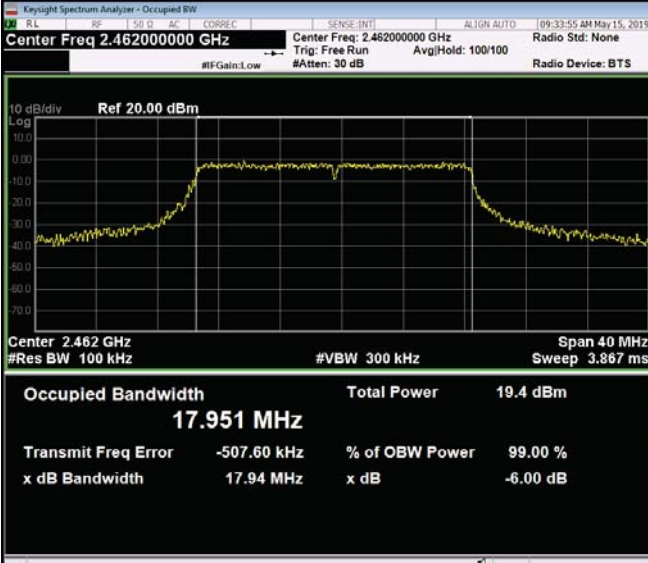
|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11N20/LCH |  <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div</p> <p>Ref 20.00 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.763 MHz</p> <p>Total Power 19.0 dBm</p> <p>Transmit Freq Error 21.340 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 17.83 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.412000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>    |
| 11N20/MCH |  <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div</p> <p>Ref 20.00 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.774 MHz</p> <p>Total Power 19.0 dBm</p> <p>Transmit Freq Error 38.147 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 17.86 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.437000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>   |
| 11N20/HCH |  <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div</p> <p>Ref 20.00 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.951 MHz</p> <p>Total Power 19.4 dBm</p> <p>Transmit Freq Error -507.60 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 17.94 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.462000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p> |
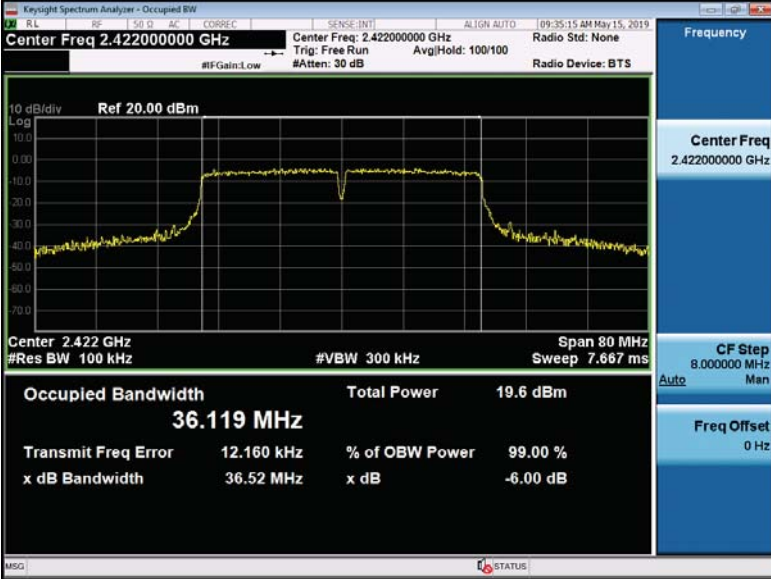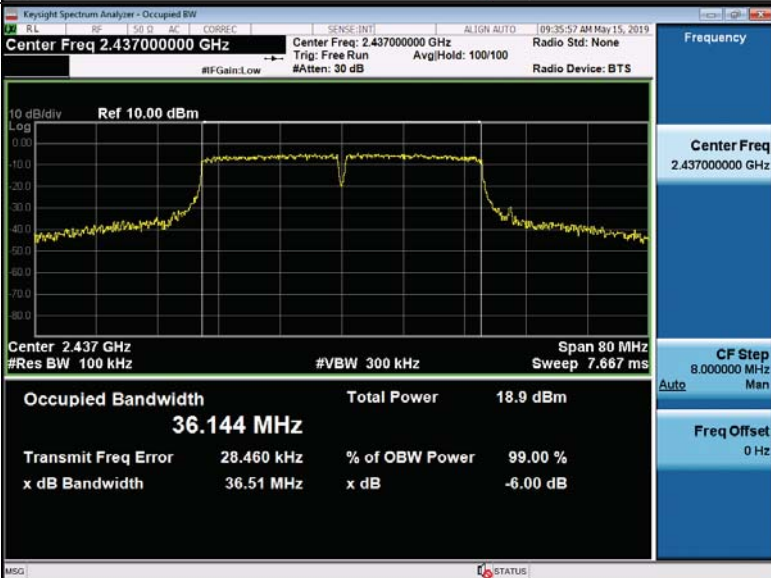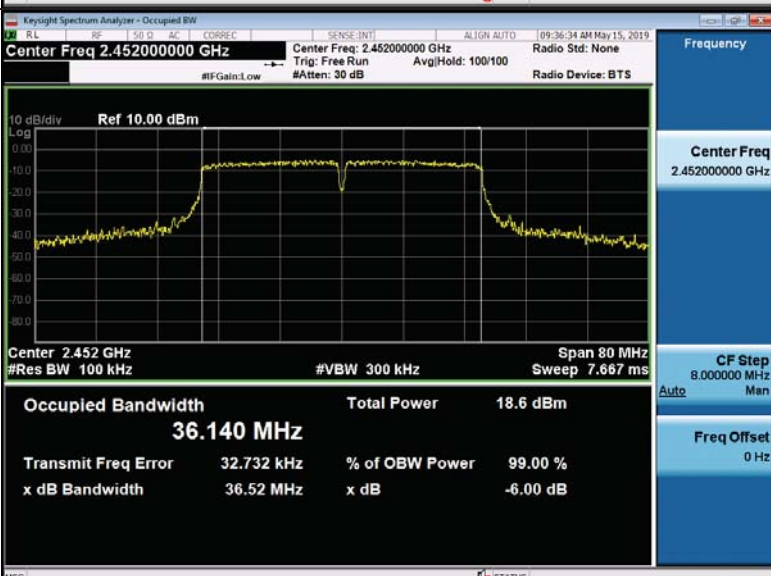
|           |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|
| 11N40/LCH |    |
| 11N40/MCH |   |
| 11N40/HCH |  |

## 6.5 Power Spectral Density
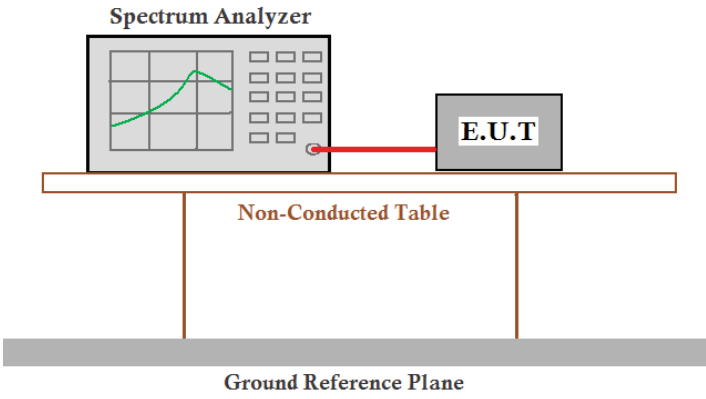
|                        |                                                                                                                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (e)                                                                                                                                                                                                                                         |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                          |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                            |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                      |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report. |
| Limit:                 | ≤8.00dBm/3kHz                                                                                                                                                                                                                                                              |
| Test Results:          | Pass                                                                                                                                                                                                                                                                       |

### Measurement Data

| Type          | Channel | Power Spectral Density (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|---------------|---------|-----------------------------------|------------------|--------|
| 802.11b       | Lowest  | -14.243                           | 8                | Pass   |
|               | Middle  | -14.751                           |                  |        |
|               | High st | -14.427                           |                  |        |
| 802.11g       | Lowest  | -14.507                           | 8                | Pass   |
|               | Middle  | -15.717                           |                  |        |
|               | Highest | -14.471                           |                  |        |
| 802.11n(HT20) | Lowest  | -15.221                           | 8                | Pass   |
|               | Middle  | -15.850                           |                  |        |
|               | Highest | -13.642                           |                  |        |
| 802.11n(HT40) | Lowest  | -15.564                           | 8                | Pass   |
|               | Middle  | -17.789                           |                  |        |
|               | Highest | -16.774                           |                  |        |

Test plot as follows:



Graphs

11B/LCH





11B/MCH






11B/HCH




|         |                                                                                      |
|---------|--------------------------------------------------------------------------------------|
| 11G/LCH |    |
| 11G/MCH |   |
| 11G/HCH |  |
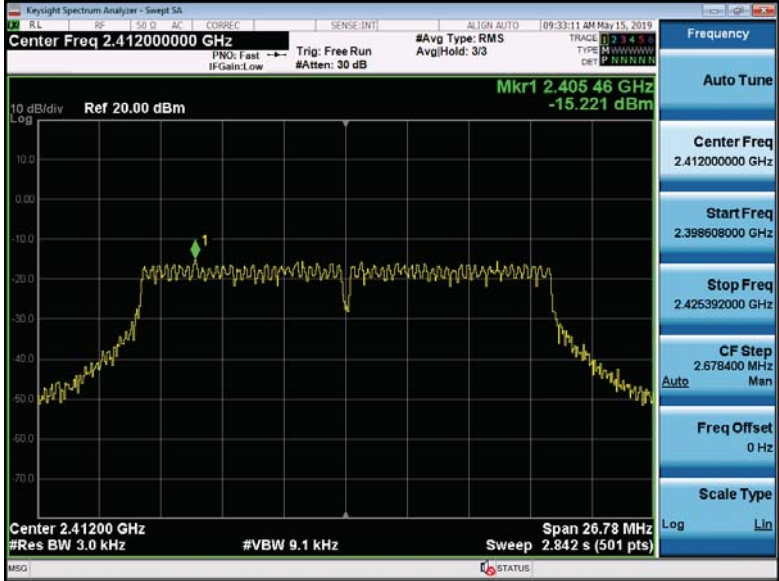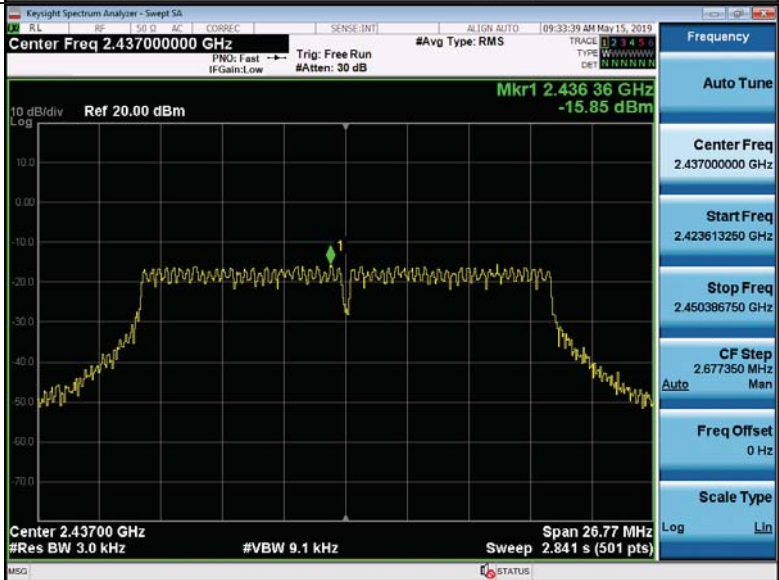
|           |                                                                                                                                                                                                                                                                                                                                                        |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11N20/LCH |  <p>KeySight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref 20.00 dBm</p> <p>Mkr1 2.40546 GHz -15.221 dBm</p> <p>Center 2.41200 GHz</p> <p>#Res BW 3.0 kHz</p> <p>#VBW 9.1 kHz</p> <p>Span 26.78 MHz</p> <p>Sweep 2.842 s (501 pts)</p>   |
| 11N20/MCH |  <p>KeySight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref 20.00 dBm</p> <p>Mkr1 2.43636 GHz -15.85 dBm</p> <p>Center 2.43700 GHz</p> <p>#Res BW 3.0 kHz</p> <p>#VBW 9.1 kHz</p> <p>Span 26.77 MHz</p> <p>Sweep 2.841 s (501 pts)</p>   |
| 11N20/HCH |  <p>KeySight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref 20.00 dBm</p> <p>Mkr1 2.46184 GHz -13.642 dBm</p> <p>Center 2.46200 GHz</p> <p>#Res BW 3.0 kHz</p> <p>#VBW 9.1 kHz</p> <p>Span 26.90 MHz</p> <p>Sweep 2.855 s (501 pts)</p> |

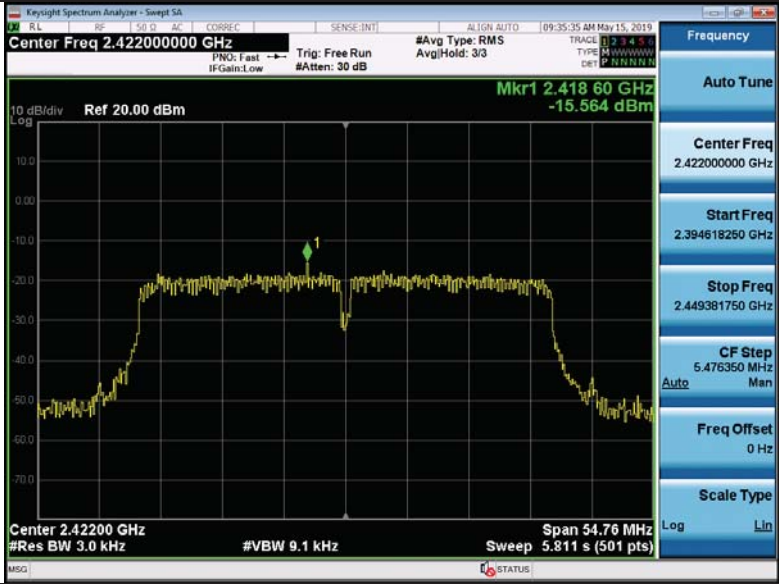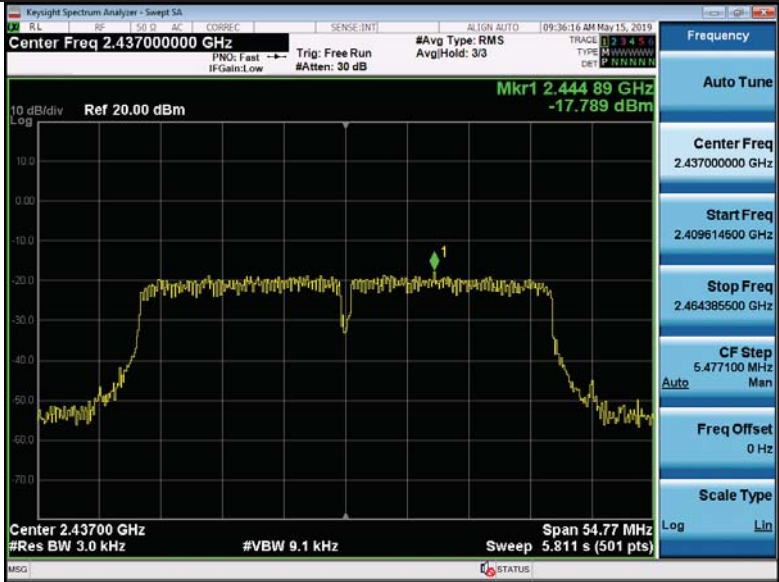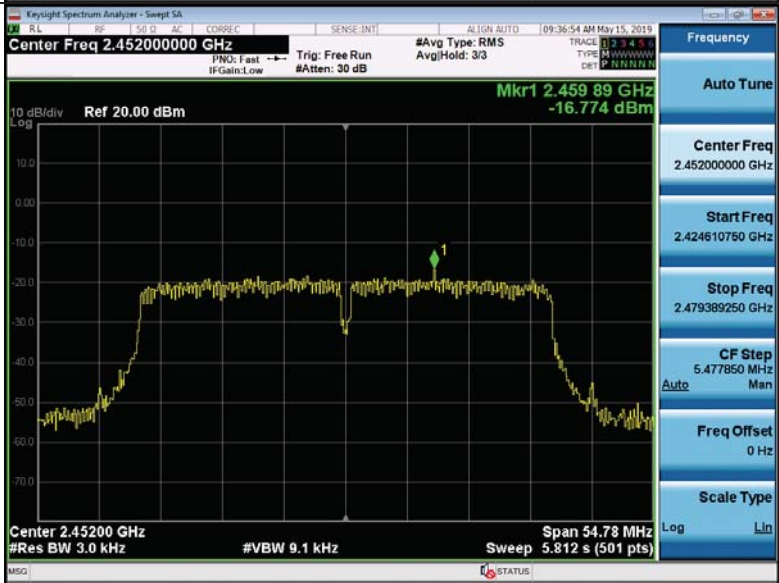
|           |                                                                                                                                                                                                                                                                                                                                                                           |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11N40/LCH |  <p>Key parameters for 11N40/LCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.42200000 GHz</li> <li>Mkr1: 2.418 60 GHz</li> <li>Power: -15.564 dBm</li> <li>Span: 54.76 MHz</li> <li>Res BW: 3.0 kHz</li> <li>VBW: 9.1 kHz</li> <li>Sweep: 5.811 s (501 pts)</li> </ul>   |
| 11N40/MCH |  <p>Key parameters for 11N40/MCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.43700000 GHz</li> <li>Mkr1: 2.444 89 GHz</li> <li>Power: -17.789 dBm</li> <li>Span: 54.77 MHz</li> <li>Res BW: 3.0 kHz</li> <li>VBW: 9.1 kHz</li> <li>Sweep: 5.811 s (501 pts)</li> </ul>  |
| 11N40/HCH |  <p>Key parameters for 11N40/HCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.45200000 GHz</li> <li>Mkr1: 2.459 89 GHz</li> <li>Power: -16.774 dBm</li> <li>Span: 54.78 MHz</li> <li>Res BW: 3.0 kHz</li> <li>VBW: 9.1 kHz</li> <li>Sweep: 5.812 s (501 pts)</li> </ul> |



## 6.6 Band-edge for RF Conducted Emissions
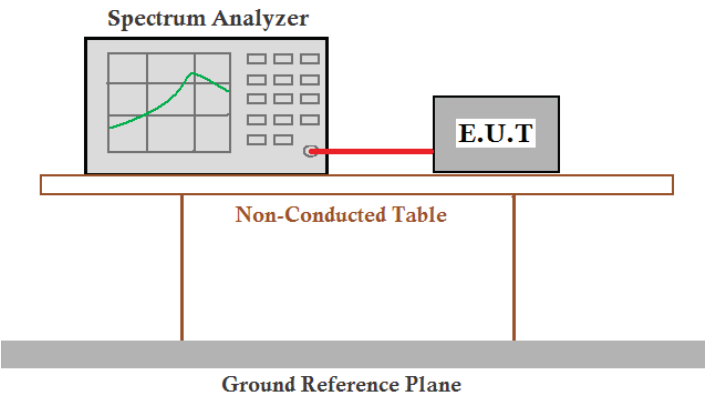
|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                       |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                                                                                                                                         |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.                                                                                                            |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |


Test plot as follows:

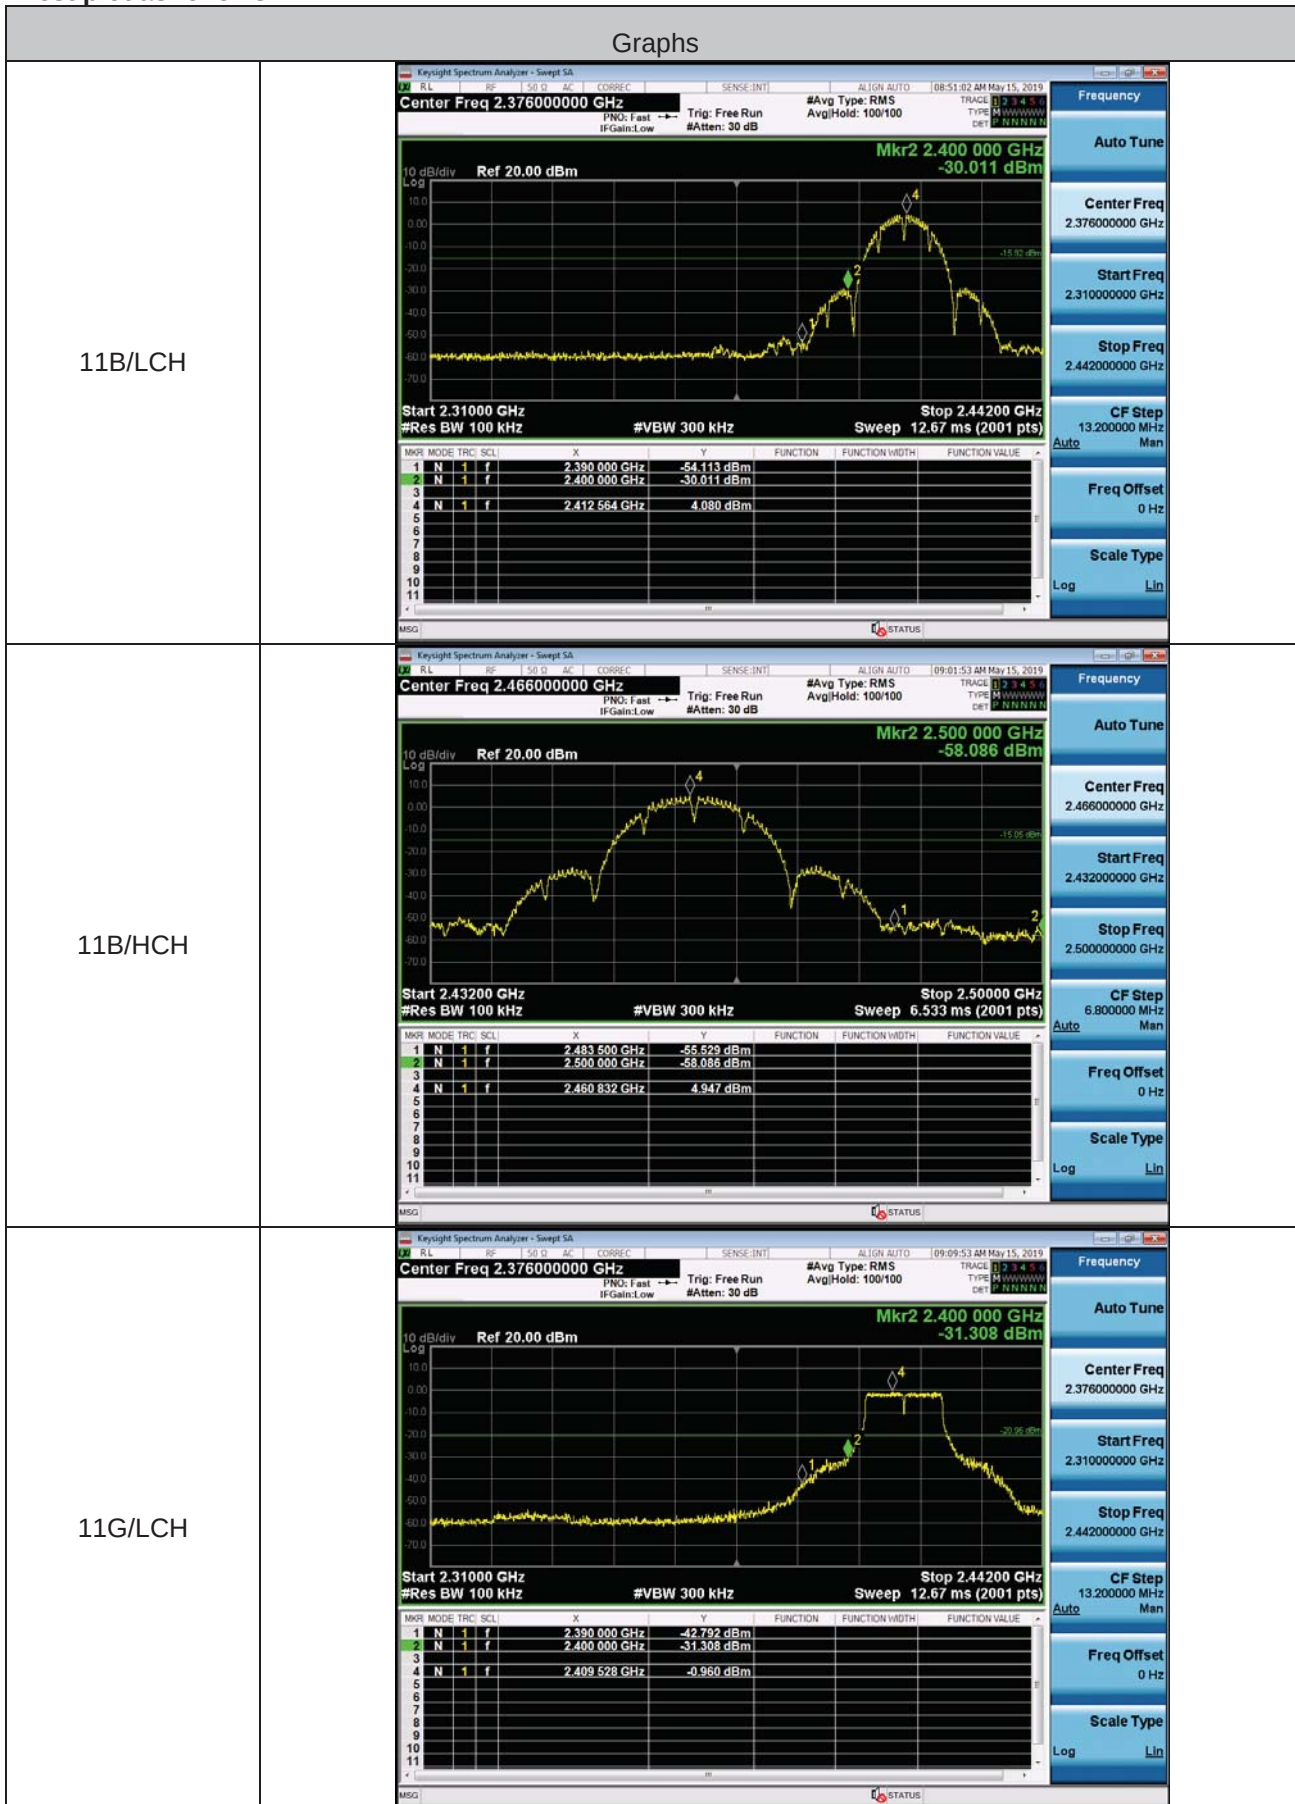

| 11G/HCH   | <div><div><div>KeySight Spectrum Analyzer - Swept SA</div><div>RL L F S D A C CORSEC SENSE INT ALIGN AUTO 09:22:46 AM May 15, 2019</div><div>Center Freq 2.466000000 GHz</div><div>IF No: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB</div><div>#Avg Type: RMS Avg/Hold: 100/100</div><div>TRACE 10 3 4 5 TYPE M M M M M M M M DET P N N N N N</div><div>10 dB/div Ref 20.00 dBm</div><div>Mkr2 2.500 000 GHz -59.064 dBm</div><div>Start 2.43200 GHz Stop 2.50000 GHz</div><div>#Res BW 100 kHz #VBW 300 kHz Sweep 6.533 ms (2001 pts)</div><div><table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-45.038 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-59.064 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.465 592 GHz</td><td>-0.629 dBm</td><td></td><td></td><td></td></tr></table></div><div>MSG STATUS</div></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.466000000 GHz</div><div>Start Freq 2.432000000 GHz</div><div>Stop Freq 2.500000000 GHz</div><div>CF Step 6.8000000 MHz</div><div>Auto Man</div><div>Freq Offset 0 Hz</div><div>Scale Type</div><div>Log Lin</div></div></div>  | Mkr | Mode | Trc           | SCL         | X        | Y              | Function       | Function Width | Function Value | 1 | N | 1 | f | 2.483 500 GHz | -45.038 dBm |  |  |  | 2 | N | 1 | f | 2.500 000 GHz | -59.064 dBm |  |  |  | 4 | N | 1 | f | 2.465 592 GHz | -0.629 dBm |  |  |  |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|---------------|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|---|---------------|-------------|--|--|--|---|---|---|---|---------------|-------------|--|--|--|---|---|---|---|---------------|------------|--|--|--|
| Mkr       | Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Trc | SCL  | X             | Y           | Function | Function Width | Function Value |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 1         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1   | f    | 2.483 500 GHz | -45.038 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 2         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1   | f    | 2.500 000 GHz | -59.064 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 4         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1   | f    | 2.465 592 GHz | -0.629 dBm  |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 11N20/LCH | <div><div><div>KeySight Spectrum Analyzer - Swept SA</div><div>RL L F S D A C CORSEC SENSE INT ALIGN AUTO 09:33:14 AM May 15, 2019</div><div>Center Freq 2.376000000 GHz</div><div>IF No: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB</div><div>#Avg Type: RMS Avg/Hold: 100/100</div><div>TRACE 10 3 4 5 TYPE M M M M M M M M DET P N N N N N</div><div>10 dB/div Ref 20.00 dBm</div><div>Mkr2 2.400 000 GHz -31.491 dBm</div><div>Start 2.31000 GHz Stop 2.44200 GHz</div><div>#Res BW 100 kHz #VBW 300 kHz Sweep 12.67 ms (2001 pts)</div><div><table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-40.184 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-31.491 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.409 132 GHz</td><td>-1.311 dBm</td><td></td><td></td><td></td></tr></table></div><div>MSG STATUS</div></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.376000000 GHz</div><div>Start Freq 2.310000000 GHz</div><div>Stop Freq 2.442000000 GHz</div><div>CF Step 13.2000000 MHz</div><div>Auto Man</div><div>Freq Offset 0 Hz</div><div>Scale Type</div><div>Log Lin</div></div></div> | Mkr | Mode | Trc           | SCL         | X        | Y              | Function       | Function Width | Function Value | 1 | N | 1 | f | 2.390 000 GHz | -40.184 dBm |  |  |  | 2 | N | 1 | f | 2.400 000 GHz | -31.491 dBm |  |  |  | 4 | N | 1 | f | 2.409 132 GHz | -1.311 dBm |  |  |  |
| Mkr       | Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Trc | SCL  | X             | Y           | Function | Function Width | Function Value |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 1         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1   | f    | 2.390 000 GHz | -40.184 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 2         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1   | f    | 2.400 000 GHz | -31.491 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 4         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1   | f    | 2.409 132 GHz | -1.311 dBm  |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 11N20/HCH | <div><div><div>KeySight Spectrum Analyzer - Swept SA</div><div>RL L F S D A C CORSEC SENSE INT ALIGN AUTO 09:34:08 AM May 15, 2019</div><div>Center Freq 2.466000000 GHz</div><div>IF No: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB</div><div>#Avg Type: RMS Avg/Hold: 100/100</div><div>TRACE 10 3 4 5 TYPE M M M M M M M M DET P N N N N N</div><div>10 dB/div Ref 20.00 dBm</div><div>Mkr2 2.500 000 GHz -59.302 dBm</div><div>Start 2.43200 GHz Stop 2.50000 GHz</div><div>#Res BW 100 kHz #VBW 300 kHz Sweep 6.533 ms (2001 pts)</div><div><table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-44.311 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-59.302 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.464 504 GHz</td><td>-0.441 dBm</td><td></td><td></td><td></td></tr></table></div><div>MSG STATUS</div></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.466000000 GHz</div><div>Start Freq 2.432000000 GHz</div><div>Stop Freq 2.500000000 GHz</div><div>CF Step 6.8000000 MHz</div><div>Auto Man</div><div>Freq Offset 0 Hz</div><div>Scale Type</div><div>Log Lin</div></div></div>  | Mkr | Mode | Trc           | SCL         | X        | Y              | Function       | Function Width | Function Value | 1 | N | 1 | f | 2.483 500 GHz | -44.311 dBm |  |  |  | 2 | N | 1 | f | 2.500 000 GHz | -59.302 dBm |  |  |  | 4 | N | 1 | f | 2.464 504 GHz | -0.441 dBm |  |  |  |
| Mkr       | Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Trc | SCL  | X             | Y           | Function | Function Width | Function Value |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 1         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1   | f    | 2.483 500 GHz | -44.311 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 2         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1   | f    | 2.500 000 GHz | -59.302 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |
| 4         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1   | f    | 2.464 504 GHz | -0.441 dBm  |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |   |   |   |               |            |  |  |  |




## 6.7 RF Conducted Spurious Emissions

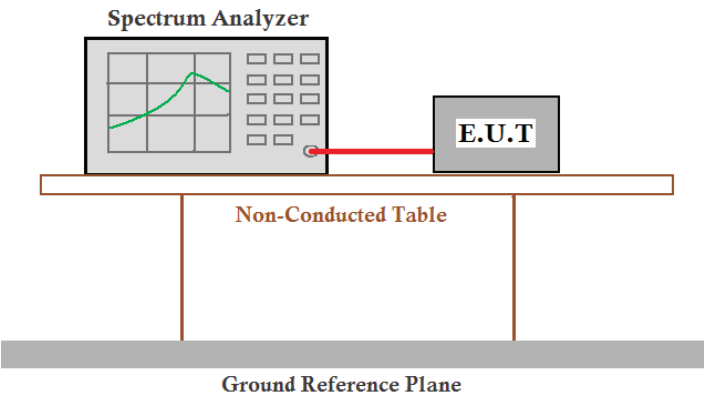
|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                       |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                                                                                                                                         |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.                                                                                                              |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |



Test plot as follows:

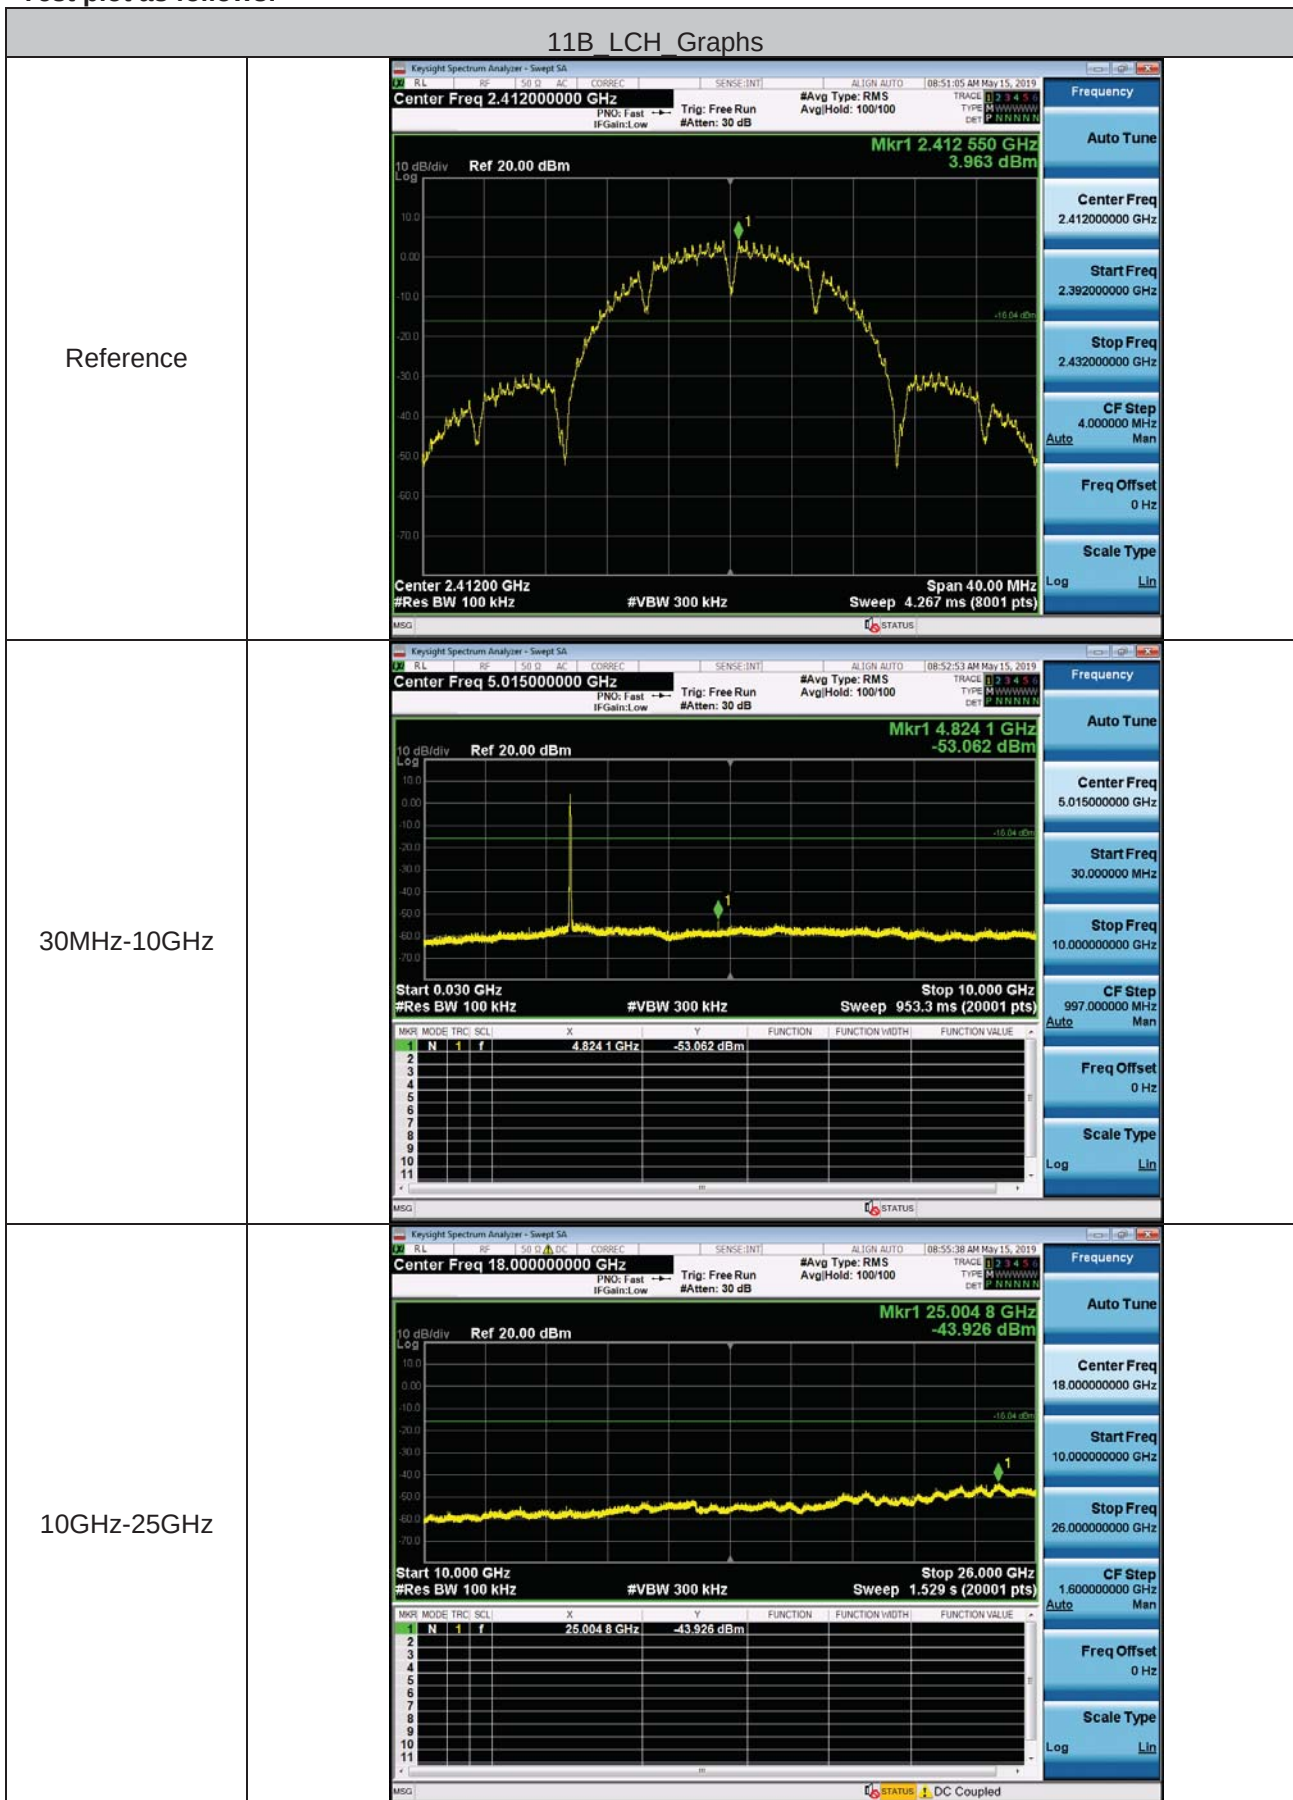



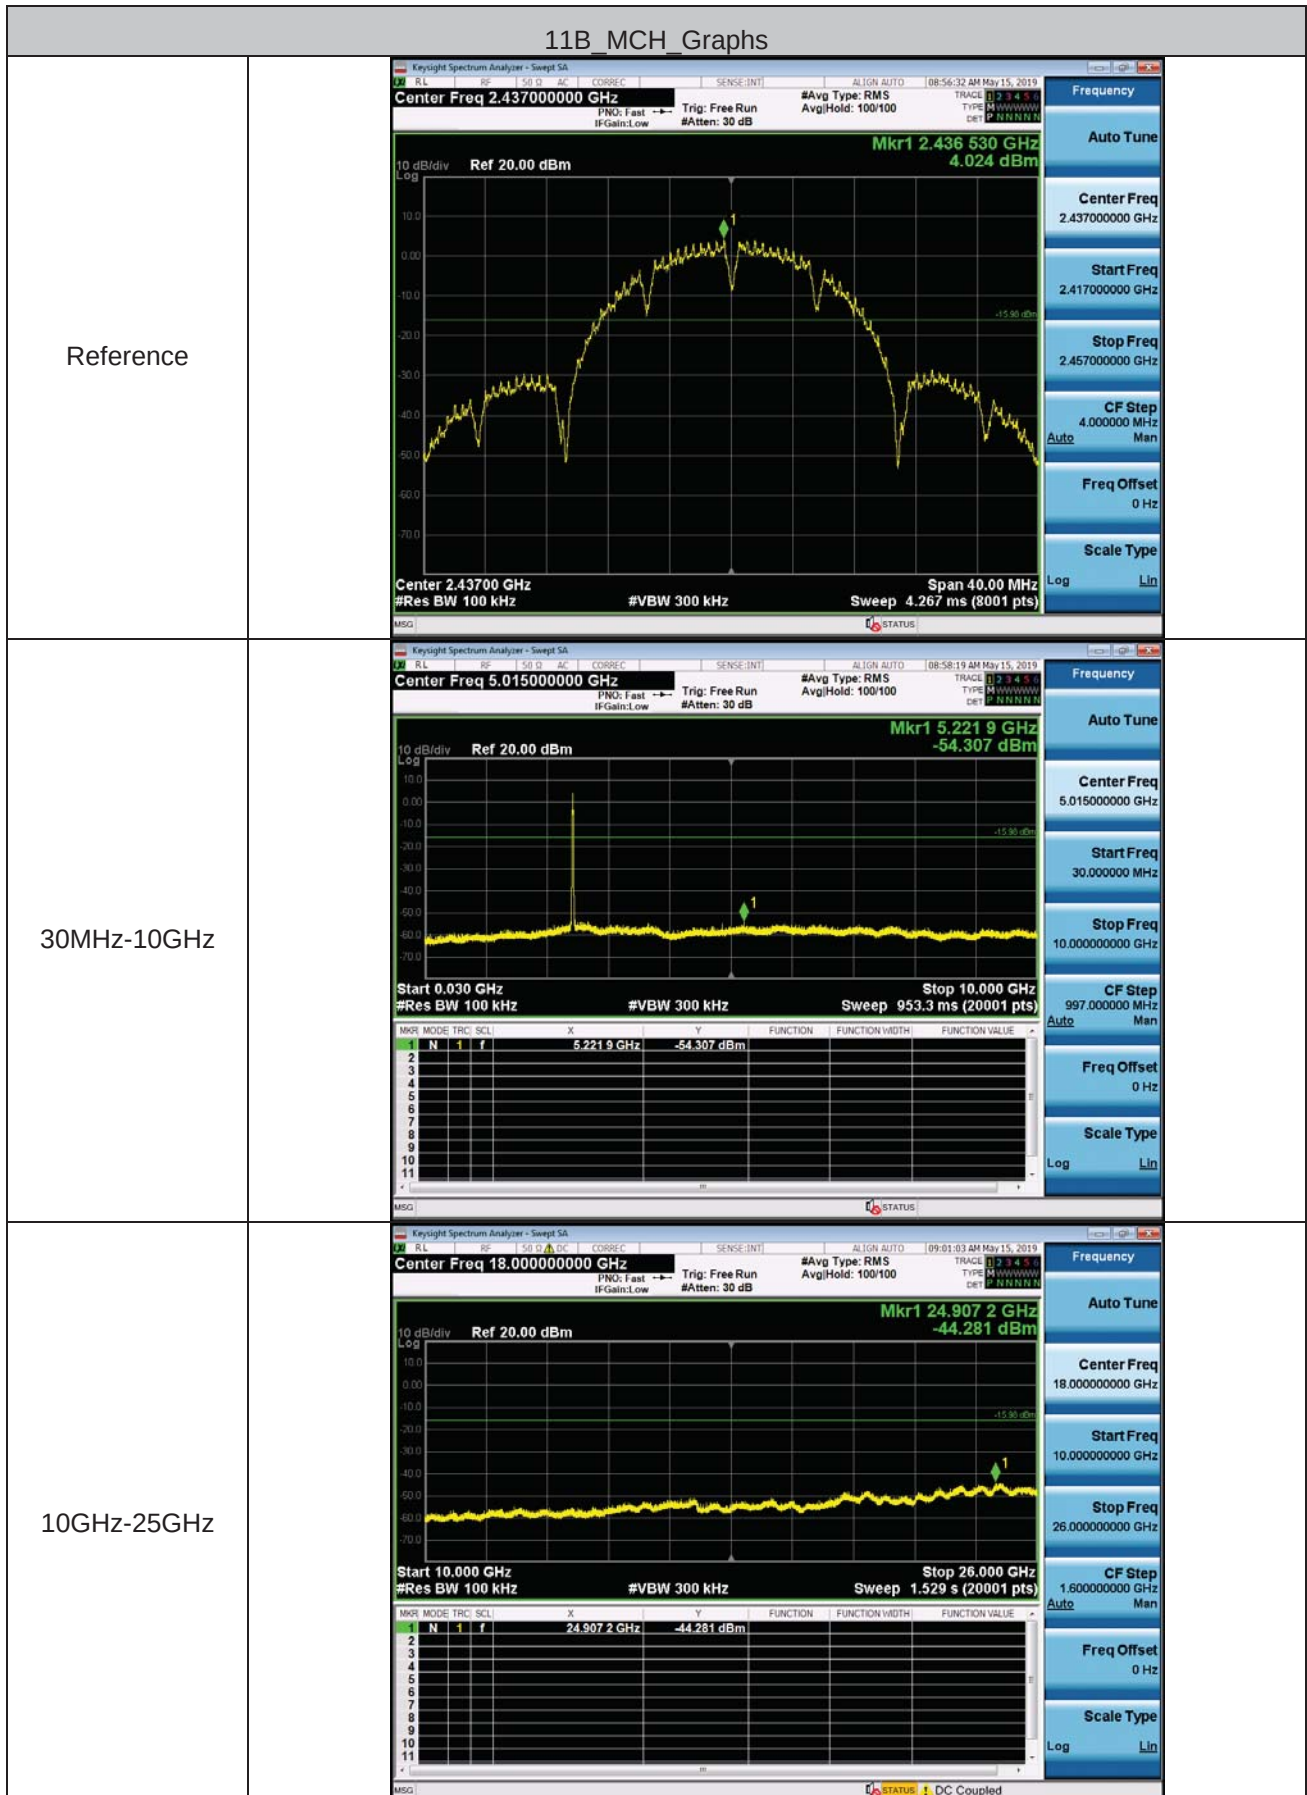


11B\_HCH\_Graphs


Reference




30MHz-10GHz

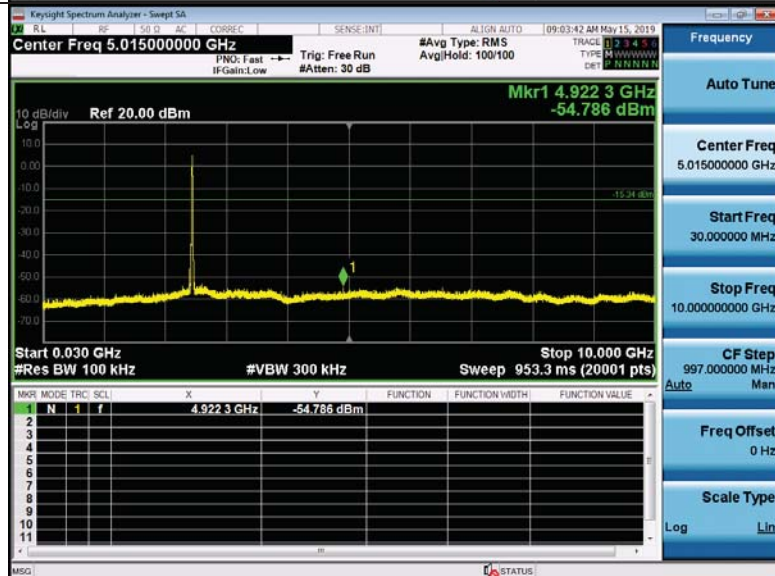



10GHz-25GHz

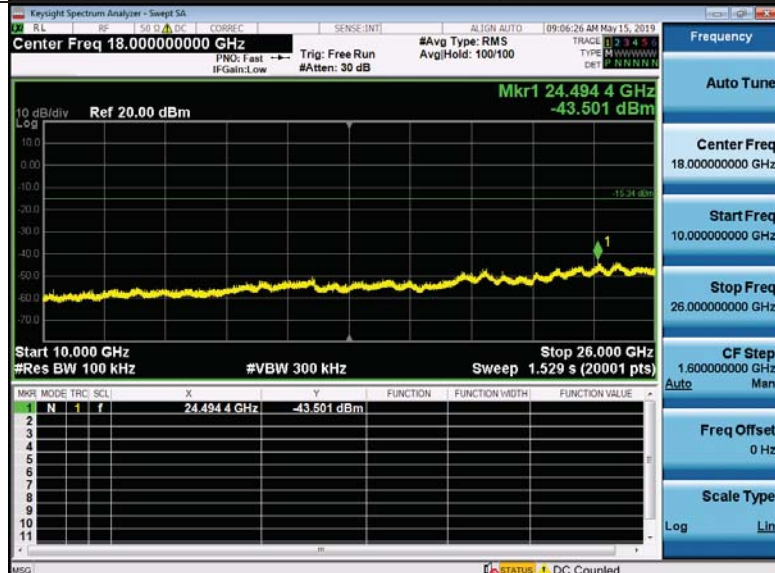


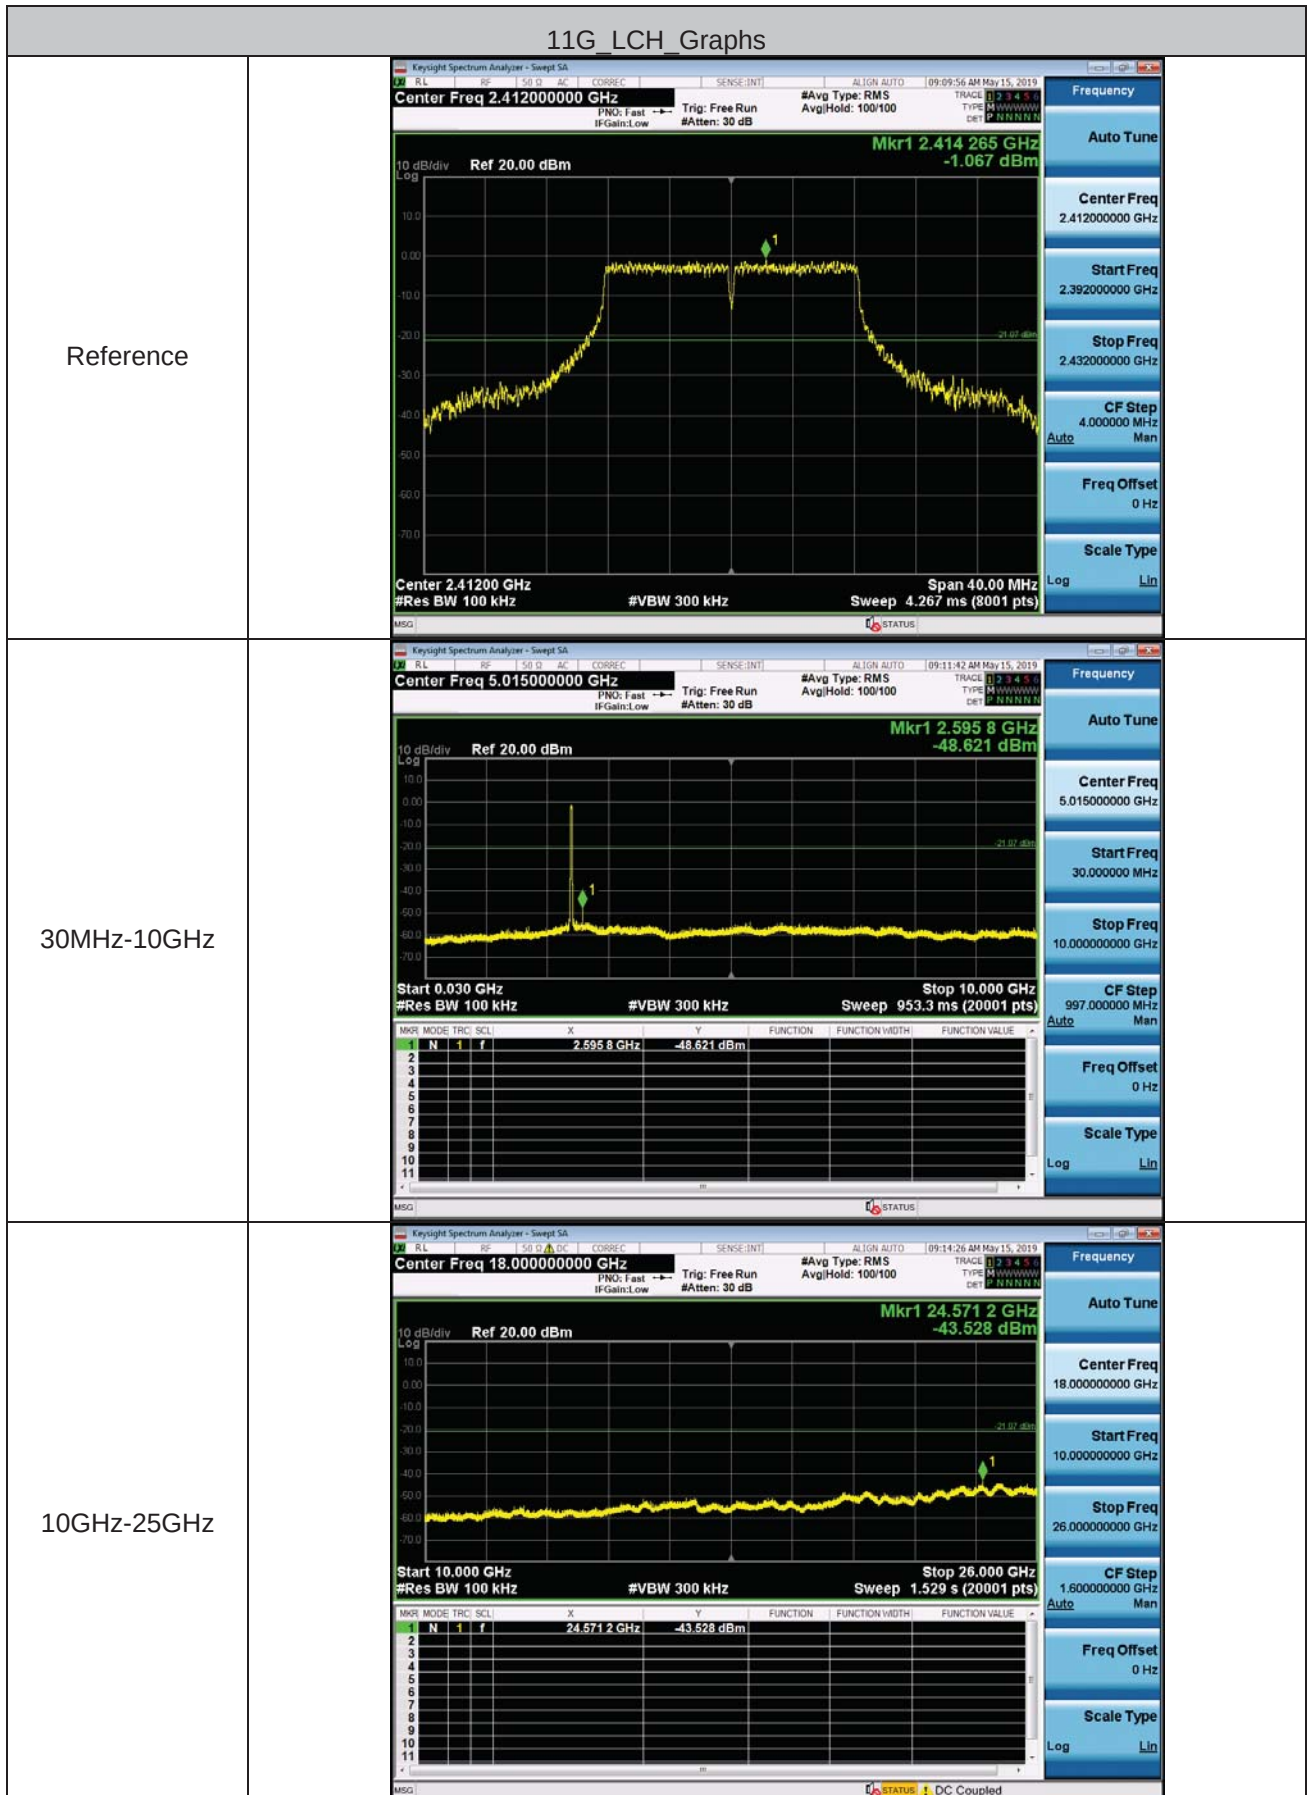




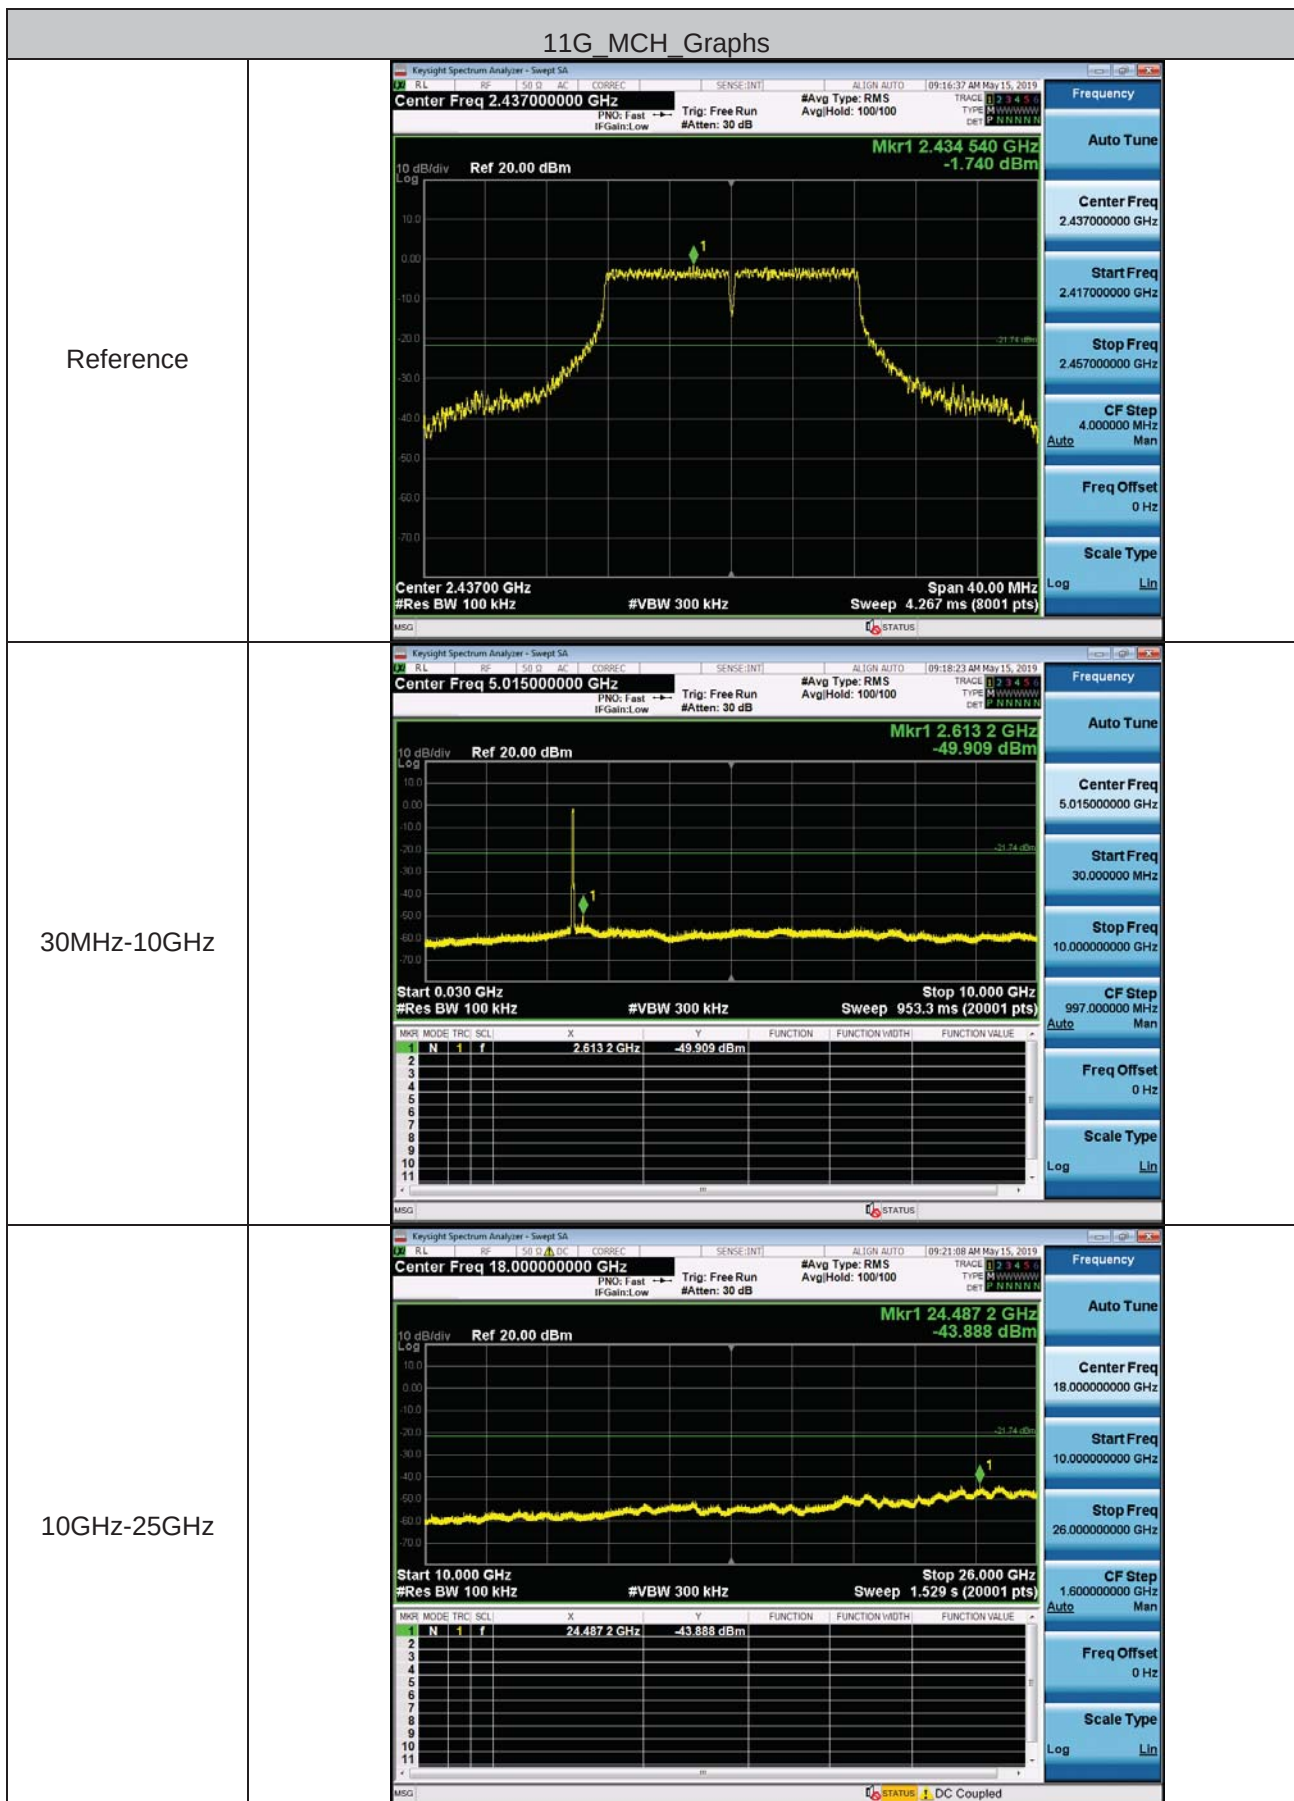


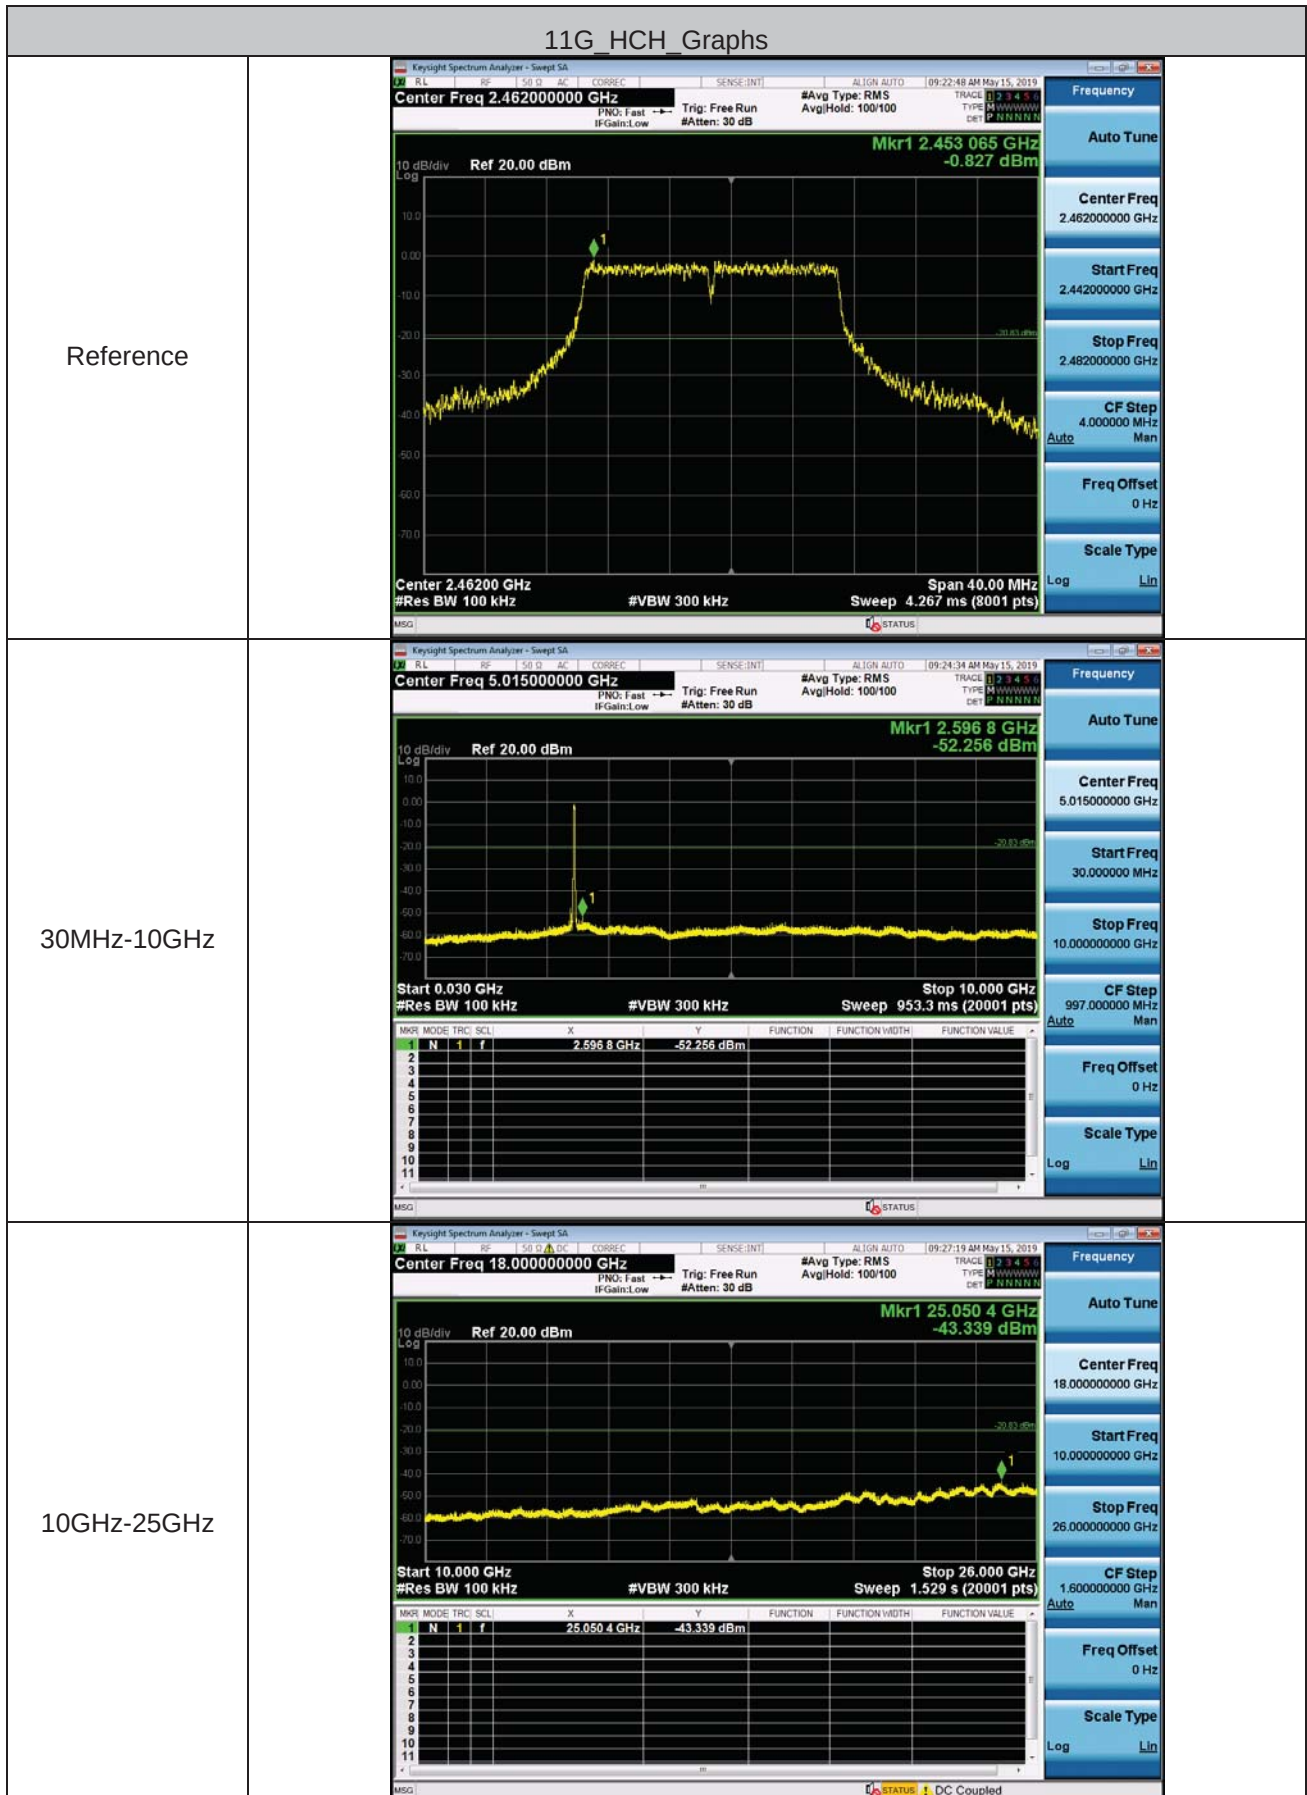


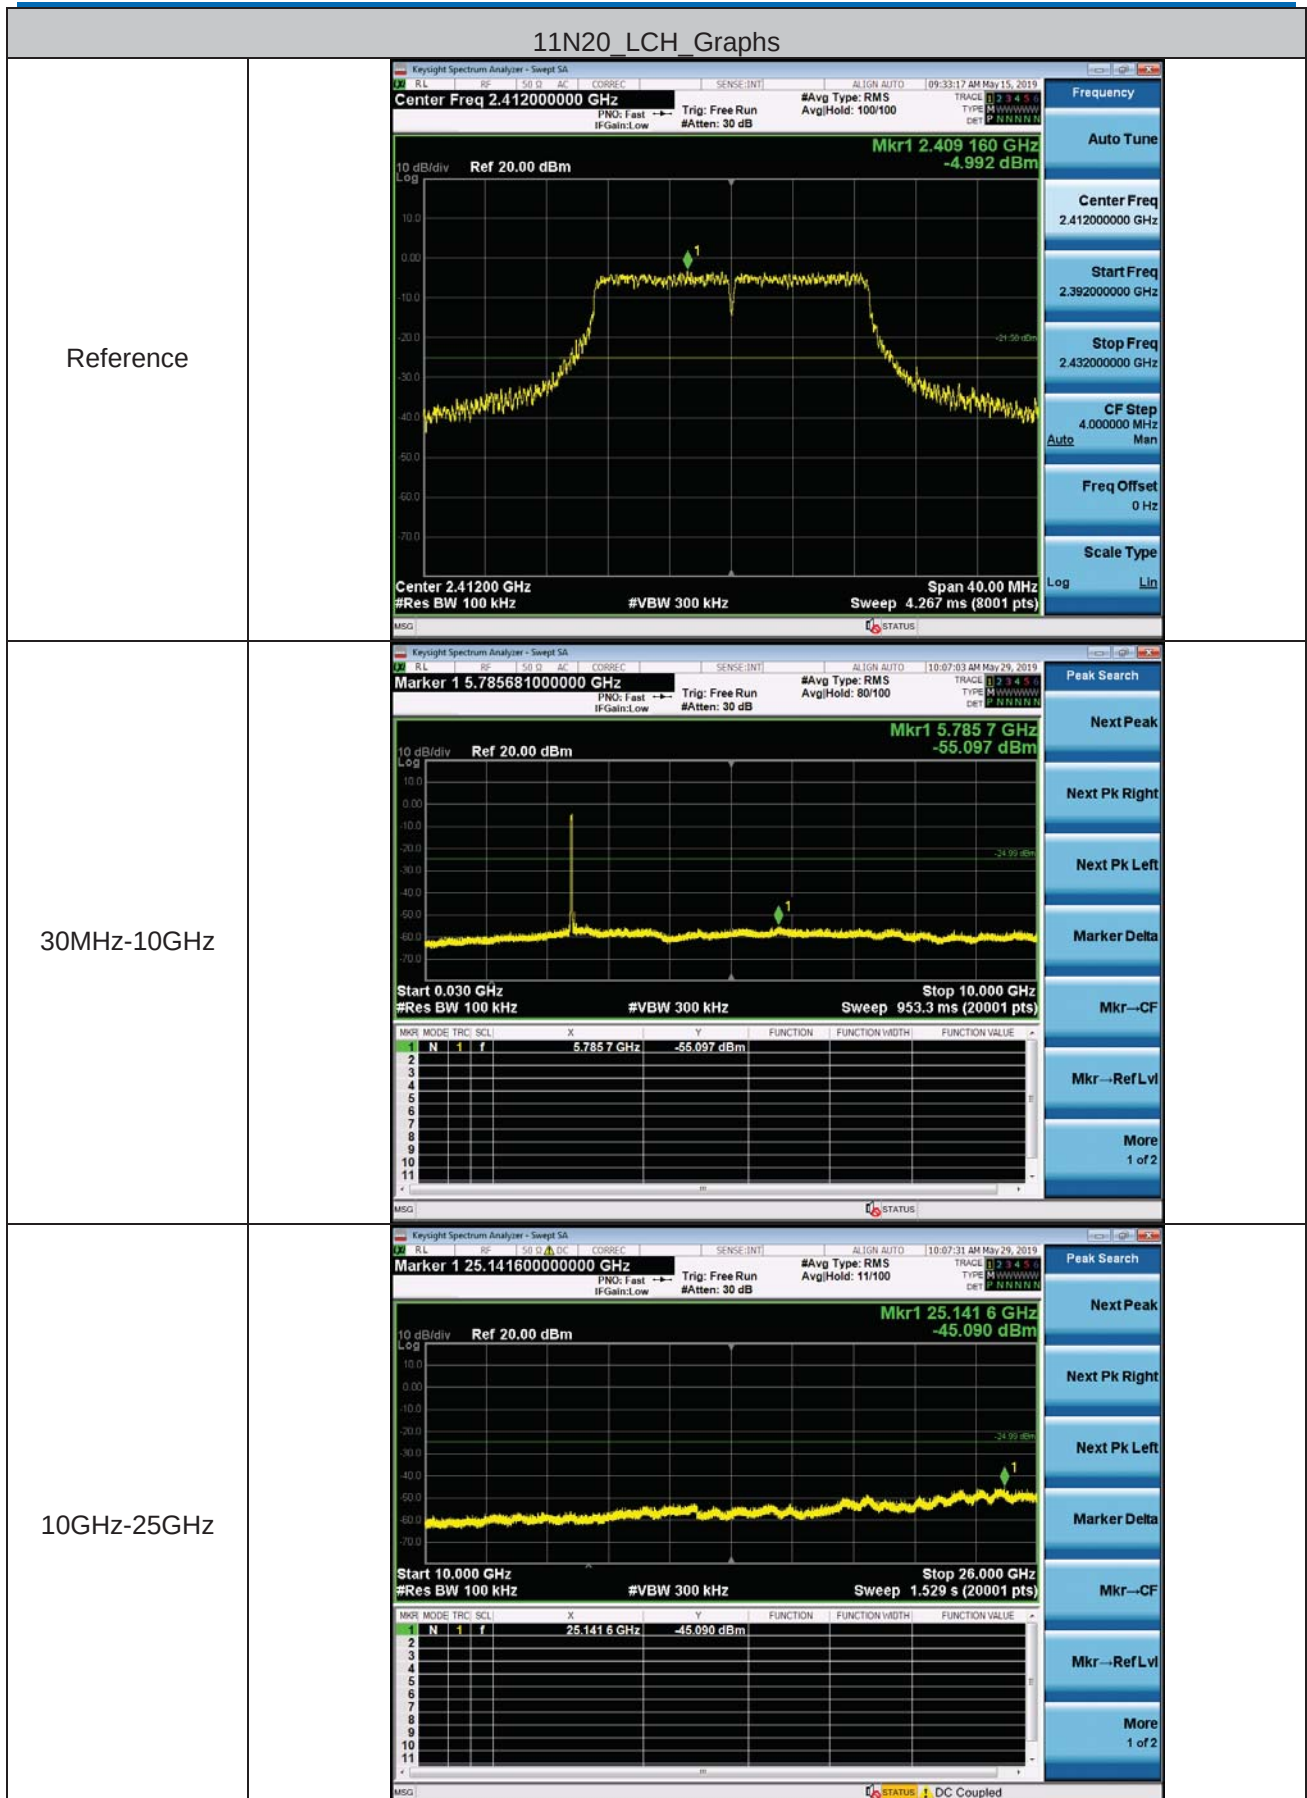



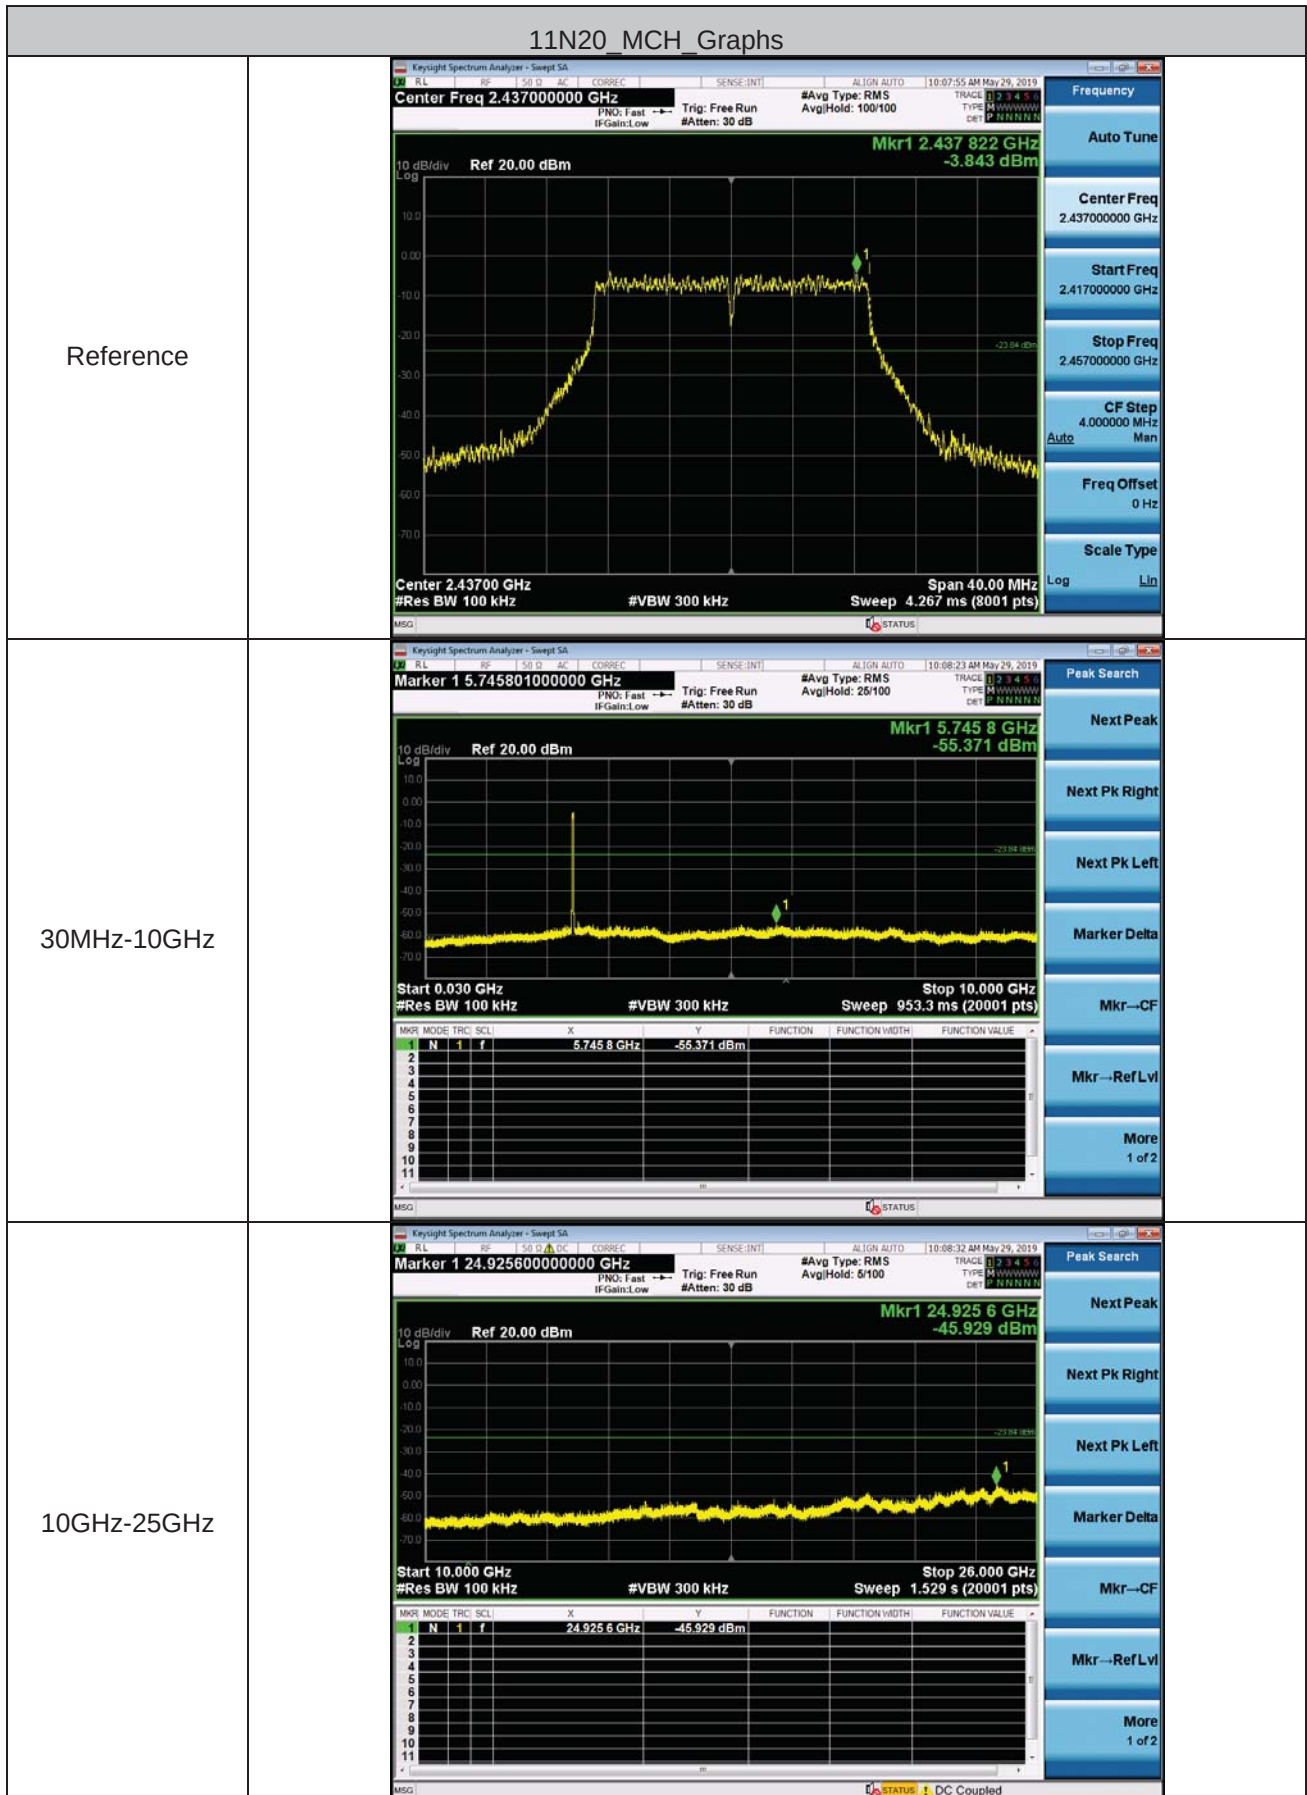

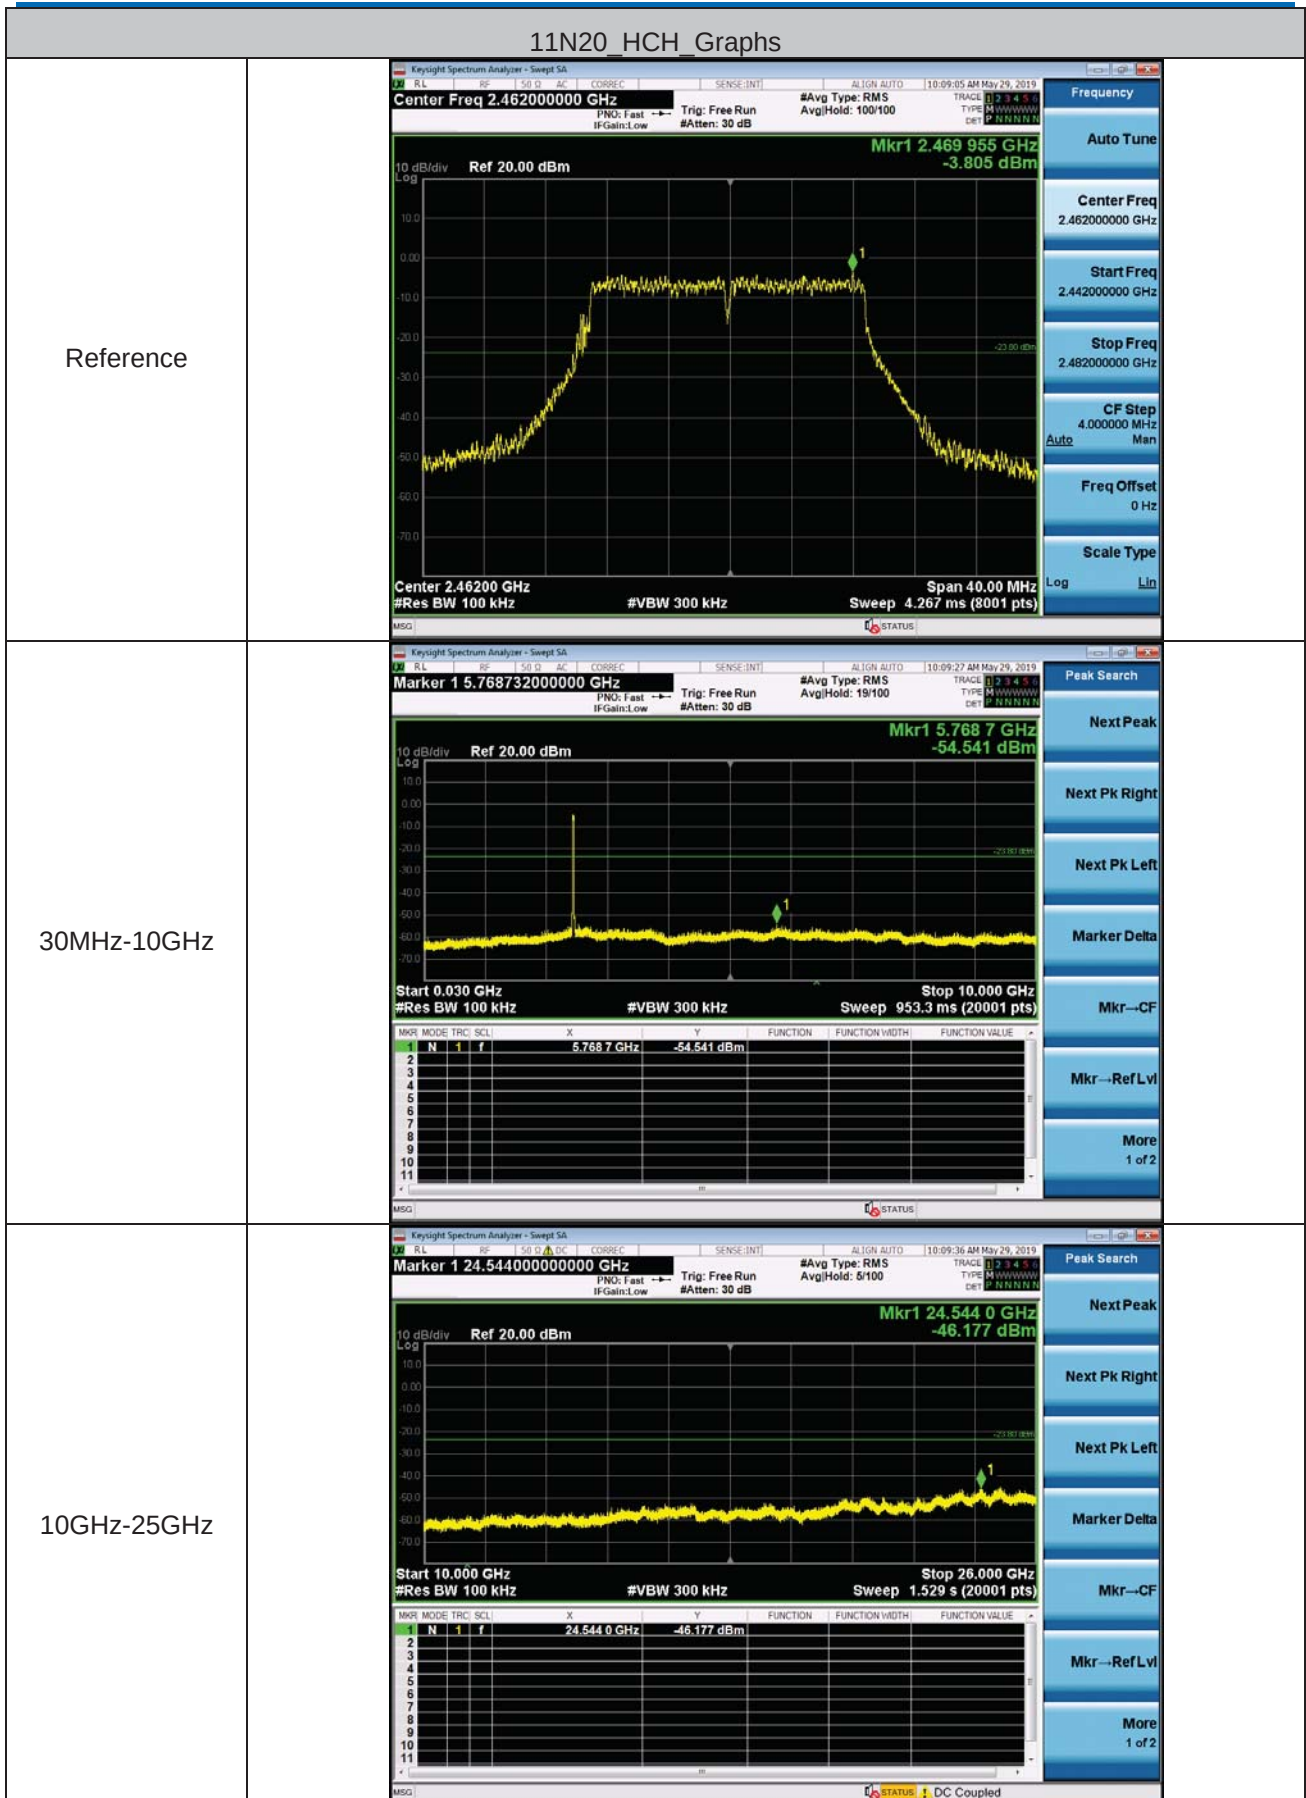

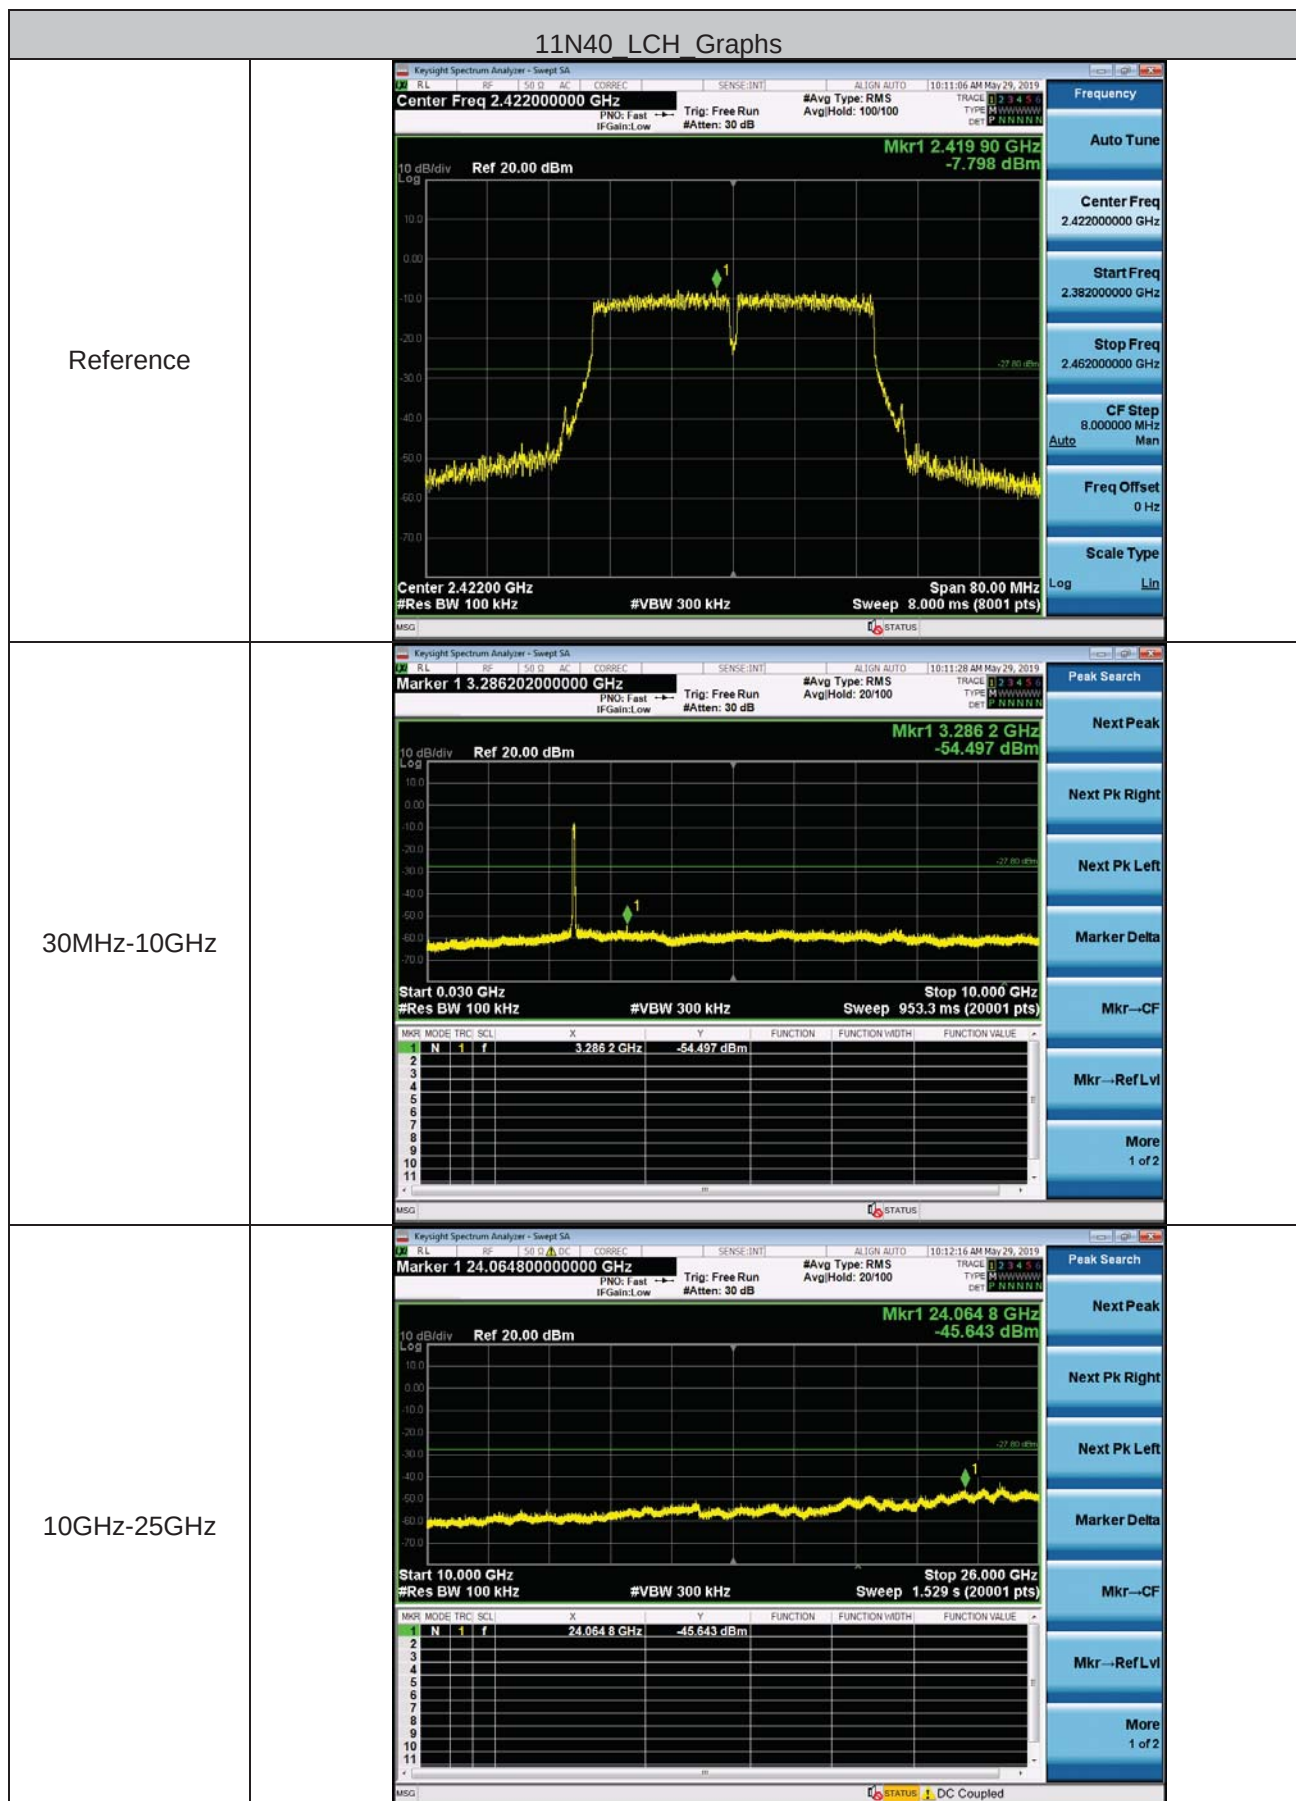




11N40\_MCH\_Graphs


Reference




30MHz-10GHz

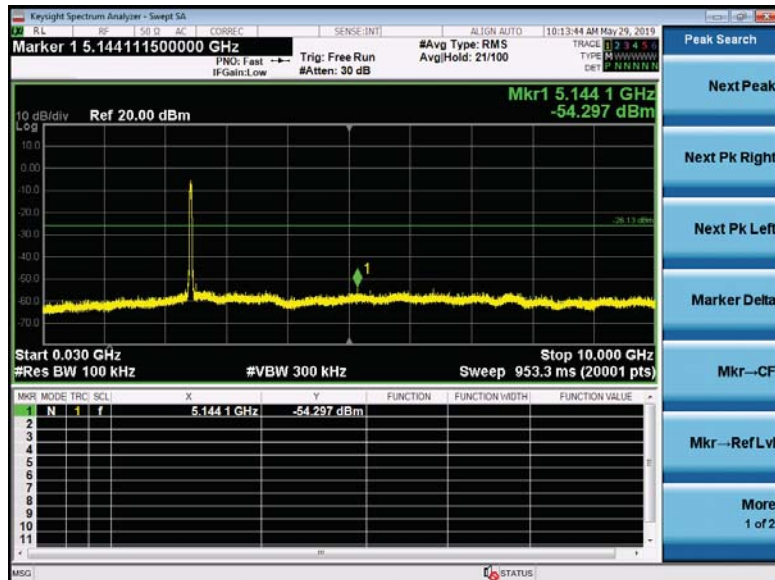

10GHz-25GHz

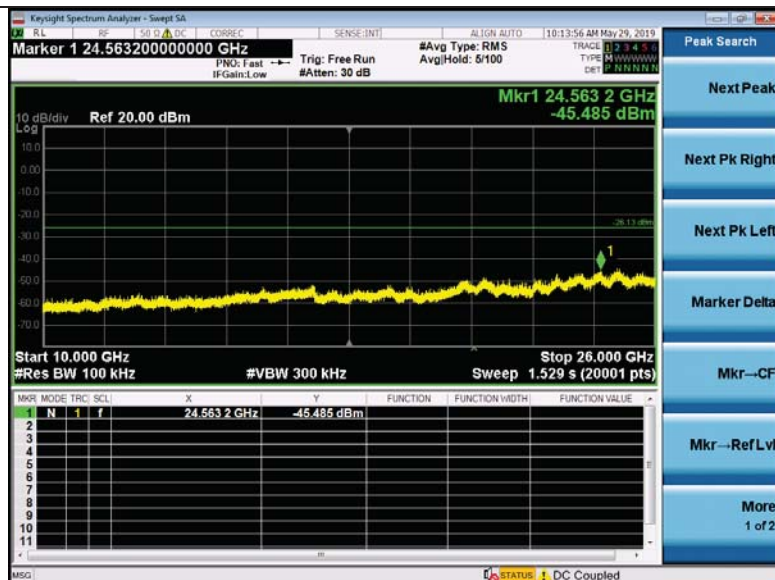

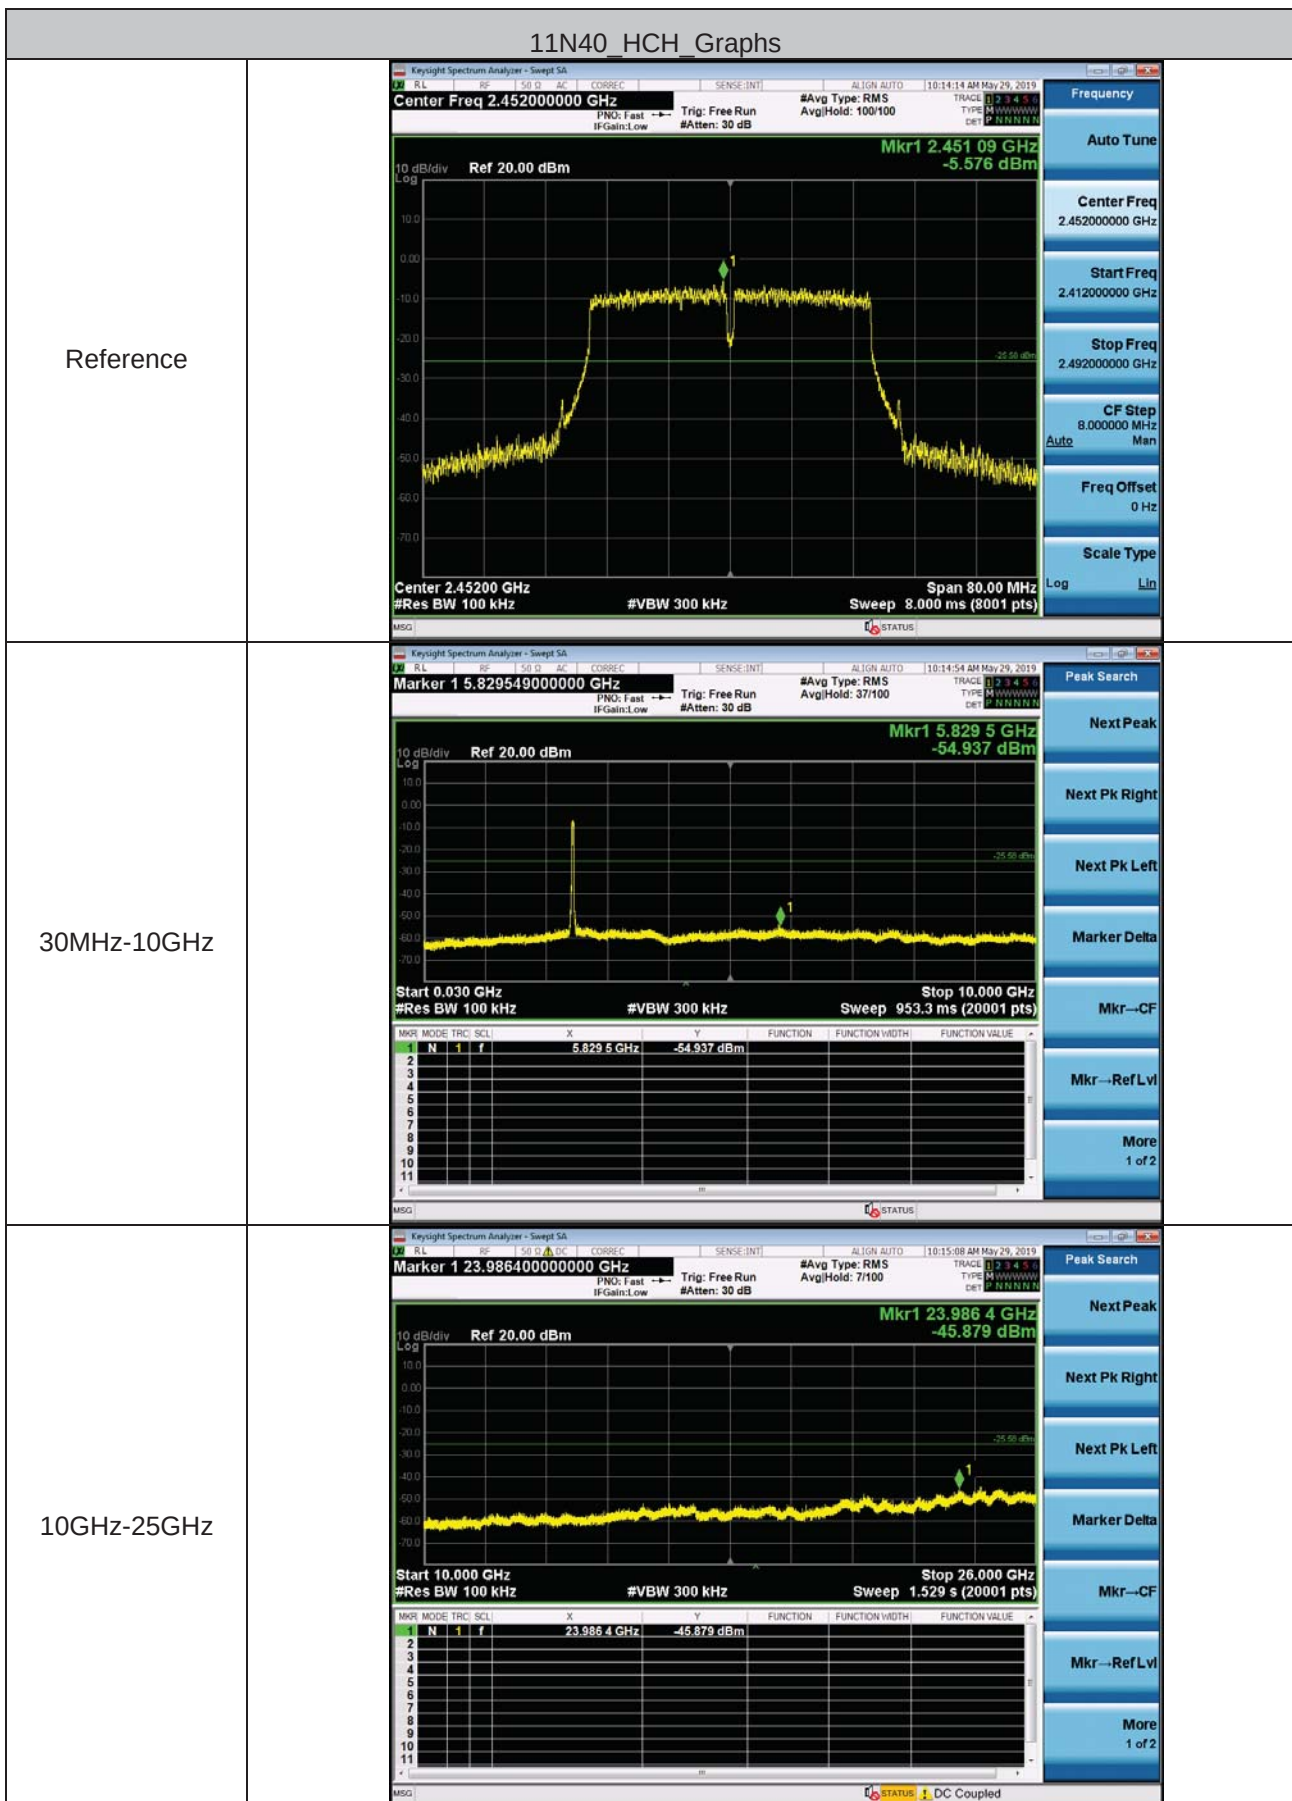



---

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

## 6.8 Radiated Spurious Emissions

|                   |                                                                                                                                                                                                                                                                             |                                  |                |            |                          |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|----------------|------------|--------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205                                                                                                                                                                                                                                   |                                  |                |            |                          |
| Test Method:      | ANSI C63.10 2013                                                                                                                                                                                                                                                            |                                  |                |            |                          |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber)                                                                                                                                                                                                                            |                                  |                |            |                          |
| Receiver Setup:   | Frequency                                                                                                                                                                                                                                                                   | Detector                         | RBW            | VBW        | Remark                   |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Peak                             | 10kHz          | 30kHz      | Peak                     |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Average                          | 10kHz          | 30kHz      | Average                  |
|                   | 0.090MHz-0.110MHz                                                                                                                                                                                                                                                           | Quasi-peak                       | 10kHz          | 30kHz      | Quasi-peak               |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Peak                             | 10kHz          | 30kHz      | Peak                     |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Average                          | 10kHz          | 30kHz      | Average                  |
|                   | 0.490MHz -30MHz                                                                                                                                                                                                                                                             | Quasi-peak                       | 10kHz          | 30kHz      | Quasi-peak               |
|                   | 30MHz-1GHz                                                                                                                                                                                                                                                                  | Quasi-peak                       | 100 kHz        | 300kHz     | Quasi-peak               |
|                   | Above 1GHz                                                                                                                                                                                                                                                                  | Peak                             | 1MHz           | 3MHz       | Peak                     |
|                   |                                                                                                                                                                                                                                                                             | Peak                             | 1MHz           | 10Hz       | Average                  |
| Limit:            | Frequency                                                                                                                                                                                                                                                                   | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark     | Measurement distance (m) |
|                   | 0.009MHz-0.490MHz                                                                                                                                                                                                                                                           | 2400/F(kHz)                      | -              | -          | 300                      |
|                   | 0.490MHz-1.705MHz                                                                                                                                                                                                                                                           | 24000/F(kHz)                     | -              | -          | 30                       |
|                   | 1.705MHz-30MHz                                                                                                                                                                                                                                                              | 30                               | -              | -          | 30                       |
|                   | 30MHz-88MHz                                                                                                                                                                                                                                                                 | 100                              | 40.0           | Quasi-peak | 3                        |
|                   | 88MHz-216MHz                                                                                                                                                                                                                                                                | 150                              | 43.5           | Quasi-peak | 3                        |
|                   | 216MHz-960MHz                                                                                                                                                                                                                                                               | 200                              | 46.0           | Quasi-peak | 3                        |
|                   | 960MHz-1GHz                                                                                                                                                                                                                                                                 | 500                              | 54.0           | Quasi-peak | 3                        |
|                   | Above 1GHz                                                                                                                                                                                                                                                                  | 500                              | 54.0           | Average    | 3                        |
|                   | Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                  |                |            |                          |

Test Setup:

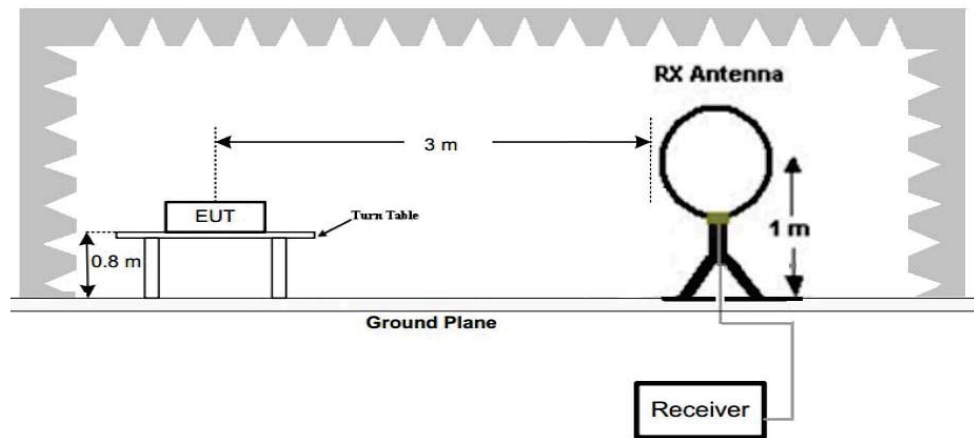


Figure 1. Below 30MHz

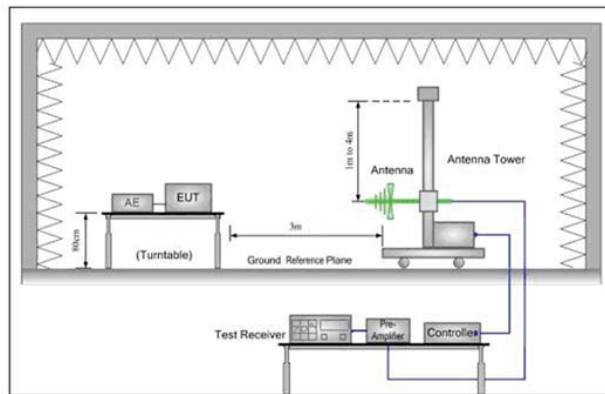


Figure 2. 30MHz to 1GHz

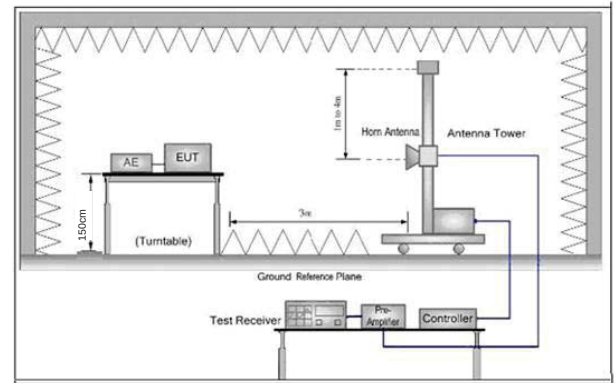


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | <p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Final Test Mode:       | <p>Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40)</p> <p>For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at highest channel is the worst case.</p> <p>Only the worst case is recorded in the report.</p>                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

### 6.8.1 Radiated emission below 1GHz

| 30MHz~1GHz |              |          |
|------------|--------------|----------|
| Test mode: | Transmitting | Vertical |

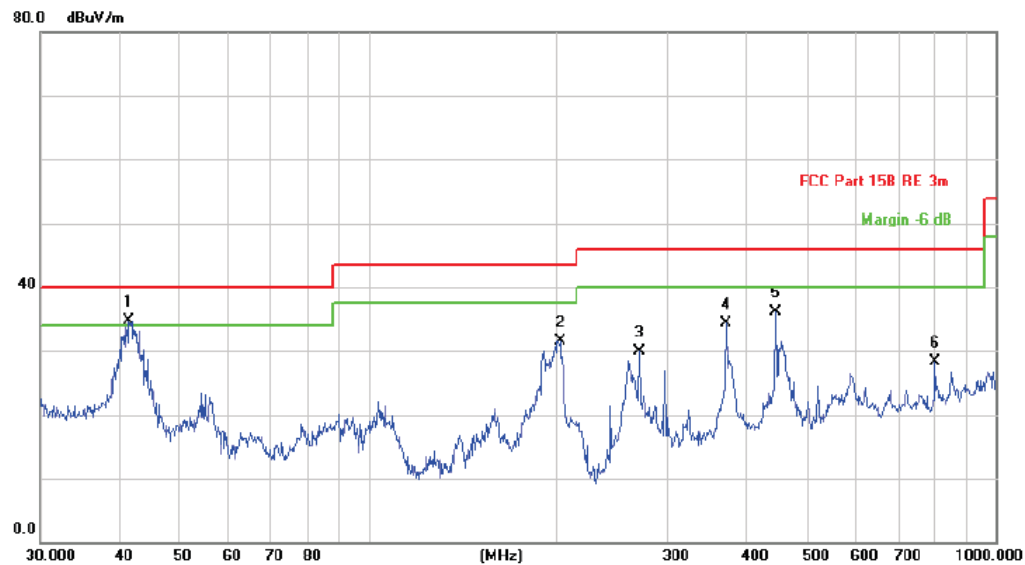

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 41.5670      | 46.95                    | -12.32                    | 34.63                      | 40.00           | -5.37      | QP       |
| 2   |     | 202.1005     | 44.67                    | -13.20                    | 31.47                      | 43.50           | -12.03     | QP       |
| 3   |     | 270.3748     | 41.44                    | -11.48                    | 29.96                      | 46.00           | -16.04     | QP       |
| 4   |     | 372.0045     | 44.02                    | -9.70                     | 34.32                      | 46.00           | -11.68     | QP       |
| 5   |     | 446.4141     | 43.22                    | -7.09                     | 36.13                      | 46.00           | -9.87      | QP       |
| 6   |     | 801.7863     | 29.19                    | -0.85                     | 28.34                      | 46.00           | -17.66     | QP       |

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.



|            |              |            |
|------------|--------------|------------|
| Test mode: | Transmitting | Horizontal |
|------------|--------------|------------|



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 56.1974      | 40.63                    | -18.33                    | 22.30                      | 40.00           | -17.70     | QP       |
| 2   |     | 108.6470     | 40.90                    | -13.95                    | 26.95                      | 43.50           | -16.55     | QP       |
| 3   |     | 201.3930     | 44.37                    | -13.41                    | 30.96                      | 43.50           | -12.54     | QP       |
| 4   | *   | 372.0045     | 50.48                    | -9.45                     | 41.03                      | 46.00           | -4.97      | QP       |
| 5   |     | 446.4141     | 42.71                    | -7.47                     | 35.24                      | 46.00           | -10.76     | QP       |
| 6   |     | 588.9051     | 39.04                    | -4.13                     | 34.91                      | 46.00           | -11.09     | QP       |

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

## 6.8.2 Transmitter emission above 1GHz

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Lowest        |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4824.000   | 60.33         | -4.26          | 56.07          | 74            | -17.93 | PK            | H         |
| 4824.000   | 46.67         | -4.26          | 42.41          | 54            | -11.59 | AV            | H         |
| 7236.000   | 58.99         | 1.18           | 60.17          | 74            | -13.83 | PK            | H         |
| 7236.000   | 42.17         | 1.18           | 43.35          | 54            | -10.65 | AV            | H         |
| 4824.000   | 62.55         | -4.26          | 58.29          | 74            | -15.71 | PK            | V         |
| 4824.000   | 47.70         | -4.26          | 43.44          | 54            | -10.56 | AV            | V         |
| 7236.000   | 60.49         | 1.18           | 61.67          | 74            | -12.33 | PK            | V         |
| 7236.000   | 42.10         | 1.18           | 43.28          | 54            | -10.72 | AV            | V         |

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Middle        |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4874.000   | 60.38         | -4.12          | 56.26          | 74            | -17.74 | PK            | H         |
| 4874.000   | 45.99         | -4.12          | 41.87          | 54            | -12.13 | AV            | H         |
| 7311.000   | 60.14         | 1.46           | 61.60          | 74            | -12.40 | PK            | H         |
| 7311.000   | 41.53         | 1.46           | 42.99          | 54            | -11.01 | AV            | H         |
| 4874.000   | 60.39         | -4.12          | 56.27          | 74            | -17.73 | PK            | V         |
| 4874.000   | 47.82         | -4.12          | 43.70          | 54            | -10.30 | AV            | V         |
| 7311.000   | 59.96         | 1.46           | 61.42          | 74            | -12.58 | PK            | V         |
| 7311.000   | 42.04         | 1.46           | 43.50          | 54            | -10.50 | AV            | V         |

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Highest       |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4924.000   | 59.48         | -4.03          | 55.45          | 74            | -18.55 | PK            | H         |
| 4924.000   | 46.95         | -4.03          | 42.92          | 54            | -11.08 | AV            | H         |
| 7386.000   | 60.50         | 1.66           | 62.16          | 74            | -11.84 | PK            | H         |
| 7386.000   | 42.95         | 1.66           | 44.61          | 54            | -9.39  | AV            | H         |
| 4924.000   | 63.59         | -4.03          | 59.56          | 74            | -14.44 | PK            | V         |
| 4924.000   | 46.13         | -4.03          | 42.10          | 54            | -11.90 | AV            | V         |
| 7386.000   | 60.25         | 1.66           | 61.91          | 74            | -12.09 | PK            | V         |
| 7386.000   | 42.64         | 1.66           | 44.30          | 54            | -9.70  | AV            | V         |

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## 6.9 Restricted bands around fundamental frequency

|                   |                                                  |                    |                  |
|-------------------|--------------------------------------------------|--------------------|------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205        |                    |                  |
| Test Method:      | ANSI C63.10 2013                                 |                    |                  |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber) |                    |                  |
| Limit:            | Frequency                                        | Limit (dBuV/m @3m) | Remark           |
|                   | 30MHz-88MHz                                      | 40.0               | Quasi-peak Value |
|                   | 88MHz-216MHz                                     | 43.5               | Quasi-peak Value |
|                   | 216MHz-960MHz                                    | 46.0               | Quasi-peak Value |
|                   | 960MHz-1GHz                                      | 54.0               | Quasi-peak Value |
|                   | Above 1GHz                                       | 54.0               | Average Value    |
|                   |                                                  | 74.0               | Peak Value       |
| Test Setup:       |                                                  |                    |                  |

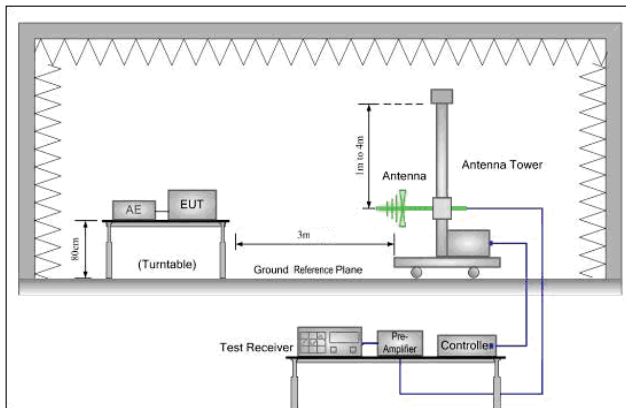


Figure 1. 30MHz to 1GHz

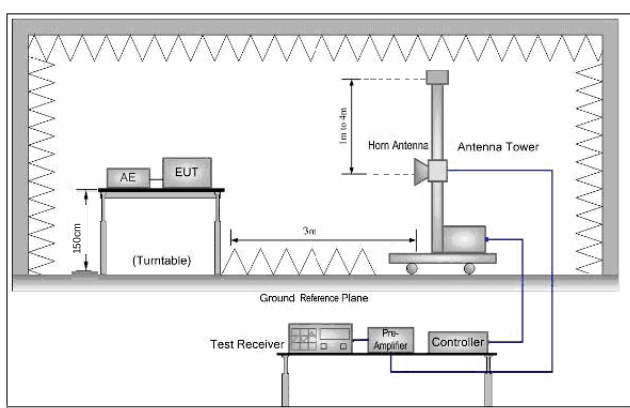


Figure 2. Above 1 GHz

### Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>g. Test the EUT in the lowest channel , the Highest channel</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | <p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Final Test Mode:       | <p>Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case</p> <p>Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40)</p> <p>Only the worst case is recorded in the report.</p>                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



**Test data:**

| Worse case mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 59.85         | -9.2           | 50.65          | 74            | -23.35 | PK            | H         |
| 2390.000         | 47.92         | -9.2           | 38.72          | 54            | -15.28 | AV            | H         |
| 2400.000         | 59.81         | -9.39          | 50.42          | 74            | -23.58 | PK            | H         |
| 2400.000         | 41.80         | -9.39          | 32.41          | 54            | -21.59 | AV            | H         |
| 2390.000         | 60.60         | -9.2           | 51.40          | 74            | -22.60 | PK            | V         |
| 2390.000         | 47.71         | -9.2           | 38.51          | 54            | -15.49 | AV            | V         |
| 2400.000         | 60.71         | -9.39          | 51.32          | 74            | -22.68 | PK            | V         |
| 2400.000         | 42.88         | -9.39          | 33.49          | 54            | 20.51  | AV            | V         |

| Worse case mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 59.36         | -9.29          | 50.07          | 74            | -23.93 | PK            | H         |
| 2483.500         | 47.16         | -9.29          | 37.87          | 54            | -16.13 | AV            | H         |
| 2483.500         | 59.79         | -9.29          | 50.50          | 74            | -23.50 | PK            | V         |
| 2483.500         | 41.94         | -9.29          | 32.65          | 54            | -21.35 | AV            | V         |

| Worse case mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 61.93         | -9.2           | 52.73          | 74            | -21.27 | PK            | H         |
| 2390.000         | 46.97         | -9.2           | 37.77          | 54            | -16.23 | AV            | H         |
| 2400.000         | 59.36         | -9.39          | 49.97          | 74            | -24.03 | PK            | H         |
| 2400.000         | 41.55         | -9.39          | 32.16          | 54            | -21.84 | AV            | H         |
| 2390.000         | 63.02         | -9.2           | 53.82          | 74            | -20.18 | PK            | V         |
| 2390.000         | 46.09         | -9.2           | 36.89          | 54            | -17.11 | AV            | V         |
| 2400.000         | 59.77         | -9.39          | 50.38          | 74            | -23.62 | PK            | V         |
| 2400.000         | 41.85         | -9.39          | 32.46          | 54            | -21.54 | AV            | V         |

| Worse case mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 62.22         | -9.29          | 52.93          | 74            | -21.07 | PK            | H         |
| 2483.500         | 47.38         | -9.29          | 38.09          | 54            | -15.91 | AV            | H         |
| 2483.500         | 59.90         | -9.29          | 50.61          | 74            | -23.39 | PK            | V         |
| 2483.500         | 42.89         | -9.29          | 33.60          | 54            | -20.40 | AV            | V         |

| Worse case mode: |               | 802.11n(HT20)(6.5Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                 | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                   | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 63.60         | -9.29                  | 54.31          | 74            | -19.69 | PK            | H         |
| 2390.000         | 47.37         | -9.29                  | 38.08          | 54            | -15.92 | AV            | H         |
| 2400.000         | 60.77         | -9.29                  | 51.48          | 74            | -22.52 | PK            | H         |
| 2400.000         | 41.18         | -9.29                  | 31.89          | 54            | 22.11  | AV            | H         |
| 2390.000         | 60.25         | -9.29                  | 50.96          | 74            | -23.04 | PK            | V         |
| 2390.000         | 47.32         | -9.29                  | 38.03          | 54            | -15.97 | AV            | V         |
| 2400.000         | 60.34         | -9.29                  | 51.05          | 74            | -22.95 | PK            | V         |
| 2400.000         | 41.61         | -9.29                  | 32.32          | 54            | 21.68  | AV            | V         |

| Worse case mode: |               | 802.11n(HT20)(6.5Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                 | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                   | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 59.31         | -9.29                  | 50.02          | 74            | -23.98 | PK            | H         |
| 2483.500         | 47.67         | -9.29                  | 38.38          | 54            | -15.62 | AV            | H         |
| 2483.500         | 60.55         | -9.29                  | 51.26          | 74            | -22.74 | PK            | V         |
| 2483.500         | 41.07         | -9.29                  | 31.78          | 54            | -22.22 | AV            | V         |

| Worse case mode: |               | 802.11n(HT40)(13.5Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|-------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                  | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                    | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 62.20         | -9.2                    | 53.00          | 74            | -21.00 | PK            | H         |
| 2390.000         | 47.01         | -9.2                    | 37.81          | 54            | -16.19 | AV            | H         |
| 2400.000         | 59.80         | -9.39                   | 50.41          | 74            | -23.59 | PK            | H         |
| 2400.000         | 42.01         | -9.39                   | 32.62          | 54            | -21.38 | AV            | H         |
| 2390.000         | 63.16         | -9.2                    | 53.96          | 74            | -20.04 | PK            | V         |
| 2390.000         | 47.83         | -9.2                    | 38.63          | 54            | -15.37 | AV            | V         |
| 2400.000         | 59.88         | -9.39                   | 50.49          | 74            | -23.51 | PK            | V         |
| 2400.000         | 42.81         | -9.39                   | 33.42          | 54            | -20.58 | AV            | V         |


| Worse case mode: |               | 802.11n(HT40)(13.5Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|-------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                  | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                    | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 60.49         | -9.2                    | 51.29          | 74            | -22.71 | PK            | H         |
| 2483.500         | 46.55         | -9.2                    | 37.35          | 54            | -16.65 | AV            | H         |
| 2483.500         | 60.15         | -9.29                   | 50.86          | 74            | -23.14 | PK            | V         |
| 2483.500         | 41.74         | -9.29                   | 32.45          | 54            | -21.55 | AV            | V         |

**Note:**


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

*Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor*

## 7 Photographs - EUT Test Setup

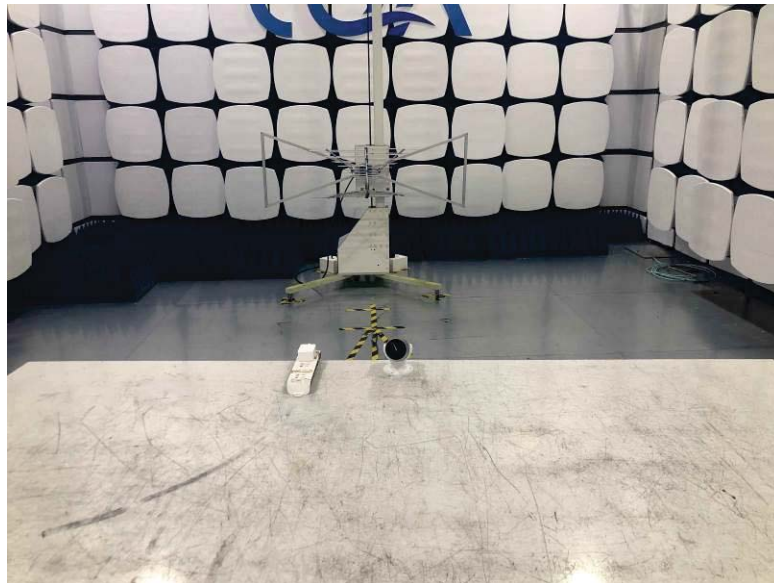




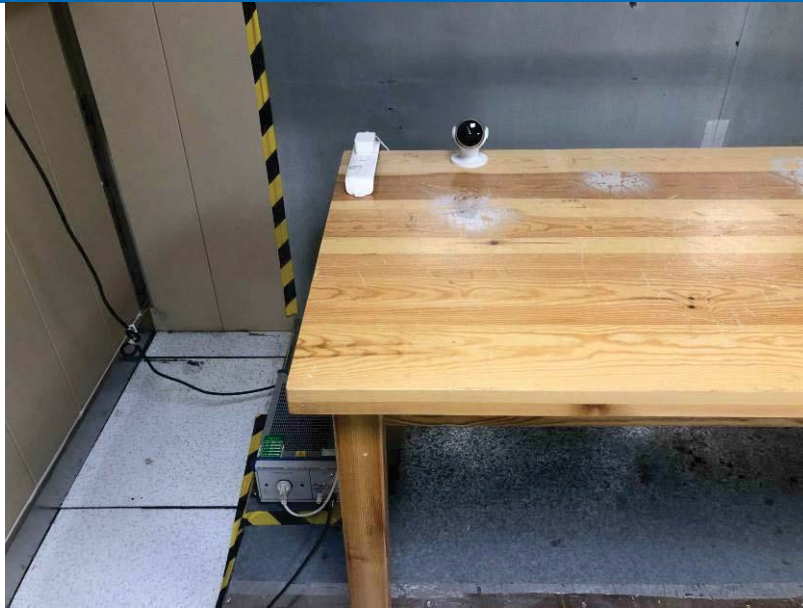

## 8 Photographs - EUT Constructional Details

External photos




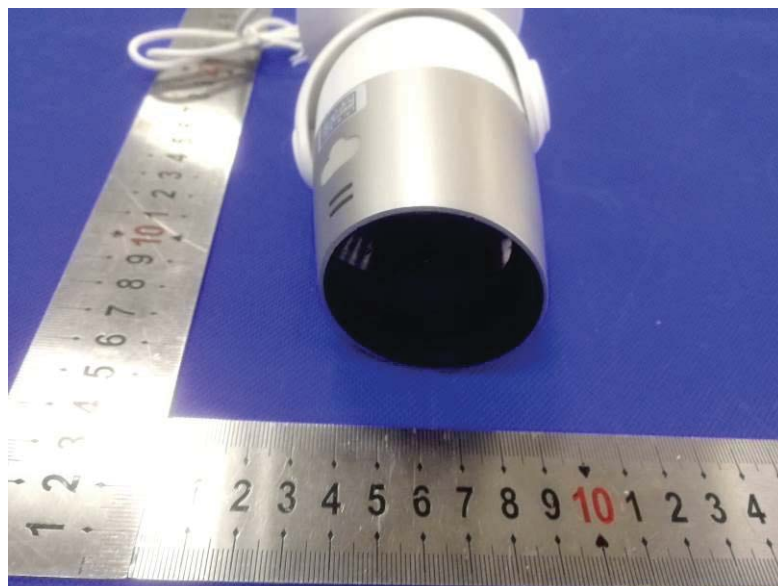








Internal photos

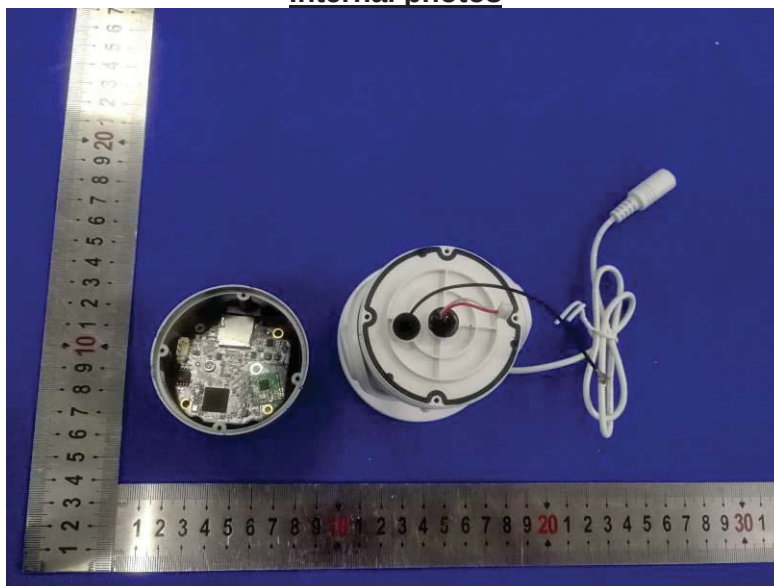



WIFI Antenna

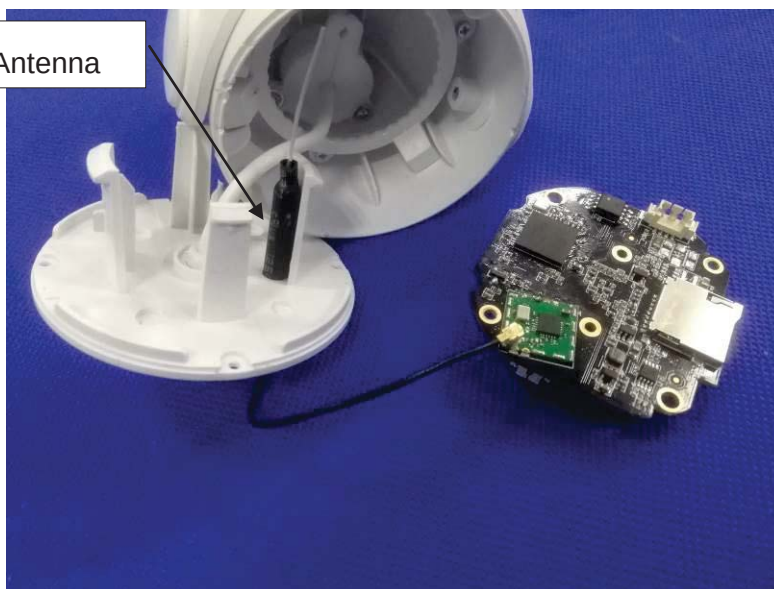



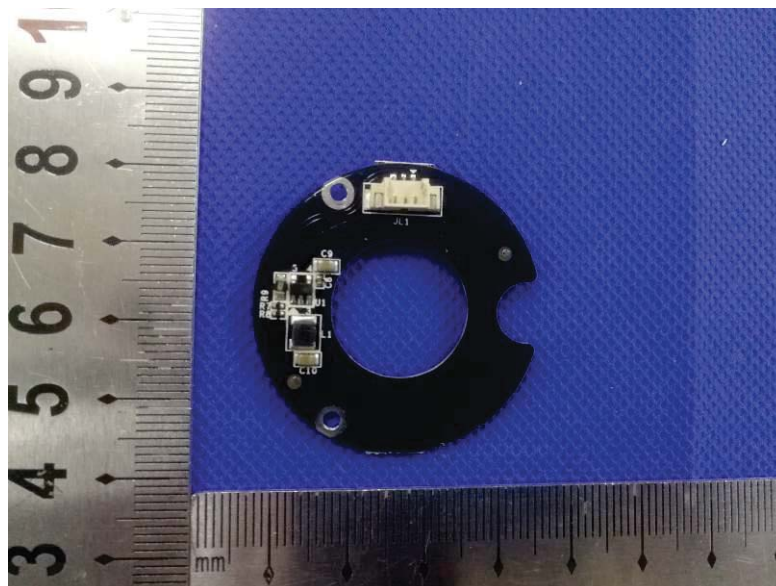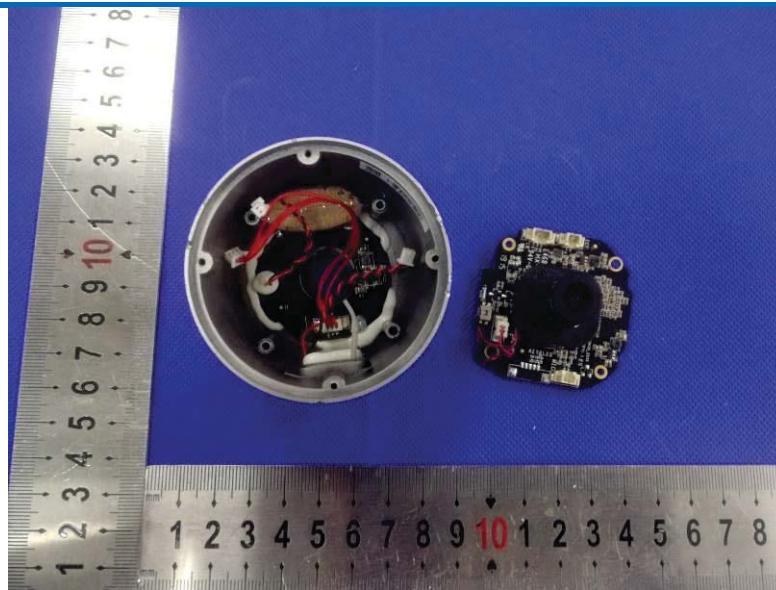

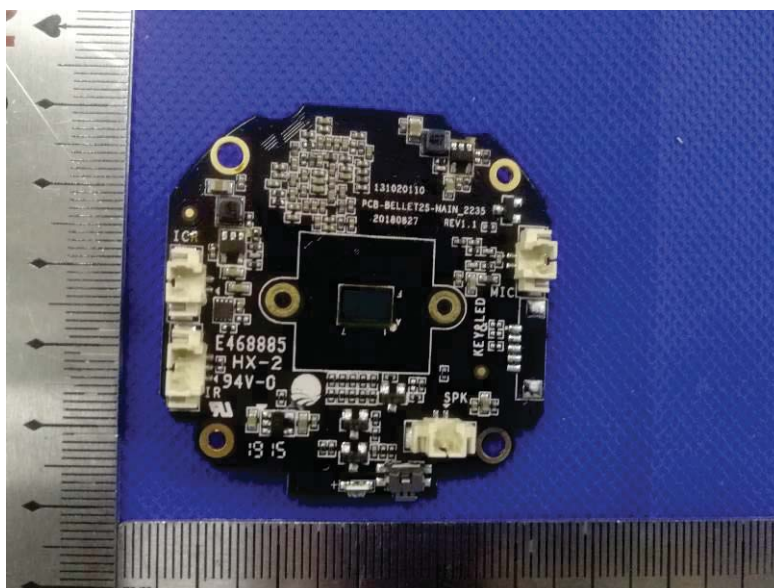

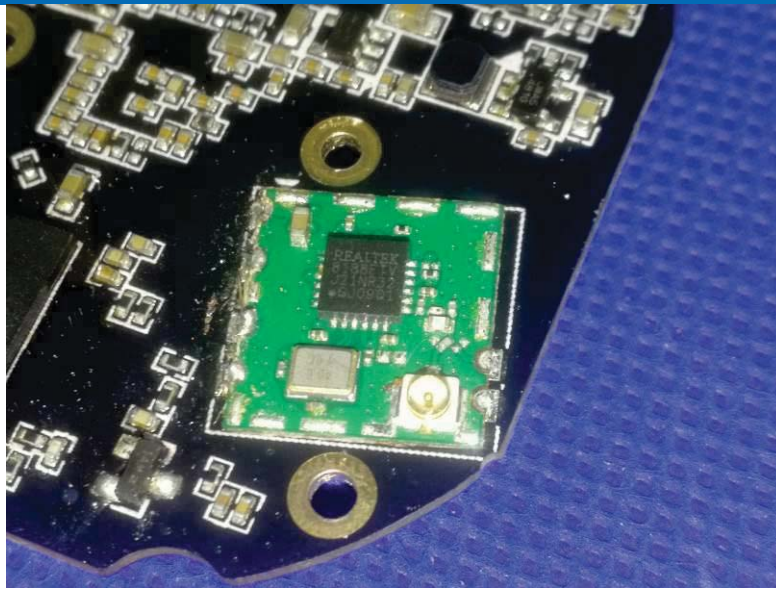

THE END