

Report No.: T180315N05-RP1 Page 1 of 41 Rev. 00 FCC ID: 2AG7TENVV00013

# FCC 47 CFR PART 15 SUBPART C ANSI C63.10: 2013 TEST REPORT

For

**Door Sensor** 

Model: HD2104

Brand: Techno

Envisacor Technologies Inc.

Issued to

Envisacor Technologies Incorporated 14845-6 Yonge Street Suite 310, Aurora, Canada, L4G 6H8

Issued by

# Compliance Certification Services Inc.

Tainan Lab.

No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

TEL: (06) 580-2201 FAX: (06) 580-2202

Issued Date: April 26, 2018



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercisig all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T180315N05-RP1 Page 2 of 41 Rev. 00 FCC ID: 2AG7TENVV00013

# **REVISION HISTORY**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 26, 2018	Initial Issue	ALL	Gina Lin



Report No.: T170421N02-RP1 Page 3 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# **TABLE OF CONTENTS**

1. TE	ST RESULT CERTIFICATION	4
2. EU	T DESCRIPTION	5
3. TE	ST METHODOLOGY	6
3.1	EUT CONFIGURATION	6
3.2	EUT EXERCISE	
3.3	GENERAL TEST PROCEDURES	6
3.4	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	
3.5	DESCRIPTION OF TEST MODES	7
4. INS	STRUMENT CALIBRATION	8
4.1	MEASURING INSTRUMENT CALIBRATION	8
4.2	MEASUREMENT EQUIPMENT USED	
4.3	MEASUREMENT UNCERTAINTY	9
5. FA	CILITIES AND ACCREDITATIONS	10
5.1	FACILITIES	10
5.2	EQUIPMENT	10
5.3	TABLE OF ACCREDITATIONS AND LISTINGS	10
5.4	TABLE OF ACCREDITATIONS AND LISTINGS	11
6. SE	TUP OF EQUIPMENT UNDER TEST	12
6.1	SETUP CONFIGURATION OF EUT	12
6.2	SUPPORT EQUIPMENT	12
7. FC	C PART 15.231 REQUIREMENTS	13
7.1	20 DB BANDWIDTH	13
7.2	LIMIT OF TRANSMISSION TIME	
7.3	DUTY CYCLE	21
7.4	CENTRAL FREQUNCY	
7.5	RADIATED EMISSIONS	
7.6	POWERLINE CONDUCTED EMISSIONS	37
8. AP	PENDIX 1 PHOTOGRAPHS OF TEST SETUP	38



Report No.: T170421N02-RP1 Page 4 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# 1. TEST RESULT CERTIFICATION

**Product:** Door Sensor

Model: HD2104

Brand Name: Envisacor

**Applicant: Envisacor Technologies Incorporated** 

14845-6 Yonge Street Suite 310, Aurora, Canada, L4G 6H8

**Tested:** April 18, 2018 ~ April 19, 2018

APPLICABLE STANDARDS				
STANDARD	TEST RESULT			
FCC 47 CFR Part 15 Subpart C ANSI C63.10: 2013	No non-compliance noted			

# We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and Part 15.231.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

leter Wii

**Assistant Manager** 

Reviewed by:

**Eric Huang** 

**Section Manager** 



Report No.: T170421N02-RP1 Page 5 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## 2. EUT DESCRIPTION

Product	Door Sensor
Model Number	HD2104
Brand Name	Envisacor Technologies Inc.
Received Date	March 15, 2018
Operation Frequency	433.92MHZ ± 75kHz
Transmit Peak Power	73.90 dBµV/m
Number of Channels	1 Channel
Type of Modulation	ASK
Power Supply	3Vdc (Powered from battery)
Antenna Type	Type: PCB Antenna Model: HD2104 Manufacturer: N/A Gain: -7.9dBi
RF Module Model	PT4455
Hardware Version	Rev.0
Software Version	Rev.0
Temperature Range	-15°C ~ +60°C

- 1. Client consigns only one model sample to test (Model Number: **HD2104**). Therefore, the testing Lab. just guarantees the unit, which has been tested.
- 2. This submittal(s) (test report) is intended for FCC ID: <u>2AG7TENVV00013</u> filing to comply with Section 15.207, 15.209 and 15.231 of the FCC Part 15, Subpart C Rules.



Report No.: T170421N02-RP1 Page 6 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 (2013) and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.231

## 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

### 3.3 GENERAL TEST PROCEDURES

## **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### **Radiated Emissions**

The EUT is placed on a turn table, which is 1.5m high is for radiated emission above 1GHz and 0.8m for below 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10.

Report No.: T170421N02-RP1 Page 7 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 □ 0.110 ¹0.495 □ 0.505 2.1735 □ 2.1905 4.125 - 4.128 4.17725 - 4.17775 4.20725 - 4.20775 6.215 - 6.218 6.26775 - 6.26825 6.31175 - 6.31225 8.291 - 8.294 8.362 □ 8.366	16.42 - 16.423 16.69475 - 16.69525 16.80425 - 16.80475 25.5 - 25.67 37.5 - 38.25 73 - 74.6 74.8 - 75.2 108 - 121.94 123 - 138 149.9 - 150.05 156.52475 -	399.9 - 410 608 - 614 960 - 1240 1300 - 1427 1435 - 1626.5 1645.5 - 1646.5 1660 - 1710 1718.8 - 1722.2 2200 - 2300 2310 - 2390- 2483.5 - 2500	4.5 - 5.15 5.35 - 5.46 7.25 - 7.75 8.025 - 8.5 9.0 - 9.2 9.3 - 9.5 10.6 - 12.7 13.25 - 13.4 14.47 - 14.5 15.35 - 16.2 17.7 - 21.4
8.37625 - 8.38675 8.41425 - 8.41475 12.29 - 12.293 12.51975 - 12.52025 12.57675 - 12.57725 13.36 □ 13.41	156.52525 156.7 - 156.9 162.0125 - 167.17 167.72 - 173.2 240 - 285 322 - 335.4	2655 - 2900 3260 - 3267 3332 - 3339 3345.8 - 3358 3600 - 4400	22.01 - 23.12 23.6 - 24.0 31.2 - 31.8 36.43 - 36.5 ( <sup>2</sup> )

<sup>&</sup>lt;sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi□peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

#### 3.5 DESCRIPTION OF TEST MODES

The EUT (Model: **HD2104**) had been tested under engineering test mode condition and the EUT staying in continuous transmitting mode.

#### Note:

1) The field strength of spurious emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis). The worst emission was found in stand-up position (Y axis) and the worst case was recorded.

<sup>&</sup>lt;sup>2</sup> Above 38.6

Report No.: T170421N02-RP1 Page 8 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# 4. INSTRUMENT CALIBRATION

## 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

## 4.2 MEASUREMENT EQUIPMENT USED

## **Equipment Used for Emissions Measurement**

Chamber Room #966						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	07/19/2019		
Amplifier	HP	8447F	2443A01671	01/21/2019		
Bi-Log Antenna	Sunol	JB1	A070506-2	02/08/2019		
Cable	Rosnol+Suhner	SUCOFLEX 104PEA	SN25737 /4PEA	01/26/2019		
Double Ridged Guide Horn Antenna	ETS-LINDGREN	3116	00078900	03/19/2019		
EMI Test Receiver	R&S	ESCI	100782	06/11/2018		
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	05/08/2018		
Horn Antenna	Com-Power	AH-118	071032	02/08/2019		
Pre-Amplifier	EMCI	EMC012645	980098	01/21/2019		
Software	Excel					

**Remark:** Each piece of equipment is scheduled for calibration once a year.



Report No.: T170421N02-RP1 Page 9 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# 4.3 MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Radiated Emission, 150kHz to 30 MHz Test Site : Chamber 966	±5.2dB
Radiated Emission, 30 to 200 MHz Test Site : Chamber 966	±3.21dB
Radiated Emission, 200 to 1000 MHz Test Site : Chamber 966	±3.09dB
Radiated Emission, 1 to 8 GHz	± 2.65dB
Radiated Emission, 8 to 18 GHz	± 2.66dB
Radiated Emission, 18 to 26.5 GHz	± 2.65dB
Radiated Emission, 26 to 40 GHz	± 3.03dB
Power Line Conducted Emission	±1.91dB
Band Width	136.49kHz
Peak Output Power MU	±1.34dB
Band Edge MU	±0.30dBuV
Channel Separation MU	361.69Hz
Duty Cycle MU	0.064ms
Frequency Stability MU	0.223kHz

Uncertainty figures are valid to a confidence level of 95%, k=2



Report No.: T170421N02-RP1 Page 10 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## 5. FACILITIES AND ACCREDITATIONS

#### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7:1992, ANSI C63.10: 2013 and CISPR Publication 22.

#### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

#### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW1109).



Report No.: T180315N05-RP1 Page 11 of 41 Rev. 00 FCC ID: 2AG7TENVV00013

## 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

**Taiwan** TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada Industry Canada

**Germany** TUV NORD

Taiwan BSMI

**USA** FCC

Copies of granted accreditation certificates are available for downloading from our web site, http://www.ccsrf.com



Report No.: T170421N02-RP1 Page 12 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## 6. SETUP OF EQUIPMENT UNDER TEST

#### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

#### 6.2 SUPPORT EQUIPMENT

## [RF]

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	N/A				

No.	Signal cable description	n
Α	N/A	

## [EMC]

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	N/A				

No.	Signal cable description		
Α	N/A		

#### Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. shd. = shielded; unshd. = unshielded

#### 6.3 EUT OPERATING CONDITION

#### **RF Setup**

- 1. Set up a whole system as the setup diagram.
- 2. Turn on power.

Report No.: T170421N02-RP1 Page 13 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# 7. FCC PART 15.231 REQUIREMENTS

## 7.1 20 DB BANDWIDTH

## LIMIT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

# MEASUREMENT EQUIPMENT USED


Chamber Room #966						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	07/19/2019		
Amplifier	HP	8447F	2443A01671	01/21/2019		
Bi-Log Antenna	Sunol	JB1	A070506-2	02/08/2019		
Cable	Rosnol+Suhner	SUCOFLEX 104PEA	SN25737 /4PEA	01/26/2019		
Double Ridged Guide Horn Antenna	ETS-LINDGREN	3116	00078900	03/19/2019		
EMI Test Receiver	R&S	ESCI	100782	06/11/2018		
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	05/08/2018		
Horn Antenna	Com-Power	AH-118	071032	02/08/2019		
Pre-Amplifier	EMCI	EMC012645	980098	01/21/2019		
Software	Excel					

**Remark:** Each piece of equipment is scheduled for calibration once a year.



Report No.: T170421N02-RP1 Page 14 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# **TEST CONFIGURATION**

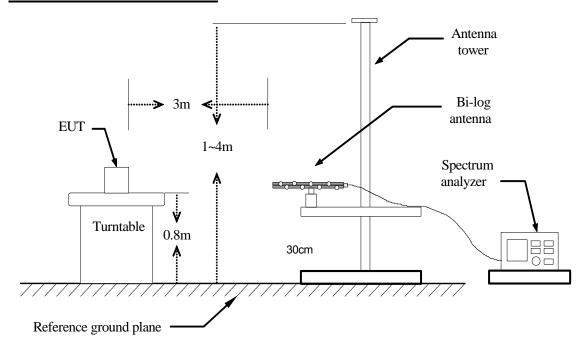

# **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 1.5m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5. Set the spectrum analyzer in the following setting as: RBW is set to 1 kHz and VBW is set 3kHz.



Report No.: T170421N02-RP1 Page 15 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# **TEST RESULTS**

No non-compliance noted.


## **TEST DATA**

Frequency	20dB Bandwidth	Limit	Result	
(MHz)	(KHz)	(KHz)		
433.92	2.38	1084.8	PASS	



Report No.: T170421N02-RP1 Page 16 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# **Test Plot**

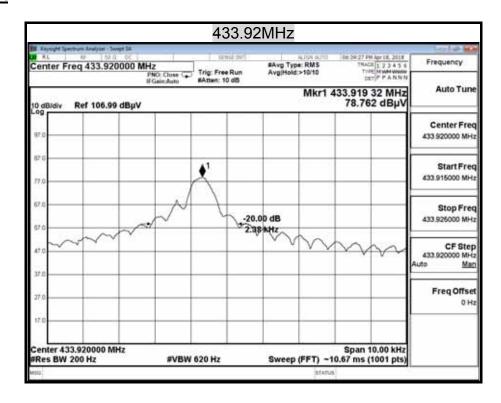



Report No.: T180315N05-RP1 Page 17 of 41 Rev. 00 FCC ID: 2AG7TENVV00013

## 7.2 LIMIT OF TRANSMISSION TIME

# **LIMIT**

According to 15.231, a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

# **MEASUREMENT EQUIPMENT USED**


Chamber Room #966								
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due				
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	07/19/2019				
Amplifier	HP	8447F	2443A01671	01/21/2019				
Bi-Log Antenna	Sunol	JB1	A070506-2	02/08/2019				
Cable	Rosnol+Suhner	SUCOFLEX 104PEA	SN25737 /4PEA	01/26/2019				
Double Ridged Guide Horn Antenna	ETS-LINDGREN	3116	00078900	03/19/2019				
EMI Test Receiver	R&S	ESCI	100782	06/11/2018				
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	05/08/2018				
Horn Antenna	Com-Power	AH-118	071032	02/08/2019				
Pre-Amplifier	EMCI	EMC012645	980098	01/21/2019				
Software	Excel							

Remark: Each piece of equipment is scheduled for calibration once a year.



Report No.: T170421N02-RP1 Page 18 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# **TEST CONFIGURATION**

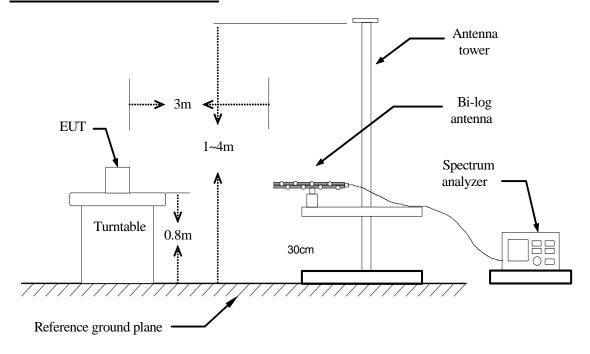

# **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Set center frequency of spectrum analyzer = operating frequency.
- 3. Set the spectrum analyzer as RBW=100KHz, VBW=300KHz, Span = 0Hz, a suitable Sweep Time.
- 4. Repeat above procedures until all frequency measured were complete.

# **TEST RESULTS**

No non-compliance noted.



Report No.: T170421N02-RP1 Page 19 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433


# **TEST DATA**

Frequency (MHz)	Transmission Time (s)	Limit (Second)	Result
433.92	0.192	5	PASS



Report No.: T170421N02-RP1 Page 20 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## **Test Plot**

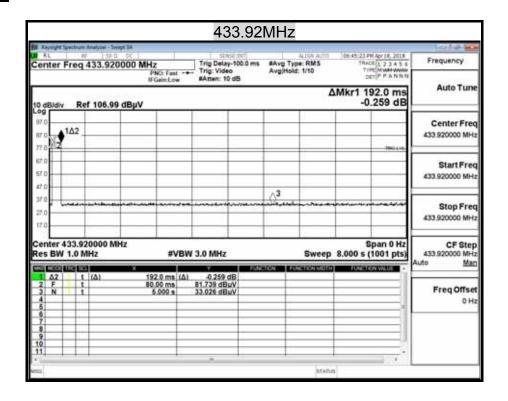




Report No.: T170421N02-RP1 Page 21 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

#### 7.3 DUTY CYCLE

## **LIMIT**

Nil (No dedicated limit specified in the Rules)

## **TEST CONFIGURATION**

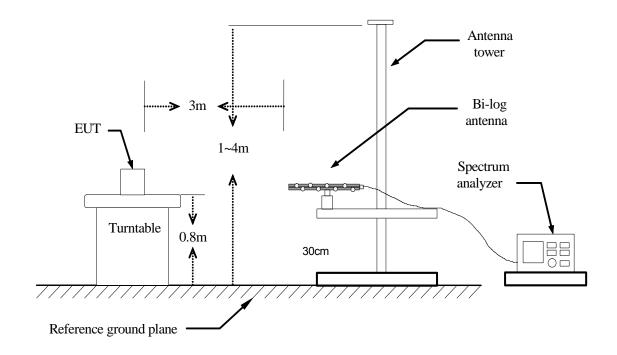

# **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Set center frequency of spectrum analyzer = operating frequency.
- 3. Set the spectrum analyzer as RBW=100KHz, VBW=300KHz, Span = 0Hz, a suitable Sweep Time.
- 4. Repeat above procedures until all frequency measured were complete.

# **TEST RESULTS**

No non-compliance noted.



Report No.: T170421N02-RP1 Page 22 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# **TEST DATA**

	us	Times	Ton	Total Ton time(ms)
Ton1	135.000	33	4455.000	11.259
Ton2	243.000	28	6804.000	
Ton3		0	0.000	
Тр				29.000

Ton	11.259
Tp(Ton+Toff)	29.000
Duty Cycle	0.388
Duty Factor	-8.218

38.82413793


%




Report No.: T170421N02-RP1 Page 23 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## **Test Plot**

#### Ton1

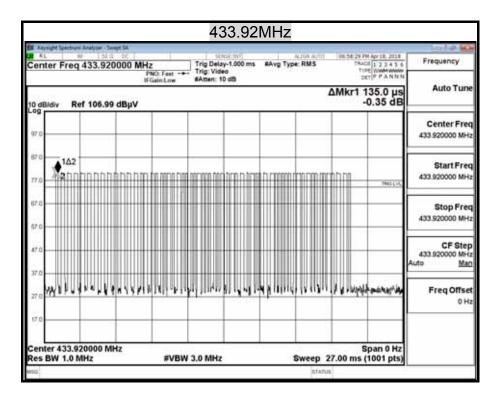


#### Ton2

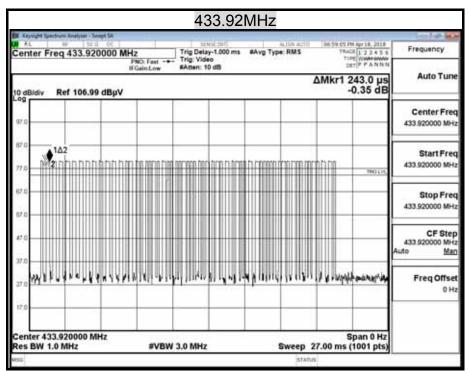



Report No.: T170421N02-RP1 Page 24 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

<u>Tp</u>

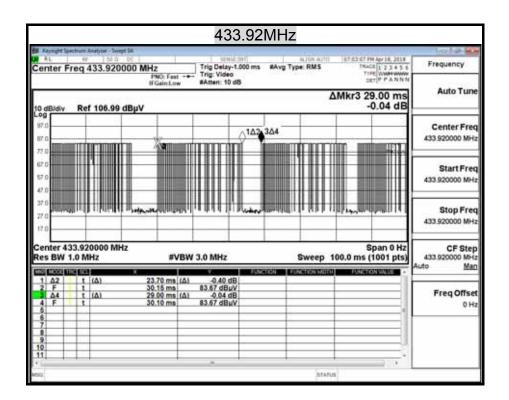




Report No.: T170421N02-RP1 Page 25 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## 7.4 CENTRAL FREQUNCY

## **TEST CONFIGURATION**

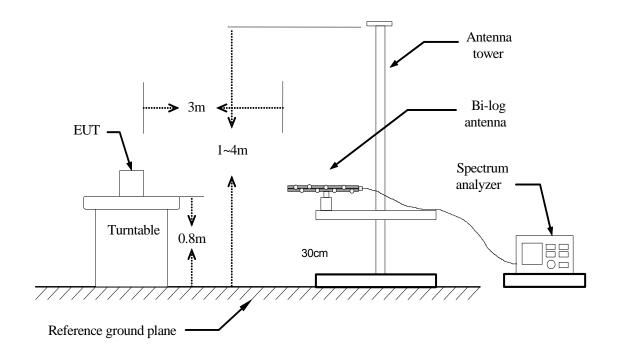

# **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Set center frequency of spectrum analyzer = operating frequency.
- 3. Set the spectrum analyzer as RBW=1KHz, VBW=3KHz, Span = 100KHz, a suitable Sweep Time.
- 4. Repeat above procedures until all frequency measured were complete.

# **TEST RESULTS**

No non-compliance noted.



Report No.: T170421N02-RP1 Page 26 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# **TEST DATA**

Frequency	Central frequncy	Frequncy Error
(MHz)	(MHz)	(MHz)
433.92	433.91932	0.00068



Report No.: T170421N02-RP1 Page 27 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

#### 7.5 RADIATED EMISSIONS

#### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Field Strength (dBµV/m at 3-meter)	Measurement Distance (m)	
30-88	100*	40	3	
88-216	150*	43.5	3	
216-960	200*	46	3	
Above 960	500	54	3	

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 □ 72 MHz, 76 □ 88 MHz, 174 □ 216 MHz or 470 □ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. For intentional device, according to § 15.231, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following table.

Fundamental Frequency (MHz)	Field Strength of Fundamental (μV/M)	Field Strength of Spurious Emission (μV/M)		
40.66-40.70	2250	225		
70-130	1250	125		
130-174	1250 to 3750**	125 to 375**		
174-260	3750	375		
260-470	3750 to 12500**	375 to 1250**		
Above 470	12500	1250		

#### Note:

- 1. " linear interpolations.
- 2. Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(F) 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(F) 7083.3333. The maximum permitted unwantedemission level is 20 dB below the maximum permitted fundamental level.



Report No.: T170421N02-RP1 Page 28 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# **MEASUREMENT EQUIPMENT USED**

### Chamber 966

Chamber Room #966								
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due				
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	07/19/2019				
Amplifier	HP	8447F	2443A01671	01/21/2019				
Bi-Log Antenna	Sunol	JB1	A070506-2	02/08/2019				
Cable	Rosnol+Suhner	SUCOFLEX 104PEA	SN25737 /4PEA	01/26/2019				
Double Ridged Guide Horn Antenna	ETS-LINDGREN	3116	00078900	03/19/2019				
EMI Test Receiver	R&S	ESCI	100782	06/11/2018				
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	05/08/2018				
Horn Antenna	Com-Power	AH-118	071032	02/08/2019				
Pre-Amplifier	EMCI	EMC012645	980098	01/21/2019				
Software	Excel							


Remark: Each piece of equipment is scheduled for calibration once a year.




Report No.: T170421N02-RP1 Page 29 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# **Test Configuration**

# 9kHz ~ 30MHz

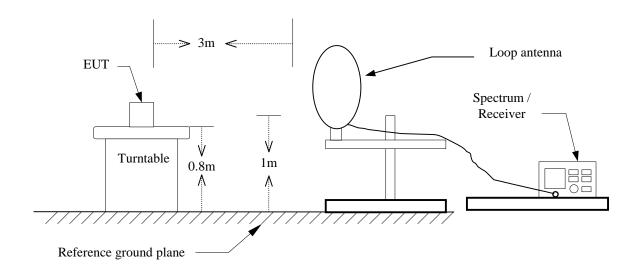


## Below 1 GHz

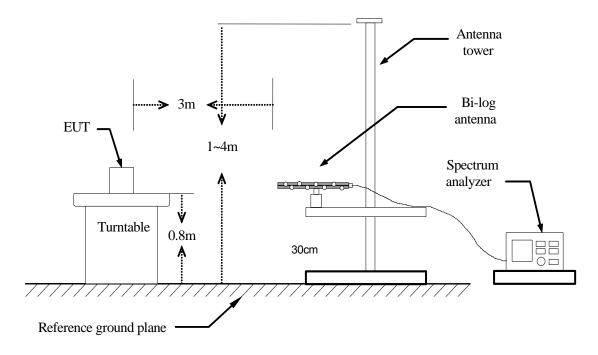



Report No.: T170421N02-RP1 Page 30 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

#### Above 1 GHz

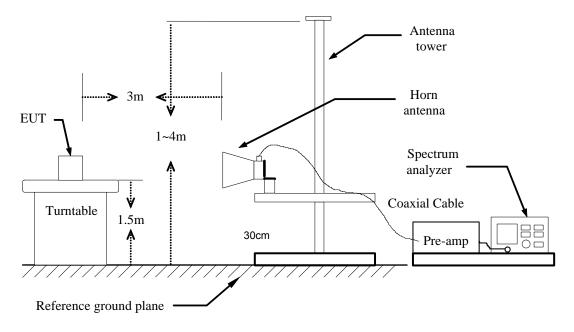

## **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 0.8m/1.5m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as: Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: Peak Level + Duty Factor
- 7. Repeat above procedures until the measurements for all frequencies are complete.
- 8. No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
- 9. Average level=Peak level + Duty factor
- 10. In order to comply the KDB 41477 requirement, although the test data is done in chamber, there has made the comparison with open site test area, and confirming the data is valid.



Report No.: T170421N02-RP1 Page 31 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## **TEST RESULTS**


#### **Below 1GHz**

Operation Mode: Normal Operation Test Date: 2018/04/19

**Temperature:** 27.4°C **Tested by:** Ted Huang

**Humidity:** 44% RH **Polarity:** Ver. / Hor.

#### Vertical

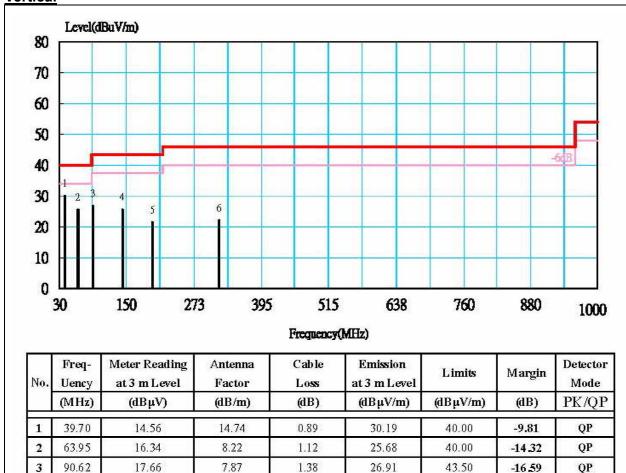

#### Remark:

4

143.97

197.33

318.58

10.68

6.43

4.62

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

25.78

21.62

22.22

43.50

43.50

46.00

-17.72

-21.88

-23.78

OP

QP

QP

1.82

2.23

3.21

- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).

13.28

12.95

14.39

- 6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
- 7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 1000 MHz scan.




Report No.: T170421N02-RP1 Page 32 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

Operation Mode: Normal Operation Test Date: 2018/04/19

**Temperature:** 27.4°C **Tested by:** Ted Huang

**Humidity:** 44% RH **Polarity:** Ver. / Hor.

### **Horizontal**

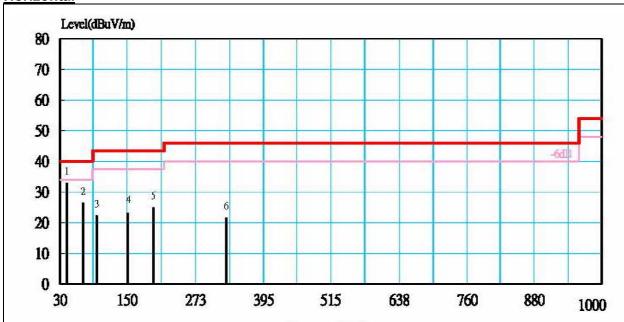

#### Frequency(MHz)

No.	Freq- Uency	Meter Reading at 3 m Level	Antenna Factor	Cable Loss	Emission at 3 m Level	Limits	Margin	Detector Mode
	(MHz)	(dBµV)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	PK/QP
1	42.12	18.65	13.25	0.91	32.81	40.00	-7.19	QP
2	71.22	16.52	8.64	1.16	26.32	40.00	-13.68	QP
3	95.47	11.64	9.18	1.42	22.24	43.50	-21.26	QP
4	151.25	8.42	12.78	1.88	23.08	43.50	-20.43	QP
5	197.33	9.68	12.95	2.23	24.87	43.50	-18.63	QP
6	328.28	3.65	14.59	3.29	21.54	46.00	-24.46	QP

- 1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).
- 6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
- 7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 1000 MHz scan.



Report No.: T170421N02-RP1 Page 33 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

# The fundamental signal

Operation Mode: TX Test Date: 2018/04/18

**Temperature:** 27.4 **Tested by:** Ted Huang

**Humidity:** 43% RH **Polarity:** Ver. / Hor.

#### Horizontal

Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
433.92	72.28	16.74	4.07	26.35	0.00	66.74	100.83	-34.08	Р
433.92	64.06	16.74	4.07	26.35	0.00	58.52	80.83	-22.30	Α

#### Vertical

Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
433.92	79.44	16.74	4.07	26.35	0.00	73.90	100.83	-26.92	Р
433.92	71.22	16.74	4.07	26.35	0.00	65.69	80.83	-15.14	Α

- 1. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).
- 2. Average level=Peak level + Duty factor



Report No.: T170421N02-RP1 Page 34 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

#### The Harmonic

**Operation Mode:** TX **Test Date:** 2018/04/18

**Temperature:** 27.4 **Tested by:** Ted Huang

**Humidity:** 43% RH **Polarity:** Ver. / Hor.

### Horizontal

Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
867.82	55.63	21.86	6.52	25.51	0.00	58.50	80.83	-22.32	Р
867.82	47.41	21.86	6.52	25.51	0.00	50.29	60.83	-10.54	Α

#### Vertical

Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
867.82	59.32	21.86	6.52	25.51	0.00	62.19	80.83	-18.63	Р
867.82	51.10	21.86	6.52	25.51	0.00	53.98	60.83	-6.85	Α

- 1. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).
- 2. Average level=Peak level + Duty factor



Report No.: T170421N02-RP1
Page 35 of 41 Rev. 00
FCC ID: 2AHZG-WTR2M433

## **Above 1 GHz**

Operation Mode: TX Test Date: 2018/04/18

**Temperature:** 27.4 **Tested by**: Ted Huang

**Humidity:** 43% RH **Polarity:** Ver. / Hor.

#### Horizontal

	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
*	1300.13	71.83	25.80	2.14	45.18	1.13	55.71	74.00	-18.29	Р
*	1300.13	63.61	25.80	2.14	45.18	1.13	47.49	54.00	-6.51	Α
	1735.34	66.21	28.39	2.49	44.87	0.63	52.84	80.83	-27.98	Р
	1735.34	57.99	28.39	2.49	44.87	0.63	44.63	60.83	-16.20	Α
	2170.05	56.88	30.26	2.78	44.64	0.41	45.69	80.83	-35.14	Р
	2170.05	48.66	30.26	2.78	44.64	0.41	37.47	60.83	-23.36	Α
	2603.70	57.62	30.06	3.03	44.45	0.38	46.64	80.83	-34.18	Р
	2603.70	49.41	30.06	3.03	44.45	0.38	38.42	60.83	-22.40	Α
	3037.46	55.23	30.31	3.36	44.28	0.28	44.89	80.83	-35.93	Р
	3037.46	47.01	30.31	3.36	44.28	0.28	36.67	60.83	-24.15	Α
	3471.30	56.01	30.39	3.76	44.23	0.23	46.17	80.83	-34.66	Р
	3471.30	47.79	30.39	3.76	44.23	0.23	37.95	60.83	-22.88	Α
*	3905.22	56.49	31.21	3.94	44.18	0.32	47.78	74.00	-26.22	Р
*	3905.22	48.28	31.21	3.94	44.18	0.32	39.57	54.00	-14.43	Α
*	4338.75	56.79	32.28	4.13	44.21	0.31	49.30	74.00	-24.70	Р
*	4338.75	48.57	32.28	4.13	44.21	0.31	41.08	54.00	-12.92	Α

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m). Peak detector mode and average detector mode of the emission shown in Result column.
- 7. Average level=Peak level + Duty factor



Report No.: T170421N02-RP1
Page 36 of 41 Rev. 00
FCC ID: 2AHZG-WTR2M433

Operation Mode: TX Test Date: 2018/04/18

**Temperature:** 27.4 **Tested by:** Ted Huang

**Humidity:** 43% RH **Polarity:** Ver. / Hor.

#### Vertical

	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
ŧ	1305.02	68.01	25.82	2.14	45.18	1.12	51.91	74.00	-22.09	Р
ŧ.	1305.02	59.79	25.82	2.14	45.18	1.12	43.69	54.00	-10.31	Α
	1734.61	61.31	28.38	2.49	44.87	0.63	47.94	80.83	-32.89	Р
	1734.61	53.09	28.38	2.49	44.87	0.63	39.72	60.83	-21.11	Α
	2169.84	56.71	30.26	2.78	44.64	0.41	45.52	80.83	-35.31	Р
	2169.84	48.49	30.26	2.78	44.64	0.41	37.30	60.83	-23.53	Α
	2603.21	56.89	30.06	3.03	44.45	0.38	45.91	80.83	-34.92	Р
	2603.21	48.67	30.06	3.03	44.45	0.38	37.69	60.83	-23.14	Α
	3037.42	54.99	30.31	3.36	44.28	0.28	44.65	80.83	-36.18	Р
	3037.42	46.77	30.31	3.36	44.28	0.28	36.43	60.83	-24.39	Α
	3470.93	55.41	30.39	3.76	44.23	0.23	45.56	80.83	-35.26	Р
	3470.93	47.19	30.39	3.76	44.23	0.23	37.34	60.83	-23.48	Α
ŧ.	3905.20	56.04	31.21	3.94	44.18	0.32	47.33	74.00	-26.67	Р
ŧ.	3905.20	47.83	31.21	3.94	44.18	0.32	39.12	54.00	-14.88	Α
	4339.57	56.27	32.28	4.13	44.21	0.31	48.78	74.00	-25.22	Р
t	4339.57	48.05	32.28	4.13	44.21	0.31	40.56	54.00	-13.44	Α

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m). Peak detector mode and average detector mode of the emission shown in Result column.
- 7. Average level=Peak level + Duty factor



Report No.: T170421N02-RP1 Page 37 of 41 Rev. 00 FCC ID: 2AHZG-WTR2M433

## 7.6 POWERLINE CONDUCTED EMISSIONS

## LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Eroguanov Bango (MHz)	Limits (dBμV)				
Frequency Range (MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

# **MEASUREMENT EQUIPMENT USED**

Conducted Emission room #1									
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due					
BNC Coaxial Cable	CCS	BNC50	11	01/23/2019					
EMI Test Receiver	R&S	ESCS 30	100348	01/30/2019					
LISN	SCHWARZBECK	NNLK8130	8130124	11/30/2018					
LISN	FCC	FCC-LISN-50-32-2	08009	05/07/2018					
Pulse Limiter	R&S	ESH3-Z2	100116	01/23/2019					

Remark: Each piece of equipment is scheduled for calibration once a year.

#### **TEST RESULTS**

This EUT is not connected to AC Source directly. No applicability for this test.