



FCC Part 15, Subpart C Test Report

FCC ID: 2AGA7MG20D

Applicant: New Audio LLC

Address: 132 W. 31st 7th Floor New York, NY 10001

Manufacturer: New Audio LLC

Address: 132 W. 31st 7th Floor New York, NY 10001

Product: Low-Latency Adapter

Brand: Master & Dynamic

Test Model(s): MG20

Series Model(s): N/A

Test Date: Apr. 19, 2021 ~ Jul. 19, 2021

Issued Date: Sep. 07, 2021

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China

FCC Designation No.: CN1255

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

Candy Zhang/ Report Engineer

Reviewed by :

TanK Tan/ Project Engineer

Approved by :

Harry Li/ Technical Director

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into the account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)

Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Tel: [0769-83078199](tel:0769-83078199)

Web.: www.hwa-hsing.com

E-Mail: customerservice.dg@hwa-hsing.com

Release
Ver. 1.2



Table of Contents

Release Control Record	4
1 Summary of Test Results.....	5
1.1 Measurement Uncertainty.....	5
1.2 Modification Record	5
2 General Information	6
2.1 General Description of EUT	6
2.2 Description of Test Modes.....	7
2.2.1 Test Mode Applicability and Tested Channel Detail.....	8
2.3 Description of Support Units	10
2.3.1 Configuration of System under Test	10
3 Test Typesand Results	11
3.1 Radiated Emission and Bandedge Measurement	11
3.1.1 Limits of Radiated Emission and Bandedge Measurement	11
3.1.2 Test Instruments	12
3.1.3 Test Procedures.....	13
3.1.4 Deviation from Test Standard	13
3.1.5 Test Setup.....	14
3.1.6 EUT Operating Conditions.....	15
3.1.7 Test Results	16
3.2 Conducted Emission Measurement.....	28
3.2.1 Limits of Conducted Emission Measurement	28
3.2.2 Test Instruments	28
3.2.3 Test Procedures.....	29
3.2.4 Test Setup.....	29
3.2.5 EUT Operating Condition	29
3.2.6 Deviation from Test Standard	29
3.2.7 Test Results	30
3.3 Numberof Hopping Frequency Used	32
3.3.1 Limits of Hopping Frequency Used Measurement	32
3.3.2 Test Setup.....	32
3.3.3 Test Instruments	32
3.3.4 Test Procedure	32
3.3.5 Deviation fromTest Standard	32
3.3.6 Test Results	33
3.4 Dwell Time on Each Channel.....	34
3.4.1 Limits of Dwell Time on Each Channel Measurement.....	34
3.4.2 Test Setup.....	34
3.4.3 Test Instruments	34
3.4.4 Test Procedures.....	34
3.4.5 Deviation from Test Standard	34
3.4.6 Test Results	35
3.5 Channel Bandwidth.....	38
3.5.1 Limits of Channel Bandwidth Measurement.....	38
3.5.2 Test Setup.....	38
3.5.3 Test Instruments	38
3.5.4 Test Procedure	38
3.5.5 Deviation from Test Standard	38
3.5.6 EUT Operating Condition	38
3.5.7 Test Results	39
3.6 Occupied Bandwidth Measurement.....	40



3.6.1 Test Setup.....	40
3.6.2 Test Instruments	40
3.6.3 Test Procedure	40
3.6.4 Deviation from Test Standard.....	40
3.6.5 EUT Operating Conditions.....	40
3.6.6 Test Results	41
3.7 Hopping Channel Separation.....	42
3.7.1 Limits of Hopping Channel Separation Measurement.....	42
3.7.2 Test Setup.....	42
3.7.3 Test Instruments	42
3.7.4 Test Procedure	42
3.7.5 Deviation from Test Standard.....	42
3.7.6 Test Results	43
3.8 Maximum Output Power	44
3.8.1 Limits of Maximum Output Power Measurement	44
3.8.2 Test Setup.....	44
3.8.3 Test Instruments	44
3.8.4 Test Procedure	44
3.8.5 Deviation from Test Standard	44
3.8.6 EUT Operating Condition	44
3.8.7 Test Results	45
3.9 Conducted Out of Band Emission Measurement	46
3.9.1 Limits of Conducted Out of Band Emission Measurement.....	46
3.9.2 Test Instruments	46
3.9.3 Test Procedure	46
3.9.4 Deviation from Test Standard	46
3.9.5 EUT Operating Condition	46
3.9.6 Test Results	47
4 Pictures of Test Arrangements.....	51
5 Test Instruments.....	52
Appendix – Information on the Testing Laboratories	53



HWA-HSING Test Report No.: 201116EL17-RF-US-03

Release Control Record

Issue No.	Description	Date Issued
201116EL17-RF-US-03	Original Release	Sep. 07, 2021

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)
Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park,](#)
[HuangJiang Town, Dongguan, China](#)

Tel: [0769-83078199](#)
Web.: [www.hwa-hsing.com](#)
E-Mail: customerservice.dg@hwa-hsing.com

Release
[Ver. 1.2](#)



1 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013;			
FCCClause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note1: If the Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

Note2: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (sDoC). The test report has been issued separately.

1.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUTs specified in CISPR 16-4-2:

The listed uncertainties are the worst-case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.66 dB
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1000MHz	3.47 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.84 dB
	18GHz ~ 40GHz	4.67 dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

1.2 Modification Record

There were no modifications required for compliance.



2 General Information

2.1 General Description of EUT

Product	Low-Latency Adapter
Brand	Master & Dynamic
Test Model(s)	MG20
Series Model(s)	N/A
FCC ID:	2AGA7MG20D
Status of EUT	Engineering prototype
Power Supply Rating	DC5V from USB
Modulation Type	FHSS: GFSK, π/4DQPSK,8DPSK
Transfer Rate	1/2/3Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	79
Output Power	8.89dBm
Antenna Type	PCB Antenna
Antenna Gain	2.27dBi Maximum peak Gain
Antenna Connector	I-PEX
Radio HW	0.4
Radio FW	1.1.5
Accessory Device	N/A
Cable Supplied	MIC Line: 16cm Aux in Line: 200cm; USB Charing Cable: 200cm AUX-IN 1 to 2 Connect Cable: 10cm

Note:

1. Please refer to the EUT photo document (Reference No.:201116EL17) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



2.2 Description of Test Modes

79 channels are provided to this EUT:

Channel	Freq. (MHz)						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



2.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable test items	X-Axis	Y-Axis	Z-Axis	Voltage Supply
Conducted	AC Power Conducted Emission	N/A	N/A	N/A	
Radiated	Radiated Emissions	√	√	√*	
Antenna Port Conducted Measurement	Number of Hopping Frequency Used	N/A	N/A	N/A	DC5V from USB
	Dwell Time on Each Channel	N/A	N/A	N/A	
	Band Edge Measurement	N/A	N/A	N/A	
	Antenna Port Emission	N/A	N/A	N/A	
	Conducted power	N/A	N/A	N/A	
	Hopping Channel Separation	N/A	N/A	N/A	
	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	N/A	N/A	N/A	
<p>1. *: The EUT had been pre-tested on the positioned of each 3 Axis. The worst case was found when positioned on Z-plane.</p> <p>2. "N/A" means no effect.</p>					

Evaluation of difference data rate:

Applicable test items	Modulation Type		The Worst-case Modulation
	π/4DQPSK	8DPSK	
Radiated Emissions	√	√	8DPSK
Maximum Peak Output Power	√	√	8DPSK
Occupied Bandwidth Measurement	√	√	8DPSK
Number of Hopping Frequency Used	√	√	8DPSK
Dwell Time on Each Channel	√	√	8DPSK

Test Condition:

Applicable test items	Environmental Conditions	Power supply	Tested by
AC Power Conducted Emission	25deg. C, 65%RH	DC5V from USB	Jim Xu
Radiated Emissions	25deg. C, 65%RH	DC5V from USB	Jim Xu
Antenna Port Conducted Measurement	25deg. C, 65%RH	DC5V from USB	Dragonlong



Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	78	FHSS	GFSK	DH5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	78	FHSS	GFSK	DH5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5




2.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	Lenovo	ThinkPad X280	SL10P97665	N/A

No.	Signal Cable Description Of The Above Support Units
1.	USB extension cord: Un-shieldin 1.5m
2.	/
3.	/

2.3.1 Configuration of System under Test

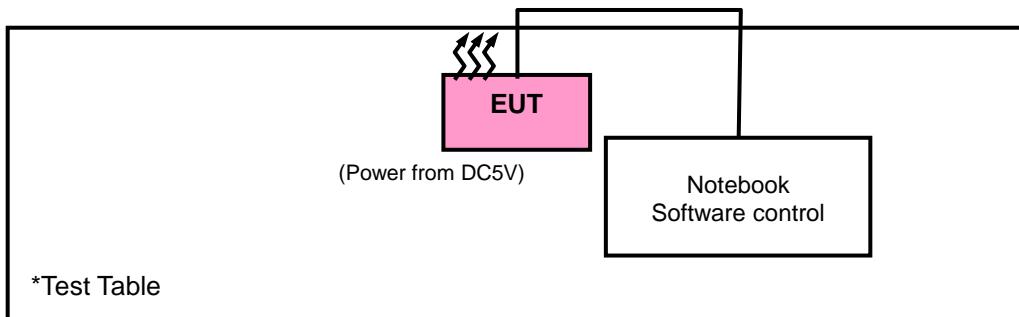



3 Test Types and Results

3.1 Radiated Emission and Bandedge Measurement

3.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.



3.1.2 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	102542	2022/01/05
Broadband antenna	Schwarzbeck	VULB 9168	00937	2022/04/15
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2022/04/14
Signal Amplifier	Com-power	PAM-103	18020051	2022/03/14
Attenuator	Rohde&Schwarz	TS2GA-6dB	18101101	N/A
Test software	EZ	EZ_EMC V1.1.4.2	EZ_EMCV1.1.4.2	N/A
Fixed Attenuator	Mini-Circuits	MDCS18N-10	MDCS18N-10-01	2021/10/17
Loop Antenna	EMCI	HLA 6121	45745	2022/04/13
Preamplifier	EMCI	EMC001340	980201	2021/10/17
Digital Multimeter	FLUKE	15B+	43512617WS	2021/09/16
Horn Antenna	Schwarzbeck	BBHA 9170	01959	2022/04/15
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2022/03/14
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	00025	2022/03/14
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170242	2022/04/15
Pre-Amplifier	EMCI	EMC 184045	980102	2022/03/14
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA
Spectrum	Keysight	N9020A	MY51240612	2021/09/16
Power Meter 10Hz~18GHz	Tonscend	JS0806-2	188060126	2021/09/16
Signal generator	Keysight	N5182A	GB40051020	2021/09/16
Signal generator	Keysight	N5182A	MY47420944	2021/09/16
Universal Switch Control Unit	Rohde&Schwarz	CMW500	12010002K50	2021/09/16
Test Software	Tonscend	JS0806-2	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months (Except the Chamber and the Antenna are 24 months) and the calibrations are traceable to CEPREI/CHINA.
 2. The test was performed in 966.



3.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for Average (Duty cycle < 98 %) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle \geq 98 %) for Average detection (AV) at frequency above 1 GHz.
5. Test procedures for measuring FHSS device: The use of a duty cycle correction factor (DCCF) is permitted for calculating average radiated field strength emission levels for an FHSS device in 15.247. This DCCF can be applied when the unwanted emission limit is subject to an average field strength limit (e.g., within a Government Restricted band) and the conditions specified in Section 15.35(c) can be satisfied. The average radiated field strength is calculated by subtracting the DCCF from the maximum radiated field strength level as determined through measurement. The maximum radiated field strength level represents the worst-case (maximum amplitude) RMS measurement of the emission(s) during continuous transmission (i.e., not including any time intervals during which the transmitter is off or is transmitting at a reduced power level). It is also acceptable to apply the DCCF to a measurement performed with a peak detector instead of the specified RMS power averaging detector. Note that Section 15.35(c) specifies that the DCCF shall represent the worst-case (greatest duty cycle) over any 100 msec transmission period. Subclause 7.5 of ANSI C63.10 provides additional measurement guidance applicable to determination of the DCCF.
6. All modes of operation were investigated and the worst-case emissions are reported.


3.1.4 Deviation from Test Standard

No deviation.




3.1.5 Test Setup

Radiated emission below 30MHz:

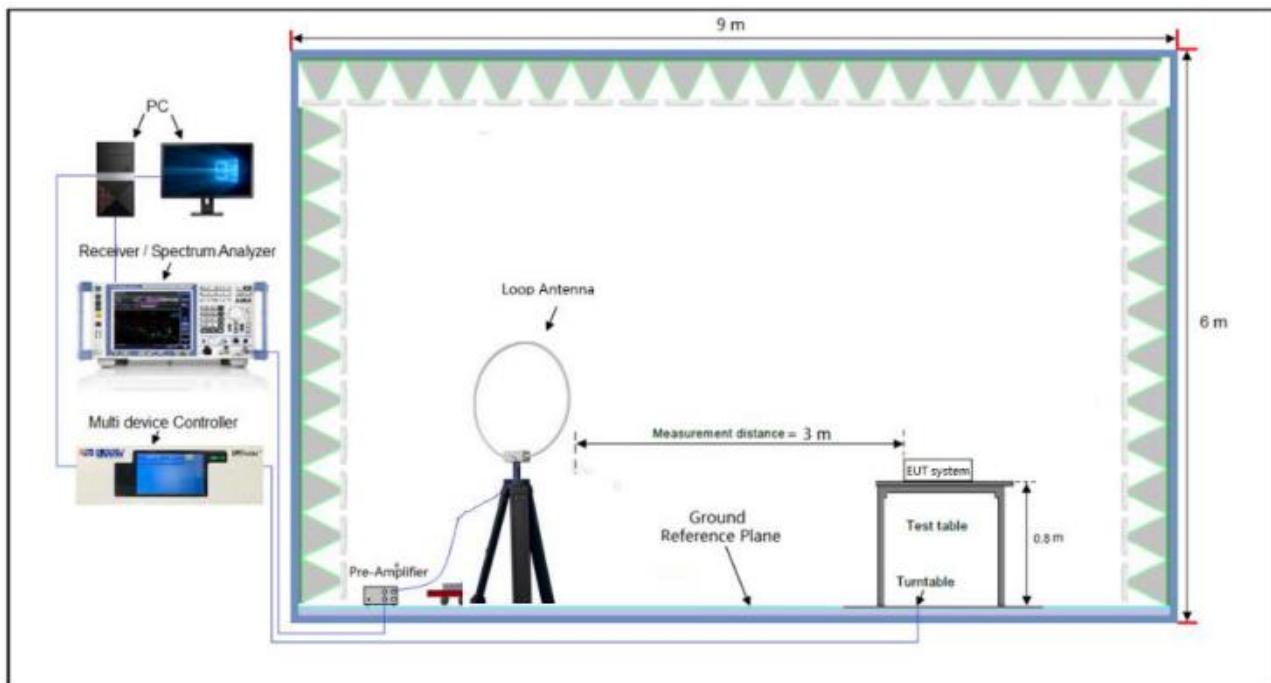


Frequency Range below 1GHz:

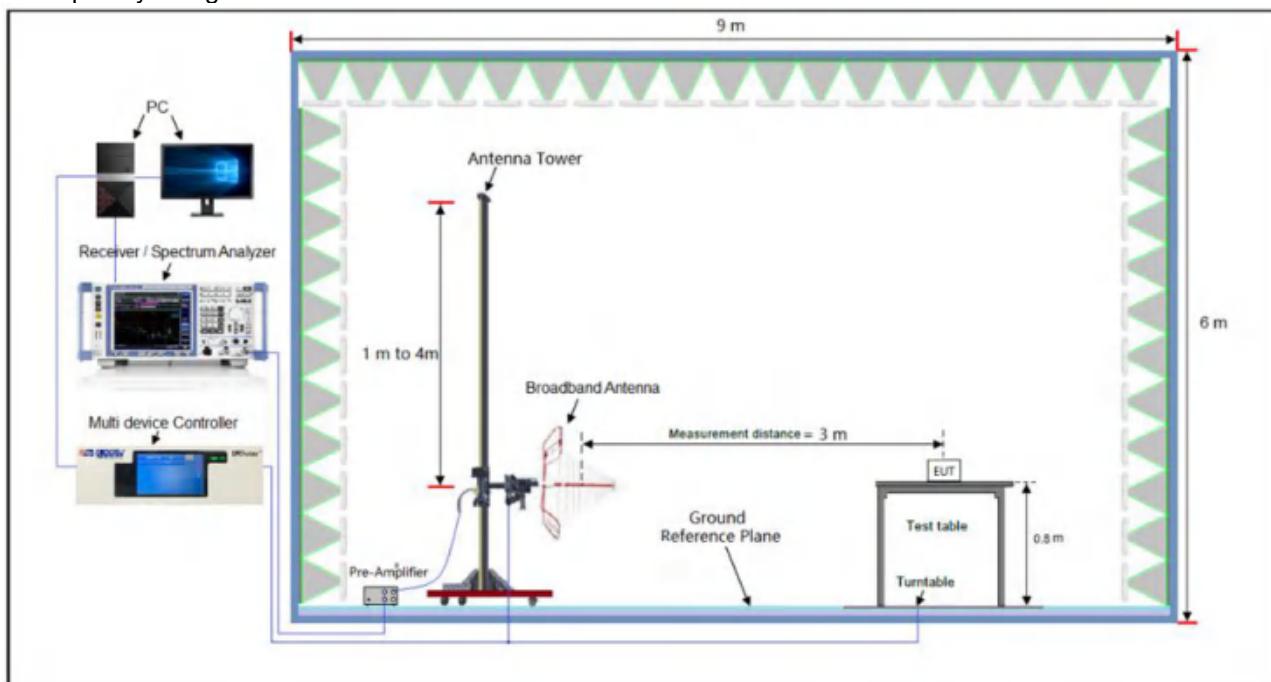




Frequency Range above 1GHz:

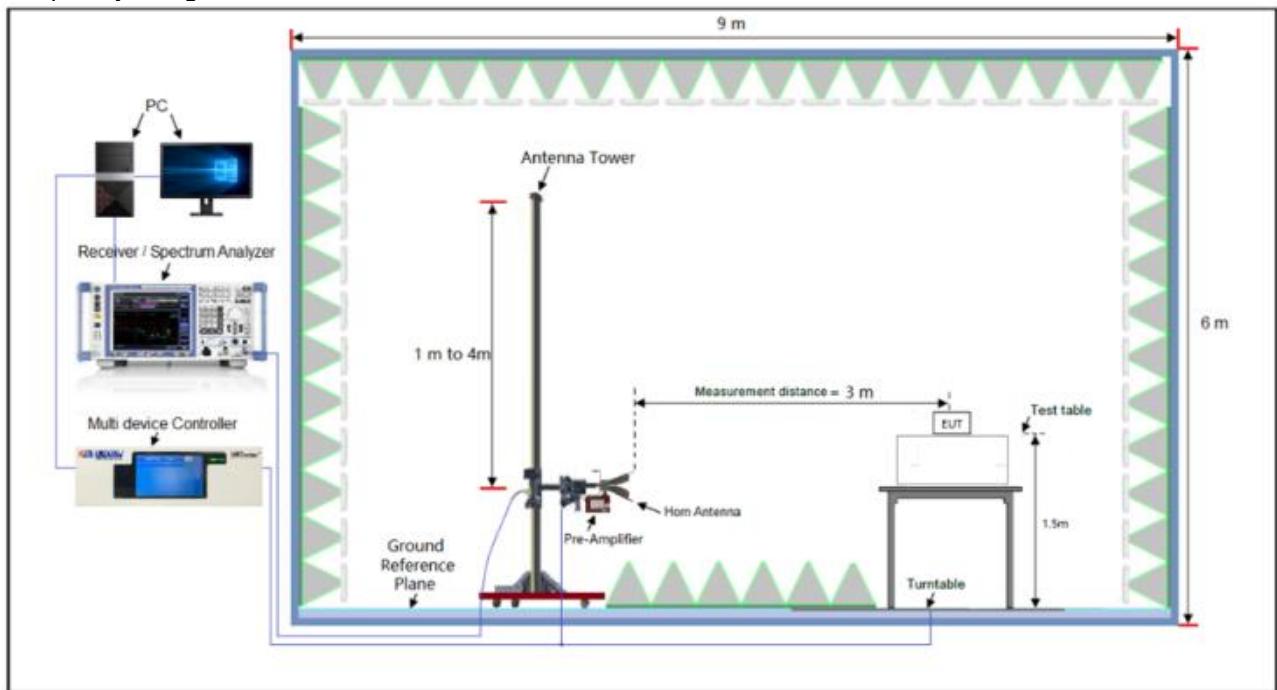

Frequency Range 18-40GHz:

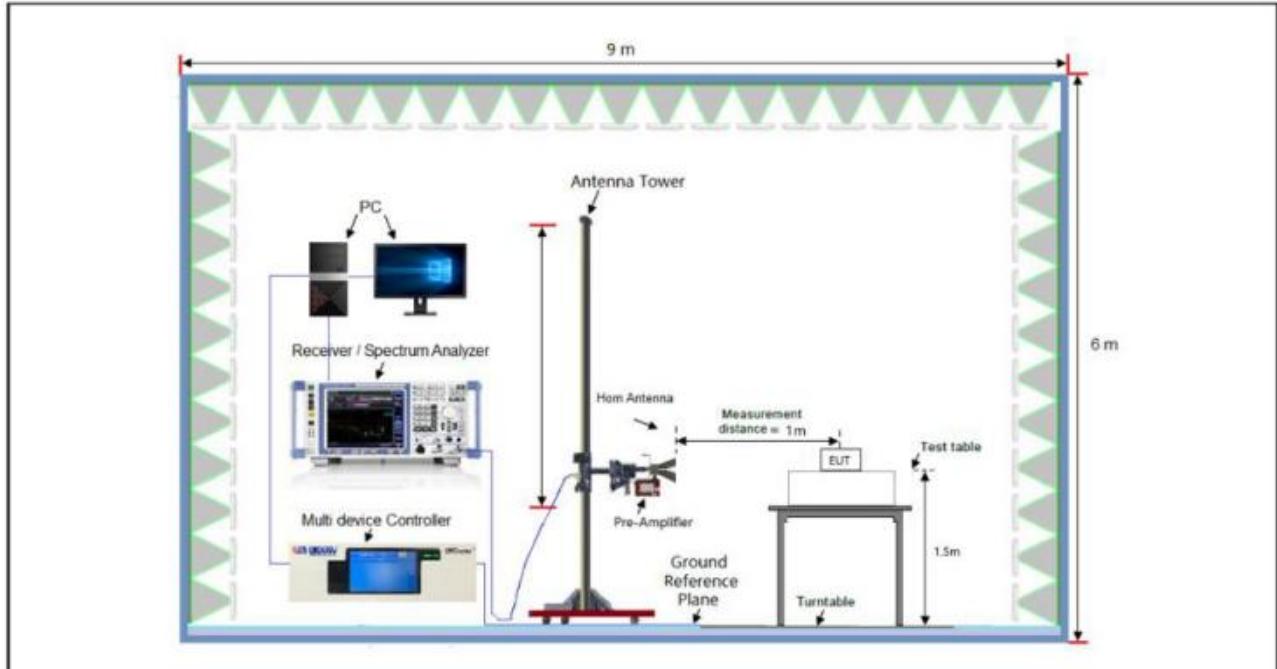

Directional antenna.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.




3.1.7 Test Results

9 kHz ~ 30 MHz Data:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1GHz Worst-Case Data:

Test Channel	Channel 78	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

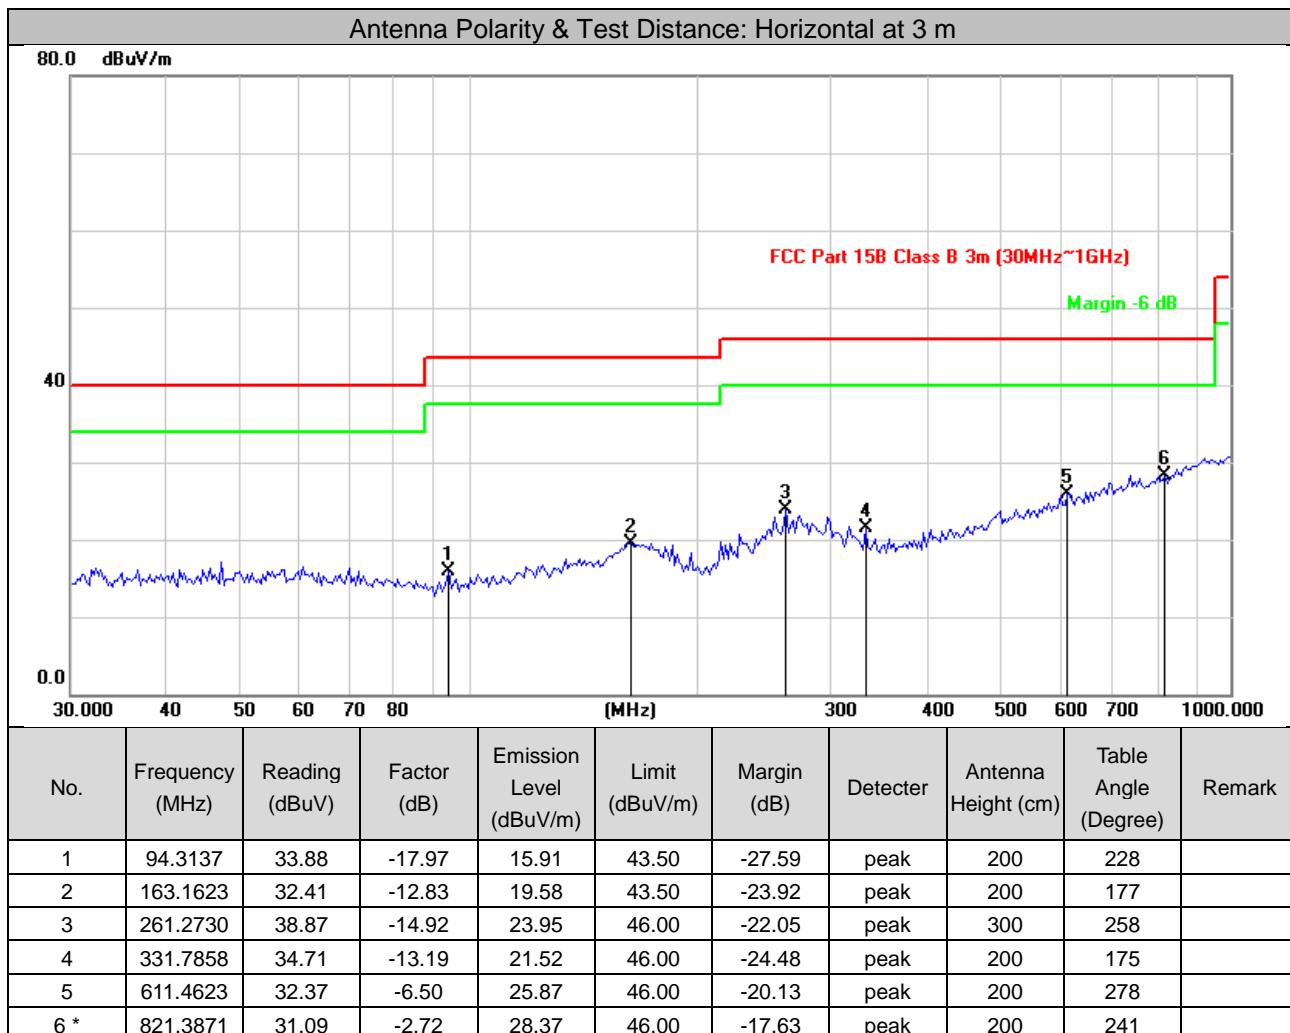


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

2. Margin value = Emission level – Limit value



Test Channel	Channel 78	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

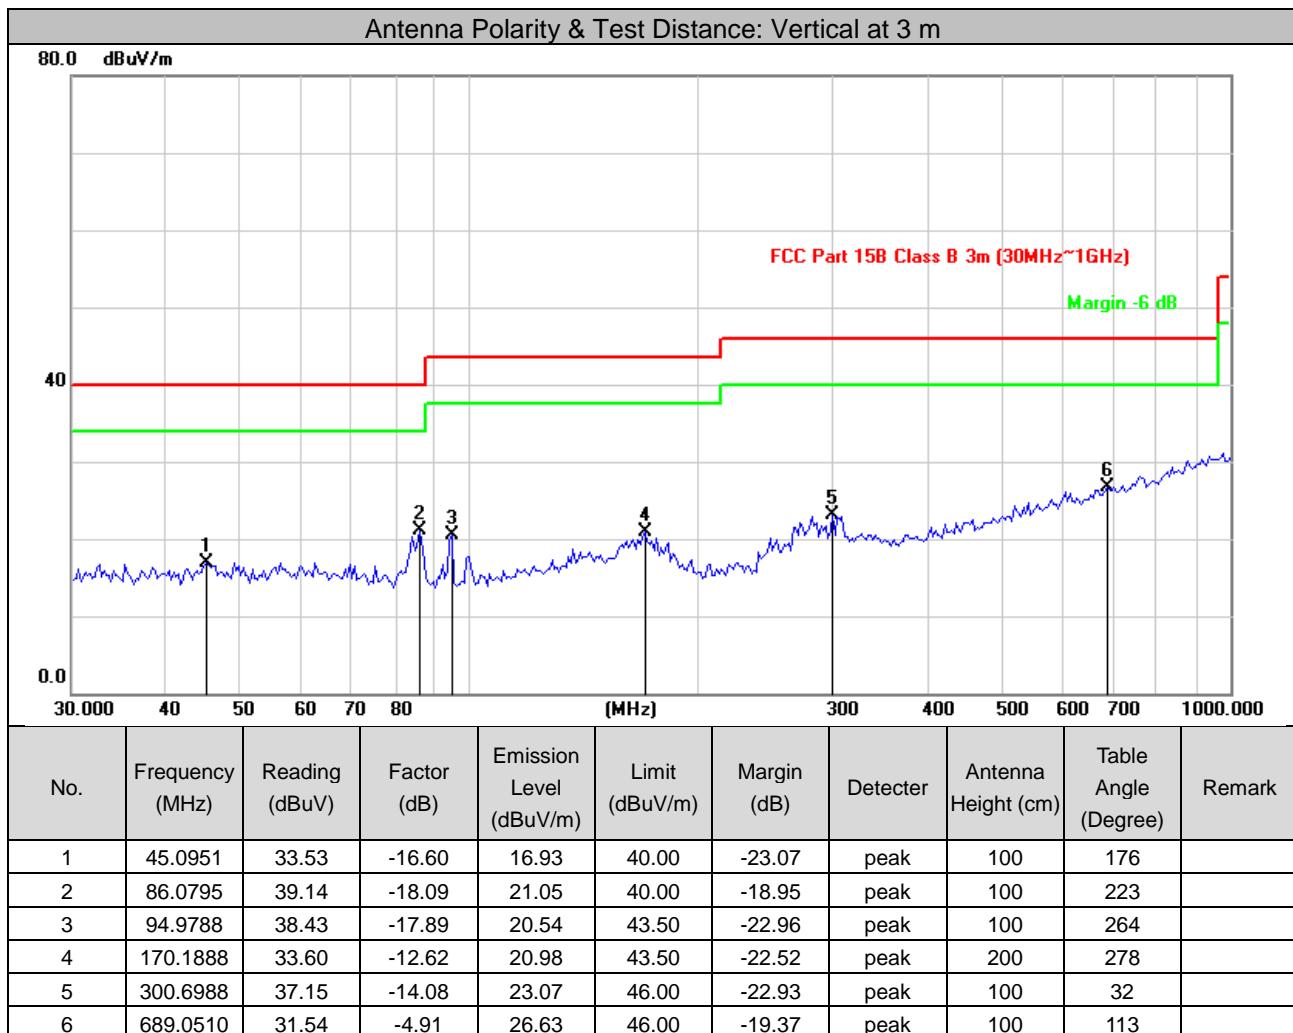


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



Above 1GHz Data:

Test Channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

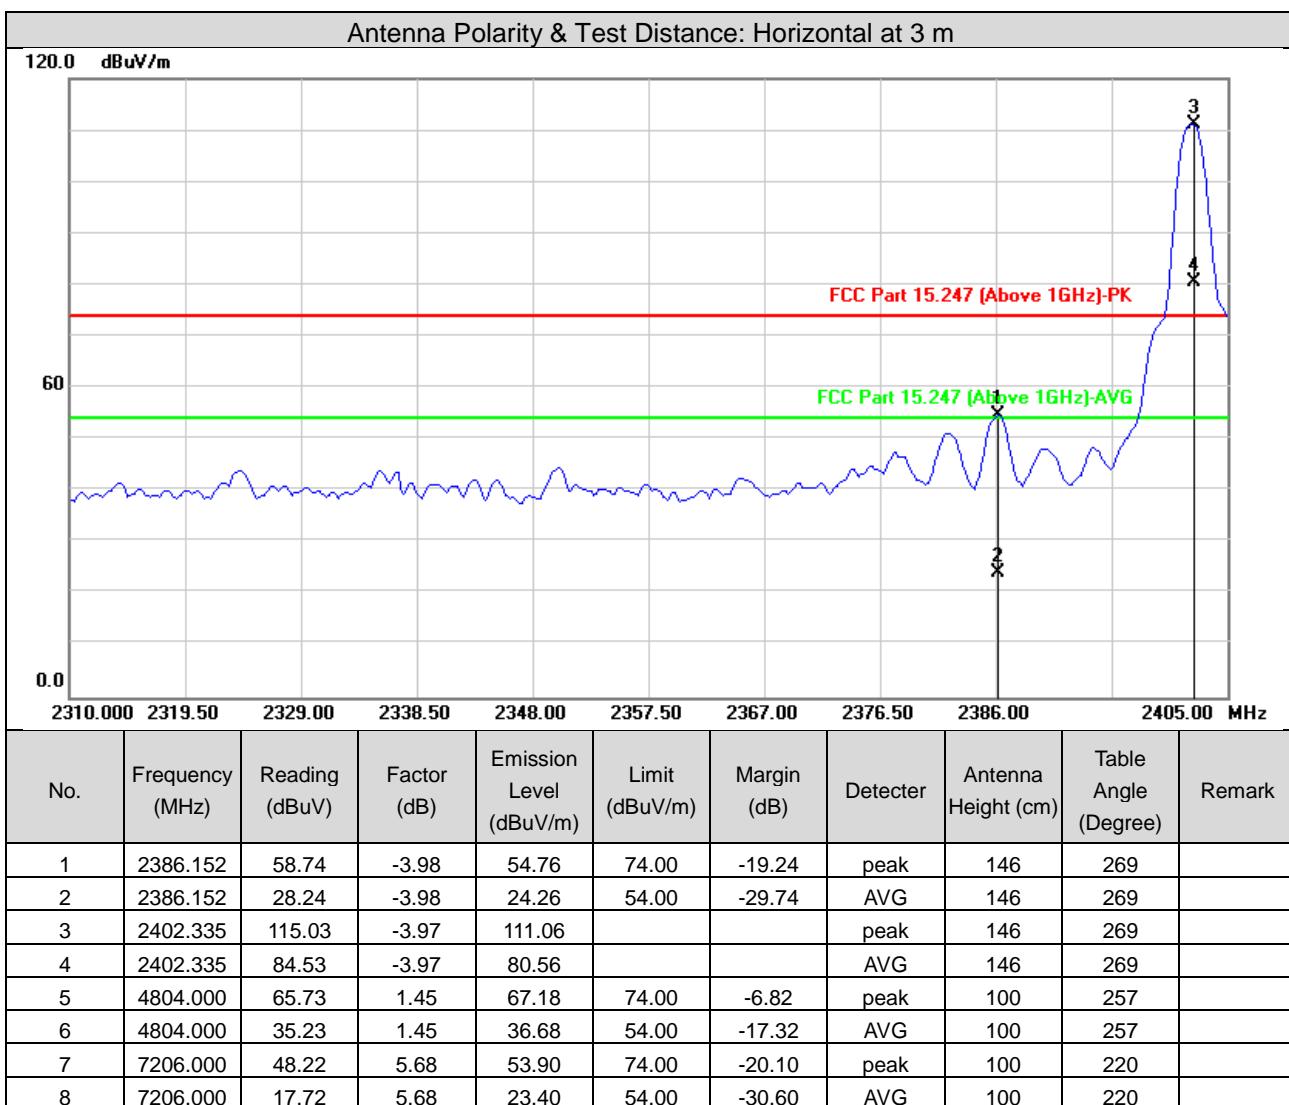


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
2. #2402MHz: Fundamental frequency.



Test Channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

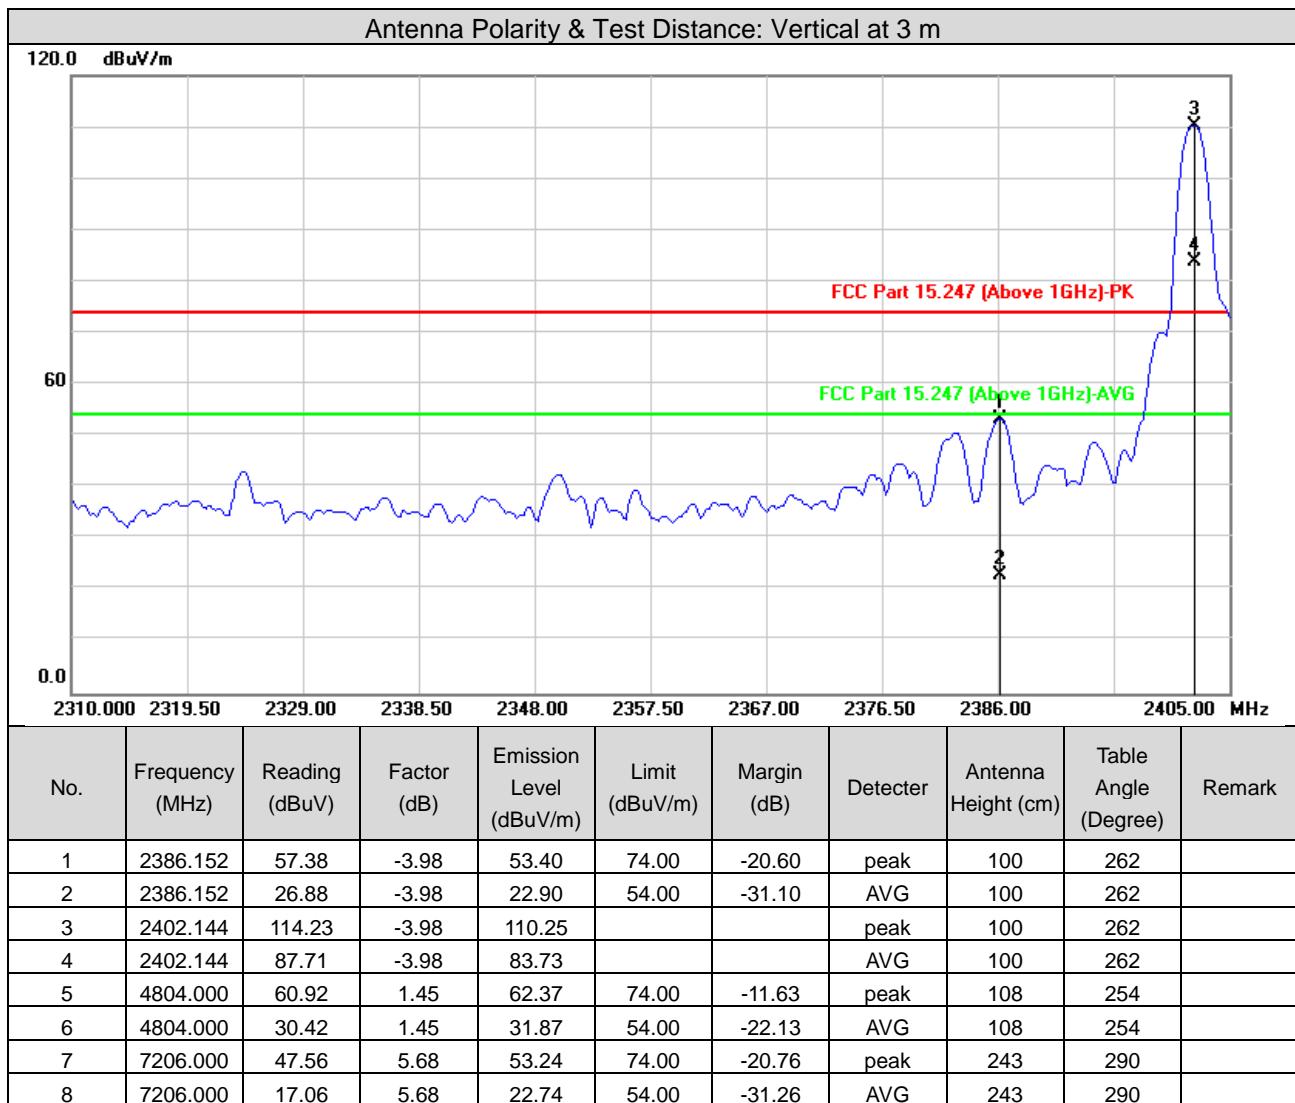

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level – Limit value

2. #2402MHz: Fundamental frequency.



Test Channel		Channel 39		Frequency Range			1GHz ~ 25GHz		
Detector Function		Peak (PK) Average (AVG)		Tested By			Jim Xu		

Antenna Polarity & Test Distance: Horizontal at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2441.000	116.70	-3.97	112.73			peak	100	269	
2	2441.000	86.20	-3.97	82.23			AVG	100	269	
3	4882.000	65.22	1.61	66.83	74.00	-7.17	peak	100	232	
4	4882.000	34.72	1.61	36.33	54.00	-17.67	AVG	100	232	
5	7323.000	48.20	5.97	54.17	74.00	-19.83	peak	100	214	
6	7323.000	17.70	5.97	23.67	54.00	-30.33	AVG	100	214	
Antenna Polarity & Test Distance: Vertical at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2441.000	114.28	-3.97	110.31			peak	100	256	
2	2441.000	83.78	-3.97	79.81			AVG	100	256	
3	4882.000	59.71	1.61	61.32	74.00	-12.68	peak	100	235	
4	4882.000	29.21	1.61	30.82	54.00	-23.18	AVG	100	235	
5	7323.000	46.19	5.97	52.16	74.00	-21.84	peak	124	279	
6	7323.000	15.69	5.97	21.66	54.00	-32.34	AVG	124	279	

Remarks:


1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level – Limit value

2. #2441MHz: Fundamental frequency.



Test Channel	Channel 78	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

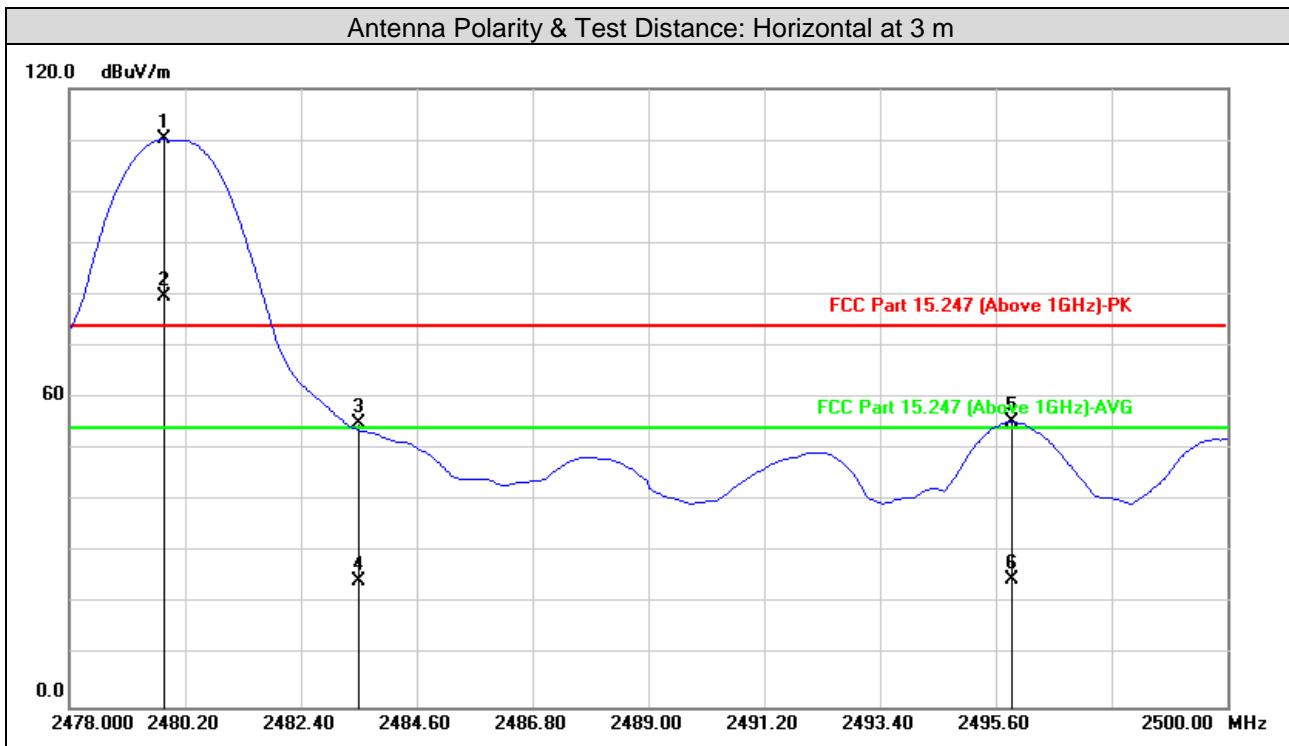

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2479.808	114.06	-3.95	110.11			peak	151	267	
2	2479.808	83.56	-3.95	79.61			AVG	151	267	
3	2483.500	58.87	-3.96	54.91	74.00	-19.09	peak	151	267	
4	2483.500	28.37	-3.96	24.41	54.00	-29.59	AVG	151	267	
5	2495.900	59.26	-3.95	55.31	74.00	-18.69	peak	151	267	
6	2495.900	28.76	-3.95	24.81	54.00	-29.19	AVG	151	267	
7	4960.000	63.78	1.78	65.56	74.00	-8.44	peak	100	262	
8	4960.000	33.28	1.78	35.06	54.00	-18.94	AVG	100	262	
9	7440.000	45.88	6.27	52.15	74.00	-21.85	peak	100	228	
10	7440.000	15.38	6.27	21.65	54.00	-32.35	AVG	100	228	

Remarks:


1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level – Limit value

2. #2480MHz: Fundamental frequency.



Test Channel	Channel 78	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

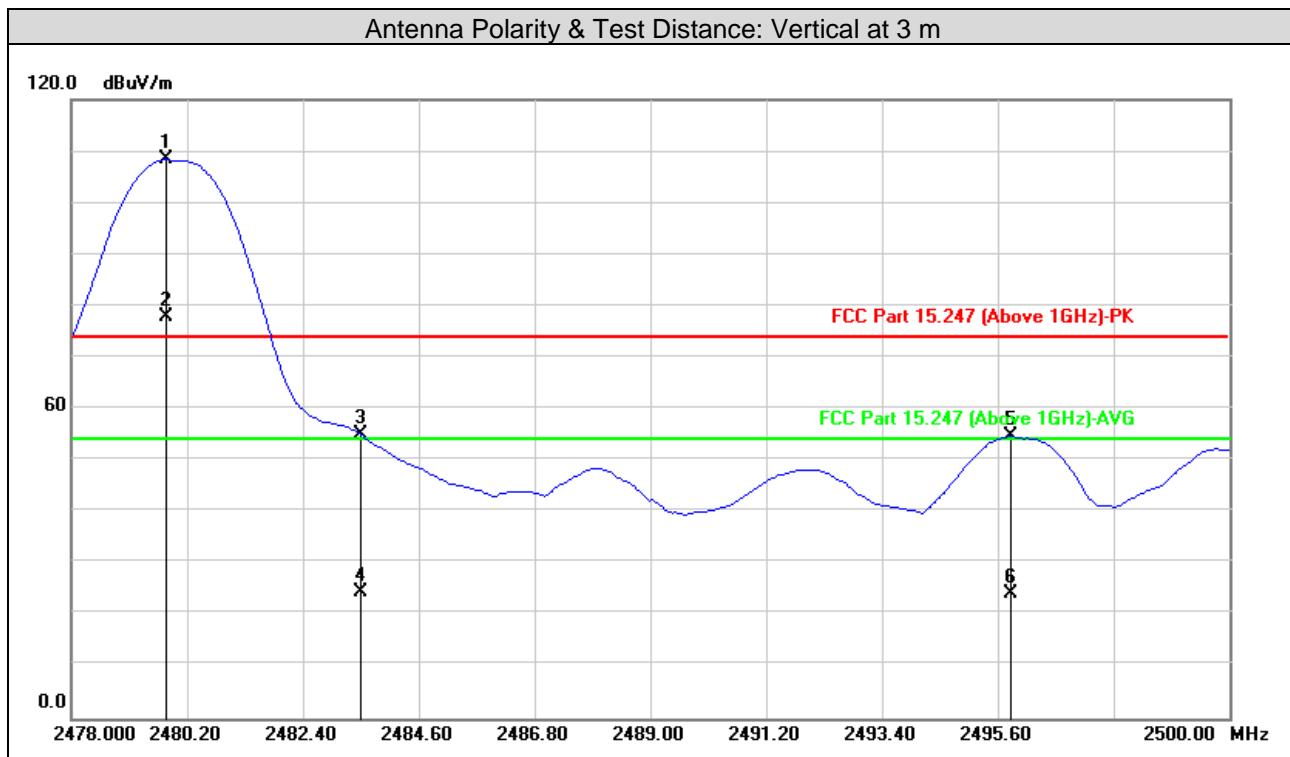

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2479.808	112.31	-3.95	108.36			peak	100	261	
2	2479.808	81.81	-3.95	77.86			Avg	100	261	
3	2483.500	58.90	-3.96	54.94	74.00	-19.06	peak	100	261	
4	2483.500	28.40	-3.96	24.44	54.00	-29.56	Avg	100	261	
5	2495.856	58.59	-3.95	54.64	74.00	-19.36	peak	100	261	
6	2495.856	28.09	-3.95	24.14	54.00	-29.86	Avg	100	261	
7	4960.000	59.69	1.78	61.47	74.00	-12.53	peak	100	259	
8	4960.000	29.19	1.78	30.97	54.00	-23.03	Avg	100	259	
9	7440.000	46.39	6.27	52.66	74.00	-21.34	peak	156	287	
10	7440.000	15.89	6.27	22.16	54.00	-31.84	Avg	156	287	

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)


Margin value = Emission level – Limit value

2. #The 2480MHz: Fundamental frequency.



8DPSK

Test Channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

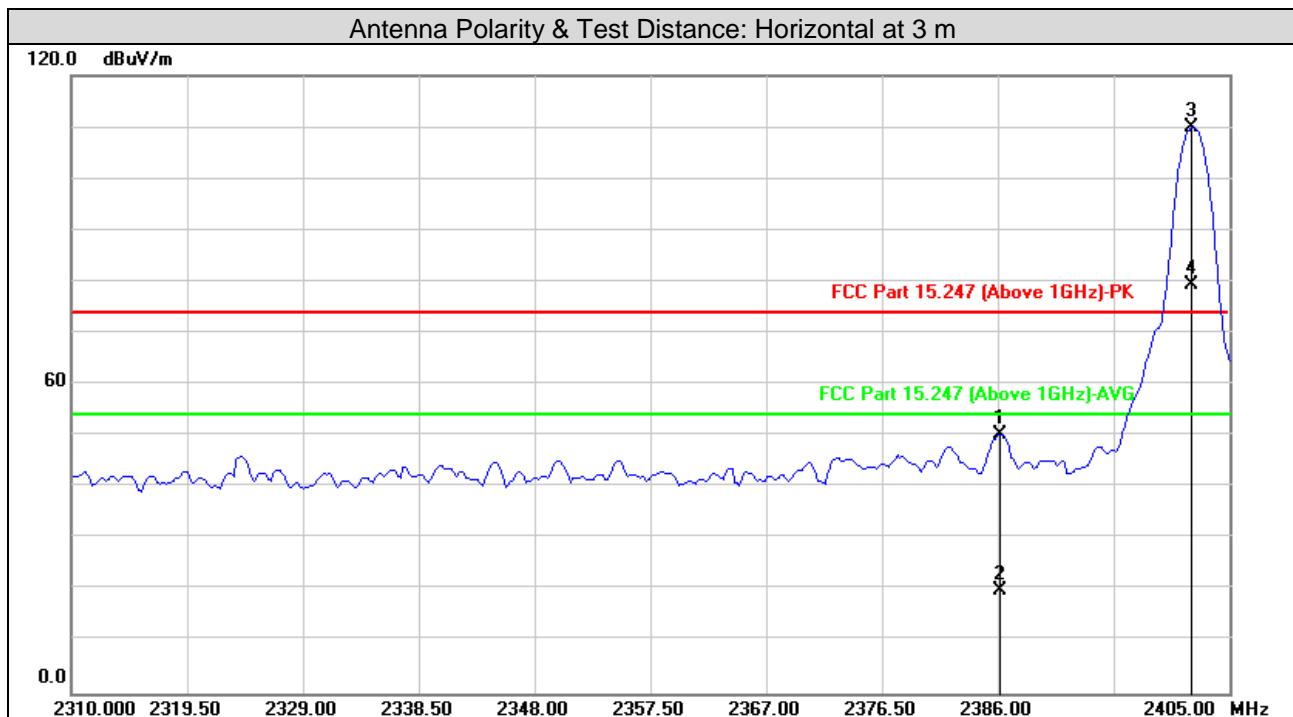

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2386.152	54.37	-3.98	50.39	74.00	-23.61	peak	132	269	
2	2386.152	23.87	-3.98	19.89	54.00	-34.11	AVG	100	263	
3	2401.954	113.87	-3.98	109.89			peak	132	269	
4	2401.954	83.37	-3.98	79.39			AVG	100	263	
5	4804.000	62.96	1.45	64.41	74.00	-9.59	peak	100	259	
6	4804.000	32.46	1.45	33.91	54.00	-20.09	AVG	100	259	
7	7206.000	45.47	5.68	51.15	74.00	-22.85	peak	102	239	
8	7206.000	14.97	5.68	20.65	54.00	-33.35	AVG	102	239	

Remarks:


1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level – Limit value

2. #2402MHz: C.F.: Fundamental frequency.



Test Channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

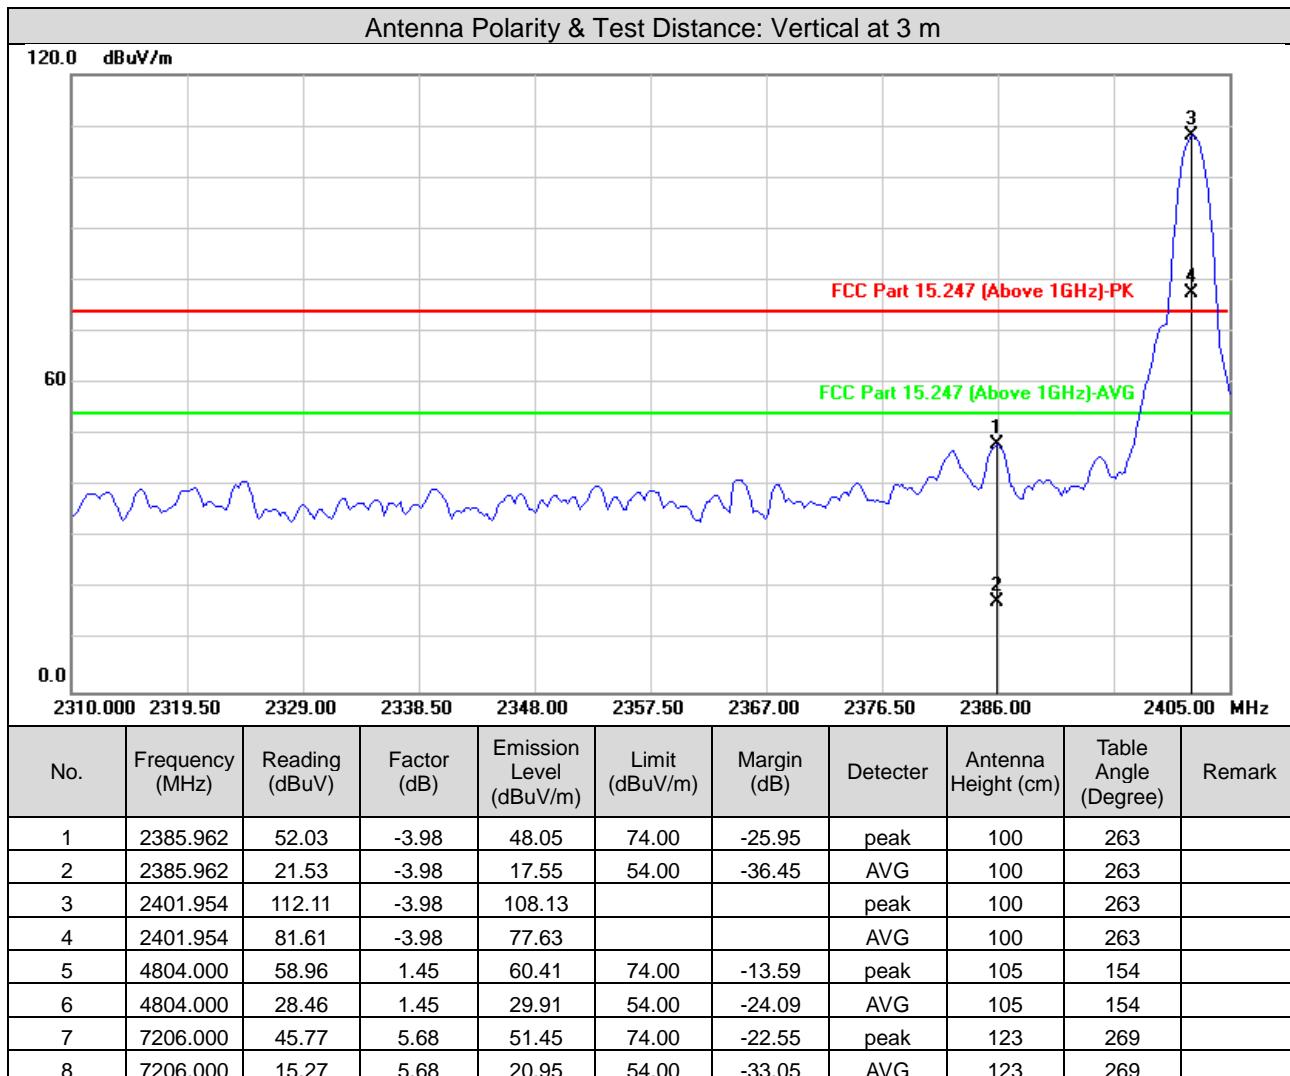

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level - Limit value

2. #2402MHz: C.F.: Fundamental frequency.



Test Channel		Channel 39		Frequency Range			1GHz ~ 25GHz		
Detector Function		Peak (PK) Average (AVG)		Tested By			Jim Xu		


Antenna Polarity & Test Distance: Horizontal at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2441.000	115.87	-3.97	111.90			peak	100	277	
2	2441.000	85.37	-3.97	81.40			AVG	100	277	
3	4882.000	63.69	1.62	65.31	74.00	-8.69	peak	100	246	
4	4882.000	33.19	1.62	34.81	54.00	-19.19	AVG	100	246	
5	7323.000	46.32	5.97	52.29	74.00	-21.71	peak	100	227	
6	7323.000	15.82	5.97	21.79	54.00	-32.21	AVG	100	227	
Antenna Polarity & Test Distance: Vertical at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2441.000	113.65	-3.97	109.68			peak	100	254	
2	2441.000	83.15	-3.97	79.18			AVG	100	254	
3	4882.000	60.00	1.62	61.62	74.00	-12.38	peak	100	262	
4	4882.000	29.50	1.62	31.12	54.00	-22.88	AVG	100	262	
5	7323.000	45.31	5.97	51.28	74.00	-22.72	peak	111	243	
6	7323.000	14.81	5.97	20.78	54.00	-33.22	AVG	111	243	

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
2. #2441MHz: Fundamental frequency.



Test Channel	Channel 78	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

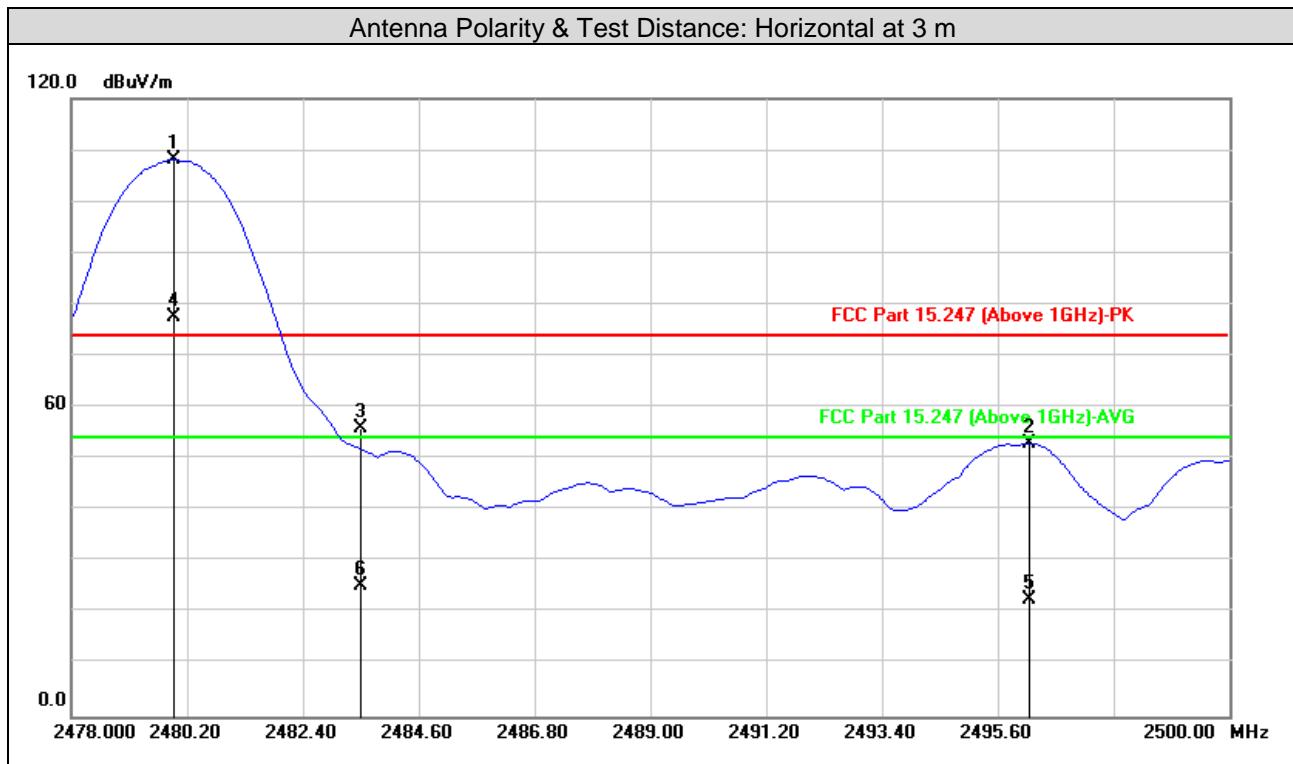

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2479.940	112.07	-3.95	108.12			peak	154	268	
4	2479.940	81.57	-3.95	77.62			AVG	154	268	
3	2483.500	59.95	-3.96	55.99	74.00	-18.01	peak	154	268	
6	2483.500	29.45	-3.96	25.49	54.00	-28.51	AVG	154	268	
2	2496.208	56.97	-3.95	53.02	74.00	-20.98	peak	154	268	
5	2496.208	26.47	-3.95	22.52	54.00	-31.48	AVG	154	268	
7	4960.000	62.20	1.78	63.98	74.00	-10.02	peak	100	267	
8	4960.000	31.70	1.78	33.48	54.00	-20.52	AVG	100	267	
9	7440.000	44.85	6.27	51.12	74.00	-22.88	peak	100	228	
10	7440.000	14.35	6.27	20.62	54.00	-33.38	AVG	100	228	

Remarks:


1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level – Limit value

2. #2480MHz: Fundamental frequency.



Test Channel	Channel 78	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

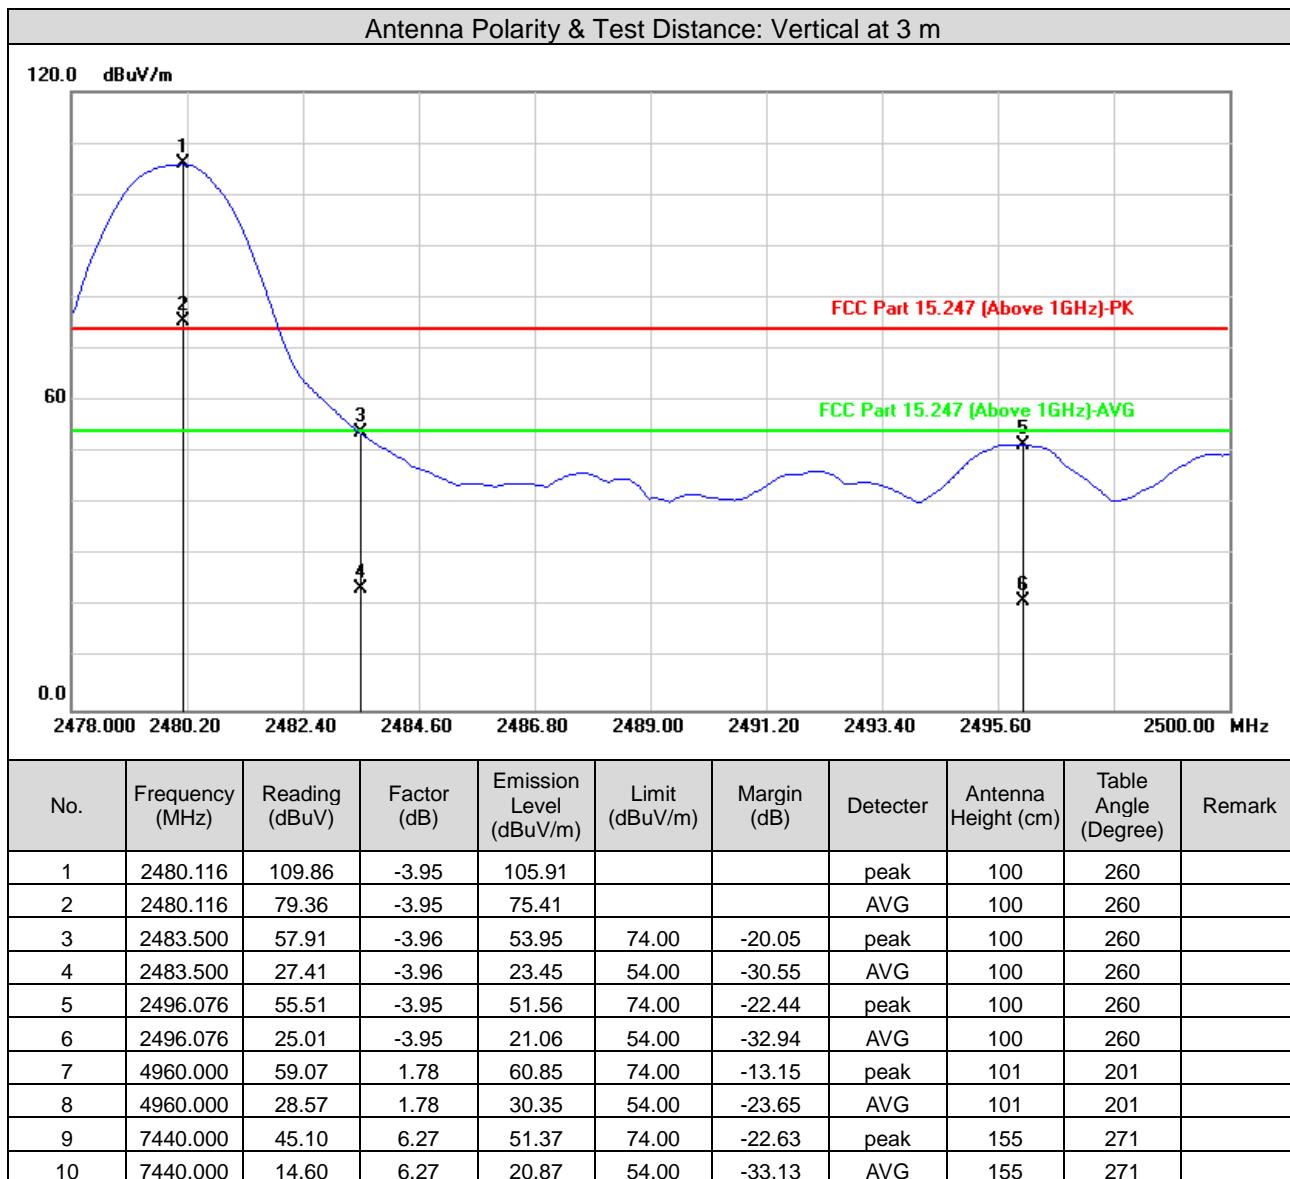

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level – Limit value

2. #2480MHz: Fundamental frequency.



3.2 Conducted Emission Measurement

3.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Due Date of Calibration
EMI Test Receiver Rohde&Schwarz	ESCI3	101418	2021/09/05
Artificial Mains Network Rohde&Schwarz	ENV216	3560.6550.15	2021/09/16
Test software FARAD	EZ_EMC V1.1.4.2	N/A	N/A
Hygrothermograph Yuhuaze	HTC-1	NA	2021/09/16
Digital Multimeter FLUKE	15B+	43512617WS	2021/09/16


Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.
2. The test was performed in Shielded Room 1.

3.2.3 Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 Test Setup

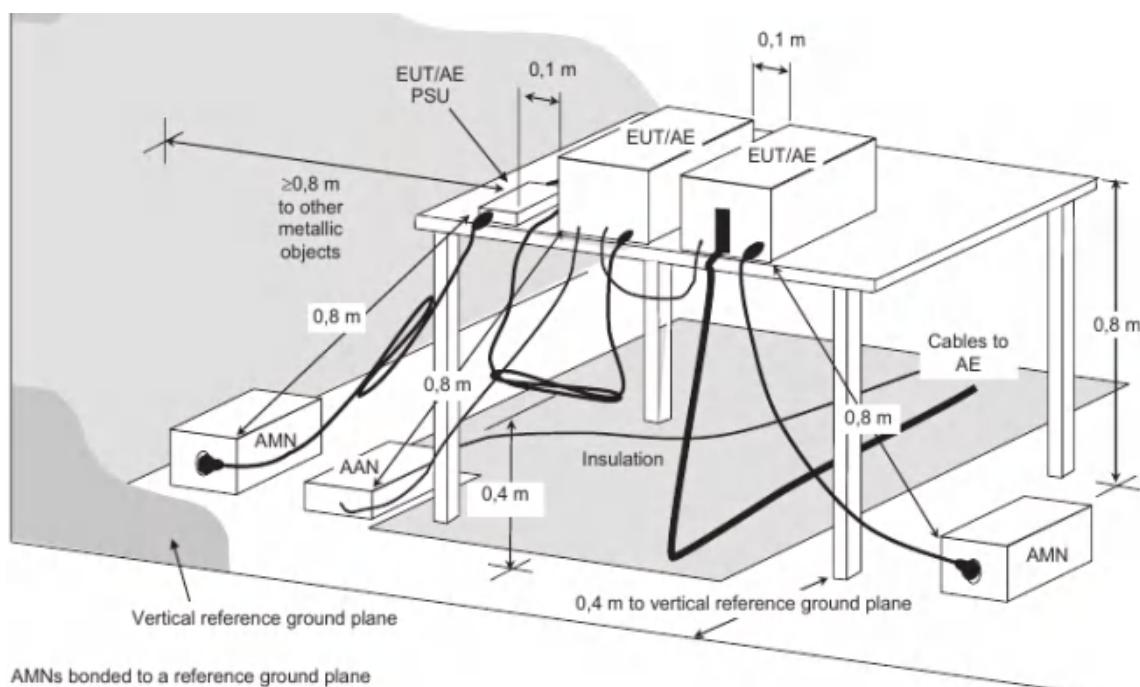

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.5 EUT Operating Condition

Set the EUT under transmission condition continuously at specific channel frequency.


3.2.6 Deviation from Test Standard

No deviation.



3.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution andwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Power supply	DC5V from USB	Tested by	Jim Xu

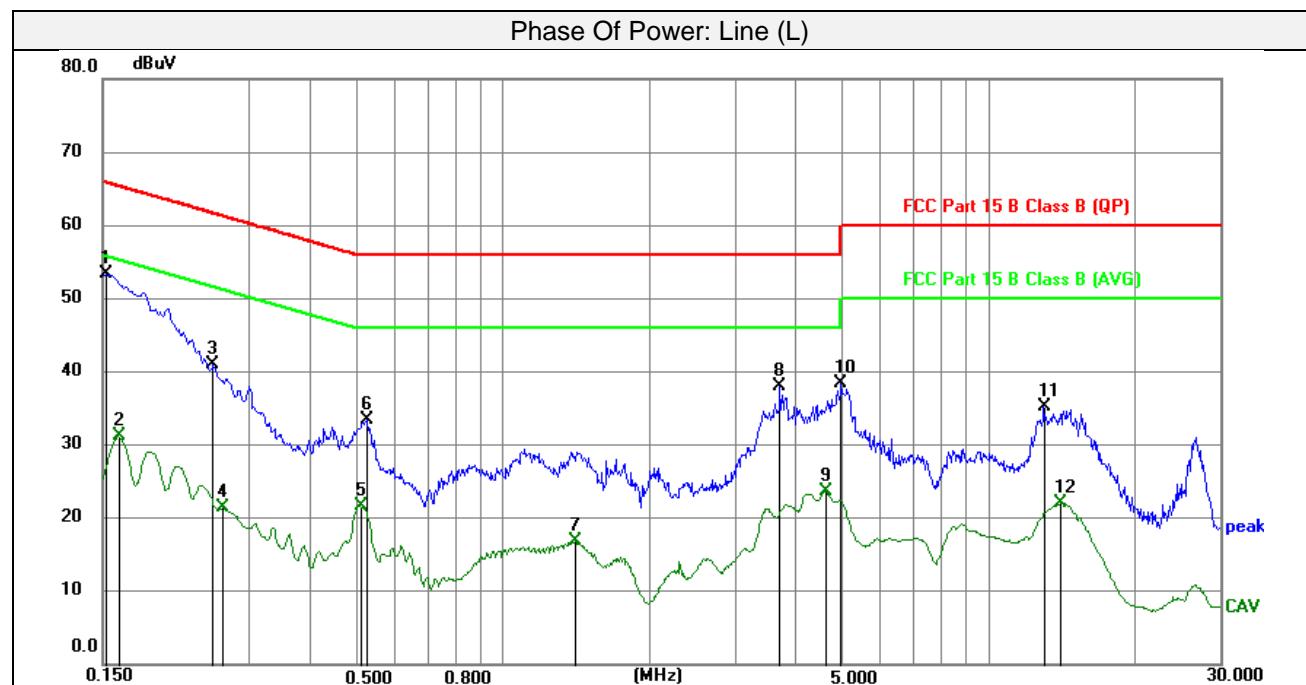


No.	Frequency	Reading	Correction Factor	Emission Level	Limit	Margin	Remark
	(MHz)	(dBuV)	dB	(dBuV)	(dBuV)	(dB)	Detector
1	0.1522	43.69	9.66	53.35	65.88	-12.53	peak
2	0.1613	21.49	9.67	31.16	55.40	-24.24	AVG
3	0.2535	31.29	9.69	40.98	61.64	-20.66	peak
4	0.2647	11.69	9.69	21.38	51.28	-29.90	AVG
5	0.5078	11.96	9.70	21.66	46.00	-24.34	AVG
6	0.5258	23.62	9.71	33.33	56.00	-22.67	peak
7	1.4144	7.12	9.73	16.85	46.00	-29.15	AVG
8	3.7342	28.20	9.81	38.01	56.00	-17.99	peak
9	4.6387	13.77	9.81	23.58	46.00	-22.42	AVG
10	4.9897	28.68	9.80	38.48	56.00	-17.52	peak
11	13.0538	25.23	10.06	35.29	60.00	-24.71	peak
12	14.1270	11.93	10.07	22.00	50.00	-28.00	AVG

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution andwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Power supply	DC5V from USB	Tested by	Jim Xu

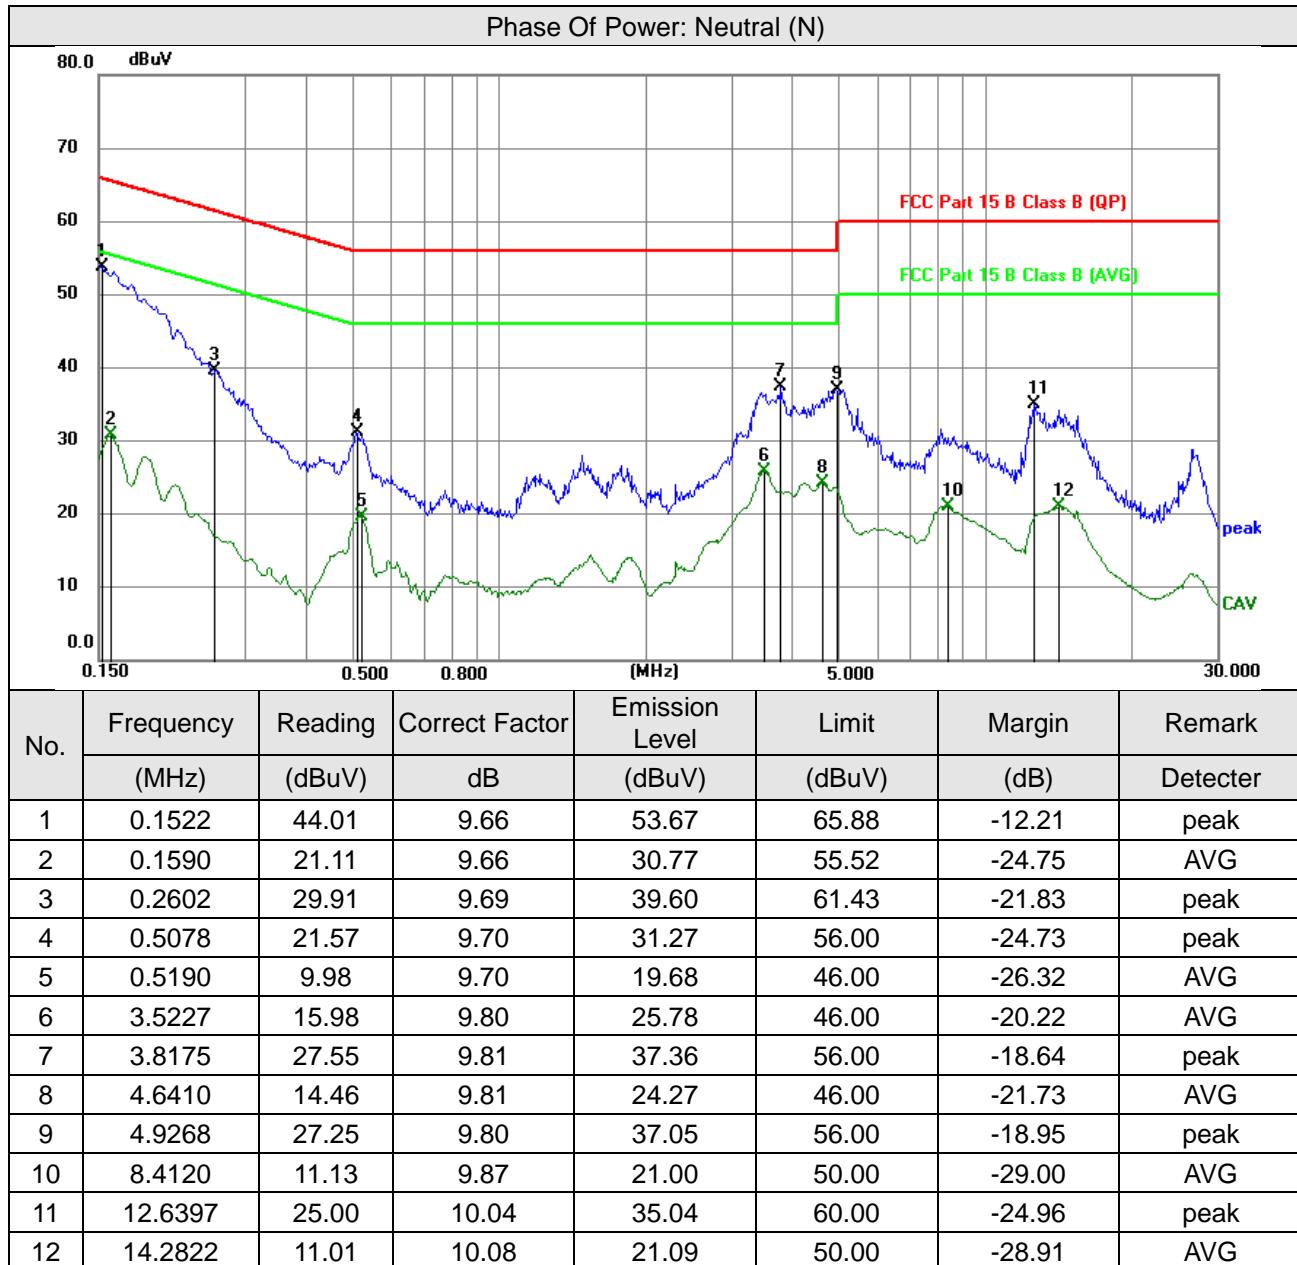

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



3.3 Number of Hopping Frequency Used

3.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

3.3.2 Test Setup



3.3.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.3.4 Test Procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

3.3.5 Deviation from Test Standard

No deviation.



3.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.






3.4 Dwell Time on Each Channel

3.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.4.2 Test Setup



3.4.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.4.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

3.4.5 Deviation from Test Standard

No deviation.



3.4.6 Test Results

GFSK

Mode	Number of Hopping Channel	Number of transmission in a period (channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	Pass / Fail
		Period (sec)	Sweep time (sec)	times in a sweep	times in a period				
DH1	79	31.6	3.16	32	320	0.4025	128.80	400	PASS
DH3	79	31.6	3.16	16	160	1.658	265.28	400	PASS
DH5	79	31.6	3.16	11	110	2.906	319.66	400	PASS

Note: Test plots of the transmitting time slot are shown as below.


8DPSK

Mode	Number of Hopping Channel	Number of transmission in a period (channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	Pass / Fail
		Period (sec)	Sweep time (sec)	times in a sweep	times in a period				
3DH1	79	31.6	3.16	32	320	0.4082	130.62	400	PASS
3DH3	79	31.6	3.16	16	160	1.664	266.24	400	PASS
3DH5	79	31.6	3.16	11	110	2.915	320.65	400	PASS

Note: Test plots of the transmitting time slot are shown as below.




GFSK

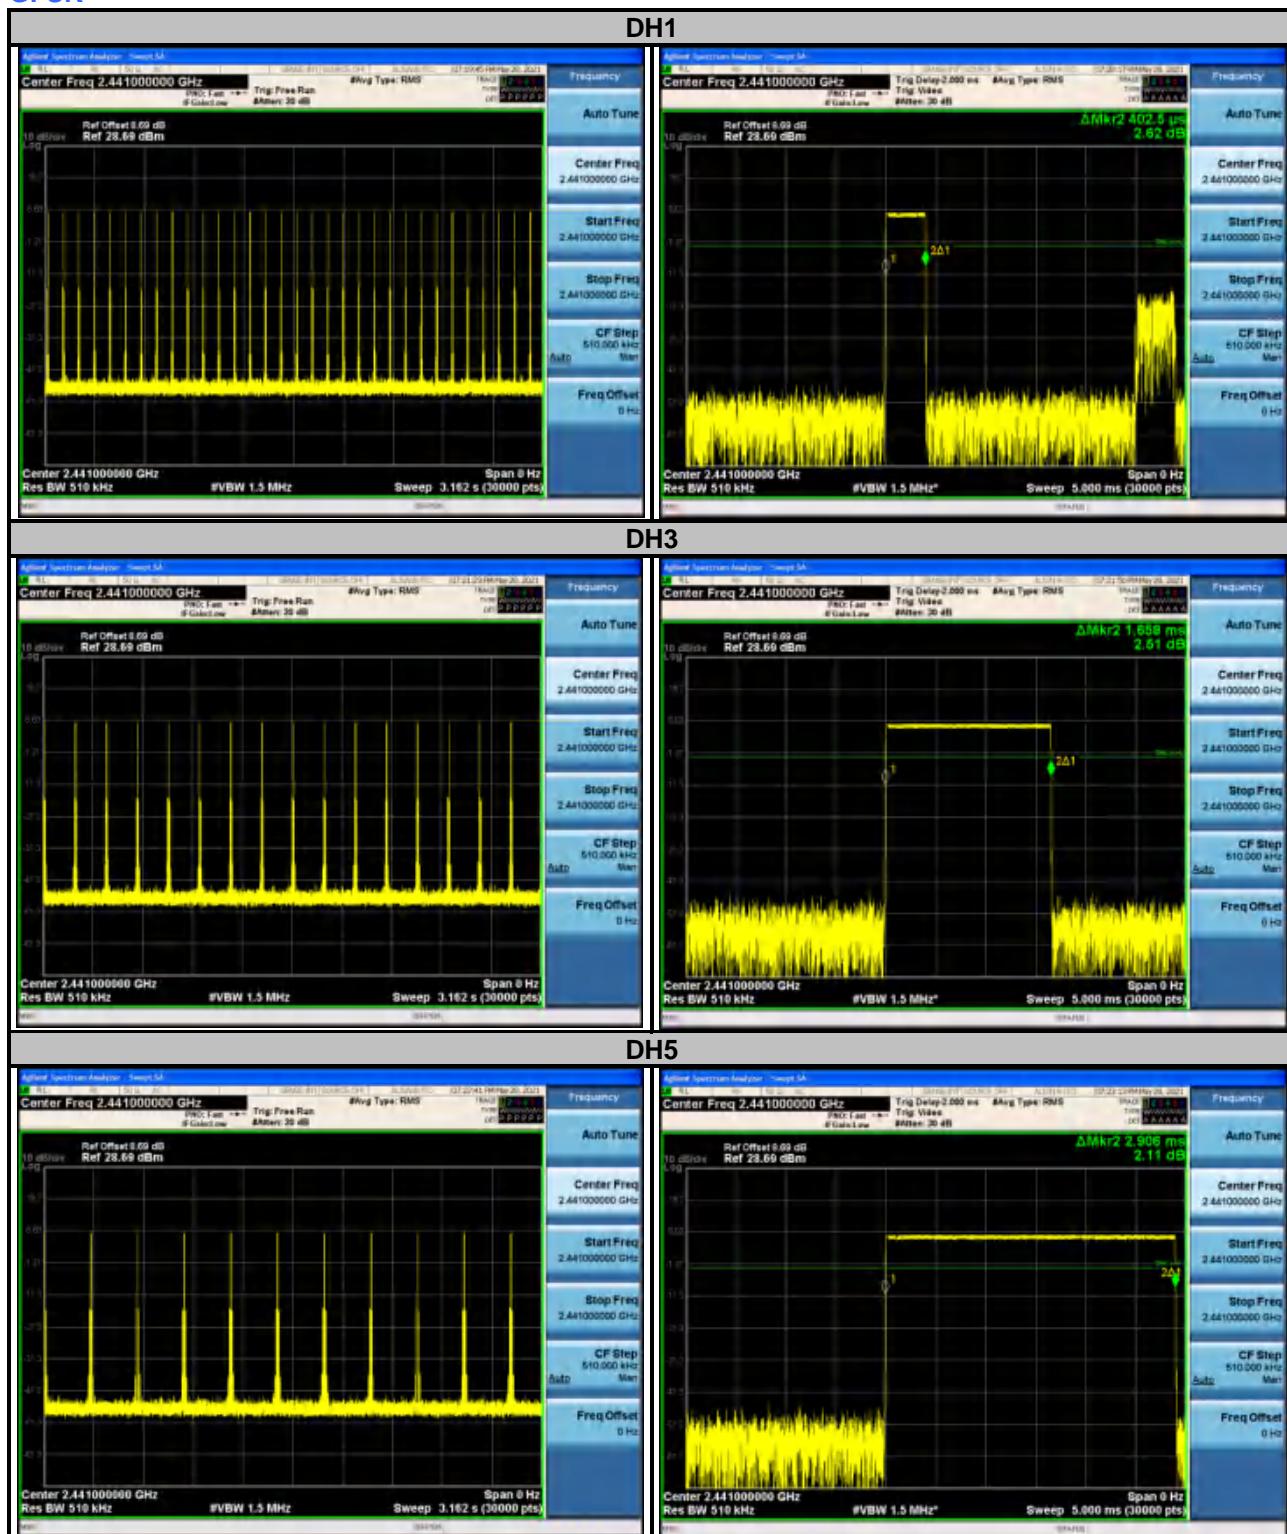



8DPSK

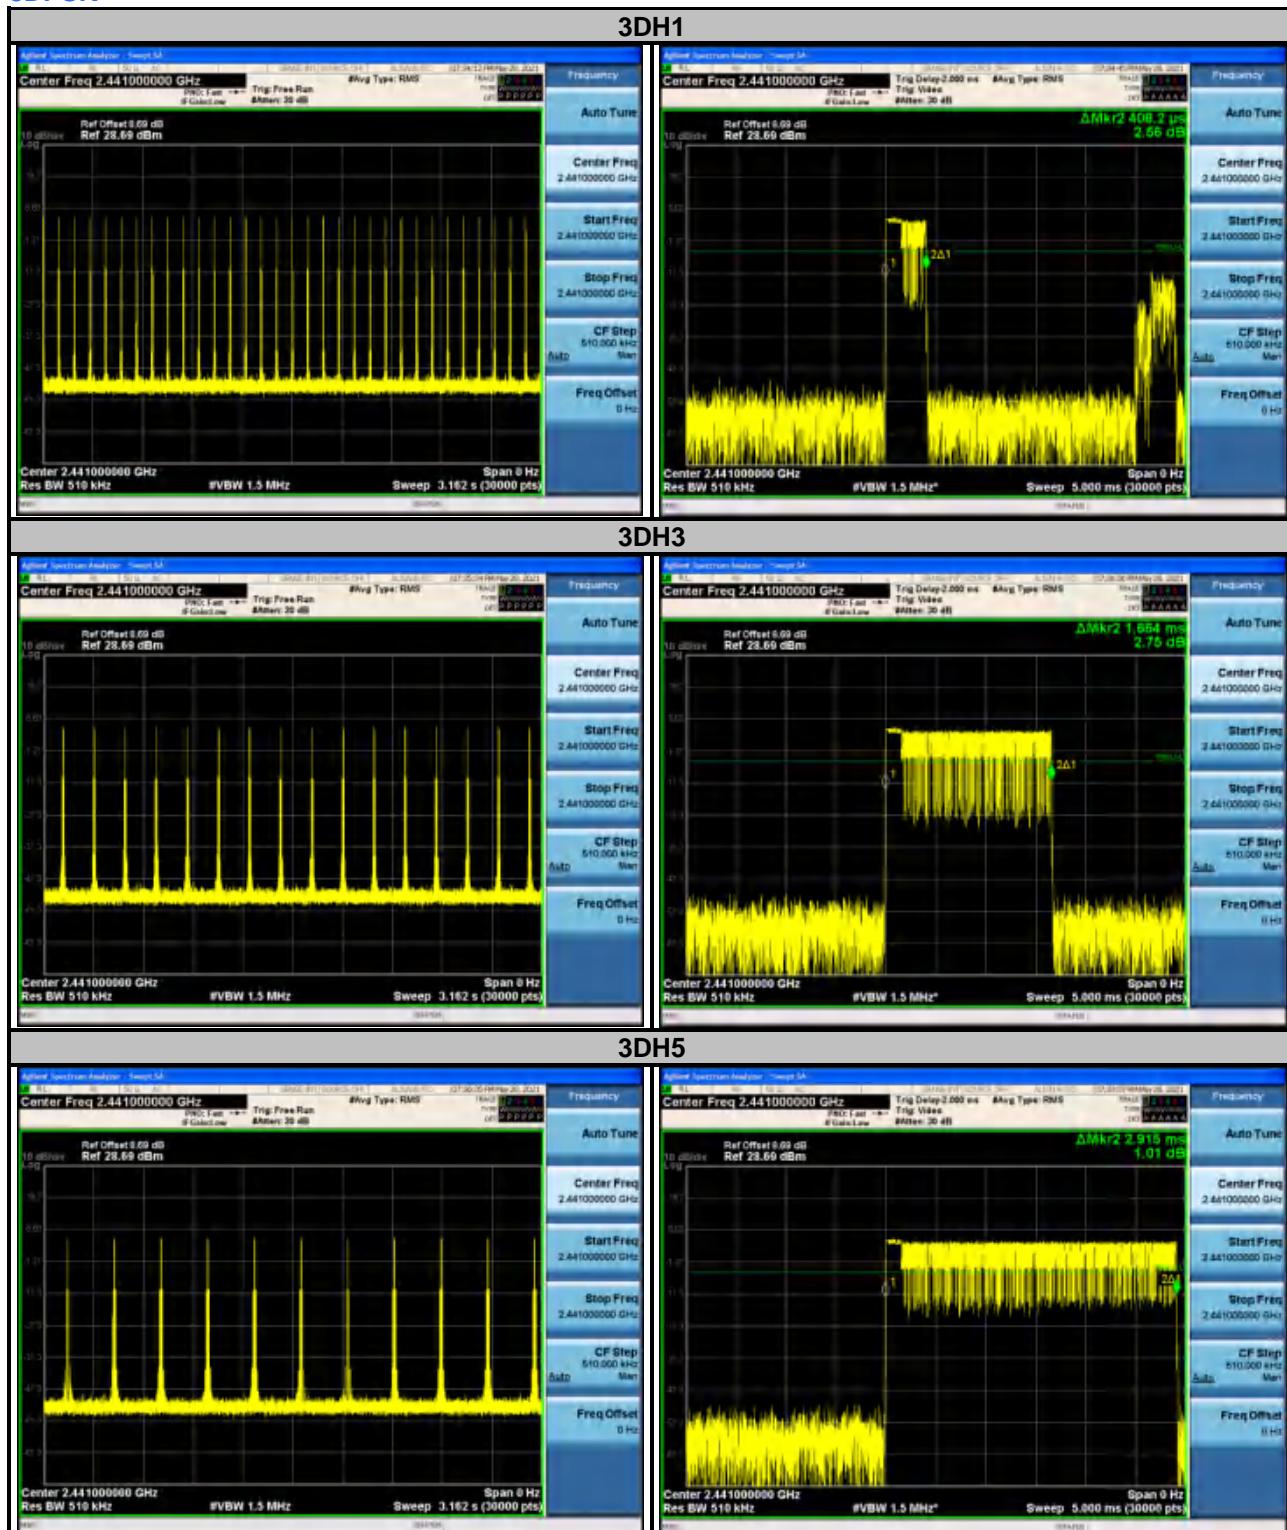




3.5 Channel Bandwidth

3.5.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5 MHz, if the 20 dB bandwidth of hopping channel is greater than 25 kHz, two-thirds 20 dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

3.5.2 Test Setup

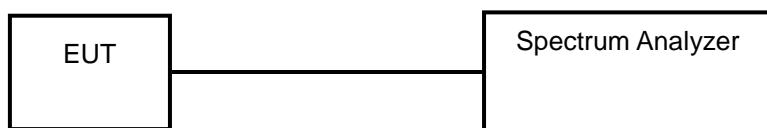

3.5.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.5.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

3.5.5 Deviation from Test Standard

No deviation.

3.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



3.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.996	1.281
39	2441	0.939	1.314
78	2480	0.948	1.305





3.6 Occupied Bandwidth Measurement

3.6.1 Test Setup



3.6.2 Test Instruments

Refer to section 5 to get information of above instrument

3.6.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

3.6.4 Deviation from Test Standard

No deviation.

3.6.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.6.6 Test Results

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.8861	1.1942
39	2441	0.8965	1.2017
78	2480	0.8979	1.2555






3.7 Hopping Channel Separation

3.7.1 Limits of Hopping Channel Separation Measurement

At least 25 kHz or two-third of 20 dB hopping channel bandwidth (whichever is greater).

3.7.2 Test Setup

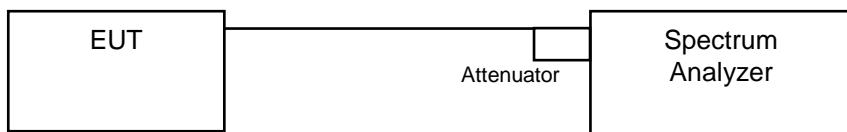

3.7.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.7.4 Test Procedure

Measurement Procedure REF

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

3.7.5 Deviation from Test Standard

No deviation.



3.7.6 Test Results

Channel No.	Frequency (MHz)	Adjacent Channel Separation (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.002	1.008	0.66	0.85	Pass
39	2441	0.993	0.996	0.62	0.86	Pass
78	2480	1.005	0.999	0.63	0.87	Pass

Note:The minimum limit is two-third 20 dB bandwidth.






3.8 Maximum Output Power

3.8.1 Limits of Maximum Output Power Measurement

The Maximum Output Power Measurement is 125mW.

3.8.2 Test Setup

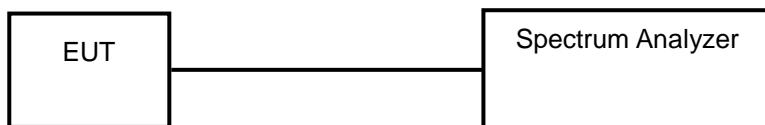

3.8.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.8.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1MHz RBW and 3 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

3.8.5 Deviation from Test Standard

No deviation.


3.8.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



3.8.7 Test Results

Channel No.	Freq. (MHz)	Output Power (mW)		Output Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	7.177	5.701	8.57	7.47	125	Pass
39	2441	7.744	6.251	8.89	7.96	125	Pass
78	2480	6.698	4.254	8.27	6.32	125	Pass

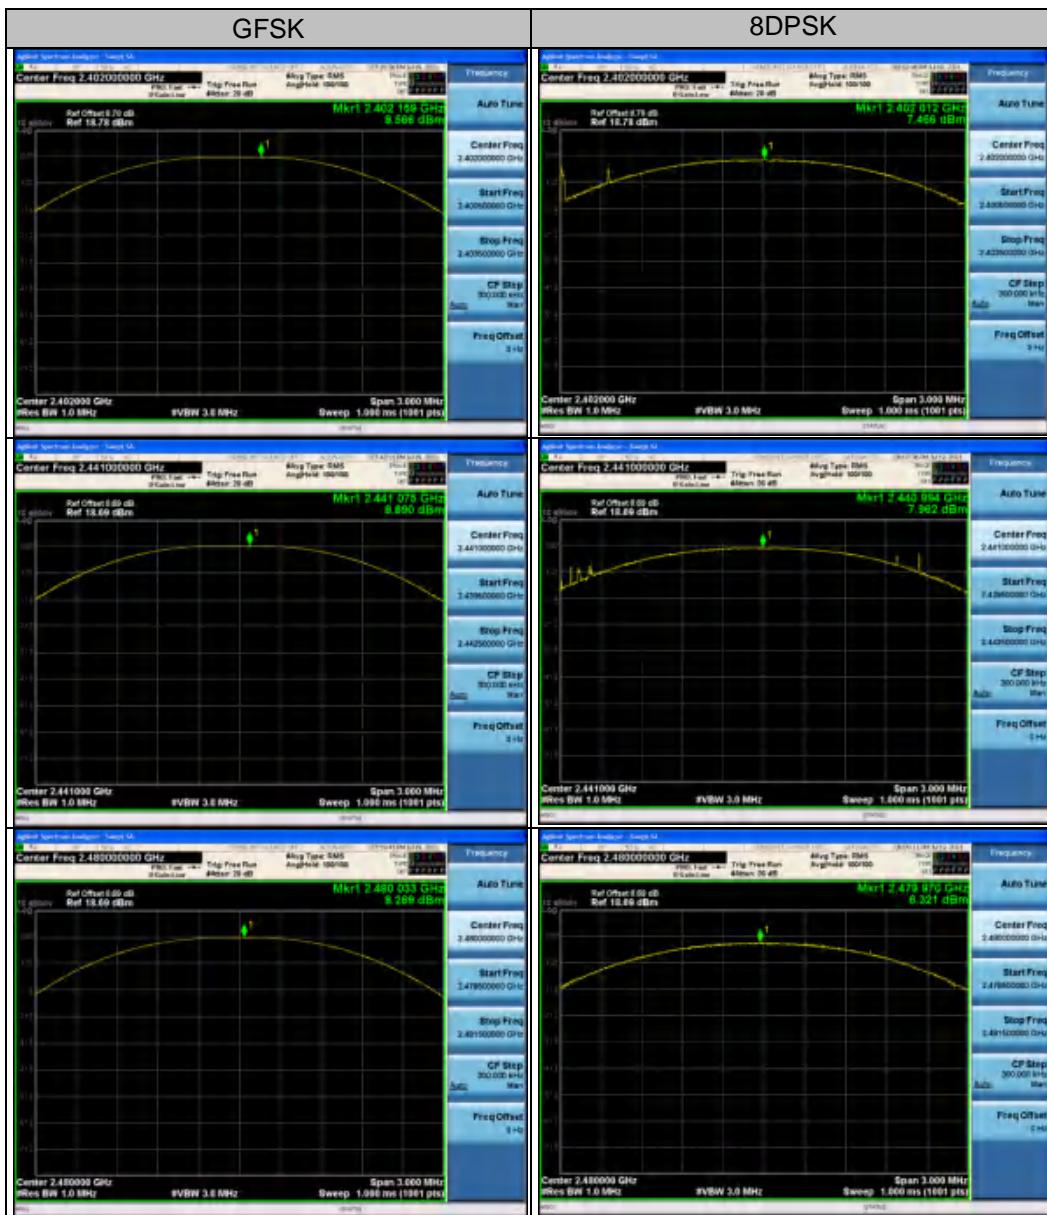



3.9 Conducted Out of Band Emission Measurement

3.9.1 Limits of Conducted Out of Band Emission Measurement

For average power:

Below -30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

For peak power:

Below -20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth)

3.9.2 Test Instruments

Refer to section 5 to get information of above instrument.

3.9.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

3.9.4 Deviation from Test Standard

No deviation.

3.9.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



3.9.6 Test Results


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK






8DPSK

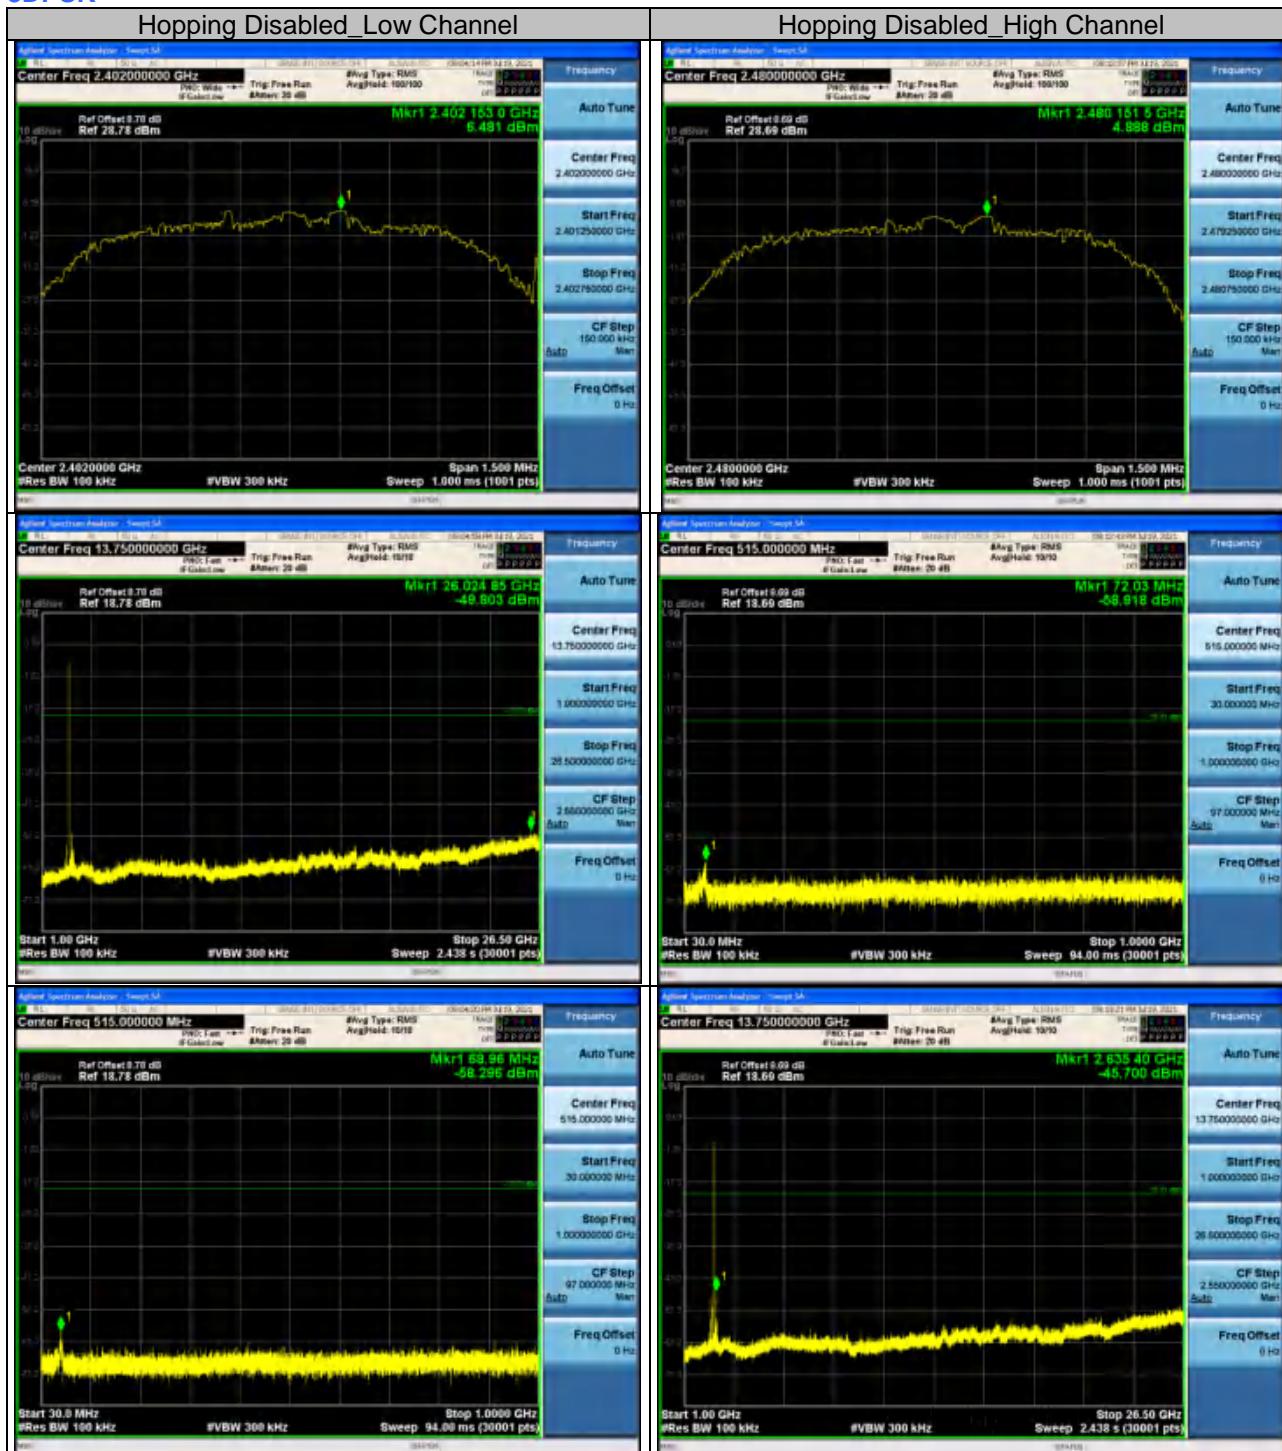




Bandedge: GFSK

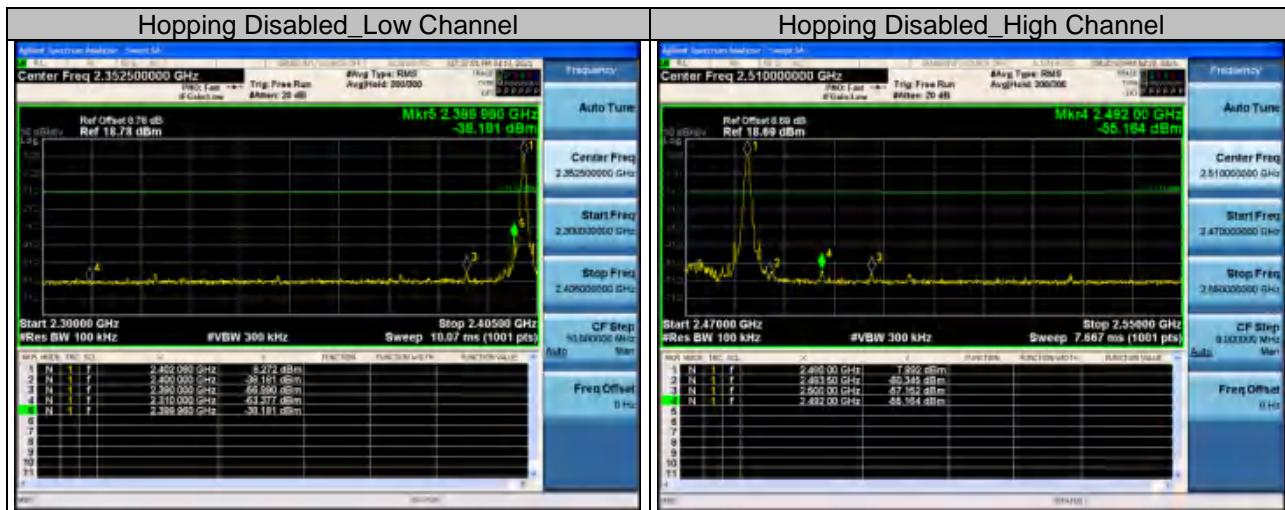




GFSK

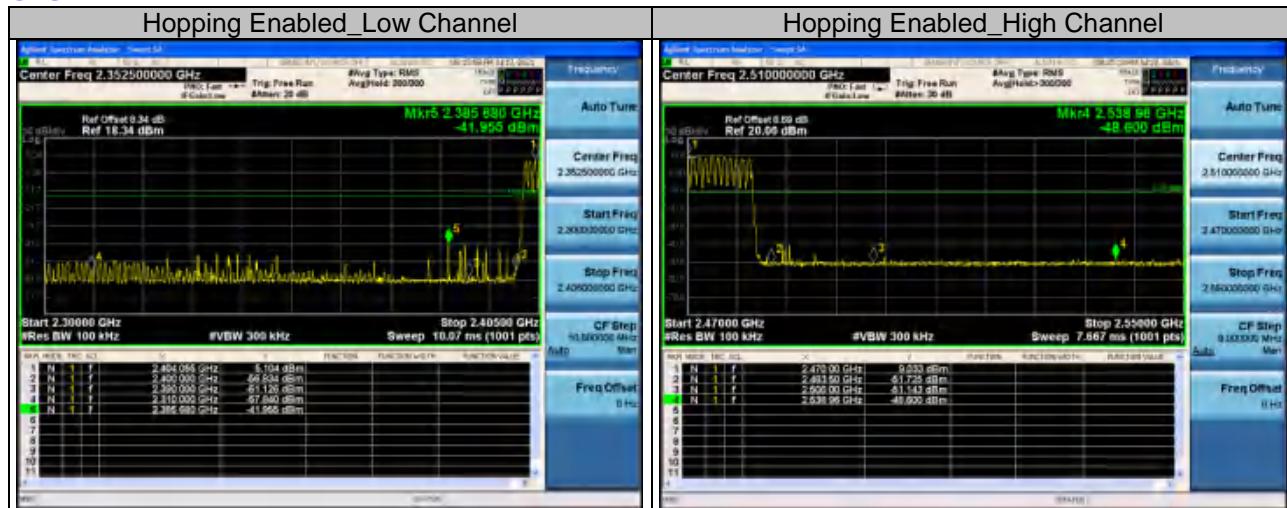

8DPSK

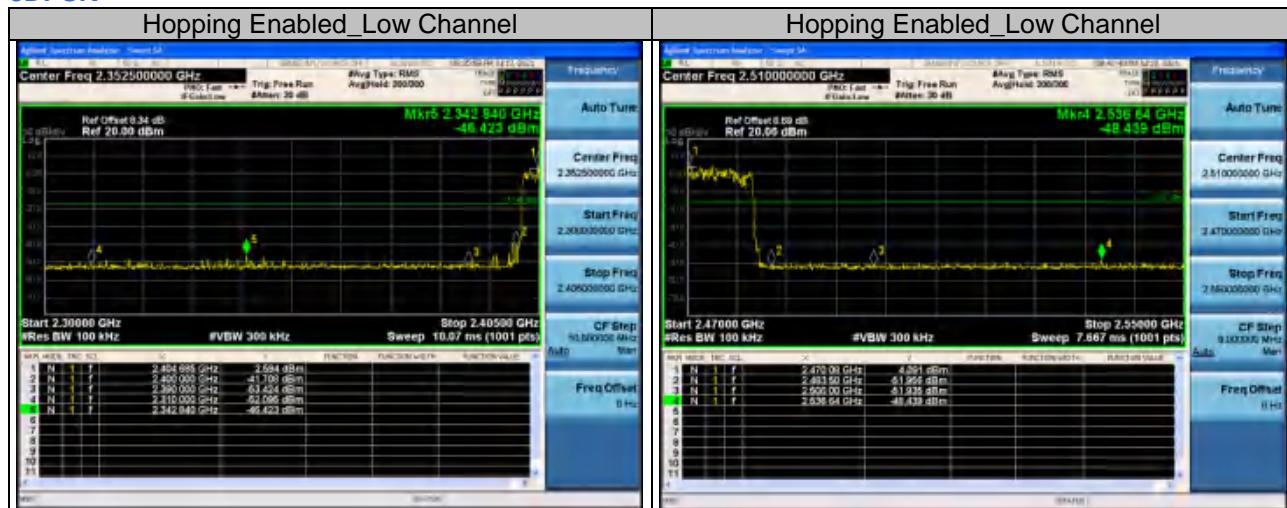



HWA-HSING Test Report No.:201116EL17-RF-US-03

4 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)
Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park,](#)
[HuangJiang Town, Dongguan, China](#)

Tel: [0769-83078199](#)
Web.: [www.hwa-hsing.com](#)
E-Mail: customerservice.dg@hwa-hsing.com

Release
[Ver. 1.2](#)



5 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Due Date of Calibration
Spectrum Keysight	N9020A	MY51240612	2021/09/16
Spectrum Analyzer Rohde&Schwarz	FSV-40N	101783	2021/09/16
Power Meter 10Hz~18GHz Tonscend	JS0806-2	188060126	2021/09/16
Signal generator Keysight	E4421B	GB40051020	2021/09/16
Signal generator Keysight	N5182A	MY47420944	2021/09/16
Test Software Tonscend	JS0806-2	NA	NA
Hygrothermograph Yuhuaze	HTC-1	NA	2021/09/16

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.
2. The test was performed in Chamber 1.



Appendix – Information on the Testing Laboratories

We, [Hwa-Hsing \(Dongguan\) Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Contact Tel: [0769-83078199](#)

Email: CustomerService.dg@hwa-hsing.com

Web Site: www.hwa-hsing.com

The address and road map of all our labs can be found in our web site also.

--- END ---