






BLE_125K-Ant1-2480-7000-9000-PASS

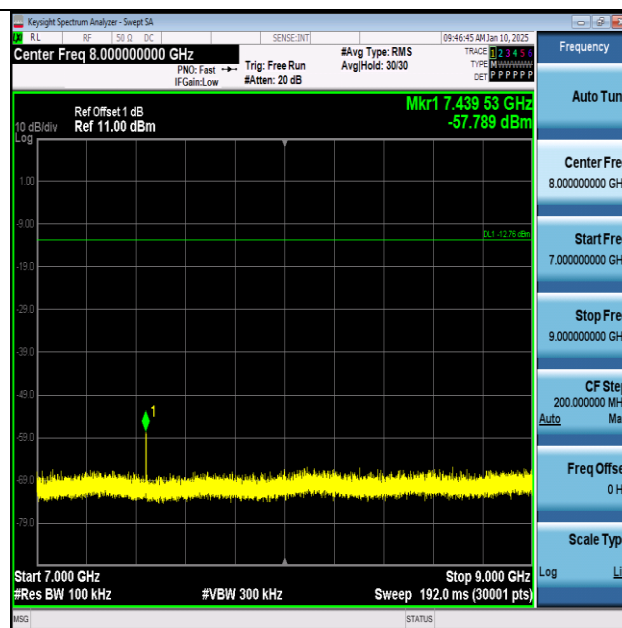


BLE_125K-Ant1-2480-9000-11000-PASS

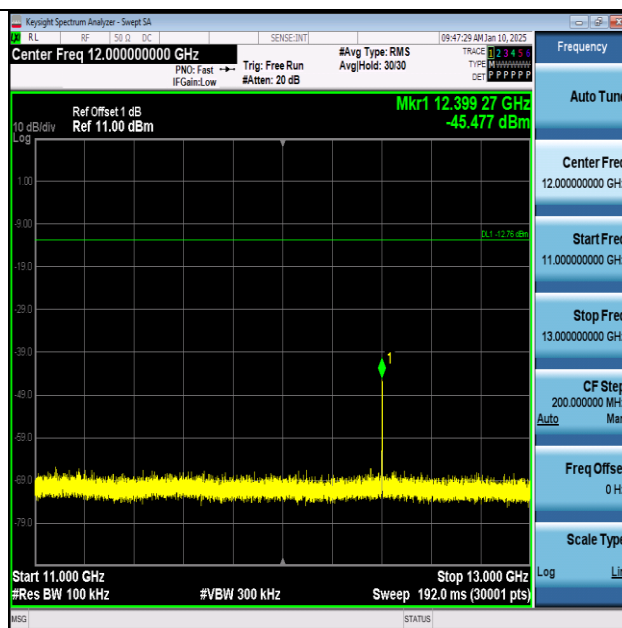

BLE_125K-Ant1-2480-11000~13000-PASS

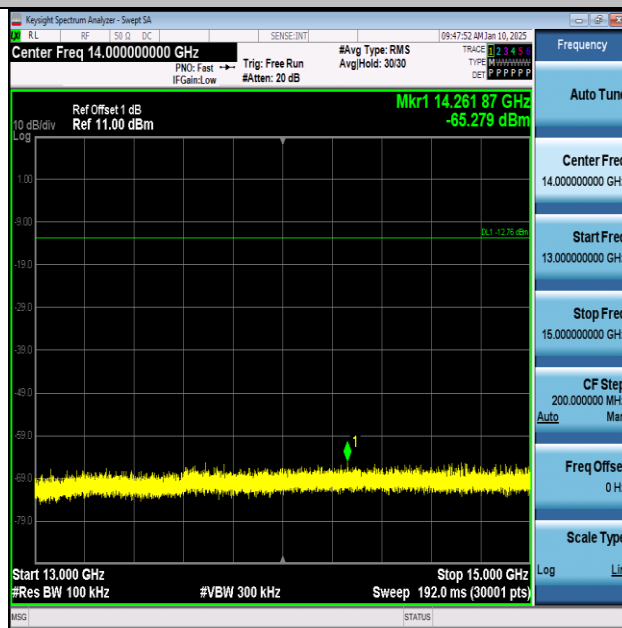


BLE_125K-Ant1-2480-13000~15000-PASS

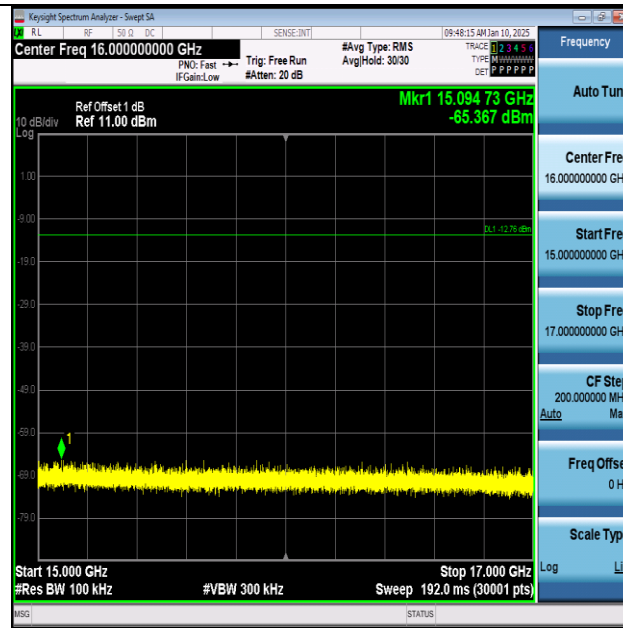


BLE_125K-Ant1-2480-15000~17000-PASS




BLE_125K-Ant1-2480-17000~19000-PASS

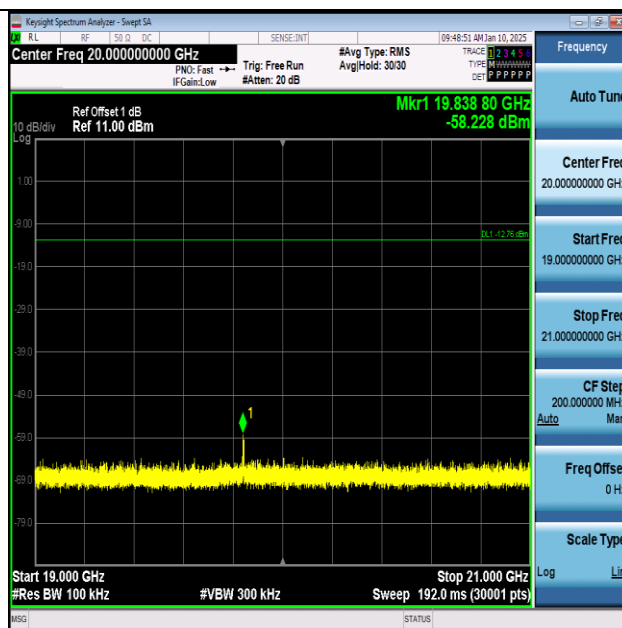


BLE_125K-Ant1-2480-19000~21000-PASS

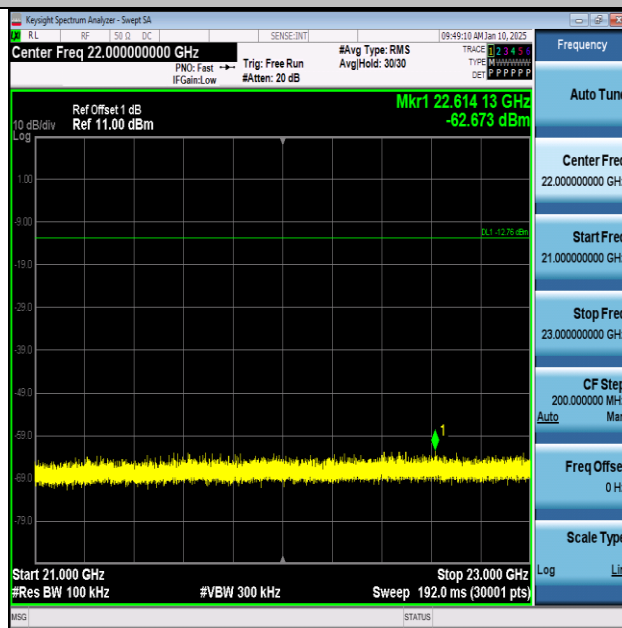


BLE_125K-Ant1-2480-21000~23000-PASS

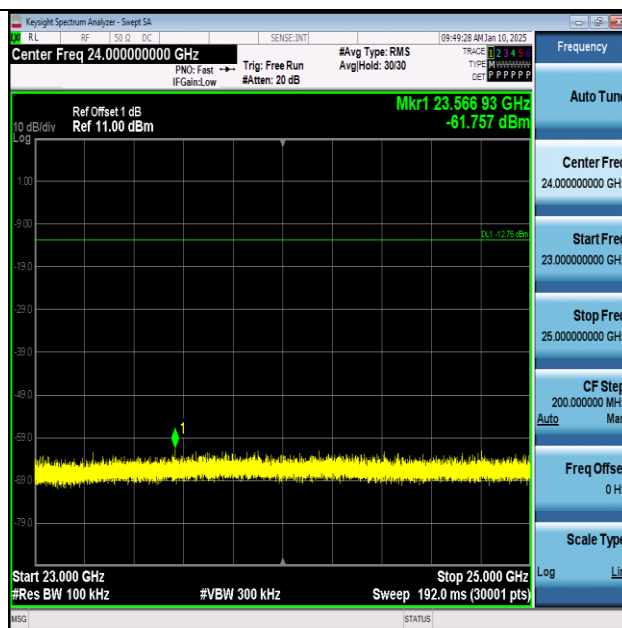


BLE_125K-Ant1-2480-23000~25000-PASS

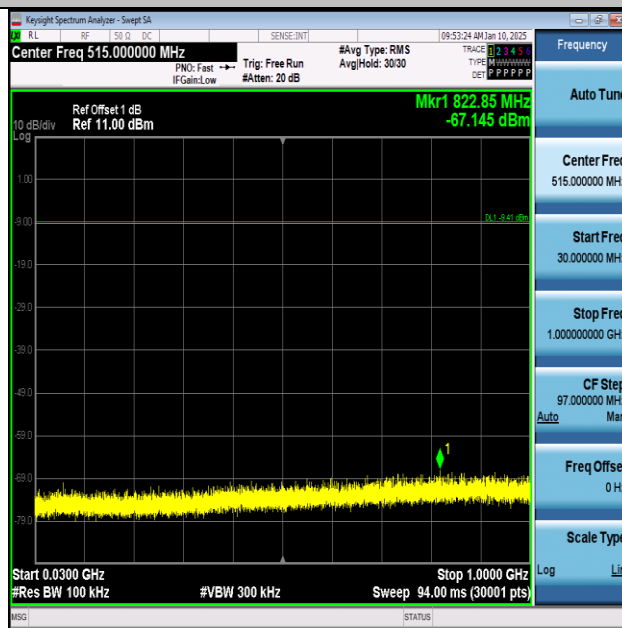


BLE_500K-Ant1-2402-30~1000-PASS

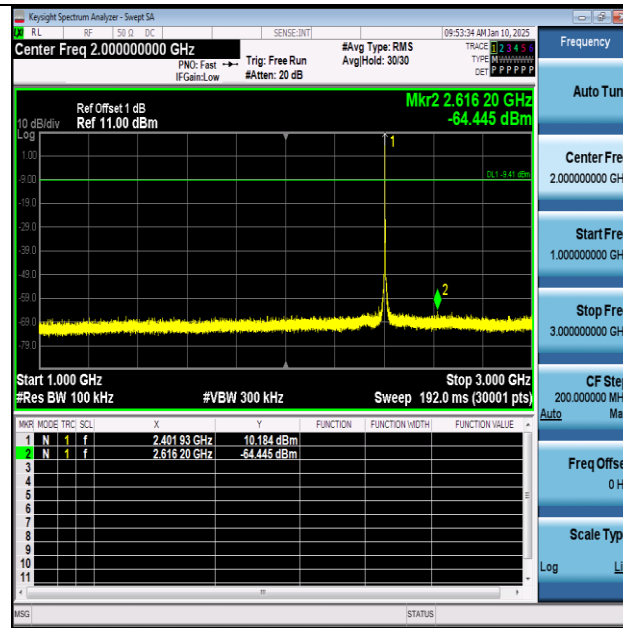


BLE_500K-Ant1-2402-1000~3000-PASS

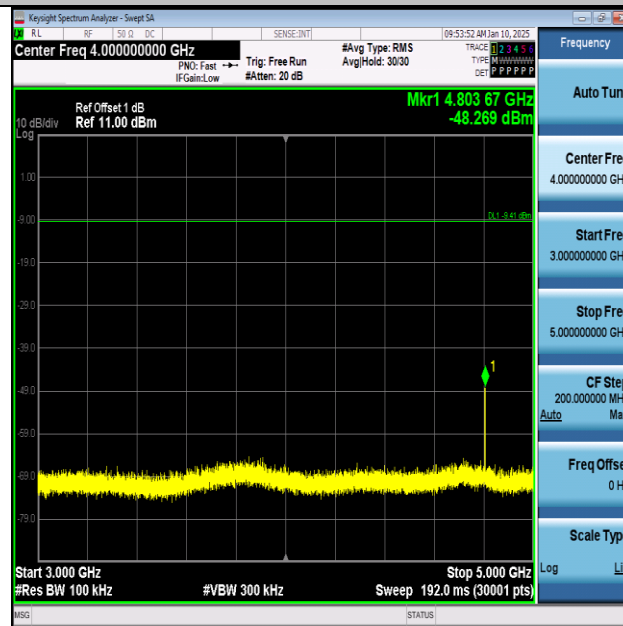


BLE_500K-Ant1-2402-3000~5000-PASS

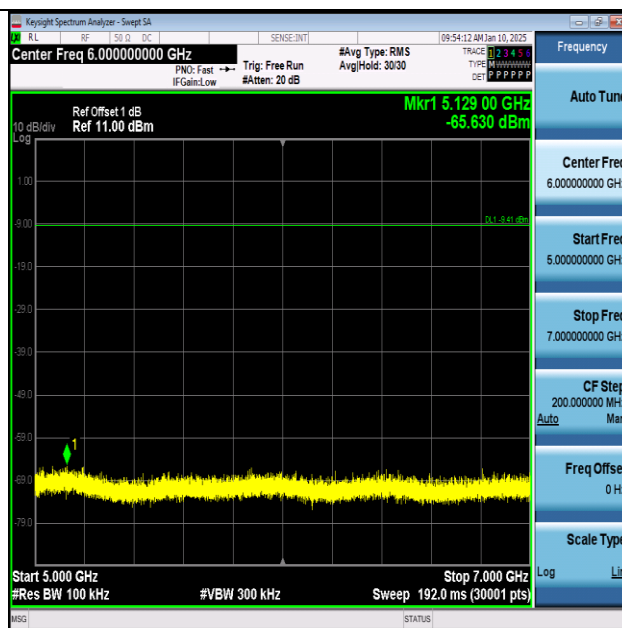


BLE_500K-Ant1-2402-5000~7000-PASS

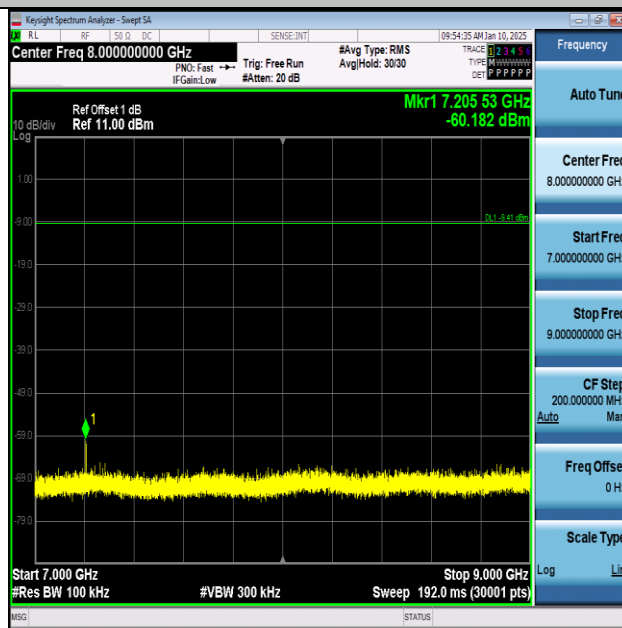


BLE_500K-Ant1-2402-7000~9000-PASS

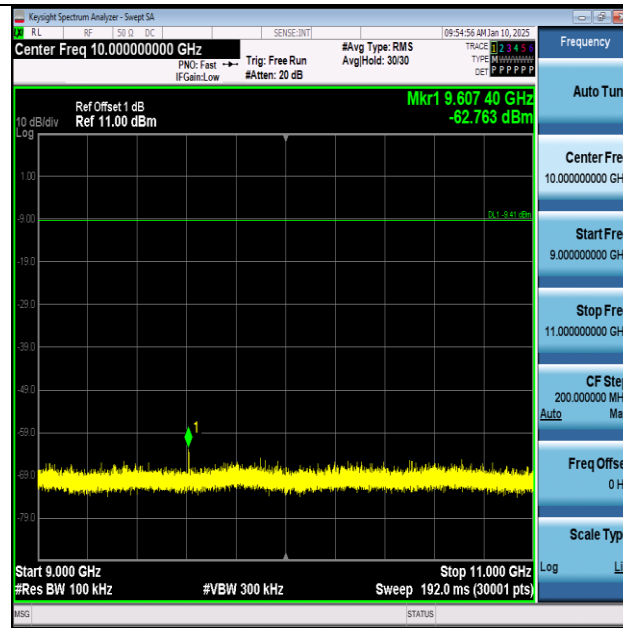


BLE_500K-Ant1-2402-9000~11000-PASS

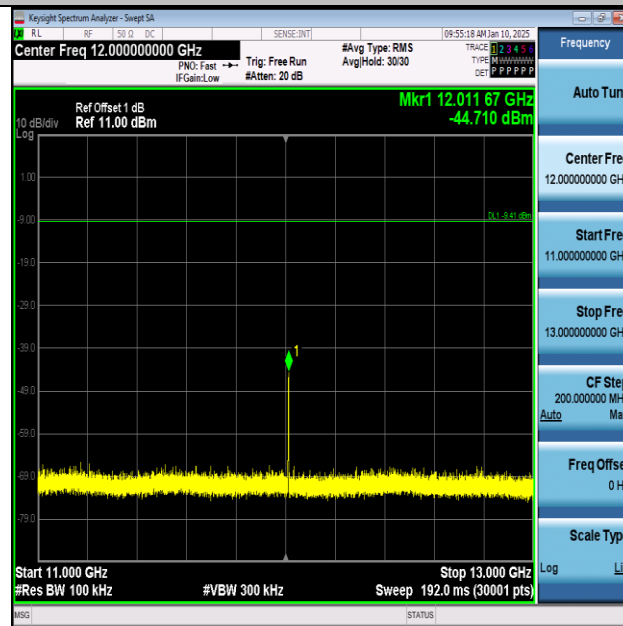


BLE_500K-Ant1-2402-11000~13000-PASS

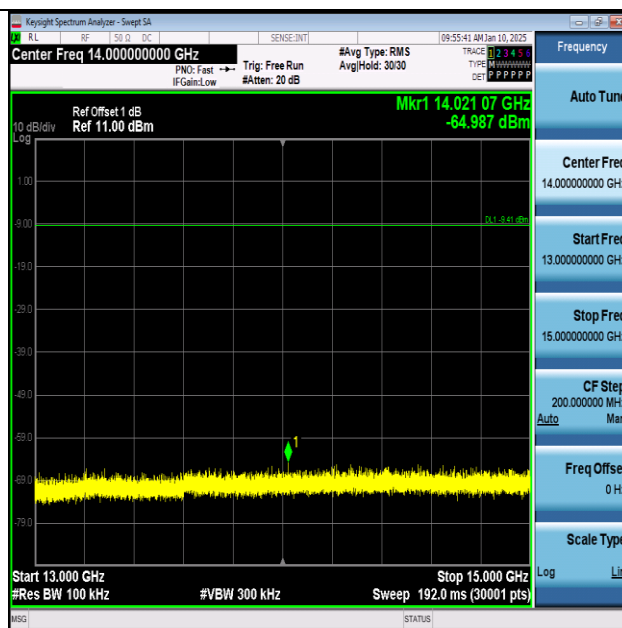


BLE_500K-Ant1-2402-13000~15000-PASS

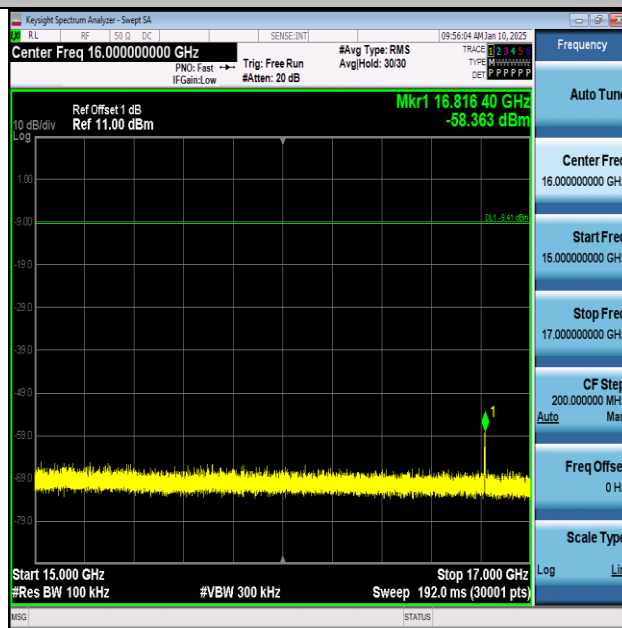


BLE_500K-Ant1-2402-15000~17000-PASS

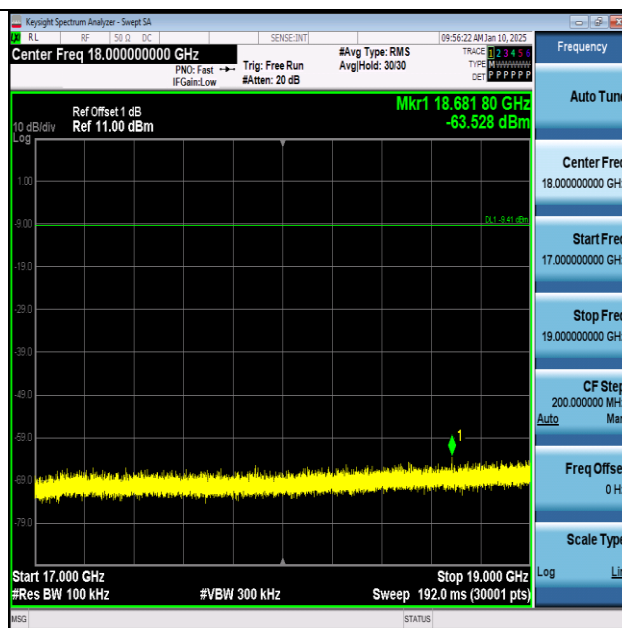


BLE_500K-Ant1-2402-17000~19000-PASS

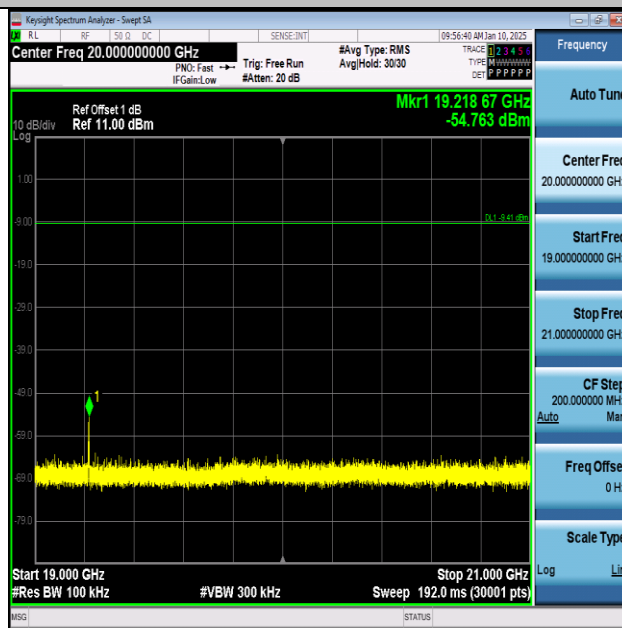


BLE_500K-Ant1-2402-19000~21000-PASS

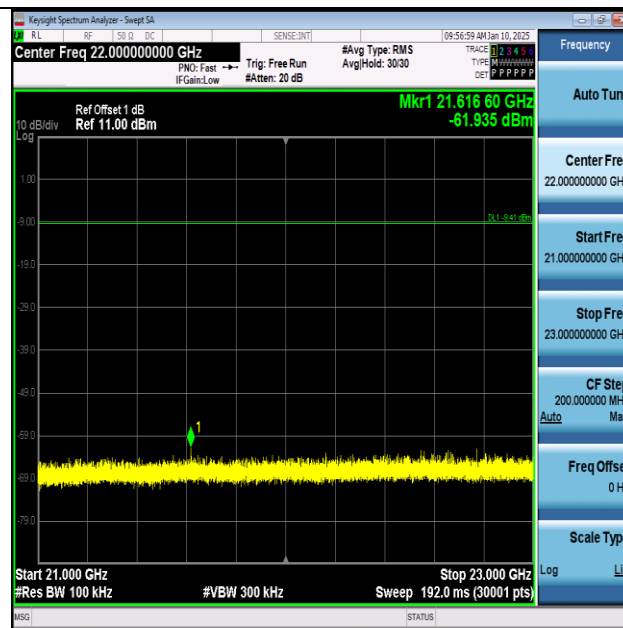


BLE_500K-Ant1-2402-21000~23000-PASS

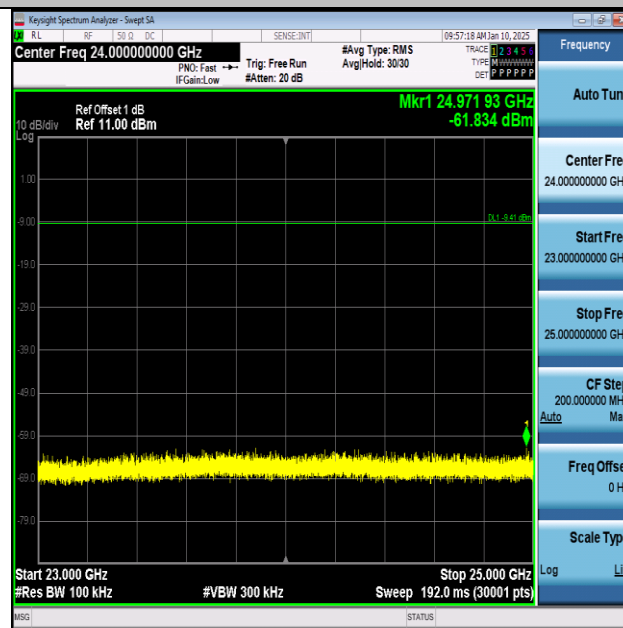


BLE_500K-Ant1-2402-23000~25000-PASS

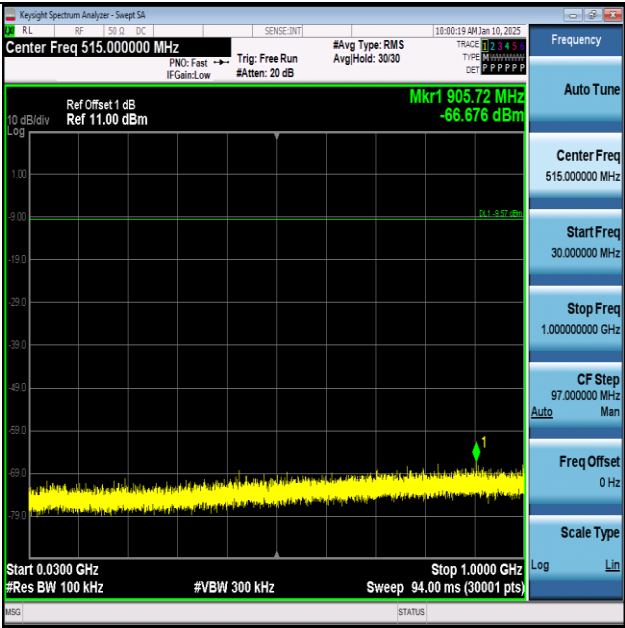


BLE_500K-Ant1-2440-30~1000-PASS

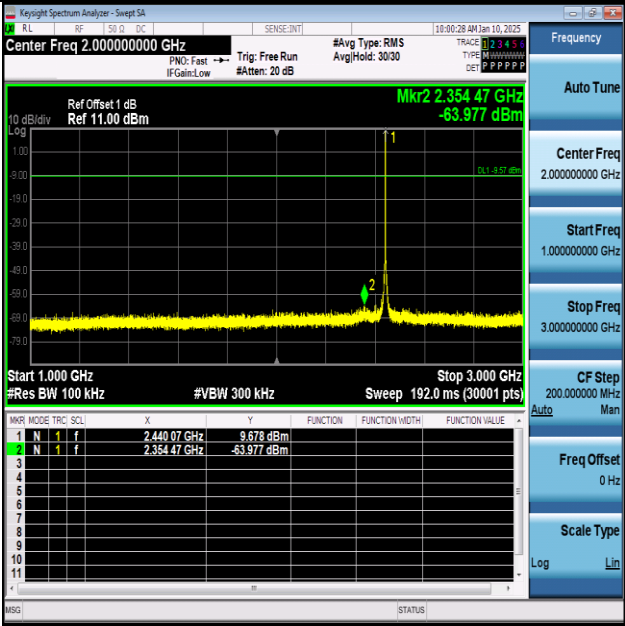


BLE_500K-Ant1-2440-1000~3000-PASS

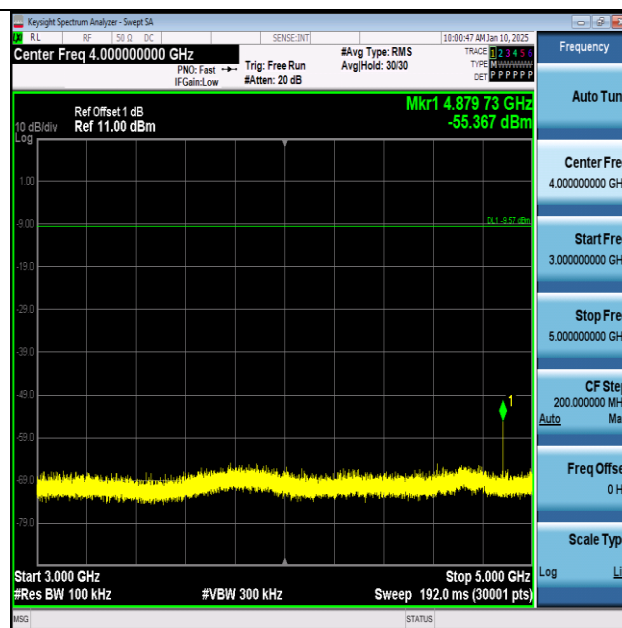


BLE_500K-Ant1-2440-3000~5000-PASS

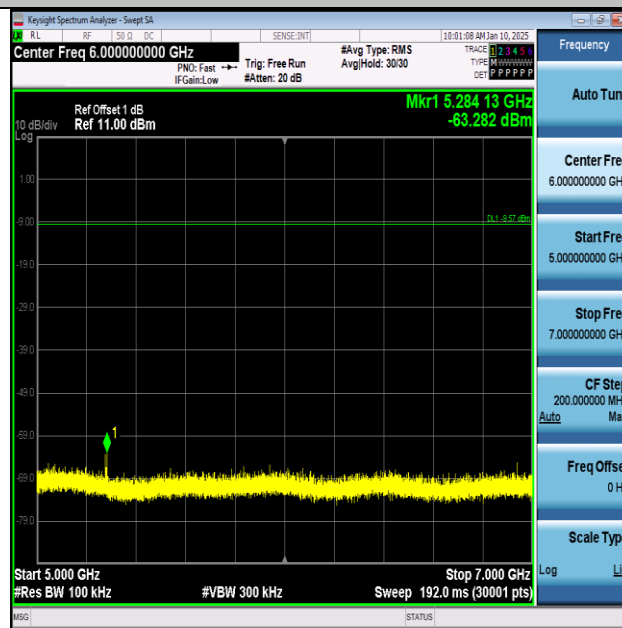


BLE_500K-Ant1-2440-5000~7000-PASS

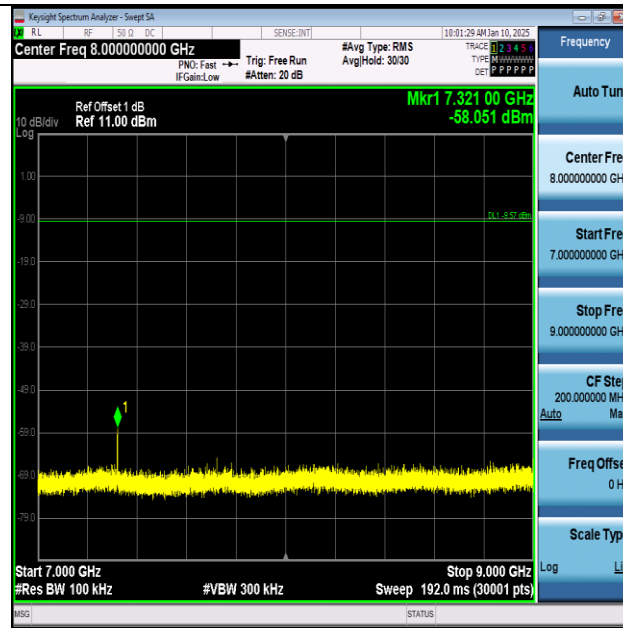


BLE_500K-Ant1-2440-7000~9000-PASS

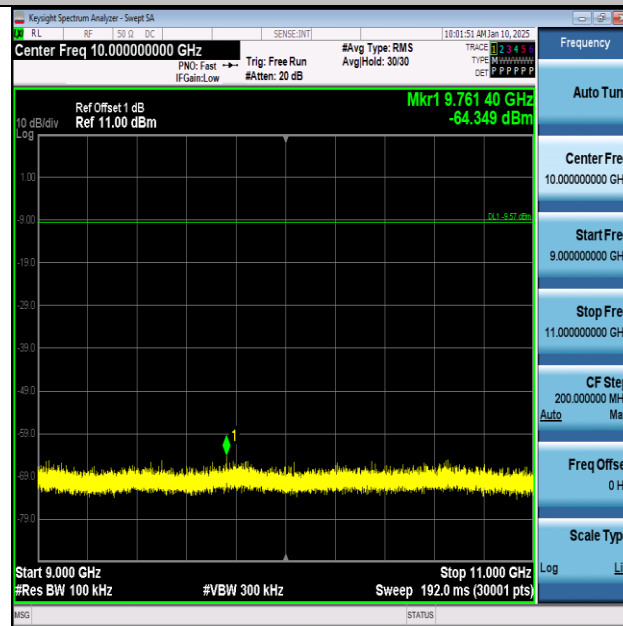


BLE_500K-Ant1-2440-9000~11000-PASS

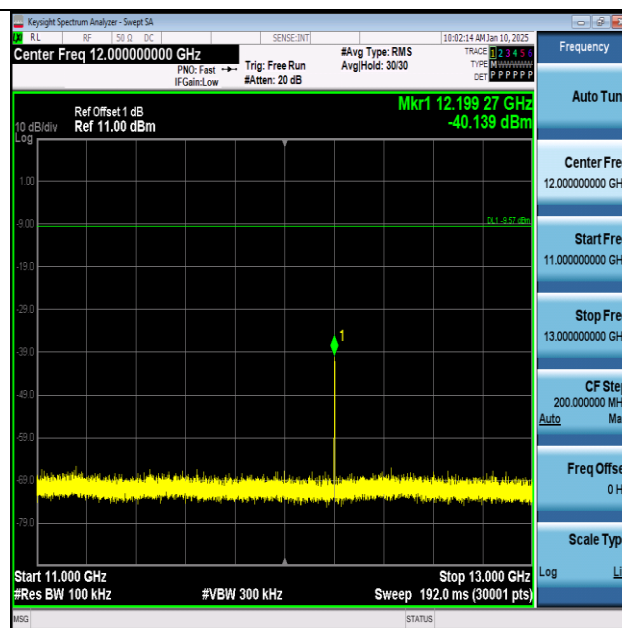

BLE_500K-Ant1-2440-11000~13000-PASS

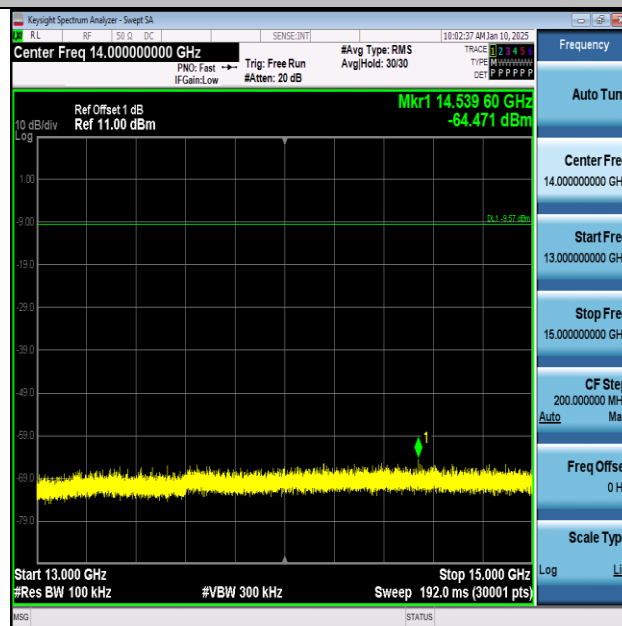


BLE_500K-Ant1-2440-13000~15000-PASS

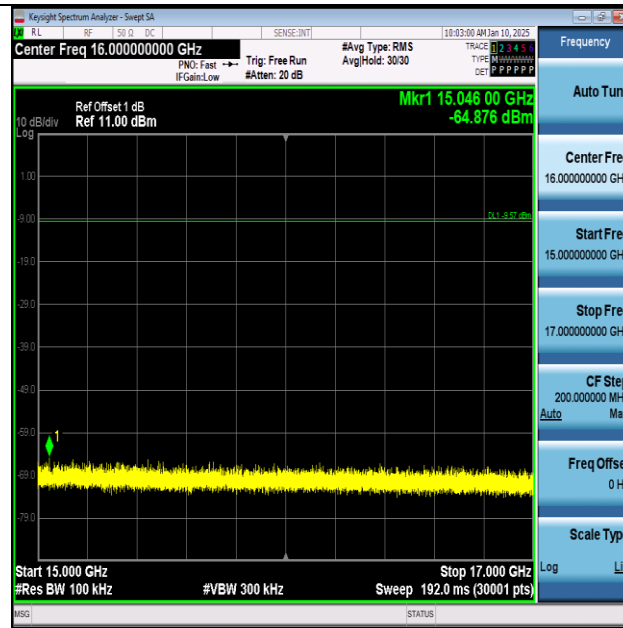


BLE_500K-Ant1-2440-15000~17000-PASS




BLE_500K-Ant1-2440-17000~19000-PASS

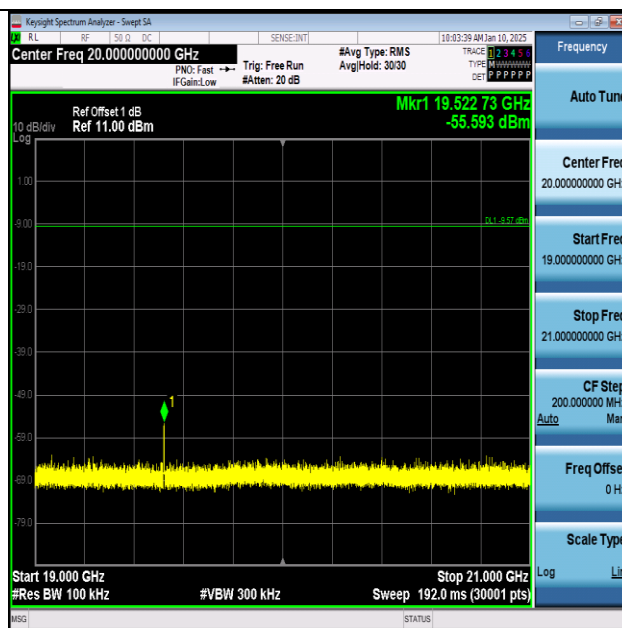


BLE_500K-Ant1-2440-19000~21000-PASS

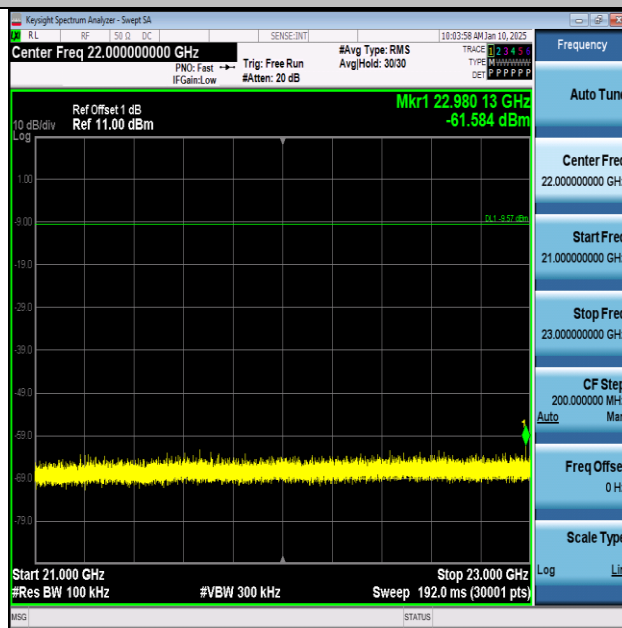


BLE_500K-Ant1-2440-21000~23000-PASS

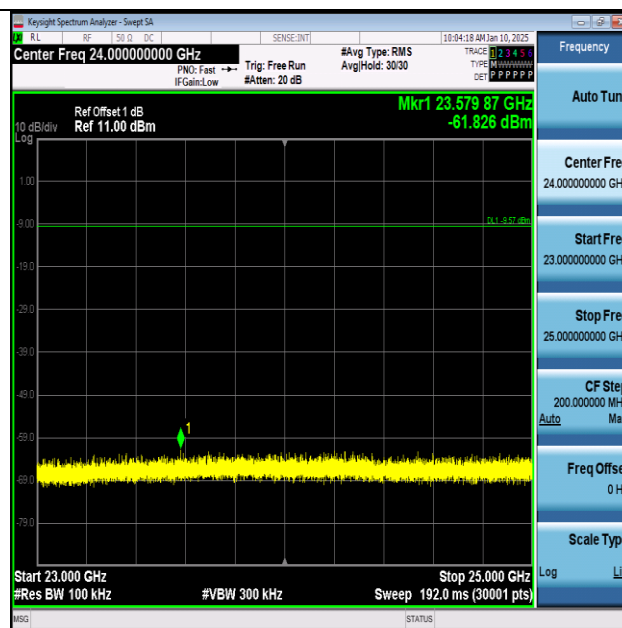


BLE_500K-Ant1-2440-23000~25000-PASS

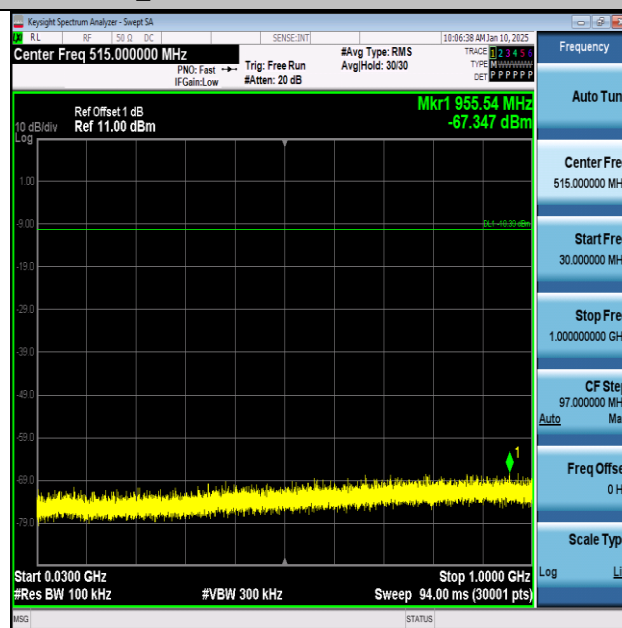


BLE_500K-Ant1-2480-30~1000-PASS

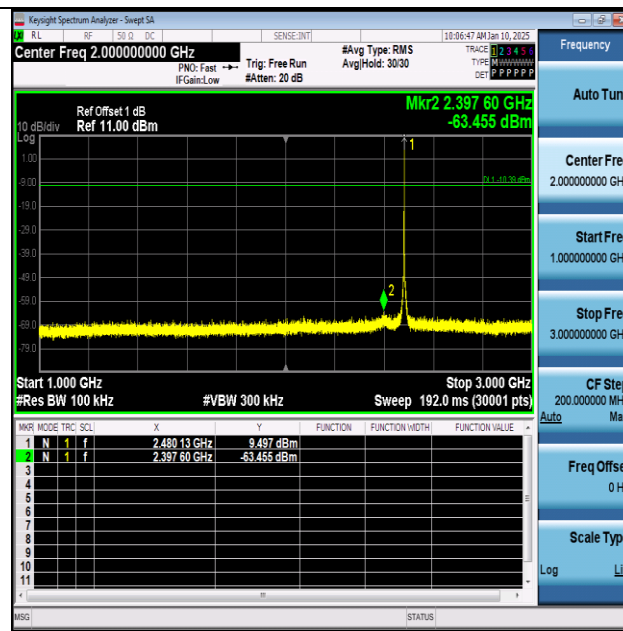


BLE_500K-Ant1-2480-1000~3000-PASS

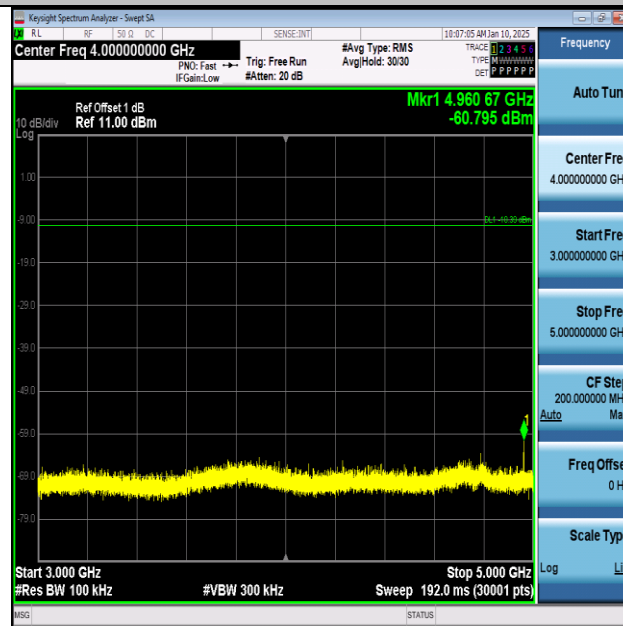


BLE_500K-Ant1-2480-3000~5000-PASS

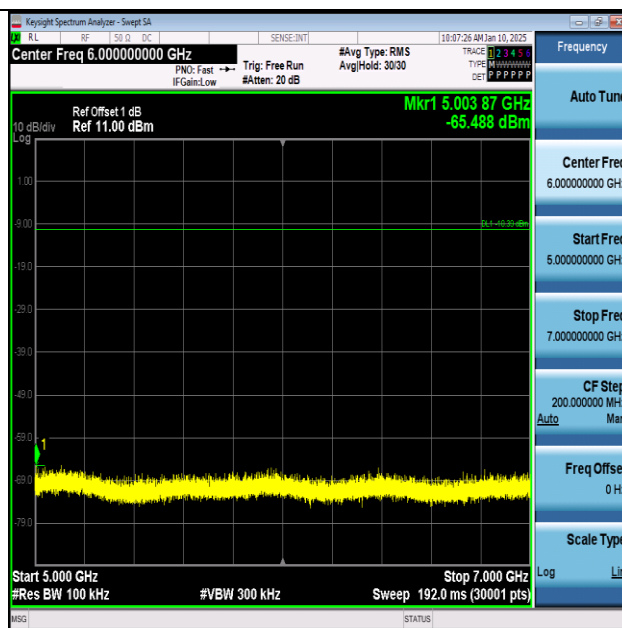


BLE_500K-Ant1-2480-5000~7000-PASS

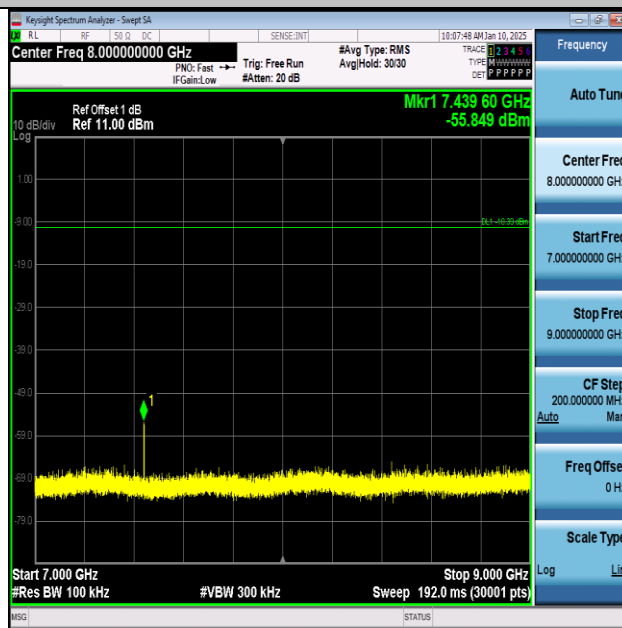


BLE_500K-Ant1-2480-7000~9000-PASS

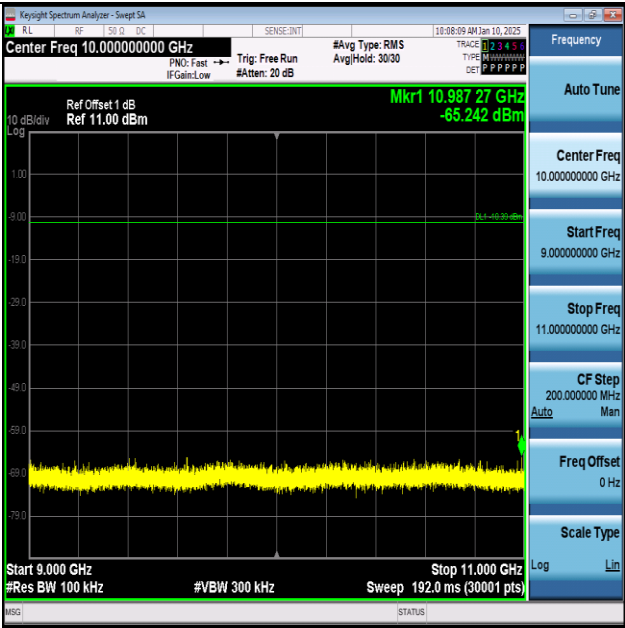


BLE_500K-Ant1-2480-9000~11000-PASS

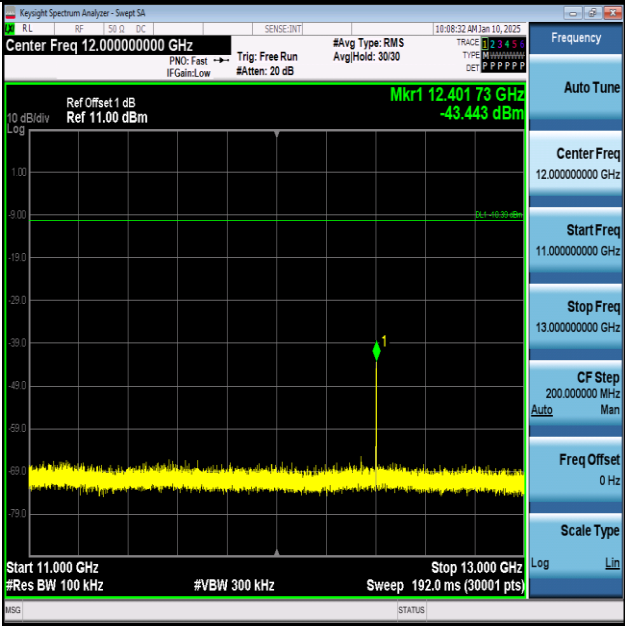


BLE_500K-Ant1-2480-11000~13000-PASS

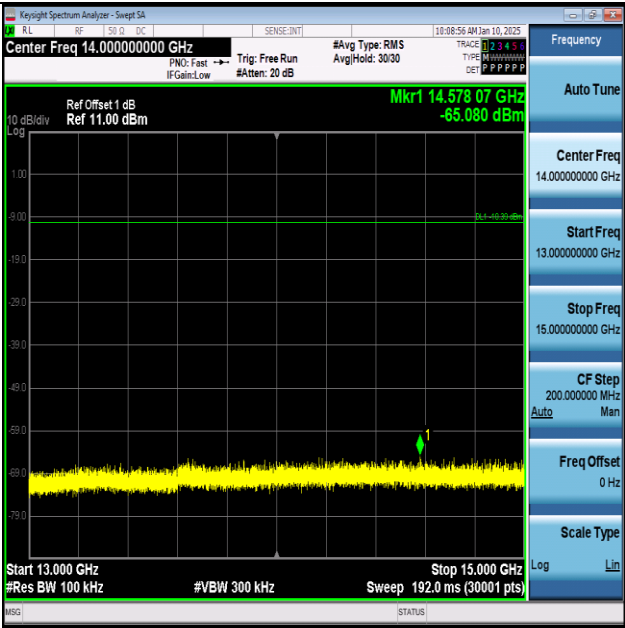


BLE_500K-Ant1-2480-13000~15000-PASS

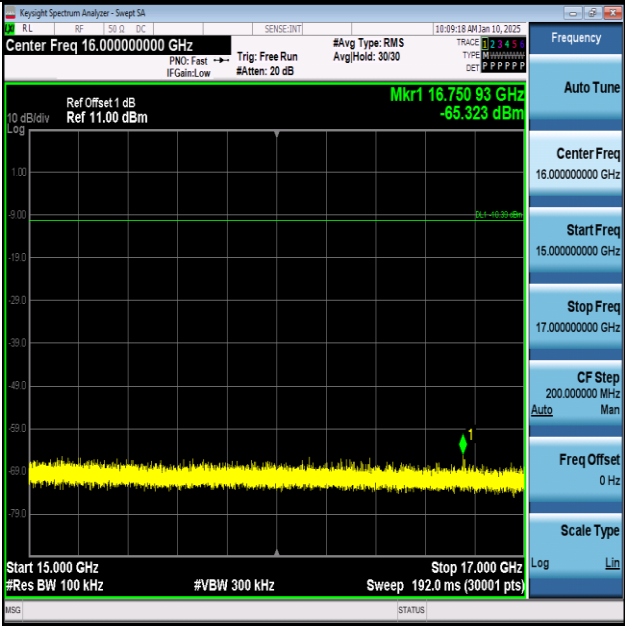


BLE_500K-Ant1-2480-15000~17000-PASS

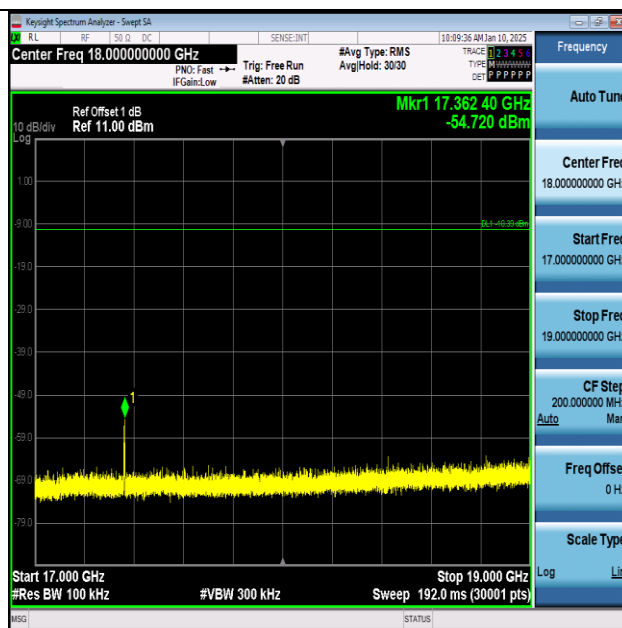


BLE_500K-Ant1-2480-17000~19000-PASS

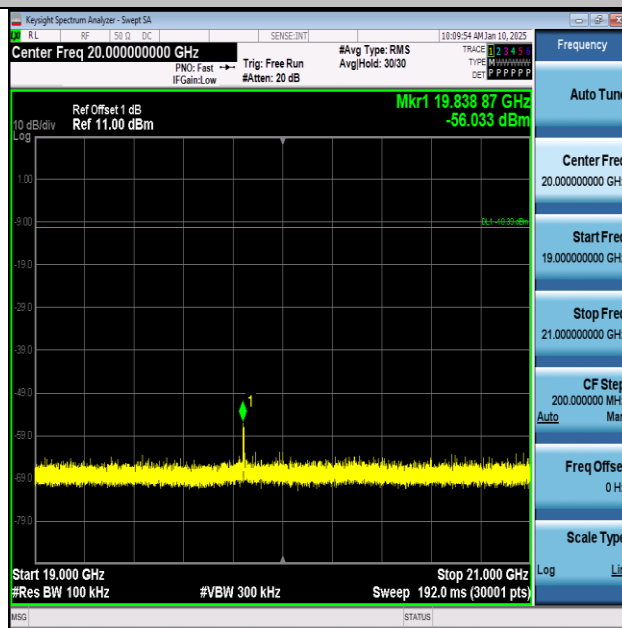

BLE_500K-Ant1-2480-19000~21000-PASS

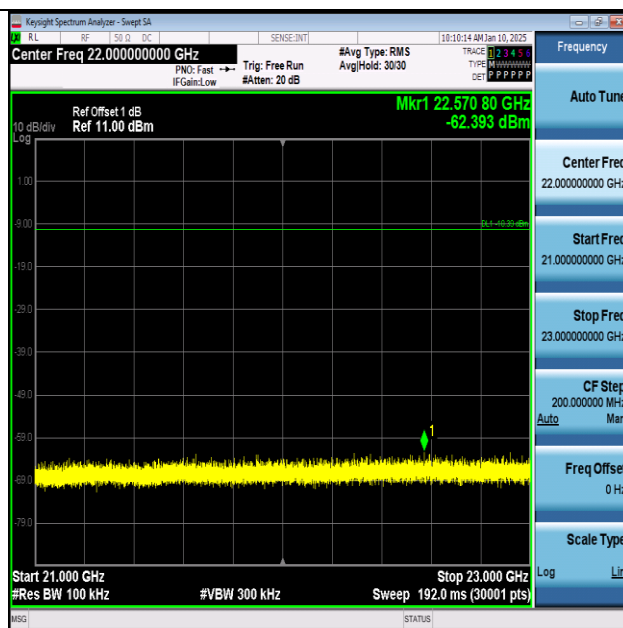


BLE_500K-Ant1-2480-21000~23000-PASS

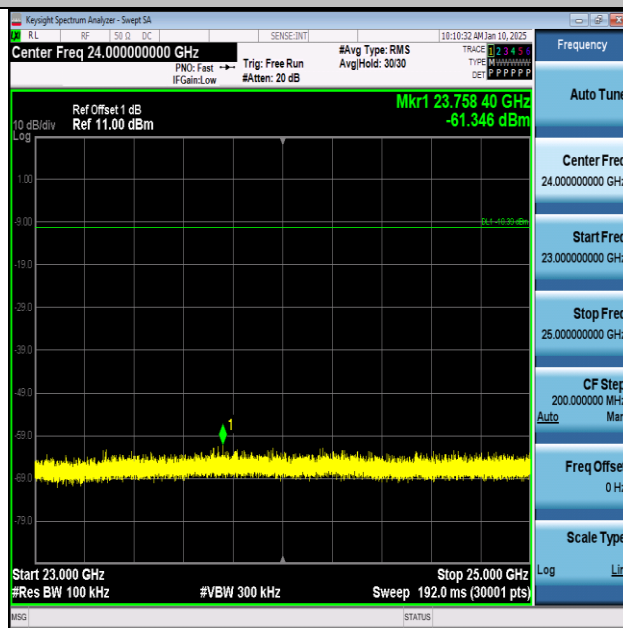


BLE_500K-Ant1-2480-23000~25000-PASS

Appendix G: Duty Cycle


TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	30.00	0.00	100	0.00
BLE_1M	Ant1	2440	30.00	0.00	100	0.00
BLE_1M	Ant1	2480	30.00	0.00	100	0.00
BLE_2M	Ant1	2402	30.00	0.00	100	0.00
BLE_2M	Ant1	2440	30.00	0.00	100	0.00
BLE_2M	Ant1	2480	30.00	0.00	100	0.00
BLE_125K	Ant1	2402	30.00	0.00	100	0.00
BLE_125K	Ant1	2440	30.00	0.00	100	0.00
BLE_125K	Ant1	2480	30.00	0.00	100	0.00
BLE_500K	Ant1	2402	30.00	0.00	100	0.00
BLE_500K	Ant1	2440	30.00	0.00	100	0.00
BLE_500K	Ant1	2480	30.00	0.00	100	0.00

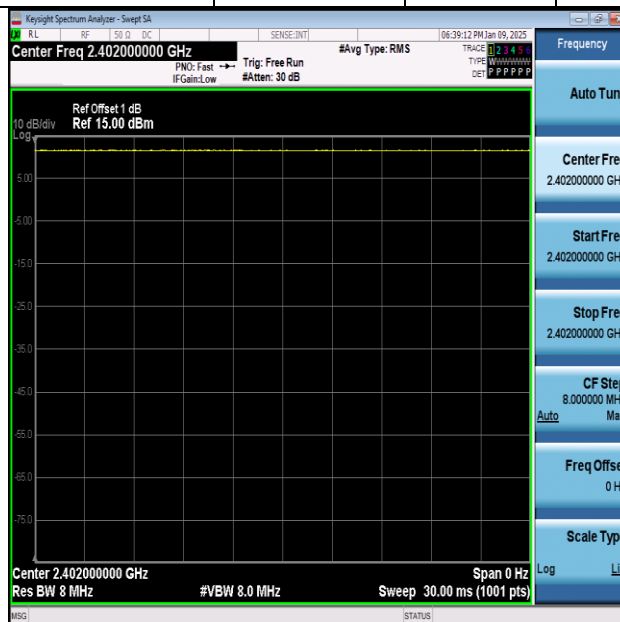


NTNV-BLE_1M-Ant1-2402

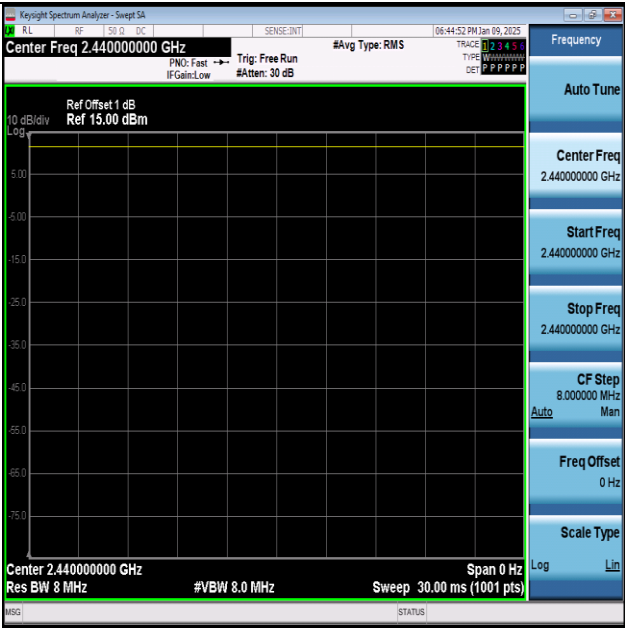


NTNV-BLE_1M-Ant1-2440

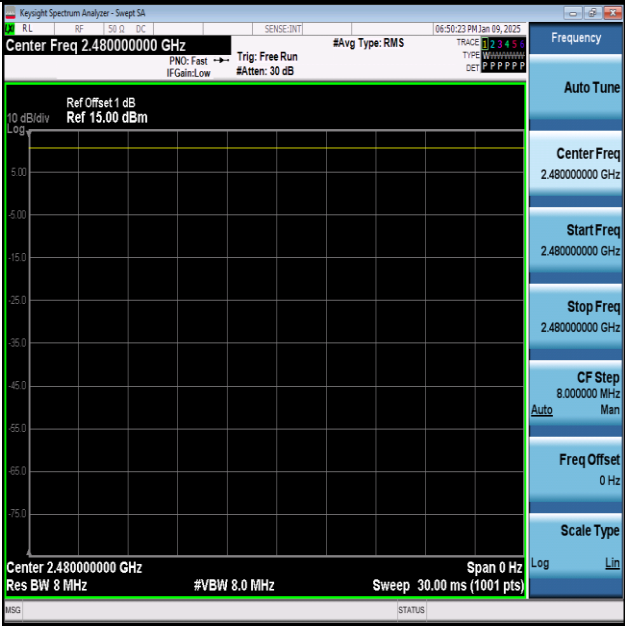


NTNV-BLE_1M-Ant1-2480

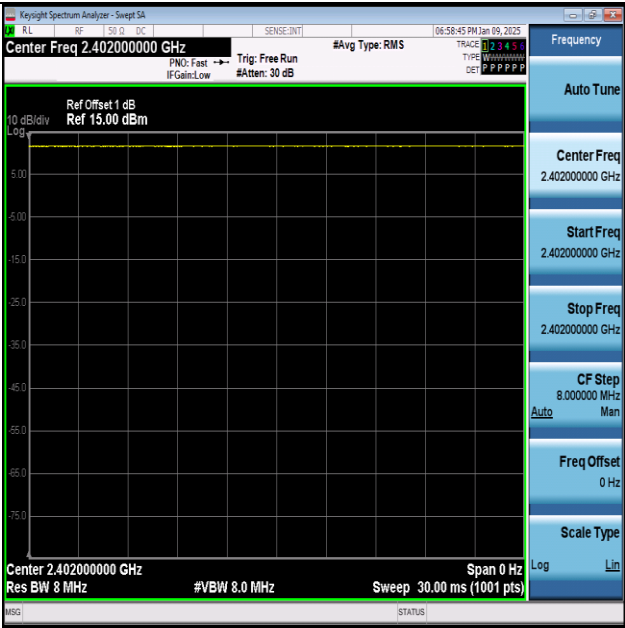


NTNV-BLE_2M-Ant1-2402

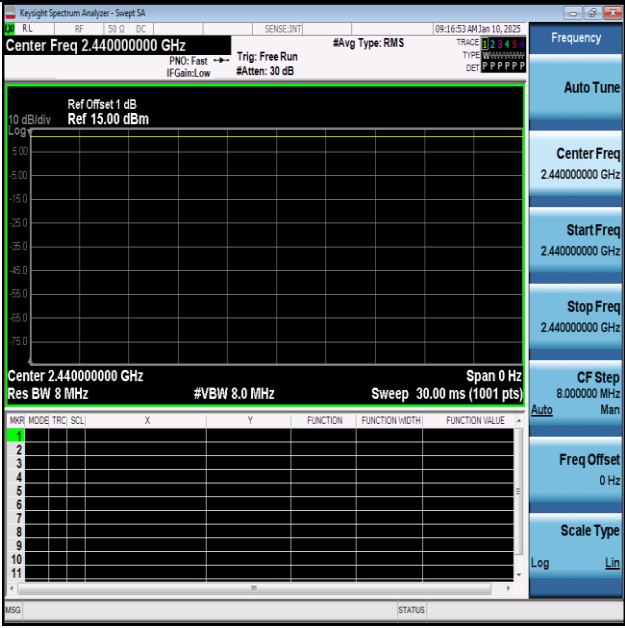


NTNV-BLE_2M-Ant1-2440

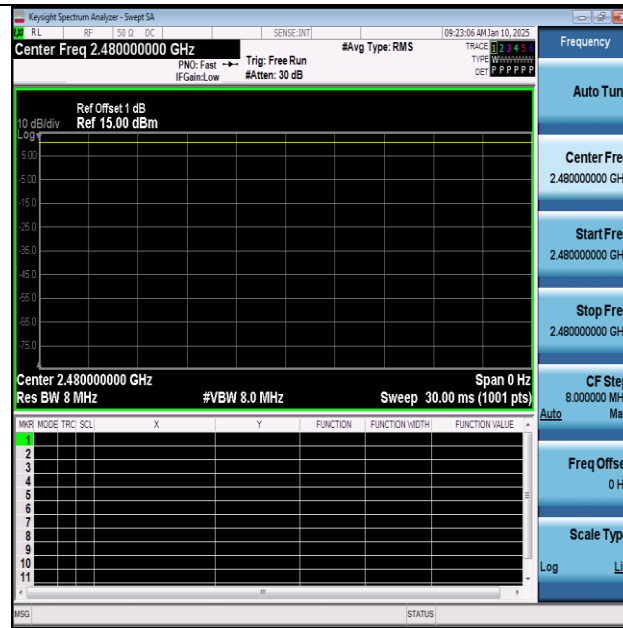


NTNV-BLE_2M-Ant1-2480

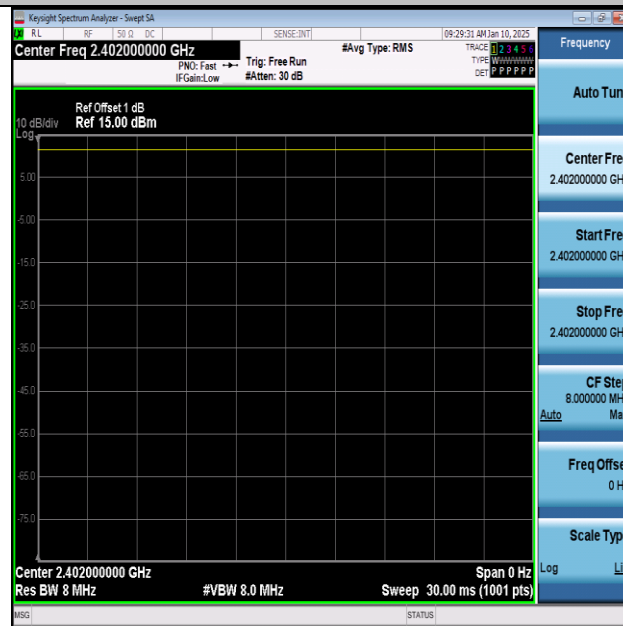


NTNV-BLE_125K-Ant1-2402

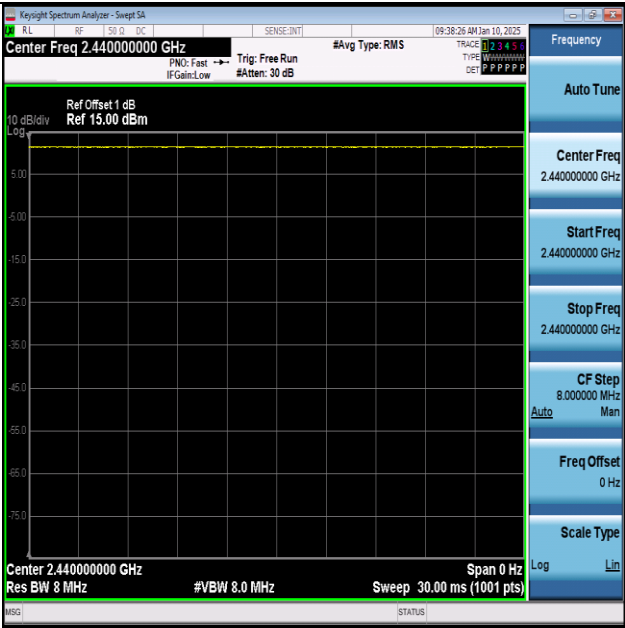


NTNV-BLE_125K-Ant1-2440

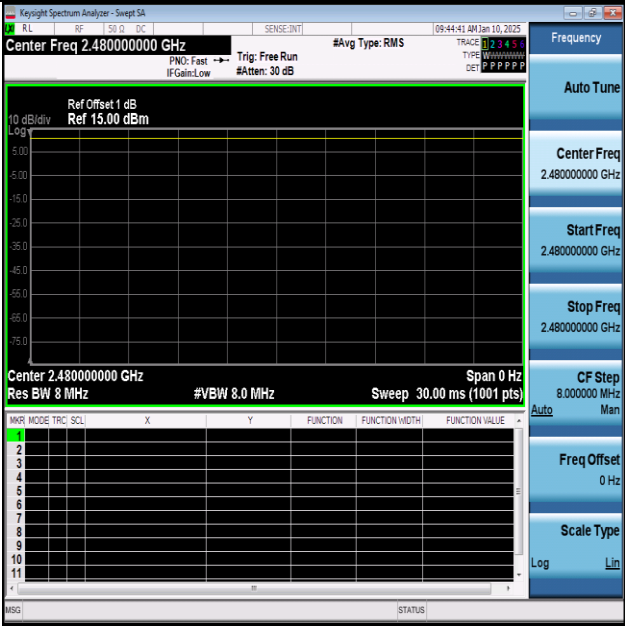


NTNV-BLE_125K-Ant1-2480

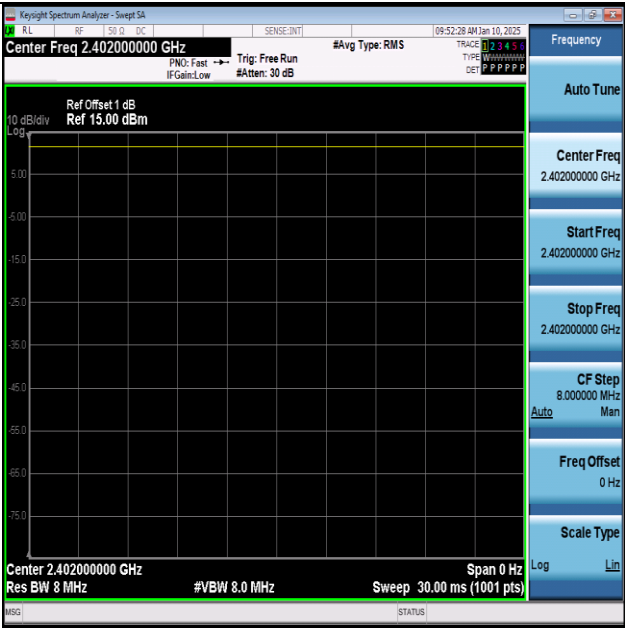

NTNV-BLE_500K-Ant1-2402

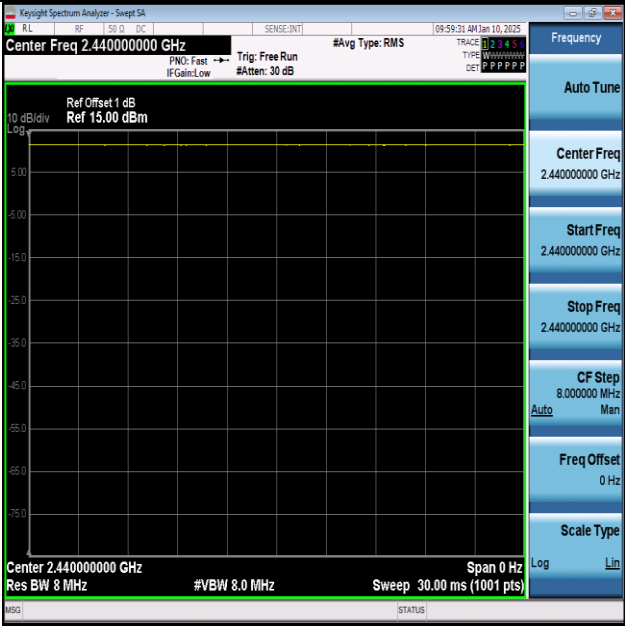


NTNV-BLE_500K-Ant1-2440

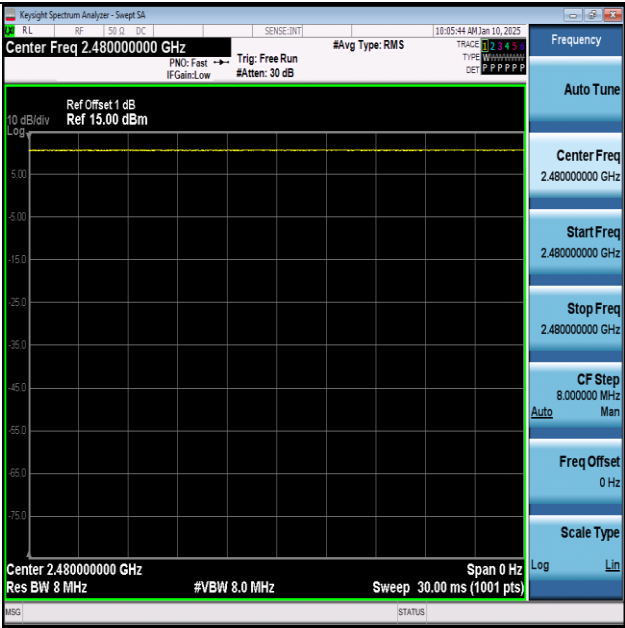

NTNV-BLE_500K-Ant1-2480


Appendix H: Emissions in Restricted Bands

Profile: 2510003R	Page No.: 31
Engineer: Yu Liu	
Site: AC5	Time: 2025/01/16 - 19:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps	

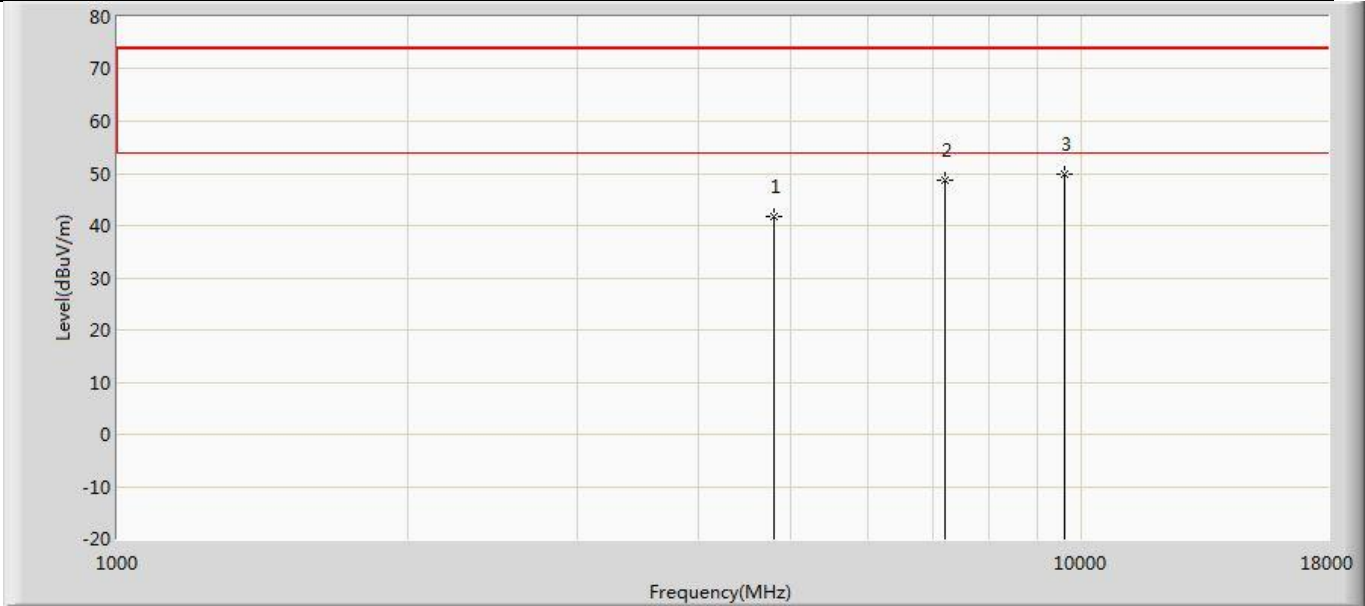


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.824	53.879	-32.176	74.000	-12.055	PK
2		7206.000	48.556	55.116	-25.444	74.000	-6.560	PK
3	*	9608.000	49.784	52.952	-24.216	74.000	-3.167	PK

Profile: 2510003R	Page No.: 32
Engineer: Yu Liu	
Site: AC5	Time: 2025/01/16 - 19:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps	

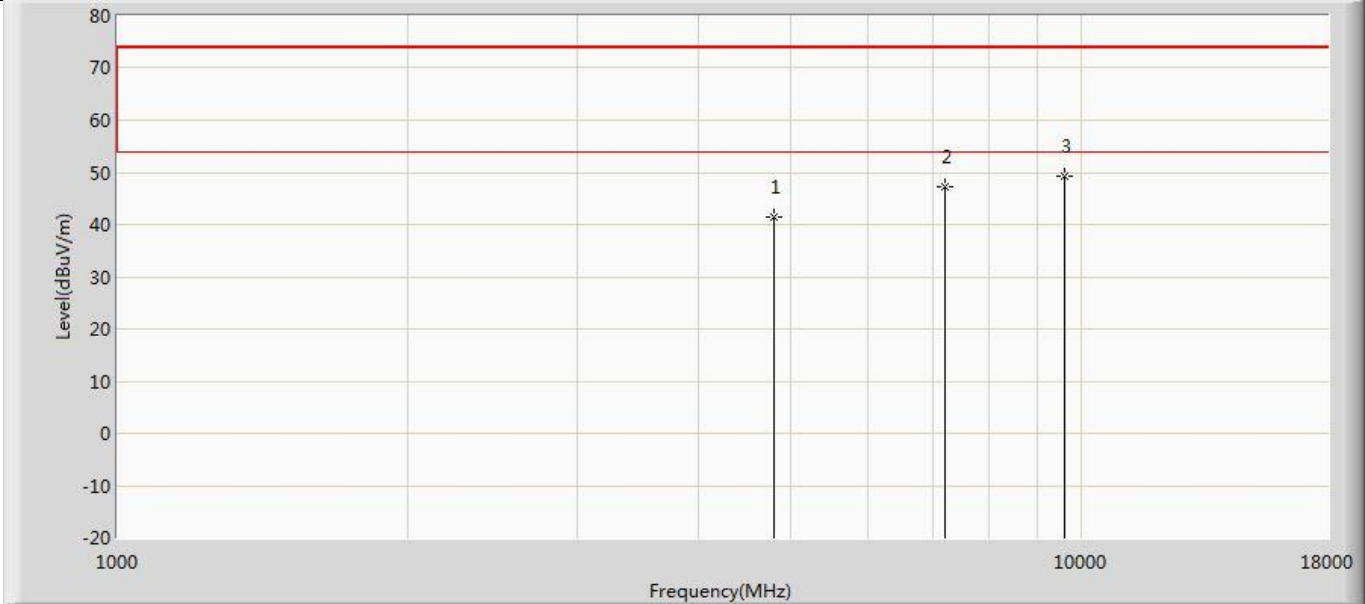


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.403	53.458	-32.597	74.000	-12.055	PK
2		7206.000	47.295	53.855	-26.705	74.000	-6.560	PK
3	*	9608.000	49.309	52.477	-24.691	74.000	-3.167	PK

Profile: 2510003R	Page No.: 33
Engineer: Yu Liu	
Site: AC5	Time: 2025/01/16 - 19:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2440MHz by LE_1Mbps	

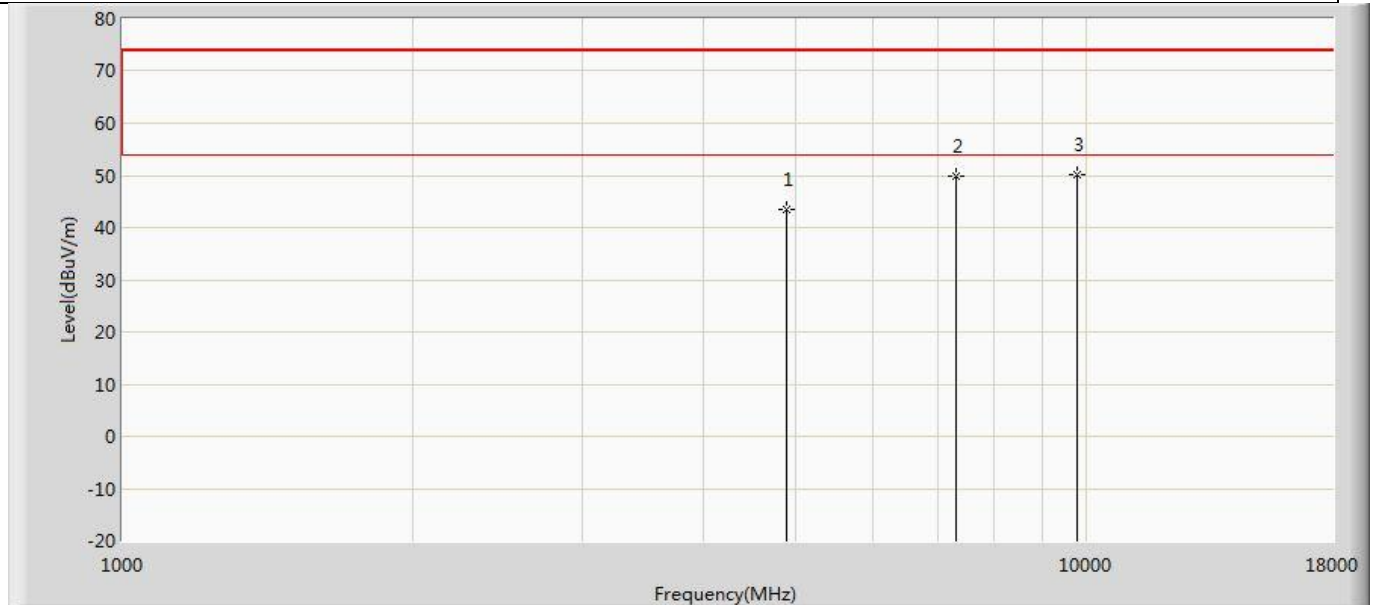


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	43.450	54.227	-30.550	74.000	-10.777	PK
2		7324.000	49.928	57.126	-24.072	74.000	-7.198	PK
3	*	9760.000	50.271	53.138	-23.729	74.000	-2.867	PK

Profile: 2510003R	Page No.: 34
Engineer: Yu Liu	
Site: AC5	Time: 2025/01/16 - 19:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2440MHz by LE_1Mbps	

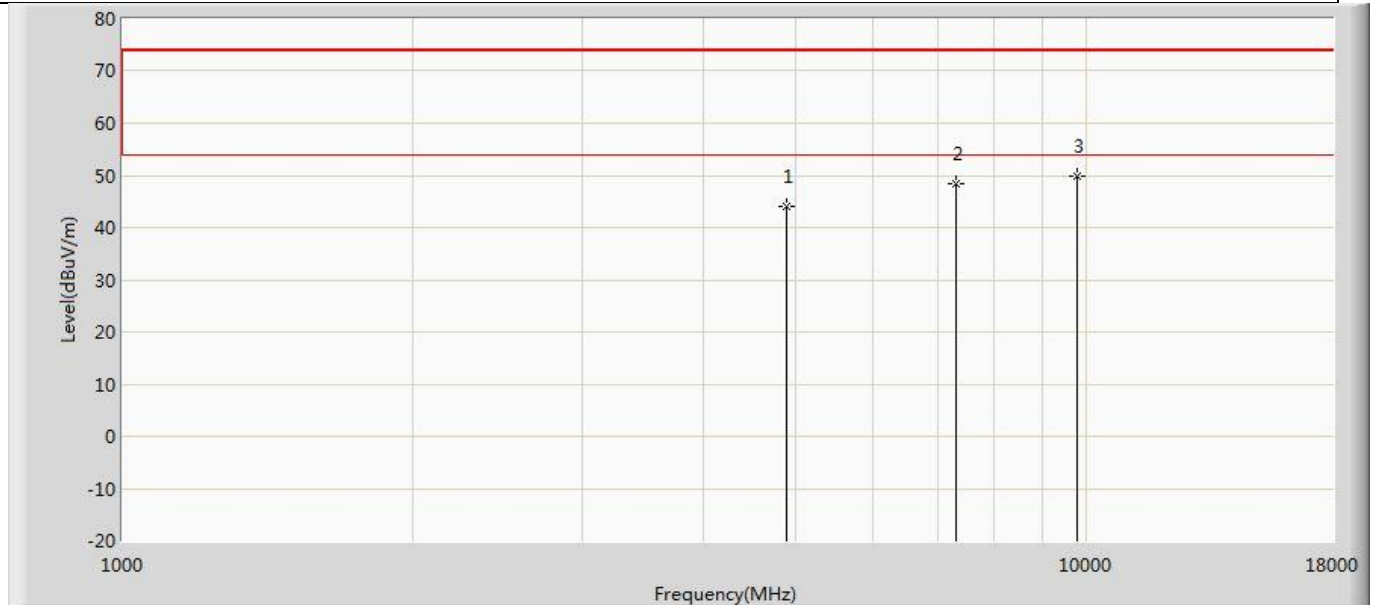


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	43.999	54.776	-30.001	74.000	-10.777	PK
2		7324.000	48.517	55.715	-25.483	74.000	-7.198	PK
3	*	9760.000	49.939	52.806	-24.061	74.000	-2.867	PK

Profile: 2510003R	Page No.: 35
Engineer: Yu Liu	
Site: AC5	Time: 2025/01/16 - 19:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2480MHz by LE_1Mbps	

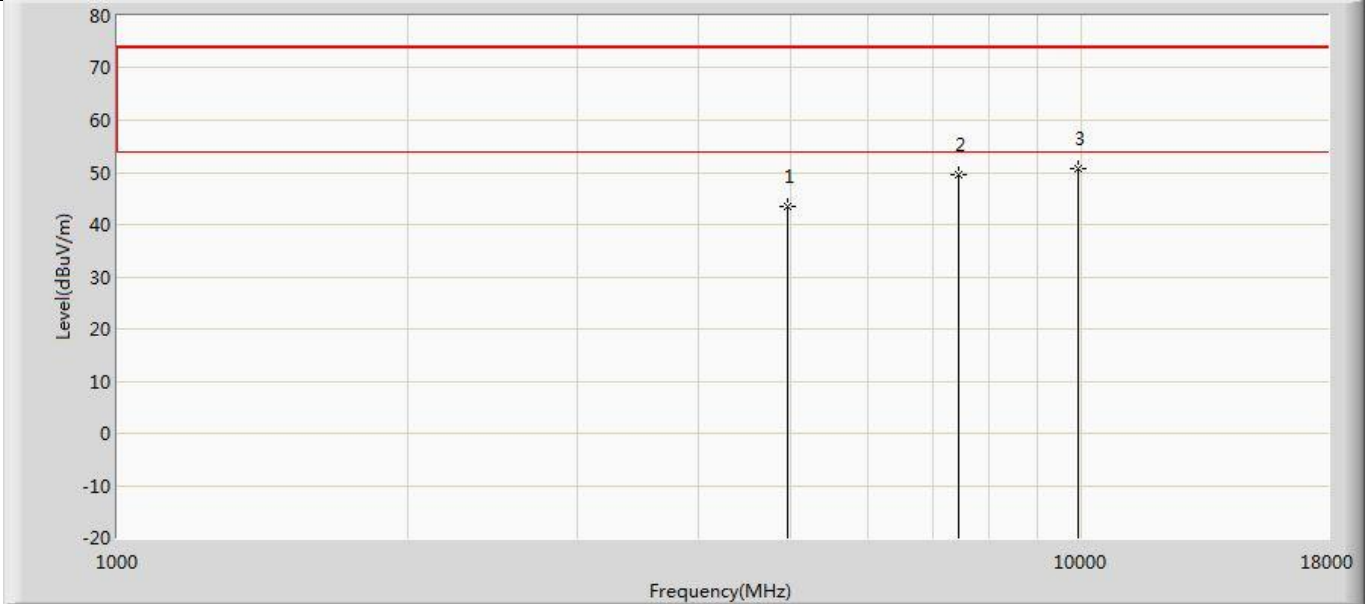


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	43.587	54.474	-30.413	74.000	-10.888	PK
2		7443.000	49.532	56.620	-24.468	74.000	-7.088	PK
3	*	9920.000	50.588	52.453	-23.412	74.000	-1.865	PK

Profile: 2510003R	Page No.: 36
Engineer: Yu Liu	
Site: AC5	Time: 2025/01/16 - 19:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2480MHz by LE_1Mbps	

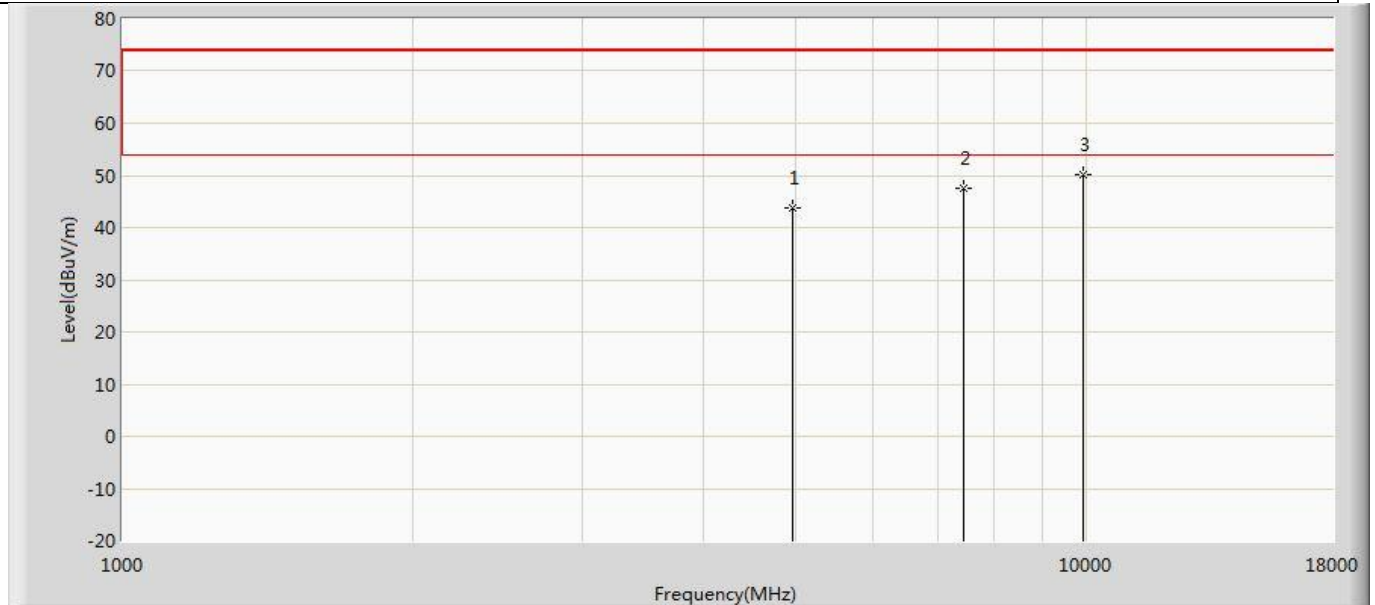

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	43.733	54.620	-30.267	74.000	-10.888	PK
2		7443.000	47.616	54.704	-26.384	74.000	-7.088	PK
3	*	9920.000	50.020	51.885	-23.980	74.000	-1.865	PK

Profile: 2510003R	Page No.: 37
Engineer: Yu Liu	
Site: AC5	Time: 2025/01/16 - 19:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 2 : Transmit at 2402MHz by LE_2Mbps	

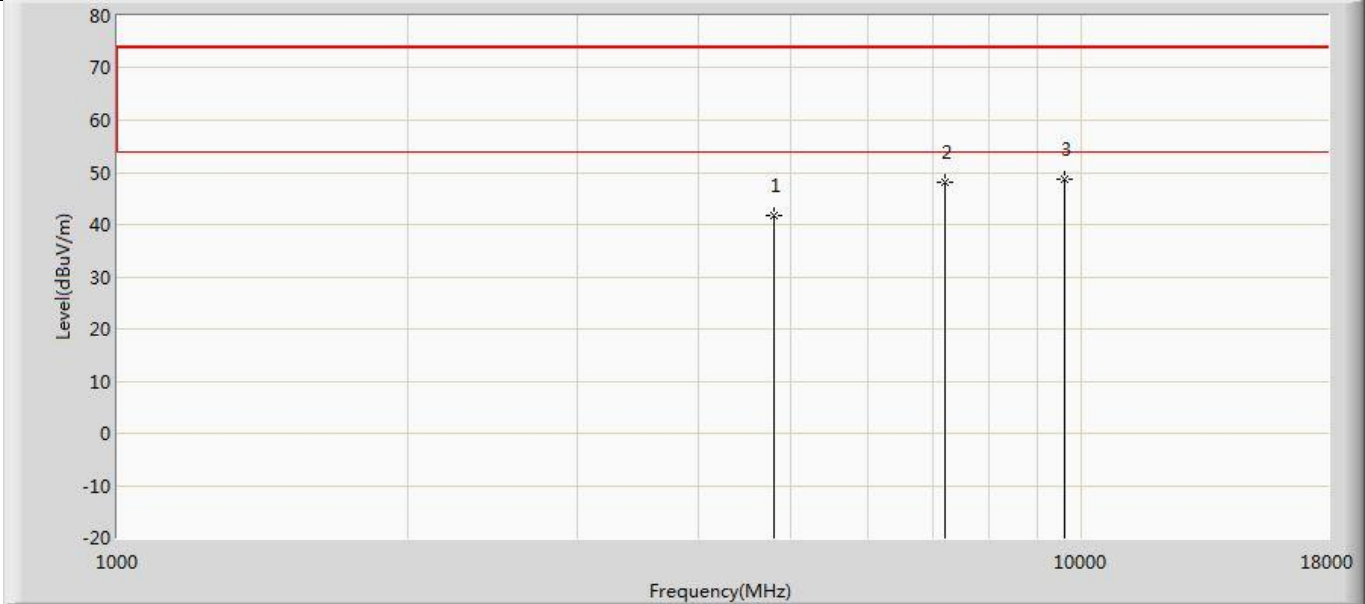

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.803	53.858	-32.197	74.000	-12.055	PK
2		7205.000	48.196	54.740	-25.804	74.000	-6.544	PK
3	*	9608.000	48.774	51.942	-25.226	74.000	-3.167	PK