



Test report No:
24B1031R-RF-US-P06V01

TEST REPORT

Product Name	LED Lamp
Trademark	PHILIPS, hue, Signify
Model and /or type reference	9290042355
FCC ID	2AGBW9290042355X
IC	20812-42355X
Applicant's name / address	Signify (China) Investment Co., Ltd No.9, Lane 888, Tian Lin Road, 200233, Shanghai, China
Test method requested, standard	47 CFR FCC Part 15 (Section 15.247) ANSI C63.10: 2013 RSS-Gen Issue 5 RSS-247 Issue 3
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao/ Project Manager 
Approved by (name / position & signature)	Frank He/ Technical Manager 
Date of issue	2025-04-22
Report Version	V2.0
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
General conditions.....	5
Environmental conditions	5
Possible test case verdicts	6
Abbreviations.....	6
Document History	7
Remarks and Comments.....	7
Used Equipment.....	8
Uncertainty	11
1 General Information.....	12
1.1 General Description of the Item(s)	12
1.2 Antenna Information	13
1.3 Channel List	14
2 Description of Test Setup	15
2.1 Operating mode(s) used for tests.....	15
2.2 Auxiliary equipment / Test software for the EUT	15
2.3 Test Configuration / Block diagram used for tests	16
2.4 Testing process	18
3 Verdict summary section	19
3.1 Standards.....	19
3.2 Deviation(s) from the Standard(s) / Test Specification(s)	19
3.3 Overview of results.....	20
3.4 Power setting in test.....	22
3.5 Test Matrix.....	22
3.6 Test Facility	23
4 Test Items Of Limit/Setup/Procedure	24
4.1 DTS Bandwidth	24
4.1.1 Limit.....	24
4.1.2 Test Setup.....	24
4.1.3 Test Procedure.....	24
4.2 Occupied Channel Bandwidth.....	25
4.2.1 Limit.....	25
4.2.2 Test Setup.....	25
4.2.3 Test Procedure.....	25
4.3 Maximum Conducted Output Power	26

4.3.1	Limit.....	26
4.3.2	Test Setup.....	26
4.3.3	Test Procedure.....	27
4.4	Maximum Power Spectral Density	28
4.4.1	Limit.....	28
4.4.2	Test Setup.....	28
4.4.3	Test Procedure.....	28
4.5	Band Edge Measurements.....	29
4.5.1	Limit.....	29
4.5.2	Test Setup.....	29
4.5.3	Test Procedure.....	29
4.6	Conducted Spurious Emission	30
4.6.1	Limit.....	30
4.6.2	Test Setup.....	30
4.6.3	Test Procedure.....	30
4.7	Duty cycle.....	31
4.7.1	Limit.....	31
4.7.2	Test Setup.....	31
4.7.3	Test Procedure.....	31
4.8	Emissions in Restricted Bands.....	32
4.8.1	Limit.....	32
4.8.2	Test Setup.....	34
4.8.3	Test Procedure.....	35
4.9	AC Power Line Conducted Emission	36
4.9.1	Limit.....	36
4.9.2	Test Setup.....	36
4.9.3	Test Procedure.....	36
4.10	Antenna Requirement	37
4.10.1	Limit:.....	37
4.10.2	Antenna Connector Construction:	37
5	Test setup photo and EUT Photo	37
6	Test Result	38
	Appendix A: DTS Bandwidth	38
	Appendix B: Occupied Channel Bandwidth.....	40
	Appendix C: Maximum conducted output power	42
	Appendix D: Maximum power spectral density	43
	Appendix E: Band edge measurements.....	45



Appendix F Conducted Spurious Emission	85
Appendix G: Duty Cycle	109
Appendix H: Emissions in Restricted Bands	111
Appendix I: AC Power Line Conducted Emission	119

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Dec. 04, 2024
Date (start test)	Dec. 06, 2024
Date (finish test)	Apr. 16, 2025

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
24B1031R-RF-US-P06V01	V1.0	Initial issue of report.	2025-03-20
24B1031R-RF-US-P06V01	V1.1	Page 1, 12: Update trademark, FCC ID and IC ID. (The test report No.: 24B1031R-RF-US-P06V01 V1.1 is to replace the test report No.: 24B1031R-RF-US-P06V01 V1.0, and test report 24B1031R-RF-US-P06V01 V1.0 is obsoleted.)	2025-04-03
24B1031R-RF-US-P06V01	V2.0	Page 111~116: Update test data. (The test report No.: 24B1031R-RF-US-P06V01 V2.0 is to replace the test report No.: 24B1031R-RF-US-P06V01 V1.1, and test report 24B1031R-RF-US-P06V01 V1.1 is obsoleted.)	2025-04-22

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with 47 CFR FCC Part 15 (Section 15.247),RSS-247 Issue 3, RSS-Gen Issue 5.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, it is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List.

USED EQUIPMENT

Conducted Test/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
Wireless Connectivity Tester	R&S	CMW 270	102593	2024.05.15	2025.05.14	V 4.0.60	N/A
Coaxial Cable	N/A	N/A	2477	2024.06.11	2025.06.10	N/A	N/A
Coaxial Cable	N/A	N/A	2478	2024.06.11	2025.06.10	N/A	N/A
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2024.04.21	2025.04.20	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2024.07.11	2025.07.10	N/A	N/A
Test system							
Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
MAX Signal Analyzer	Keysight	N9010A	MY48030494	2024.10.26	2025.10.25	A.14.03	N/A
RF Control Unit	Tonscend	JS0806-2	22G8060594	2024.02.06	2025.02.05	N/A	N/A
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2024.05.12	2025.05.11	B.01.96	N/A
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2024.05.12	2025.05.11	N/A	N/A
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2024.07.06	2025.07.05	B.01.95	N/A
Test Software	Tonscend	TS1120	JS1120-3	N/A	N/A	N/A	V3.0.22

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100726	2024.07.06	2025.07.05	4.42 SP1	N/A
Two-Line V-Network	R&S	ENV 216	101044	2024.10.26	2025.10.25	N/A	N/A
Two-Line V-Network	R&S	ENV 216	101189	2024.07.06	2025.07.05	N/A	N/A
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2024.04.20	2025.04.19	N/A	N/A
Coaxial Cable	Huber+Suhner	RG 223	TR1-C1	2024.04.27	2025.04.26	N/A	N/A
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	2024.01.20	2025.01.19	N/A	N/A
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	2025.01.18	2026.01.17	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	EMC01	2024.07.04	2025.07.03	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

Radiated Emission(9KHz-1GHz) / AC2

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100573	2024.02.06	2025.02.05	4.42 SP3	N/A
Loop Antenna	R&S	HFH2-Z2E	101149	2024.03.27	2025.03.26	N/A	N/A
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2024.03.20	2025.03.19	N/A	N/A
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2025.03.14	2026.03.13	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2024.05.17	2025.05.16	N/A	N/A
Coaxial Cable	Huber+Suhner	RTS-1909	THM-021	2024.04.27	2025.04.26	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

Radiated Emission (1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EXA Spectrum Analyzer	Keysight	N9020B	MY60112218	2024.11.02	2025.11.01	A.31.05	N/A
Pre-Amplifier	SKET	LNPA_0118G-45	SK2021090101	2024.04.27	2025.04.26	N/A	N/A
Preamplifier	CHENGYI	EMC184045SE	980263	2024.07.06	2025.07.05	N/A	N/A
DRG Horn	ETS-Lindgren	3117	123988	2024.08.29	2025.08.28	N/A	N/A
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2024.05.30	2025.05.29	N/A	N/A
Filter Switch Box	MVE	MSW-F196	C070001S	2024.04.20	2025.04.19	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-1909	THM-024	2024.05.17	2025.05.16	N/A	N/A
Coaxial Cable	TIMES	ROSENBERGER	LA1-C011-2000/3000	2024.01.25	2025.01.24	N/A	N/A
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2025.01.18	2026.01.17	N/A	N/A
Cable	Rosenberger	LA1-C011-1000	0523	2024.05.26	2025.05.25	N/A	N/A
Cable	Rosenberger	LA1-C011-1000	0623	2024.05.26	2025.05.25	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95% .

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.60dB 150kHz~30MHz: 2.90dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 200MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 200MHz~1GHz: 3.80 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB Horizontal: 18GHz~26.5GHz: 5.30 dB Vertical: 18GHz~26.5GHz: 4.90 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 1 kHz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name.....:	LED Lamp
Model No.:	9290042355
Trademark.:	PHILIPS, hue, Signify
FCC ID.....:	2AGBW9290042355X
IC	20812-42355X
Manufacturer	Signify (China) Investment Co., Ltd
Manufacturer Address	No.9, Lane 888, Tian Lin Road, 200233, Shanghai, China

Wireless specification	Zigbee
Operating frequency range(s)	2405~2480MHz
Type of Modulation	O-QPSK
Data Rate	250kbps
Number of channel	16

Rated power supply	Voltage and Frequency	
	☐	AC: 220 - 240 Vac, 50/60 Hz
	☒	AC: 120 Vac, 50/60 Hz
	☐	DC: 24 Vdc
	☐	Poe:
	☐	Adapter:
Mounting position	☐	Tabletop equipment
	☒	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☐	Hand-held/Portable equipment
	☐	Other:

1.2 Antenna Information

Antenna model / type number	N/A		
Antenna serial number	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☐	2TX + 2RX	
	☐	Others:	
Antenna technology	☒	SISO	
	☐	MIMO	☐ CDD ☐ Beam-forming
	☐	External	☐ Dipole ☐ Sectorized
Antenna Type	☐	Internal	☐ Ceramic Chip
	☒		☐ PIFA
	☒		☒ PCB
	☐		☐ Others.....
	Antenna Gain.....	-9.2 dBi	

1.3 Channel List

Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz	14	2420 MHz
15	2425 MHz	16	2430 MHz	17	2435 MHz	18	2440 MHz
19	2445 MHz	20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz	26	2480 MHz

Note: The General Description of the Item , antenna information and Channel List for the EUT in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode	Mode 1: Transmit by Zigbee
-----------	----------------------------

Note : Regards to the frequency band operation: the lowest, middle and highest frequency channel were selected to perform the test, then shown on this report.


2.2 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) Notebook	Think pad x220	Lenovo	Adapter
(2) USB Control Cable	N/A	N/A	N/A
(3) USB Control Cable	N/A	N/A	N/A
software	Type / Version	Manufacturer	Supplied by
HueApprobationTool	N/A	N/A	N/A


Accessories Information	Cable		
	Length used during test [m]	Attached during test	Shielded
(2)USB Control Cable	1	☒	☒
(3)USB Control Cable	8	☒	☒

2.3 Test Configuration / Block diagram used for tests


Test setup Diagram- AC Line Conducted Emission Test

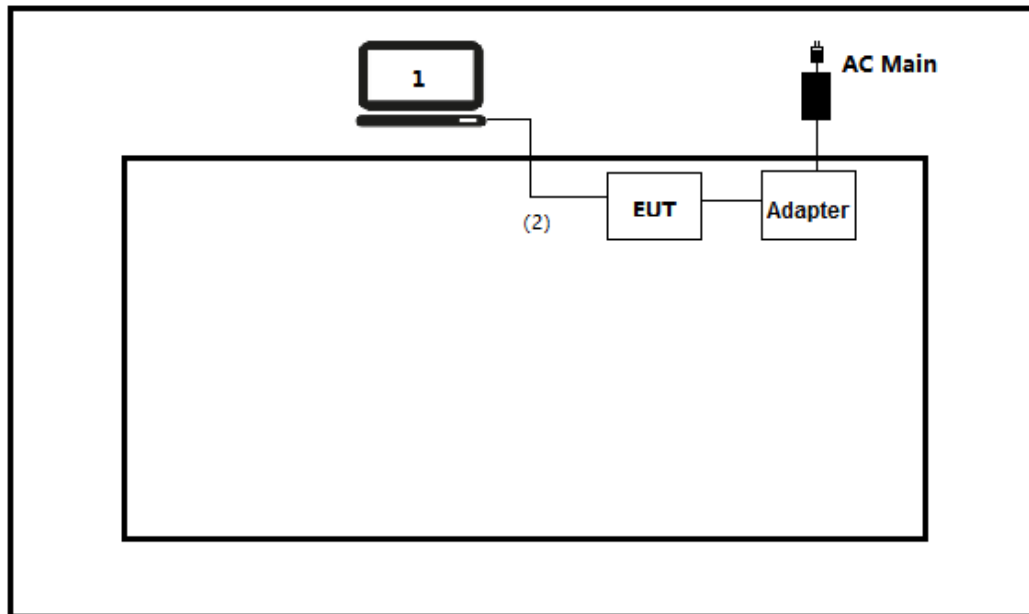

Test setup Diagram- Conducted test

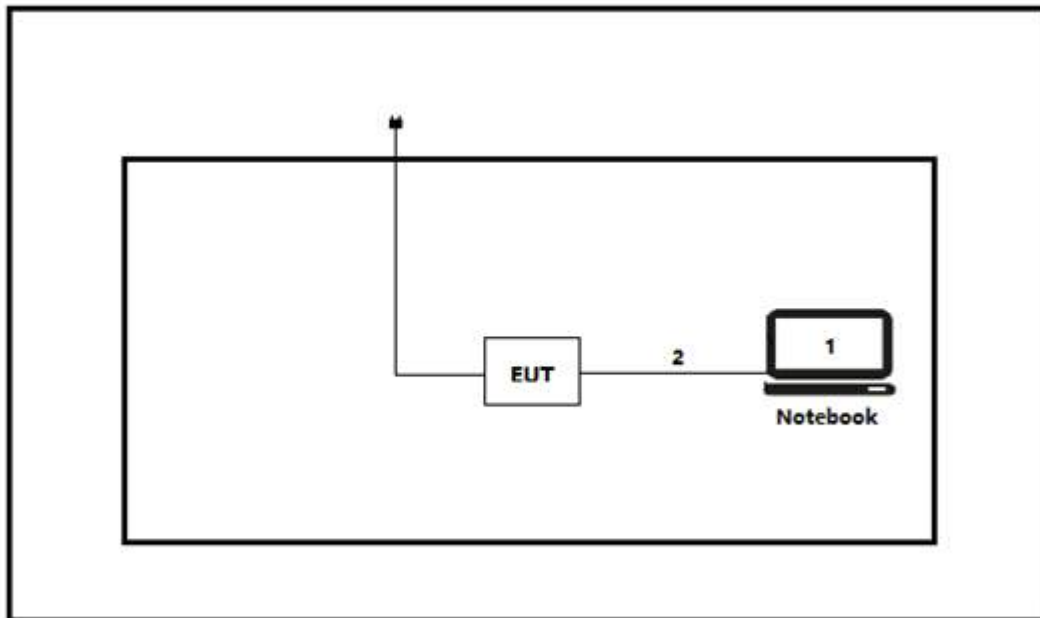

Test setup Diagram- Radiated Emission

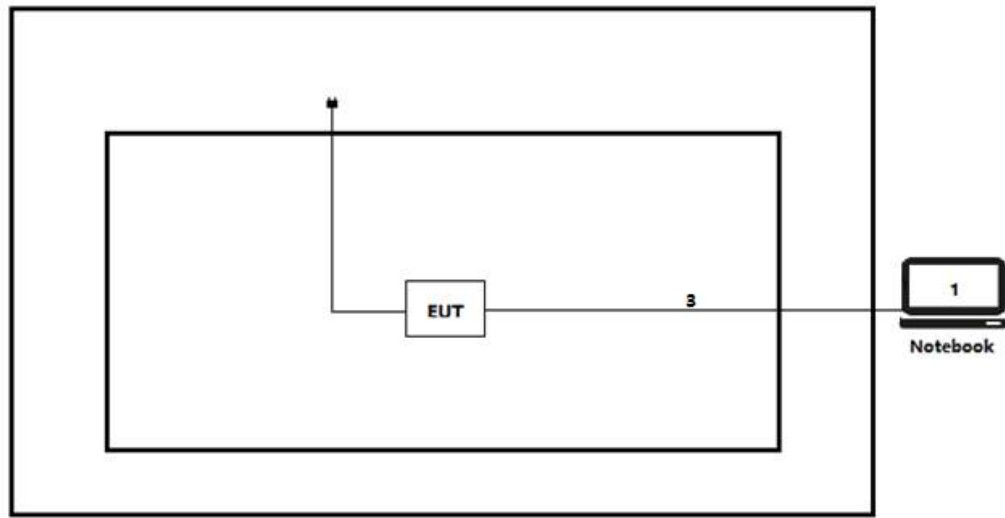

2.4 Testing process

1	Setup the EUT shown in Section 2.3.
2	Execute the [HueApprobationTool]on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
CFR 47, FCC Part 15 C	2024	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-Gen Issue 5 Amendment 2	2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3	2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

Requirement – Test Item of FCC	Standard(s)	Verdict	Remark
20dB Emission Bandwidth	FCC 15.247(a)(2)	PASS	Test data please refer to Appendix A
Maximum conducted output power	15.247 (b)(3)	PASS	Test data please refer to Appendix C
Maximum power spectral density	FCC 15.247(e)	PASS	Test data please refer to Appendix D
Band edge measurements	FCC 15.247(d) FCC 15.205 FCC 15.209	PASS	Test data please refer to Appendix E
Conducted Spurious Emission	FCC 15.247(d), FCC 15.209	PASS	Test data please refer to Appendix F
Duty cycle	ANSI C63.10:2013	PASS	Test data please refer to Appendix G
Emissions in Restricted Bands	FCC 15.205 FCC 15.209	PASS	Test data please refer to Appendix H
AC Power Line Conducted Emission	FCC 15.207	PASS	Test data please refer to Appendix I
Antenna Requirement	FCC 15.203	PASS	---

Requirement – Test case of ISED	Standard(s)	Verdict	Remark
DTS Bandwidth	RSS-Gen Issue 5 Paragraph 6.7 RSS-247 Issue 3 Paragraph 5.2	PASS	Test data please refer to Appendix A
Occupied Channel Bandwidth	RSS-Gen Issue 5 Paragraph 6.7 RSS-247 Issue 3 Paragraph 5.2	PASS	Test data please refer to Appendix B
Maximum conducted output power	RSS-247 Issue 3 Paragraph 5.4(d)	PASS	Test data please refer to Appendix C
Maximum power spectral density	RSS-247 Issue 3 Paragraph 5.2(b)	PASS	Test data please refer to Appendix D
Band edge measurements	RSS-Gen Issue 5 Paragraph 8.10	PASS	Test data please refer to Appendix E
Conducted Spurious Emission	RSS-247 Issue 3 Paragraph 5.5	PASS	Test data please refer to Appendix F
Duty cycle	ANSI C63.10:2013	PASS	Test data please refer to Appendix G
Emissions in Restricted Bands	RSS-Gen Issue 5 Paragraph 8.9	PASS	Test data please refer to Appendix H
AC Power Line Conducted Emission	RSS-Gen Issue 5 Paragraph 8.8	N/A	Test data please refer to Appendix I
Antenna Requirement	RSS-Gen Issue 5 Paragraph 6.8	PASS	---

3.4 Power setting in test

Mode	Channel	Frequency (MHz)	Power setting
Mode1	11	2405	10
	18	2440	10
	26	2480	10

3.5 Test Matrix

Test item	Model: 9290042355	
	1(#1)	2(#2)
DTS Bandwidth	☒	☐
Occupied Channel Bandwidth	☒	☐
Maximum conducted output power	☒	☐
Maximum power spectral density	☒	☐
Band edge measurements	☐	☒
Conducted Spurious Emission	☒	☐
Duty cycle	☒	☐
Emissions in Restricted Bands	☐	☒
AC Power Line Conducted Emission	☐	☒
Note1: The only difference between sample #1 and sample #2 is whether to keep the original antenna, sample #1 is a conduction test product that removes the original antenna and is equipped with SMA wires, and sample #2 is a complete product that retains the original antenna.		

3.6 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST ITEMS OF LIMIT/SETUP/PROCEDURE

4.1 DTS Bandwidth

VERDICT: PASS


4.1.1 Limit

Standard

FCC Part 15 Subpart C Paragraph 15.247 (a)(2); RSS-247 Issue 3 Paragraph 5.2.

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

4.1.2 Test Setup

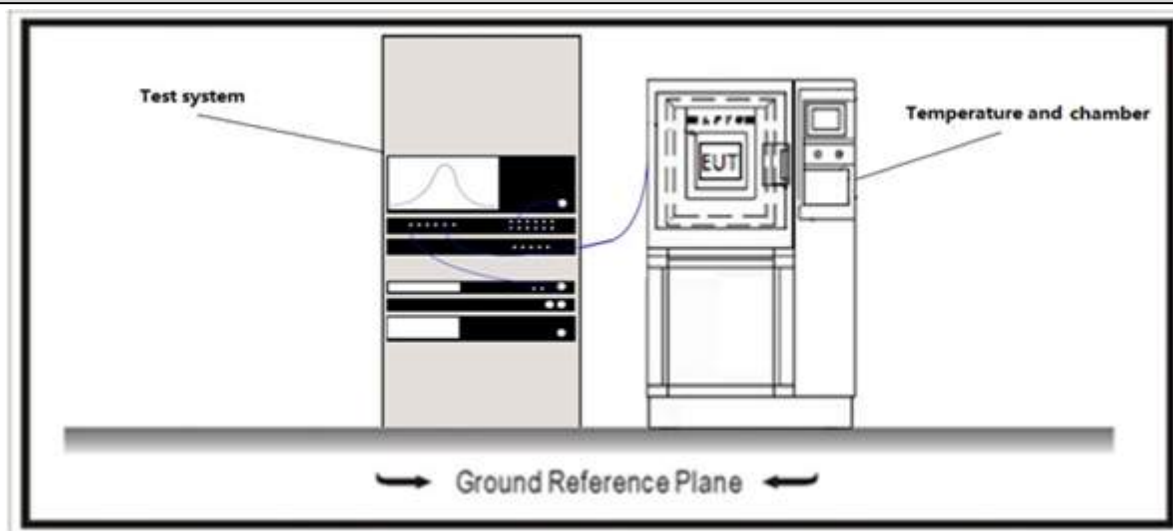

4.1.3 Test Procedure

	Reference Rule		Chapter	Description
☒	ANSI C63.10		11.8	DTS bandwidth
	☒	ANSI C63.10	11.8.1	Option 1
	☐	ANSI C63.10	11.8.2	Option 2

4.2 Occupied Channel Bandwidth

VERDICT: PASS


4.2.1 Limit

Standard

RSS-Gen Issue 5 Paragraph 6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs

4.2.2 Test Setup

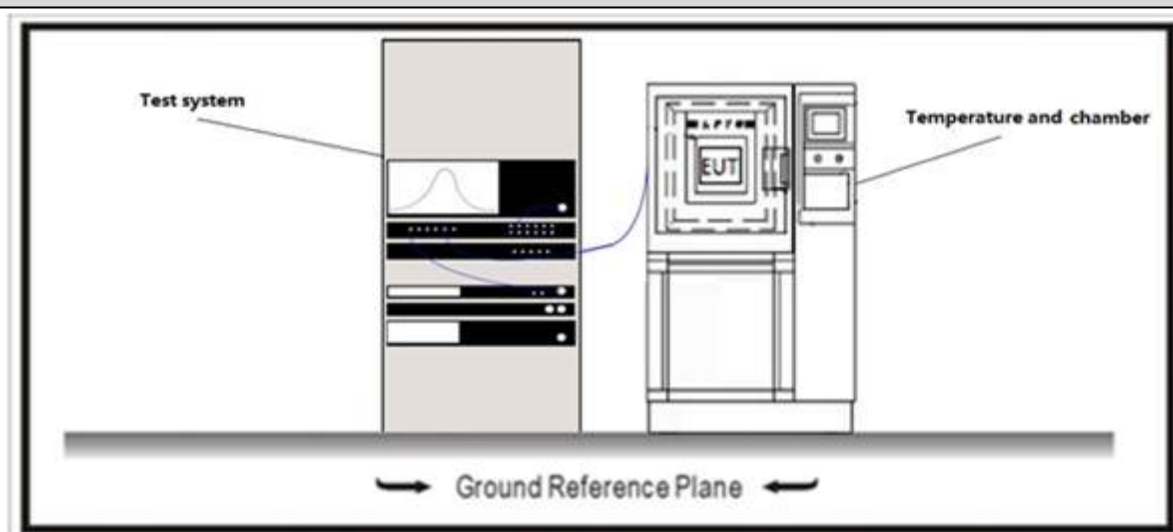

4.2.3 Test Procedure

	Reference Rule	Chapter	Description
☒	ANSI C63.10	6.9	Occupied bandwidth tests
☐	ANSI C63.10	6.9.2	Option 1
☒	ANSI C63.10	6.9.3	Option 2

4.3 Maximum Conducted Output Power

VERDICT: PASS


4.3.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3); RSS-247 Issue 3 Paragraph 5.4(d).
☒	GTX < 6dBi	Pout≤30dBm
☐	GTX > 6dBi	
☐	Non-Fix point-point	Pout≤30-(GTX -6)
☐	Fix point-point	Pout≤30-[(GTX-6)]/3
☐	Point-to-multipoint	Pout≤30-(GTX-6)
☐	Overlap Beams	Pout≤30-[(GTX-6)]/3
☐	Aggregate power transmitted simultaneously on all beams	Pout≤30-[(GTX-6)]/3
☐	single directional beam	Pout≤30-[(GTX-6)]/3+8dB

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum peak conducted output power .

4.3.2 Test Setup

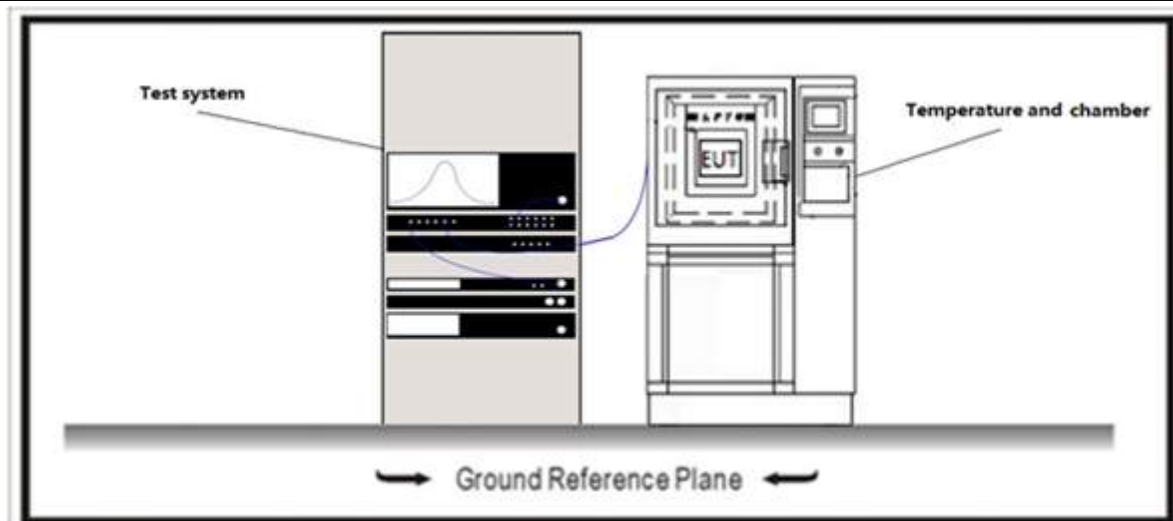

4.3.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.9	Fundamental emission output power
☒	☒	ANSI C63.10	11.9.1	Maximum peak conducted output power
	☐	☐ ANSI C63.10	11.9.1.1	RBW $\geq$ DTS bandwidth
		☐ ANSI C63.10	11.9.1.2	Integrated band power method
		☒ ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method
	☐	ANSI C63.10	11.9.2	Maximum conducted (average) output power
	☐	☐ ANSI C63.10	11.9.2.2	Measurement using a spectrum analyzer (SA)
		☐ ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle $\geq 98\%$)
		☐ ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle $\geq 98\%$)
		☐ ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle $\leq 98\%$)
		☐ ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle $\leq 98\%$)
		☐ ANSI C63.10	11.9.2.2.4	Method AVGSA-3
		☐ ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		☐ ANSI C63.10	11.9.2.3	Measurement using a power meter (PM)
		☐ ANSI C63.10	11.9.2.3.1	Method AVGPM
		☐ ANSI C63.10	11.9.2.3.2	Method AVGPM-G

4.4 Maximum Power Spectral Density

VERDICT: PASS


4.4.1 Limit

Standard

 FCC Part 15 Subpart C Paragraph 15.247 (b)(3);
 RSS-247 Issue 3 Paragraph 5.2(b).

 Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

4.4.2 Test Setup

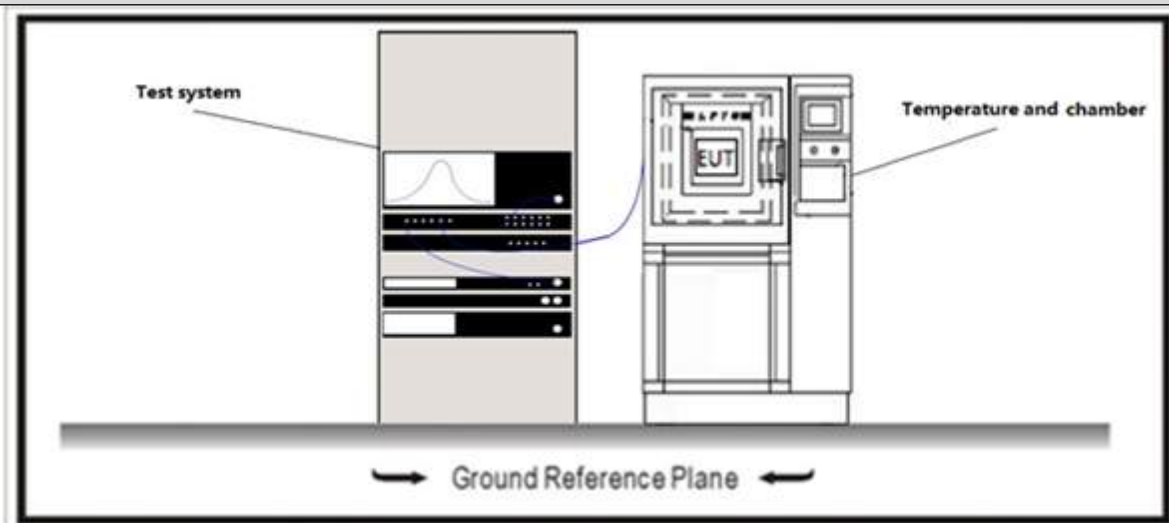

4.4.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

4.5 Band Edge Measurements

VERDICT: PASS


4.5.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209; RSS-Gen Issue 5 Paragraph 8.10.		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

Above 1GHz Test Setup:

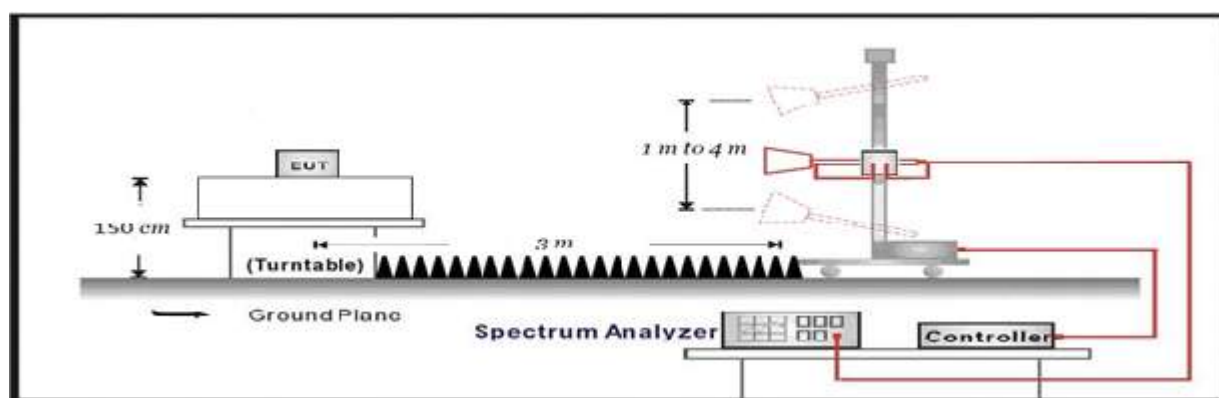

4.5.3 Test Procedure


	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
☒	ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
☒	ANSI C63.10	11.12.1	Radiated emission measurements
☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.6 Conducted Spurious Emission**VERDICT: PASS****4.6.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d); RSS-247 Issue 3 Paragraph 5.5.
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

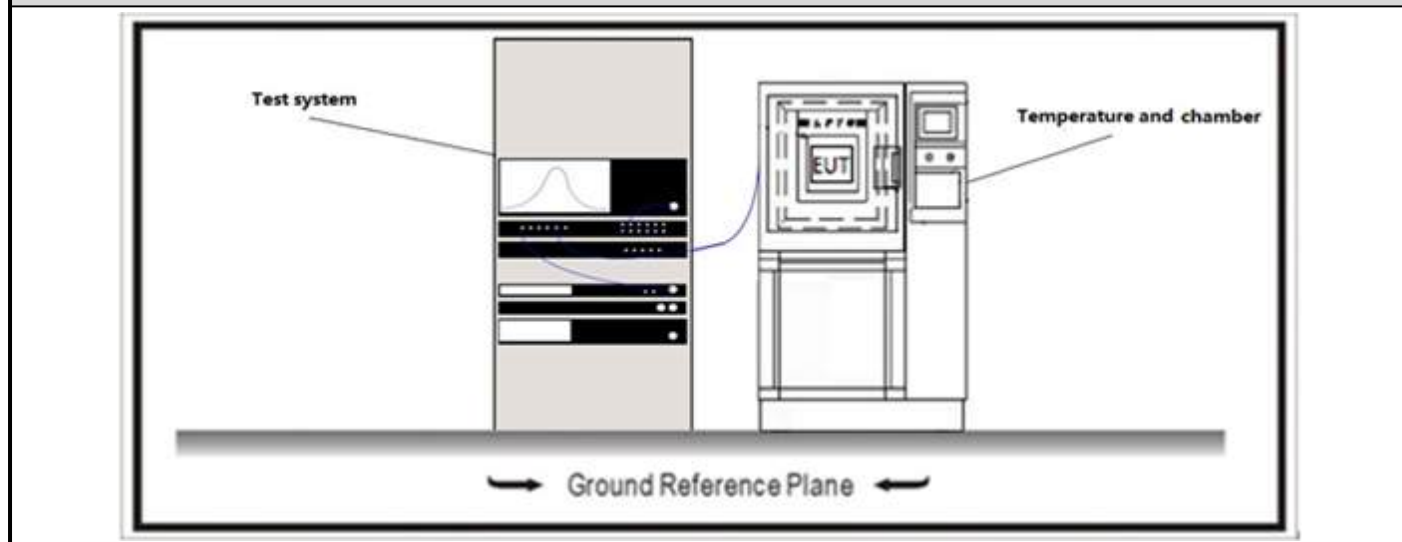4.6.2 Test Setup**4.6.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement


4.7 Duty cycle

VERDICT: PASS

4.7.1 Limit

N/A

4.7.2 Test Setup

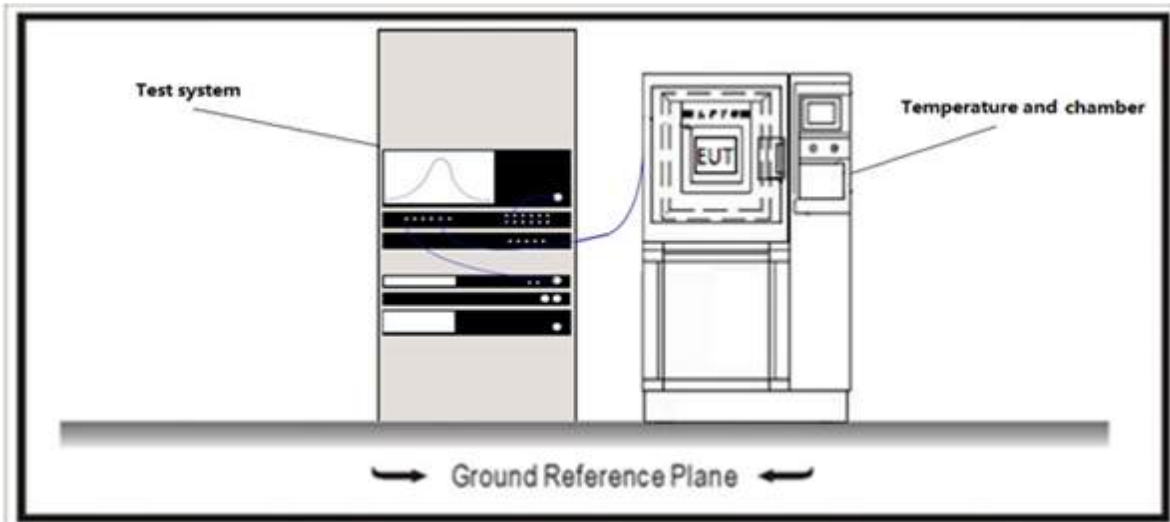

4.7.3 Test Procedure

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level

4.8 Emissions in Restricted Bands**VERDICT: PASS****4.8.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.205

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Standard

RSS-Gen Issue 5 Paragraph 8.10

Restricted Bands of operation for IC

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit

FCC Part 15 Subpart C Paragraph 15.209

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

RSS-Gen Issue 5 Paragraph 8.9.


Frequency (MHz)	Field strength	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	6.37/F(kHz) $\mu\text{A/m}$	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	63.7/F(kHz) $\mu\text{A/m}$	33.8 - 23	30 _(Note 1)
1.705 - 30	30 $\mu\text{V/m}$	29.5	30 _(Note 1)
30 - 88	100 $\mu\text{V/m}$	40	3 _(Note 2)
88 - 216	150 $\mu\text{V/m}$	43.5	3 _(Note 2)
216 - 960	200 $\mu\text{V/m}$	46	3 _(Note 2)
Above 960	500 $\mu\text{V/m}$	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.8.2 Test Setup


Below 30MHz Test Setup:

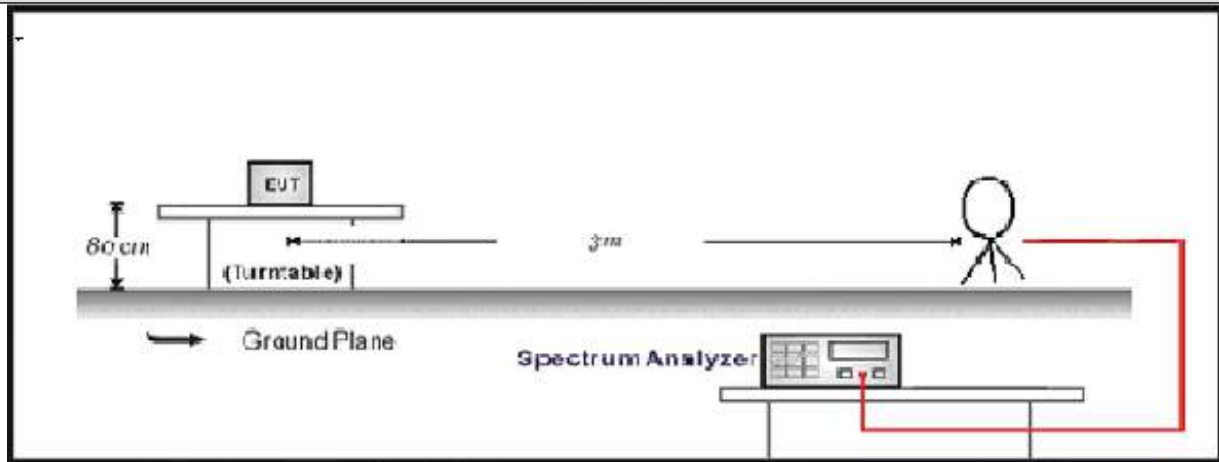

30MHz-1GHz Test Setup:

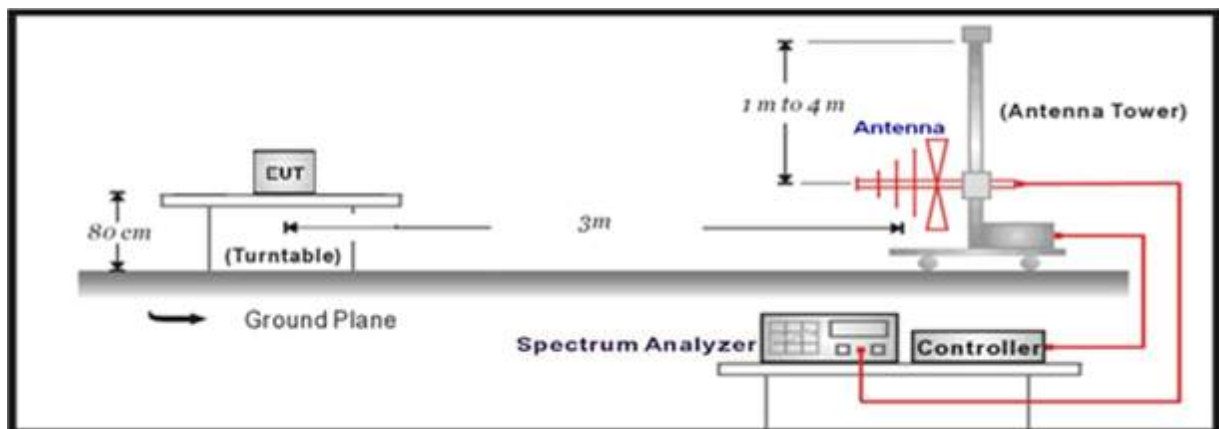

Above 1GHz Test Setup:

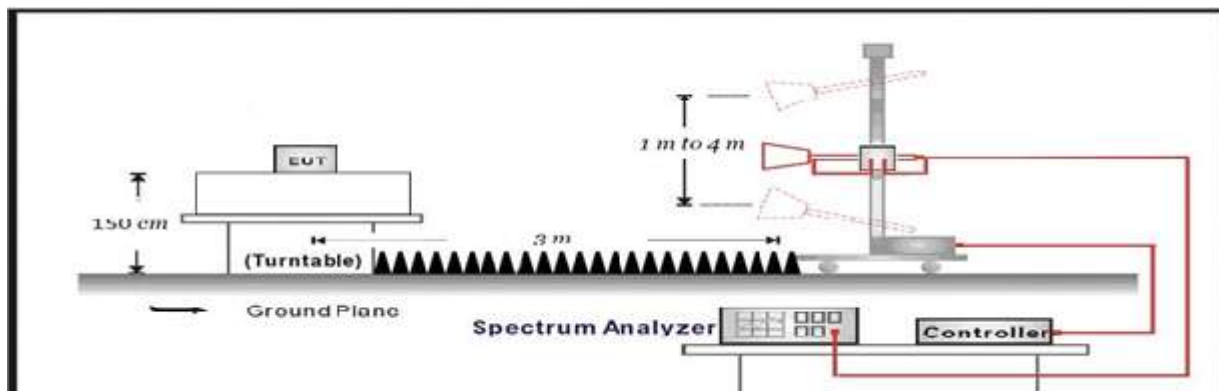

4.8.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.9 AC Power Line Conducted Emission**VERDICT: PASS****4.9.1 Limit**


Standard	FCC Part 15 Subpart C Paragraph 15.207; RSS-Gen Issue 5 Paragraph 8.8.	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50

¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

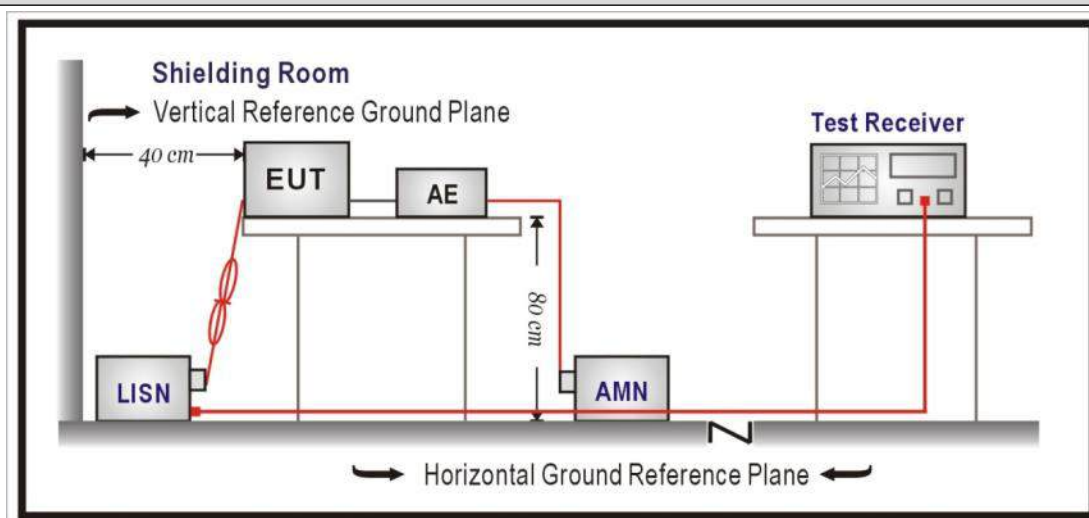4.9.2 Test Setup**4.9.3 Test Procedure**

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.10 Antenna Requirement**VERDICT: PASS****4.10.1 Limit:****Standard**FCC Part 15 Subpart C Paragraph 15.203;
RSS-Gen Issue 5 Paragraph 6.8.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.10.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

6 TEST RESULT

Appendix A: DTS Bandwidth

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
Mode 1	Ant1	2405	1.830	2404.180	2406.010	0.5	PASS
	Ant1	2440	1.630	2439.300	2440.930	0.5	PASS
	Ant1	2480	1.620	2479.310	2480.930	0.5	PASS



ZIGB-Ant1-2405-PASS




ZIGB-Ant1-2440-PASS




ZIGB-Ant1-2480-PASS

Appendix B: Occupied Channel Bandwidth


TestMode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit[MHz]	Verdict
Mode 1	Ant1	2405	2.2599	2403.9664	2406.2263	With 2400~2483.5MHz	Pass
	Ant1	2440	2.2618	2438.9643	2441.2261	With 2400~2483.5MHz	Pass
	Ant1	2480	2.2668	2478.9557	2481.2225	With 2400~2483.5MHz	Pass

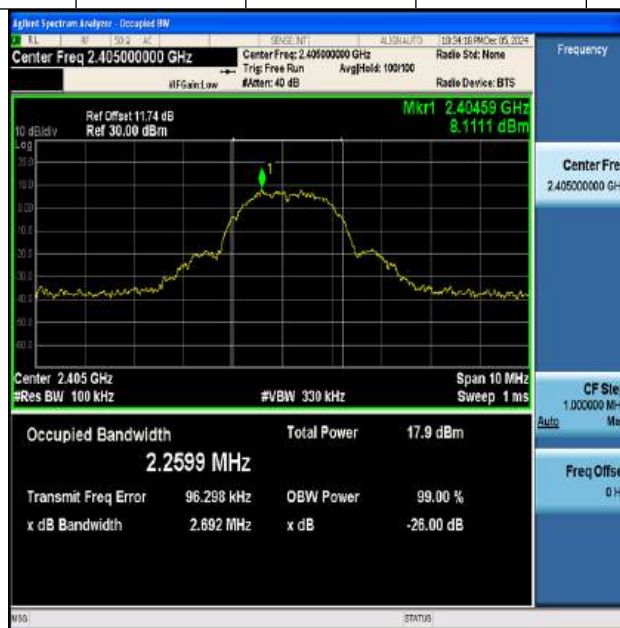

ZIGB-Ant1-2405

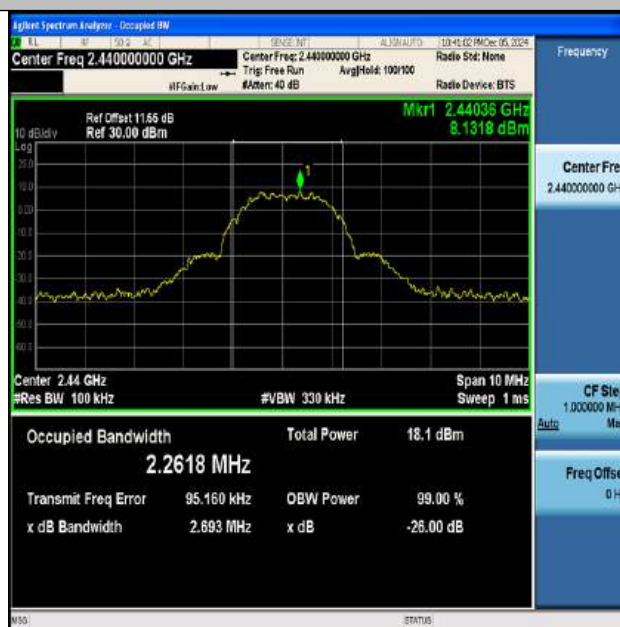

ZIGB-Ant1-2440

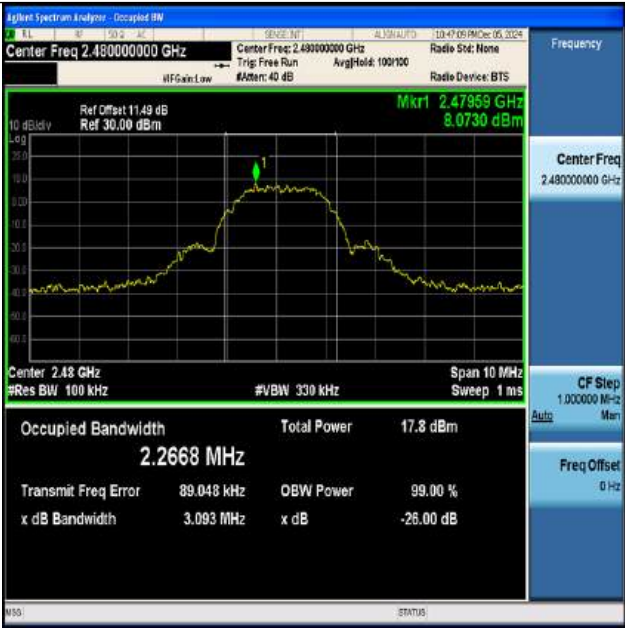

ZIGB-Ant1-2480

Appendix C: Maximum conducted output power

Test Mode	Frequency (MHz)	Measured Power (dBm)	EIRP (dBm)	Conducted Limit(dBm)	EIRP Limit (dBm)
Mode1	2405	12.11	1.91	≤30	≤36
	2440	12.05	1.85	≤30	≤36
	2480	12.06	1.86	≤30	≤36
Note 1: EIRP=Measured power+Antenna gain					
Note 2: The antenna gain please refer to clause 1.2					

Appendix D: Maximum power spectral density

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
Mode 1	Ant1	2405	-3.22	≤8.00	PASS
	Ant1	2440	-3.59	≤8.00	PASS
	Ant1	2480	-3.24	≤8.00	PASS



ZIGB-Ant1-2405-PASS



ZIGB-Ant1-2440-PASS




ZIGB-Ant1-2480-PASS



Appendix E: Band edge measurements


Profile: 24B1031R	Page No.: 1
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

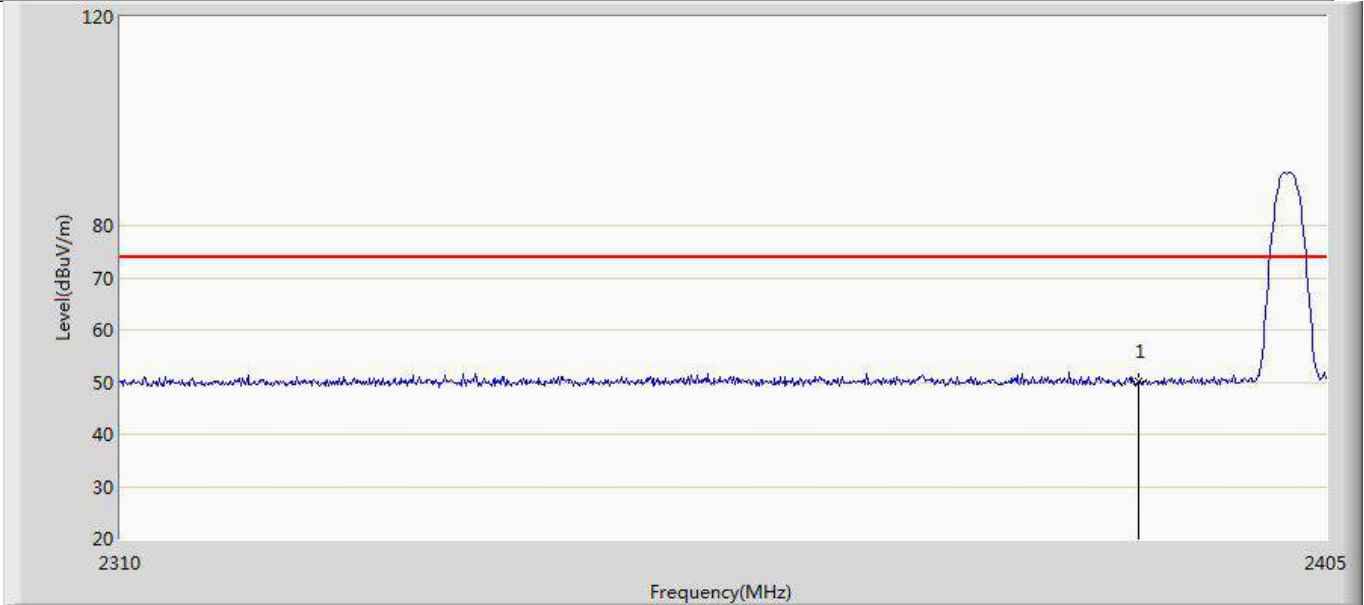

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.141	16.040	-23.859	74.000	34.102	PK




Profile: 24B1031R	Page No.: 2
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

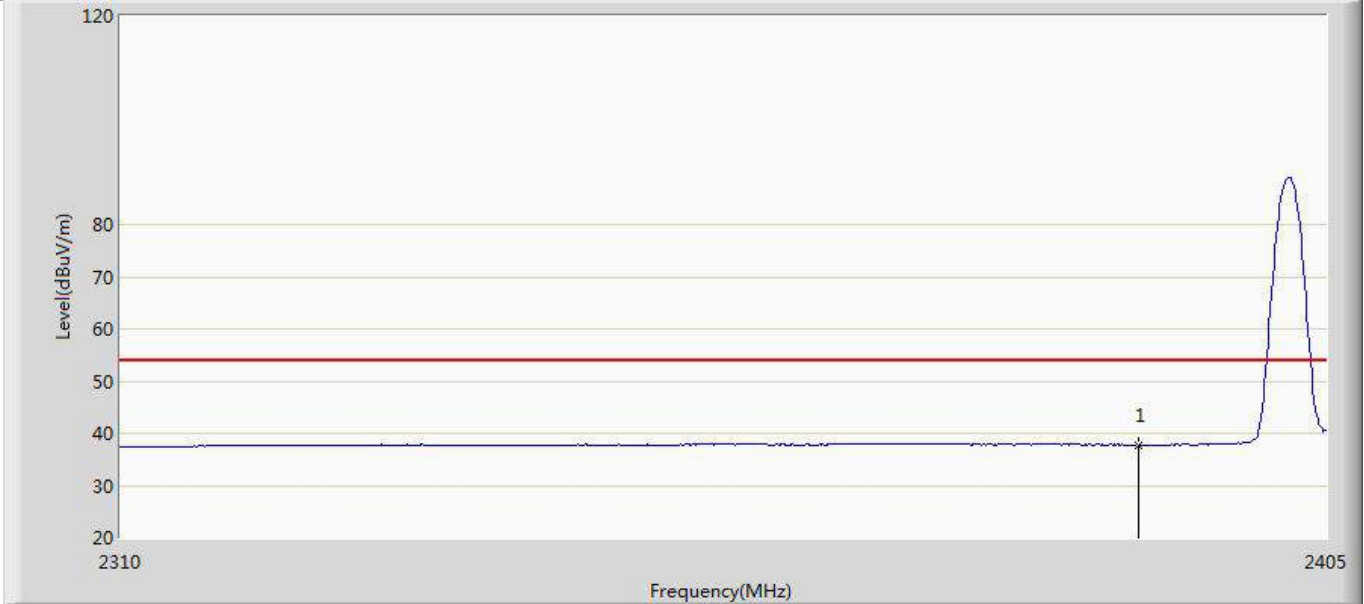

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.753	3.652	-16.247	54.000	34.102	AV




Profile: 24B1031R	Page No.: 3
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

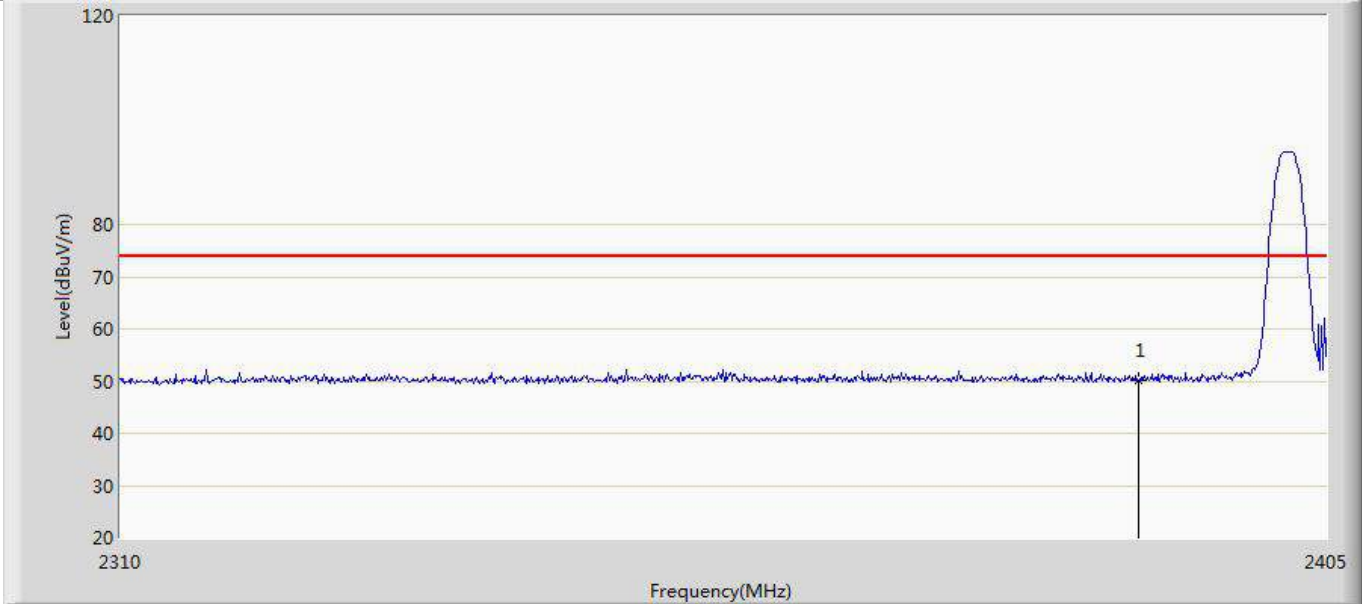

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.084	15.983	-23.916	74.000	34.102	PK




Profile: 24B1031R	Page No.: 4
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

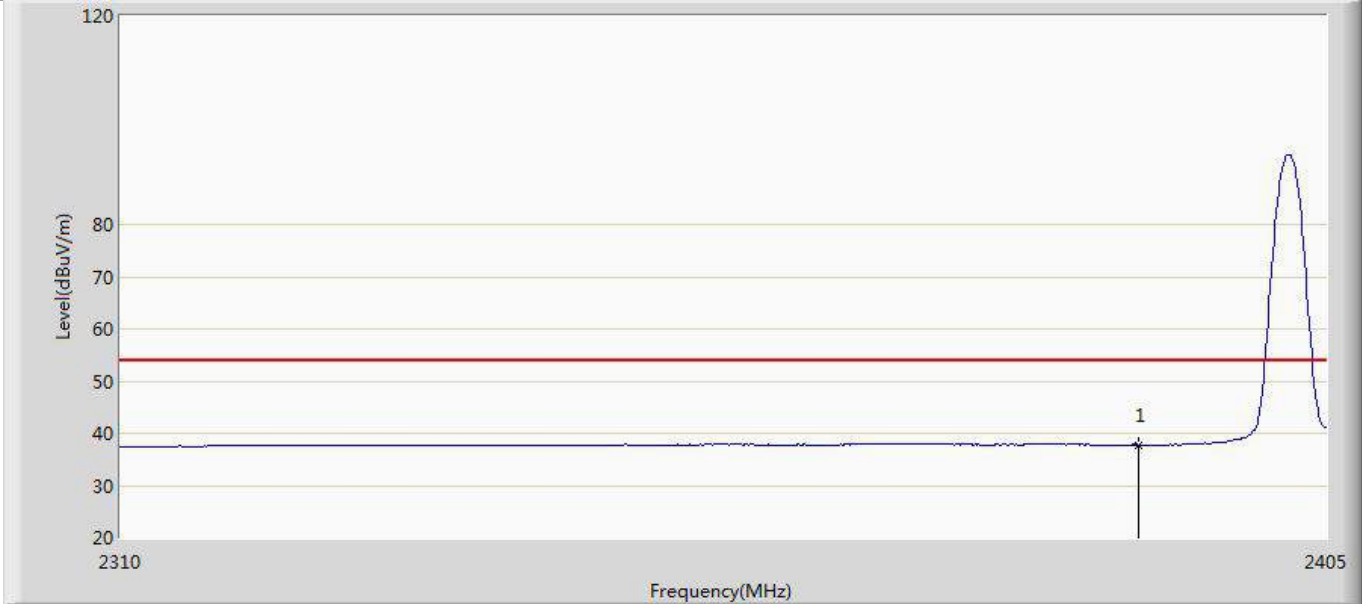

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.722	3.621	-16.278	54.000	34.102	AV




Profile: 24B1031R	Page No.: 5
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

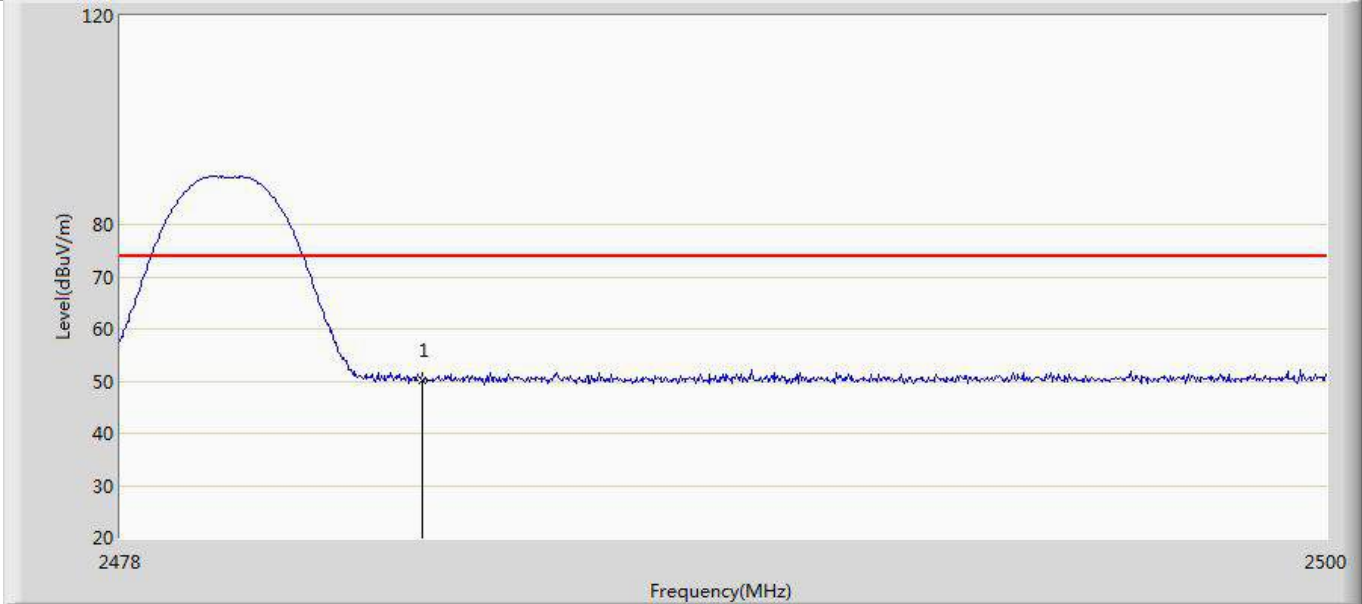

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.282	16.169	-23.718	74.000	34.114	PK


Profile: 24B1031R	Page No.: 6
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

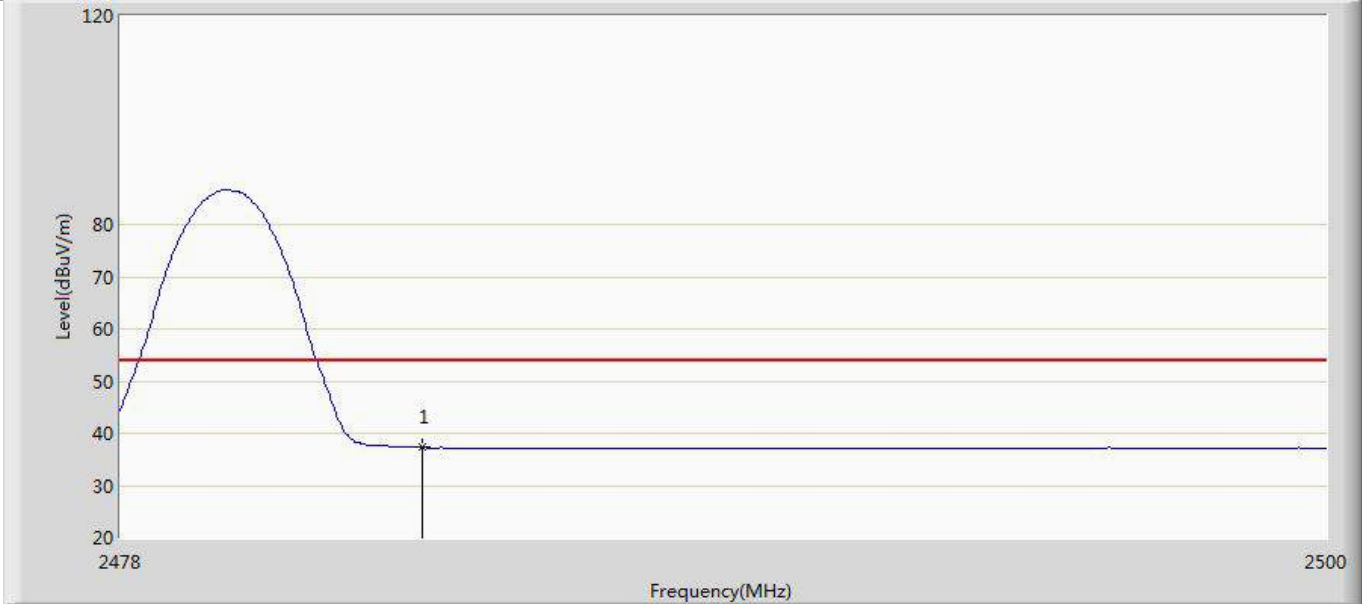

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.278	3.165	-16.722	54.000	34.114	AV




Profile: 24B1031R	Page No.: 7
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

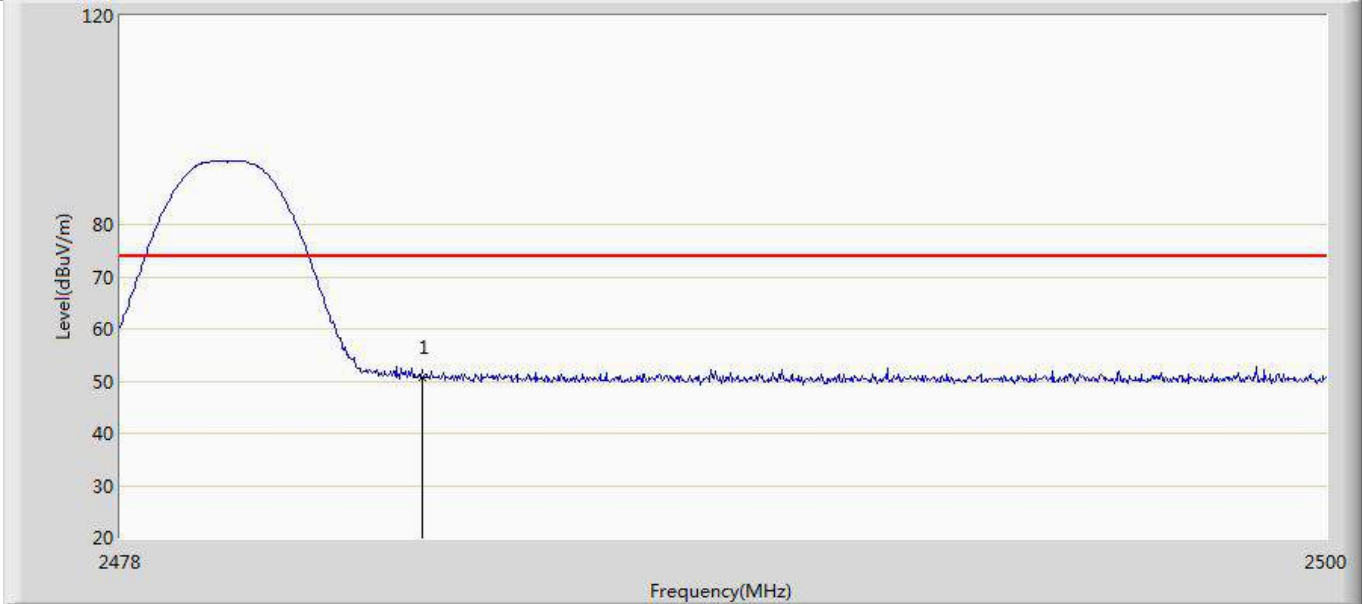

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.748	16.635	-23.252	74.000	34.114	PK




Profile: 24B1031R	Page No.: 8
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

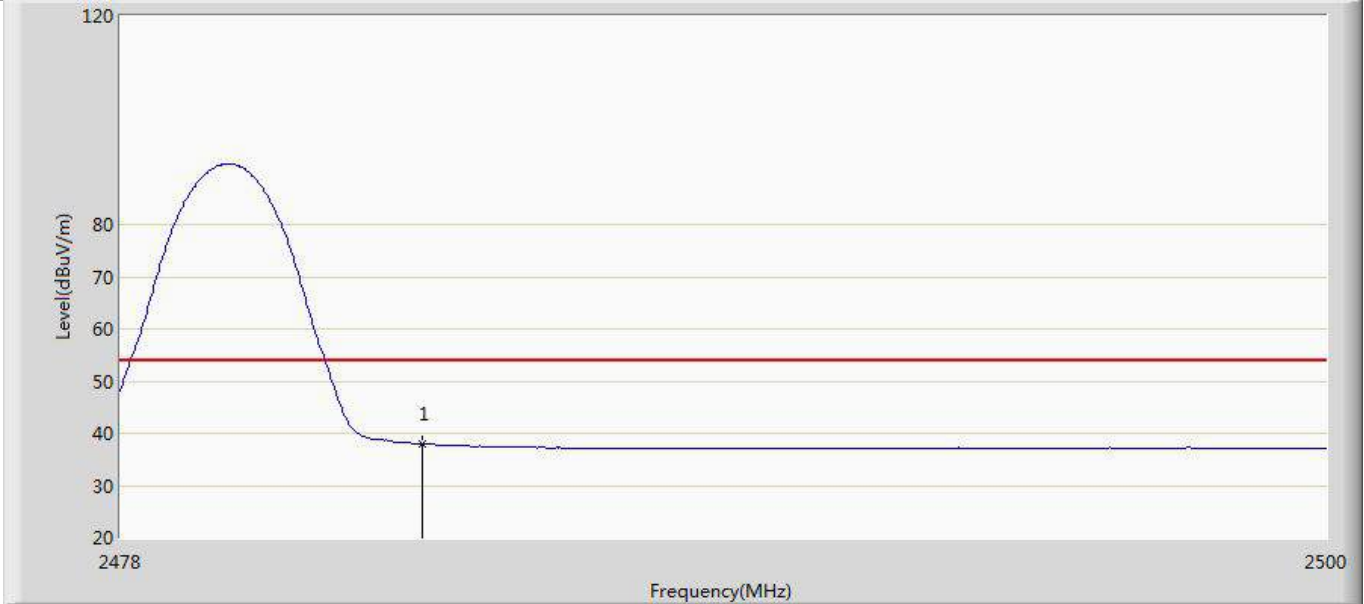

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.969	3.856	-16.031	54.000	34.114	AV




Profile: 24B1031R	Page No.: 9
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

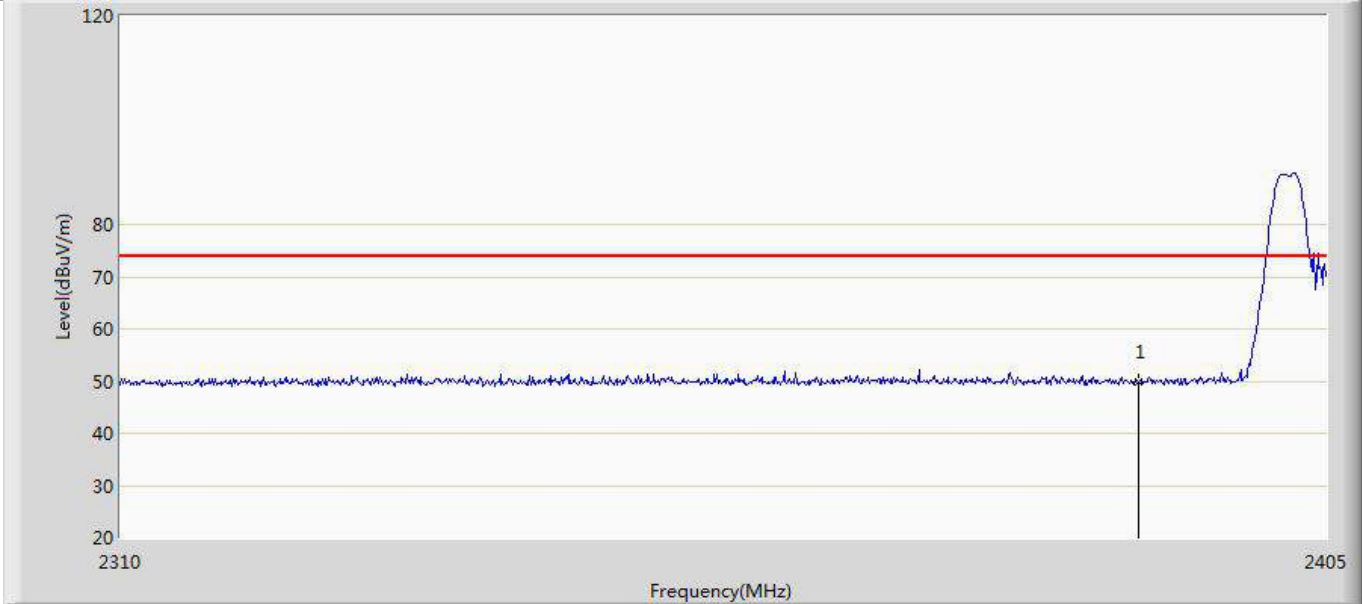

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.772	15.671	-24.228	74.000	34.102	PK


Profile: 24B1031R	Page No.: 10
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

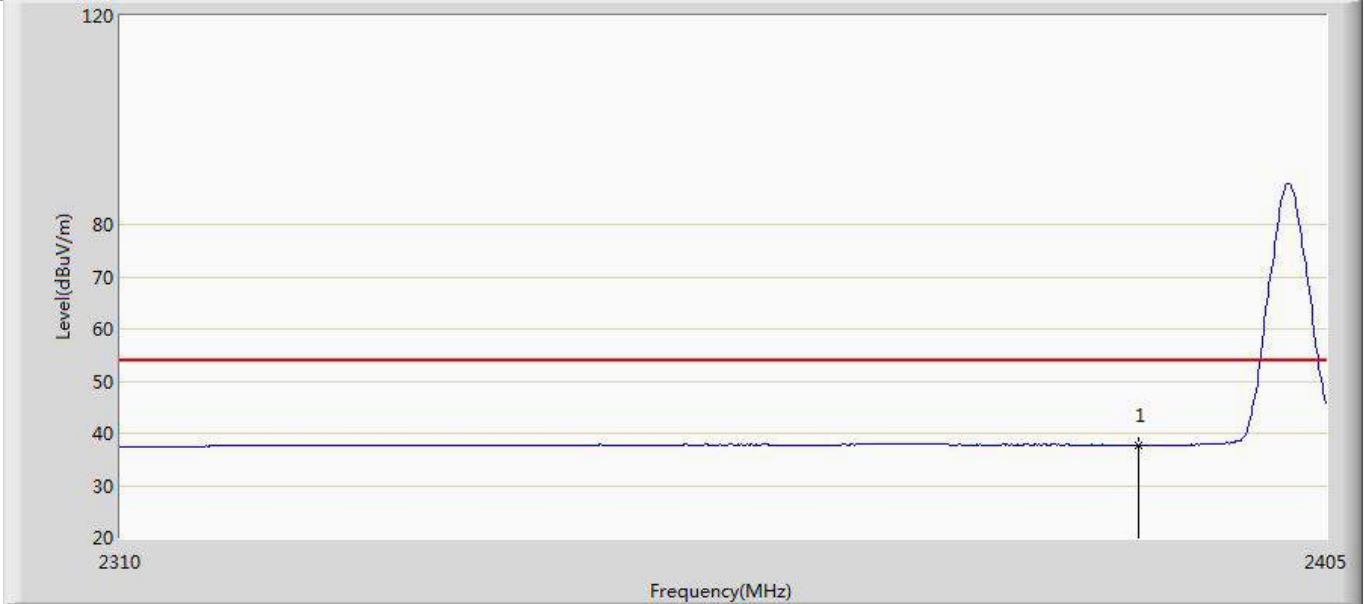

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.697	3.596	-16.303	54.000	34.102	AV




Profile: 24B1031R	Page No.: 11
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

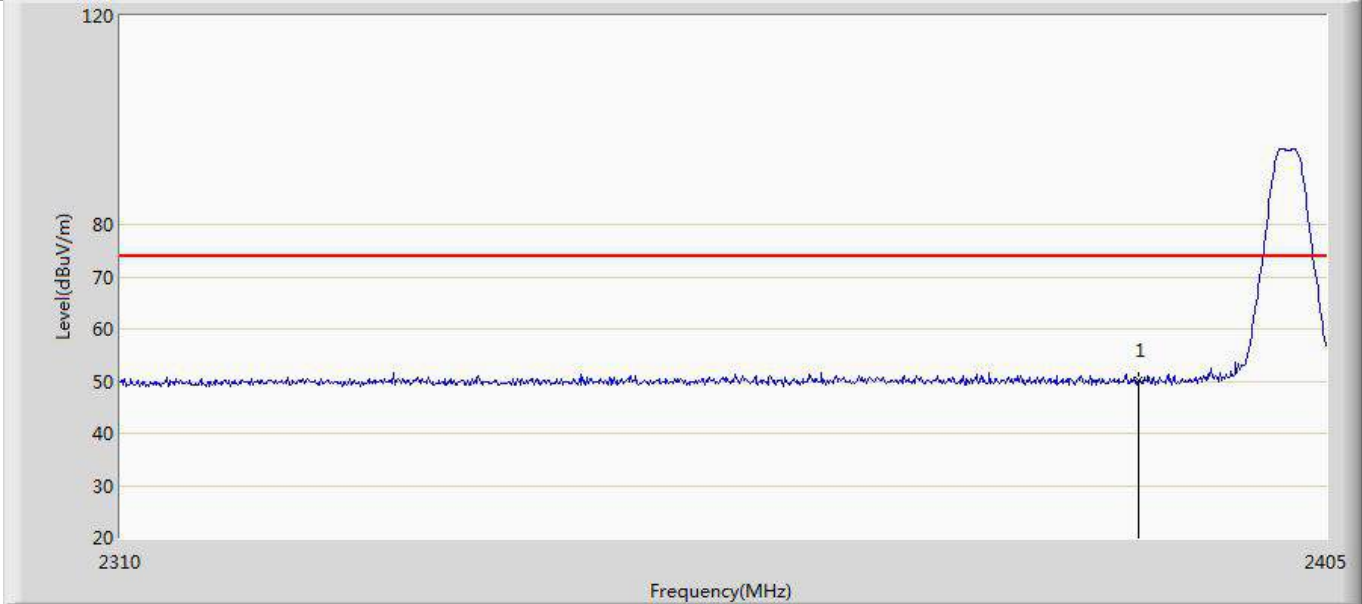


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.117	16.016	-23.883	74.000	34.102	PK

Profile: 24B1031R	Page No.: 12
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

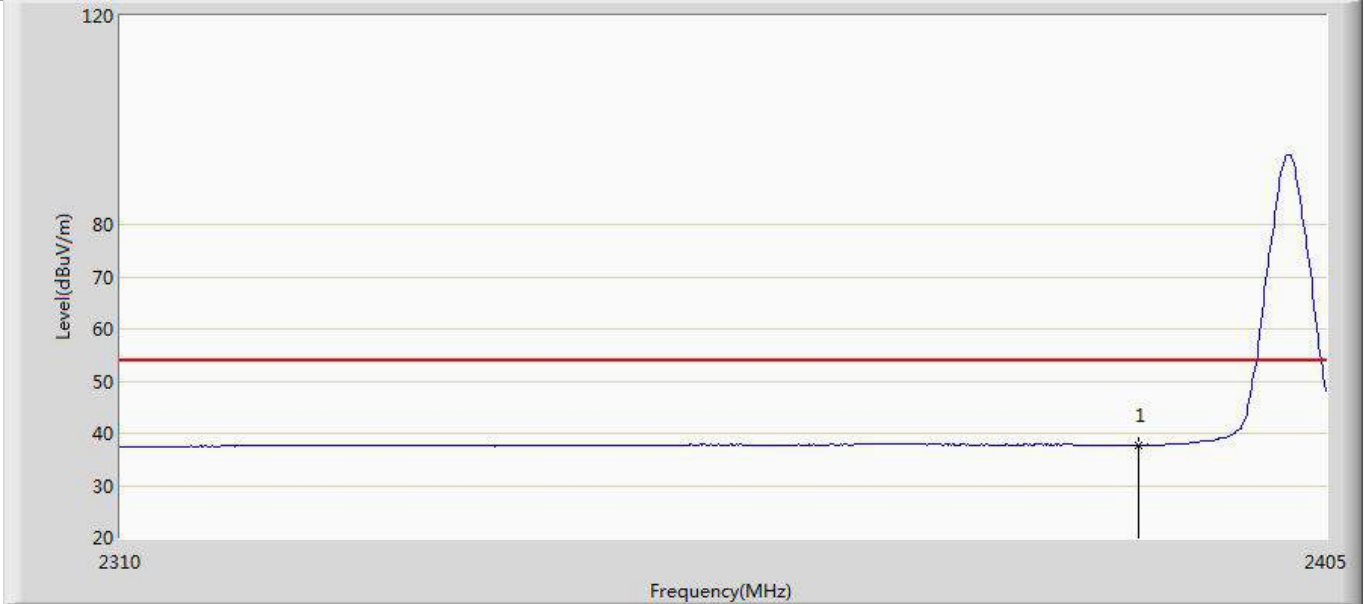

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.744	3.643	-16.256	54.000	34.102	AV


Profile: 24B1031R	Page No.: 13
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

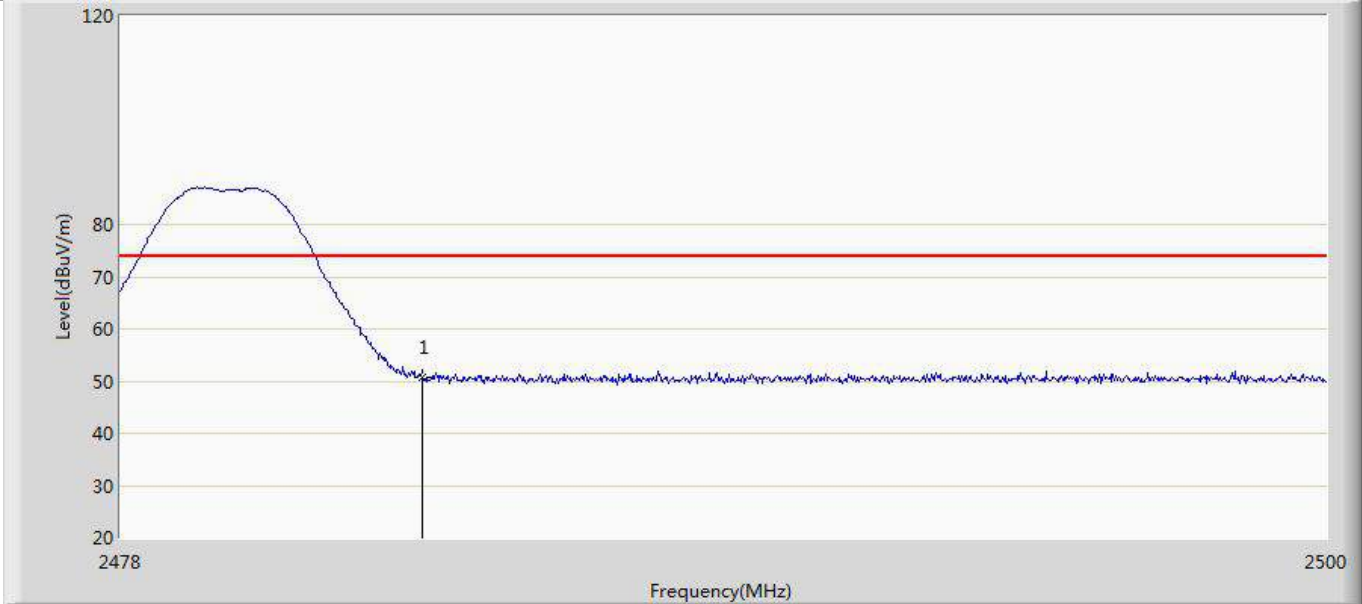

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.646	16.533	-23.354	74.000	34.114	PK




Profile: 24B1031R	Page No.: 14
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

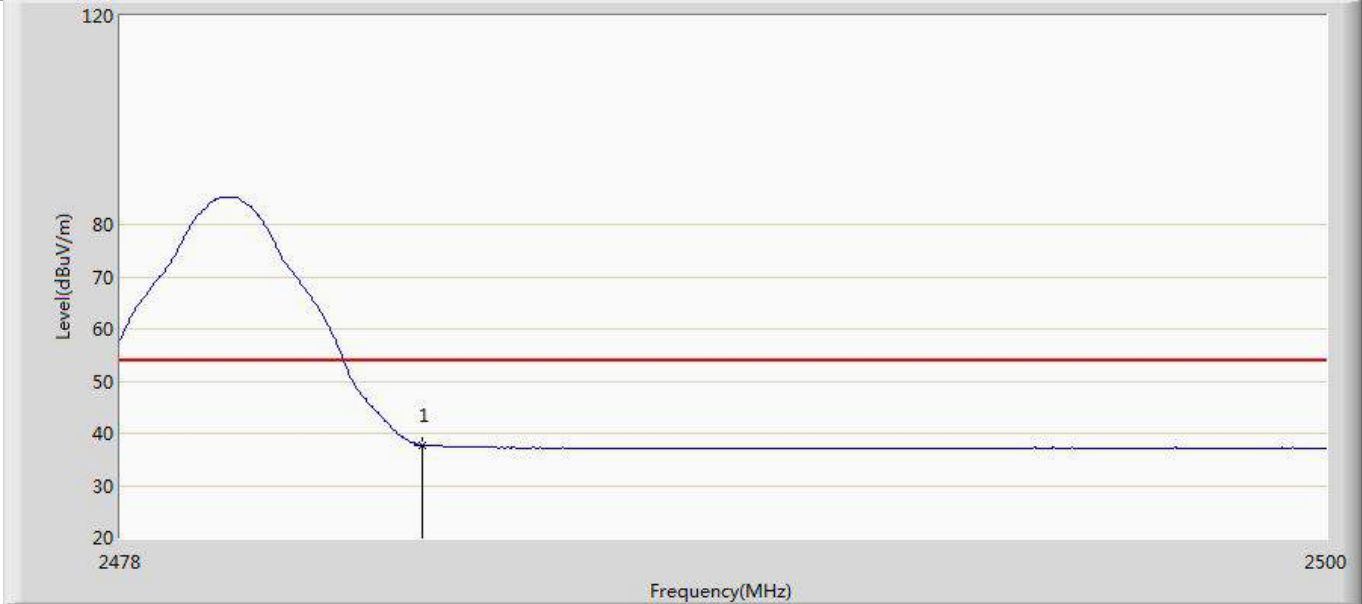

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.775	3.662	-16.225	54.000	34.114	AV




Profile: 24B1031R	Page No.: 15
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 00:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

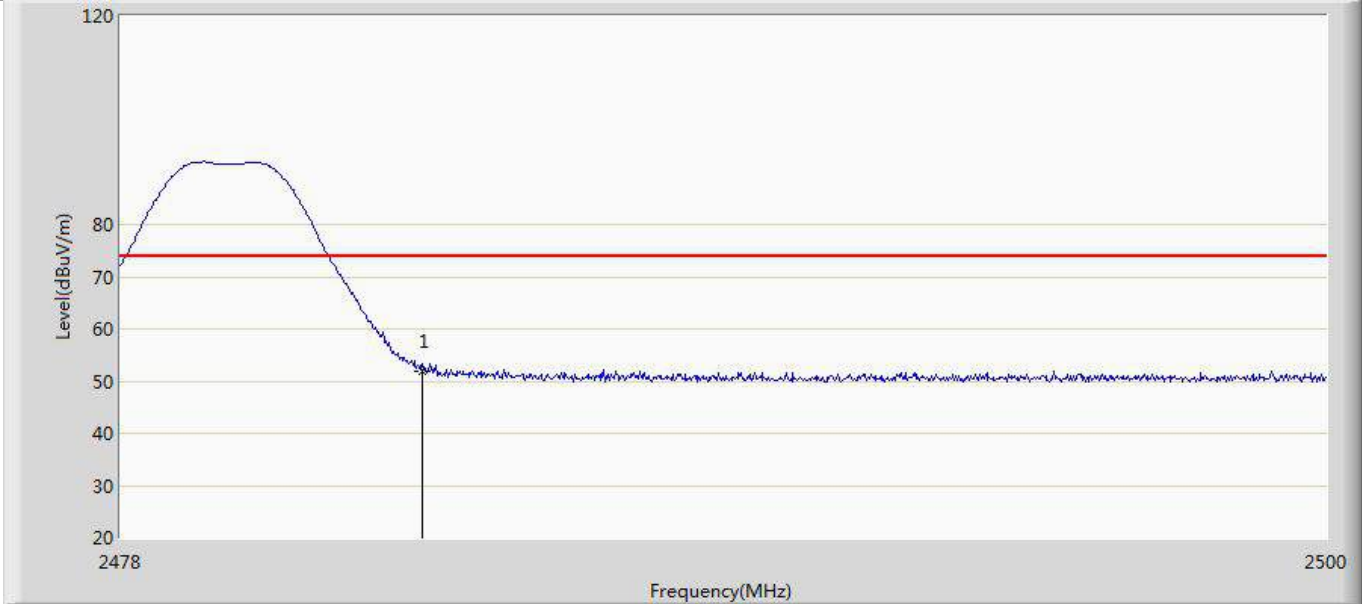


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.983	17.870	-22.017	74.000	34.114	PK

Profile: 24B1031R	Page No.: 16
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

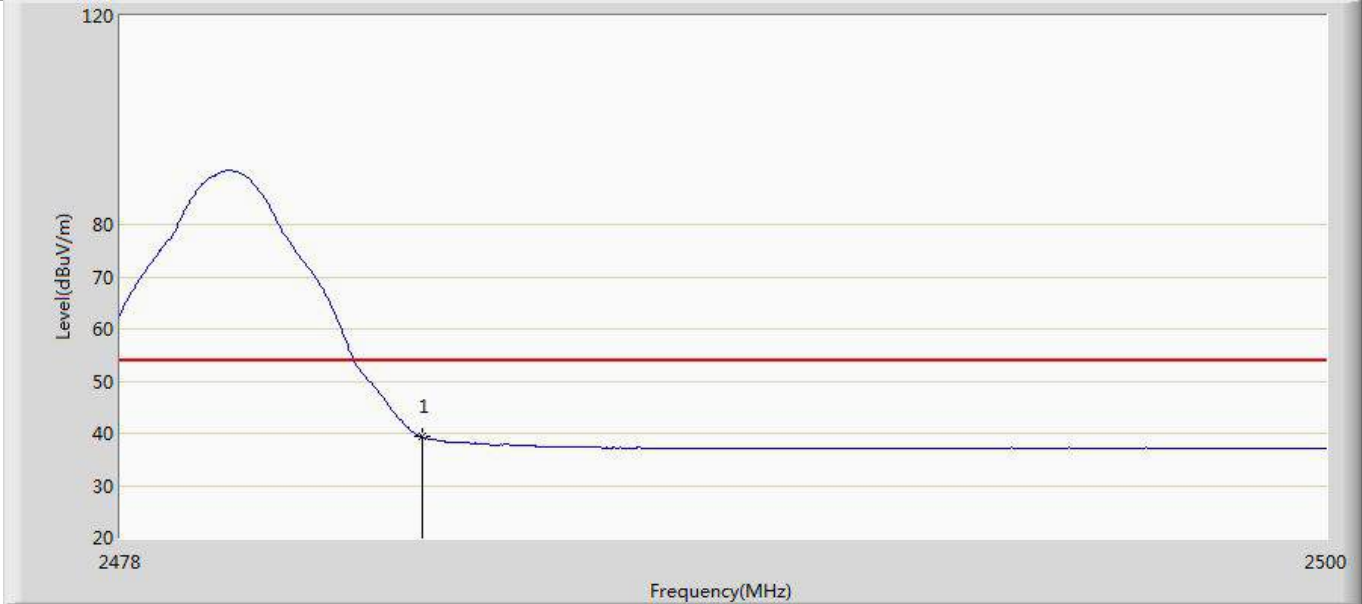

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	39.288	5.175	-14.712	54.000	34.114	AV


Profile: 24B1031R	Page No.: 17
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3: Transmit at 2402MHz by LE_Coded S=2	

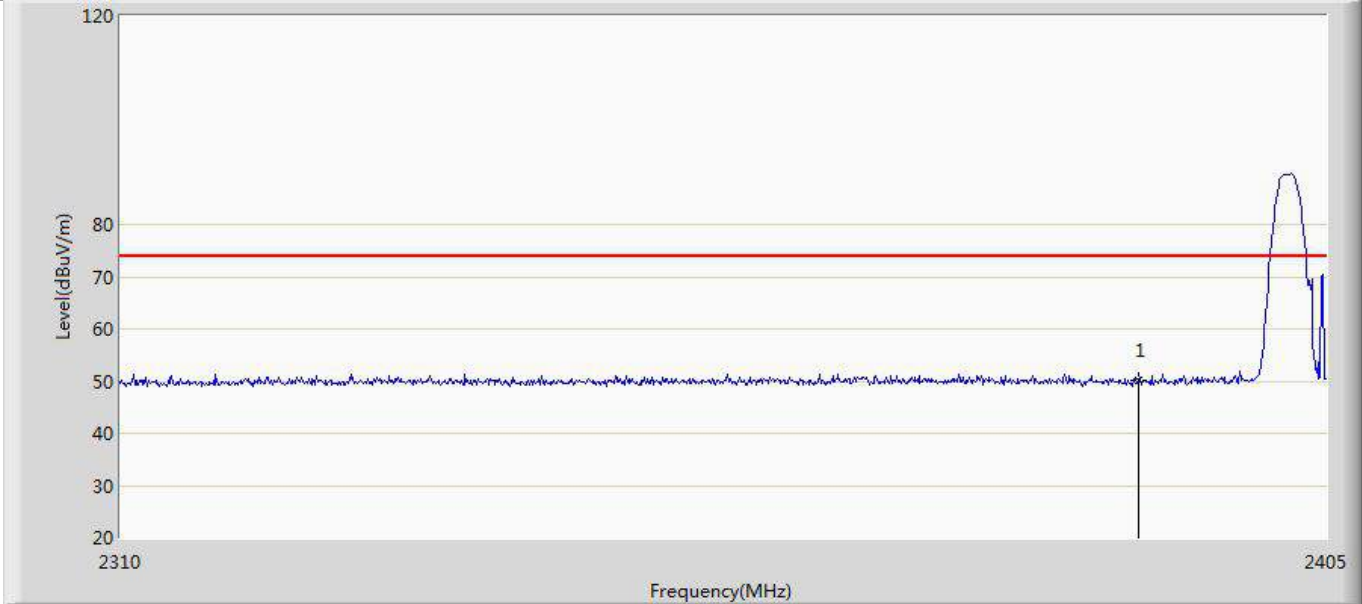

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.262	16.161	-23.738	74.000	34.102	PK




Profile: 24B1031R	Page No.: 18
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3: Transmit at 2402MHz by LE_Coded S=2	

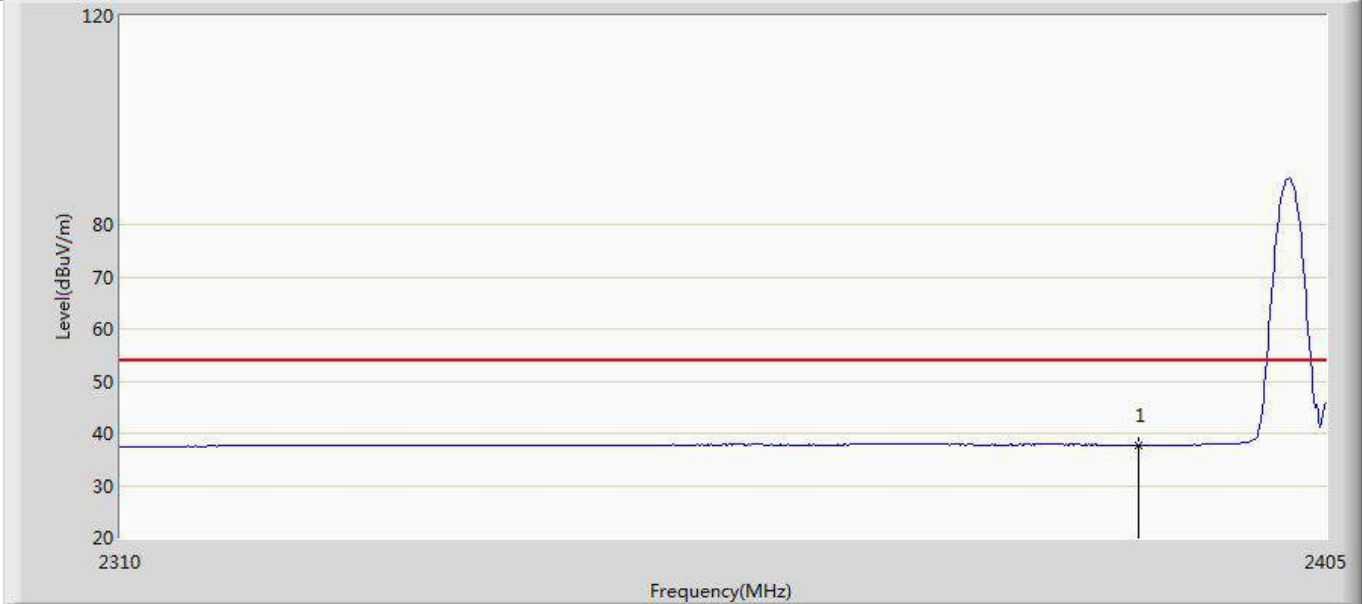

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.808	3.707	-16.192	54.000	34.102	AV




Profile: 24B1031R	Page No.: 19
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3: Transmit at 2402MHz by LE_Coded S=2	

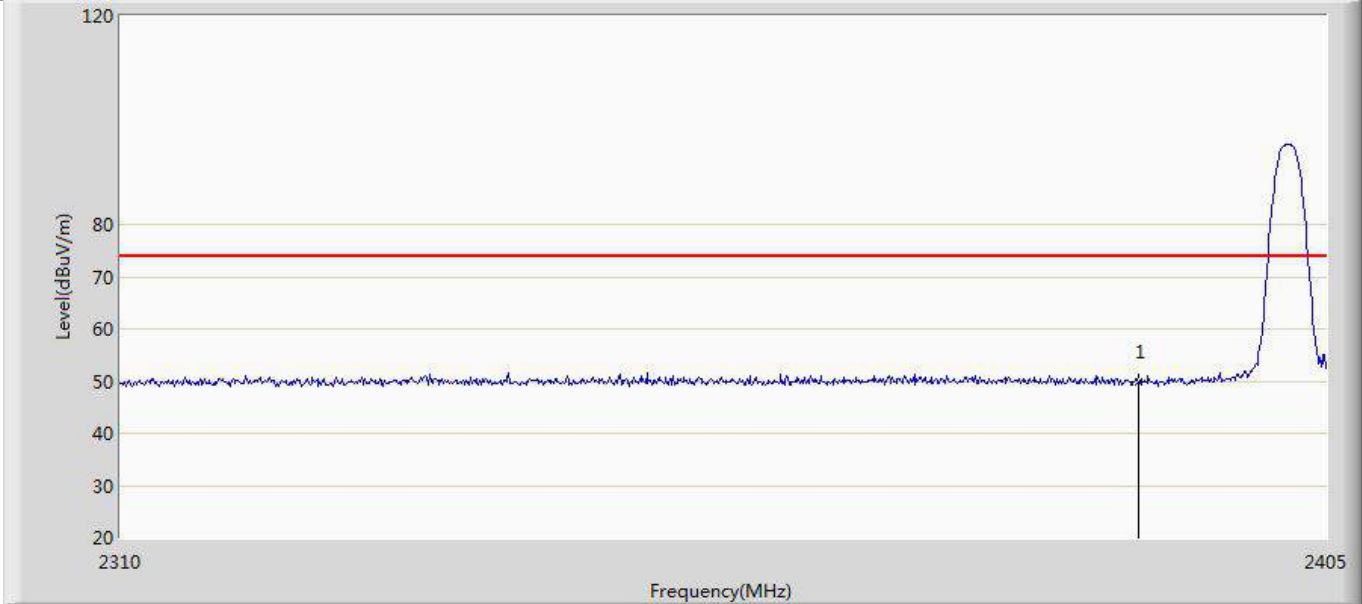


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.767	15.666	-24.233	74.000	34.102	PK

Profile: 24B1031R	Page No.: 20
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3: Transmit at 2402MHz by LE_Coded S=2	

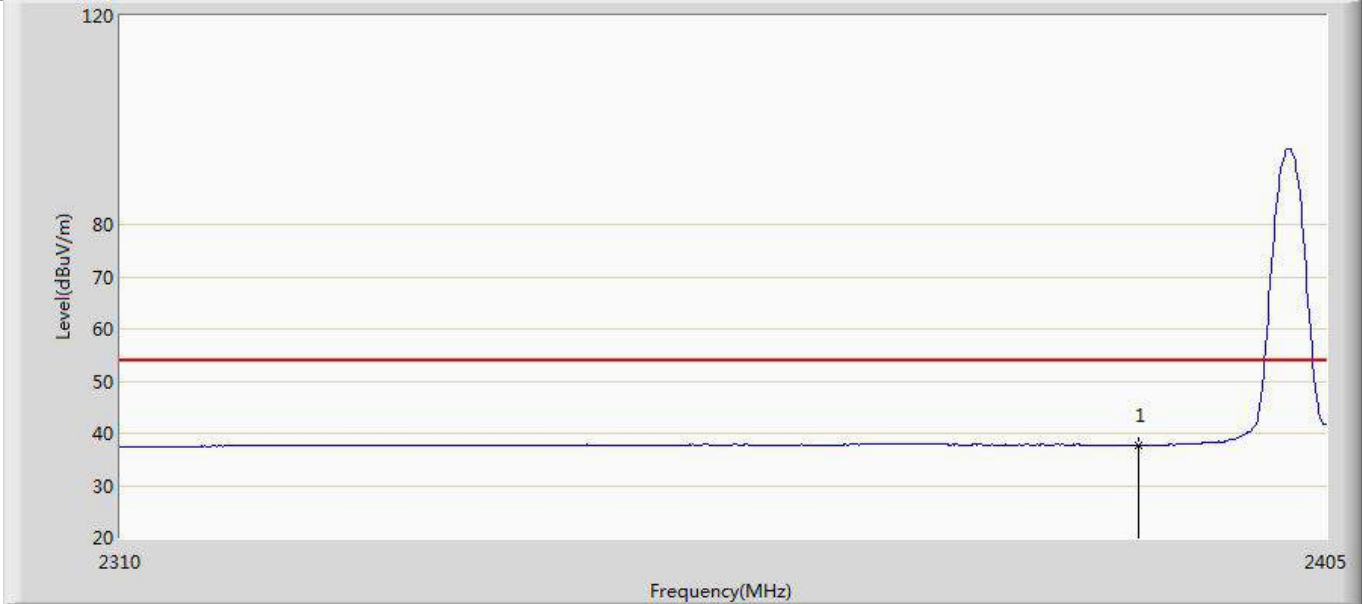

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.721	3.620	-16.279	54.000	34.102	AV


Profile: 24B1031R	Page No.: 21
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3: Transmit at 2480MHz by LE_Coded S=2	

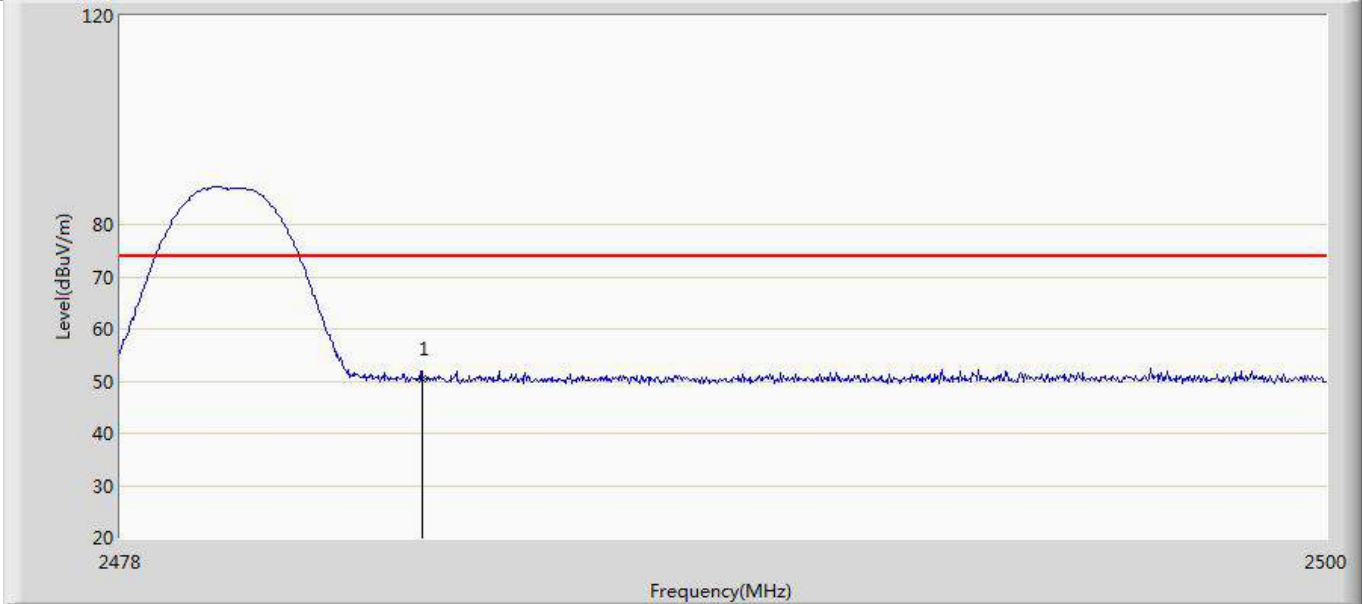

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.546	16.433	-23.454	74.000	34.114	PK




Profile: 24B1031R	Page No.: 22
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3: Transmit at 2480MHz by LE_Coded S=2	

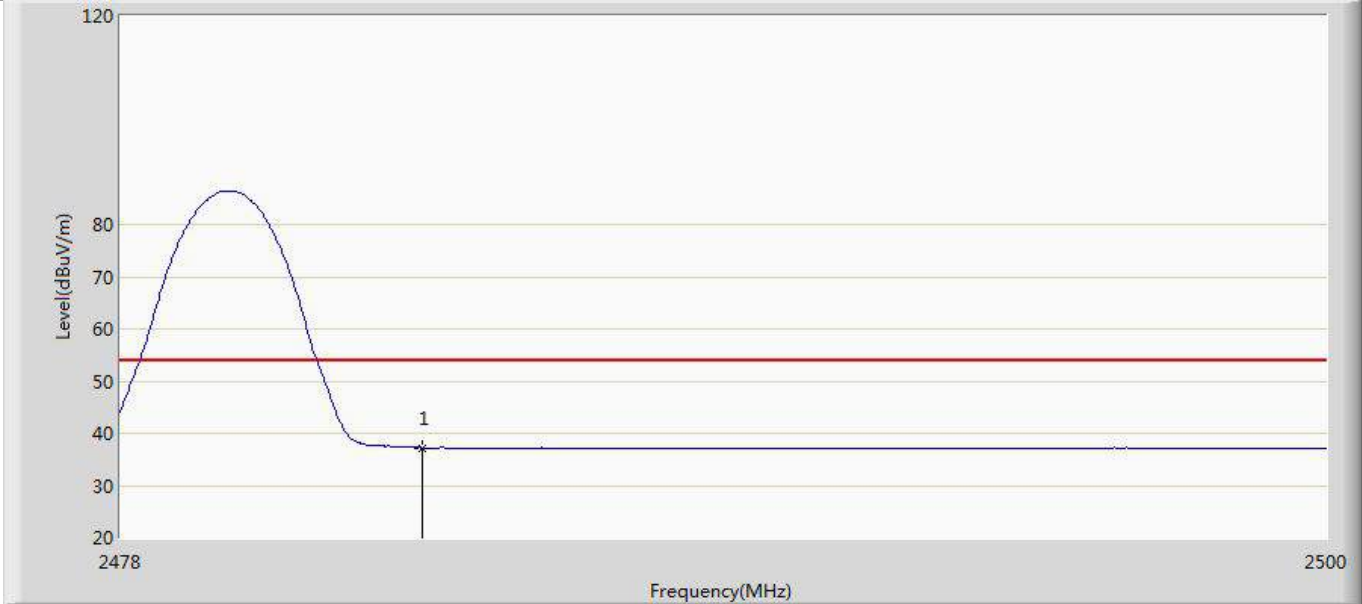

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.219	3.106	-16.781	54.000	34.114	AV


Profile: 24B1031R	Page No.: 23
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3: Transmit at 2480MHz by LE_Coded S=2	

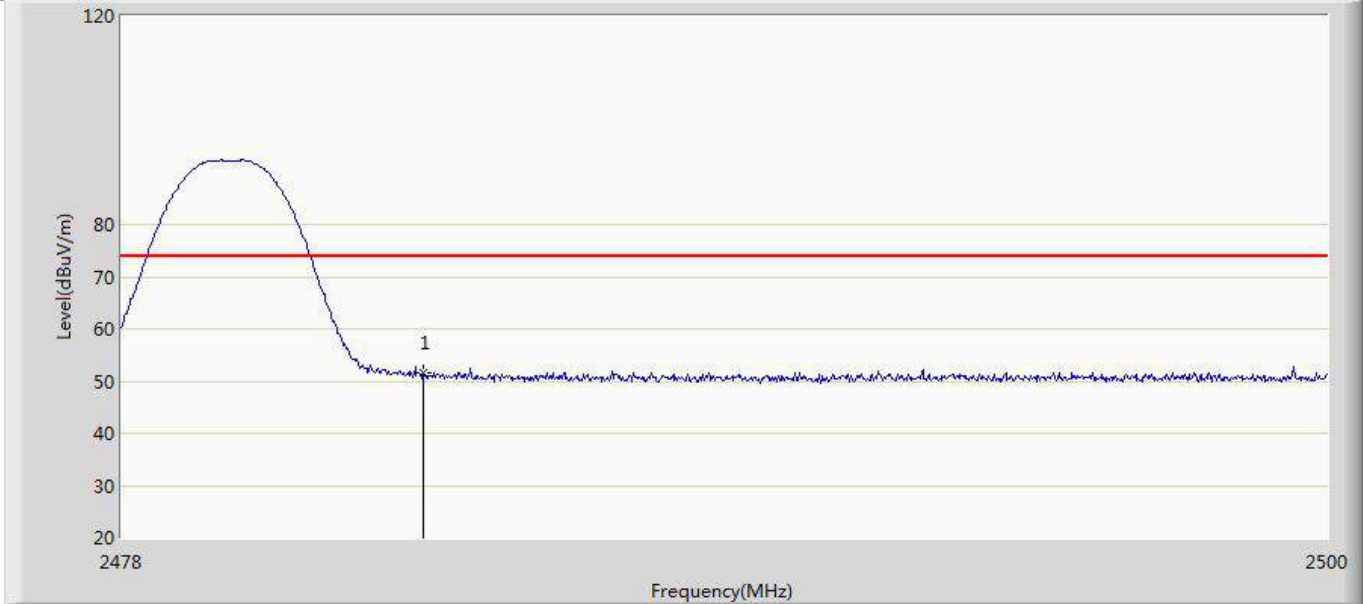

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.496	17.383	-22.504	74.000	34.114	PK




Profile: 24B1031R	Page No.: 24
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3: Transmit at 2480MHz by LE_Coded S=2	

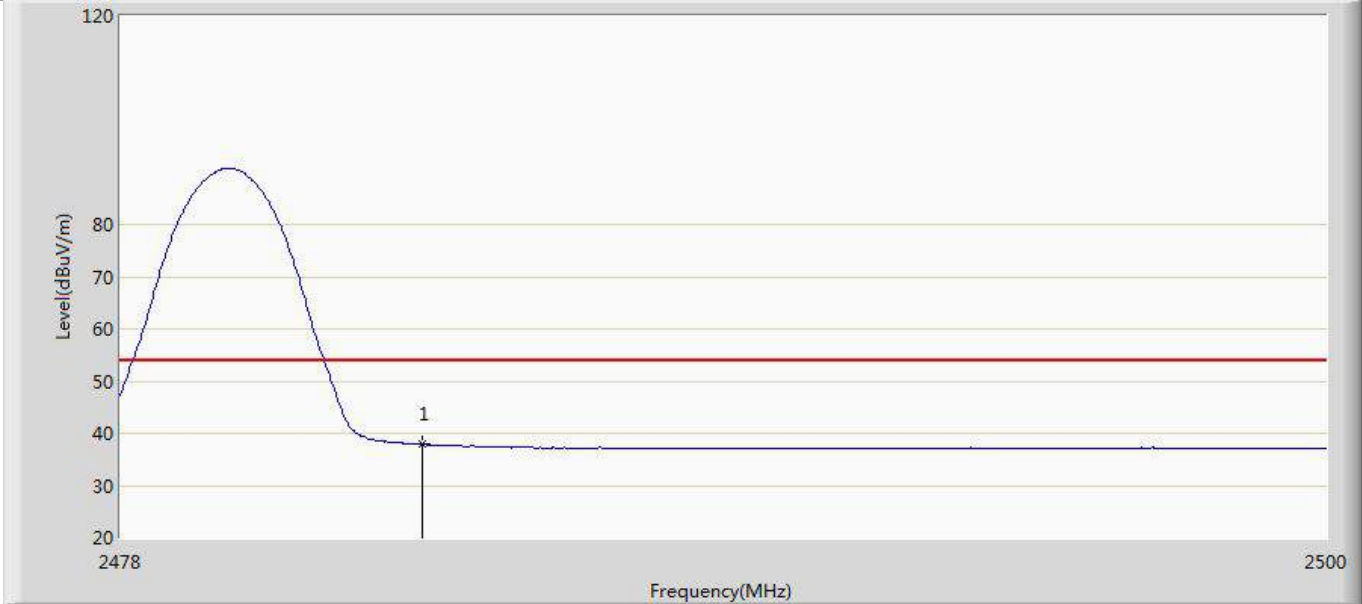

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.913	3.800	-16.087	54.000	34.114	AV




Profile: 24B1031R	Page No.: 25
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4: Transmit at 2402MHz by LE_Coded S=8	

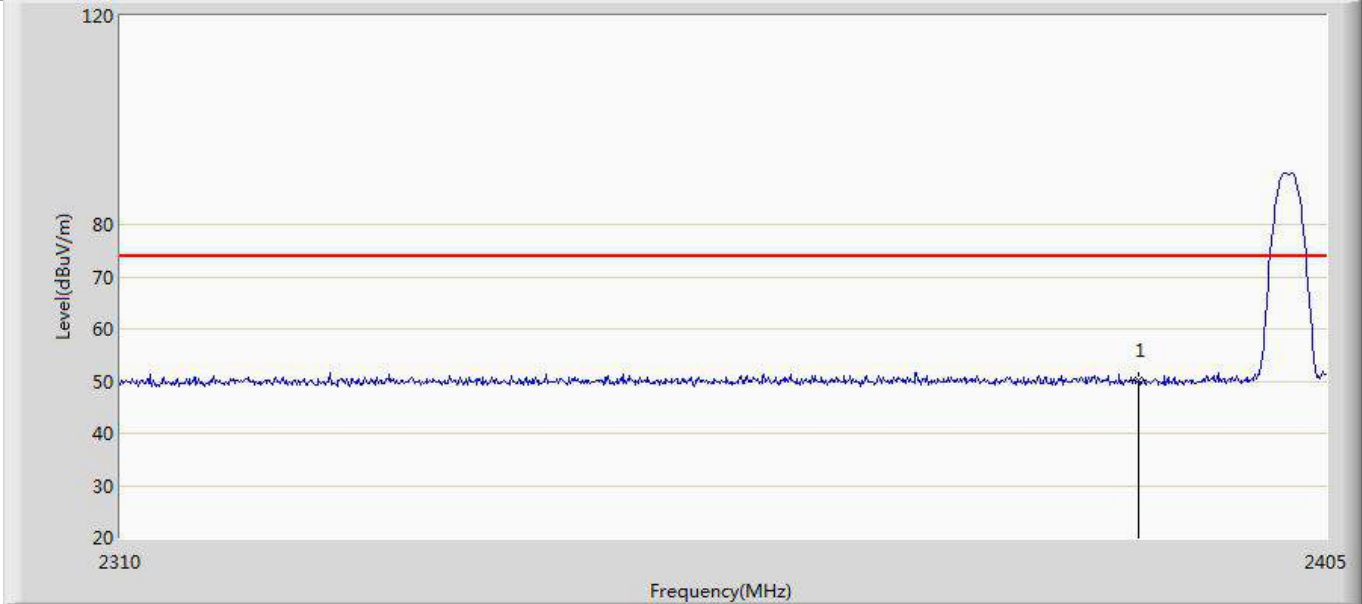

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.031	15.930	-23.969	74.000	34.102	PK


Profile: 24B1031R	Page No.: 26
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4: Transmit at 2402MHz by LE_Coded S=8	

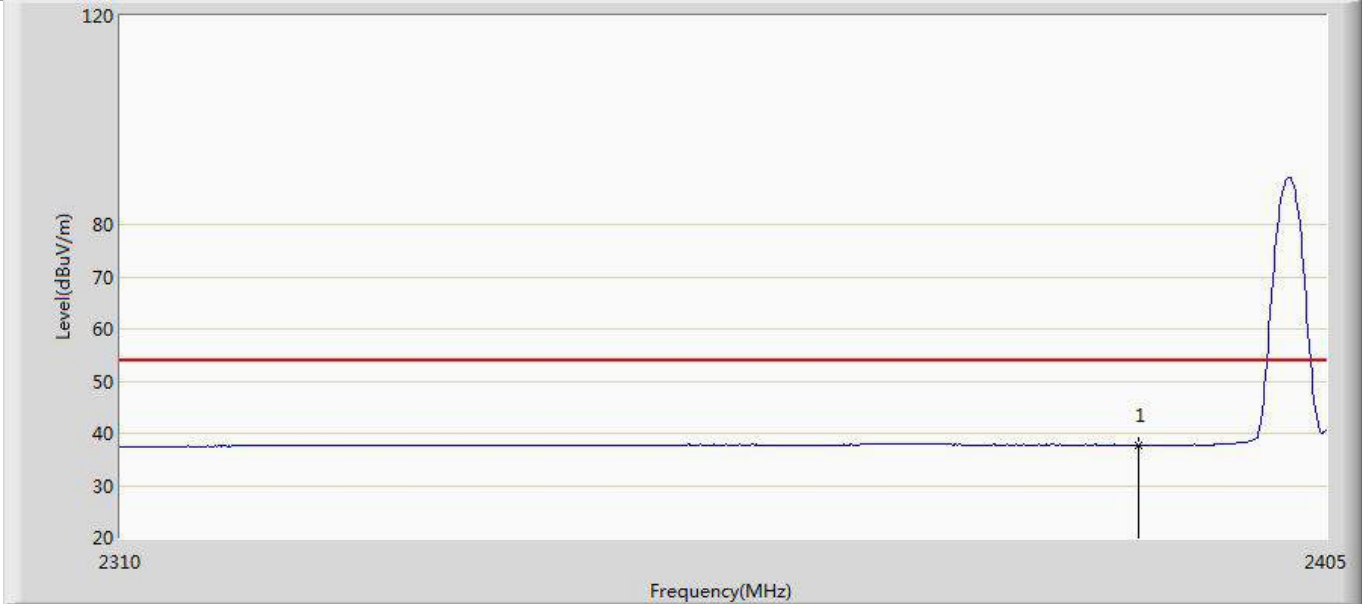

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.730	3.629	-16.270	54.000	34.102	AV




Profile: 24B1031R	Page No.: 27
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4 : Transmit at 2402MHz by LE_Coded S=8	

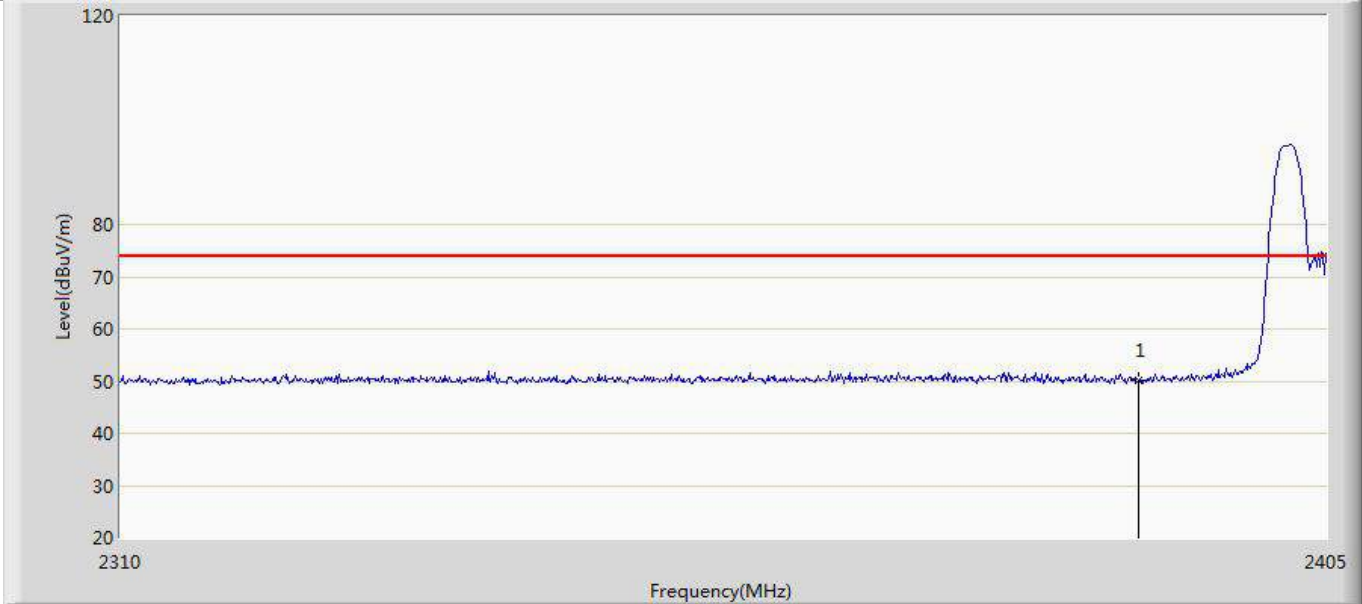


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.260	16.159	-23.740	74.000	34.102	PK

Profile: 24B1031R	Page No.: 28
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4: Transmit at 2402MHz by LE_Coded S=8	

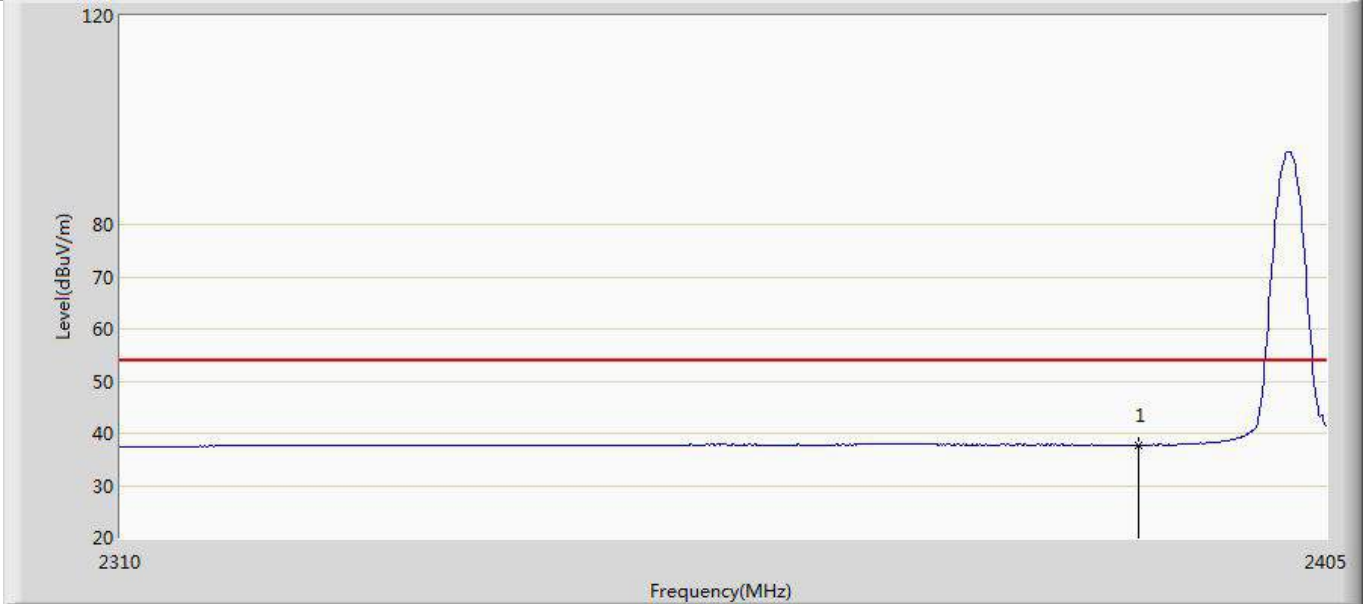

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.696	3.595	-16.304	54.000	34.102	AV


Profile: 24B1031R	Page No.: 29
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4: Transmit at 2480MHz by LE_Coded S=8	

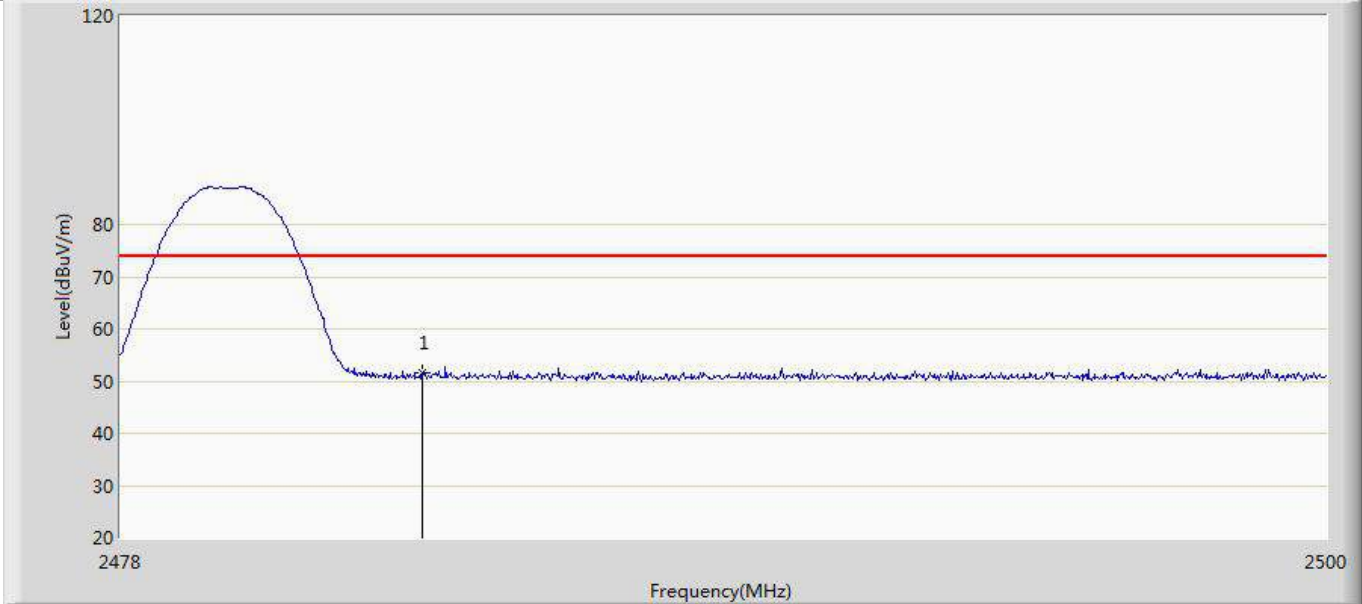

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.726	17.613	-22.274	74.000	34.114	PK




Profile: 24B1031R	Page No.: 30
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4: Transmit at 2480MHz by LE_Coded S=8	

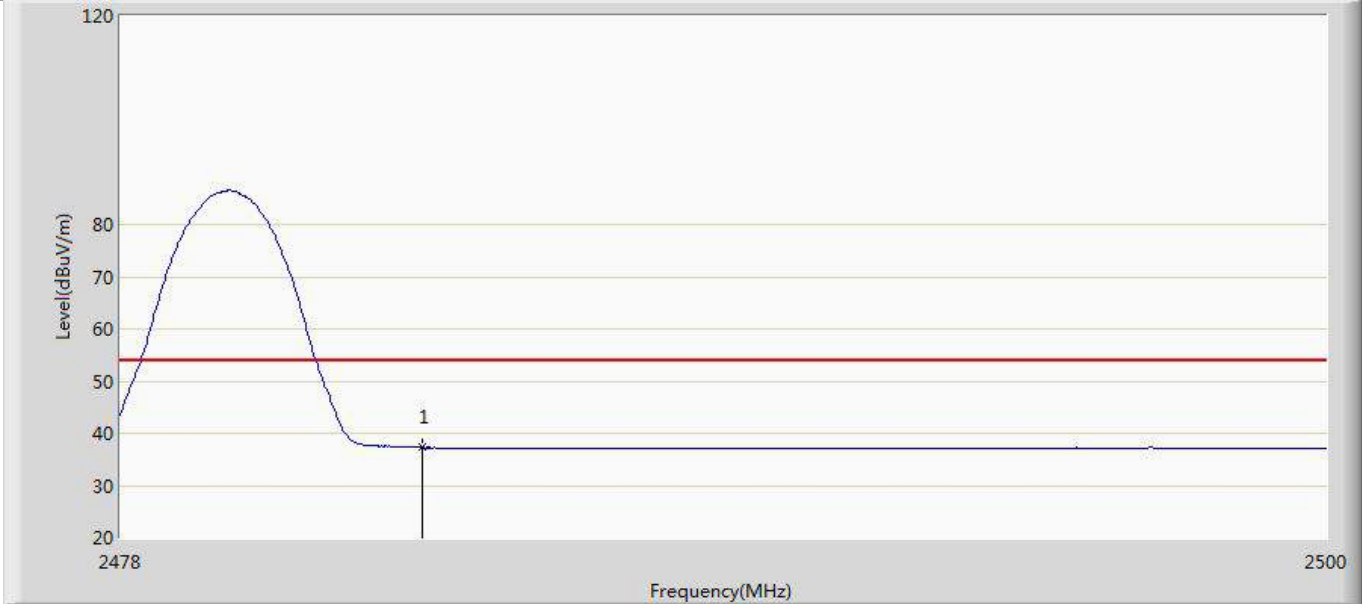

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.311	3.198	-16.689	54.000	34.114	AV


Profile: 24B1031R	Page No.: 31
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4: Transmit at 2480MHz by LE_Coded S=8	

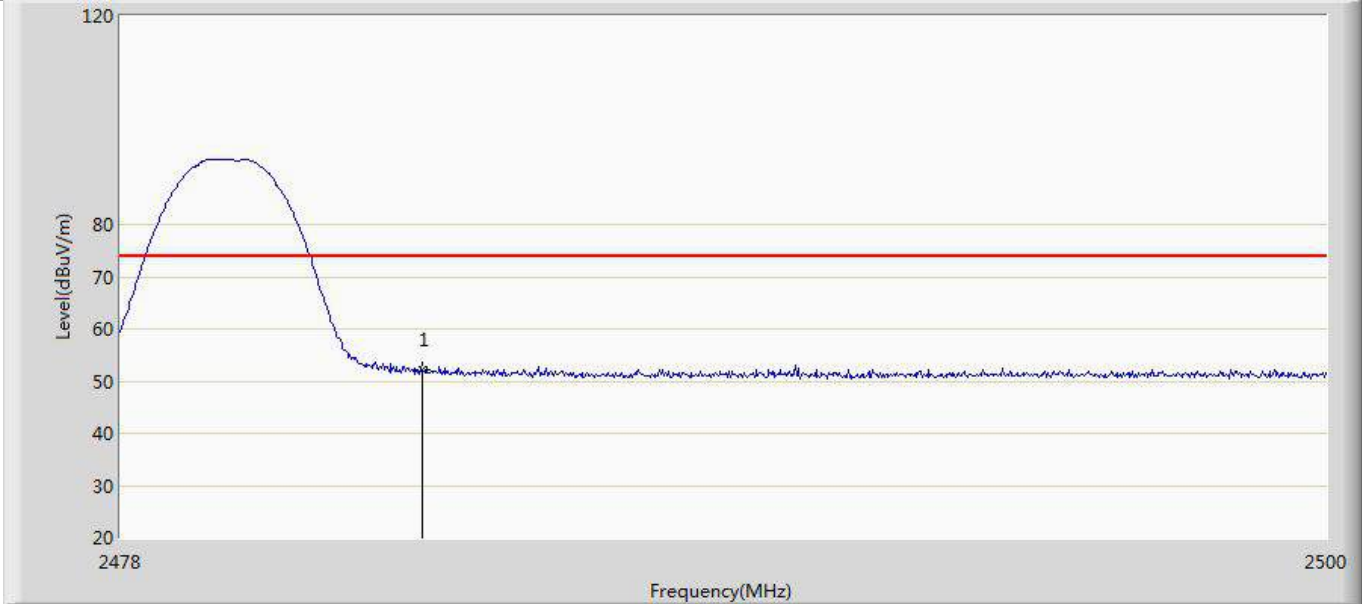

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	52.067	17.954	-21.933	74.000	34.114	PK




Profile: 24B1031R	Page No.: 32
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4: Transmit at 2480MHz by LE_Coded S=8	

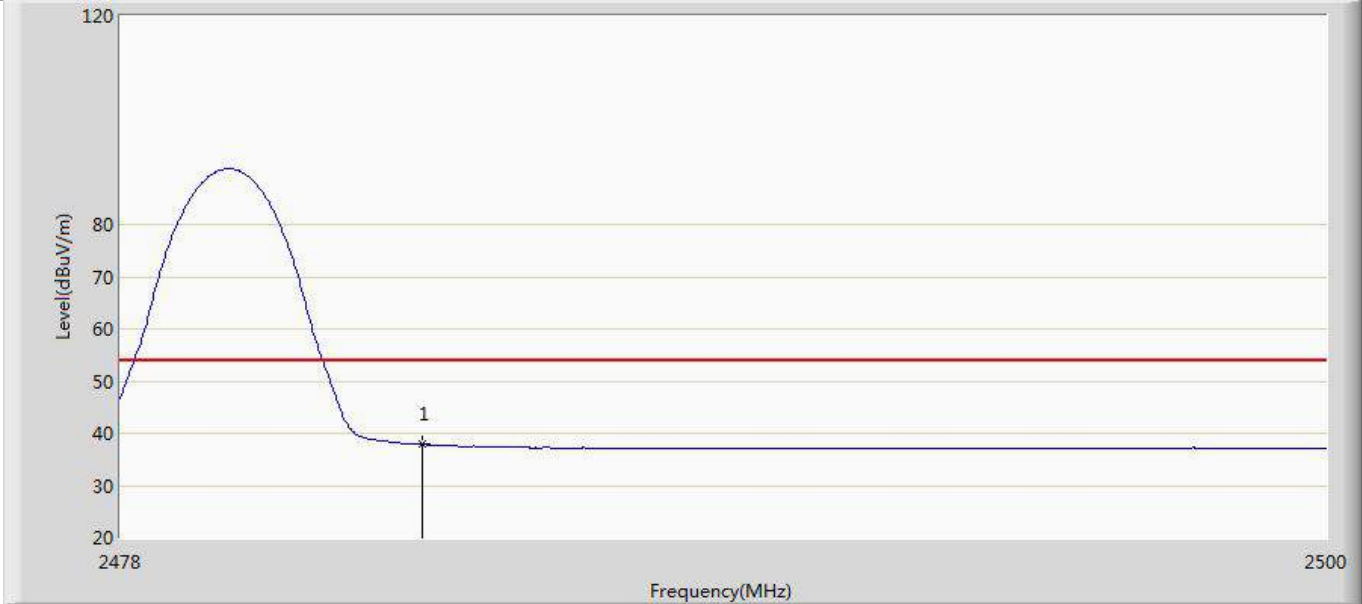

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.900	3.787	-16.100	54.000	34.114	AV


Profile: 24B1031R	Page No.: 33
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2405MHz by Zigbee	

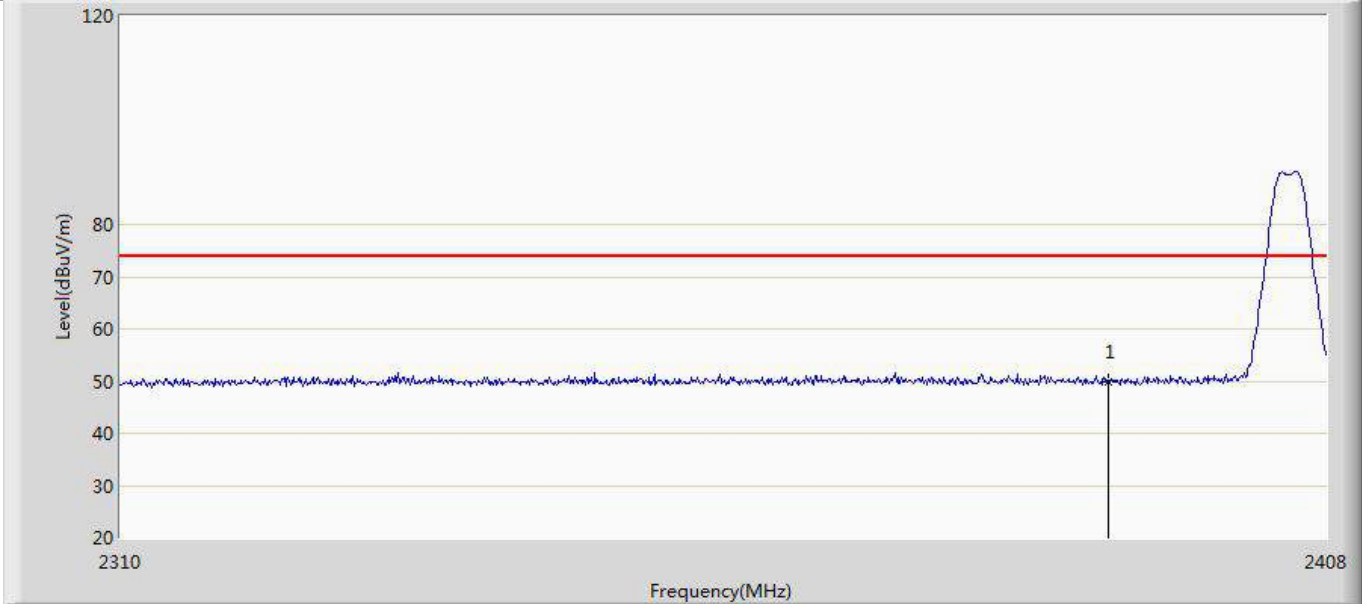

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.998	15.897	-24.002	74.000	34.102	PK




Profile: 24B1031R	Page No.: 34
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2405MHz by Zigbee	

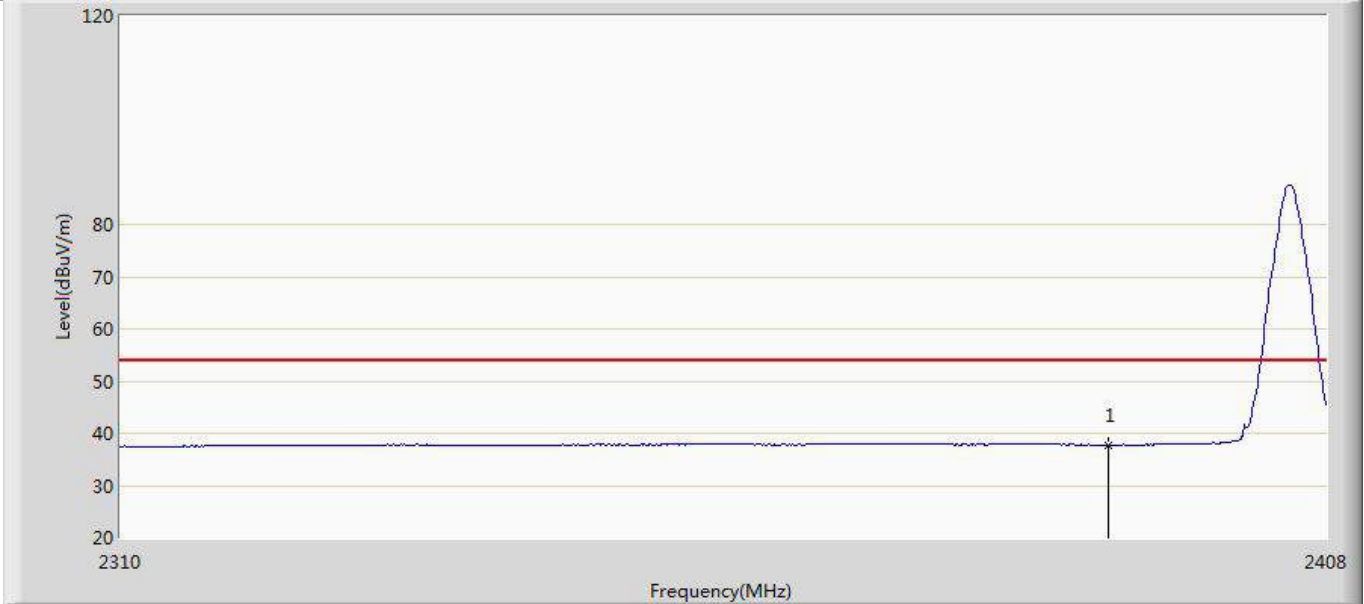


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.721	3.620	-16.279	54.000	34.102	AV

Profile: 24B1031R	Page No.: 35
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2405MHz by Zigbee	

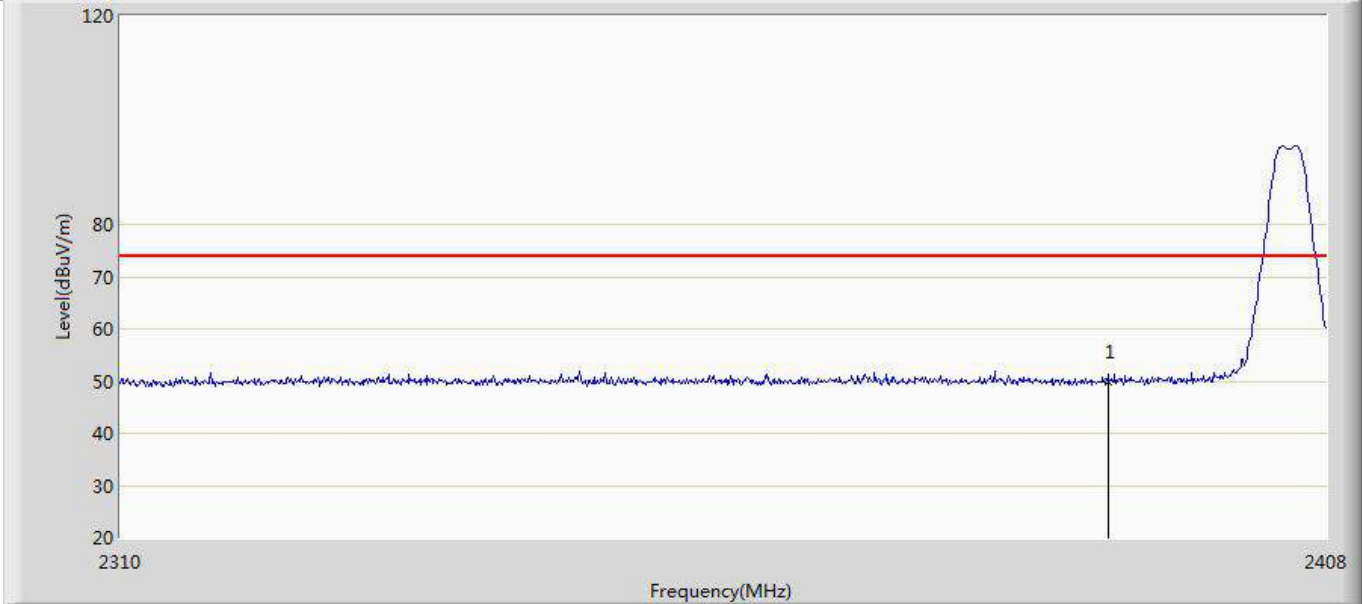

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.762	15.661	-24.238	74.000	34.102	PK


Profile: 24B1031R	Page No.: 36
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2405MHz by Zigbee	

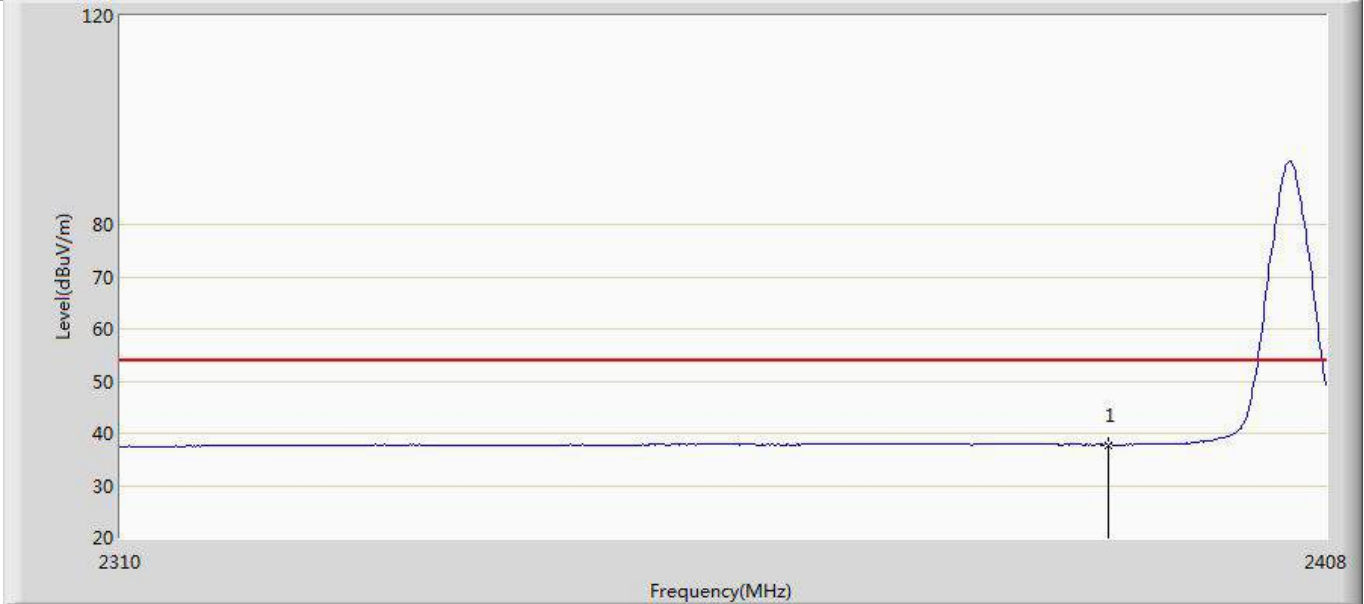

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.796	3.695	-16.204	54.000	34.102	AV




Profile: 24B1031R	Page No.: 37
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by Zigbee	

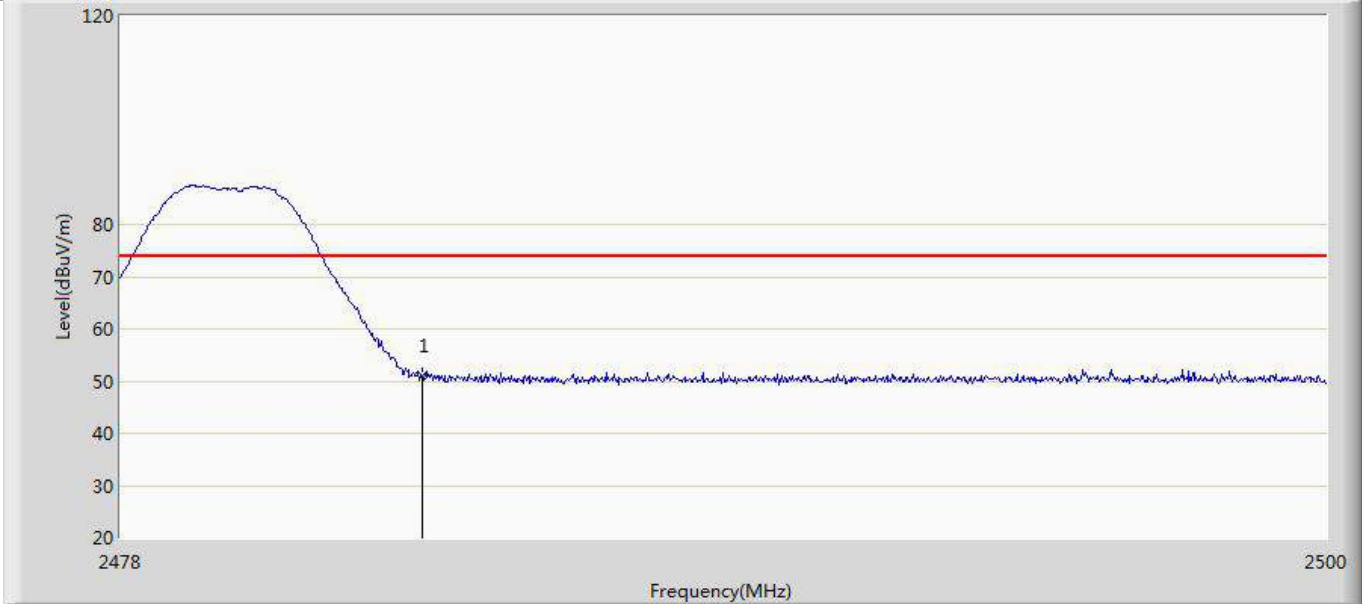

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.920	16.807	-23.080	74.000	34.114	PK




Profile: 24B1031R	Page No.: 38
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 02:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by Zigbee	

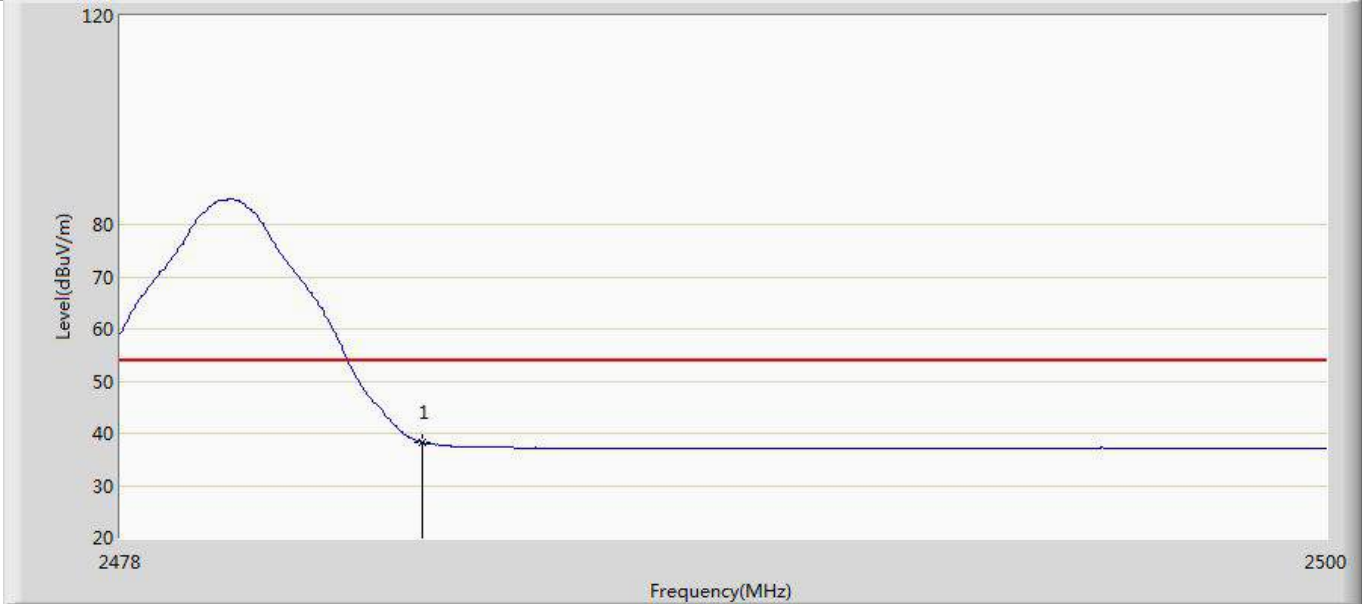

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	38.244	4.131	-15.756	54.000	34.114	AV




Profile: 24B1031R	Page No.: 39
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 02:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by Zigbee	

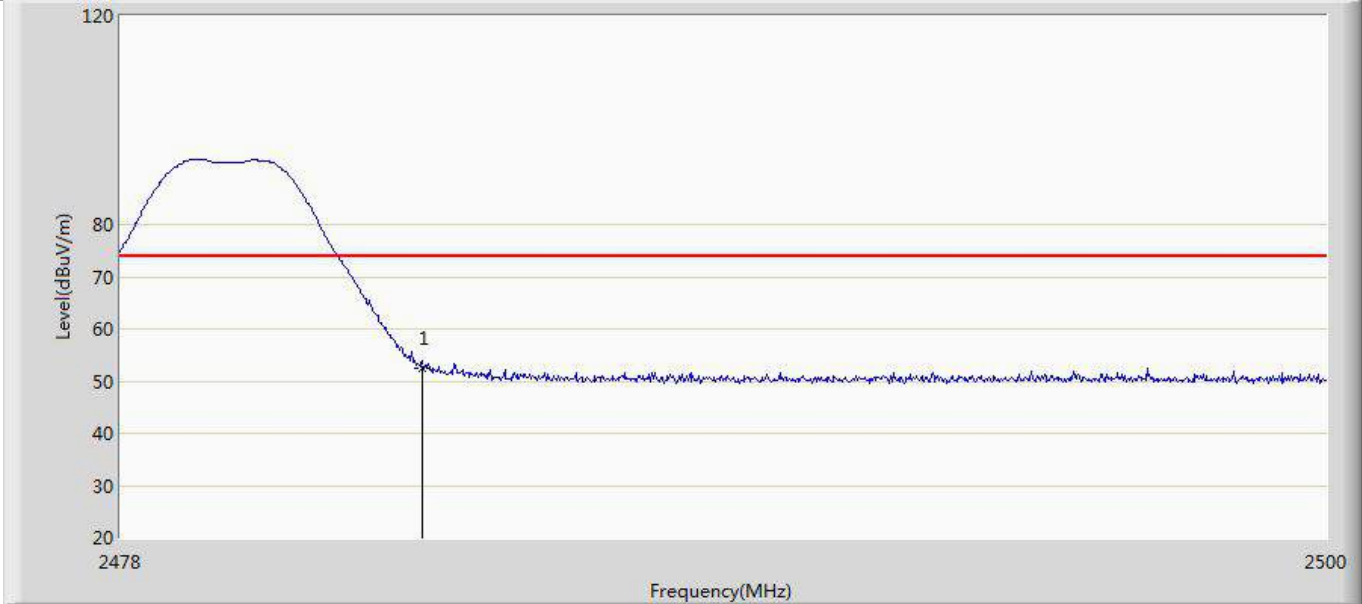

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	52.371	18.258	-21.629	74.000	34.114	PK

Profile: 24B1031R	Page No.: 40
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 02:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by Zigbee	

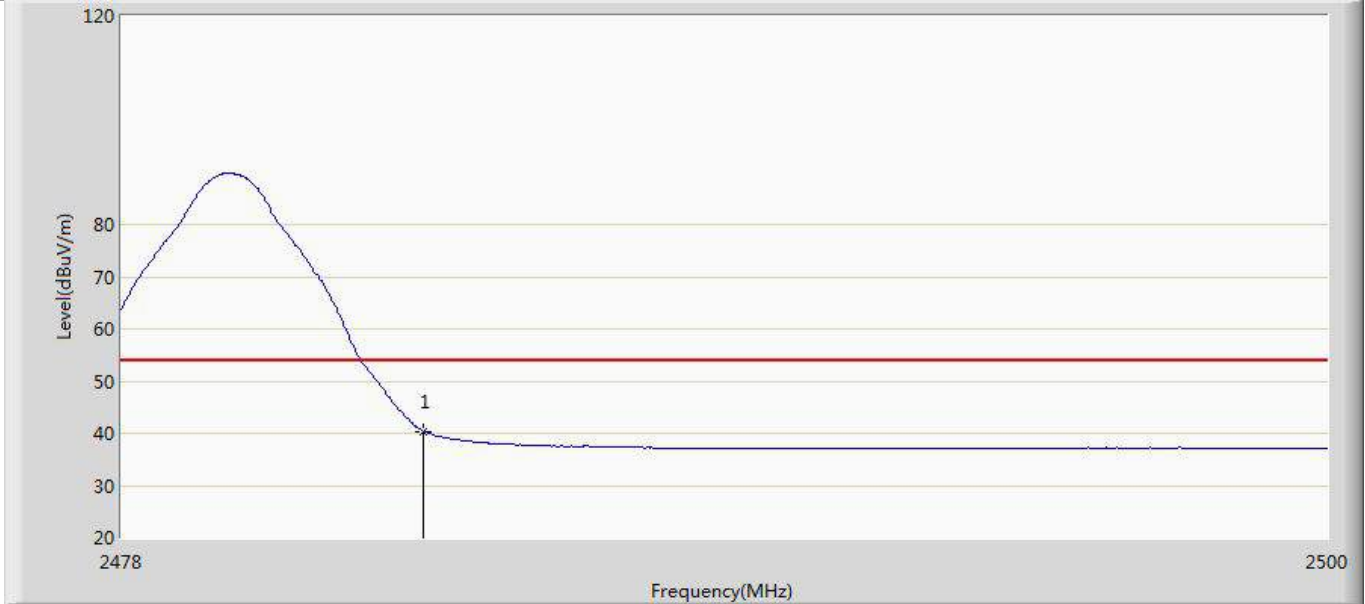

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.422	6.309	-13.578	54.000	34.114	AV

- Note:
- 1. " * ", means this data is the worst emission level.
 - 2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

Appendix F Conducted Spurious Emission

Reference level measurement :

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
Mode 1	Ant1	2405	2405.34	7.94
	Ant1	2440	2440.62	7.61
	Ant1	2480	2480.37	7.87




ZIGB-Ant1-2405-PASS




ZIGB-Ant1-2440-PASS

Band edge measurements:

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
Mode 1	Ant1	Low	2405	7.94	-43.49	≤-12.06	PASS
	Ant1	High	2480	7.87	-39.8	≤-12.13	PASS

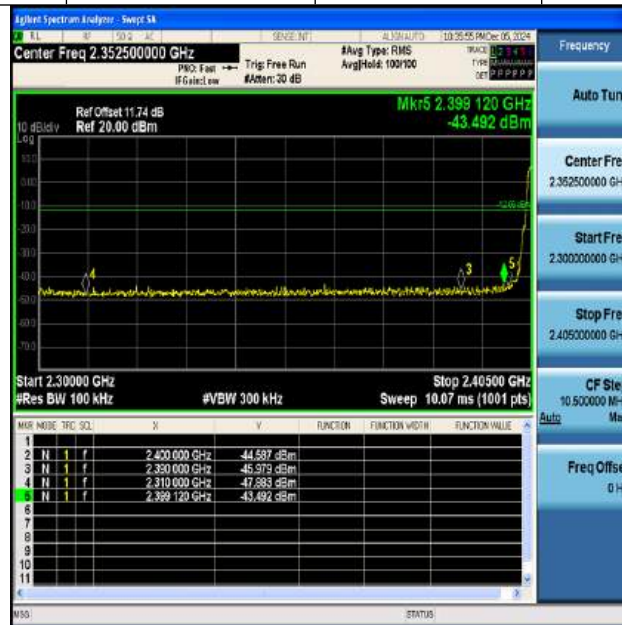


ZIGB-Ant1-2405-PASS

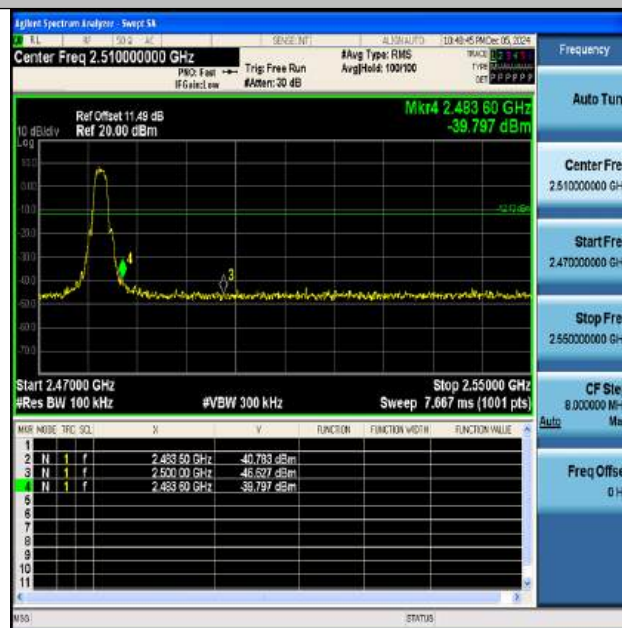


ZIGB-Ant1-2480-PASS

Conducted Spurious Emission:


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
ZIGB	Ant1	2405	30~1000	7.94	-53.17	≤-12.06	PASS
ZIGB	Ant1	2405	1000~3000	7.94	-51.7	≤-12.06	PASS
ZIGB	Ant1	2405	3000~5000	7.94	-39.18	≤-12.06	PASS
ZIGB	Ant1	2405	5000~7000	7.94	-51.31	≤-12.06	PASS
ZIGB	Ant1	2405	7000~9000	7.94	-51.67	≤-12.06	PASS
ZIGB	Ant1	2405	9000~11000	7.94	-51.29	≤-12.06	PASS
ZIGB	Ant1	2405	11000~13000	7.94	-51.6	≤-12.06	PASS
ZIGB	Ant1	2405	13000~15000	7.94	-46.51	≤-12.06	PASS
ZIGB	Ant1	2405	15000~17000	7.94	-45.06	≤-12.06	PASS
ZIGB	Ant1	2405	17000~19000	7.94	-44.08	≤-12.06	PASS
ZIGB	Ant1	2405	19000~21000	7.94	-42.54	≤-12.06	PASS
ZIGB	Ant1	2405	21000~23000	7.94	-43.25	≤-12.06	PASS
ZIGB	Ant1	2405	23000~25000	7.94	-41.03	≤-12.06	PASS
ZIGB	Ant1	2440	30~1000	7.61	-52.57	≤-12.39	PASS
ZIGB	Ant1	2440	1000~3000	7.61	-51.65	≤-12.39	PASS
ZIGB	Ant1	2440	3000~5000	7.61	-39.01	≤-12.39	PASS
ZIGB	Ant1	2440	5000~7000	7.61	-49.64	≤-12.39	PASS
ZIGB	Ant1	2440	7000~9000	7.61	-51.49	≤-12.39	PASS
ZIGB	Ant1	2440	9000~11000	7.61	-51.45	≤-12.39	PASS
ZIGB	Ant1	2440	11000~13000	7.61	-51.42	≤-12.39	PASS
ZIGB	Ant1	2440	13000~15000	7.61	-46.07	≤-12.39	PASS
ZIGB	Ant1	2440	15000~17000	7.61	-45.15	≤-12.39	PASS
ZIGB	Ant1	2440	17000~19000	7.61	-44.69	≤-12.39	PASS
ZIGB	Ant1	2440	19000~21000	7.61	-43.01	≤-12.39	PASS
ZIGB	Ant1	2440	21000~23000	7.61	-42.97	≤-12.39	PASS
ZIGB	Ant1	2440	23000~25000	7.61	-41.04	≤-12.39	PASS
ZIGB	Ant1	2480	30~1000	7.87	-53.26	≤-12.13	PASS
ZIGB	Ant1	2480	1000~3000	7.87	-52	≤-12.13	PASS
ZIGB	Ant1	2480	3000~5000	7.87	-43.94	≤-12.13	PASS
ZIGB	Ant1	2480	5000~7000	7.87	-51.72	≤-12.13	PASS
ZIGB	Ant1	2480	7000~9000	7.87	-51.47	≤-12.13	PASS
ZIGB	Ant1	2480	9000~11000	7.87	-50.37	≤-12.13	PASS
ZIGB	Ant1	2480	11000~13000	7.87	-51.86	≤-12.13	PASS
ZIGB	Ant1	2480	13000~15000	7.87	-46.73	≤-12.13	PASS
ZIGB	Ant1	2480	15000~17000	7.87	-44.16	≤-12.13	PASS
ZIGB	Ant1	2480	17000~19000	7.87	-44.34	≤-12.13	PASS
ZIGB	Ant1	2480	19000~21000	7.87	-42.27	≤-12.13	PASS
ZIGB	Ant1	2480	21000~23000	7.87	-43.31	≤-12.13	PASS
ZIGB	Ant1	2480	23000~25000	7.87	-41.69	≤-12.13	PASS

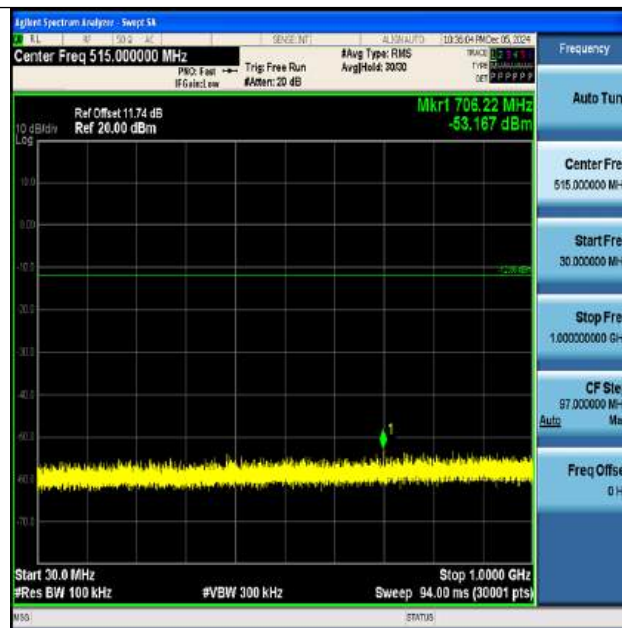


ZIGB-Ant1-2405-30~1000-PASS

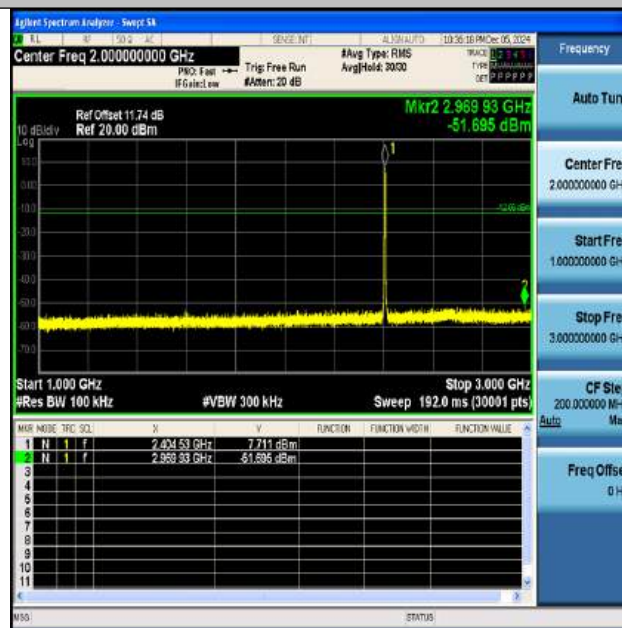


ZIGB-Ant1-2405-1000~3000-PASS

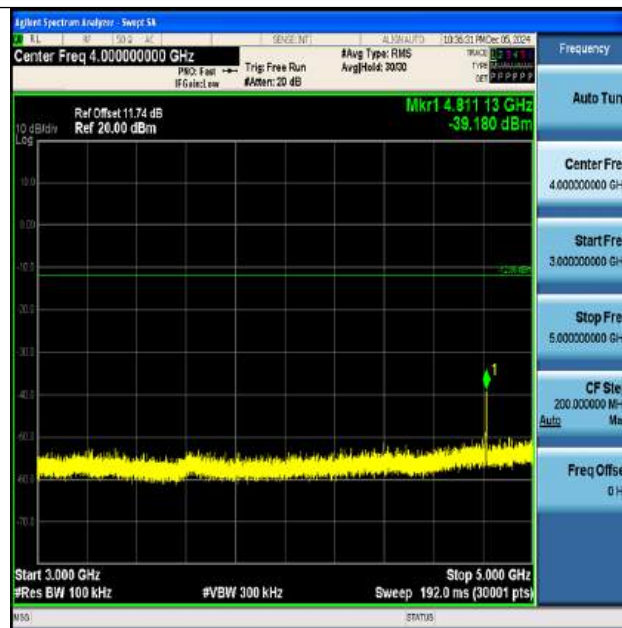


ZIGB-Ant1-2405-3000~5000-PASS

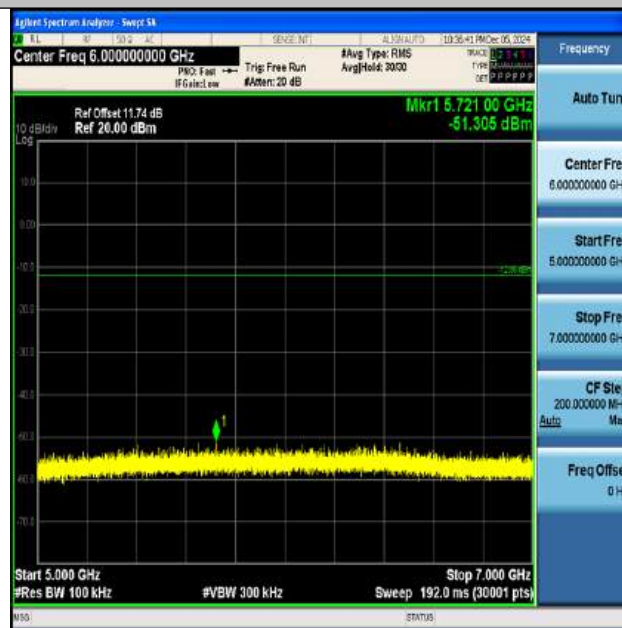


ZIGB-Ant1-2405-5000~7000-PASS

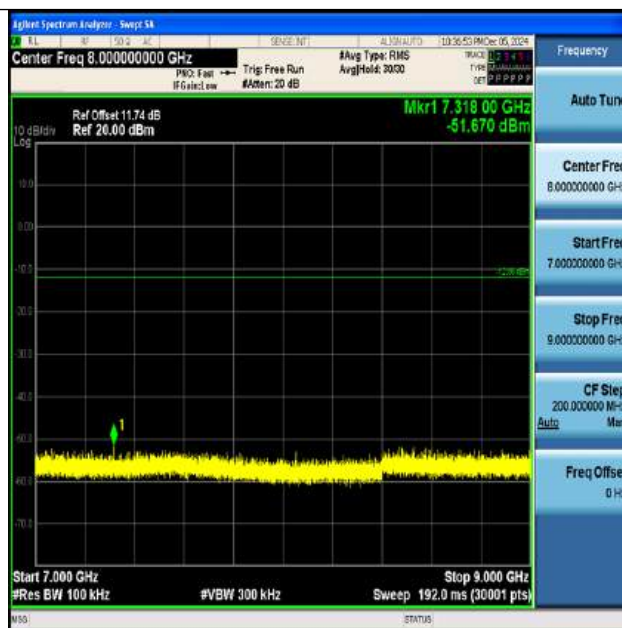


ZIGB-Ant1-2405-7000~9000-PASS

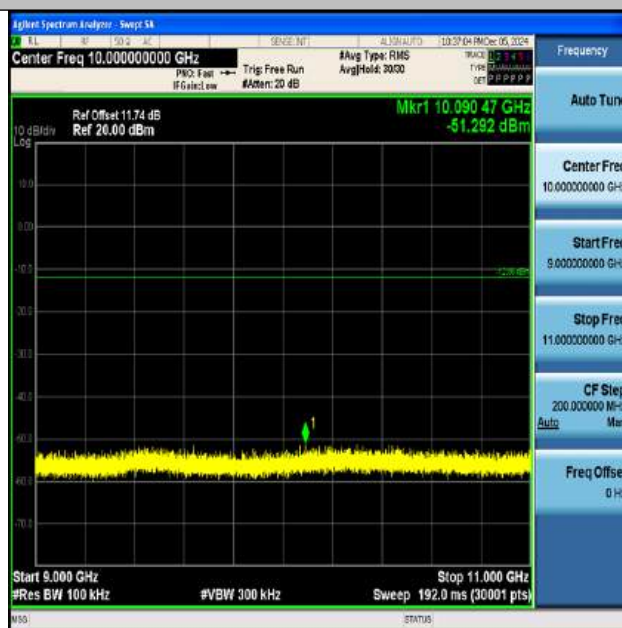


ZIGB-Ant1-2405-9000~11000-PASS

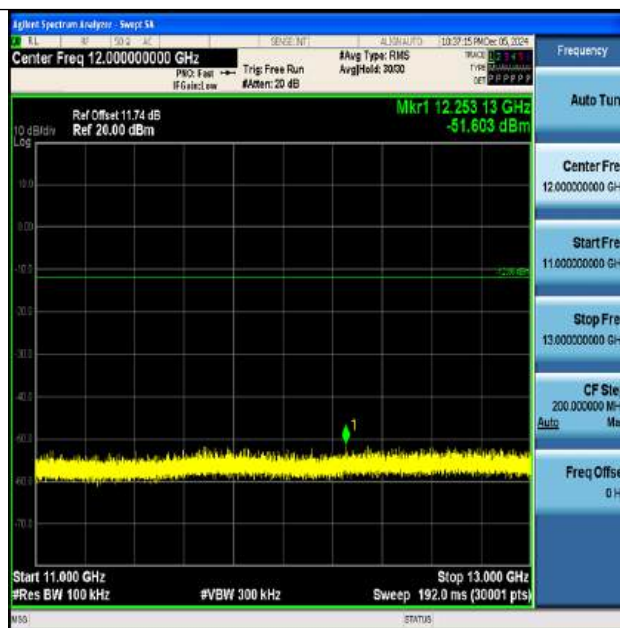


ZIGB-Ant1-2405-11000~13000-PASS

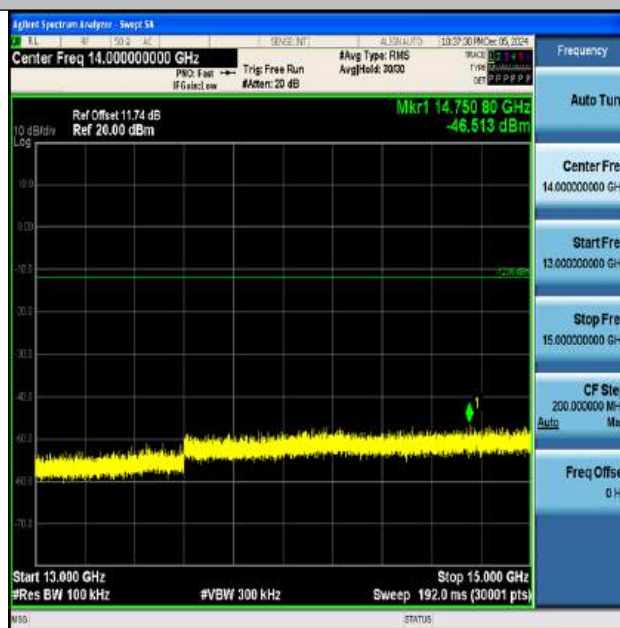


ZIGB-Ant1-2405-13000~15000-PASS

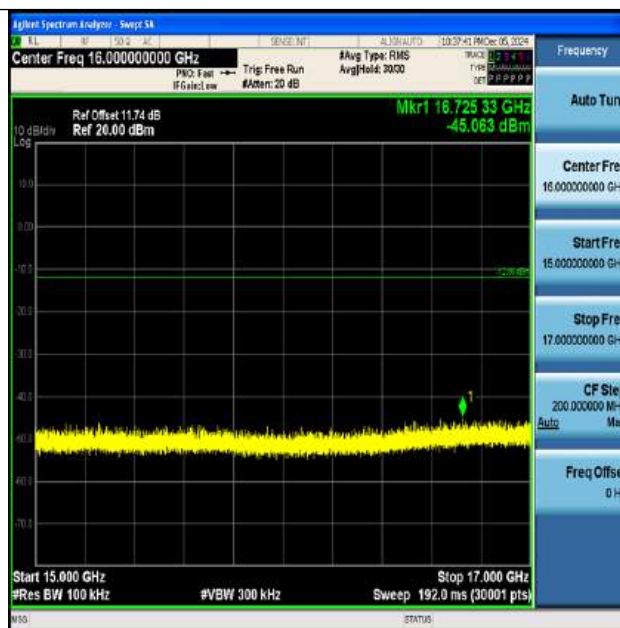


ZIGB-Ant1-2405-15000~17000-PASS

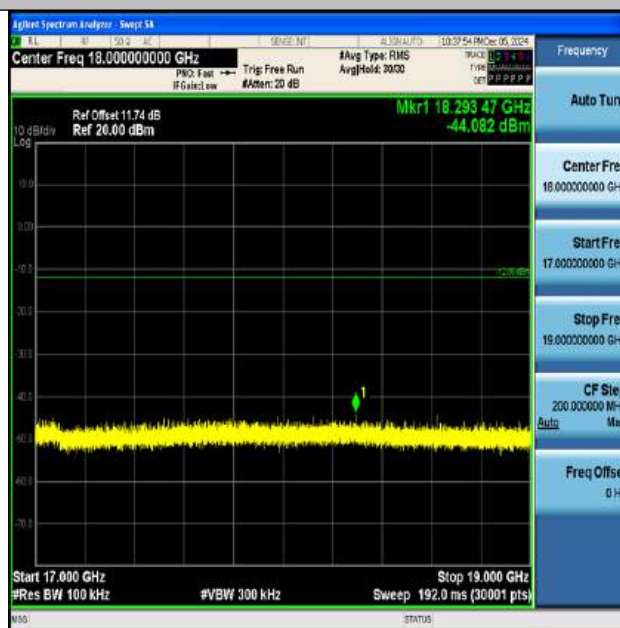


ZIGB-Ant1-2405-17000~19000-PASS

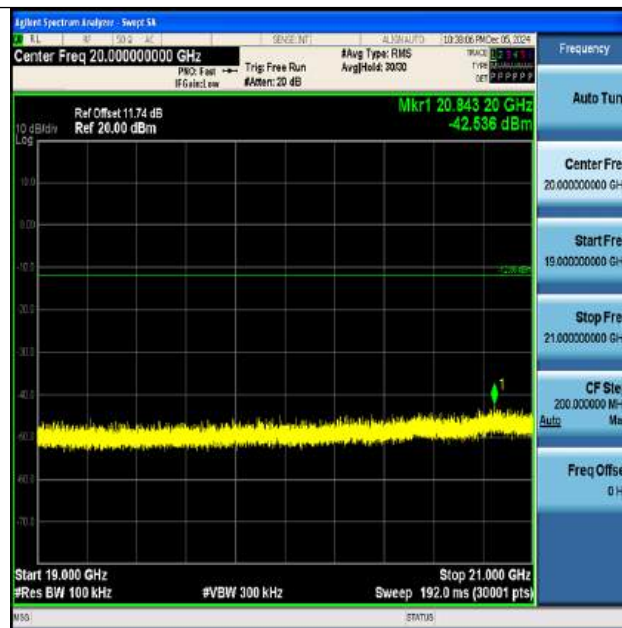


ZIGB-Ant1-2405-19000~21000-PASS

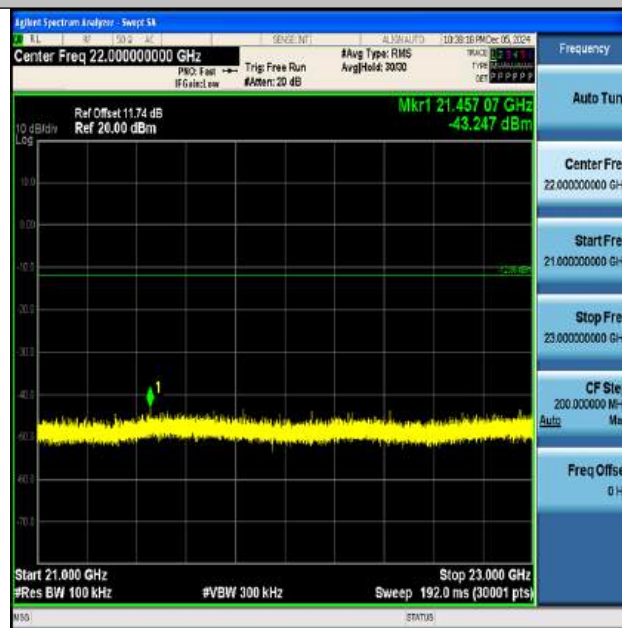


ZIGB-Ant1-2405-21000~23000-PASS

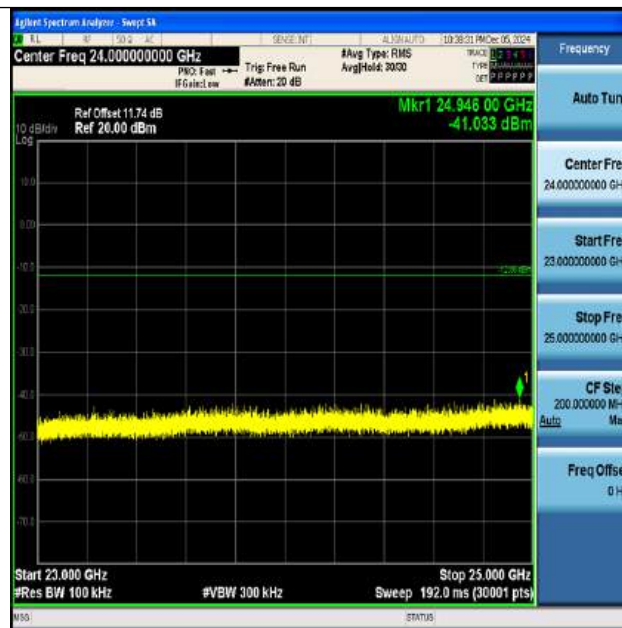


ZIGB-Ant1-2405-23000~25000-PASS

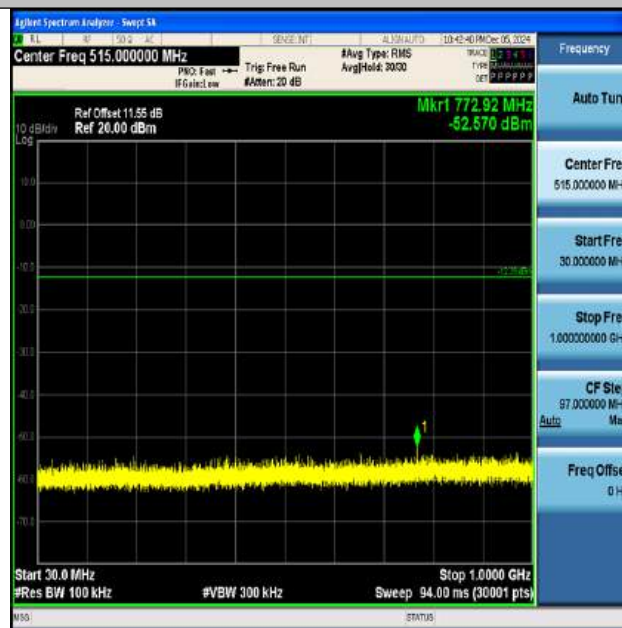


ZIGB-Ant1-2440-30~1000-PASS

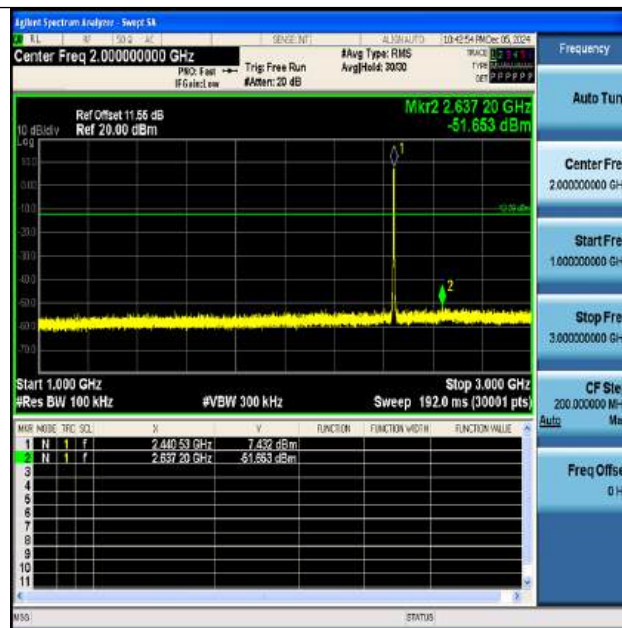


ZIGB-Ant1-2440-1000~3000-PASS

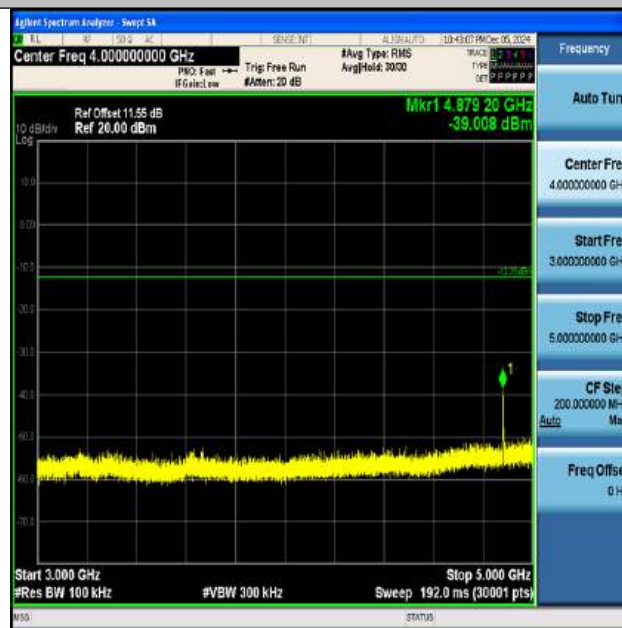


ZIGB-Ant1-2440-3000~5000-PASS

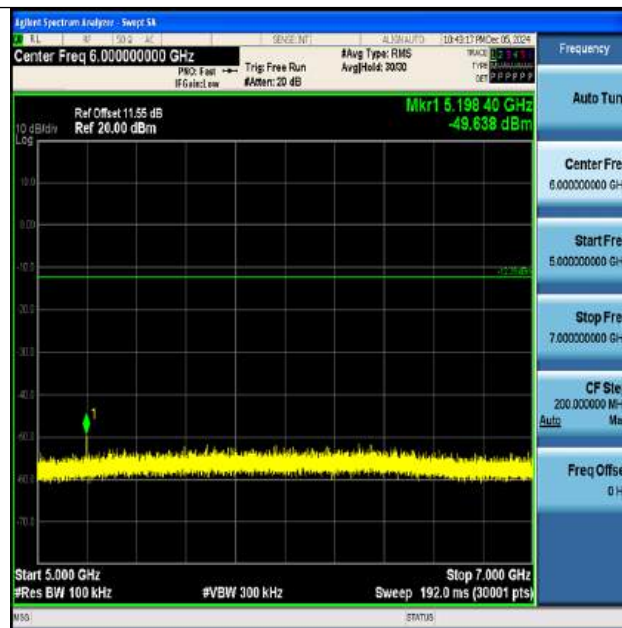


ZIGB-Ant1-2440-5000~7000-PASS

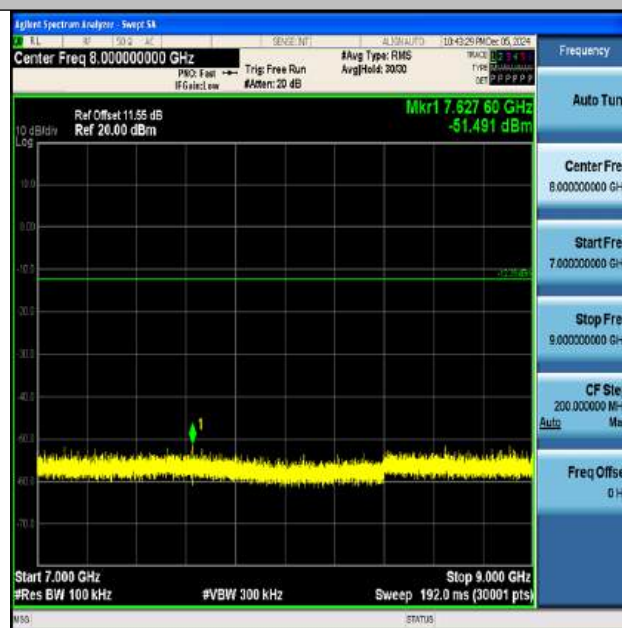


ZIGB-Ant1-2440-7000~9000-PASS

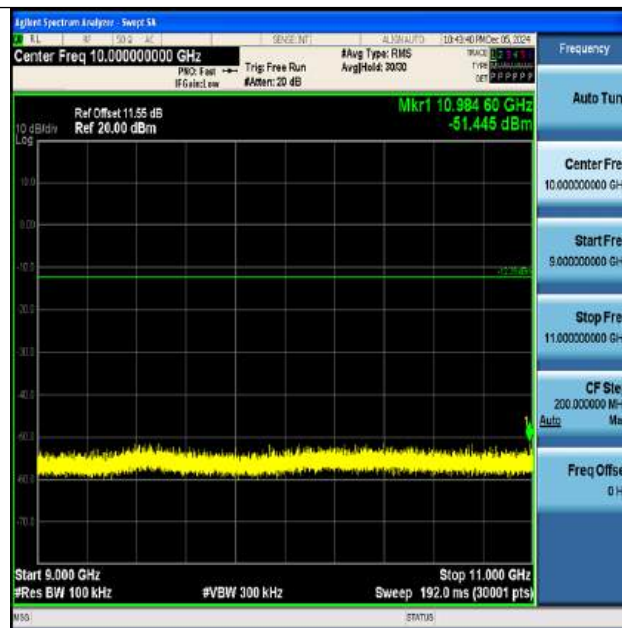

ZIGB-Ant1-2440-9000~11000-PASS

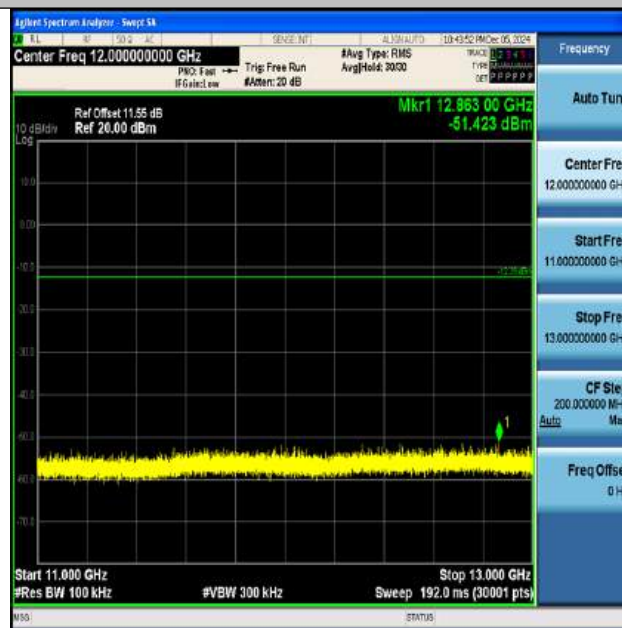


ZIGB-Ant1-2440-11000~13000-PASS

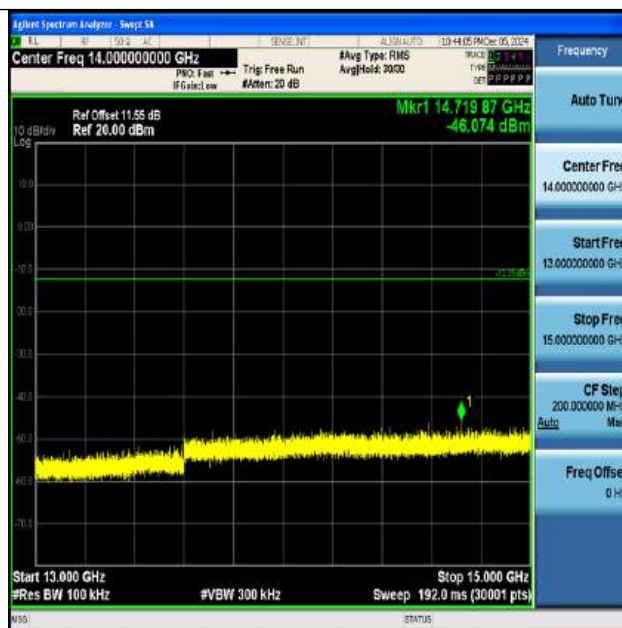


ZIGB-Ant1-2440-13000~15000-PASS




ZIGB-Ant1-2440-15000~17000-PASS

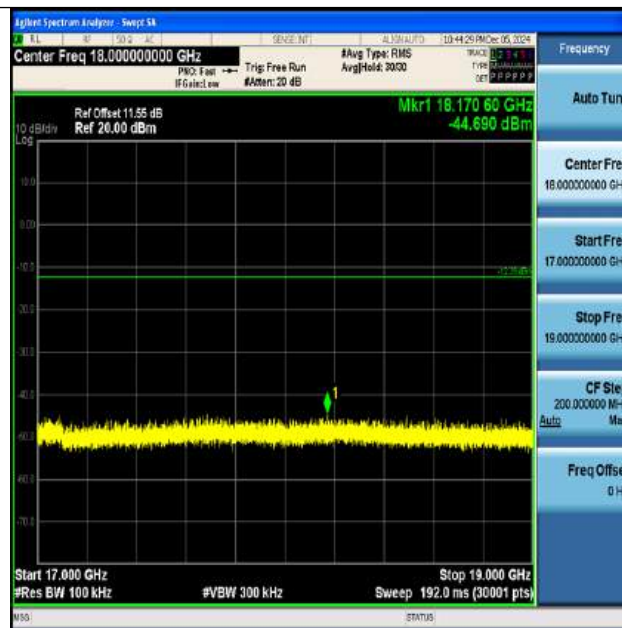


ZIGB-Ant1-2440-17000~19000-PASS

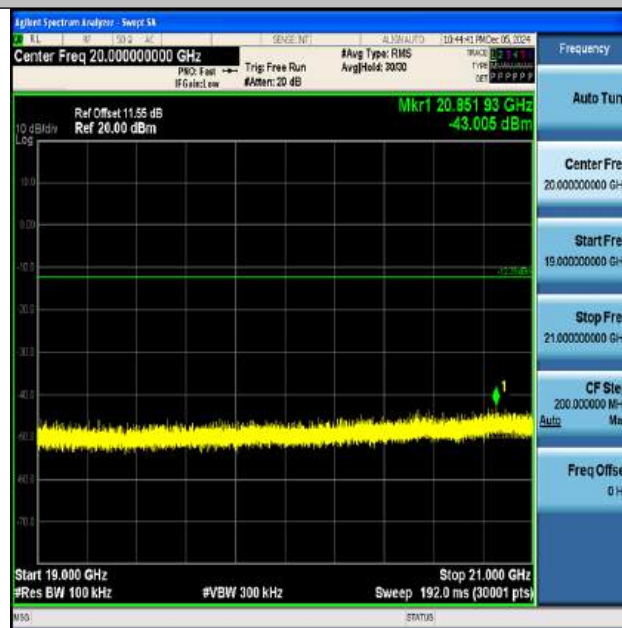


ZIGB-Ant1-2440-19000~21000-PASS

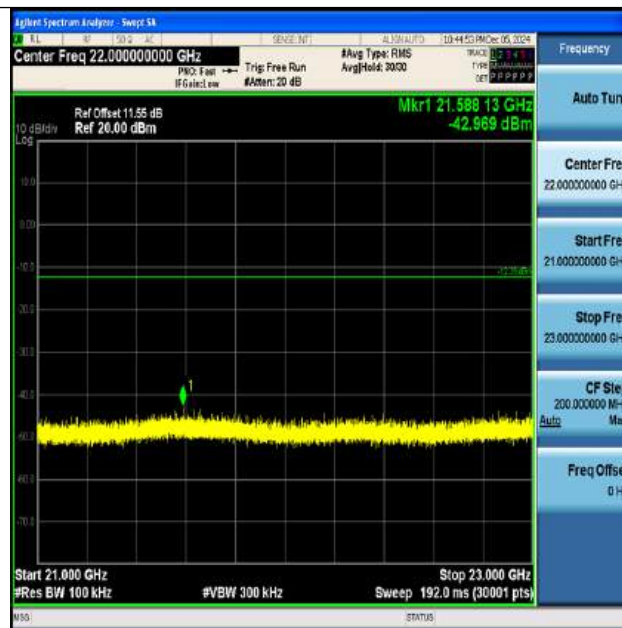


ZIGB-Ant1-2440-21000~23000-PASS

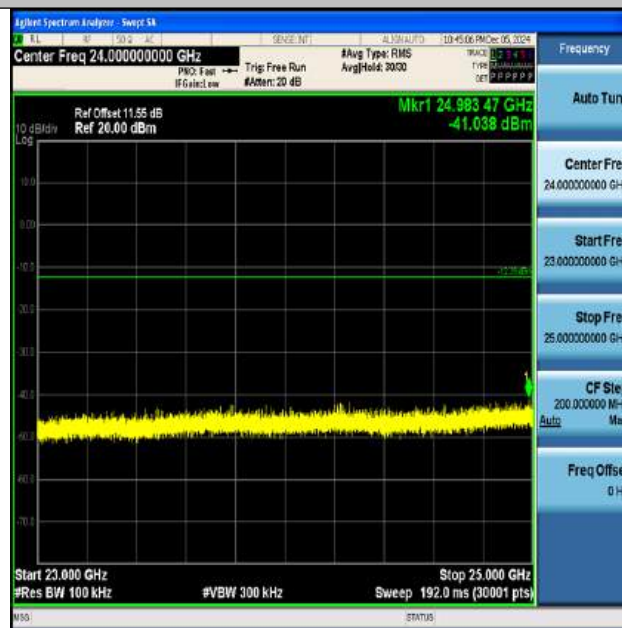


ZIGB-Ant1-2440-23000~25000-PASS

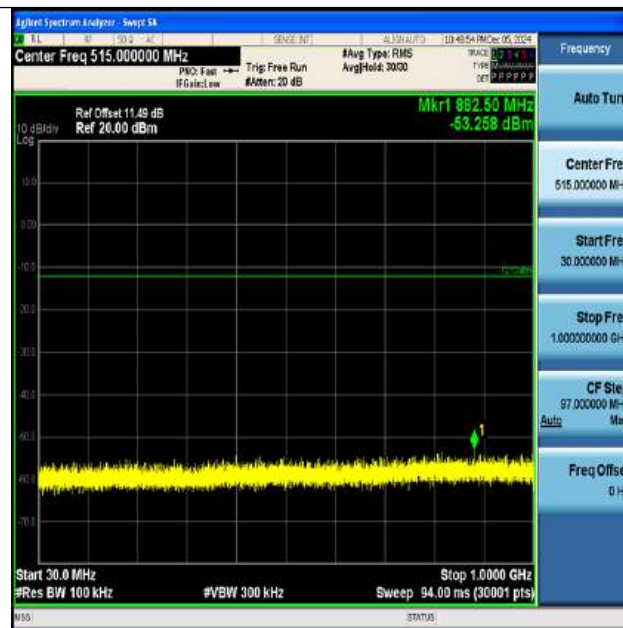


ZIGB-Ant1-2480-30~1000-PASS

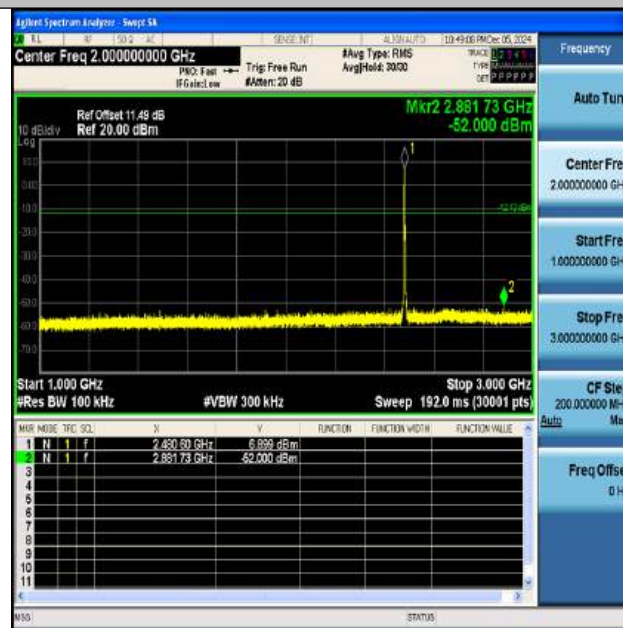


ZIGB-Ant1-2480-1000~3000-PASS

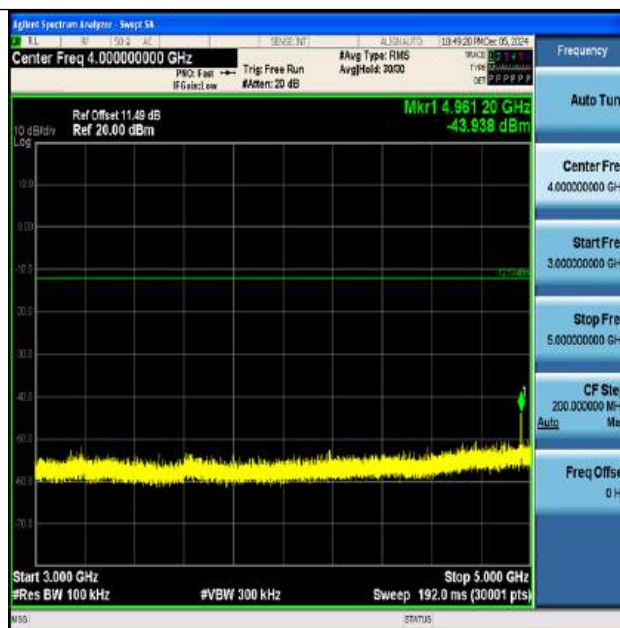


ZIGB-Ant1-2480-3000~5000-PASS

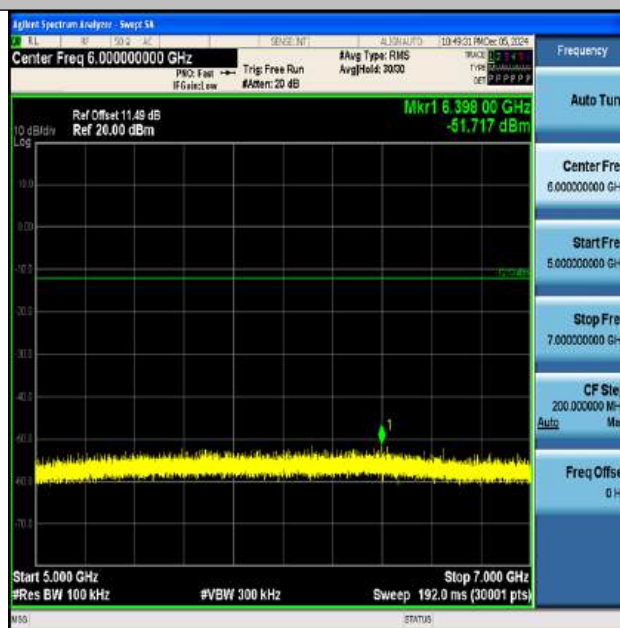


ZIGB-Ant1-2480-5000~7000-PASS

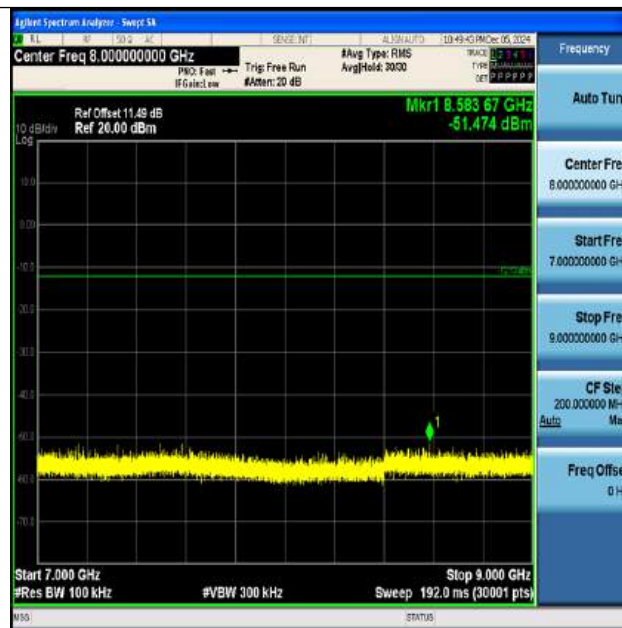


ZIGB-Ant1-2480-7000~9000-PASS

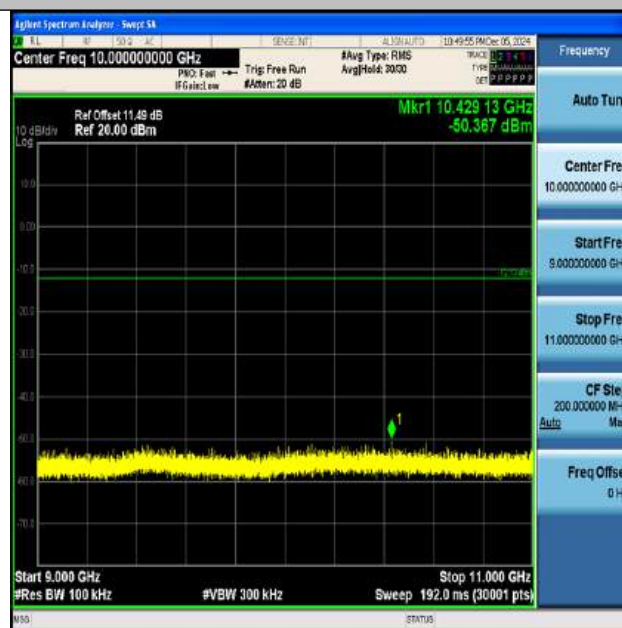


ZIGB-Ant1-2480-9000~11000-PASS

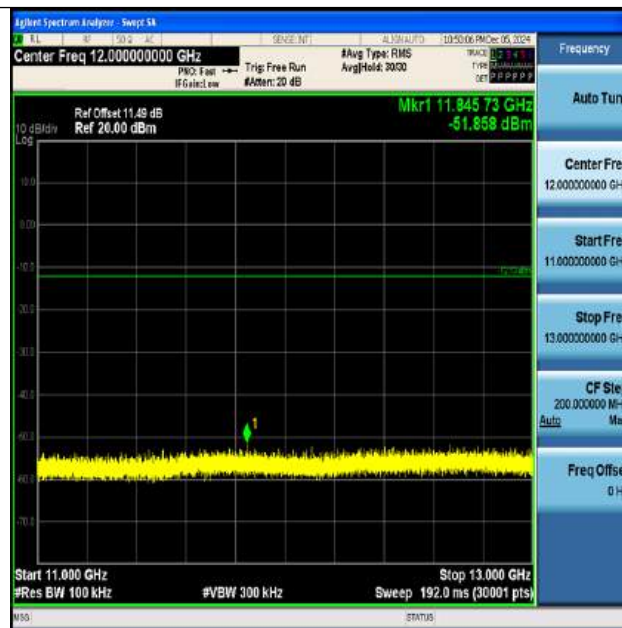


ZIGB-Ant1-2480-11000~13000-PASS

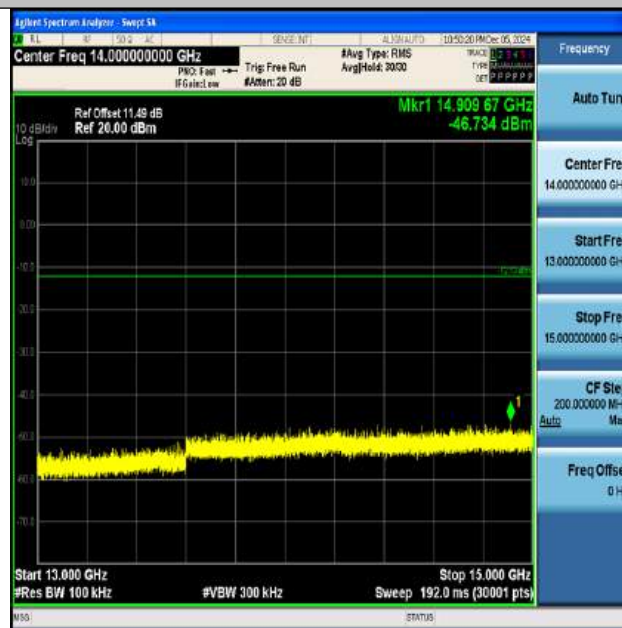


ZIGB-Ant1-2480-13000~15000-PASS

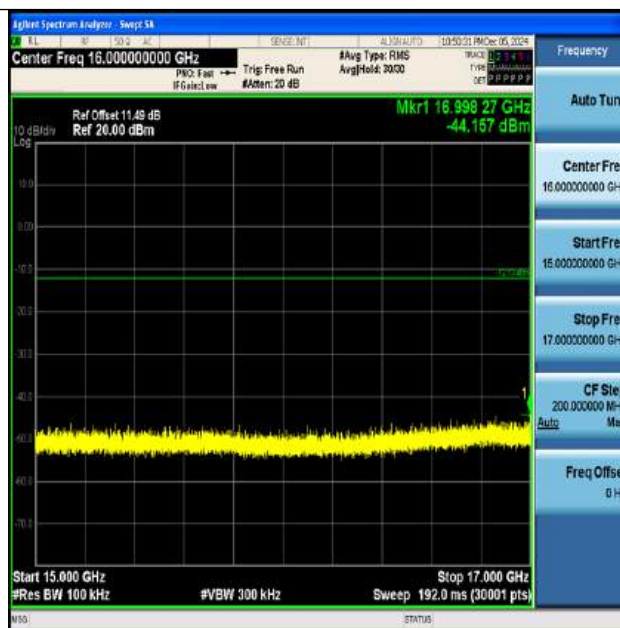


ZIGB-Ant1-2480-15000~17000-PASS

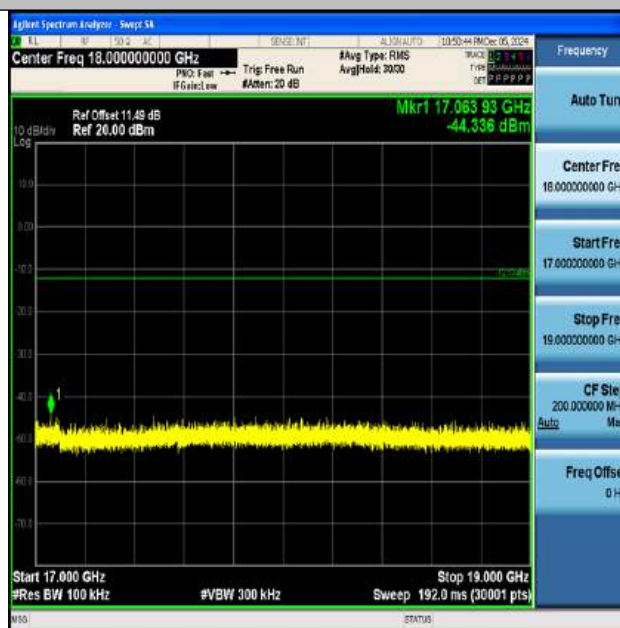


ZIGB-Ant1-2480-17000~19000-PASS

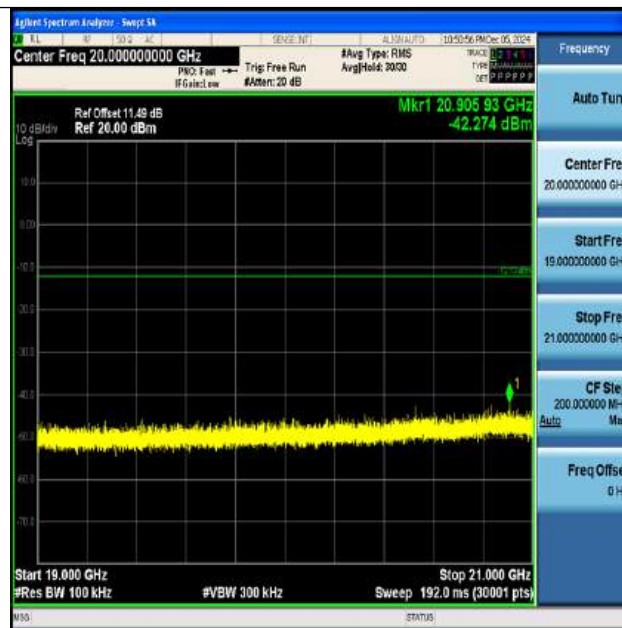

ZIGB-Ant1-2480-19000~21000-PASS

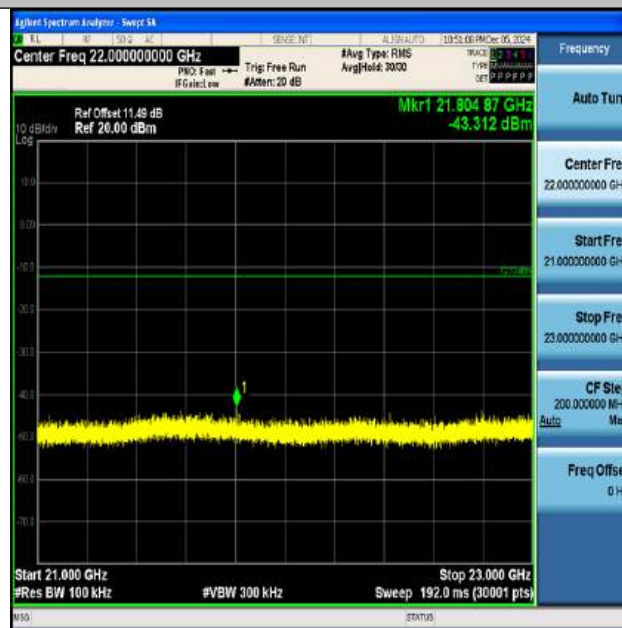

ZIGB-Ant1-2480-21000~23000-PASS

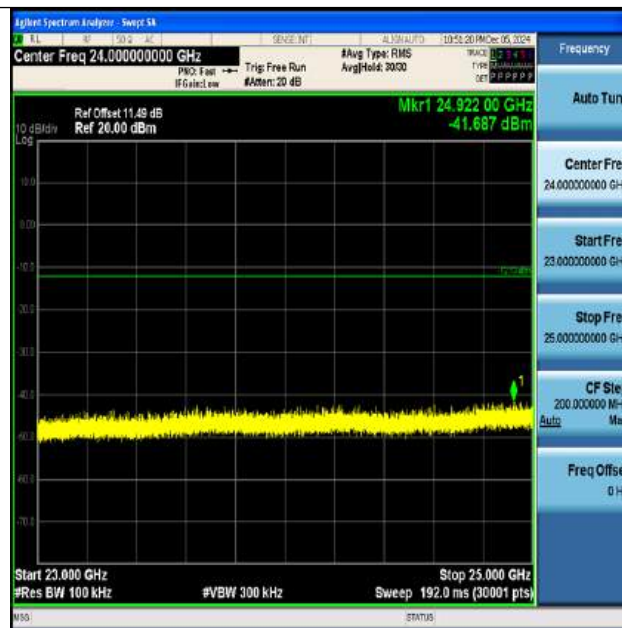

ZIGB-Ant1-2480-23000~25000-PASS

Appendix G: Duty Cycle

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Duty Cycle [%]	Limit
ZIGB	Ant1	2405	N/A	100	N/A
ZIGB	Ant1	2440	N/A	100	N/A
ZIGB	Ant1	2480	N/A	100	N/A



NTNV-ZIGB-Ant1-2405




NTNV-ZIGB-Ant1-2440



NTNV-ZIGB-Ant1-2480


Appendix H: Emissions in Restricted Bands

Profile: 24B1031R	Page No.: 55
Engineer: Yu Liu	
Site: AC5	Time: 2025/04/16 - 03:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2405MHz by Zigbee	

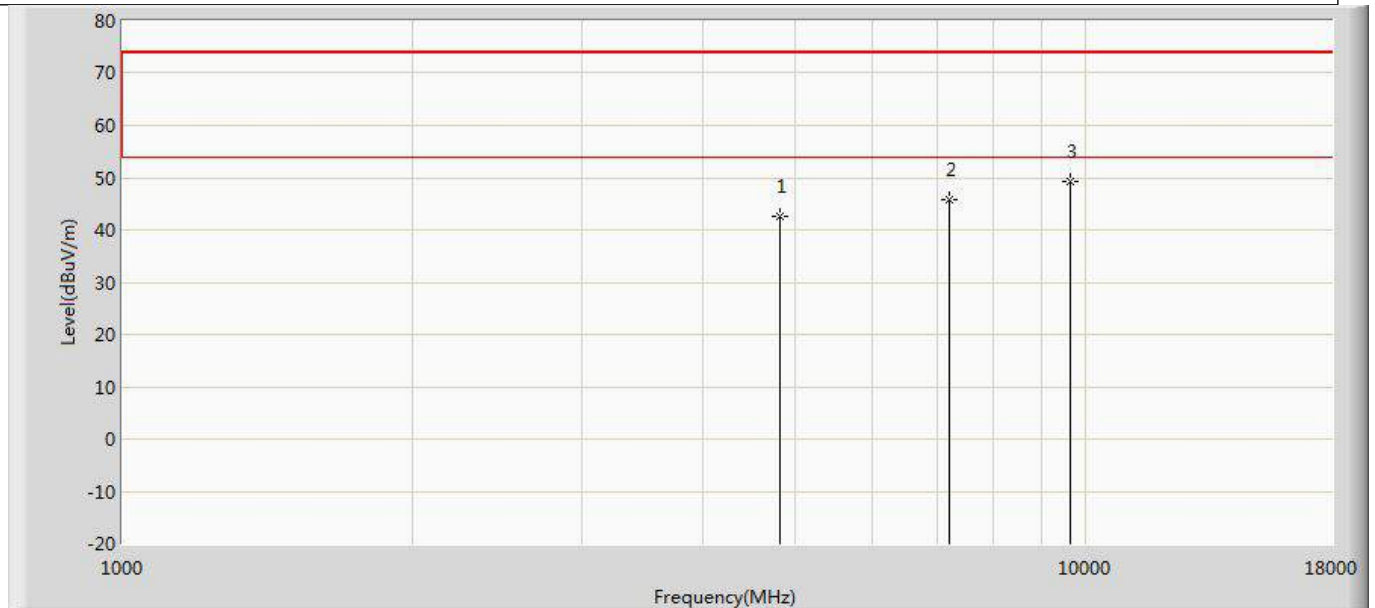


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4810.000	42.729	45.573	-31.271	74.000	-2.844	PK
2		7215.000	45.842	44.956	-28.158	74.000	0.886	PK
3	*	9620.000	49.219	44.835	-24.781	74.000	4.383	PK

Profile: 24B1031R	Page No.: 56
Engineer: Yu Liu	
Site: AC5	Time: 2025/04/16 - 03:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2405MHz by Zigbee	

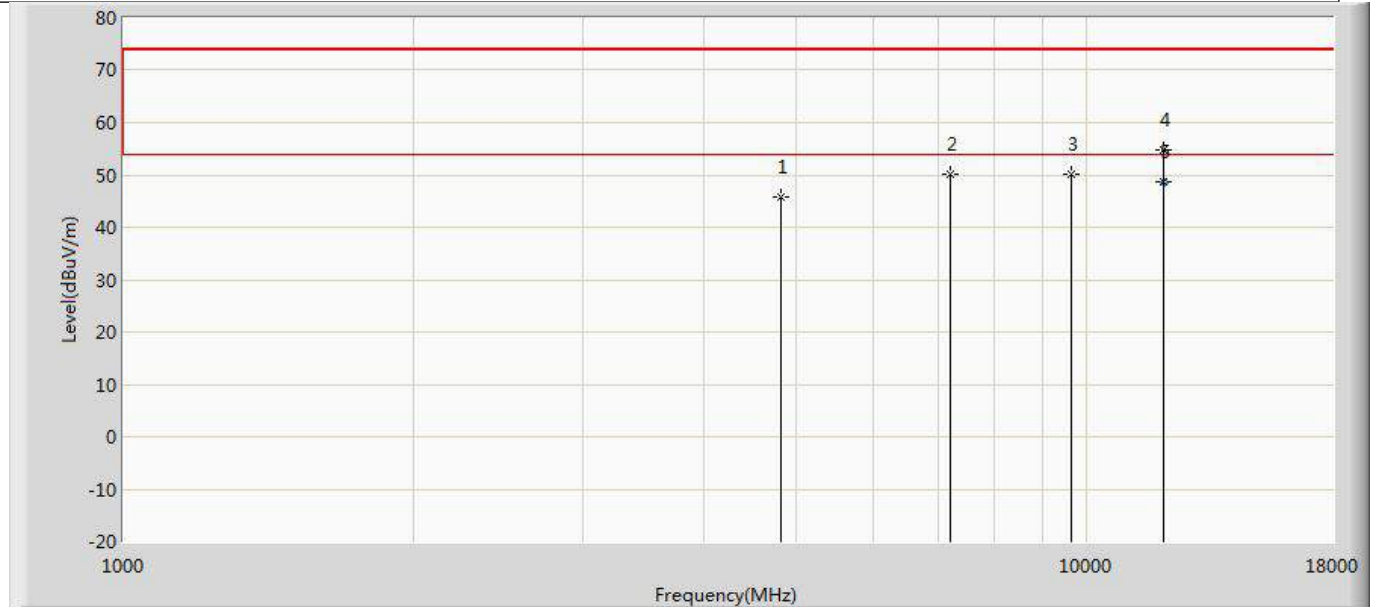


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4808.000	45.935	48.806	-28.065	74.000	-2.871	PK
2		7222.000	50.089	49.429	-23.911	74.000	0.660	PK
3		9619.000	50.178	45.737	-23.822	74.000	4.441	PK
4		12016.000	54.857	47.955	-19.143	74.000	6.902	PK
5	*	12016.000	48.779	41.877	-5.221	54.000	6.902	AV

Profile: 24B1031R	Page No.: 57
Engineer: Yu Liu	
Site: AC5	Time: 2025/04/16 - 03:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2440MHz by Zigbee	

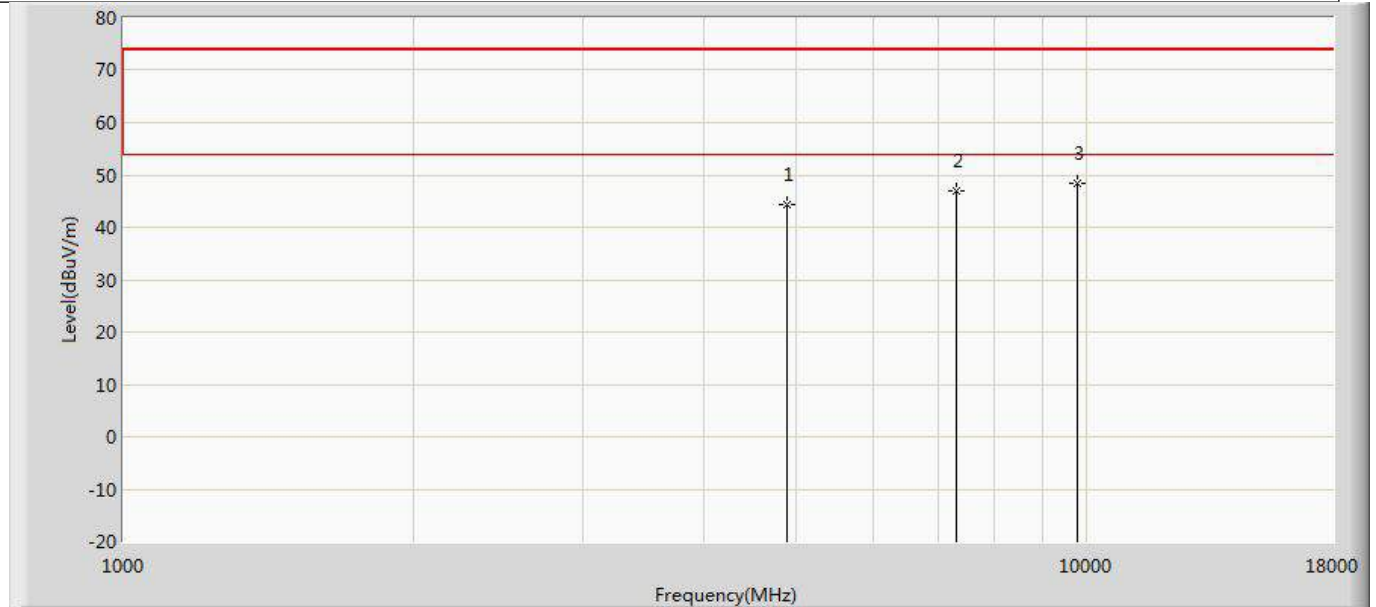


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	44.313	46.725	-29.687	74.000	-2.413	PK
2		7320.000	47.089	46.602	-26.911	74.000	0.487	PK
3	*	9760.000	48.473	44.954	-25.527	74.000	3.518	PK

Profile: 24B1031R	Page No.: 58
Engineer: Yu Liu	
Site: AC5	Time: 2025/04/16 - 03:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2440MHz by Zigbee	

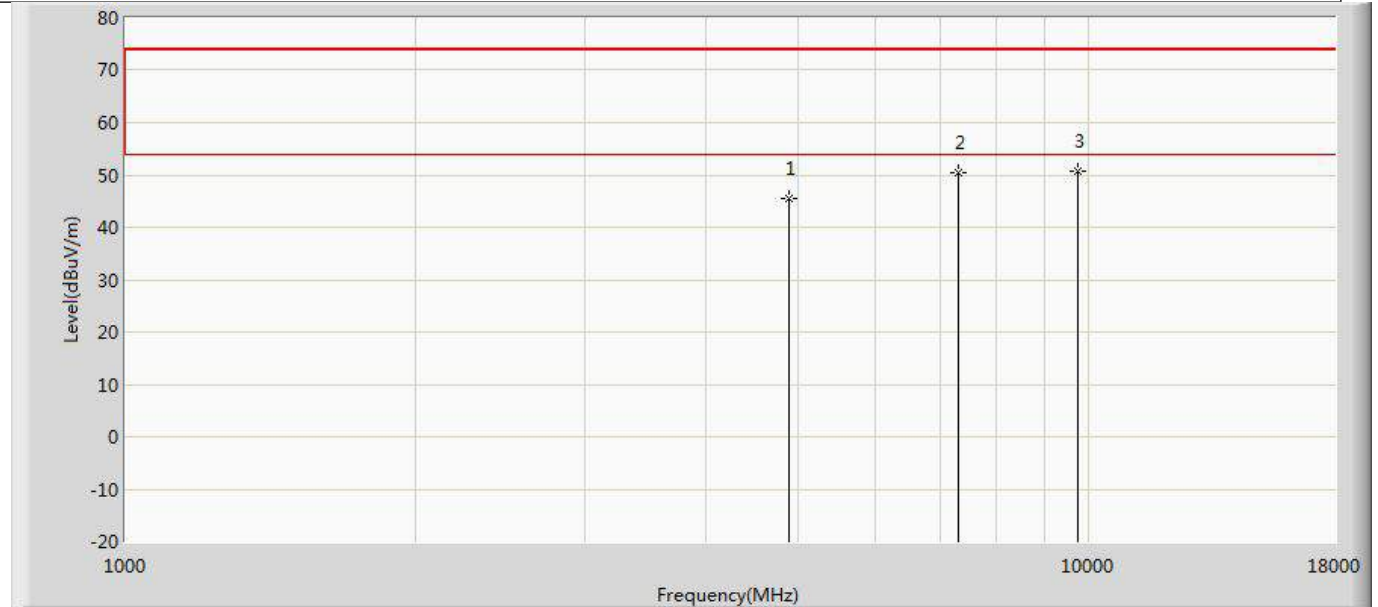


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4876.000	45.517	47.909	-28.483	74.000	-2.392	PK
2		7324.000	50.528	50.147	-23.472	74.000	0.381	PK
3	*	9755.000	50.847	47.605	-23.153	74.000	3.242	PK

Profile: 24B1031R	Page No.: 59
Engineer: Yu Liu	
Site: AC5	Time: 2025/04/16 - 03:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by Zigbee	

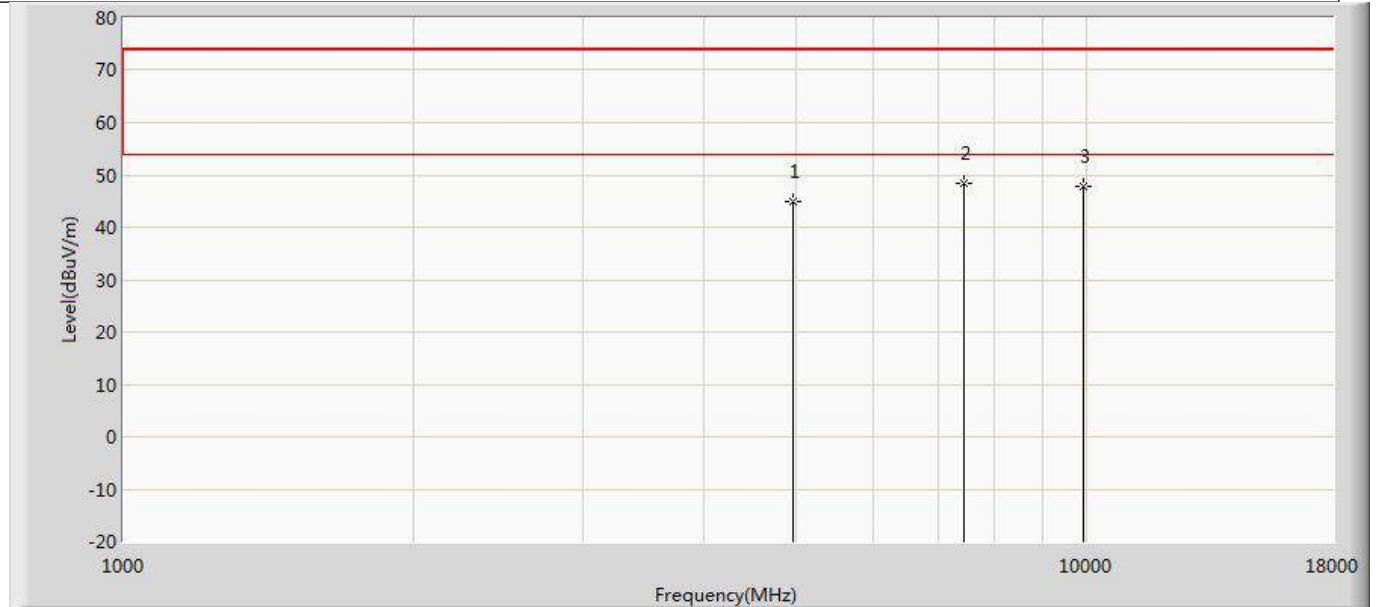

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	44.796	47.085	-29.204	74.000	-2.289	PK
2	*	7443.000	48.272	46.594	-25.728	74.000	1.678	PK
3		9920.000	47.768	44.435	-26.232	74.000	3.333	PK

Profile: 24B1031R	Page No.: 60
Engineer: Yu Liu	
Site: AC5	Time: 2025/04/16 - 03:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

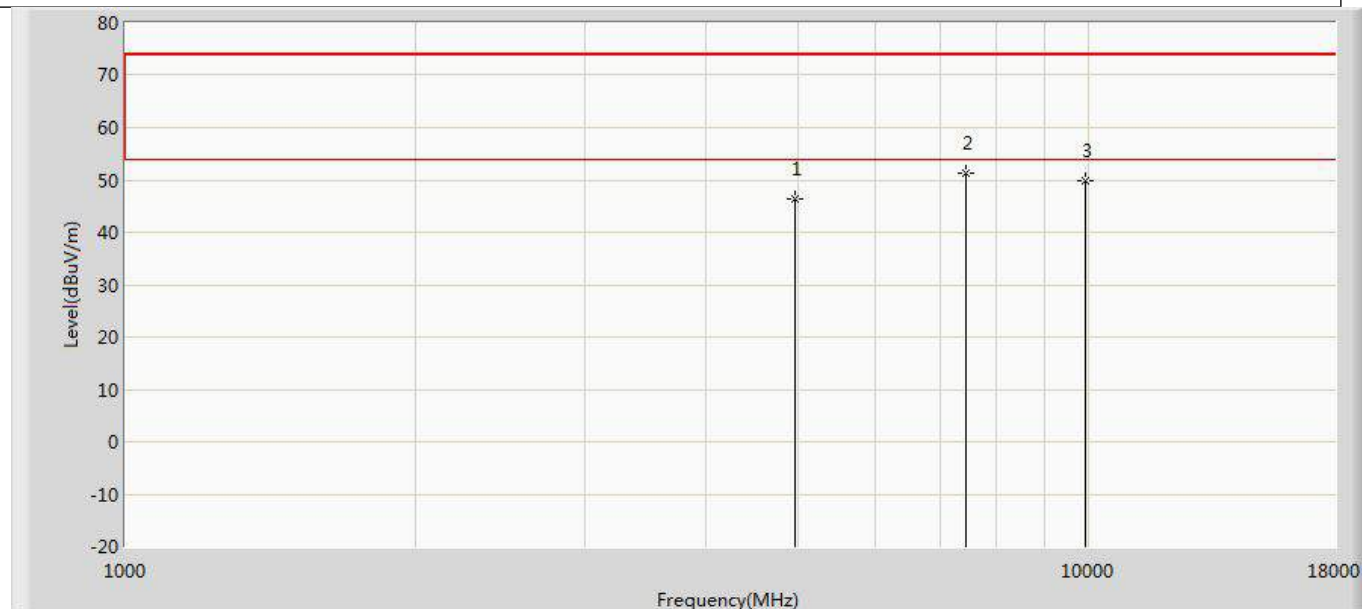


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4961.000	46.283	48.579	-27.717	74.000	-2.296	PK
2	*	7443.000	51.212	49.534	-22.788	74.000	1.678	PK
3		9920.000	49.892	46.559	-24.108	74.000	3.333	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
3. The test frequency range, 18GHz~26GHz test result on peak is lower than average limit, all is the noise base, therefore no data appear in the report.
4. If the test result on peak is lower than average limit, then average measurement needn't be performed.


Worst data of radiated emissions below 1GHz:

Profile: 24B1031R	Page No.: 7
Engineer: Yu Liu	
Site: AC2	Time: 2024/12/18 - 19:29
Limit: FCC_Part 15.209	Margin: 0
Probe: CBL6112D_27613(30-1000MHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: mode 1:Transmit at 2405 by Zigbee	

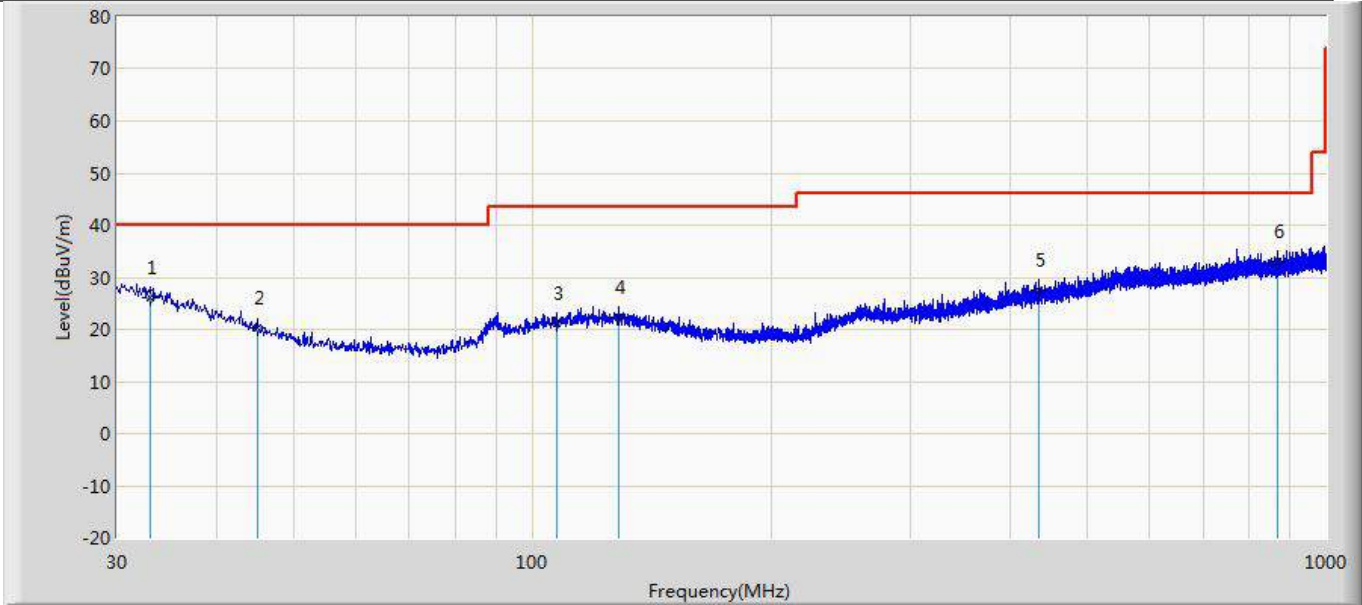

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		33.031	26.005	2.522	-13.995	40.000	23.484	QP
2		45.031	20.168	3.183	-19.832	40.000	16.984	QP
3		107.236	21.243	2.408	-22.257	43.500	18.834	QP
4		128.819	22.415	3.327	-21.085	43.500	19.088	QP
5		435.339	27.567	3.223	-18.433	46.000	24.344	QP
6	*	869.292	33.141	3.737	-12.859	46.000	29.404	QP

Profile: 24B1031R	Page No.: 8
Engineer: Yu Liu	
Site: AC2	Time: 2024/12/18 - 19:29
Limit: FCC_Part 15.209	Margin: 0
Probe: CBL6112D_27613(30-1000MHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: mode 1:Transmit at 2405 by Zigbee	

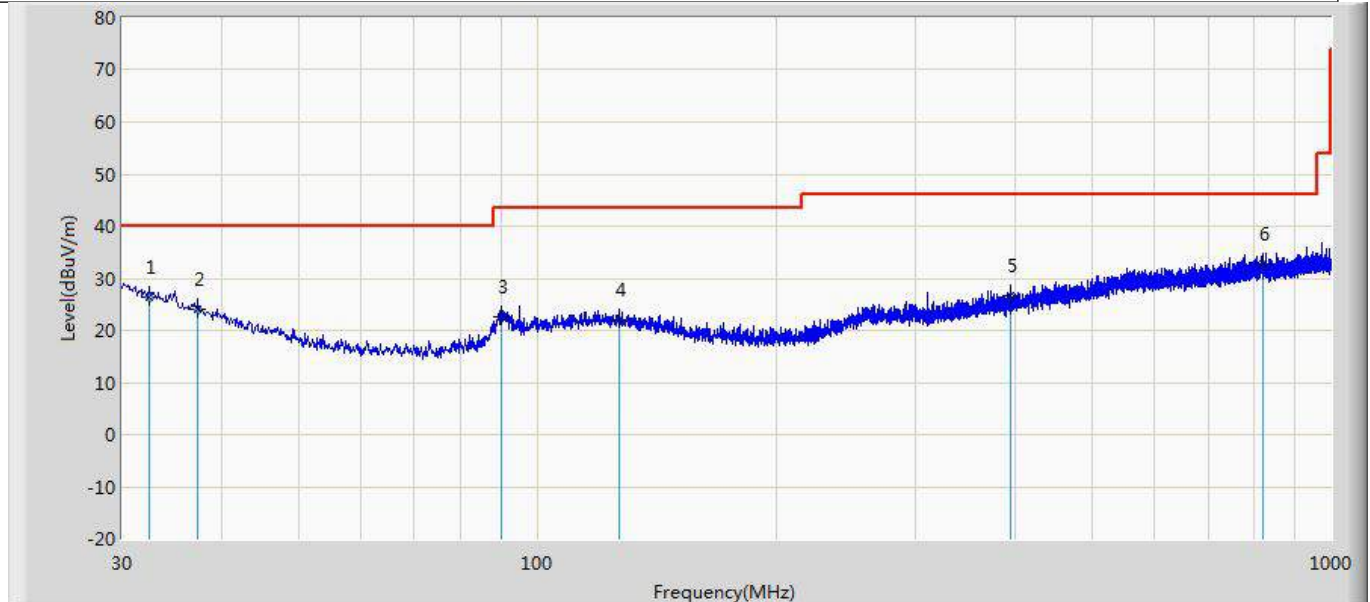


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		32.425	26.333	2.565	-13.667	40.000	23.768	QP
2		37.396	24.172	3.163	-15.828	40.000	21.010	QP
3		90.019	22.671	6.777	-20.829	43.500	15.893	QP
4		126.757	21.930	2.732	-21.570	43.500	19.198	QP
5		394.962	26.674	3.223	-19.326	46.000	23.451	QP
6	*	822.247	32.859	3.492	-13.141	46.000	29.366	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)


Appendix I: AC Power Line Conducted Emission

Profile: 24B1031R	Page No.: 1
Engineer: Yu Liu	
Site: TR1	Time: 2024/12/10 - 23:21
Limit: FCC_Part 15.207	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Line
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

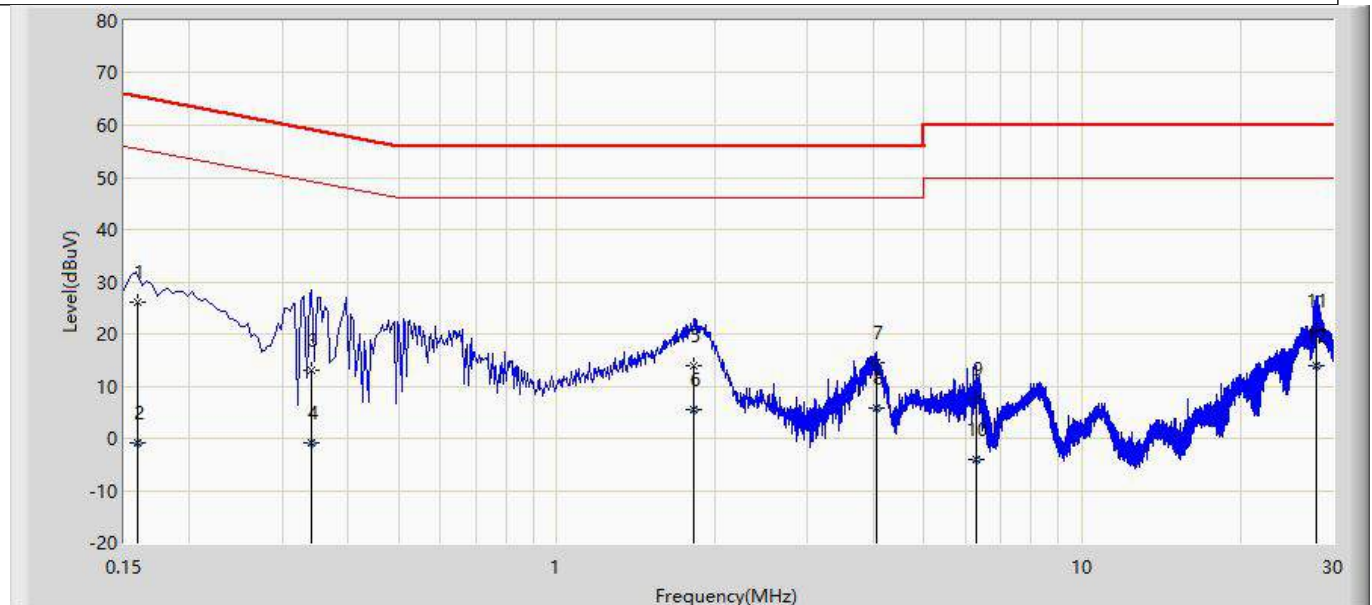

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.159	26.192	16.568	-39.326	65.518	9.624	QP
2		0.159	-0.941	-10.565	-56.459	55.518	9.624	AV
3		0.342	13.041	3.413	-46.113	59.155	9.629	QP
4		0.342	-0.993	-10.622	-50.148	49.155	9.629	AV
5		1.826	13.958	4.267	-42.042	56.000	9.691	QP
6		1.826	5.525	-4.166	-40.475	46.000	9.691	AV
7		4.070	14.499	4.758	-41.501	56.000	9.741	QP
8		4.070	5.894	-3.847	-40.106	46.000	9.741	AV
9		6.270	7.581	-2.215	-52.419	60.000	9.796	QP
10		6.270	-3.983	-13.779	-53.983	50.000	9.796	AV
11		27.954	20.717	10.641	-39.283	60.000	10.076	QP
12	*	27.954	14.039	3.962	-35.961	50.000	10.076	AV

Profile: 24B1031R	Page No.: 2
Engineer: Yu Liu	
Site: TR1	Time: 2024/12/10 - 23:24
Limit: FCC_Part 15.207	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Neutral
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

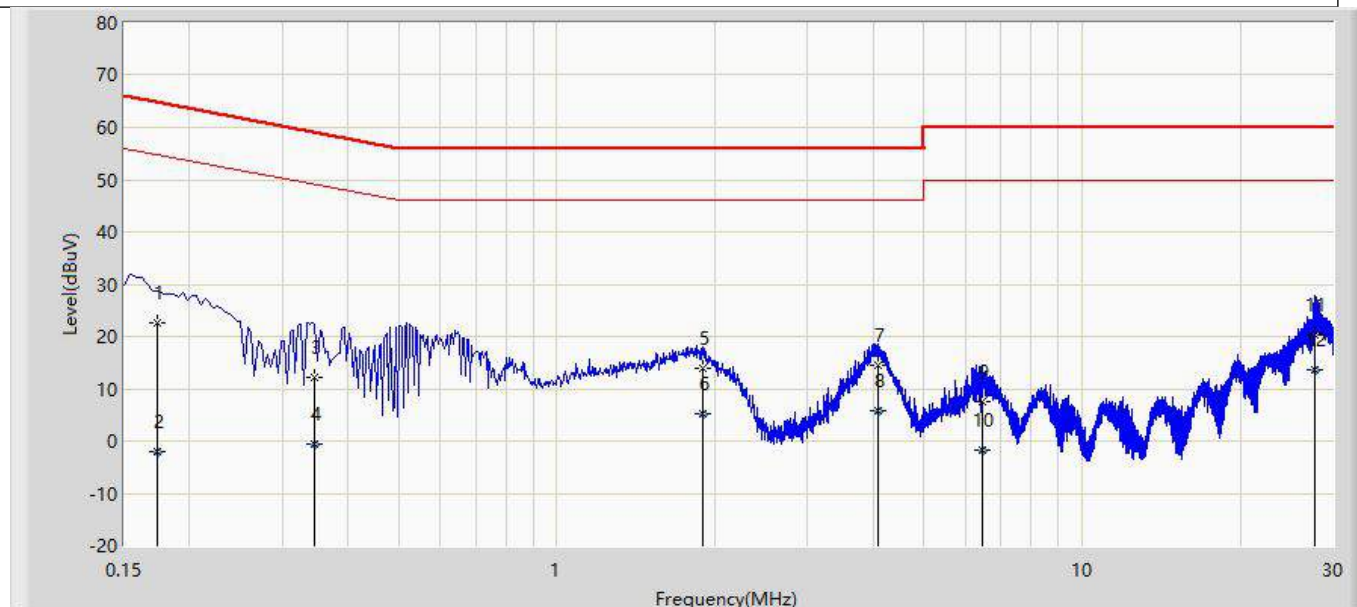

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.173	22.703	13.072	-42.127	64.829	9.631	QP
2		0.173	-2.035	-11.665	-56.864	54.829	9.631	AV
3		0.346	12.304	2.665	-46.754	59.058	9.639	QP
4		0.346	-0.635	-10.274	-49.693	49.058	9.639	AV
5		1.890	13.860	4.168	-42.140	56.000	9.692	QP
6		1.890	5.089	-4.603	-40.911	46.000	9.692	AV
7		4.086	14.471	4.720	-41.529	56.000	9.751	QP
8		4.086	5.866	-3.885	-40.134	46.000	9.751	AV
9		6.446	7.649	-2.154	-52.351	60.000	9.804	QP
10		6.446	-1.739	-11.543	-51.739	50.000	9.804	AV
11		27.778	20.204	10.087	-39.796	60.000	10.118	QP
12	*	27.778	13.555	3.438	-36.445	50.000	10.118	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

_____ The End _____