



Prüfbericht-Nr.: Test report no.:	CN23FP2A (P15C-Zigbee) 001	Auftrags-Nr.: Order no.:	48217629	Seite 1 von 24 Page 1 of 24
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-04-06	
Auftraggeber: Client:	Signify (China) Investment Co., Ltd No.9, Lane 888, Tina Lin Road, 200233, Shanghai, China			
Prüfgegenstand: Test item:	OCC0100A/02 BP Sensor WH, OCC0101A/02 DL BP Sensor WH			
Bezeichnung / Typ-Nr.: Identification / Type no.:	9137010670, 9137010671			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report (Zigbee)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	2023-04-25			
Prüfmuster-Nr.: Test sample no:	A003464065-005 A003464065-003			
Prüfzeitraum: Testing period:	2023-05-03 - 2023-05-09			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
zusammengestellt von: compiled by:	genehmigt von: authorized by:			
Datum: Date:	2023-05-15	Ausstellungsdatum: Issue date:	2023-05-15	
Stellung / Position:	Assistant Project Engineer	Stellung / Position:	Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

V05

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
-	15.207	Mains Conducted Emission	N/A

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	13
5. TEST RESULTS	14
5.1 TRANSMITTER REQUIREMENT & TEST SUITES.....	14
5.1.1 Antenna Requirement	14
5.1.2 Peak Output Power	15
5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth.....	17
5.1.4 Power Spectral Density.....	18
5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth.....	19
5.1.6 Radiated Spurious Emissions and Band Edges	20

Prüfbericht - Nr.: CN23FP2A (P15C-Zigbee) 001
Test Report No.

Seite 4 von 24
Page 4 of 24

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN23FP2A (P15C-Zigbee) 001
Test Report No.

Seite 5 von 24
Page 5 of 24

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN23FP2A (P15C-Zigbee) 001	Original Release	2023-05-15

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a OCC0100A/02 BP Sensor WH, OCC0101A/02 DL BP Sensor WH. It contains a Zigbee compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	OCC0100A/02 BP Sensor WH, OCC0101A/02 DL BP Sensor WH
Type Identification	9137010670, 9137010671
FCC ID	2AGBWOCC010

Technical Specification of EUT

Item	EUT information
Operating Frequency	2405 MHz ~ 2480 MHz
Channel Number	16
Data Rate	250 kbps
Operation Voltage	3.6 Vdc
Modulation	O-QPSK
Maximum Output Power (mW)	1.95
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

Note:

1. All models are listed as below.

Main Model	Series Model	Difference
9137010671	9137010670	Main model is with daylight sensor, and series model is without daylight sensor

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2405	24
2440	24
2480	24

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	Tera Term
---------------	-----------

The samples were used as follows:

A003464065-005

A003464065-003

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	-	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Z-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)
-	2405 to 2480	2405, 2440, 2480

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)
-	2405 to 2480	2405, 2440, 2480

Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)
-	2405 to 2480	2480

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	18-23 °C	56-68 %	Nick Hsu
Radiated Spurious Emissions above 1 GHz	23.6-24.4 °C	54-56 %	Ivan Chiang
Radiated Spurious Emissions below 1 GHz	23.6-24.4 °C	54-56 %	Ivan Chiang

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit

Support Unit					
No.	Description	Brand	Model	S/N	Remark
-	Notebook	HP	Laptop-15s-du0xx	N/A	--

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

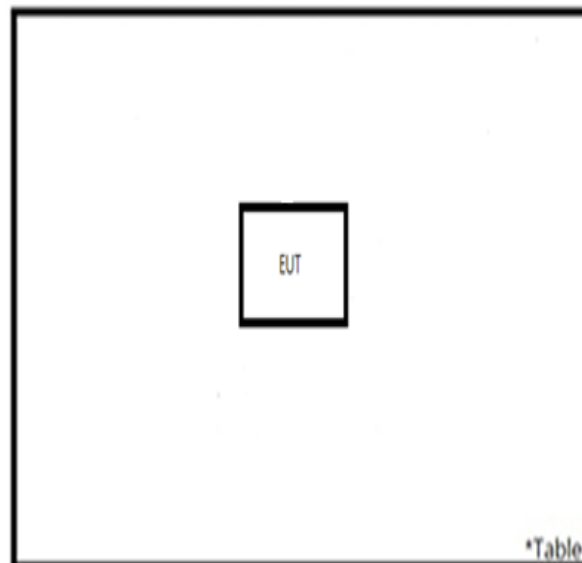

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only


According to the manufacturer declaration, the EUT has an antenna with a directional gain of 3.2 dBi. The antenna is a PCB antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.
Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2023/3/17	2024/3/15	2023/5/3	2023/5/9
Power Sensor	Anritsu	MA2411B	1725269	2023/3/17	2024/3/15	2023/5/3	2023/5/9

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result**Peak Output Power**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2405	2.62	1.83	30
Middle Channel	2440	2.85	1.93	30
High Channel	2480	2.89	1.95	30

Average Power (For Reference)


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2405	2.57	1.81
Middle Channel	2440	2.80	1.91
High Channel	2480	2.85	1.93

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/5/3	2023/5/9

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/5/3	2023/5/9

Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/5/3	2023/5/9

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

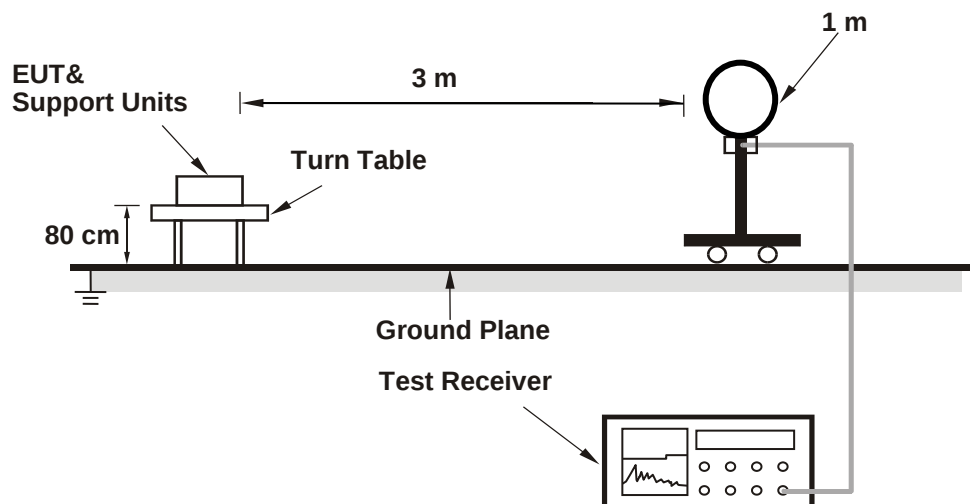

<Radiated Emissions 30 MHz to 1 GHz>

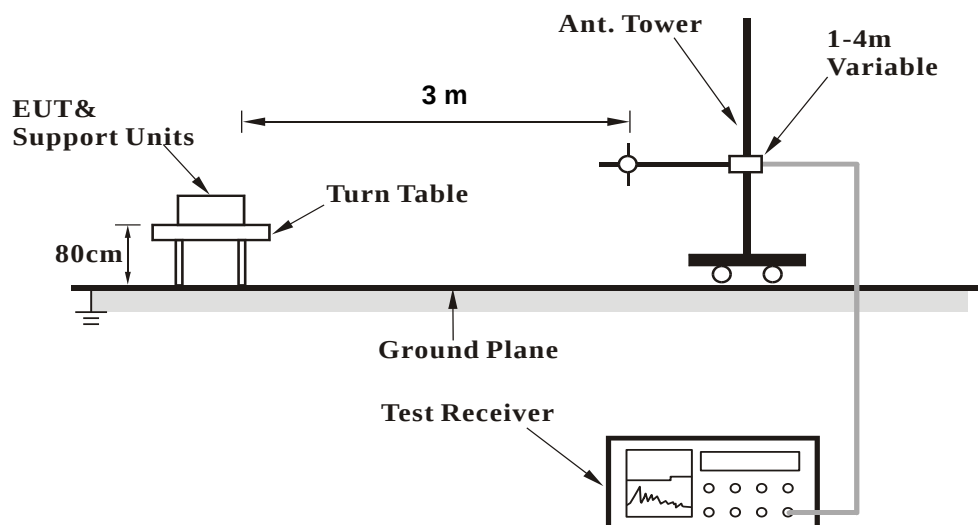

<Radiated Emissions above 1 GHz>

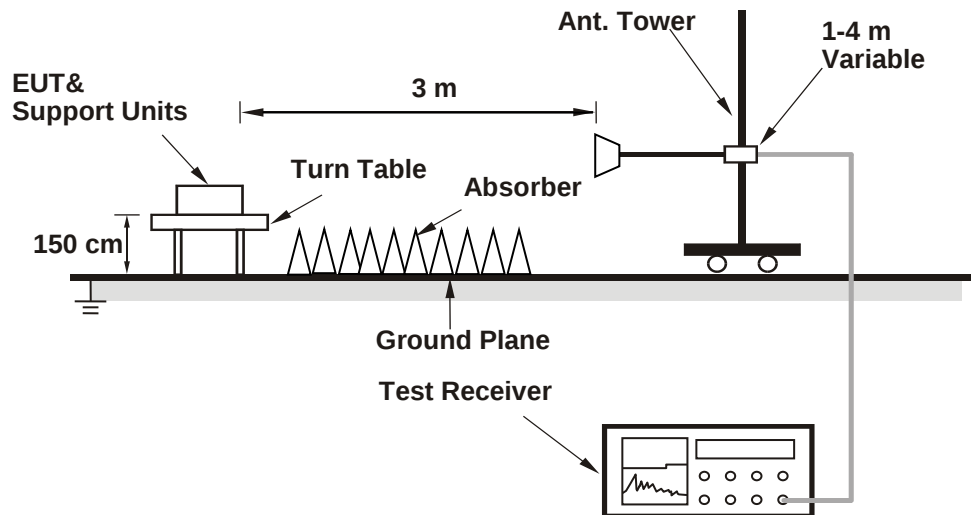

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101508	2023/4/20	2024/4/18
Horn Antenna	ETS-Lindgren	3117	00218929	2022/12/8	2023/12/7
HF-AMP + AC source	EMCI	EMC051845SE	980633	2023/2/22	2024/2/21
HF-AMP + AC source	EMCI	EMC184045SE	980657	2023/2/16	2024/2/15
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2023/3/31	2024/3/29
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Bilog Antenna	SCHWARZBECK	VULB-9168	00949	2022/5/29	2023/5/28
LF-AMP	Agilent	8447D	2944A107722	2023/3/22	2024/3/20
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
Below 30 MHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2023/1/4	2024/1/3
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: CN23FP2A (P15C-Zigbee) 001
Test Report No.

Seite 24 von 24
Page 24 of 24

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.


Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth


ZIGBEE

Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
Low Channel	2405	1.66	> 0.5	Pass
Middle Channel	2440	1.65	> 0.5	Pass
High Channel	2480	1.66	> 0.5	Pass


Low Channel

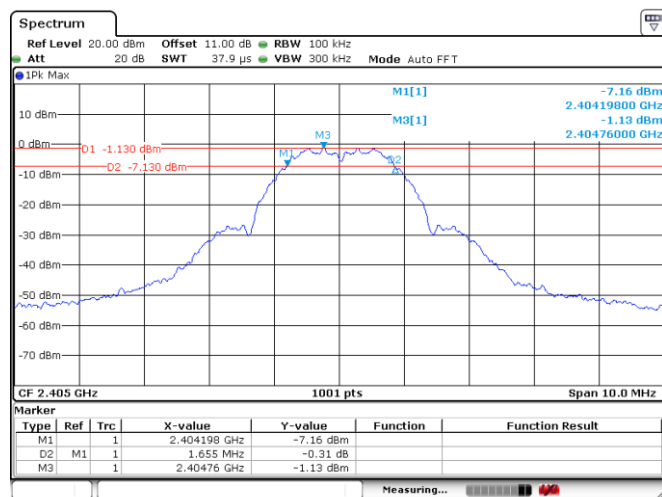

Middle Channel

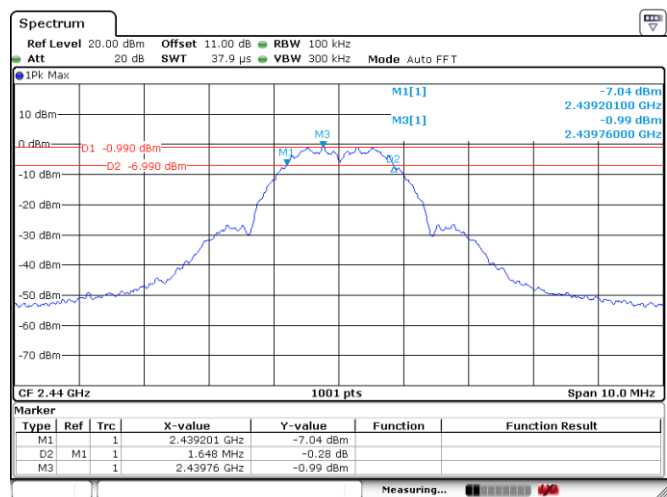

High Channel

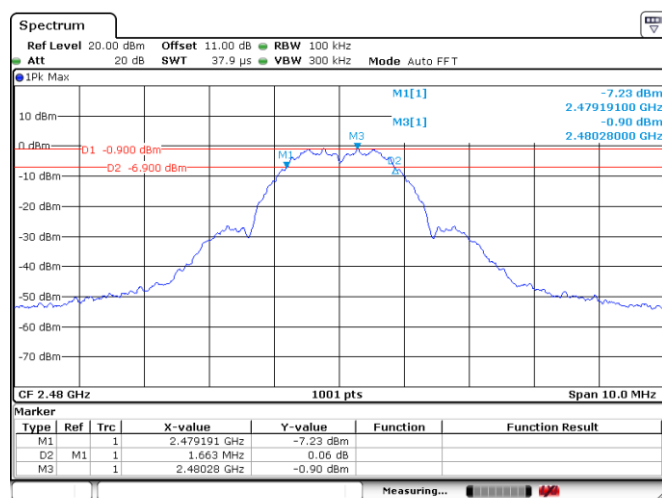


Test Result of 99% Occupied Bandwidth


ZIGBEE

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2405	2.23
Middle Channel	2440	2.24
High Channel	2480	2.24


Low Channel

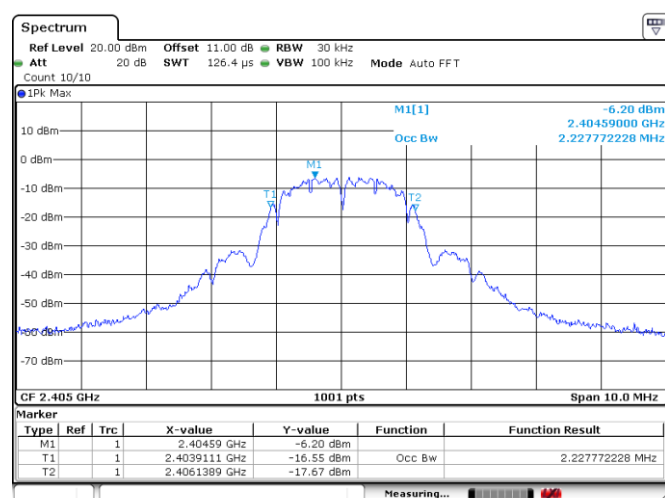

Middle Channel

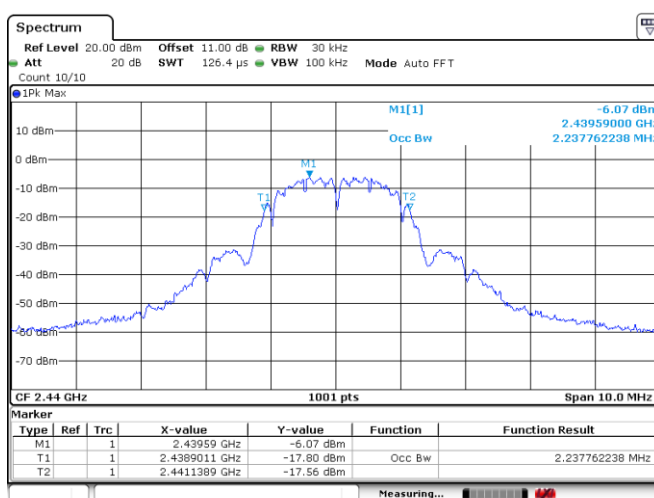

High Channel

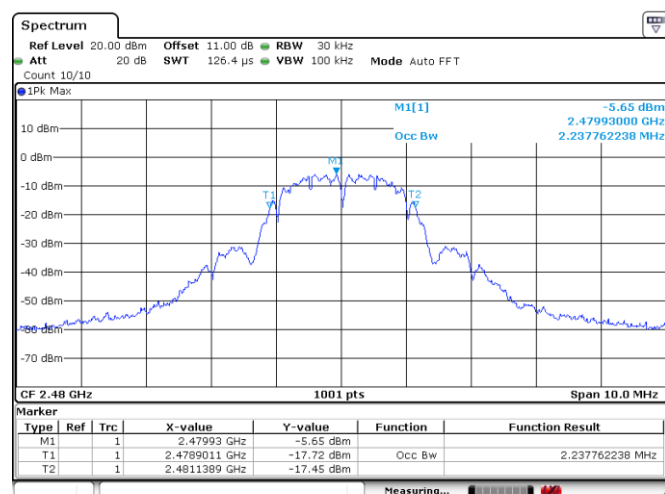


Test Result of Power Spectral Density


ZIGBEE

Channel	Channel Frequency (MHz)	Power Density (dBm)	Limit (dBm)	Result
Low Channel	2405	-12.70	8	Pass
Middle Channel	2440	-12.57	8	Pass
High Channel	2480	-12.49	8	Pass


Low Channel

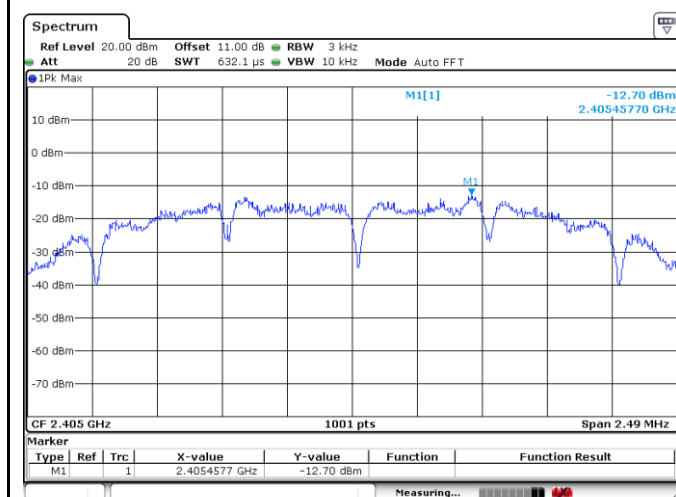

Middle Channel

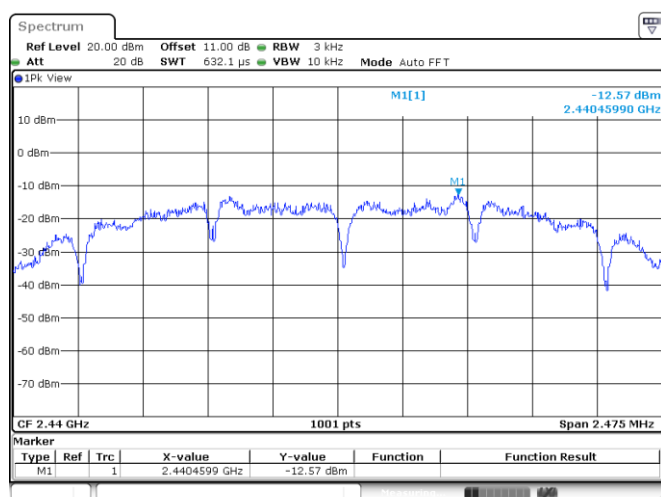

High Channel


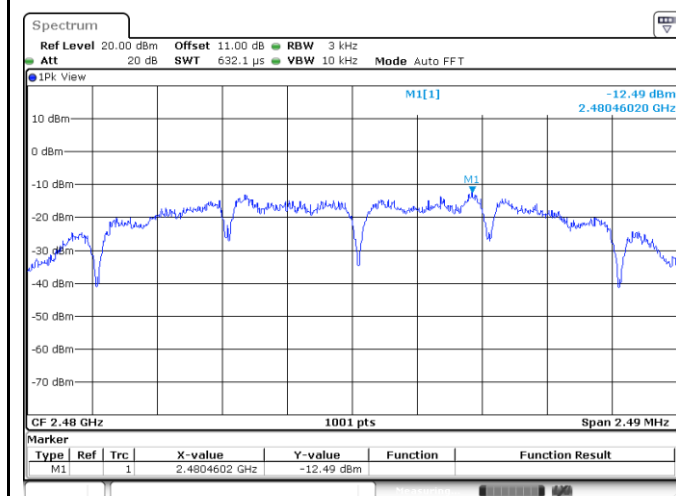


Test Result of Conducted Spurious Emissions, Tx Mode


ZIGBEE

Low Channel

Middle Channel

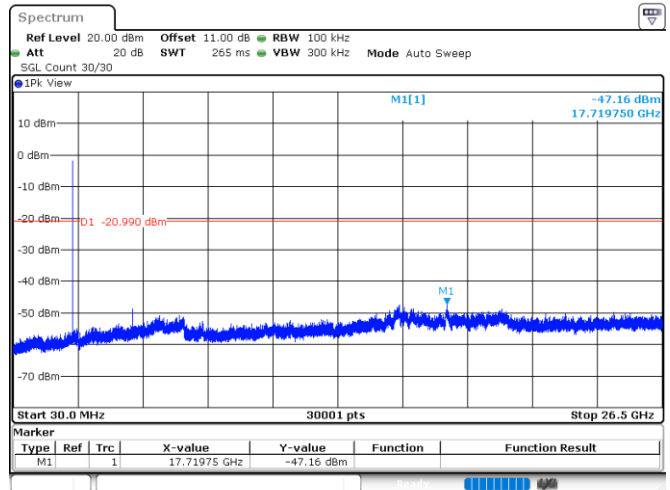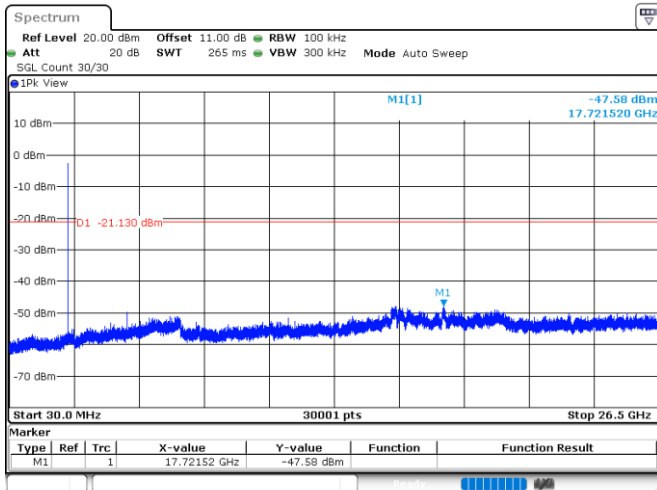


High Channel

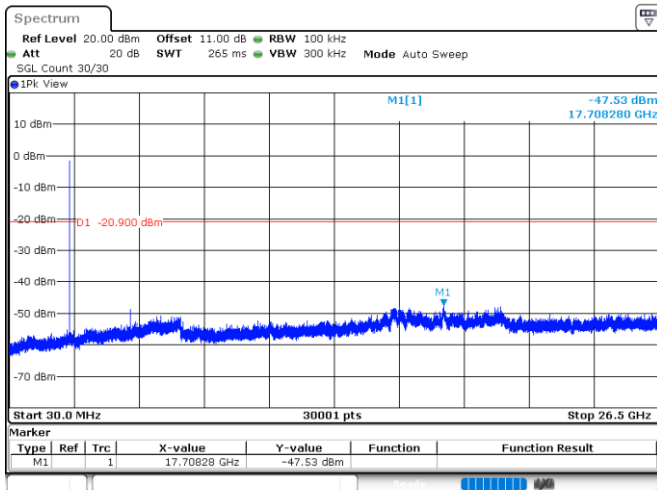

Test Result of Conducted Band Edge, Tx Mode

ZIGBEE

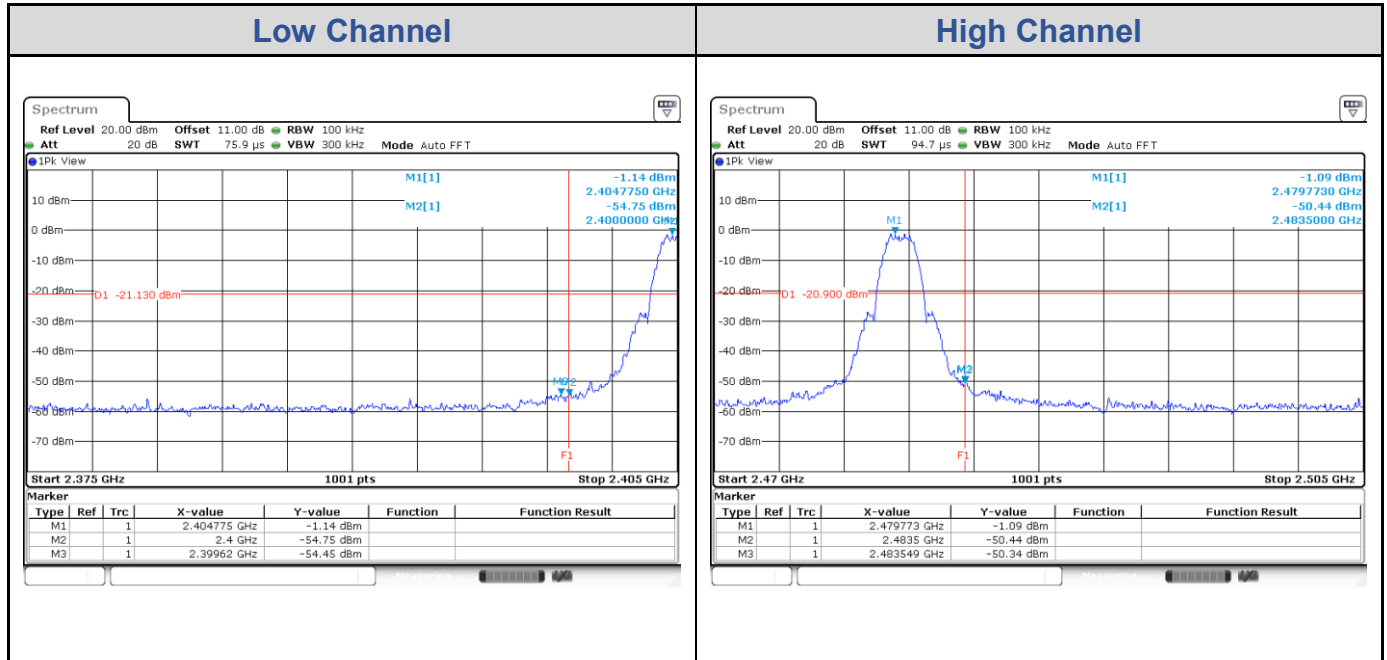

Appendix B: Test Results of Radiated Spurious Emissions Test

Band Edges, 2.31GHz ~ 2.9GHz

Zigbee

Low Channel (Horizontal) Peak

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

Date: 2023-05-08

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2322.98	54.08	17.20	36.88	74.00	-19.92	264	352	Peak	Horizontal		
2 *	2405.00	99.84	62.70	37.14	74.00	25.84	264	352	Peak	Horizontal		
3	2519.10	55.55	18.07	37.48	74.00	-18.45	264	352	Peak	Horizontal		

Low Channel (Vertical) Peak

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

Date: 2023-05-08


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2332.54	54.94	17.99	36.95	74.00	-19.06	376	177	Peak	Vertical		
2 *	2405.00	97.84	60.70	37.14	74.00	23.84	376	177	Peak	Vertical		
3	2883.48	56.06	18.18	37.88	74.00	-17.94	376	177	Peak	Vertical		

Zigbee

Low Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

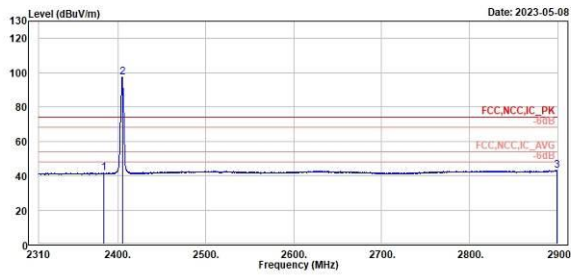

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2384.22	41.43	4.34	37.09	54.00	-12.57	264	352	Average	Horizontal		
2 *	2485.00	97.56	60.42	37.14	54.00	43.56	264	352	Average	Horizontal		
3	2899.06	42.87	4.90	37.97	54.00	-11.13	264	352	Average	Horizontal		




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

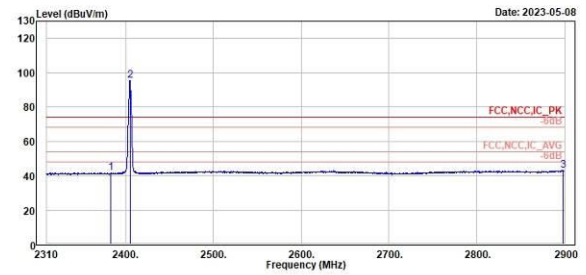


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2382.81	41.73	4.64	37.09	54.00	-12.27	376	177	Average	Vertical		
2 *	2485.00	95.60	58.46	37.14	54.00	41.60	376	177	Average	Vertical		
3	2897.88	42.92	4.96	37.96	54.00	-11.08	376	177	Average	Vertical		

Zigbee

Middle Channel (Horizontal) Peak

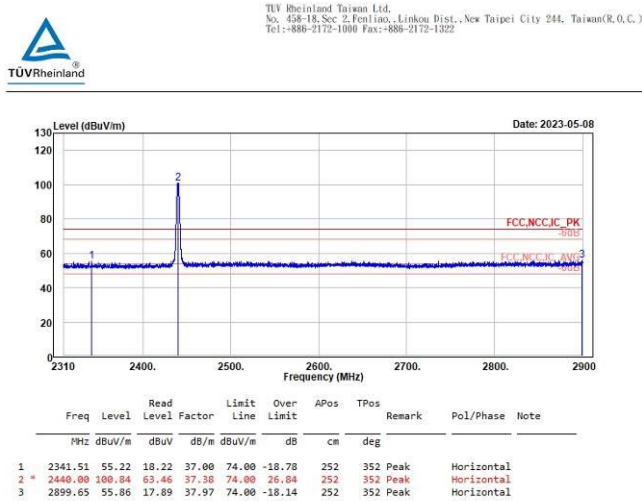

Middle Channel (Vertical) Peak

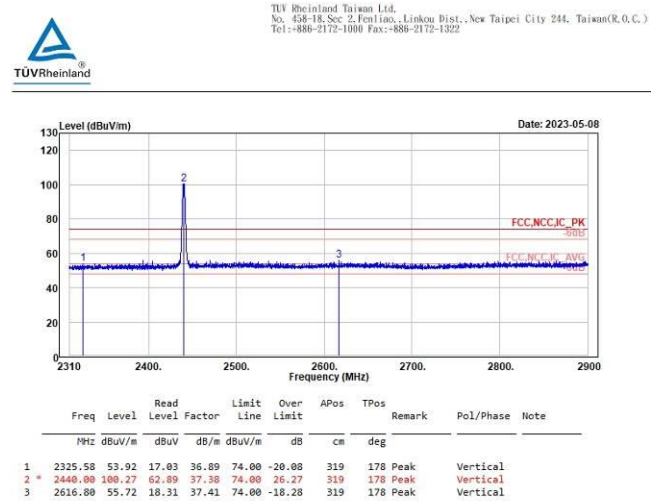


Zigbee


Middle Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

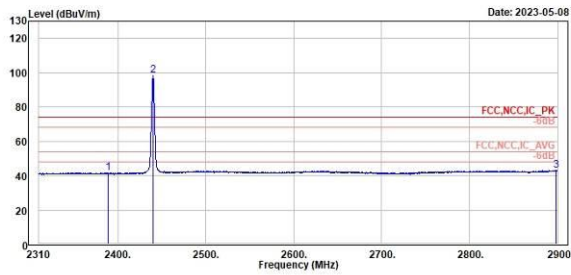

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

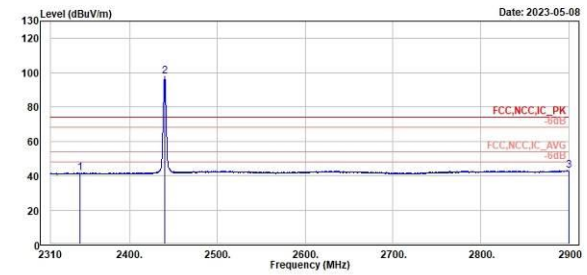


Zigbee

High Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

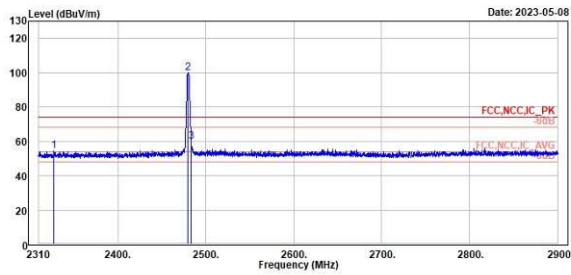

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2326.99	54.24	17.34	36.90	74.00	-19.76	100	286	Peak	Horizontal		
2 *	2480.00	99.97	62.49	37.48	74.00	25.97	100	286	Peak	Horizontal		
3	2483.58	60.02	22.54	37.48	74.00	-13.98	100	286	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

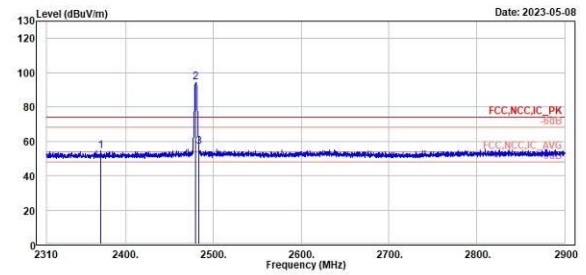


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2371.71	54.36	17.28	37.08	74.00	-19.64	100	72	Peak	Vertical		
2 *	2480.00	94.25	56.77	37.48	74.00	20.25	100	72	Peak	Vertical		
3	2483.46	57.01	19.53	37.48	74.00	-16.99	100	72	Peak	Vertical		

Zigbee


High Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

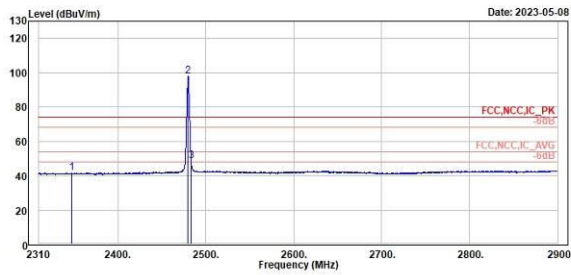

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

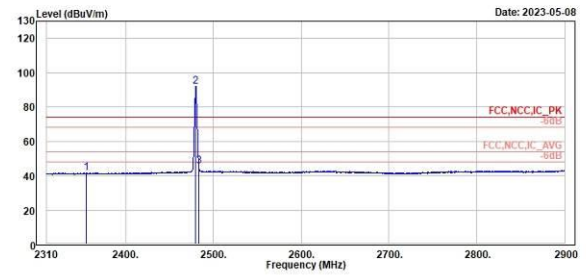

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


Zigbee

High Channel (Open) 9kHz~150kHz

High Channel (Open) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

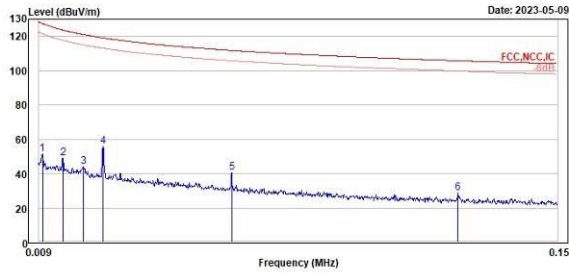

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	51.35	33.63	17.72	127.60	-76.25	100	109	Peak	Open		
2	0.02	49.15	31.02	18.13	123.71	-74.56	100	196	Peak	Open		
3	0.02	44.20	25.64	18.56	121.03	-76.83	100	324	Peak	Open		
4	0.03	55.84	36.89	18.95	119.13	-63.29	100	16	Peak	Open		
5	0.06	40.70	21.85	18.85	111.82	-71.12	100	33	Peak	Open		
6	0.12	28.70	10.68	18.02	105.00	-77.10	100	273	Peak	Open		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

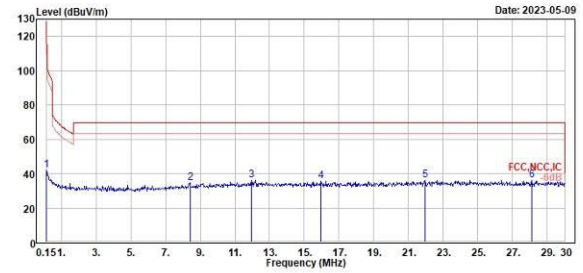

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.15	42.00	23.87	18.13	104.00	-62.00	100	23	Peak	Open		
2	8.42	34.37	13.47	20.90	69.50	-35.13	100	21	Peak	Open		
3	11.97	36.20	14.50	21.70	69.50	-33.30	100	191	Peak	Open		
4	15.97	35.55	13.58	21.97	69.50	-33.95	100	226	Peak	Open		
5	21.94	36.17	13.91	22.26	69.50	-33.33	100	330	Peak	Open		
6	28.09	36.01	13.70	22.31	69.50	-33.49	100	239	Peak	Open		


Spurious Emissions, Tx Mode, 30MHz ~ 1GHz

Zigbee

High Channel (Horizontal)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

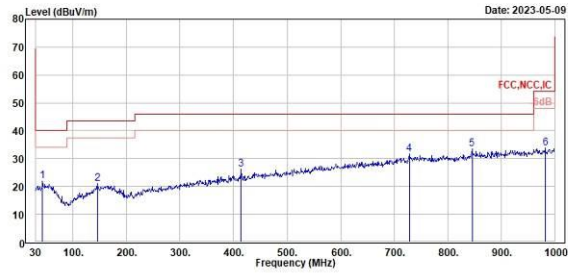

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	42.61	21.00	29.38	-7.50	40.00	-18.20	351	360	Peak	Horizontal		
2	145.43	20.87	28.57	-7.70	43.50	-22.63	150	360	Peak	Horizontal		
3	414.12	26.15	30.29	-4.14	46.00	-19.85	100	273	Peak	Horizontal		
4	728.40	31.61	29.97	1.64	46.00	-14.39	200	78	Peak	Horizontal		
5	845.77	33.40	29.70	3.70	46.00	-12.60	400	266	Peak	Horizontal		
6	982.54	33.89	28.41	5.48	54.00	-20.11	100	19	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

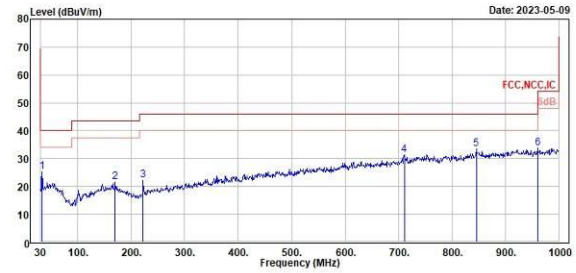

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	32.91	25.13	34.00	-8.87	40.00	-14.87	100	45	Peak	Vertical		
2	169.68	21.59	28.77	-7.18	43.50	-21.91	300	104	Peak	Vertical		
3	222.06	22.12	31.62	-9.50	46.00	-23.88	200	351	Peak	Vertical		
4	710.94	31.19	29.50	1.69	46.00	-14.81	100	51	Peak	Vertical		
5	845.77	33.49	29.79	3.70	46.00	-12.51	360	360	Peak	Vertical		
6	960.23	33.88	28.72	5.16	54.00	-20.12	300	335	Peak	Vertical		

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


Zigbee

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

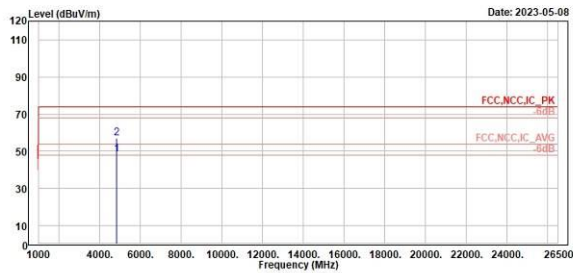

Line	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV/m)	Factor	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	4810.00	57.01	57.01	-10.38	54.00	-5.59	100	63	Average	Horizontal	
2	4810.00	57.01	57.01	-10.38	74.00	-16.99	100	63	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

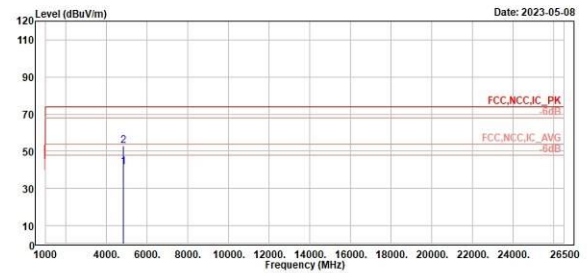

Line	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV/m)	Factor	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	4810.00	41.72	41.72	-10.38	54.00	-12.28	287	170	Average	Vertical	
2	4810.00	53.09	53.09	-10.38	74.00	-20.91	287	170	Peak	Vertical	


Zigbee

Middle Channel (Horizontal)

Middle Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

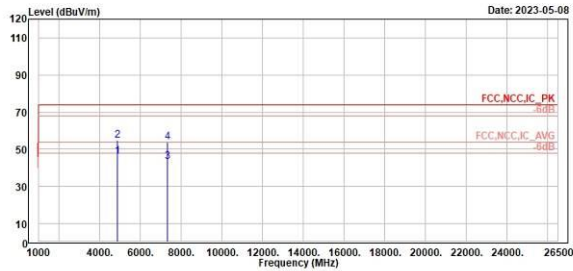

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4880.00	46.17	56.50	-10.33	54.00	-7.83	312	360	Average	Horizontal		
2	4880.00	54.76	65.09	-10.33	74.00	-19.24	312	360	Peak	Horizontal		
3	7320.00	43.41	51.91	-8.50	54.00	-10.59	100	7	Average	Horizontal		
4	7320.00	53.68	62.18	-8.50	74.00	-20.32	100	7	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

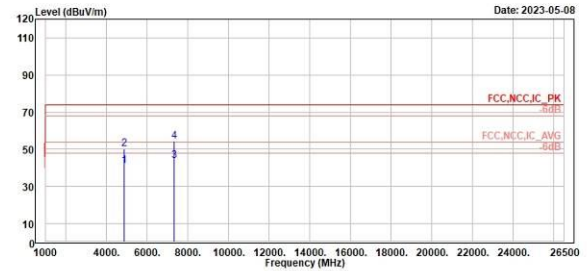


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4880.00	40.86	51.19	-10.33	54.00	-13.14	131	167	Average	Vertical		
2	4880.00	50.23	60.56	-10.33	74.00	-23.77	131	167	Peak	Vertical		
3	7320.00	43.79	52.29	-8.50	54.00	-10.21	235	213	Average	Vertical		
4	7320.00	54.24	62.74	-8.50	74.00	-19.76	235	213	Peak	Vertical		

Zigbee

High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

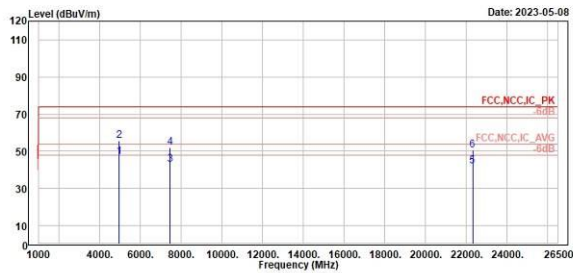


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4960.00	46.91	57.13	-10.22	54.00	-7.09	100	59	Average	Horizontal		
2	4960.00	55.62	65.84	-10.22	74.00	-18.38	100	59	Peak	Horizontal		
3	7440.00	42.90	51.22	-8.32	54.00	-11.10	100	117	Average	Horizontal		
4	7440.00	51.86	60.18	-8.32	74.00	-22.14	100	117	Peak	Horizontal		
5	22320.00	41.77	43.45	-1.68	54.00	-12.23	114	61	Average	Horizontal		
6	22320.00	50.51	52.19	-1.68	74.00	-23.49	114	61	Peak	Horizontal		

High Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

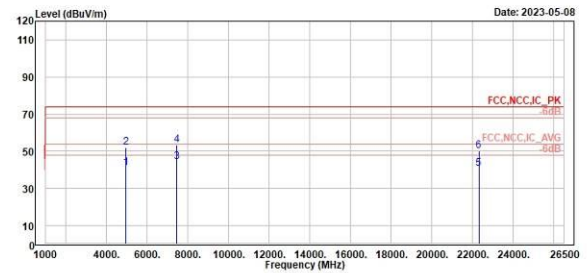

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4960.00	41.20	51.42	-10.22	54.00	-12.80	100	171	Average	Vertical		
2	4960.00	51.94	62.16	-10.22	74.00	-22.06	100	171	Peak	Vertical		
3	7440.00	44.14	52.46	-8.32	54.00	-9.86	100	242	Average	Vertical		
4	7440.00	53.21	61.53	-8.32	74.00	-20.79	100	242	Peak	Vertical		
5	22320.00	40.68	42.36	-1.68	54.00	-13.32	110	148	Average	Vertical		
6	22320.00	50.22	51.90	-1.68	74.00	-23.78	110	148	Peak	Vertical		