# FCC TEST REPORT

Product name: LED- glasses

FCC ID: 2AGDD-FNT-CHM-2000

Model: CHM-2000

Standards: FCC CFR 47 PART 15 SUBPART C,

**Section 15.247** 

Applicant: Funiot, Inc.

Test Report No.: UCSFR-1510-004

UCS Co., Ltd.





#702, AnyangMegavalley, 268 Hagui-ro, Dongan-gu, Anyang-si, Gyeonggi-do, 431-767 Korea.

Page: 2 of 24

# **FCC Test Report**

Report Number		UCSFR-1510-004				
Applicant	Company Name	Funiot, Inc.				
пррисанс	Address	401 Boram plaza, 146, Jukjeon-ro, Suji-gu, Yongin-si, Gyeonggi-do, 448-701, Korea				
	Product Name	LED-glasses				
	FCC ID	2AGDD-FNT-CHM-2000				
Product	Model No.	CHM-2000				
	Manufacturer	APROTECH(SHENZHEN) CO., LTD.				
	Serial No.	-	Country of origin	China		
Other	Receipt Date	2015.06.08	Receipt Number	UCS-R-2015-426		
Other	Issued Date	2015.10.15	Tested Date	2015.10.13 ~ 2015.10.14		
Standards		FCC CFR 47 PART 15 SUBPART C, Section 15.247				
Tested by		Y. Choi (Sign)				
App	roved by	Y. M. Choi (Sign)				

# UCS Co., Ltd.

#702, Anyang Megavally, 268 Hagui-ro, Dongan-gu, Anyang-si, Gyeonggi-do, 431-767 Korea. Tel : +82-31-420-5680, Fax : +82-31-420-5685

o This is certified that the above mentioned products have been tested for the sample provided by client.

o No part of this document may not be duplicated or reproduced by any means without the express written permission of UCS Co., Ltd.



# Page: 3 of 24

# **Contents**

1. Applicant Information	4
2. EUT (Equipment under test) Information	4
3. Laboratory Information	4
4. Test Configuration and Condition	5
5. Summary of Test Results and Measurement Procedures	<del>6</del>
6. Test Results	7
7. Radio Frequency Exposure	23
8 Test Equipment Used For Test	24

# **Revision History**

Issued Report No.	Issued Date	Revisions	Effect Section
UCSFR-1510-004	15-Oct-2015	Initial Issue	All



Report Number: UCSFR-1510-004 FCC ID: 2AGDD-FNT-CHM-2000

# 1. Applicant Information

Applicant Name : Funiot, Inc.

Address : 401 Boram plaza, 146, Jukjeon-ro, Suji-gu, Yongin-si, Gyeonggi-do, 448-701, Korea

Manufacturer : APROTECH(SHENZHEN) CO., LTD.

Address : 1 Building, B Area, Yuhong Industrial, Estate, Xingye West Road, Shajing Heyi, Baoan

District, SHENZHEN China

Country of Origin : China

# 2. EUT (Equipment under test) Information

Product name LED-glasses		
Model name	CHM-2000	
Power source	DC 3 V (1.5 V AAA size battery 2EA)	
Output Power	MAX 0.000 229 W	
Ferquency range	2 402 MHz ~ 2 480 MHz	
Number of channels	40 Ch	
Modulation Technique	GFSK (Bluetooth 4.0)	
Operating System	Android: kitkat 4.4 OB / Ios: 7 OB	
Antenna specification	PCB pattern antenna	
Size	160(L) mm X 200(W) mm X 57(H) mm	

# 3. Laboratory Information

## UCS Co., Ltd.

#702, Anyang Megavalley799, Gwanyang2-dong, Dongan-gu, Anyang-si, Gyeonggi-do, 431-767, Korea

#### **ER Center**

#476-4, Hwalcho-dong, Hwaseong-si, Gyeonggi-do, 445-150, Korea

#### **Test site**

- FCC Registration Number: 803225
- This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.



4. Test Configuration and Condition

# 4.1 EUT operating condition

- The EUT had been tested under the operating condition.
- There are three channels have been tested as following:
- Channel Low and Channel High with higher data rate were chosen for full testing.

Channel	Frequency (MHz)	
Low	2 402	
Middle	2 440	
High	2 480	

Page: 5 of 24

- The measurements were taken in continuous transmitting mode using the TEST MODE.
- For controlling the EUT as TEST MODE, the test program and the cable assembly were provided by the applicant.

# 4.2 EUT test configuration diagram



# 4.3 Peripheral equipments list for test

Equipment Name	Model	Serial Number	Manufacturer
Notebook	SD550-CD1SK	304QCDG563530	LG Electronics.
TEST JIG	-	-	Funiot, Inc.

## 4.4 Cable connections

Start		End		Cable	
Name	I/O Port	Name	I/O Port	Length	Spec.
Notebook	USB	TEST JIG	-	1.0	Shielded

## 4.5 EUT modifications

- None



# 5. Summary of Test Results and Measurement Procedures

# 5.1 Summary of test results

Standard	Test Item	CFR 47 Section	Result
	Antenna Requirement	15.203, 15.247(b)(4)	PASS
	6 dB Bandwidth	15.247(a)(2)	PASS
FCC CFR 47	Maximum Peak Output Power	15.247(b)(1)	PASS
PART 15	Peak Power Spectral Density	15.247(a)(1)	PASS
SUBPART C, Section 15.247	Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.209	PASS
	AC Power Line Conducted Emissions	15.207	N/A
	RF Exposure	15.247(i), .1307(b)(1)	PASS

Page: 6 of 24


## 5.2 AC Powerline conducted emission test

It is not need to test this requirement, because the power of the EUT supplies from a battery.

#### 5.3 Radiated emission test

Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10:2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 3 m open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.



Report Number: UCSFR-1510-004 FCC ID: 2AGDD-FNT-CHM-2000



## 6. Test Results

#### 6.1 Antenna requirement

#### 6.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 6.1.2 Results: Pass

- PCB pattern antenna. The directional gain of the antenna is -5.73 dBi.



## 6.2 6 dB bandwidth

## 6.2.1 Regulation

According to \$15.247(a)(2), Systems using digital modulation techniques may operate in the 902 MHz  $\sim$  928 MHz, 2 400 MHz  $\sim$  2 483.5 MHz, and 5 725 MHz  $\sim$  5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Page: 8 of 24

## 6.2.2 Test condition

- Set RBW of Spectrum analyzer to 100 kHz, Span = 3 MHz, Sweep = auto
- The 6 dB bandwidth is defined as the frequency range where the power is higher than the peak power minus 6 dB

## 6.2.3 Results: Pass

Table 1 : Measured values of the 6 dB bandwidth							
Mode Frequency [MHz] Result Limit [kHz] Result							
	2 402	704.51		PASS			
GFSK (Bluetooth 4.0)	2 440	701.29	> 500	PASS			
	2 480	708.43		PASS			




Page: 9 of 24


# 6.2.4 Graph of the 6 dB channel bandwidth

# GFSK (Bluetooth 4.0)


## **Lowest Channel**



## **Middle Channel**



# **Highest Channel**





## 6.3 Maximum peak output power

## 6.3.1 Regulation

According to \$15.247(b)(1), for frequency hopping systems operating in the 2 400 MHz  $\sim$  2 483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 MHz  $\sim$  5 850 MHz band: 1 watt.

For all other frequency hopping systems in the 2 400 MHz ~ 2 483.5 MHz band: 0.125 watts.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 6.3.2 Test condition

- Set RBW of Spectrum analyzer to 1 MHz
- The Maximum Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. For frequency hopping systems operating in the 2 400 MHz  $\sim$  2 483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5 725 MHz  $\sim$  5 850 MHz band: 1 watt.

#### 6.3.3 Results: Pass


Table 2: Measured values of the maximum peak output power (Conducted)						
Mode	Frequency [MHz]	Reading Power [dBm]	Output Power [W]	Limit [W]	Result	
GFSK (Bluetooth 4.0)	2 402	-6.40	0.000 229		PASS	
	2 440	-8.83	0.000 131	0.125	PASS	
	2 480	-9.90	0.000 102		PASS	

Page: 11 of 24


# 6.3.4 Graph of the Maximum Peak Output Power (Conducted)

# GFSK (Bluetooth 4.0)


# **Lowest Channel**



## **Middle Channel**



# **Highest Channel**





## 6.4 Peak power spectral density

## 6.4.1 Regulation

According to §15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 6.4.2 Test condition

- Set RBW of Spectrum analyzer to 3 kHz, Span = 1 MHz, Sweep = Auto
- The transmitter output was connected to a spectrum analyzer and the maximum level in a 3 kHz bandwidth was measured. A peak value was found over the full emission bandwidth and the frequency span reduced to obtain enhanced resolution. Sweep time ≥ span / 3 kHz with video averaging turned off. The Peak Power Spectral Density is the highest level found across the emission in a 3 kHz resolution bandwidth.

#### 6.4.3 Results: Pass

Table 3: Measured values of the peak power spectral density						
Mode	Frequency [MHz]	Peak frequency [MHz]	Peak power spectral density [dBm]	Limit [dBm]	Result	
GFSK (Bluetooth 4.0)	2 402	2401.990	-21.33		PASS	
	2 440	2440.022	-24.28	< 8	PASS	
	2 480	2480.005	-25.23		PASS	




Page: 13 of 24


# 6.4.4 Graph of the peak power spectral density

# GFSK (Bluetooth 4.0)


## **Lowest Channel**



## **Middle Channel**



# **Highest Channel**





## 6.5 Spurious emissions and band edge, restricted bands

## 6.5.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Page: 14 of 24

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency [MHz]	Field strength [μV/m]	Field strength [dBµV/m]	Measurement distance [m]
0.009 ~ 0.490	2 400 / F (kHz)	-	300
0.490 ~ 1.705	24 000 / F (kHz)	-	30
1.705 ~ 30	30	29.54	30
30 ~ 88	100	40.00	3
88 ~ 216	150	43.52	3
216 ~ 960	200	46.02	3
Above 960	500	53.98	3


The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasipeak detector and above 1 000 MHz are based on the average value of measured emissions. Page: 15 of 24

# 6.5.2 Test setup layout

# 6.5.2.1 Radiated emission test set-up, frequency below 30 MHz

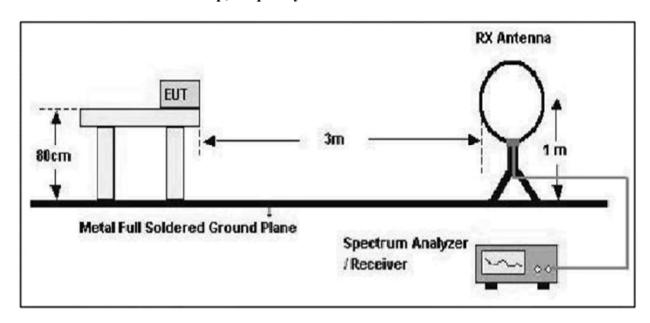


# 6.5.2.2 Radiated emission test set-up, frequency below 1 000 MHz

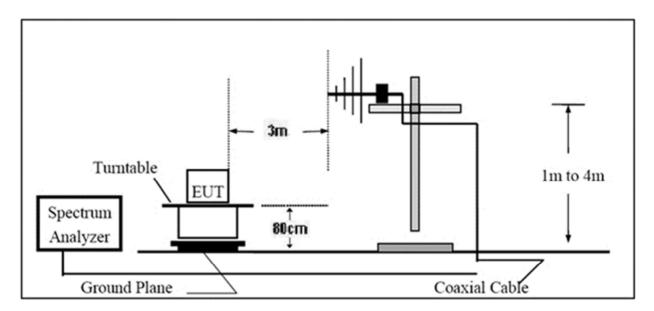

Page: 16 of 24

# 6.5.2.3 Radiated emission test set-up frequency above 1 000 MHz

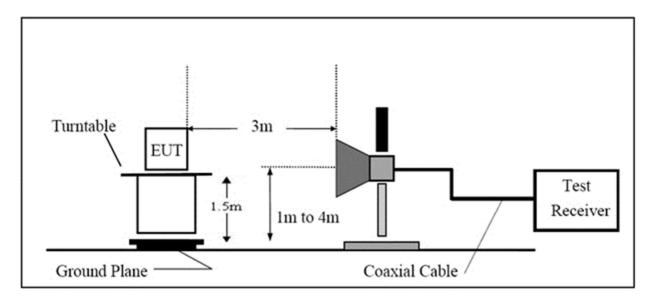



## 6.5.3 Test procedure

- 1) Band-edge compliance of RF conducted emissions
  - 1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

 $RBW \ge 1 \%$  of the span

 $VBW \ge RBW$ 

Sweep = auto

Detector function = peak

Trace = max hold

- 2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- 3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.
- 2) Spurious RF conducted emissions:
  - 1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz


 $VBW \ge RBW$ 

Sweep = auto

Detector function = peak

Trace = max hold

- 2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
- 3) Spurious radiated emissions:
  - 1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters for above 30 MHz, and at 1 meter distance for below 30 MHz.
  - 2. The EUT was placed on the top of the 0.8-meter height,  $1 \times 1.5$  meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.





3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, from 30 MHz to 1 000 MHz using the Trilog broadband antenna, and from 1 GHz to tenth harmonic of the highest fundamental frequency using the horn antenna.

Page: 18 of 24

- 4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 × 4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
- 5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
- 6. The EUT is situated in three orthogonal planes (if appropriate)
- 7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
- 8. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method may be employed.
- 4) Marker-delta method at the edge of the authorized band of operation:
  - 1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the above Spurious Radiated Emissions test procedure.
  - 2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the bandedge emission under investigation. Set the analyzer RBW to 1 % of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
  - 3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
  - 4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two "standard" bandwidths must be measured as the above spurious radiated emissions test procedure.



6.5.4 Results: Pass

Band-edge compliance of RF conducted/radiated emissions was shown in the 6.5.5 and 6.5.6

NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

Page: 19 of 24

Spurious RF conducted emissions were shown in the 6.5.7

NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

Table 4	: Measure	d values of the fiel	d strength of spuri	ous emission		
Frequency [MHz]		Detect Mode	Polarization [V/H]	Emission Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
Average	/Peak/Qua	si-peak data, emi	ssions below 30 MI	Hz	1	
			No critical	peaks found		
Quasi-p	eak data, e	emissions below 1	000 MHz			
	58.17	Qausi-peak	V	24.74	40.00	-15.26
	122.07	Qausi-peak	V	22.68	43.52	-20.84
2.402	123.27	Qausi-peak	Н	29.48	43.52	-14.04
2 402	224.97	Qausi-peak	Н	33.59	46.02	-12.43
	311.97	Qausi-peak	Н	28.72	46.02	-17.30
	368.21	Qausi-peak	Н	35.00	46.02	-11.02
	58.23	Qausi-peak	V	24.78	40.00	-15.22
	122.11	Qausi-peak	V	23.67	43.52	-19.85
2 4 4 0	123.33	Qausi-peak	Н	29.54	43.52	-13.98
2 440	224.94	Qausi-peak	Н	33.77	46.02	-12.25
	311.88	Qausi-peak	Н	28.99	46.02	-17.03
	368.74	Qausi-peak	Н	34.96	46.02	-11.06
	58.12	Qausi-peak	V	24.93	40.00	-15.07
2 480	121.96	Qausi-peak	V	23.62	43.52	-19.90
	123.26	Qausi-peak	Н	29.47	43.52	-14.05
	225.12	Qausi-peak	Н	33.83	46.02	-12.19
	311.94	Qausi-peak	Н	29.07	46.02	-16.95
	390.76	Qausi-peak	Н	35.02	46.02	-11.00
Peak/Av	erage data	a, emissions above	1 000 MHz			
			No critical	peaks found		

<sup>\*</sup> Remark: "H" Horizontal, "V" Vertical

<sup>\*</sup> Margin [dB] = Emission Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]




Page: 20 of 24


# 6.5.5 Graph of the band edge (Conducted)

# **GFSK (Bluetooth 4.0)**

#### **Lowest Channel**

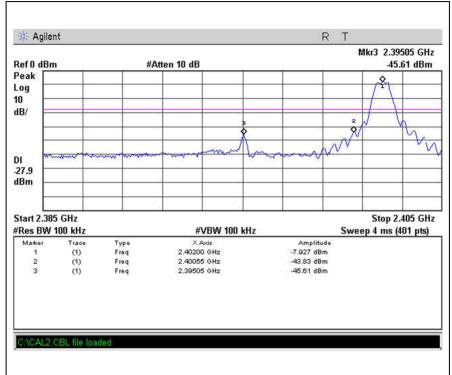

## Highest Channel

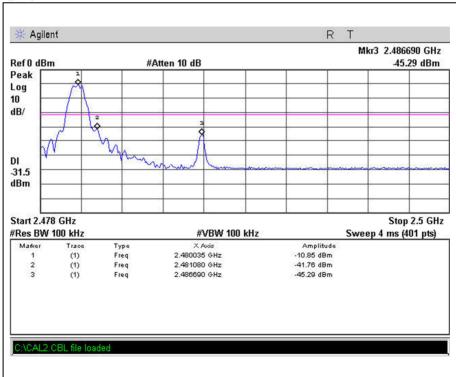



Page: 21 of 24

# 6.5.6 Data of the band edge (Radiated)

Table 5: Measured values of the band edge (GFSK Bluetooth 4.0)								
Frequency [MHz]		Detect Mode	Polarization [V/H]	Emission Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]		
2 402	2 322.16	Peak	Н	52.35	74.00	-21.65		
	2 322.16	Average	Н	34.01	54.00	-19.99		
	2 321.82	Peak	V	54.57	74.00	-19.43		
	2 321.82	Average	V	34.18	54.00	-19.82		
2 480	2 483.50	Peak	Н	53.25	74.00	-20.75		
	2 483.50	Average	Н	39.14	54.00	-14.86		
	2 483.50	Peak	V	56.84	74.00	-17.16		
	2 483.50	Average	V	42.51	54.00	-11.49		

<sup>\*</sup> Remark: "H" Horizontal, "V" Vertical

<sup>\*</sup> Margin [dB] = Emission Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]




Page: 22 of 24


# 6.5.7 Graph of the spurious RF conducted emissions

## GFSK (Bluetooth 4.0)


Lowest Channel: 30 MHz ~ 7 GHz




Lowest Channel: 7 GHz ~ 26.5 GHz




Middle Channel: 30 MHz ~ 7 GHz




Middle Channel: 7 GHz ~ 26.5 GHz



Highest Channel: 30 MHz ~ 7 GHz



Highest Channel: 7 GHz ~ 26.5 GHz





# 7. Radio Frequency Exposure

## 7.1 RF exposure limit

According to the FCC rule 1.1310, the limit for General Population/Uncontrolled exposure is  $1 \text{ mW/cm}^2$  for the device operating  $1.500 \text{ MHz} \sim 100.000 \text{ MHz}$ .

Page: 23 of 24

## 7.2 RF exposure consideration

This equipment should be operated with a minimum distance of 2 cm between the radiator and front of face.

This equipment should not be placed directly on the ear when the speaker is active.

## 7.3 EUT description

Kind of EUT	OCR Multi-Player			
	□ Wireless Microphone: 494.000 MHz ~ 501.000 MHz			
	and 498.200 MHz ~ 505.200 MHz			
	$\Box$ WLAN(802.11b/g/n(HT20)): 2 412 MHz ~ 2 462 MHz			
Operating Fraguency Dand	□ WLAN(802.11n(HT40)): 2 422 MHz ~ 2 452 MHz			
Operating Frequency Band	$\Box$ WLAN: 5 180 MHz $\sim$ 5 320 MHz $/$ 5 500 MHz $\sim$ 5 700 MHz			
	□ WLAN: 5 745 MHz ~ 5 825 MHz			
	■ Bluetooth: 2 402 MHz ~ 2 480 MHz			
	□ Zigbee: 2 425 MHz, 2 450 MHz, 2 475 MHz			
	□ Portable (< 20 cm separation)			
Device Category	☐ Mobile (> 20 cm separation)			
	■ Others			
Max. Output Power	MAX 0.000 229 W			
Used Antenna	Inserted into the bluetooth board (Pattern Antenna)			
Used Antenna Gain	-5.73 dBi			
	■ MPE			
Exposure Evaluation Applied	□ SAR			
	□ N/A			

#### 7.4 Results

According to the procedure, KDB 447498 D01, the standalone SAR test exclusion threshold is

[(Max. Power of channel, including tune-up tolerance, mW) / (Mim. test separation distance, mm)] x [ $\sqrt{f(GHz)}$ ] < 3 = [0.229/5)] x  $\sqrt{2.480}$  = 0.07

Conclusion: The SAR test exclusion threshold is less than 3, so the device meets the RF Exposure Requirement and excluded SAR Test.



**8.** Test Equipment Used For Test

Used	Description	Manufacturer	Model Name	Serial Number	Specifications	Next Cal. Data	DUE CAL
	Spectrum Analyzer	H.P	E4407B	US39010225	9 kHz ~ 26.5 GHz	2016-02-10	1 Year
	EPM-P SERIES POWER METER	Agilent	E4416A	GB38272722	1 CH 100-240 VAC	2016-08-05	1 Year
	Power Sensor	Agilent	8481A	US41030240	MAX.23 dBm AVG, 18 GHz	2016-08-04	1 Year
	Test receiver	ROHDE& SCHWARZ	ESPI3	101171	9 kHz∼3 GHz	2016-08-04	1 Year
	BI-LOG ANT	SCHWARZBECK	VULB 9163	691	30 MHz ∼ 1 GHz	2016-05-28	2 Years
	Loop Antenna	EMCO	6502	9801-3191	9 kHz ~ 30 MHz	2016-02-04	2 Years
	Horn antenna	Schwarzbeck	BBHA 9120D	769	1 GHz ~ 18 GHz	2015-11-29	2 Years
	Horn antenna	Schwarzbeck	BBHA 9120D	768	1 GHz ~ 18 GHz	2015-12-11	2 Years
	Horn antenna	Schwarzbeck	BBHA9170	BBHA9170178	18 GHz ~ 40 GHz	2016-02-26	2 Years
	Amplifier	310N	291723	SONOMA	9 kHz ~ 1 GHz	2016-08-04	1 Year
	Microwave Preamplifier	Agilent	8449B	3008A02014	1 GHz ~ 26.5 GHz	2016-02-12	1 Year
	DC Power Supply	Maynuo	M8811	0800109600111030 46	30 V 5 A	2016-08-04	1 Year
	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESR7	101120	10 Hz ~ 7 GHz	2016-08-04	1 Year
	LISN/AMN	PMM	L3-32	1220X20311	32 A - 6 h	2016-08-05	1 Year
	PULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	100059	0 MHz ~ 30 MHz	2016-04-16	1 Year
	Two-Line V-Network	ROHDE & SCHWARZ	ENV216	3560.6550.12- 101874-Rq	9 kHz ~ 30 MHz	2016-08-04	1 Year

Page: 24 of 24