



FCC Test Report (Bluetooth)

FCC ID : 2AGF4JBT-608

Applicant : JIE YANG ZHAOXING PLASTIC HARDWARE PRODUCTS CO.,LTD
ZHAOXING INDUSTRIAL CITY, YU JIAO JIE YANG, CHINA

Sample Description

Product Name : BLUETOOTH SPEAKER LIGHT

Model No. : JBT-608

Serial No. : N/A

Trademark : N/A

Receipt Date : 2015-11-06

Test Date : 2015-11-06 to 2015-11-09

Issue Date : 2015-11-09

Test Standard(s) : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Conclusions : PASSED*

*In the configuration tested, the EUT complied with the standards specified above.

Test/Witness Engineer :

Jason Deng

Approved & Authorized :

Frank Zhang

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



Contents

CONTENTS	2
1. GENERAL INFORMATION	4
1.1. Client Information	4
1.2. General Description of EUT (Equipment Under Test)	4
1.3. Block Diagram Showing The Configuration of System Tested	5
1.4. Description of Support Units	6
1.5. External I/O Cable	6
1.6. Description of Test Mode	6
1.7. Test Instruments List	7
1.8. Laboratory Location	8
2. TEST SUMMARY	9
3. ANTENNA REQUIREMENT	10
3.1. Standard Requirement	10
3.2. Antenna Connected Construction	10
4. CONDUCTED EMISSION TEST	11
4.1. Test Standard and Limit	11
4.2. Test Setup	11
4.3. Test Procedure	11
4.4. Test Data	12
5. CONDUCTED PEAK OUTPUT POWER TEST	15
5.1. Test Standard and Limit	15
5.2. Test Setup	15
5.3. Test Procedure	15
5.4. Test Data	15
6. 20DB OCCUPY BANDWIDTH TEST	22
6.1. Test Standard and Limit	22
6.2. Test Setup	22
6.3. Test Procedure	22
6.4. Test Data	22
7. CARRIER FREQUENCY SEPARATION TEST	29
7.1. Test Standard and Limit	29
7.2. Test Setup	29
7.3. Test Procedure	29
7.4. Test Data	29
8. NUMBER OF HOPPING CHANNEL	33
8.1. Test Standard and Limit	33
8.2. Test Setup	33



ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 3 of 57

8.3. Test Procedure.....	33
8.4. Test Data.....	33
9. DWELL TIME TEST.....	36
9.1. Test Standard and Limit.....	36
9.2. Test Setup.....	36
9.3. Test Procedure.....	36
9.4. Test Data.....	36
10. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	43
10.1. Standard Requirement.....	43
10.2. EUT Pseudorandom Frequency Hopping Sequence.....	43
11. BAND EDGE REQUIREMENT (CONDUCTED EMISSION METHOD).....	44
11.1. Test Standard and Limit.....	44
11.2. Test Setup.....	44
11.3. Test Procedure.....	44
11.4. Test Data.....	44
12. BAND EDGE REQUIREMENT (RADIATED EMISSION METHOD).....	48
12.1. Test Standard and Limit.....	48
12.2. Test Setup.....	48
12.3. Test Procedure.....	48
12.4. Test Data.....	49
13. SPURIOUS EMISSION (RADIATED EMISSION METHOD).....	51
13.1. Test Standard and Limit.....	51
13.2. Test Setup.....	51
13.3. Test Procedure.....	51
13.4. Test Data.....	52



1. General Information

1.1. Client Information

Applicant	:	JIE YANG ZHAOXING PLASTIC HARDWARE PRODUCTS CO.,LTD
Address	:	ZHAOXING INDUSTRIAL CITY, YU JIAO JIE YANG, CHINA
Manufacturer	:	JIE YANG ZHAOXING PLASTIC HARDWARE PRODUCTS CO.,LTD
Address	:	ZHAOXING INDUSTRIAL CITY, YU JIAO JIE YANG, CHINA

1.2. General Description of EUT (Equipment Under Test)

Product Name	:	BLUETOOTH SPEAKER LIGHT	
Models No.	:	JBT-608	
Difference	:	N/A	
Product Description	:	Operation Frequency:	2402MHz~2480MHz
		Transfer Rate:	1/2/3 Mbits/s
		Number of Channel:	79 Channels
		Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
		Modulation Technology:	FHSS
		Antenna Type:	Integral PCB Antenna
		Antenna Gain:	0 dBi
Power Supply	:	USB DC 5V from USB Port, DC 3.7V from Li-ion battery	

Note:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462





ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 5 of 57

07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		
Remark: Channel 0, 39 & 78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.					

1.3. Block Diagram Showing The Configuration of System Tested

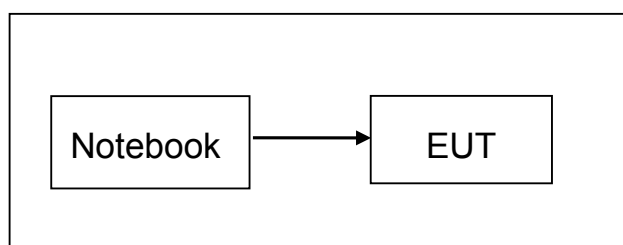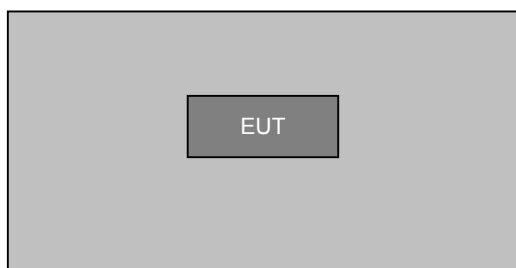



1.4. Description of Support Units

Name	Model	Serial Number	Manufacturer
Notebook	/	/	ASUS

1.5. External I/O Cable

N/A

1.6. Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

Test Mode	Description
Charging & Working mode	Keep the EUT in Charging& working mode
Transmitting mode	Keep the EUT in Transmitting mode with worst case data rate
Remark	GFSK(1Mbps) is the worst case mode

Remark: The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 7 of 57

1.7. Test Instruments List

Item	Test Equipment	Manufacturer	Model No.	Cal. Date	Cal. Due date
1	Bilog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	May 22, 2015	May 21, 2016
2	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	May 27, 2015	May 26, 2016
3	Coaxial Cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
4	Coaxial Cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
5	Coaxial cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
6	Coaxial Cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
7	Coaxial Cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
8	Amplifier (10kHz-1.3GHz)	HP	8447D	Mar. 30, 2015	Mar. 29, 2016
9	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	Jun. 07, 2015	Jun. 06, 2016
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	Mar. 30, 2015	Mar. 29, 2016
11	Horn Antenna	ETS-LINDGREN	3160	Mar. 30, 2015	Mar. 29, 2016
12	Positioning Controller	UC	UC3000	N/A	N/A
13	Spectrum analyzer 9kHz-30GHz	Rohde & Schwarz	FSP	May 27, 2015	May 26, 2016
14	EMI Test Receiver	Rohde & Schwarz	ESPI	Mar. 30, 2015	Mar. 29, 2016
15	Loop antenna	Laplace instrument	RF300	May 23, 2015	May 22, 2016
16	Universal radio communication tester	Rhode & Schwarz	CMU200	May 27, 2015	May 26, 2016
17	Signal Analyzer	Rohde & Schwarz	FSIQ3	May 27, 2015	May 26, 2016
18	L.I.S.N.#1	Rohde & Schwarz	NSLK8126	May 27, 2015	May 26, 2016
19	L.I.S.N.#2	Rohde & Schwarz	ENV216	May 27, 2015	May 26, 2016



ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 8 of 57

1.8. Laboratory Location

Shenzhen TOBY technology Co., Ltd

Address: 1 A/F., Bldg.6, Yusheng Industrial Zone The National Road No.107 Xixiang Section 467,
Xixiang, Bao'an, Shenzhen, Guangdong, 518057, China

At the time of testing, the Laboratory is accredited. It is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562 7.

Tel:0086-755-26509301 Fax: 0086-755-26509195



2. Test Summary

Standard Section	Test Item	Judgment
15.203/15.247(c)	Antenna Requirement	PASSED
15.207	Conducted Emission	PASSED
15.247(b)(1)	Conducted Peak Output Power	PASSED
15.247(a)(1)	20dB Occupied Bandwidth	PASSED
15.247(a)(1)	Carrier Frequencies Separation	PASSED
15.247(a)(1)	Hopping Channel Number	PASSED
15.247(a)(1)	Dwell Time	PASSED
15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pseudorandom Frequency Hopping Sequence	PASSED
15.205/15.209	Spurious Emission	PASSED
15.247(d)	Band Edge	PASSED
Remark: "N/A" is an abbreviation for Not Applicable.		



3. Antenna Requirement

3.1. Standard Requirement

3.1.1 Test standard

FCC Part15 Section 15.203 /247(c)

3.1.2 Requirement

1) 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

2) 15.247(c) (1)(i) requirement:

Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2. Antenna Connected Construction

The bluetooth antenna is an integral antenna which permanently attached, and the best case gain of the antenna is 0dBi. It complies with the standard requirement.



4. Conducted Emission Test

4.1. Test Standard and Limit

4.1.1 Test Standard

FCC Part15 Section 15.207


4.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequencies.

4.2. Test Setup

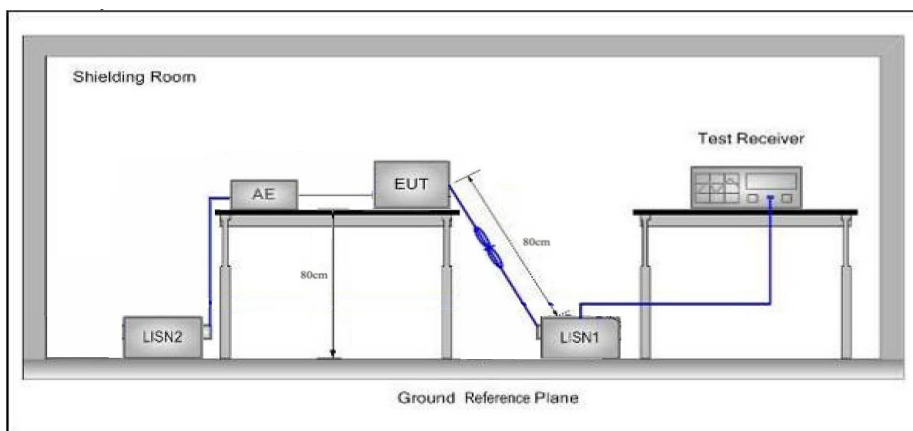

4.3. Test Procedure

- 1) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \Omega / 50 \mu\text{H} + 5 \Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.

The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal



ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

The Test Receiver setup: RBW=9kHz, VBW=30kHz, Sweep time= auto

4.4. Test Data

Please to see the following pages




ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 13 of 57

Conducted Emission Test Data

EUT: BLUETOOTH SPEAKER LIGHT M/N: JBT-608
Operating Condition: Charging & Working mode
Test Site: Shielded room
Operator: Jason
Test Specification: AC120V/60Hz
Polarization: Line
Note Tem:25°C Hum:50%

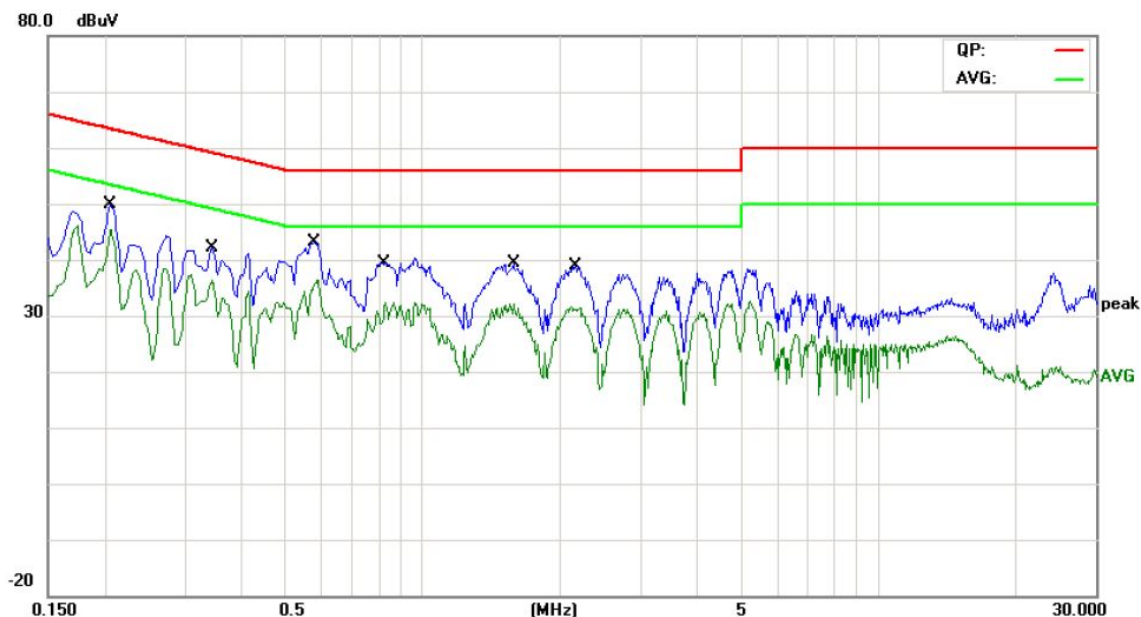

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2060	38.18	10.02	48.20	63.36	-15.16	QP	
2 *	0.2060	35.30	10.02	45.32	53.36	-8.04	AVG	
3	0.3460	30.34	10.02	40.36	59.06	-18.70	QP	
4	0.3460	25.97	10.02	35.99	49.06	-13.07	AVG	
5	0.5780	32.33	10.06	42.39	56.00	-13.61	QP	
6	0.5780	25.33	10.06	35.39	46.00	-10.61	AVG	
7	0.8260	27.61	10.09	37.70	56.00	-18.30	QP	
8	0.8260	21.40	10.09	31.49	46.00	-14.51	AVG	
9	1.5820	26.72	10.06	36.78	56.00	-19.22	QP	
10	1.5820	21.77	10.06	31.83	46.00	-14.17	AVG	
11	2.1619	25.70	10.05	35.75	56.00	-20.25	QP	
12	2.1619	21.05	10.05	31.10	46.00	-14.90	AVG	




ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 14 of 57

Conducted Emission Test Data

EUT: BLUETOOTH SPEAKER LIGHT M/N: JBT-608
Operating Condition: Charging & Working mode
Test Site: Shielded room
Operator: Jason
Test Specification: AC 120V/60Hz
Polarization: Neutral
Note Tem:25°C Hum:50%

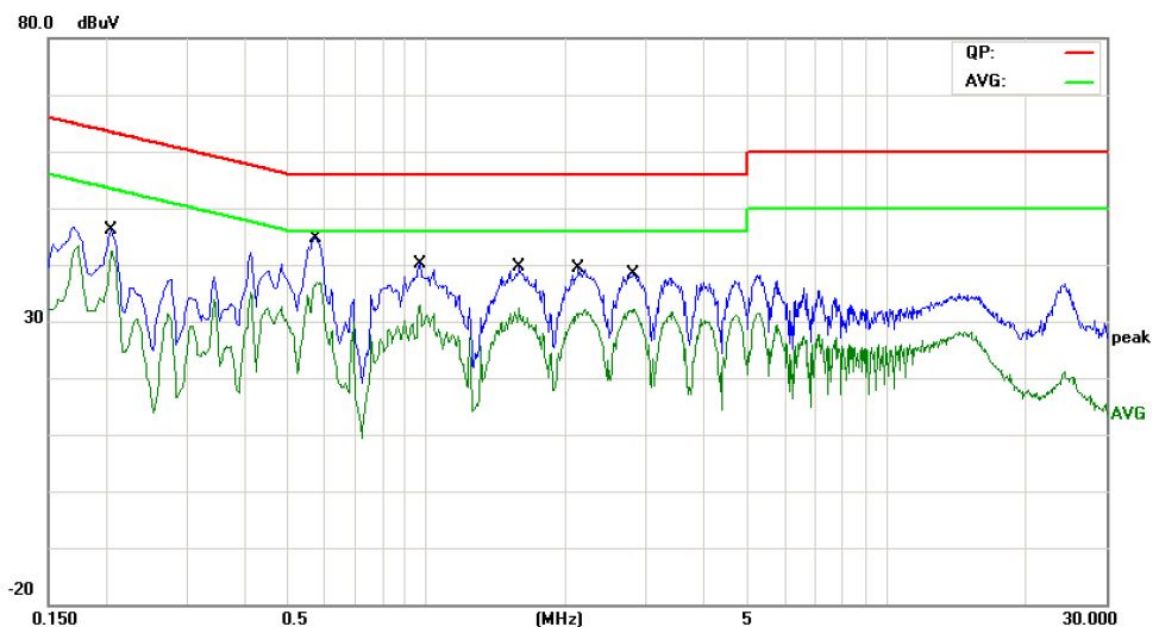

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2060	34.65	10.02	44.67	63.36	-18.69	QP	
2		0.2060	32.38	10.02	42.40	53.36	-10.96	AVG	
3		0.5740	33.71	10.06	43.77	56.00	-12.23	QP	
4	*	0.5740	26.63	10.06	36.69	46.00	-9.31	AVG	
5		0.9660	28.19	10.07	38.26	56.00	-17.74	QP	
6		0.9660	22.71	10.07	32.78	46.00	-13.22	AVG	
7		1.5859	27.43	10.06	37.49	56.00	-18.51	QP	
8		1.5859	22.30	10.06	32.36	46.00	-13.64	AVG	
9		2.1340	25.65	10.06	35.71	56.00	-20.29	QP	
10		2.1340	20.82	10.06	30.88	46.00	-15.12	AVG	
11		2.8179	24.33	10.03	34.36	56.00	-21.64	QP	
12		2.8179	21.23	10.03	31.26	46.00	-14.74	AVG	



5. Conducted Peak Output Power Test

5.1. Test Standard and Limit


5.1.1 Test Standard

FCC Part15 C Section 15.247 (b)(3)

5.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

5.2. Test Setup



5.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW $\leq$ 1 MHz)
RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz)
- (3) The EUT was set to continuously transmitting in the max power during the test.

5.4. Test Data

Please to see the following pages.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 16 of 57

GFSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	0.355	21	PASSED
CH 39	2441	3.395	21	PASSED
CH 78	2480	4.463	21	PASSED
$\pi/4$ -DQPSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	-1.330	21	PASSED
CH 39	2441	2.035	21	PASSED
CH 78	2480	3.088	21	PASSED
8DPSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	-1.199	21	PASSED
CH 39	2441	2.137	21	PASSED
CH 78	2480	3.171	21	PASSED
Remark: Test plot as follows				



ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 17 of 57







ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 18 of 57

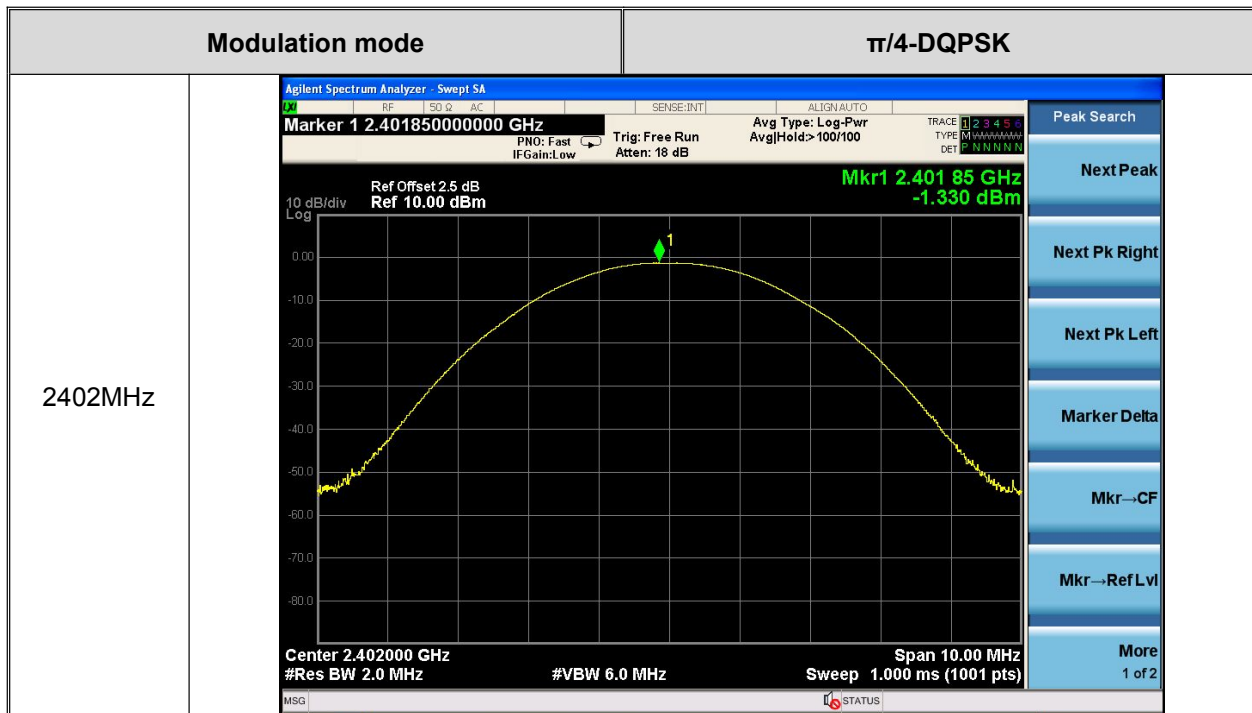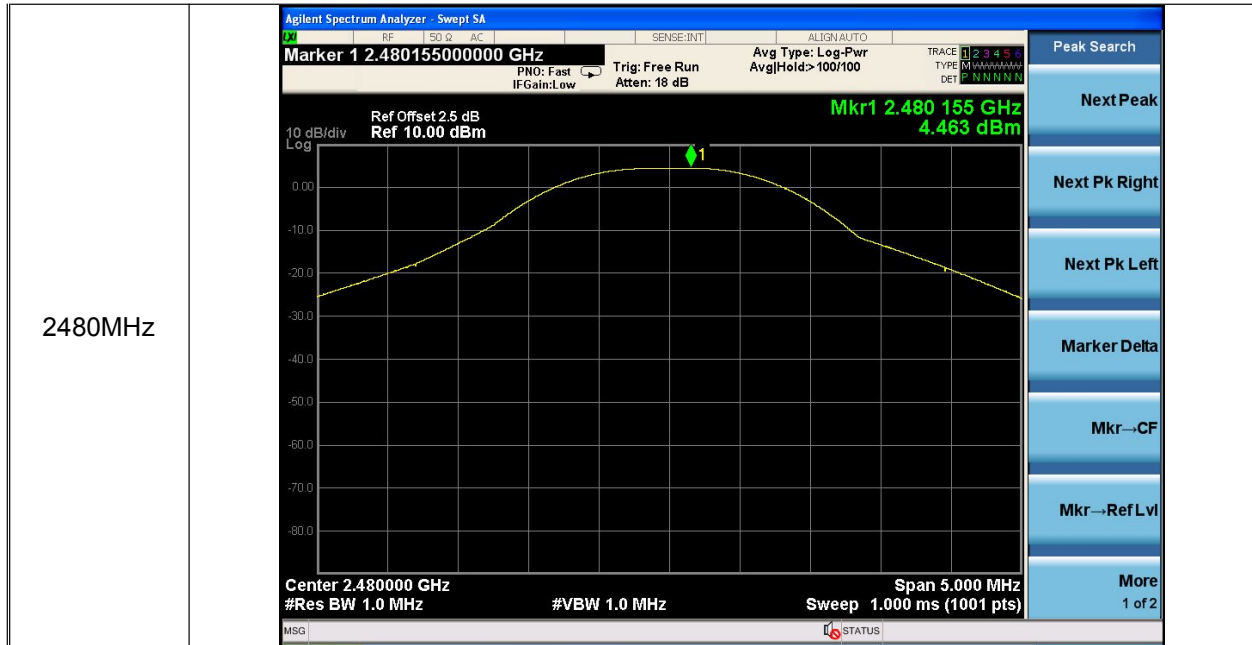




ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 19 of 57

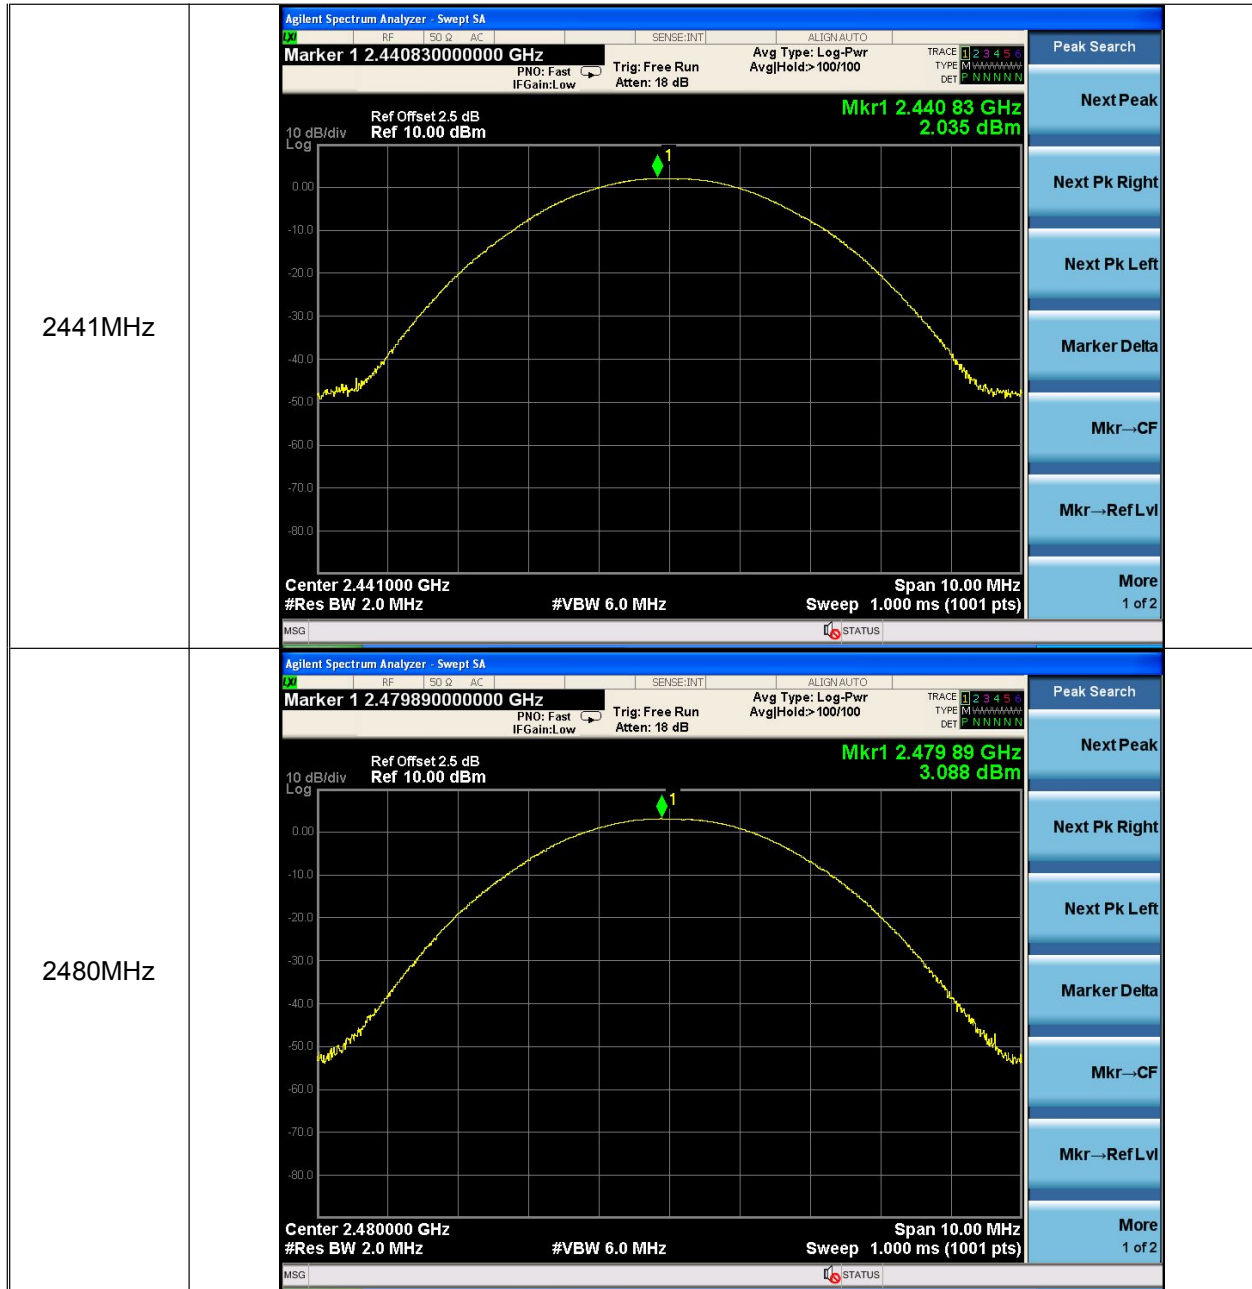




ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 20 of 57

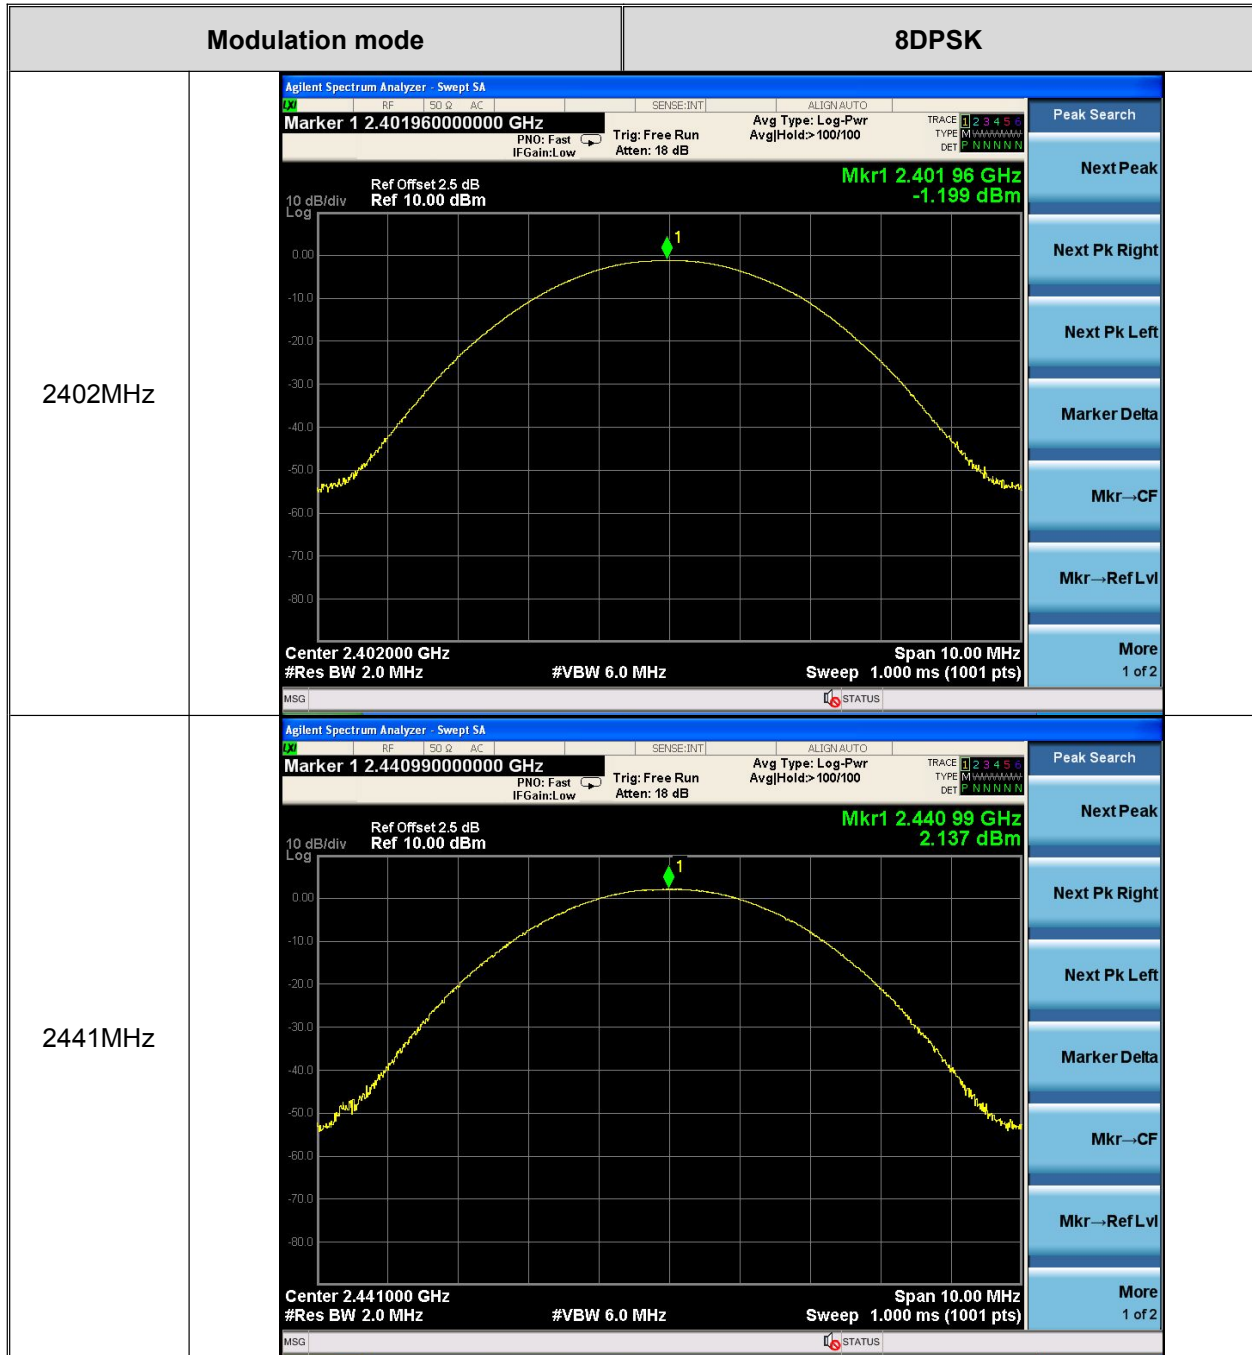




ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 21 of 57

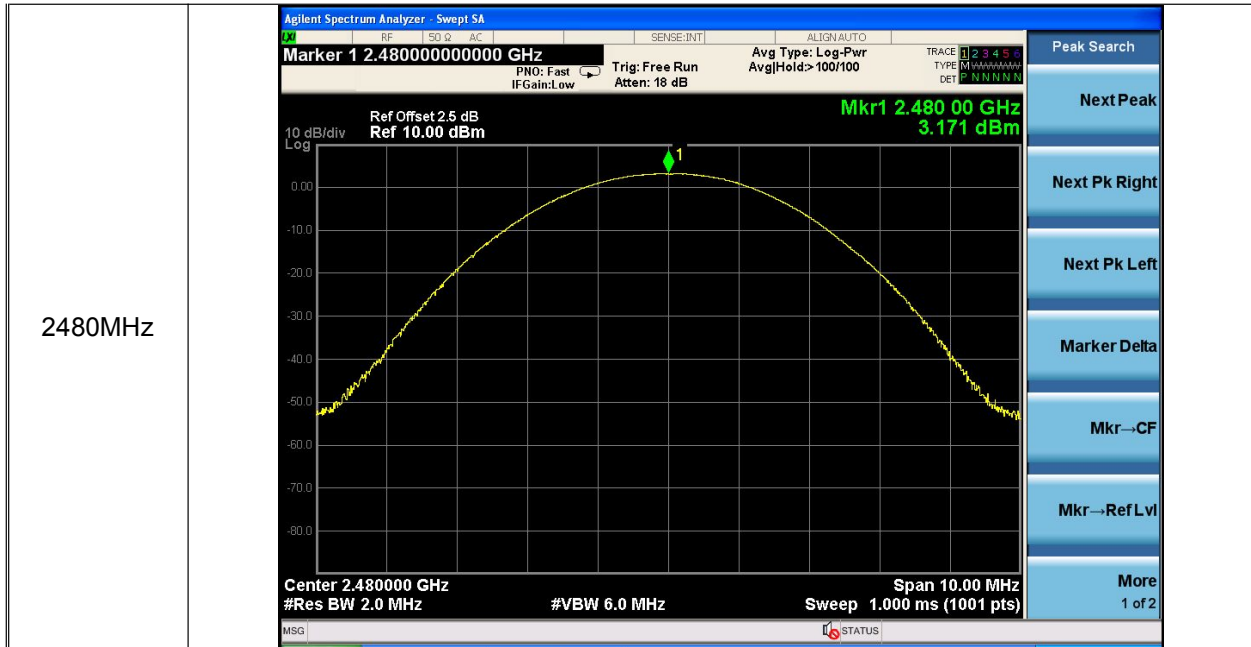



6. 20dB Occupy Bandwidth Test

6.1. Test Standard and Limit


6.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

6.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	20dB bandwidth	2400~2483.5

6.2. Test Setup



6.3. Test Procedure

(1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

(2) Spectrum Setting:

Bandwidth: RBW=30 kHz, VBW=100 kHz, detector= Peak

6.4. Test Data

Channel Number	Channel Frequency	20dB Bandwidth (kHz)		
		GFSK	$\pi/4$ -DQPSK	8DPSK
CH 00	2402(MHz)	876.2	1227	1213
CH 39	2441(MHz)	870.1	1244	1215
CH 78	2480(MHz)	917.5	1240	1215
Remark: Test plot as follows				



ATA Testing Technology Service Co., Ltd.

Report No.: ATA151109002F

Page: 24 of 57

