FCC Test Report

Report No.: AGC05362151001FE03

FCC ID : 2AGGKSTANDSENSOR

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Stunt Stand Sensor

BRAND NAME : N/A

MODEL NAME : Stunt Stand Sensor

CLIENT : YEHL&JORDAN LLC

DATE OF ISSUE : Nov.18,2015

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 52

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov.18,2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	g
7. ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	11
8.1TEST LIMIT	11
8.2. MEASUREMENT PROCEDURE	
8.3. TEST SETUP	
8.4. TEST RESULT	16
9. BAND EDGE EMISSION	29
9.1. MEASUREMENT PROCEDURE	29
9.2 TEST SETUP	29
9.3 RADIATED TEST RESULT	30
10 20DB BANDWIDTH	34
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SET-UP	
10.3. LIMITS AND MEASUREMENT RESULTS	34
11. FCC LINE CONDUCTED EMISSION TEST	37

Page 4 of 52

	PPENDIX B: PHOTOGRAPHS OF EUT	42
Α	PPENDIX A: PHOTOGRAPHS OF TEST SETUP	41
	11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	39
	11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	38
	11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	38
	11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	37
	11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	37

Page 5 of 52

1. VERIFICATION OF CONFORMITY

YEHL&JORDAN LLC
114 PAIGE BEND HUTTO,TEXAS 78634
Huizhou besjoy hi-tech Co.ltd.
Room314,Building B,NO.16,Huifeng East 2nd Road,ZhongKai Hi-tech Developme-nt Zone,Huizhou Guangdong P.R.C
Stunt Stand Sensor
N/A
Stunt Stand Sensor
Nov. 07,2015 to Nov.10,2015
None
Normal
AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested By	Time thing-			
	Time Huang(Huang Nanhui)	Nov.18,2015		
Reviewed By	Formers cei			
	Forrest Lei(Lei Yonggang)	Nov.18,2015		
Approved By	Solya shong			
•	Solger Zhang(Zhang Hongyi) Authorized Officer	Nov.18,2015		

Report No.: AGC05362151001FE03 Page 6 of 52

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

rimajor toomitour disease priori er 20 r to decombed de tenering		
Operation Frequency	2.402 GHz to 2.480GHz	
RF Output Power	1.96dBm(Max)	
Bluetooth Version	V4.1	
Modulation	GFSK	
Number of channels	40	
Hardware Version	T1	
Software Version	1.0	
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)	
Antenna Gain	1.6dBi	
Power Supply	DC 3.7V by battery	
Note: The LIOD and anharmed for absorbing and analytic conditation of a data with DO		

Note: The USB port only used for charging and can't be used to transfer data with PC.

The EUT supports BLE function.

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402MHZ
	1	2404MHZ
	:	:
2400 2402 5ML17	19	2440 MHZ
2400~2483.5MHZ	20	2442 MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

Report No.: AGC05362151001FE03 Page 7 of 52

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 % \circ

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel GFSK	
2	Middle channel GFSK	
3	High channel GFSK	
4	BT Link with charging	


- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.

Page 8 of 52

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Stunt Stand Sensor	N/A	Stunt Stand Sensor	EUT
2	Control box	N/A	N/A	A.E
3	PC	SONY	E1412AYCW	A.E
4	USB Cable	N/A	0.4m, unshielded	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWITH	Compliant

Report No.: AGC05362151001FE03 Page 9 of 52

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.	
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

	Radiat	ted Emission Tes	st Site		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier SCHWARZBECK		BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)			1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

	Radiat	ted Emission Tes	t Site		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Spectrum Analyzer Agilent		MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	Signal Amplifier SCHWARZBECK		9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	May-Fill		MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016

Report No.: AGC05362151001FE03 Page 10 of 52

	Conducted Emission Test Site										
Name of Equipment	Manufacturer	Model Number	Last Calibration	Due Calibration							
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016						
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016						
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016						
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016						
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016						

Page 11 of 52

8. RADIATED EMISSION

8.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics		
	(millivolts/meter)	(microvolts/meter)		
900-928MHz	50	500		
2400-2483.5MHz	50	500		
5725-5875MHz	50	500		
24.0-24.25GHz	250	2500		

Standard FCC 15.209

Frequency	Distance	Field Strengths Limit				
(MHz)	Meters	μ V/m	dB(μV)/m			
0.009 ~ 0.490	300	2400/F(kHz)				
0.490 ~ 1.705	30	24000/F(kHz)				
1.705 ~ 30	30	30				
30 ~ 88	3	100	40.0			
88 ~ 216	3	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Avera				

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Report No.: AGC05362151001FE03 Page 12 of 52

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC05362151001FE03 Page 13 of 52

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting					
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP					
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP					
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP					
Start ~Stop Frequency	1GHz~26.5GHz					
Start Stop Frequency	1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average					

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Report No.: AGC05362151001FE03 Page 14 of 52

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

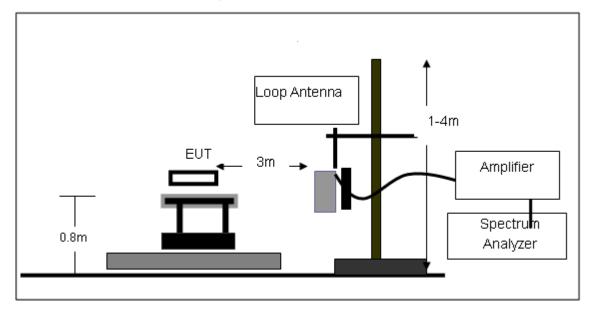

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

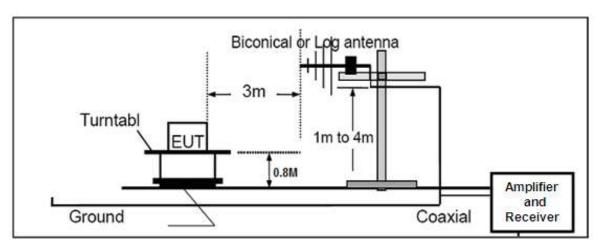

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

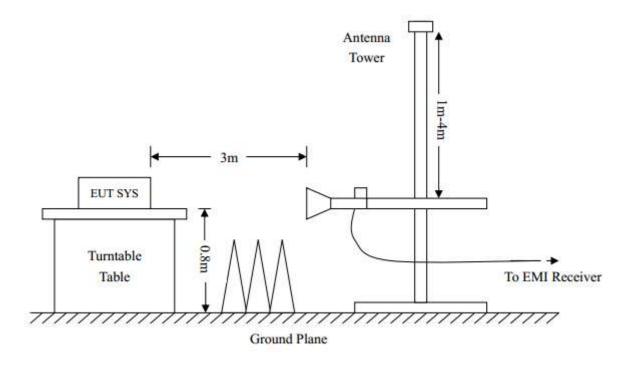

Page 16 of 52

8.4. TEST RESULT


(Worst modulation:GFSK)

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

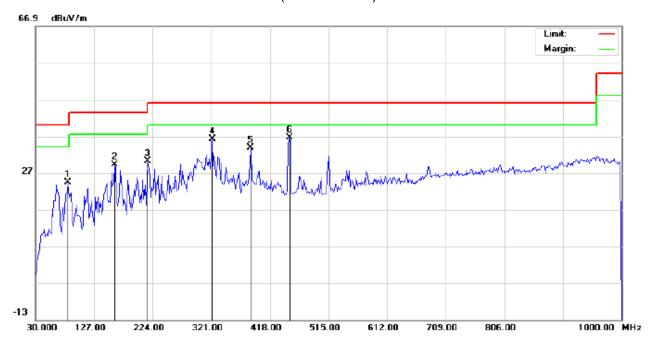

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Stunt Stand Sentor M/N: Stunt Stand Sentor

Mode: Low Channel TX

Note:

	Polarization:	Horizontal	Temperatu	re: 22.7
n	Power:		Humidity:	53.6 %

Distance: 3m


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		83.3500	14.78	9.66	24.44	40.00	-15.56	peak			
2		160.9500	14.05	15.13	29.18	43.50	-14.32	peak			
3		215.9167	17.60	12.60	30.20	43.50	-13.30	peak			
4		322.6167	19.30	16.92	36.22	46.00	-9.78	peak			
5		385.6667	14.85	18.98	33.83	46.00	-12.17	peak			
6	*	450.3333	15.93	20.59	36.52	46.00	-9.48	peak			

Temperature: 22.7

Humidity: 53.6 %

Page 17 of 52

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

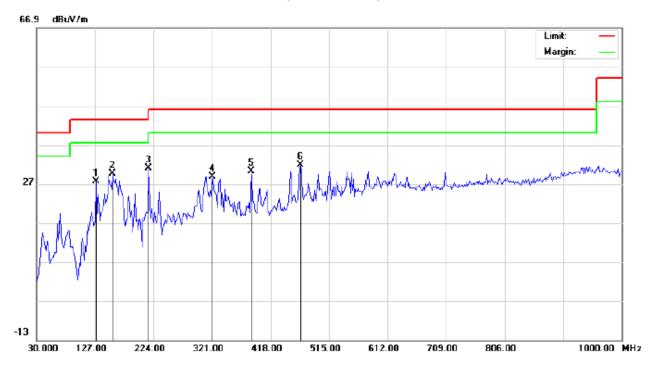

Polarization: Vertical

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Stunt Stand Sentor

M/N: Stunt Stand Sentor Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		128.6167	17.20	10.45	27.65	43.50	-15.85	peak			
2		156.1000	14.35	15.30	29.65	43.50	-13.85	peak			
3	*	215.9167	20.43	10.56	30.99	43.50	-12.51	peak			
4		321.0000	12.04	16.81	28.85	46.00	-17.15	peak			
5		385.6667	11.31	18.98	30.29	46.00	-15.71	peak			
6		468.1167	10.98	20.79	31.77	46.00	-14.23	peak			

Power:

Distance: 3m


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 18 of 52

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

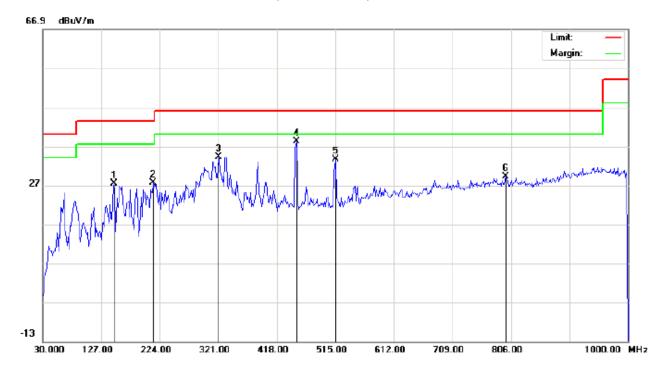

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Stunt Stand Sentor M/N: Stunt Stand Sentor

Mode: Middle Channel TX

Note:

Polarization: Horizontal Temperature: 22.7
Power: Humidity: 53.6 %

Distance: 3m


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		148.0167	12.11	15.25	27.36	43.50	-16.14	peak			
2		212.6833	15.21	12.48	27.69	43.50	-15.81	peak			
3		321.0000	17.49	16.81	34.30	46.00	-11.70	peak			
4	*	450.3333	17.68	20.59	38.27	46.00	-7.73	peak			
5		515.0000	12.02	21.54	33.56	46.00	-12.44	peak			
6		797.9167	1.96	27.29	29.25	46.00	-16.75	peak		·	

Temperature: 22.7

Humidity: 53.6 %

Page 19 of 52

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

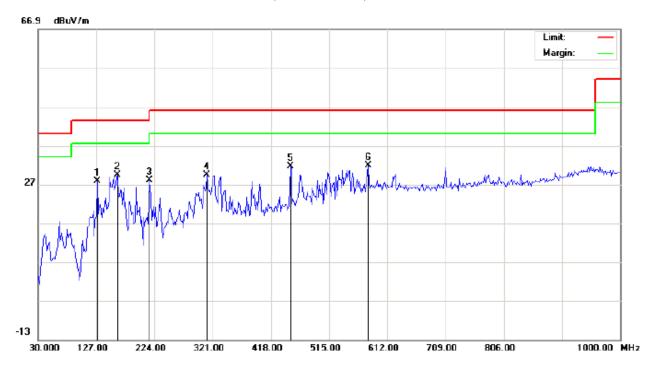

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Stunt Stand Sentor M/N: Stunt Stand Sentor

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		128.6167	17.42	10.45	27.87	43.50	-15.63	peak			
2	*	162.5667	14.25	15.17	29.42	43.50	-14.08	peak			
3		215.9167	17.46	10.56	28.02	43.50	-15.48	peak			
4		311.3000	13.17	16.16	29.33	46.00	-16.67	peak			
5		450.3333	11.06	20.59	31.65	46.00	-14.35	peak			
6		579.6667	9.26	22.63	31.89	46.00	-14.11	peak			

Power:

Distance: 3m

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

Temperature: 22.7

Humidity: 53.6 %

Page 20 of 52

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

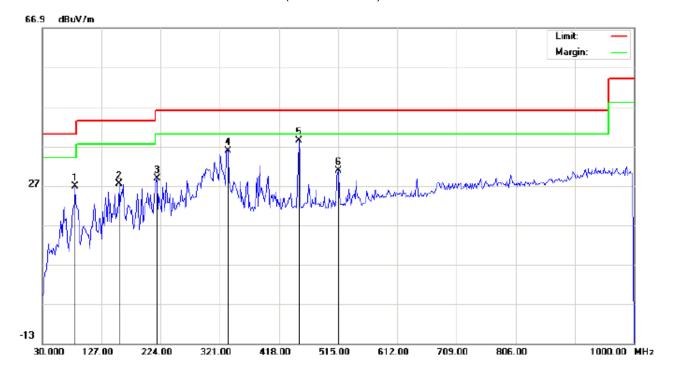

Polarization: Horizontal

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Stunt Stand Sentor

M/N: Stunt Stand Sentor

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		83.3500	17.06	9.66	26.72	40.00	-13.28	peak			
2		156.1000	12.20	15.30	27.50	43.50	-16.00	peak			
3		217.5333	16.20	12.67	28.87	46.00	-17.13	peak			
4		333.9333	18.13	17.67	35.80	46.00	-10.20	peak			
5	*	450.3333	17.82	20.59	38.41	46.00	-7.59	peak			
6		515.0000	9.34	21.54	30.88	46.00	-15.12	peak			

Power:


Distance: 3m

Temperature: 22.7

Humidity: 53.6 %

Page 21 of 52

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

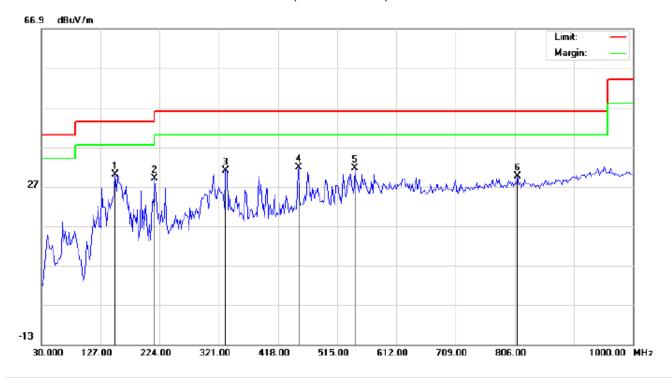

Polarization: Vertical

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Stunt Stand Sentor

M/N: Stunt Stand Sentor Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	151.2500	14.82	15.27	30.09	43.50	-13.41	peak			
2		215.9167	18.53	10.56	29.09	43.50	-14.41	peak			
3		332.3167	13.49	17.56	31.05	46.00	-14.95	peak			
4		451.9500	11.16	20.61	31.77	46.00	-14.23	peak			
5		544.1000	9.19	22.32	31.51	46.00	-14.49	peak			
6		810.8500	2.19	27.32	29.51	46.00	-16.49	peak			

Power:

Distance: 3m

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 22 of 52

RADIATED EMISSION ABOVE 1GHZ

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

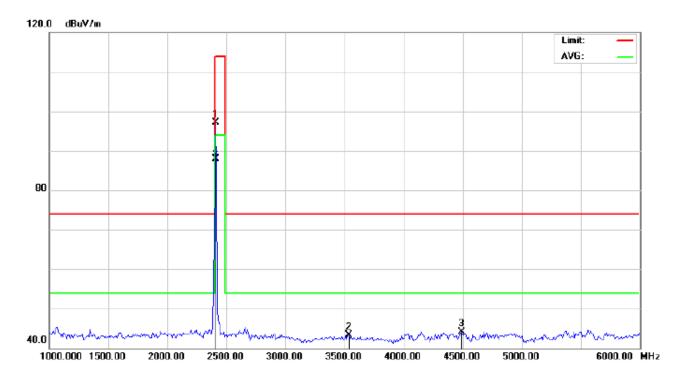

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Stunt Stand Sentor Distance: 3m


M/N: Stunt Stand Sentor Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	106.73	-9.68	97.05	114.00	-16.95	peak			
2		3533.333	51.02	-7.68	43.34	74.00	-30.66	peak			
3		4491.667	47.23	-3.14	44.09	74.00	-29.91	peak			
4	*	2402.000	97.66	-9.68	87.98	94.00	-6.02	AVG	100	107	

Page 23 of 52

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

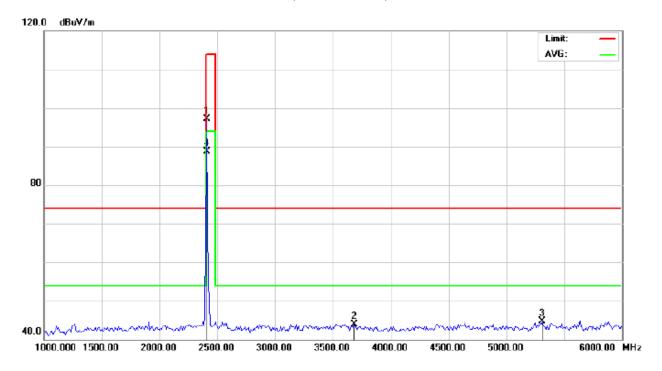

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Stunt Stand Sentor Distance: 3m


M/N: Stunt Stand Sentor Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	106.79	-9.68	97.11	114.00	-16.89	peak			
2		3683.333	50.60	-6.76	43.84	74.00	-30.16	peak			
3		5308.333	46.48	-1.81	44.67	74.00	-29.33	peak			
4	*	2402.000	98.36	-9.68	88.68	94.00	-5.32	AVG	100	276	

Page 24 of 52

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

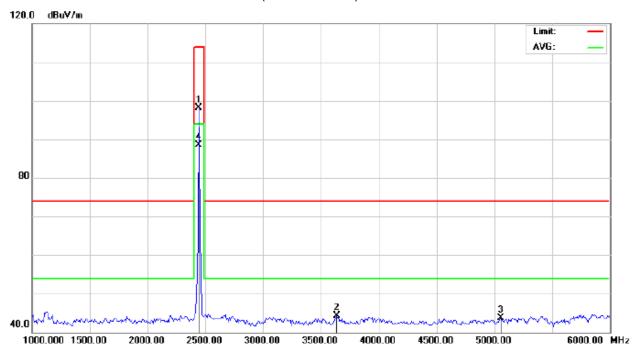

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Stunt Stand Sentor Distance: 3m


M/N: Stunt Stand Sentor Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	107.80	-9.64	98.16	114.00	-15.84	peak			
2		3633.333	51.28	-7.07	44.21	74.00	-29.79	peak			
3		5058.333	45.54	-1.80	43.74	74.00	-30.26	peak			
4	*	2440.000	98.11	-9.64	88.47	94.00	-5.53	AVG	100	277	

Page 25 of 52

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

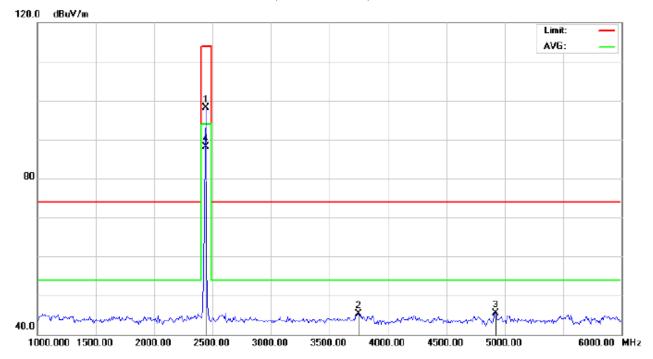

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Stunt Stand Sentor Distance: 3m


M/N: Stunt Stand Sentor Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	107.74	-9.64	98.10	114.00	-15.90	peak			
2		3750.000	51.75	-6.35	45.40	74.00	-28.60	peak			
3		4925.000	47.55	-2.00	45.55	74.00	-28.45	peak			
4	*	2440.000	97.69	-9.64	88.05	94.00	-5.95	AVG	100	113	

Page 26 of 52

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

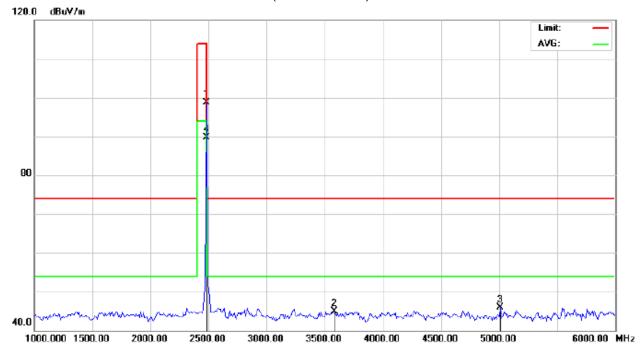

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Stunt Stand Sentor Distance: 3m


M/N: Stunt Stand Sentor Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.32	-9.59	98.73	114.00	-15.27	peak			
2		3583.333	52.35	-7.38	44.97	74.00	-29.03	peak			
3		5008.333	47.64	-1.80	45.84	74.00	-28.16	peak			
4	*	2480.000	99.38	-9.59	89.79	94.00	-4.21	AVG	100	110	

Page 27 of 52

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

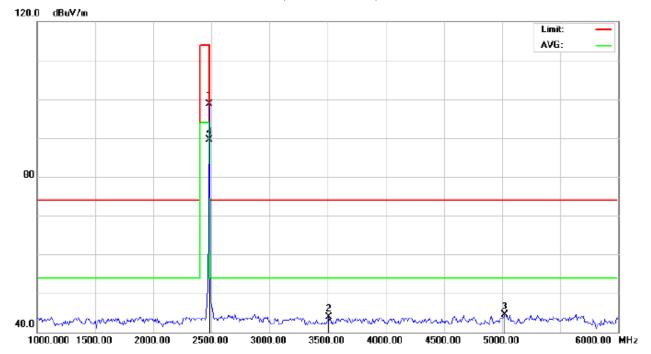

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Stunt Stand Sentor Distance: 3m

M/N: Stunt Stand Sentor Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.37	-9.59	98.78	114.00	-15.22	peak			
2		3508.333	51.82	-7.84	43.98	74.00	-30.02	peak			
3		5025.000	46.33	-1.80	44.53	74.00	-29.47	peak			
4	*	2480.000	99.05	-9.59	89.46	94.00	-4.54	AVG	100	279	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC05362151001FE03 Page 28 of 52

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	106.73	-9.68	97.05	114	-16.95	Horizontal
2402	106.79	-9.68	97.11	114	-16.89	Vertical
2440	107.80	-9.64	98.16	114	-15.84	Horizontal
2440	107.74	-9.64	98.10	114	-15.90	Vertical
2480	108.32	-9.59	98.73	114	-15.27	Horizontal
2480	108.37	-9.59	98.78	114	-15.22	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	97.66	-9.68	87.98	94	-6.02	Horizontal
2402	98.36	-9.68	88.68	94	-5.32	Vertical
2440	98.11	-9.64	88.47	94	-5.53	Horizontal
2440	97.69	-9.64	88.05	94	-5.95	Vertical
2480	99.38	-9.59	89.79	94	-4.21	Horizontal
2480	99.05	-9.59	89.46	94	-4.54	Vertical

Page 29 of 52

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.


3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

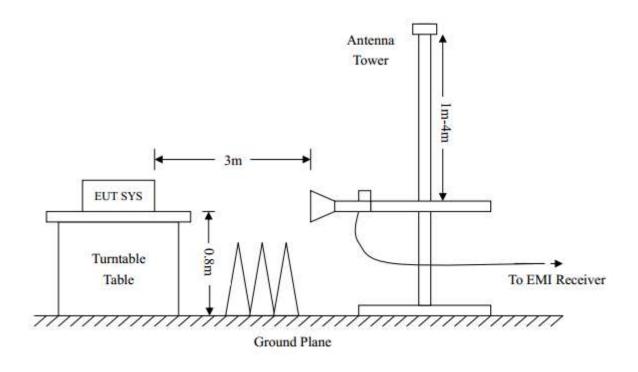

CONDUCTED TEST SETUP




Page 30 of 52

9.3 RADIATED TEST RESULT

(Worst modulation:GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

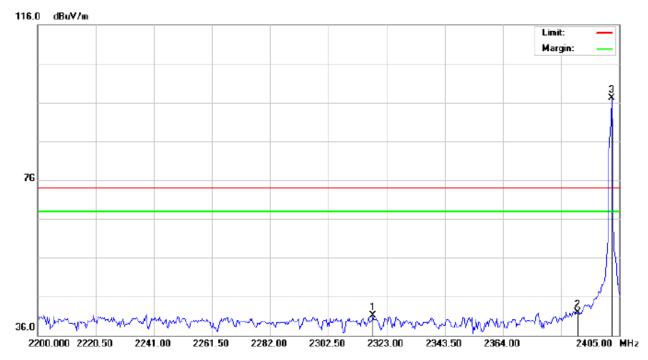

Site: site #1 Polarization: Horizontal Temperature: 26 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Humidity: 60 % Power:

Distance:


EUT: Stunt Stand Sentor M/N: Stunt Stand Sentor

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2318.217	30.85	10.23	41.08	74.00	-32.92	peak			
2		2390.000	31.50	10.31	41.81	74.00	-32.19	peak			
3	*	2402.000	86.72	10.32	97.04	74.00	23.04	peak			

Page 31 of 52

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

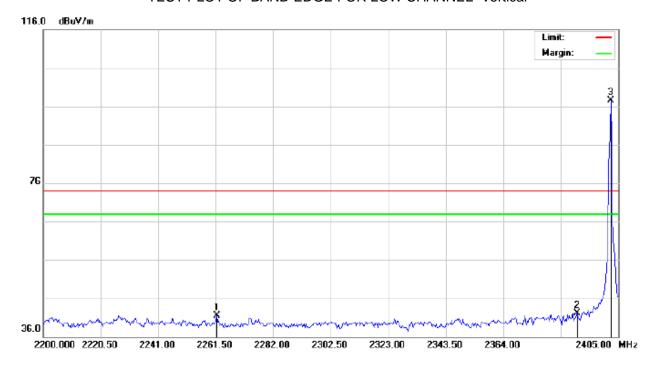

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Stunt Stand Sentor Distance:

M/N: Stunt Stand Sentor Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2261.842	31.30	10.17	41.47	74.00	-32.53	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3	*	2402.000	87.09	10.32	97.41	74.00	23.41	peak			

Page 32 of 52

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

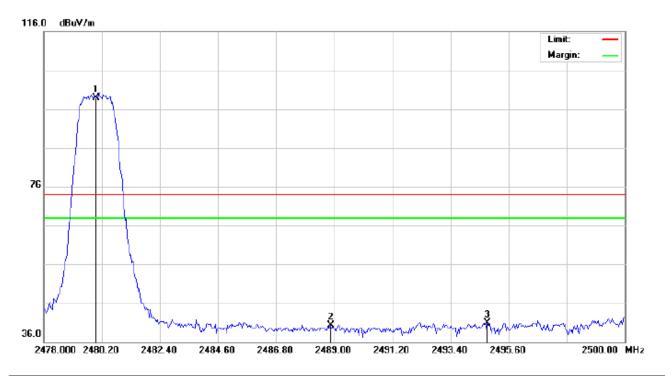

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Stunt Stand Sentor Distance:

M/N: Stunt Stand Sentor Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.55	10.41	98.96	74.00	24.96	peak			
2		2488.853	29.85	10.42	40.27	74.00	-33.73	peak			
3		2494.793	30.51	10.42	40.93	74.00	-33.07	peak			

Page 33 of 52

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical



Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Stunt Stand Sentor Distance:

M/N: Stunt Stand Sentor Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.32	10.41	98.73	74.00	24.73	peak			
2		2483.500	28.76	10.41	39.17	74.00	-34.83	peak			
3		2492.483	30.86	10.42	41.28	74.00	-32.72	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 34 of 52


10 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

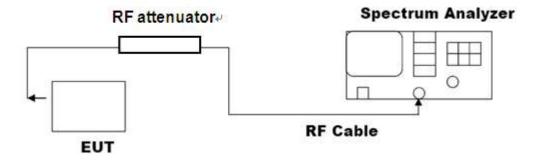


10.3. LIMITS AND MEASUREMENT RESULTS


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL							
Applicable Limite	Measurement Result						
Applicable Limits	Test Da	Criteria					
	Low Channel	1.202	PASS				
N/A	Middle Channel	1.198	PASS				
	High Channel	1.202	PASS				

Page 35 of 52

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

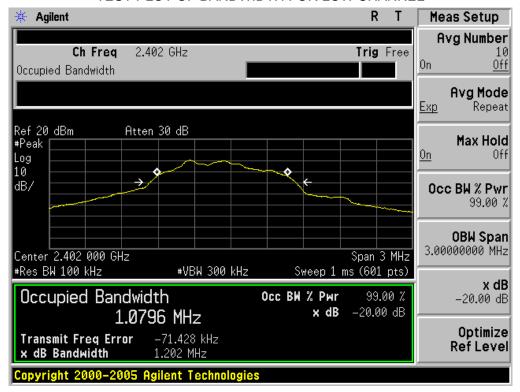


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

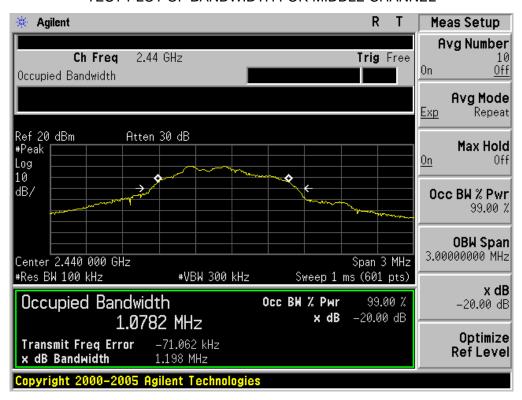

Page 36 of 52

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

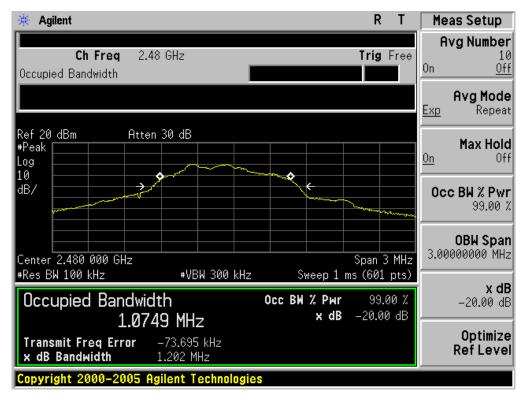

Report No.: AGC05362151001FE03 Page 37 of 52

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage								
Frequency	Q.P.(dBuV)	Average(dBuV)							
150kHz~500kHz	66-56	56-46							
500kHz~5MHz	56	46							
5MHz~30MHz	60	50							

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

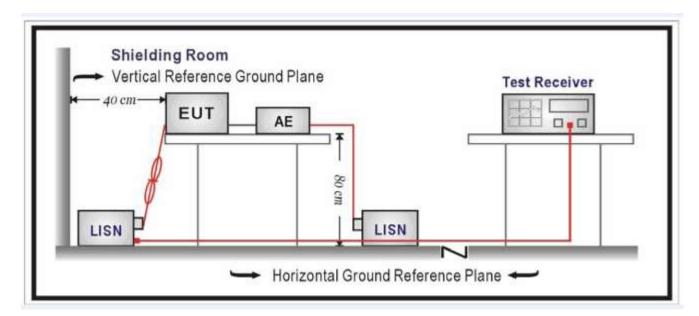

Page 38 of 52

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC which received 120V/60Hzpower by a LISN...
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 56.1 %

Page 39 of 52

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

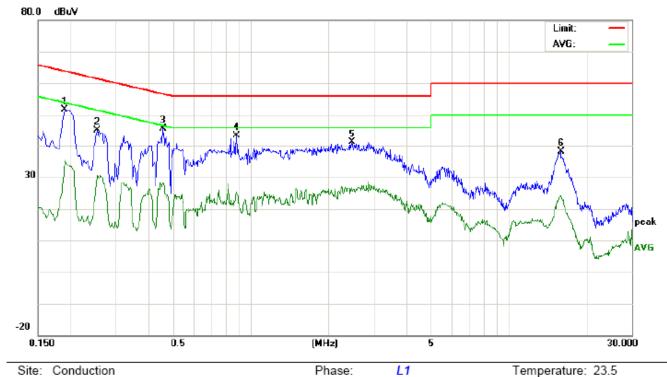

Site: Conduction Limit: FCC Class B Conduction(QP)

EUT: Stunt Stand Sentor M/N: Stunt Stand Sentor Mode: BT Link with charging


Note:

	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1900	41.46		25.05	10.20	51.66		35.25	64.03	54.03	-12.37	-18.78	Р	
2	0.2540	34.77		20.38	10.27	45.04		30.65	61.62	51.62	-16.58	-20.97	Р	
3	0.4580	35.37		17.85	10.37	45.74		28.22	56.73	46.73	-10.99	-18.51	Р	
4	0.8820	33.02		15.00	10.39	43.41		25.39	56.00	46.00	-12.59	-20.61	Р	
5	2.4780	30.80		15.51	10.42	41.22		25.93	56.00	46.00	-14.78	-20.07	Р	
6	15.9460	28.12		14.09	10.11	38.23		24.20	60.00	50.00	-21.77	-25.80	Р	

Power:

Report No.: AGC05362151001FE03 Page 40 of 52

Line Conducted Emission Test Line 2-N

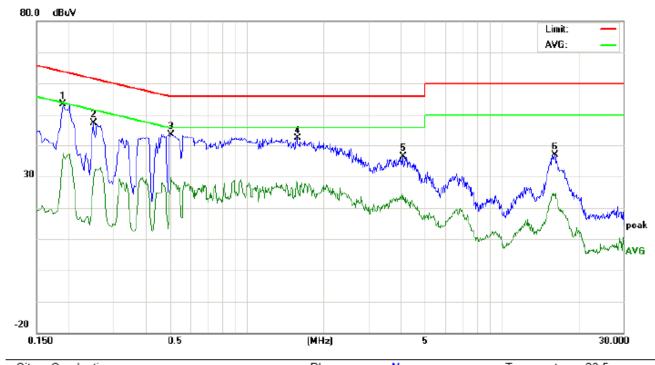

Site: Conduction Phase: N Temperature: 23.5
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.1 %

EUT: Stunt Stand Sentor M/N: Stunt Stand Sentor Mode: BT Link with charging

Note:

No. Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	Q.	AVG	QP	AVG	QP	AVG		
1	0.1900	43.22		27.50	10.20	53.42		37.70	64.03	54.03	-10.61	-16.33	Р	
2	0.2500	37.14		18.44	10.27	47.41		28.71	61.75	51.75	-14.34	-23.04	Р	
3	0.5020	33.27		16.12	10.40	43.67		26.52	56.00	46.00	-12.33	-19.48	Р	
4	1.5780	32.10		17.85	10.36	42.46		28.21	56.00	46.00	-13.54	-17.79	Р	
5	4.1060	26.10		12.22	10.38	36.48		22.60	56.00	46.00	-19.52	-23.40	Р	
6	16.1940	26.79		13.71	10.11	36.90		23.82	60.00	50.00	-23.10	-26.18	Р	


Page 41 of 52


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

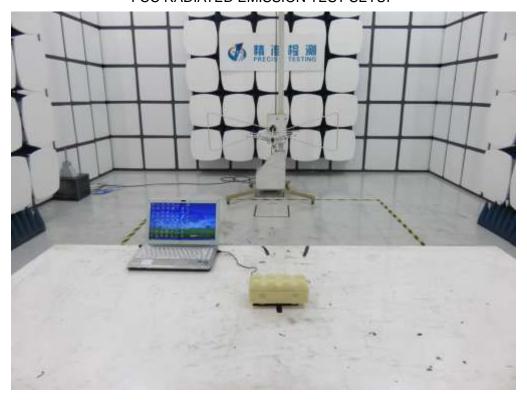


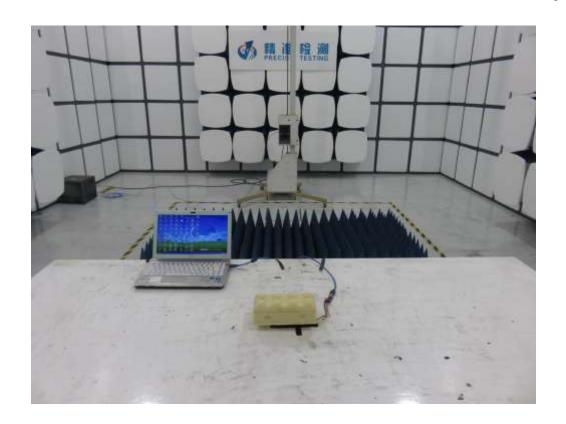


Page 43 of 52

APPENDIX B: PHOTOGRAPHS OF EUT


TOP VIEW OF EUT

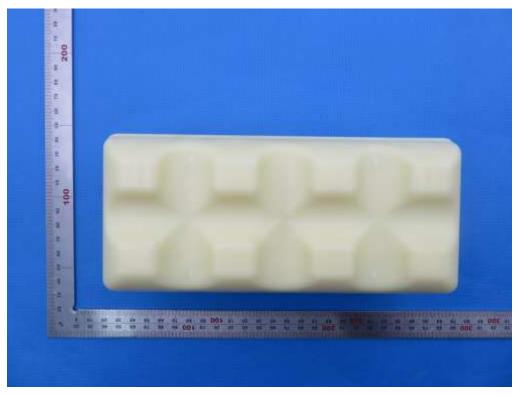


BOTTOM VIEW OF EUT

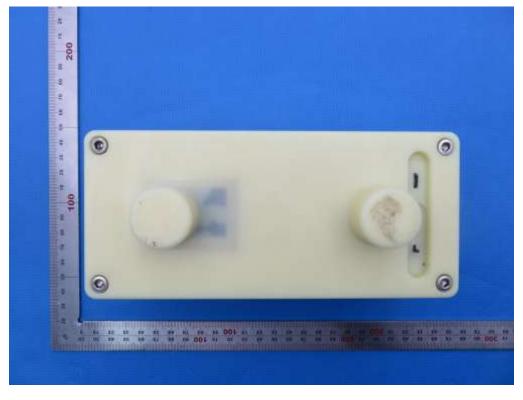


FRONT VIEW OF EUT

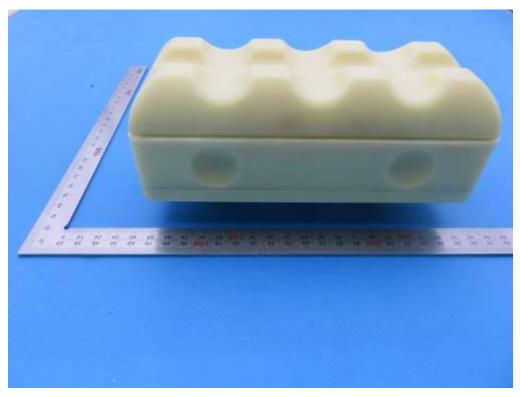


BACK VIEW OF EUT

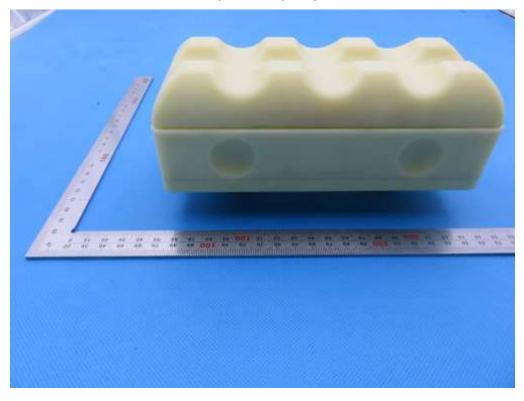


LEFT VIEW OF EUT

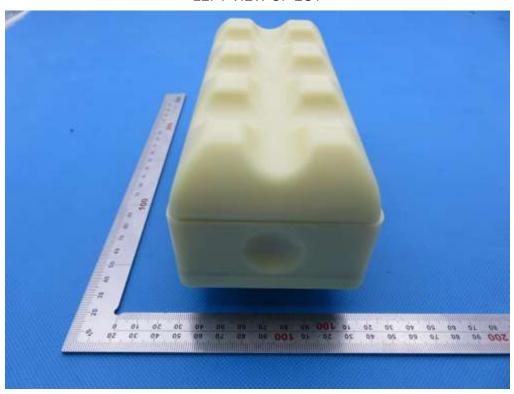


RIGHT VIEW OF EUT

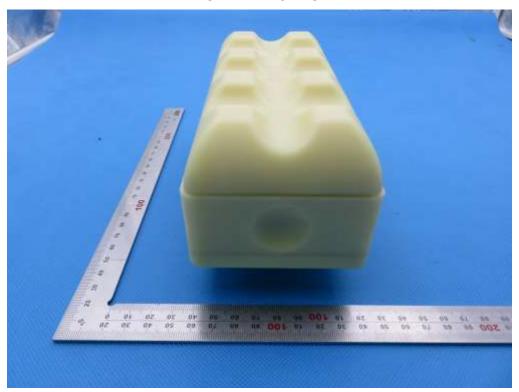


VIEW OF EUT (Port)

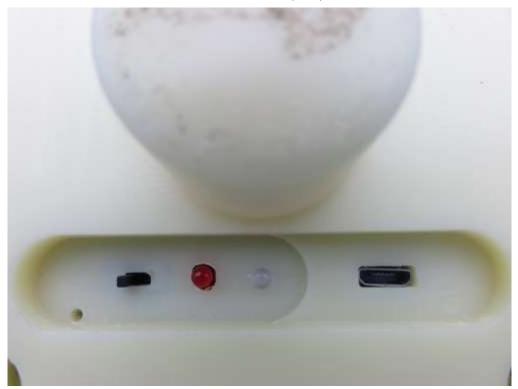


OPEN VIEW OF EUT

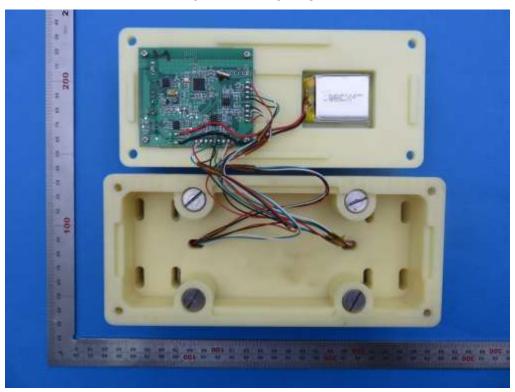


INTERNAL VIEW OF EUT-1

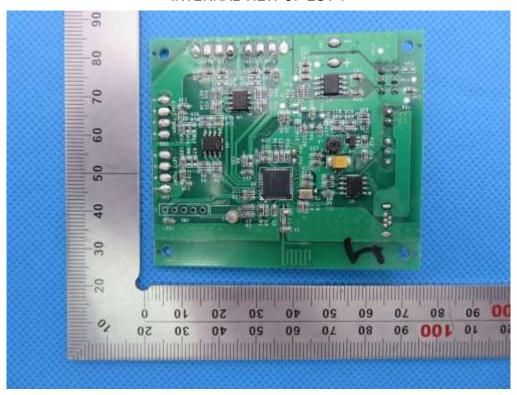

INTERNAL VIEW OF EUT-2

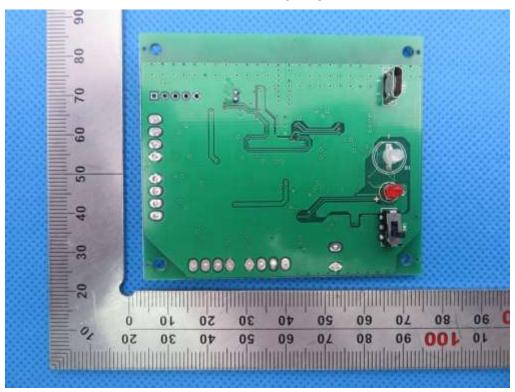

INTERNAL VIEW OF EUT-3

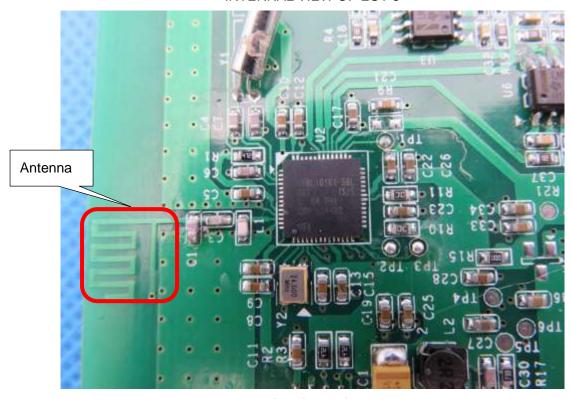

Another color
TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT



VIEW OF EUT (PORT)



OPEN VIEW OF EUT

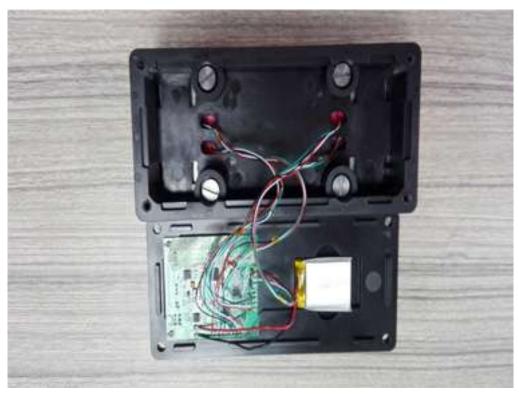

----END OF REPORT----