



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

Dates of Tests: October 16,2015 ~ November 19, 2015
 Test Report S/N: LR500111511D
 Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

2AGHESTARDUST2

APPLICANT

HANAM Artech

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	Wireless lighting controller
Manufacturer	:	HANAM Artech
Model name	:	STARDUST2
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C-63.4-2009
Frequency Range	:	2420 MHz ~ 2470 MHz
Max. Output Power	:	Max 8.39 dBm – Conducted (Port 1) Max 7.88 dBm – Conducted (Port 2) Max 7.94 dBm – Conducted (Port 3) Max 8.29 dBm – Conducted (Port 4)
Data of issue	:	November 20, 2015

This test report is issued under the authority of:

Yong-Cheol, Wang / Manager

The test was supervised by:

Joon-Young, Jeon, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 6 dB BANDWIDTH	-----	6
3.2.2 PEAK OUTPUT POWER	-----	10
3.2.3 POWER SPECTRAL DENSITY	-----	13
3.2.4 BAND EDGE	-----	16
3.2.5 CONDUCTED SPURIOUS EMISSIONS	-----	20
3.2.6 RADIATED SPURIOUS EMISSIONS	-----	24
3.2.7 AC CONDUCTED EMISSIONS	-----	29
APPENDIX	-----	
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	34

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2016-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	610755	2017-04-21	FCC filing
FCC	U.S.A	649054	2017-04-13	FCC CAB
VCCI	JAPAN	R2133(10 m), C2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2016-12-23	VCCI registration
VCCI	JAPAN	G-563	UPDATING	VCCI registration
IC	CANADA	5799A-1	UPDATING	IC filing
KOLAS	KOREA	NO.551	2017-01-08	KOLAS accredited Lab.

2. Information about test item

2-1 Client & Manufacturer

Company name : HANAM Artech
 Address : 184-7, Ojeon-Dong, Uiwang-Si, Gyeonggi-Do, Korea
 Tel / Fax : TEL No : +82-70-4848-4304 / FAX No : +82-70-4009-1187

2-2 Equipment Under Test (EUT)

Trade name : HANAM Artech
 Model name : STARDUST2
 Serial number : Identical prototype
 Date of receipt : October 16, 2015
 EUT condition : Pre-production, not damaged
 Antenna type : Array antenna (M/N:ZIGBEE ARRAY ANTENNA) Max Gain 8 dBi
 Frequency Range : 2420 MHz ~ 2470 MHz
 RF output power : Max 8.39 dBm – Conducted (Port 1)
 : Max 7.88 dBm – Conducted (Port 2)
 : Max 7.94 dBm – Conducted (Port 3)
 : Max 8.29 dBm – Conducted (Port 4)
 Number of channels : 4
 Type of Modulation : O-QPSK
 Power Source : 5.0 Vdc by battery
 Firmware Version : V1.0.0

2-3 Tested frequency

Port 1	LOW	MID	HIGH
Frequency (MHz)	2420	-	-
Port 2	LOW	MID	HIGH
Frequency (MHz)	2440	-	-
Port 3	LOW	MID	HIGH
Frequency (MHz)	2450	-	-
Port 4	LOW	MID	HIGH
Frequency (MHz)	2470	-	-

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Transmitter Peak Output Power	< 1 Watt		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm @ 3kHz		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	Emissions	Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

→ Antenna Requirement

The HANAM Artech FCC ID: 2AGHESTARDUST2 unit complies with the requirement of §15.203.
The antenna type is Array Antenna

The sample was tested according to the following specification:

*FCC Parts 15.247; ANSI C-63.4-2009

*FCC KDB Publication No. 558074 v03r02

*FCC TCB Workshop 2012, April

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz Span = 5 MHz

VBW = 100 kHz (VBW \geq RBW) Sweep = auto

Trace = max hold Detector function = peak

Measurement Data (Port 1) : Complies

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2420	1.58	Complies

Measurement Data (Port 2) : Complies

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2440	1.60	Complies

Measurement Data (Port 3) : Complies

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2450	1.59	Complies

Measurement Data (Port 4) : Complies

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2470	1.61	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth > 500 kHz

Measurement Setup



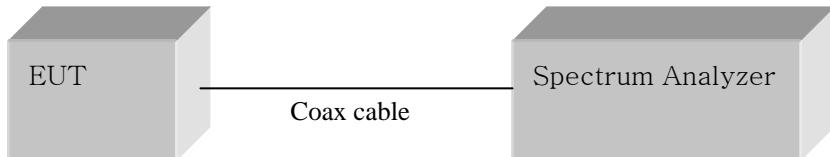


Figure 1: Measurement setup for the carrier frequency separation


Port 1 Channel

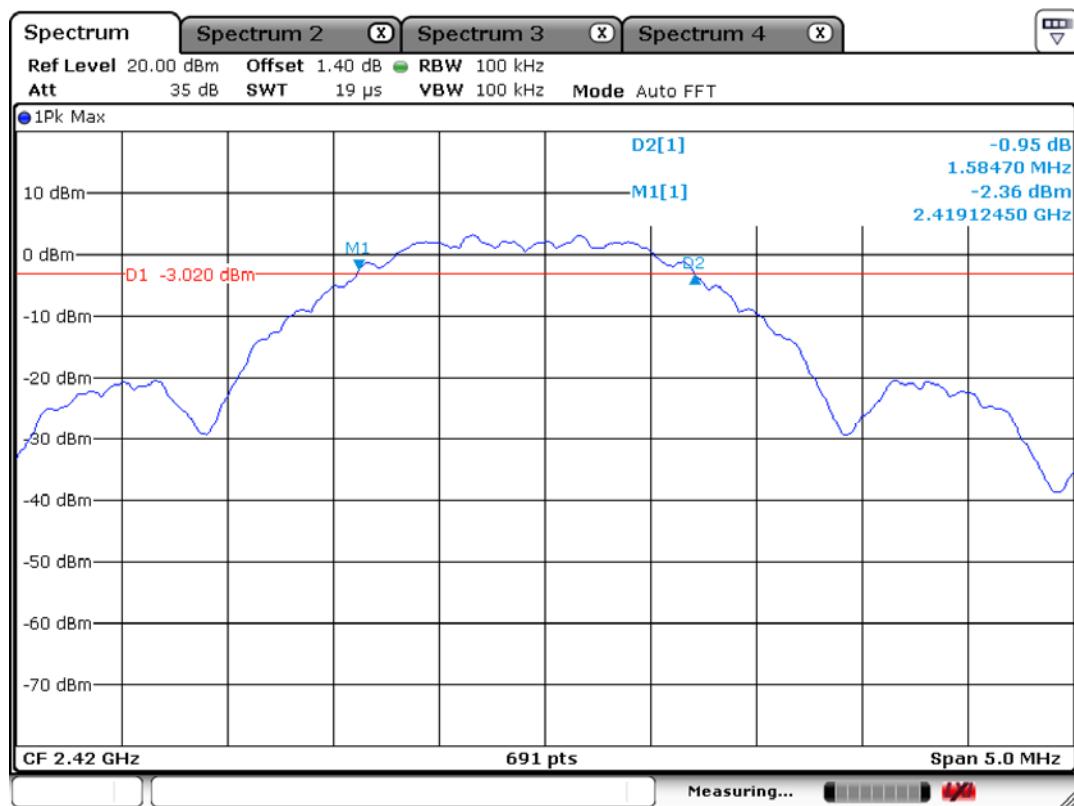


Port 2 Channel

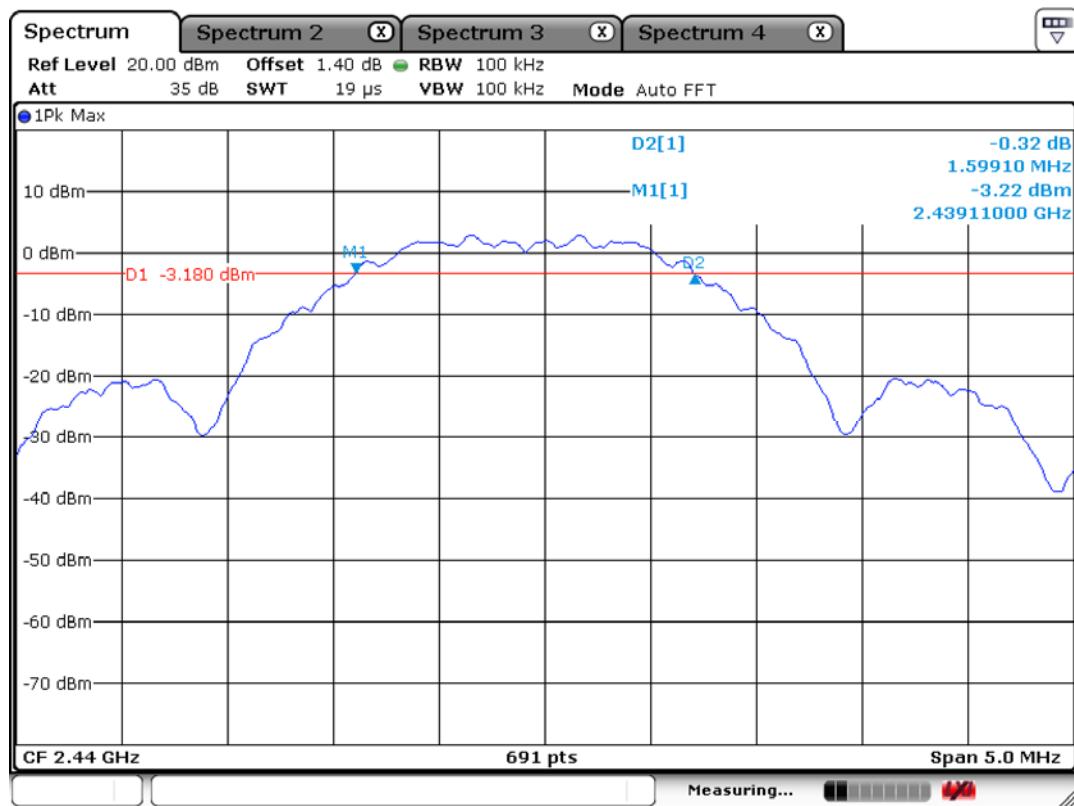

Port 3 Channel

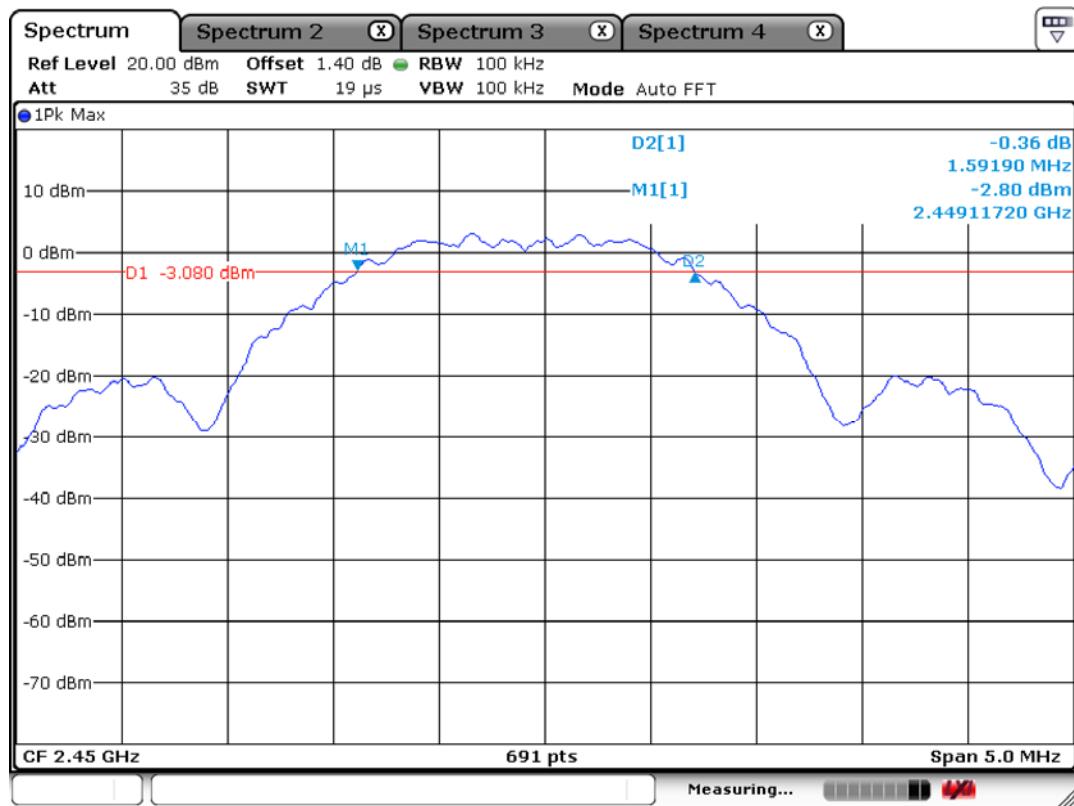

Port 4 Channel

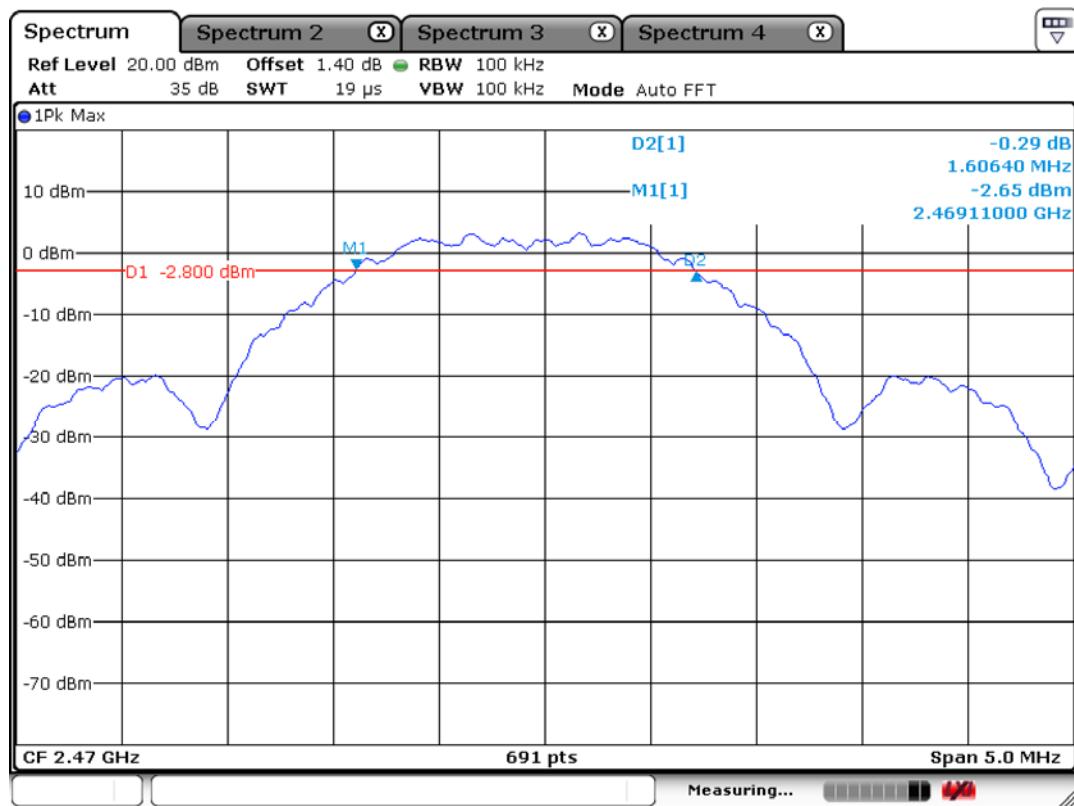

3.2.2 Peak Output Power Measurement

Procedure:

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1MHz Span = auto

VBW = 1MHz (VBW \geq RBW) Sweep = auto

Detector function = peak

Measurement Data (Port 1) : Complies

Frequency (MHz)	Test Results		
	dBm	mW	Result
2420	8.39	6.90	Complies

Measurement Data (Port 2) : Complies

Frequency (MHz)	Test Results		
	dBm	mW	Result
2440	7.88	6.14	Complies

Measurement Data (Port 3) : Complies

Frequency (MHz)	Test Results		
	dBm	mW	Result
2450	7.94	6.22	Complies

Measurement Data (Port 4) : Complies

Frequency (MHz)	Test Results		
	dBm	mW	Result
2470	8.29	6.75	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Peak output power	< 28 dBm = 0.63 W
-------------------	-------------------

- Transmit antenna with an effective directional gain greater than 6 dBi are used, then the conducted output power from the EUT shall be reduced. ($P_{out} = P_{limit} - (G_{tx} - 6)$) $[30 - (8-6)] = 28$ dBm


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Port 1 Channel

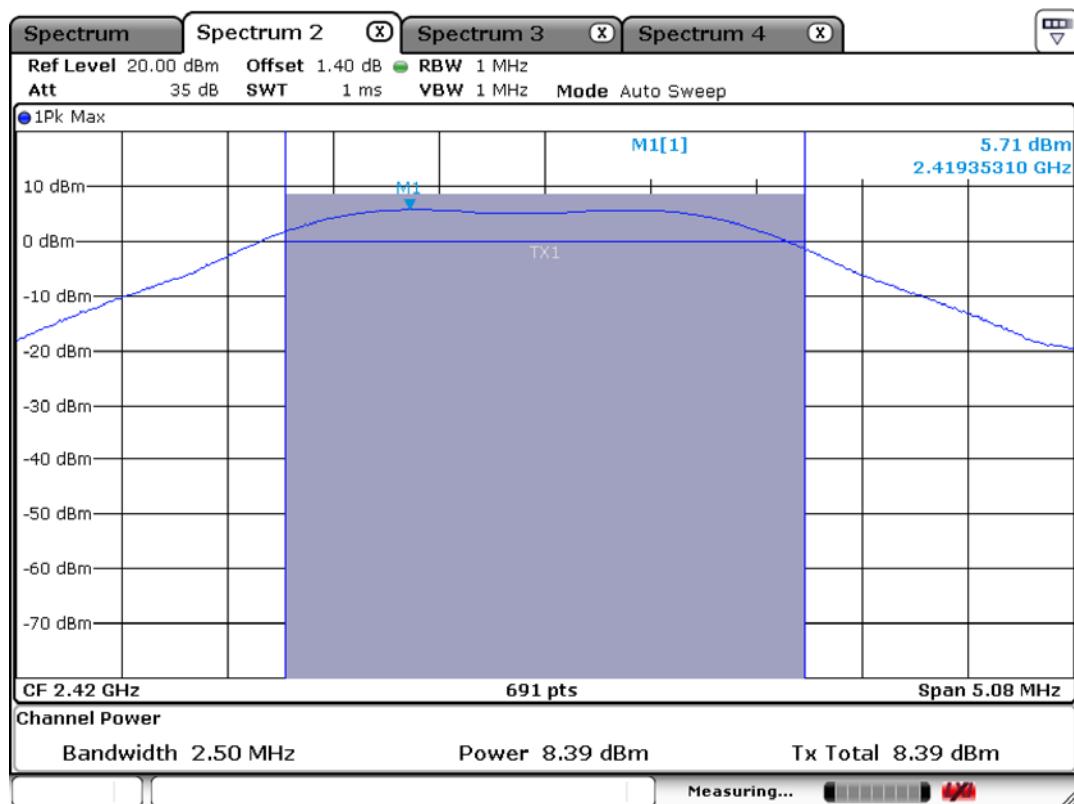


Port 2 Channel

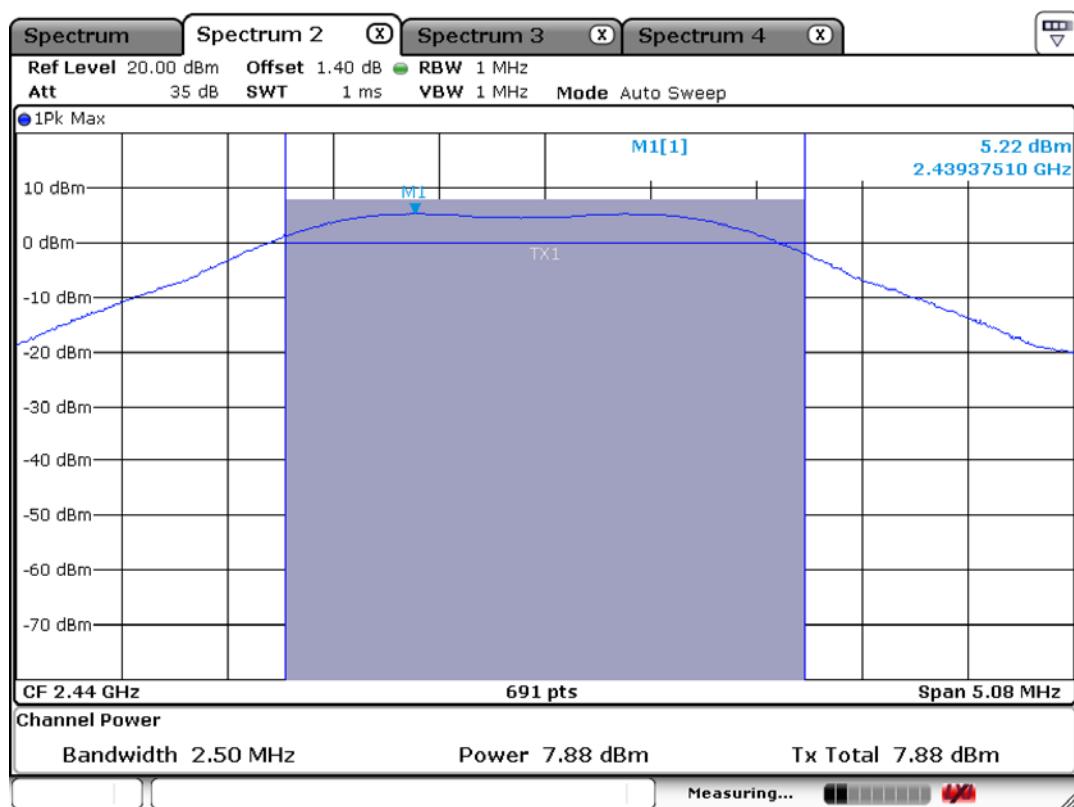

Port 3 Channel

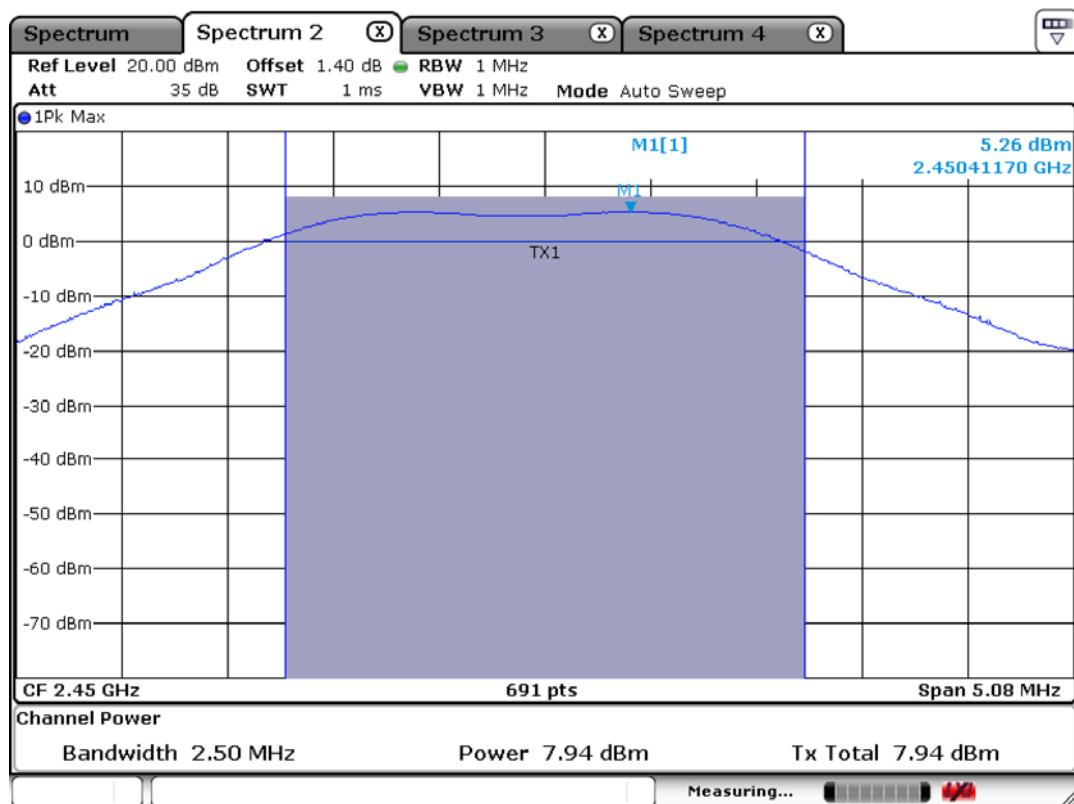

Port 4 Channel

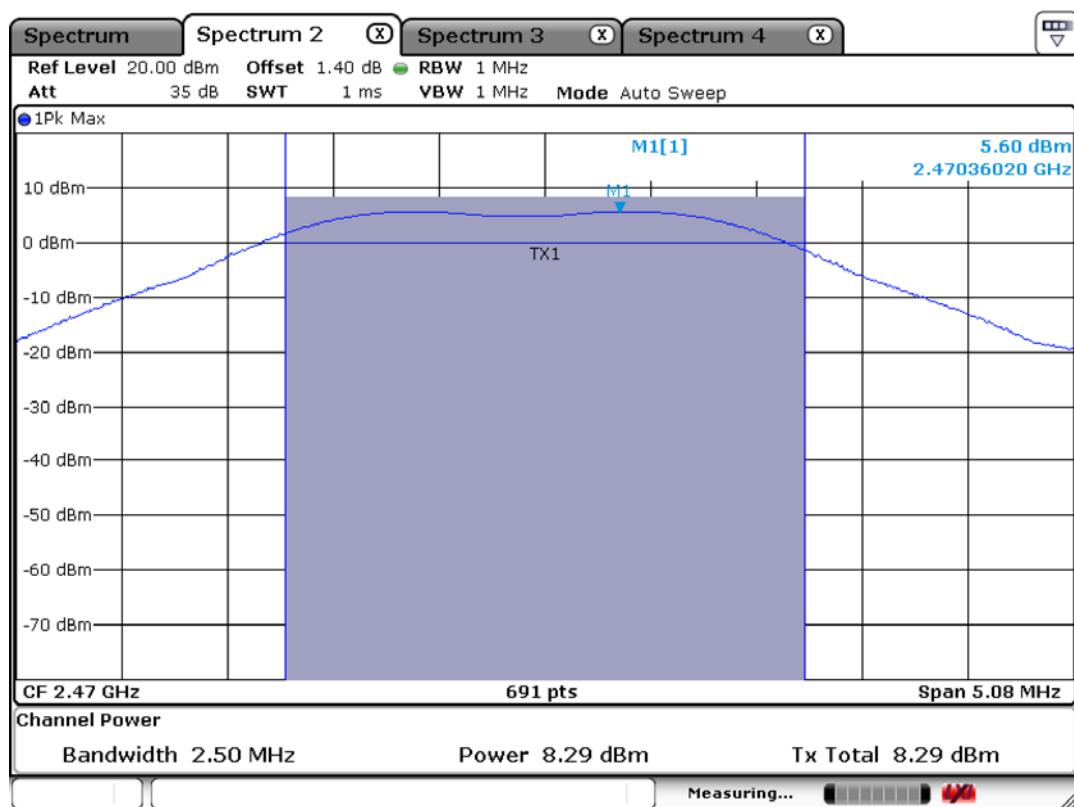

3.2.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz	Span = 300 kHz
VBW = 3 kHz	Sweep = auto
Detector function = peak	Trace = max hold

Measurement Data (Port 1) : Complies

Frequency (MHz)	Test Results	
	dBm	Result
2420	-9.11	Complies

Measurement Data (Port 2) : Complies

Frequency (MHz)	Test Results	
	dBm	Result
2440	-9.12	Complies

Measurement Data (Port 3) : Complies

Frequency (MHz)	Test Results	
	dBm	Result
2450	-9.84	Complies

Measurement Data (Port 4) : Complies

Frequency (MHz)	Test Results	
	dBm	Result
2470	-8.31	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Power Spectral Density	< 8 dBm @ 3 kHz BW
------------------------	--------------------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Power Density Measurement


Port 1 Channel

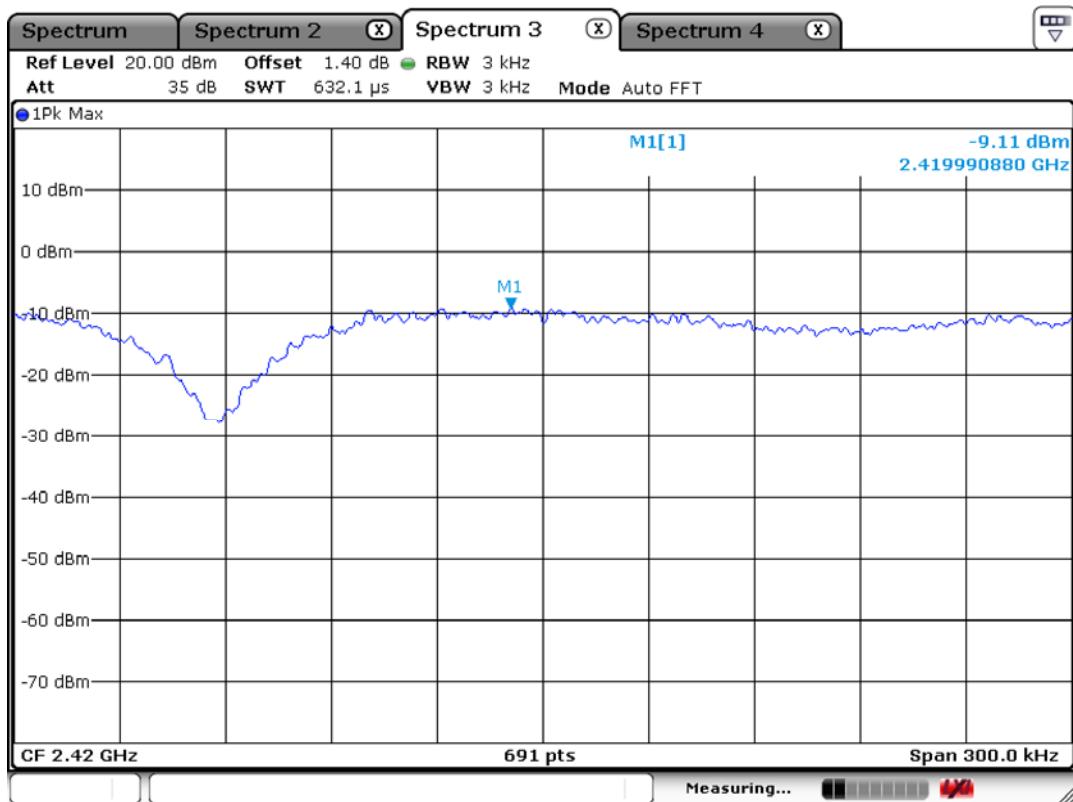


Port 2 Channel

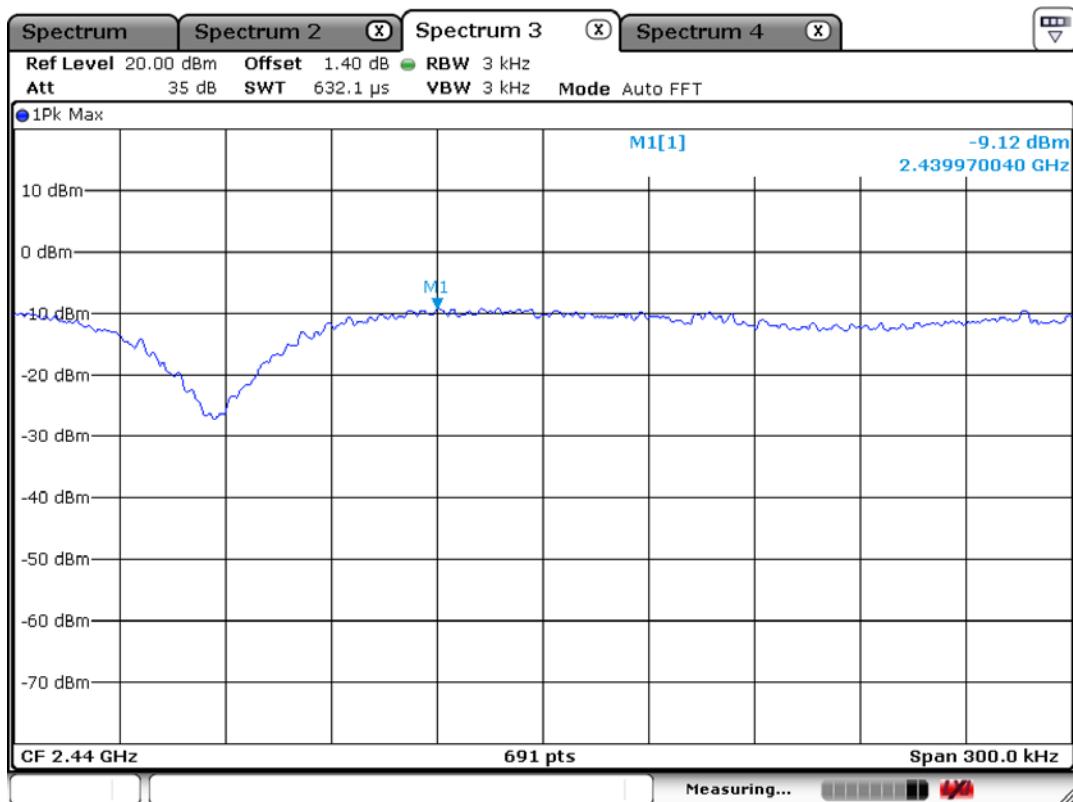

Port 3 Channel

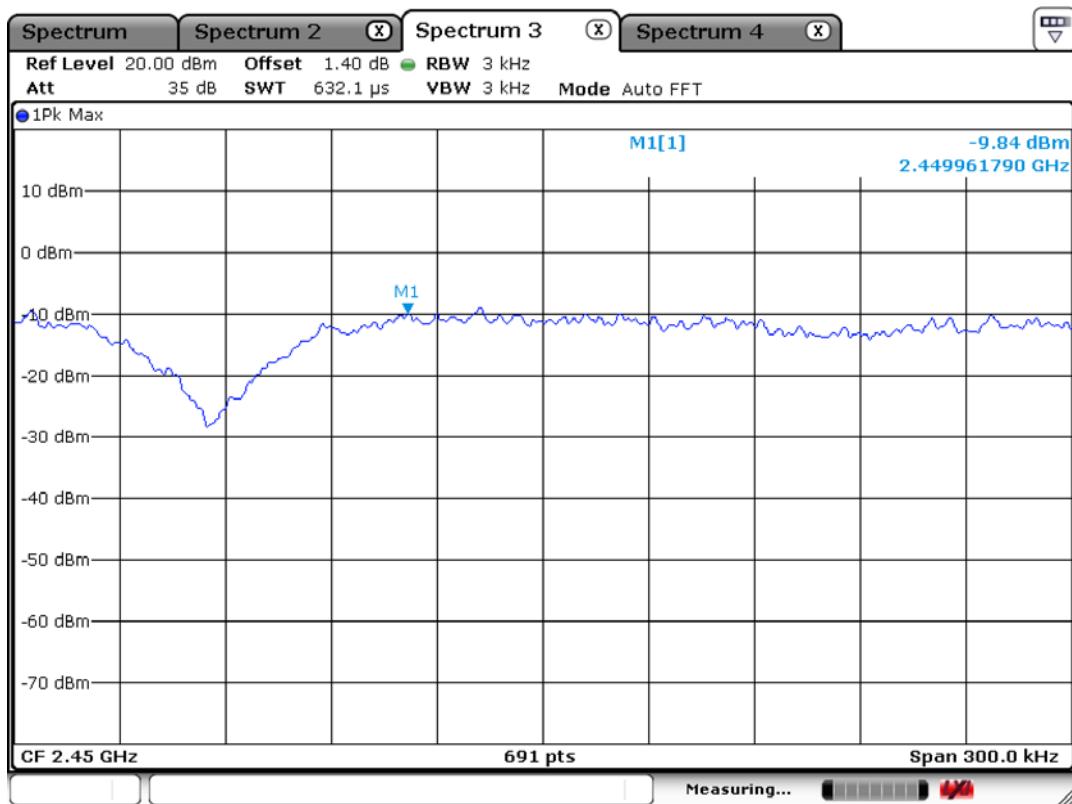

Port 4 Channel

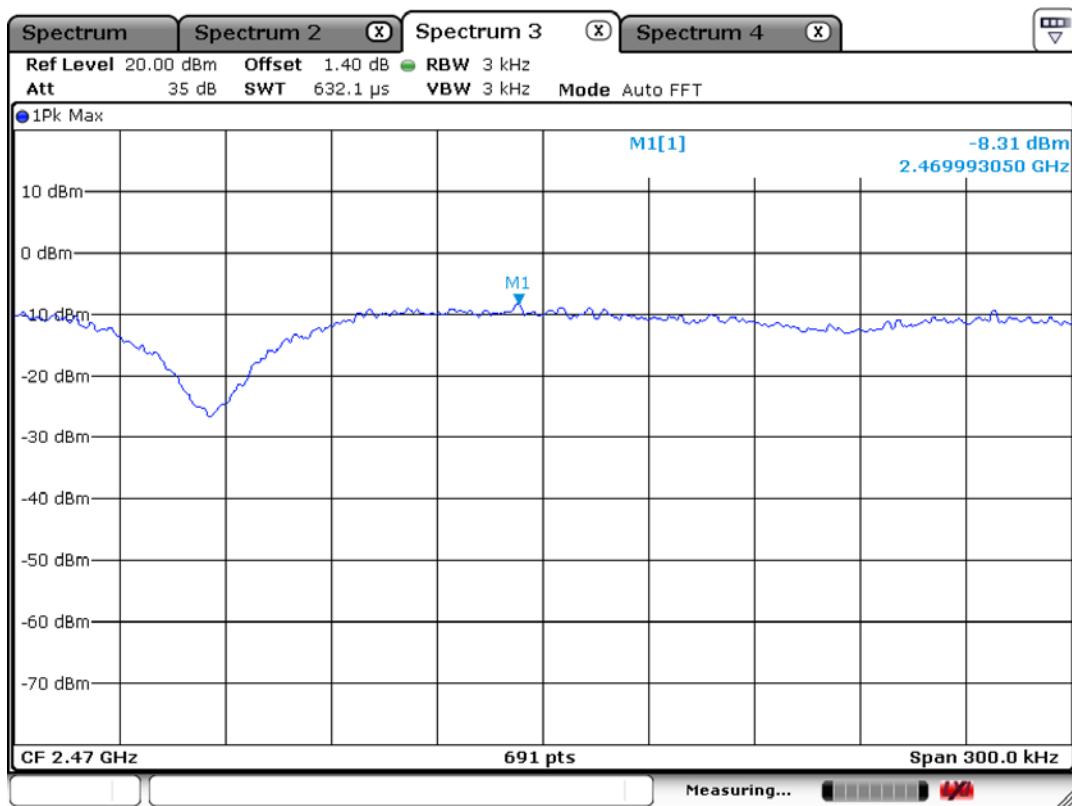

3.2.4 Band - edge

Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 40 MHz / 80 MHz Detector function = peak

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK: RBW = VBW = 1 MHz. Sweep = Auto

Average: RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto

Measurement Distance: 3 m


Polarization: Horizontal / Vertical

Measurement Data: Complies


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
 - See next pages for actual measured spectrum plots.



Minimum Standard:	> 20 dBc
--------------------------	----------

Band edge
Lower edge

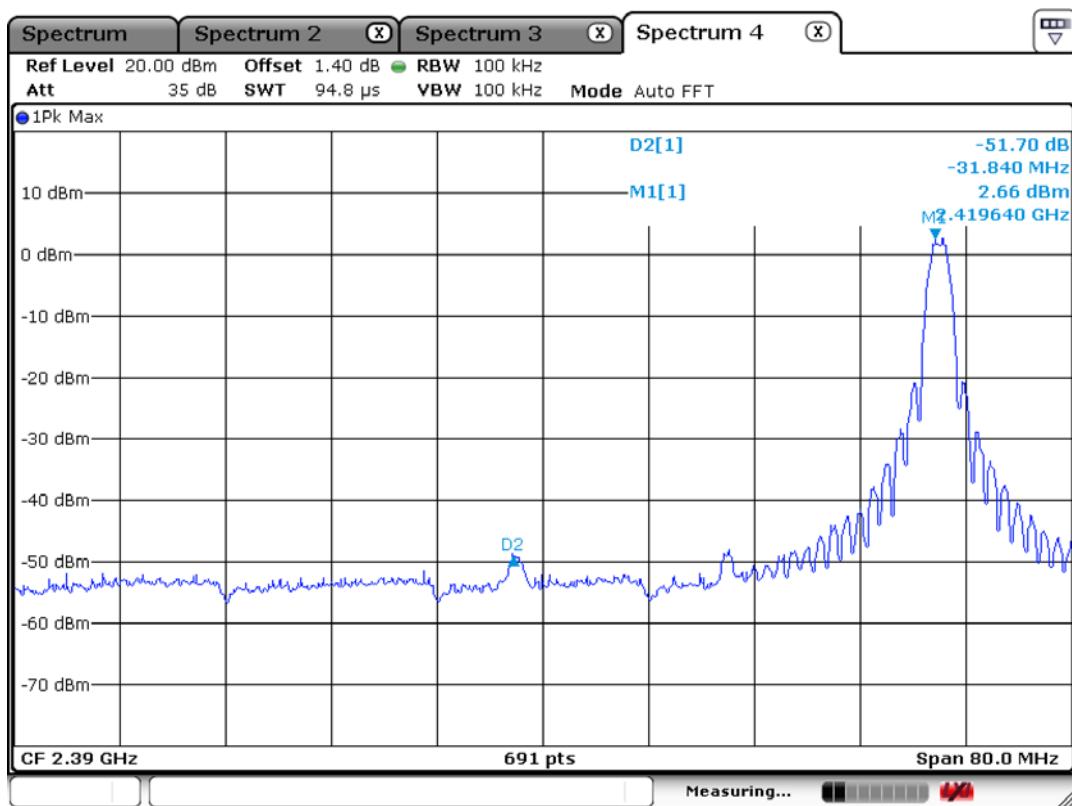

Upper edge

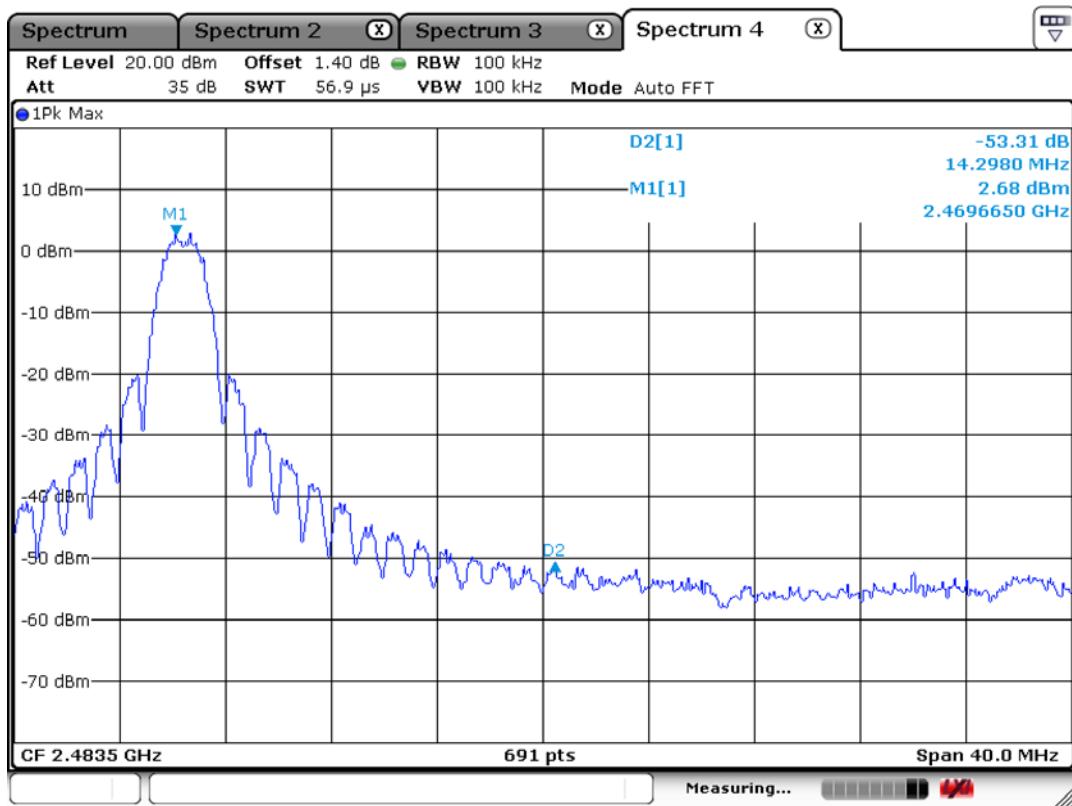

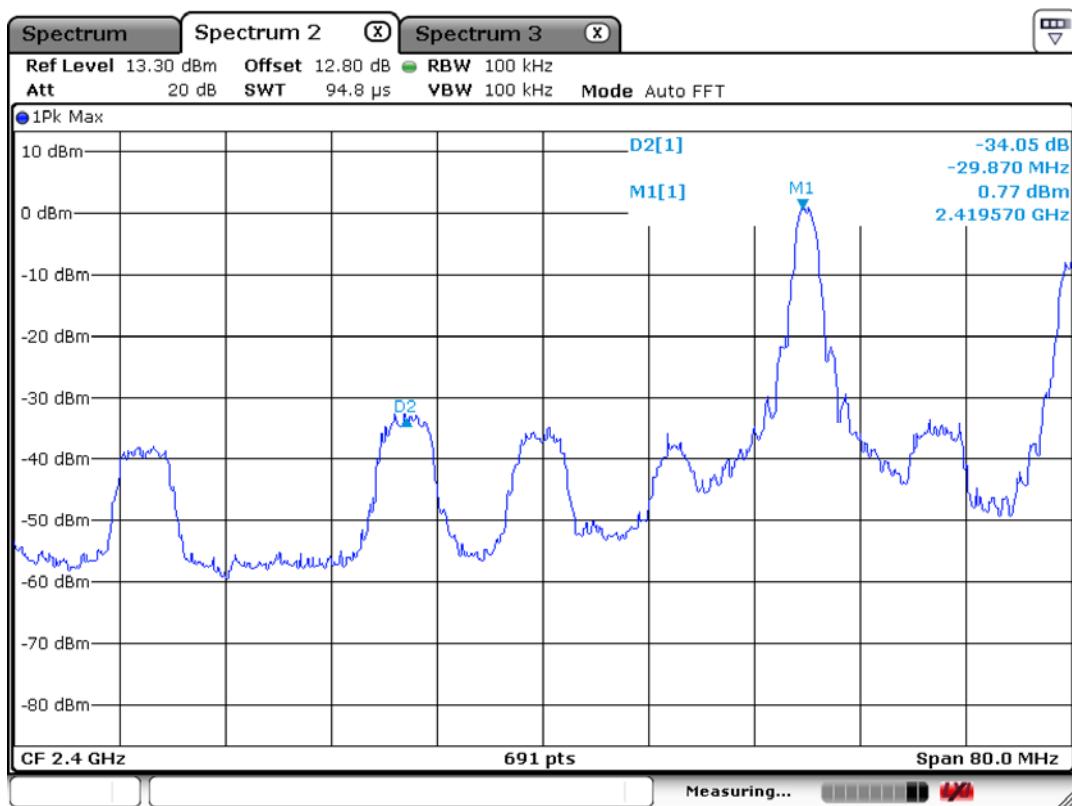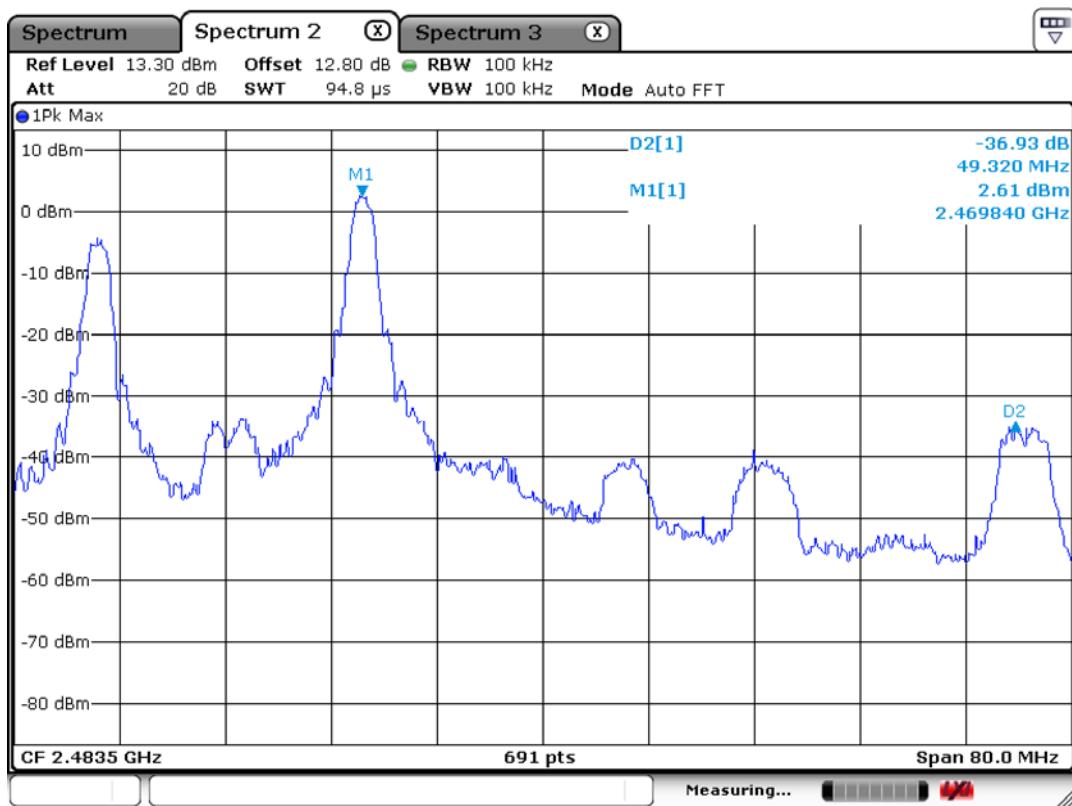Band edge – Multiple Channel (Port 1 / Port 2 / Port 3 / Port 4)**Lower edge****Upper edge**

Radiated Band-edges in the restricted band 2310-2390 MHz measurement (Multiple Channel)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
			Antenna	Amp. Gain + Cable Loss	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
2389.9	41.8 58.9	V	27.9	25.1	54.0	74.0	44.6	61.7	9.4	12.3

Radiated Band-edges in the restricted band 2483.5-2500 MHz measurement (Multiple Channel)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
			Antenna	Amp. Gain + Cable Loss	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
2495.6	33.8 49.9	V	27.9	25.1	54.0	74.0	36.6	52.7	17.4	21.3

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz Sweep = auto

VBW = 100 kHz Detector function = peak

Trace = max hold



Measurement Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
 - See next pages for actual measured spectrum plots.


Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

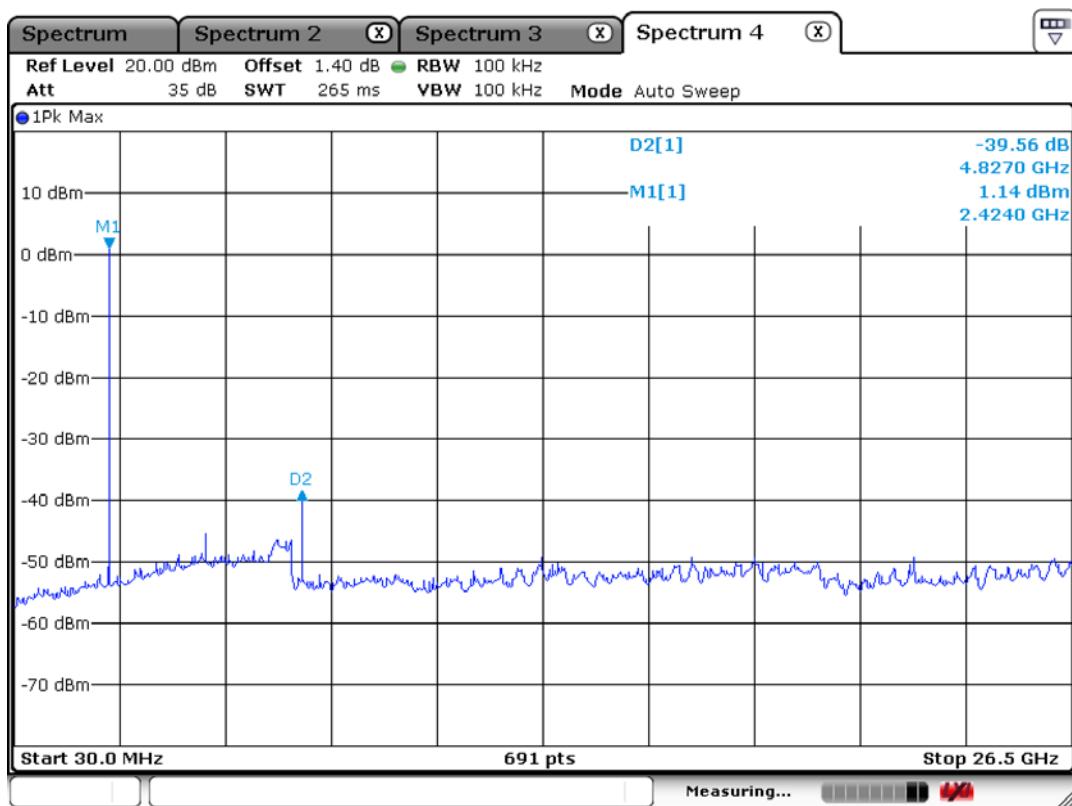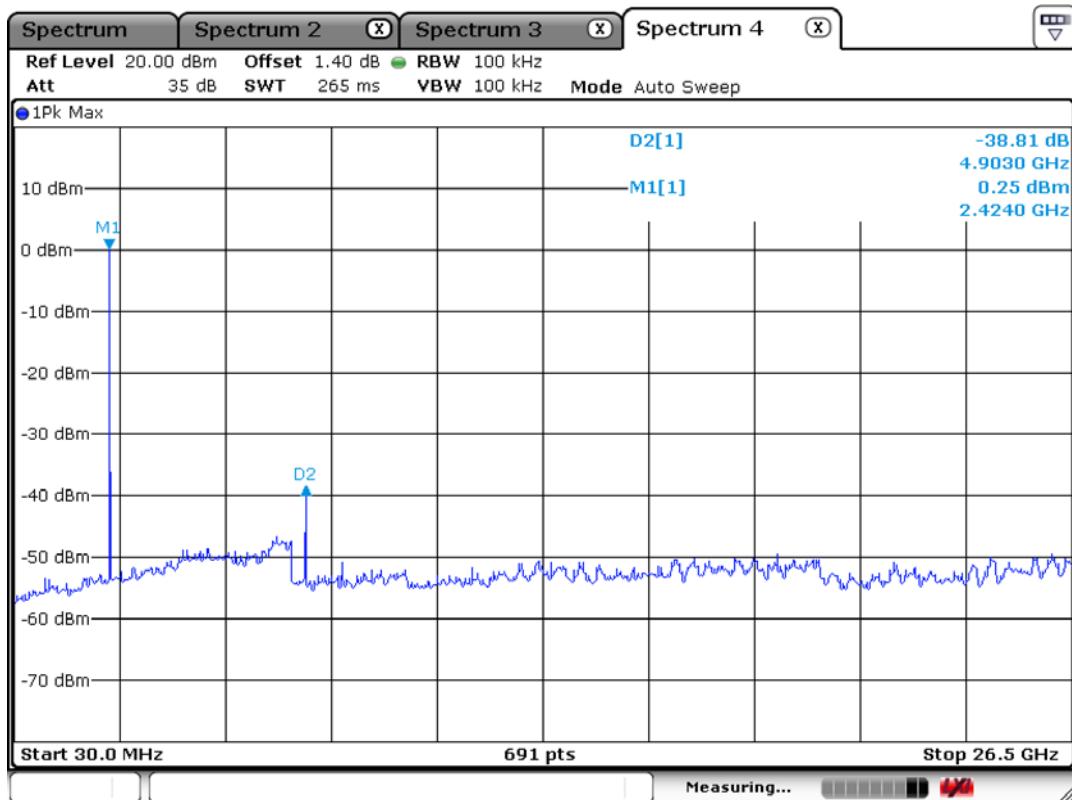
Unwanted Emission – Port1 ChannelFrequency Range = 30 MHz ~ 26.5 GHzUnwanted Emission – Port 2 ChannelFrequency Range = 30 MHz ~ 26.5 GHz

Unwanted Emission – Port 3 Channel
Frequency Range = 30 MHz ~ 26.5 GHz

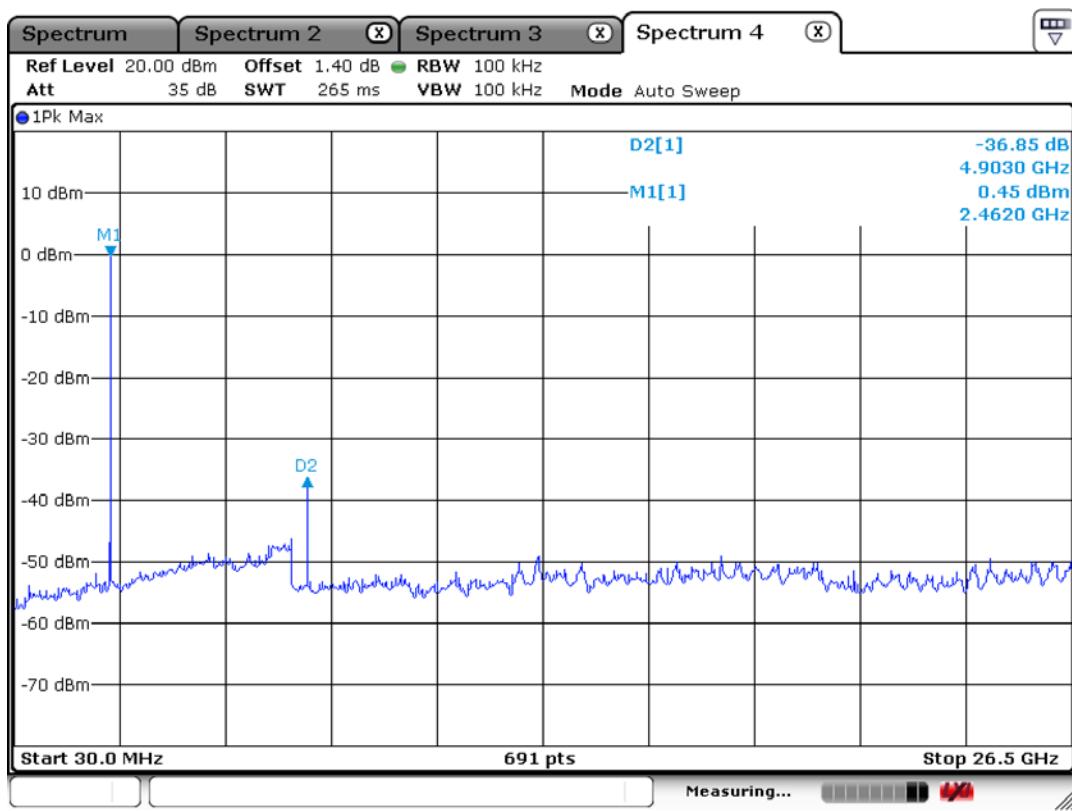

Unwanted Emission – Port 4 Channel
Frequency Range = 30 MHz ~ 26.5 GHz

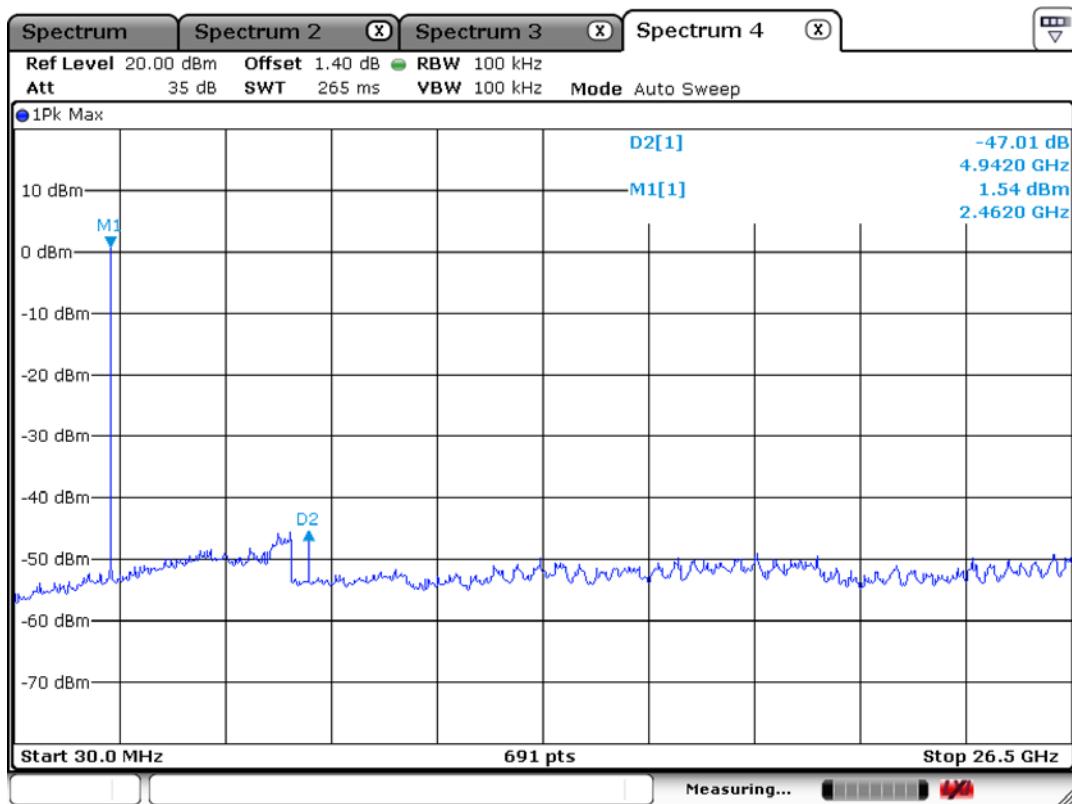

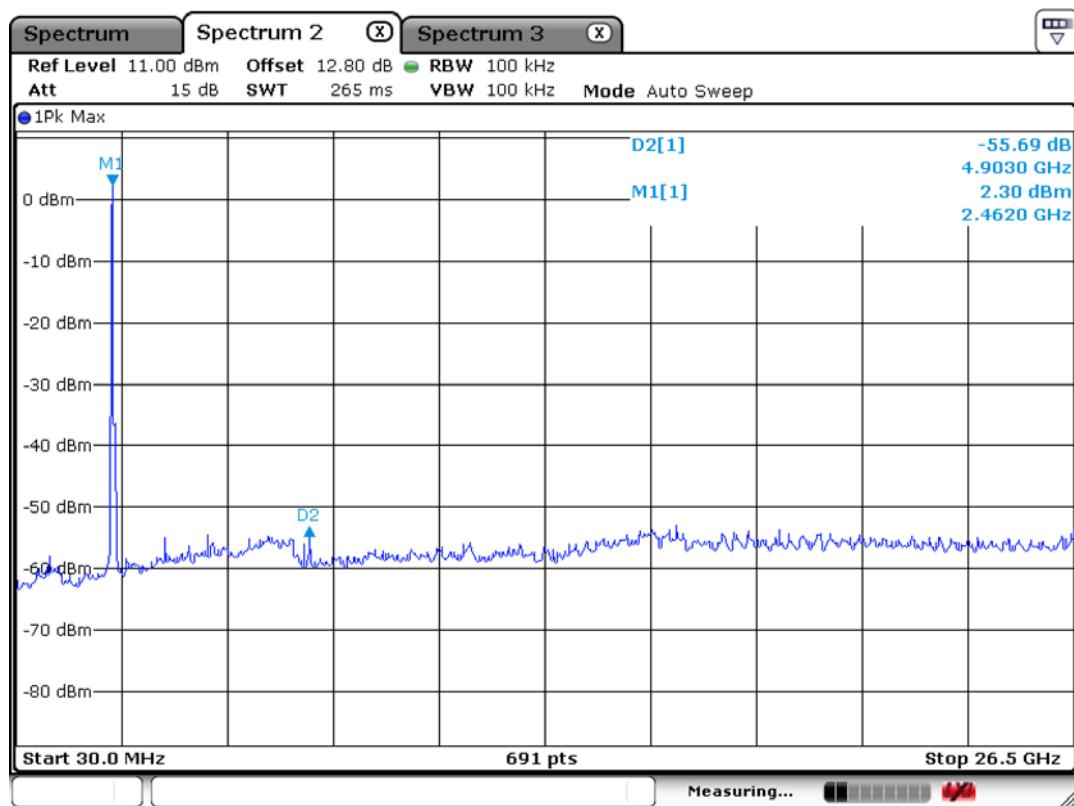Unwanted Emission – Multiple Channel (Port 1 / Port 2 / Port 3 / Port 4)Frequency Range = 30 MHz ~ 26.5 GHz

3.2.6 Radiated Spurious Emissions

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 100 kHz (30 MHz ~ 1 GHz)

VBW \geq RBW


$\equiv 1$ MHz (1 GHz \sim 10th harmonic)



Span = 100 MHz

Detector function \equiv peak

Trace \equiv max hold

below 30 MHz

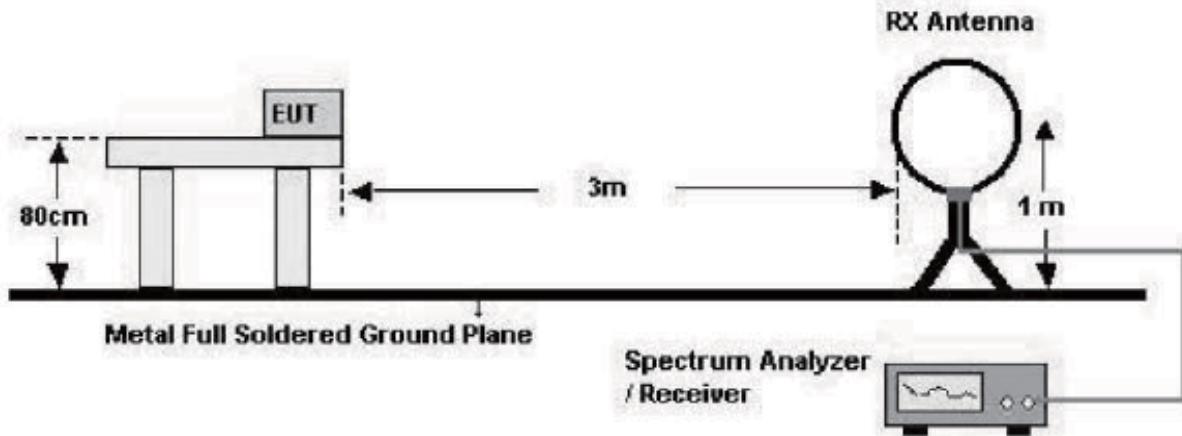

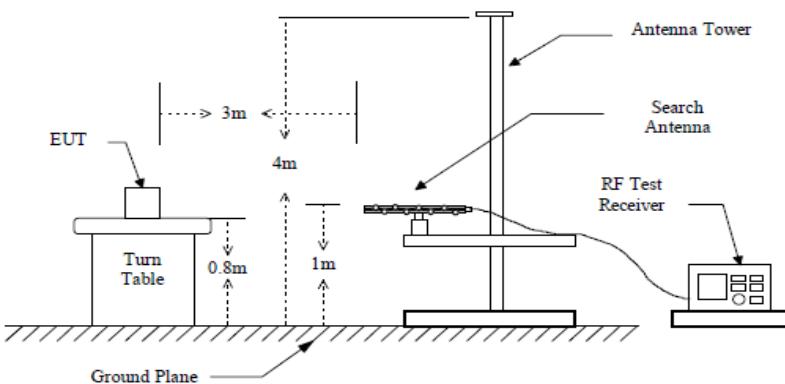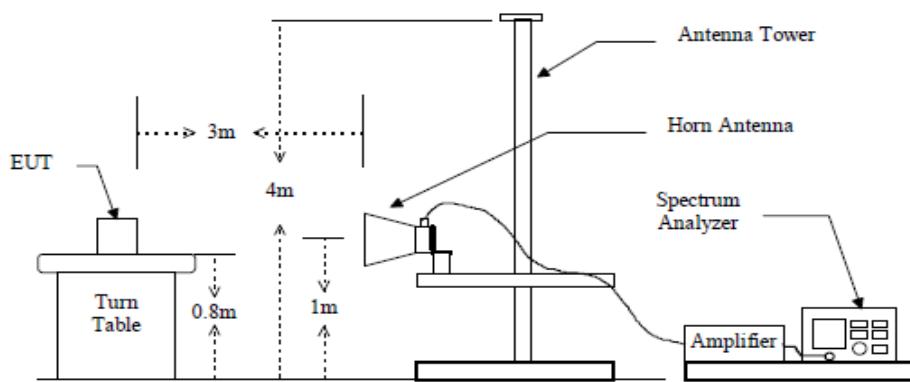below 1 GHz (30 MHz to 1 GHz)**above 1 GHz****Measurement Data: Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30 MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data : Multiple Channel

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
				Antenna	Amp.Gain+Cable						
4904.0	36.7	53.2	V	32.9	18.7	54.0	74.0	50.9	67.4	3.1	6.6

- No other emissions were detected at a level greater than 20 dB below limit.

Measurement Data: Multiple Channel (9 kHz – 30 MHz)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
				Antenna	Amp.Gain+Cable						
-	-	-	-	-	-	-	-	-	-	-	-
No emissions were detected at a level greater than 20 dB below limit.											
-	-	-	-	-	-	-	-	-	-	-	-

*No emissions were detected at a level greater than 20 dB below limit.

Radiated Emissions – Console mode


4, Songjuro 236 Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT/Model No.: STARDUST2

TEST MODE: Console mode

Temp Humi : 18 / 49

Tested by: KIM H I

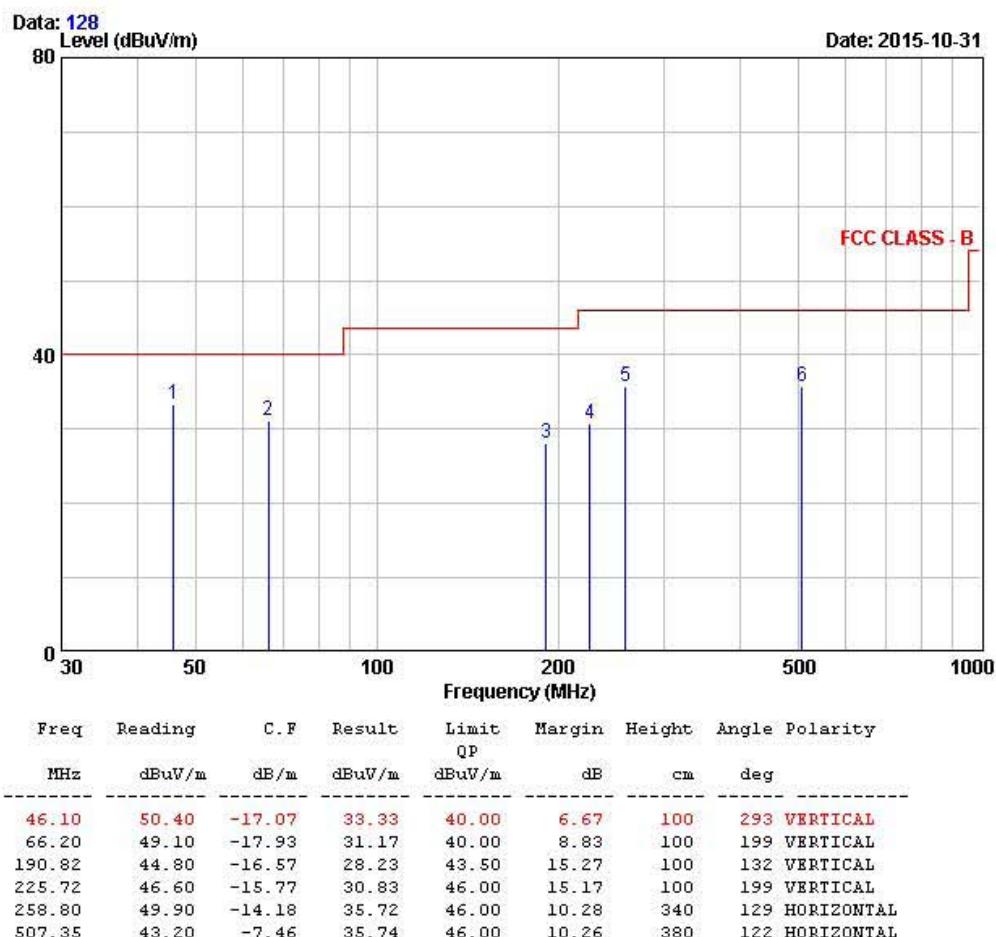

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions – Wireless mode


4, Songjuro 236 Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT/Model No.: STARDUST2

TEST MODE: Wireless mode

Temp Humi : 18 / 49

Tested by: KIM H I

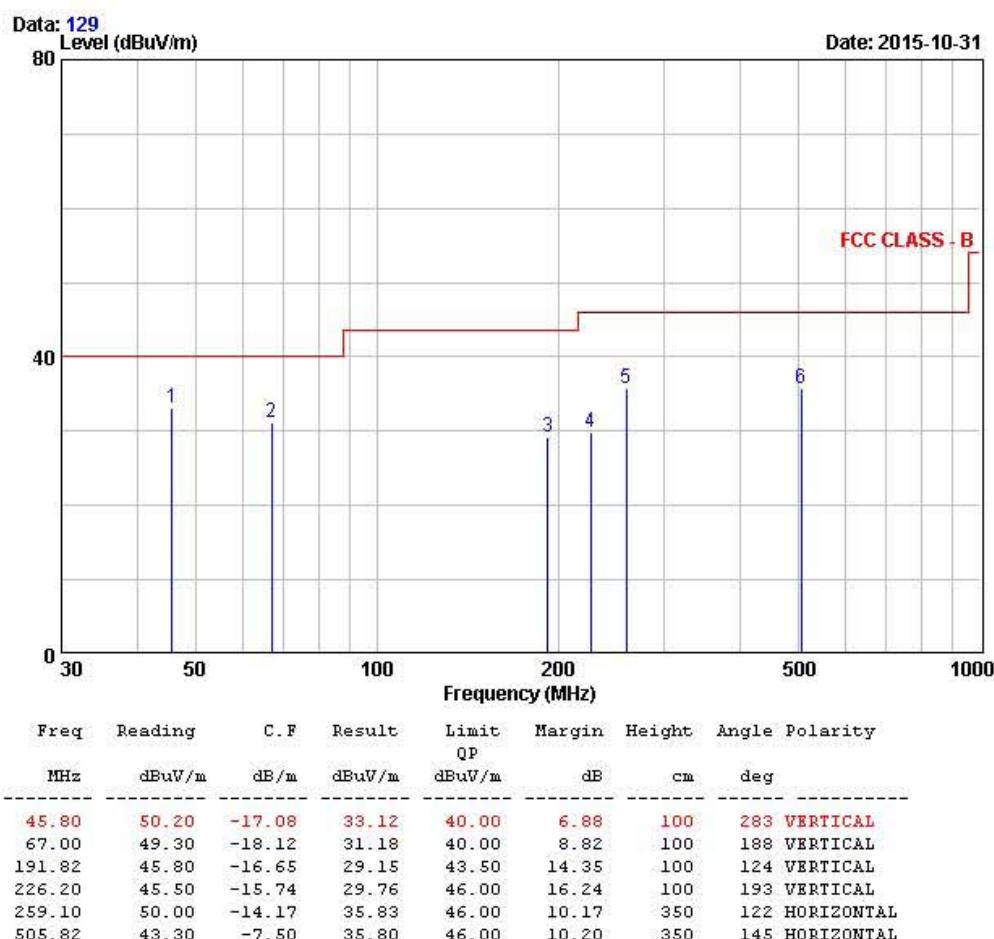

3.2.6 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 20 dB below limit.

Minimum Standard: FCC Part 15.207(a) / EN 55022

Class B


Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

AC Conducted Emissions – Console mode – Line

4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : STARDUST2 Phase : LINE
Test Mode : Console mode Test Power : 120 / 60
Temp. / Humi. : 19 / 44 Test Engineer : KIM H I

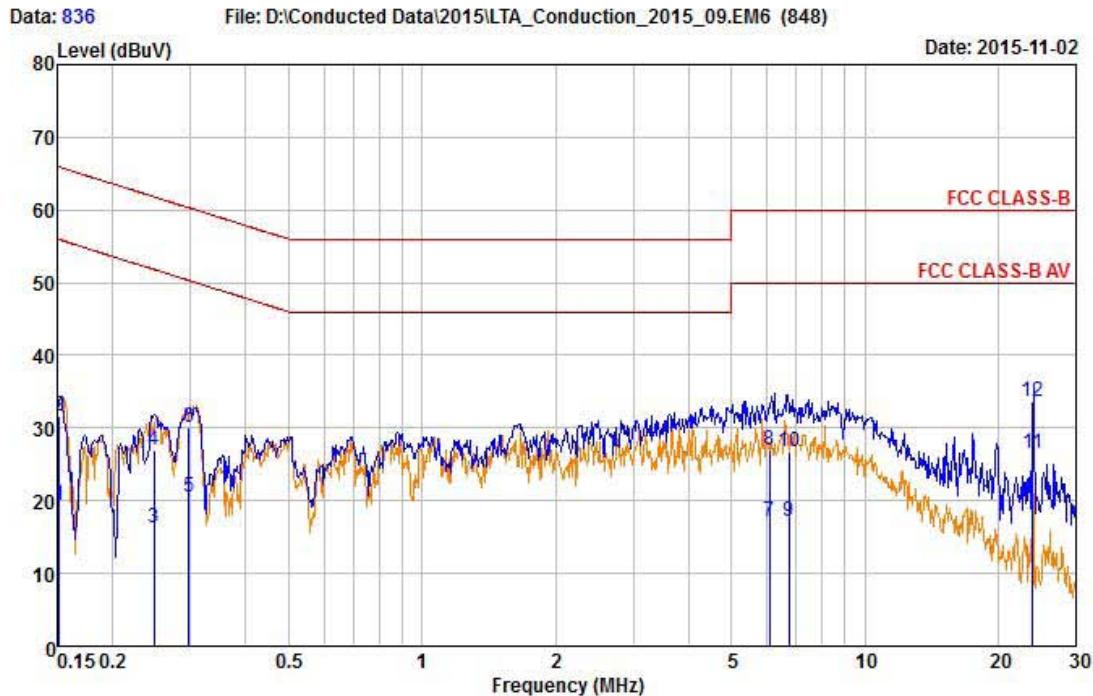


Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result		Result		Limit		Margin	
				QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.152	12.10	-0.19	19.58	31.68	19.39	65.90	55.90	34.22	36.51		
0.248	7.51	-3.18	19.48	26.99	16.30	61.81	51.81	34.82	35.51		
0.297	10.51	1.10	19.47	29.98	20.57	60.32	50.32	30.34	29.75		
6.092	7.56	-2.37	19.46	27.02	17.09	60.00	50.00	32.98	32.91		
6.731	7.28	-2.29	19.47	26.75	17.18	60.00	50.00	33.25	32.82		
23.973	13.95	6.68	19.80	33.75	26.48	60.00	50.00	26.25	23.52		

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

AC Conducted Emissions – Console mode – Neutral

4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : STARDUST2 Phase : NEUTRAL
Test Mode : Console mode Test Power : 120 / 60
Temp. / Humi. : 19 / 44 Test Engineer : KIM H I

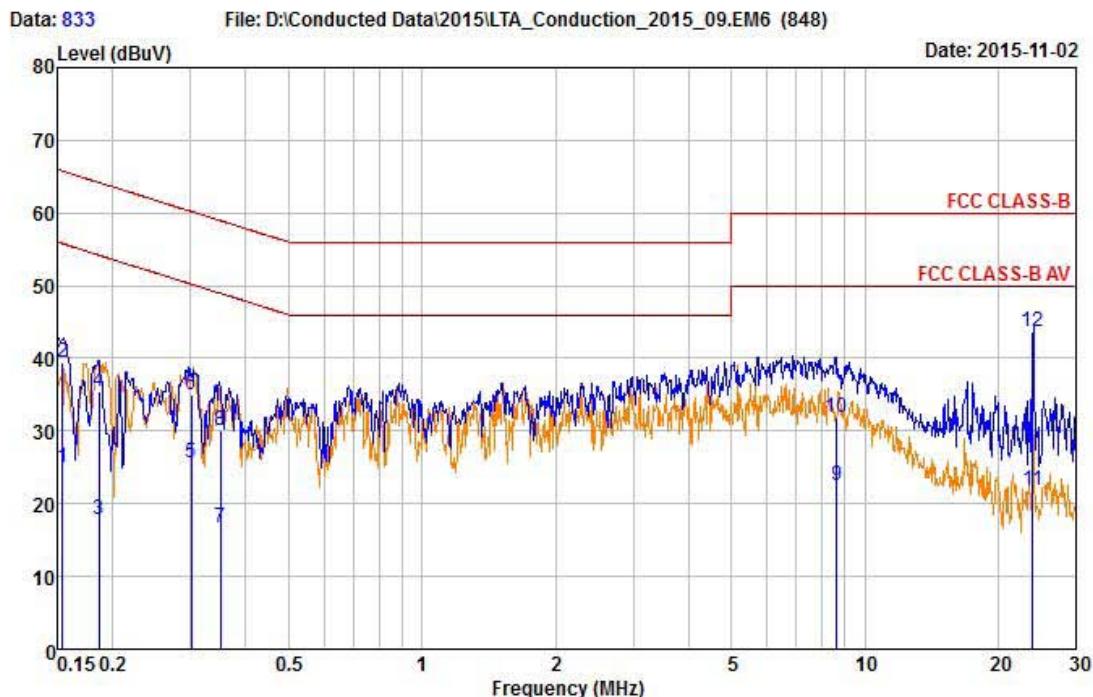


Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV		Result AV dBuV		Limit QP dBuV		Limit AV dBuV		Margin QP dB		Margin AV dB	
				Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Margin QP dB	Margin AV dB	Margin QP dB	Margin AV dB	Margin QP dB	Margin AV dB
0.154	19.90	5.31	19.57	39.47	24.88	65.78	55.78	26.31	30.90						
0.186	15.93	-1.60	19.53	35.46	17.93	64.21	54.21	28.75	36.28						
0.301	15.45	6.07	19.47	34.92	25.54	60.21	50.21	25.29	24.67						
0.350	10.66	-2.64	19.45	30.11	16.81	58.97	48.97	28.86	32.16						
8.633	12.20	2.88	19.67	31.87	22.55	60.00	50.00	28.13	27.45						
23.973	23.95	2.09	19.80	43.75	21.89	60.00	50.00	16.25	28.11						

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

AC Conducted Emissions – Wireless mode – Line

4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT / Model No. : STARDUST2 Phase : LINE
Test Mode : Wireless mode Test Power : 120 / 60
Temp. / Humi. : 19 / 44 Test Engineer : KIM H I

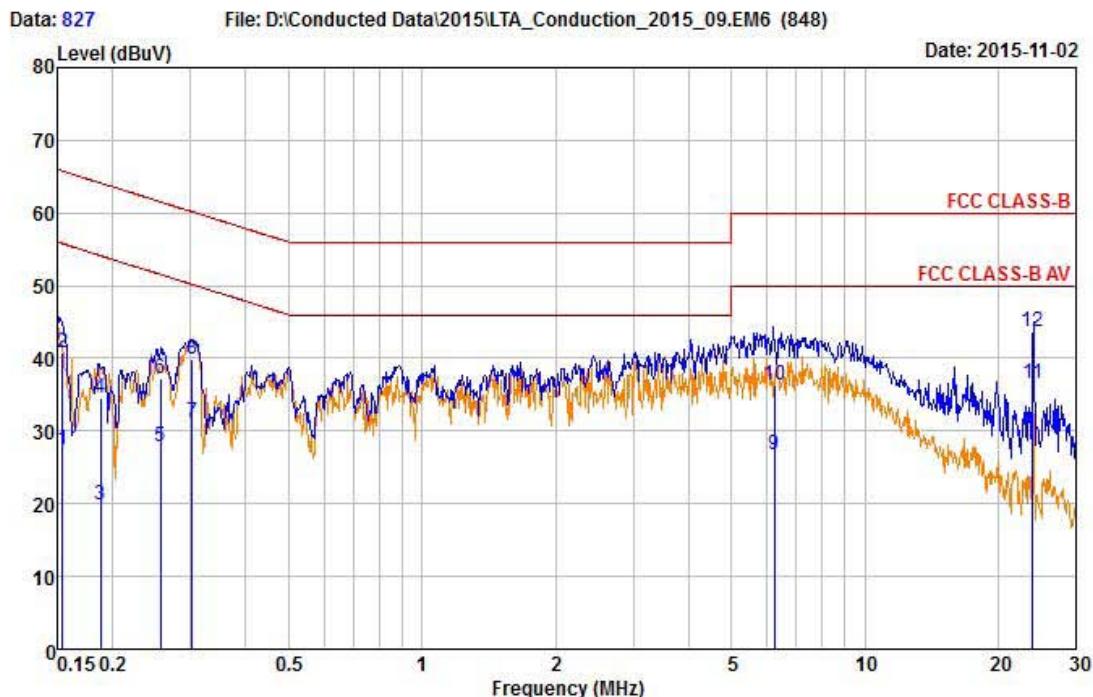


Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV		Result AV dBuV		Limit QP dBuV		Limit AV dBuV		Margin QP dB		Margin AV dB	
				Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Margin QP dB	Margin AV dB	Margin QP dB	Margin AV dB	Margin QP dB	Margin AV dB
0.154	21.33	7.86	19.56	40.89	27.42	65.79	55.79	24.90	28.37						
0.188	15.10	0.36	19.51	34.61	19.87	64.11	54.11	29.50	34.24						
0.256	17.74	8.32	19.46	37.20	27.78	61.55	51.55	24.35	23.77						
0.302	20.38	11.71	19.45	39.83	31.16	60.18	50.18	20.35	19.02						
6.241	16.80	7.22	19.45	36.25	26.67	60.00	50.00	23.75	23.33						
23.971	23.95	16.79	19.77	43.72	36.56	60.00	50.00	16.28	13.44						

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

AC Conducted Emissions – Wireless mode – Neutral

4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : STARDUST2 Phase : NEUTRAL
Test Mode : Wireless mode Test Power : 120 / 60
Temp. / Humi. : 19 / 44 Test Engineer : KIM H I

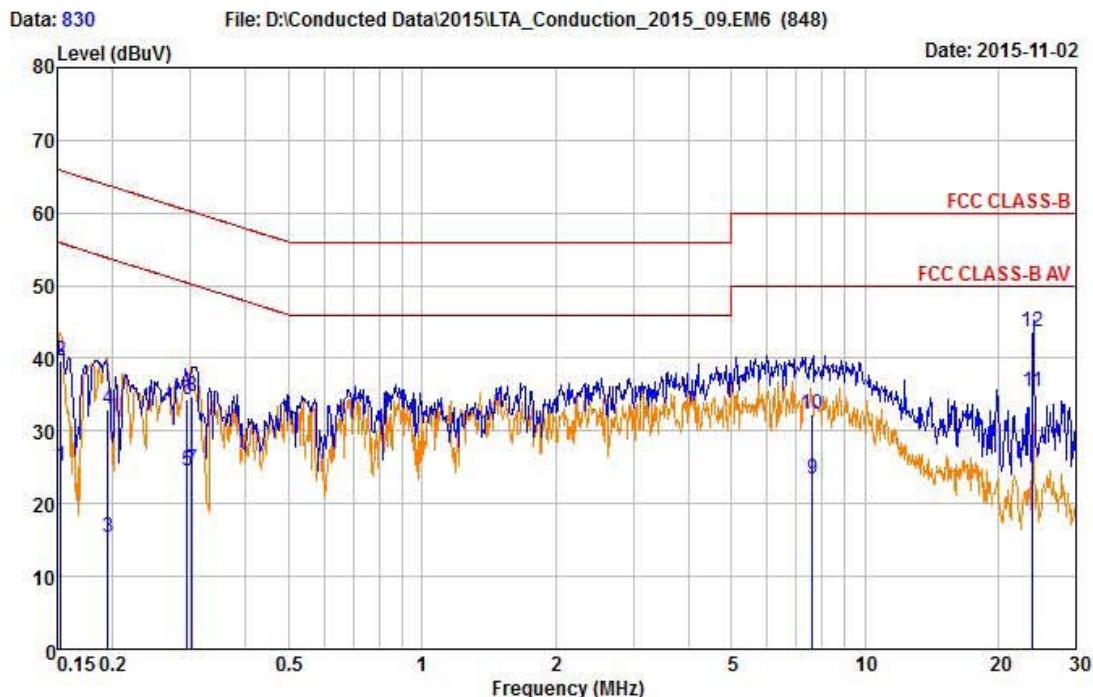

Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV		Result AV dBuV		Limit QP dBuV		Limit AV dBuV		Margin QP dB		Margin AV dB	
				Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Margin QP dB	Margin AV dB	Margin QP dB	Margin AV dB	Margin QP dB	Margin AV dB
0.153	20.00	5.62	19.57	39.57	25.19	65.83	55.83	26.26	30.64						
0.195	13.50	-4.10	19.51	33.01	15.41	63.82	53.82	30.81	38.41						
0.295	14.83	4.96	19.47	34.30	24.43	60.37	50.37	26.07	25.94						
0.302	15.41	5.38	19.46	34.87	24.84	60.17	50.17	25.30	25.33						
7.620	12.73	3.80	19.55	32.28	23.35	60.00	50.00	27.72	26.65						
23.972	23.87	15.71	19.80	43.67	35.51	60.00	50.00	16.33	14.49						

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Signal Analyzer (9 kHz~30G Hz)	FSV-30	100757	R&S	1 year	2015-03-24
2	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2015-03-23
3	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2015-03-23
4	Attenuator (3 dB)	8491A	37822	HP	1 year	2015-09-14
5	Attenuator (10 dB)	8491A	63196	HP	1 year	2015-09-14
6	Test Receiver (~30 MHz)	ESHS10	828404/009	R&S	1 year	2015-03-23
7	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2015-09-15
8	RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2015-09-14
9	RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2015-03-23
10	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2015-04-21
11	DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2014-02-26
12	DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2014-02-26
13	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2015-04-21
14	Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2015-04-03
15	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
16	Power Divider	11636A	06243	HP	1 year	2015-09-14
17	DC Power Supply	6674A	3637A01657	Agilent	-	-
18	Frequency Counter	5342A	2826A12411	HP	1 year	2015-03-23
19	Power Meter	EPM-441A	GB32481702	HP	1 year	2015-03-23
20	Power Sensor	8481A	3318A99464	HP	1 year	2015-01-13
21	Audio Analyzer	8903B	3729A18901	HP	1 year	2015-09-14
22	Modulation Analyzer	8901B	3749A05878	HP	1 year	2015-09-15
23	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	Jin Young Tech	1 year	2015-09-14
24	Stop Watch	HS-3	812Q08R	CASIO	2 year	2014-04-03
25	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2015-09-14
26	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2015-03-23
27	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2015-03-23
28	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2015-03-30
29	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2015-03-30
30	Active Loop Antenna	FMZB1519	1519-031	SCHWARZBECK	1 year	2015-01-06
31	OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2015-03-23
32	Signal Generator(100 kHz~40 GHz)	SMB100A03	177621	R&S	1 year	2015-03-24
33	Signal Analyzer (10 Hz~40 GHz)	FSV40	101367	R&S	1 year	2015-03-24