

FCC AND IC CERTIFICATION TEST REPORT

FOR

Applicant	:	Audio Pro AB
Address	:	Garnisonsgatan 52, 25466 Helsingborg, Sweden
Equipment under Test	:	WIRELESS SPEAKER
Model No.	:	ADDON C3
Trade Mark	:	 audio pro
FCC ID	:	2AGNC-C3
IC	:	20967-C3
Manufacturer	:	DONGGUAN TRISTAR ELECTRONIC CO., LTD.
Address	:	NO.24A DONGXING AVE SOUTH, ZHENXINGWEI, TANGXIA TOWN, DONGGUAN CITY, CHINA 523710

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City,
Guangdong Province, China, 523808

Tel: +86-0769-89201699, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

TABLE OF CONTENTS

	Test report declares.....	4
1	Summary of test results.....	5
2	General test information	6
2.1.	Description of EUT.....	6
2.2.	Accessories of EUT	6
2.3.	Assistant equipment used for test	6
2.4.	Block diagram of EUT configuration for test.....	7
2.5.	Deviations of test standard	7
2.6.	Test environment conditions.....	7
2.7.	Test laboratory	8
2.8.	Measurement uncertainty.....	8
3	Equipment used during test	9
4	6dB Bandwidth and 99% Bandwidth	10
4.1.	Block diagram of test setup	10
4.2.	Limits	10
4.3.	Test Procedure	10
4.4.	Test Result	10
4.5.	original test data.....	12
5	Conducted peak Output Power	36
5.1.	Block diagram of test setup	36
5.2.	Limits	36
5.3.	Test Procedure	36
5.4.	Test Result	37
6	Power Spectral Density.....	38
6.1.	Block diagram of test setup	38
6.2.	Limits	38
6.3.	Test Procedure	38
6.4.	Test Result	39
6.5.	original test data.....	39
7	Band Edge and Spurious Emissions (Conducted)	52
7.1.	Block diagram of test setup	52
7.2.	Limits	52
7.3.	Test Procedure	52
7.4.	Test Result	52
7.5.	original test data.....	53
8	Radiated Spurious Emissions	98
8.1.	Block diagram of test setup	98
8.2.	Limit	99

8.3.	Test Procedure	100
8.4.	Test result	101
9	Radiated Band Edge Compliance	105
9.1.	Block diagram of test setup	105
9.2.	Limit	105
9.3.	Test Procedure	105
9.4.	Test result	105
10	Power Line Conducted Emission.....	122
10.1.	Block diagram of test setup	122
10.2.	Power Line Conducted Emission Limits(Class B)	122
10.3.	Test Procedure	122
10.4.	Test Result	123
11	Antenna Requirements.....	126
11.1.	Limit	126
11.2.	Result	126

TEST REPORT DECLARE

Applicant	:	Audio Pro AB
Address	:	Garnisonsgatan 52, 25466 Helsingborg, Sweden
Equipment under Test	:	WIRELESS SPEAKER
Model No	:	ADDON C3
Trade Mark	:	
Manufacturer	:	DONGGUAN TRISTAR ELECTRONIC CO., LTD.
Address	:	NO.24A DONGXING AVE SOUTH, ZHENXINGWEI, TANGXIA TOWN, DONGGUAN CITY, CHINA 523710

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test procedure used: ANSI C63.10:2013, RSS-Gen Issue 4, Nov. 2014, KDB558074 D01 DTS Meas Guidance V03r02

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No:			
Date of Receipt:	Oct. 19, 2017	Date of Test:	Oct. 19, 2017 ~ Nov. 21, 2017

Prepared By:

Sam Li

Sam Li/Engineer

Approved by:



Kevin Feng/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

1 Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.2 (a)	PASS
Conducted Output Power	FCC 15.247 (b) (3) RSS-247 Clause 5.4 (d)	PASS
Power Spectral Density	FCC 15.247 (e) RSS-247 Clause 5.2 (b)	PASS
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d) RSS-247 Clause 5.5	PASS
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN 8.9 8.10	PASS
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN 8.9 8.10	PASS
Power Line Conducted Emission	FCC 15.207 RSS-GEN Clause 8.8	PASS
Antenna requirement	FCC 15.203 RSS-GEN Clause 8.3	PASS

2 General test information

2.1. Description of EUT

EUT* Name	: WIRELESS SPEAKER
Model Number	: ADDON C3
EUT function description	: Please reference user manual of this device
Power supply	: AC 120V 60Hz DC 14.8V built-in battery
Radio Technology	: IEEE802.11b/g/n
FCC Operation frequency	: IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Modulation	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Transmitter rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: up to 150 Mbps IEEE 802.11n HT40: up to 300 Mbps
Antenna Type	: Integrated antenna 1: 2.4G band maximum PK gain 2.71dBi Integrated antenna 2: 2.4G band maximum PK gain 2.71dBi
Sample Type	: Series production

Note: 1. EUT is the ab.of equipment under test.

2. All WiFi mode are MIMO mode only

3. directional gain of MIMO mode is $2.71+10\log 2=5.72\text{dBi}$

Channle information							
CH	Frequency	CH	Frequency	CH	Frequency	CH	Frequency
1	2412	5	2432	9	2452	/	/
2	2417	6	2437	10	2457	/	/
3	2422	7	2442	11	2462	/	/
4	2427	8	2447	/	/	/	/


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Description of Assistant equipment	Manufacturer	Model number or Type	EMC Compliance	SN:
Notebook	DELL	Latitude D610	FCC DOC	00045-534-136-300

2.4. Block diagram of EUT configuration for test



EUT was connected to control to provided by manufacturer which has a standard LAN PORT connector to connect to Notebook, and the Notebook will run a special test software provided by manufacturer to control EUT work in Continuous TX mode (>98% duty cycle), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	/	11	LCH :CH1	2412
	/	11	MCH: CH6	2437
	/	11	HCH: CH11	2462
IEEE 802.11g	/	54	LCH :CH1	2412
	/	54	MCH: CH6	2437
	/	54	HCH: CH11	2462
IEEE 802.11n HT20	/	MCS 7	LCH :CH1	2412
	/	MCS 7	MCH: CH6	2437
	/	MCS 7	HCH: CH11	2462
IEEE 802.11n HT40	/	MCS 7	LCH: CH3	2422
	/	MCS 7	MCH: CH6	2437
	/	MCS 7	HCH: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.				

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808 Tel: +86-0769-89201699, E-mail: ddt@dgddt.com, <http://www.dgddt.com>

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

Designation Number: CN1182; Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power(Conducted)(Spectrum analyzer)	0.86dB(10 MHz $\leq$ f < 3.6GHz);
	1.38dB(3.6GHz $\leq$ f < 8GHz)
Peak Output Power(Conducted)(Power Sensor)	0.74dB
Power Spectral Density	0.74dB(10 MHz $\leq$ f < 3.6GHz);
	1.38dB(3.6GHz $\leq$ f < 8GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5 x 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86dB(10 MHz $\leq$ f < 3.6GHz);
	1.40dB(3.6GHz $\leq$ f < 8GHz)
	1.66dB(8GHz $\leq$ f < 22GHz)
Uncertainty for radio frequency (RBW<20KHz)	3×10 ⁻⁸
Temperature	0.4℃
Humidity	2%
Uncertainty for Radiation Emission test (30MHz-1GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz-26GHz)	4.10dB(1-6GHz)
	4.40dB (6GHz-18GHz)
	3.54dB (18GHz-26GHz)
Uncertainty for Power line conduction emission test	3.32dB (150KHz-30MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3 Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test					
Spectrum analyzer	R&S	FSU26	200071	Oct. 23, 2017	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 16, 2017	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Oct. 23, 2017	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 16, 2017	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Oct. 21, 2017	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Oct. 23, 2017	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Aug. 18, 2017	1 Year
Attenuator	Mini-Circuits	BW-S10W2	101109	Aug. 18, 2017	1 Year
RF Cable	Micable	C10-01-01-1	100309	Oct. 21, 2017	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDS-150L	ZX170110-A	Oct. 21, 2017	1 Year
Test Software	JS Tonscent	JS1120-3	Ver.2.7	N/A	N/A
USB Data acquisition	Agilent	U2531A	TW55043503	N/A	N/A
Spectrum analyzer	R&S	FSU26	200071	Oct. 23, 2017	1 Year
Radiated Emission Test (1# chamber)					
EMI Test Receiver	R&S	ESU8	100316	Oct. 21, 2017	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 16, 2017	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 09, 2017	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Oct. 17, 2017	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Oct. 17, 2017	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Nov. 09, 2017	1 Year
Pre-amplifier	TERA-MW	TRLA-0040G35	101303	Oct. 21, 2017	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Oct. 21, 2017	1 Year
RF Cable	N/A	SMAJ-SMAJ-1M+ SMAJ-SMAJ-11M	17070133+17070131	Nov. 08, 2017	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESU8	100316	Oct. 21, 2017	1 Year
LISN 1	R&S	ENV216	101109	Oct. 21, 2017	1 Year
LISN 2	R&S	ESH2-Z5	100309	Oct. 21, 2017	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Oct. 21, 2017	1 Year
CE Cable 1	HUBSER	ESU8/RF2	W10.01	Oct. 21, 2017	1 Year
Test software	Audix	E3	V 6.11111b	/	/

4 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

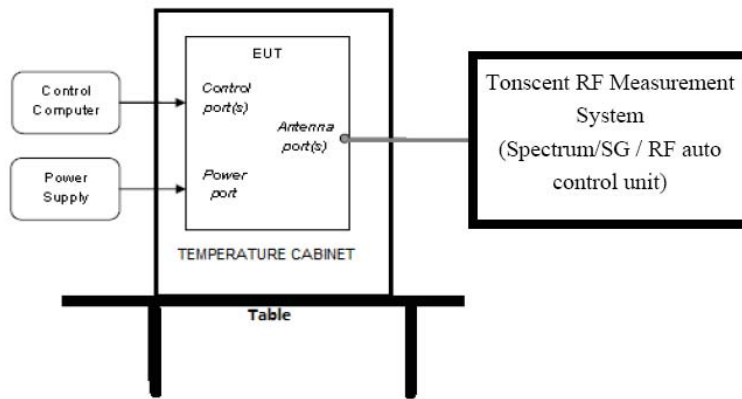

4.2. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 KHz

4.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:


RBW:	100KHz
VBW:	300KHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


4.4. Test Result

Test Mode	Test Channel	Ant	6dB Bandwidth [MHz]	Limit	Verdict
11B	2412	Ant1	9.400	0.5	PASS
11B	2412	Ant2	8.800	0.5	PASS
11B	2437	Ant1	9.160	0.5	PASS
11B	2437	Ant2	8.800	0.5	PASS
11B	2462	Ant1	8.920	0.5	PASS
11B	2462	Ant2	9.240	0.5	PASS
11G	2412	Ant1	15.800	0.5	PASS
11G	2412	Ant2	15.080	0.5	PASS
11G	2437	Ant1	15.760	0.5	PASS
11G	2437	Ant2	15.200	0.5	PASS


11G	2462	Ant1	15.160	0.5	PASS
11G	2462	Ant2	15.160	0.5	PASS
11N20	2412	Ant1	15.120	0.5	PASS
11N20	2412	Ant2	16.080	0.5	PASS
11N20	2437	Ant1	15.160	0.5	PASS
11N20	2437	Ant2	15.440	0.5	PASS
11N20	2462	Ant1	15.800	0.5	PASS
11N20	2462	Ant2	15.120	0.5	PASS
11N40	2422	Ant1	35.200	0.5	PASS
11N40	2422	Ant2	35.200	0.5	PASS
11N40	2437	Ant1	35.200	0.5	PASS
11N40	2437	Ant2	35.280	0.5	PASS
11N40	2452	Ant1	31.520	0.5	PASS
11N40	2452	Ant2	35.200	0.5	PASS
Test Mode	Test Channel	Ant	99% OBW [MHz]	Limit[MHz]	Verdict
11B	2412	Ant1	13.960	---	PASS
11B	2412	Ant2	14.120	---	PASS
11B	2437	Ant1	14.080	---	PASS
11B	2437	Ant2	14.320	---	PASS
11B	2462	Ant1	14.000	---	PASS
11B	2462	Ant2	13.880	---	PASS
11G	2412	Ant1	16.320	---	PASS
11G	2412	Ant2	16.320	---	PASS
11G	2437	Ant1	16.320	---	PASS
11G	2437	Ant2	16.320	---	PASS
11G	2462	Ant1	16.320	---	PASS
11G	2462	Ant2	16.280	---	PASS
11N20	2412	Ant1	17.480	---	PASS
11N20	2412	Ant2	17.520	---	PASS
11N20	2437	Ant1	17.480	---	PASS
11N20	2437	Ant2	17.520	---	PASS
11N20	2462	Ant1	17.440	---	PASS
11N20	2462	Ant2	17.480	---	PASS
11N40	2422	Ant1	35.920	---	PASS
11N40	2422	Ant2	35.760	---	PASS
11N40	2437	Ant1	35.840	---	PASS
11N40	2437	Ant2	35.920	---	PASS
11N40	2452	Ant1	35.680	---	PASS
11N40	2452	Ant2	35.840	---	PASS

4.5. original test data

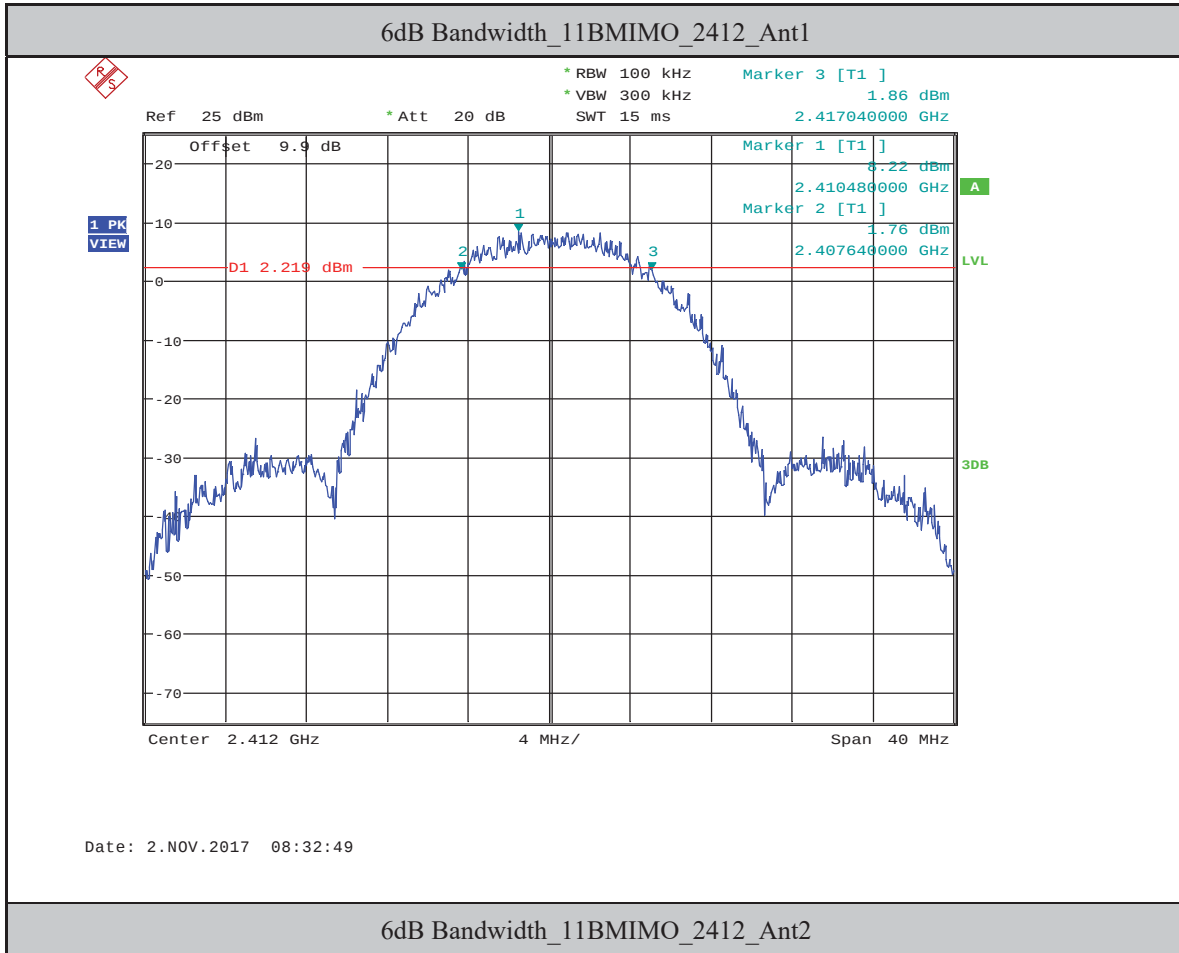


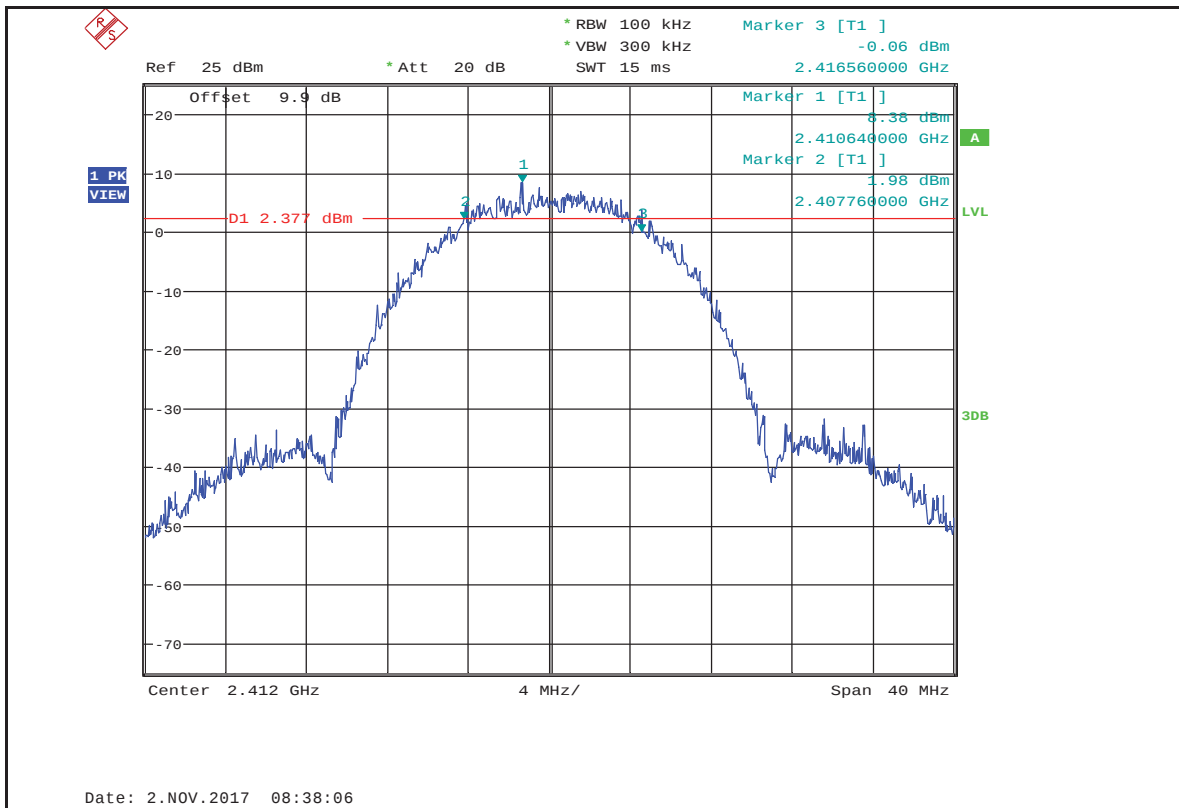


6dB Bandwidth_11BMIMO_2437_Ant1

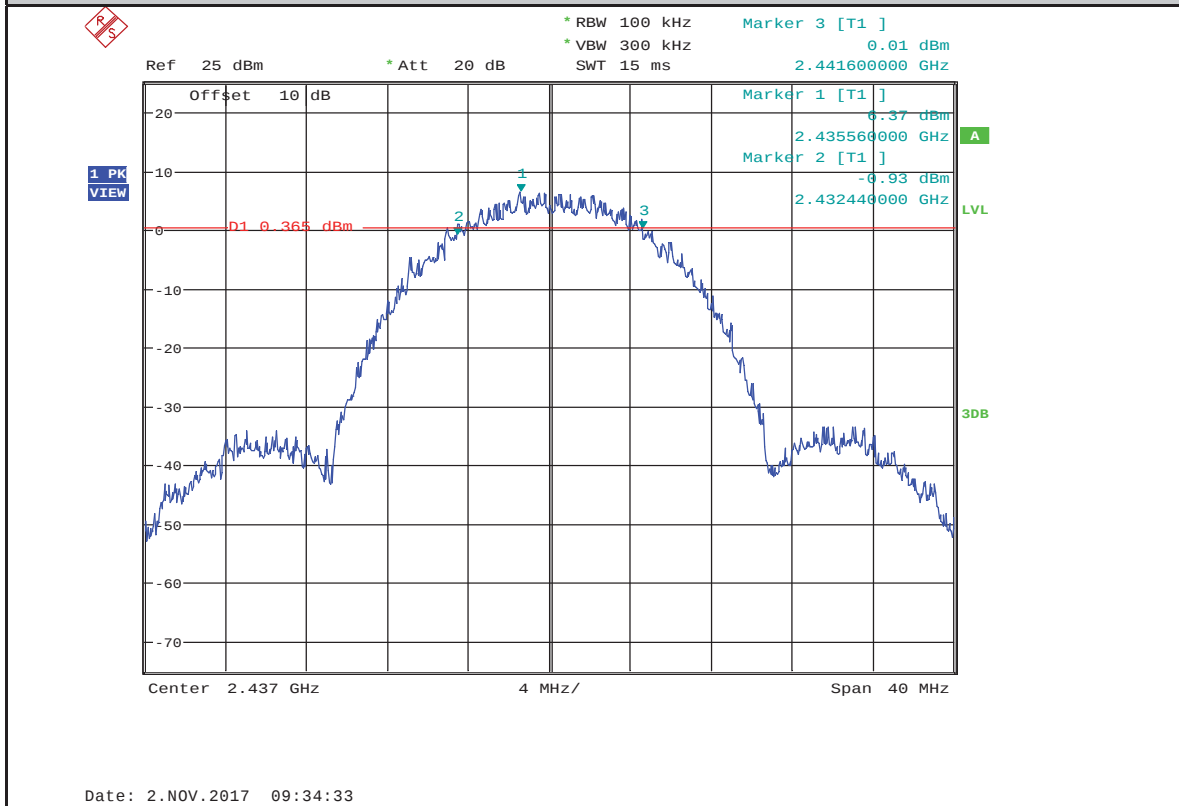


6dB Bandwidth_11BMIMO_2437_Ant2

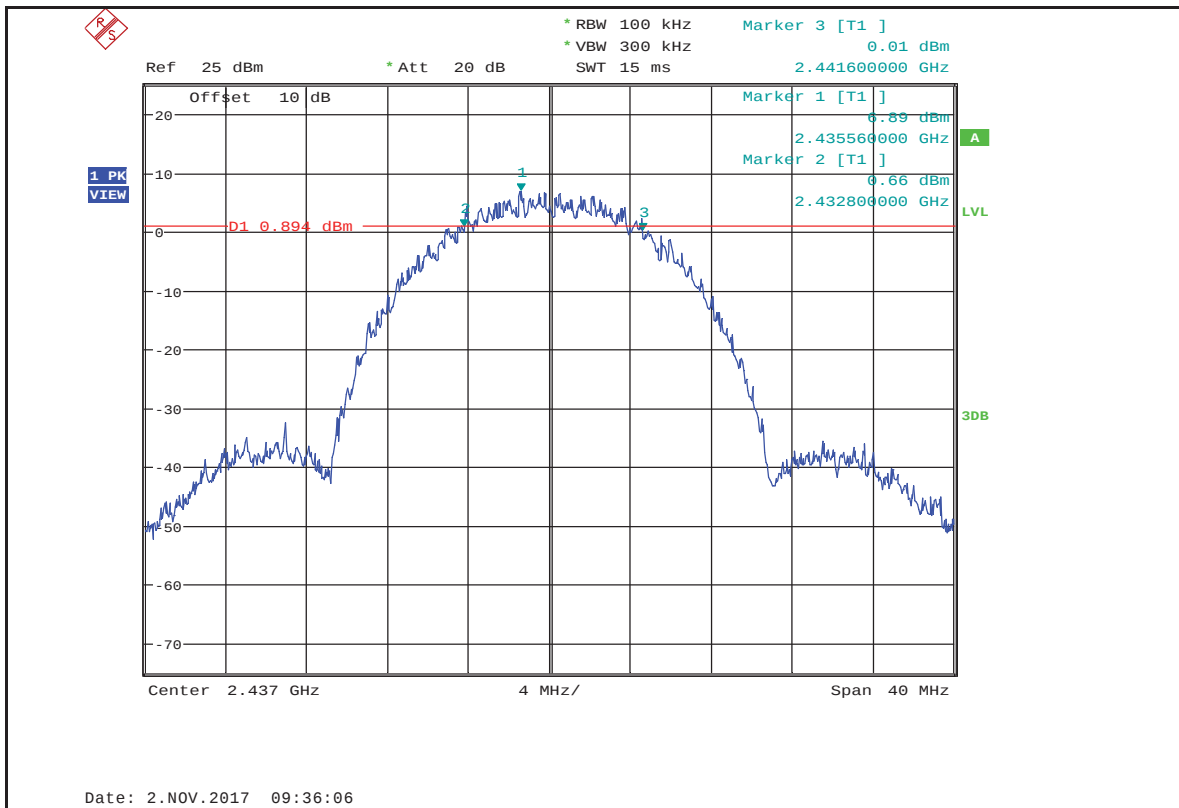


6dB Bandwidth_11BMIMO_2462_Ant1

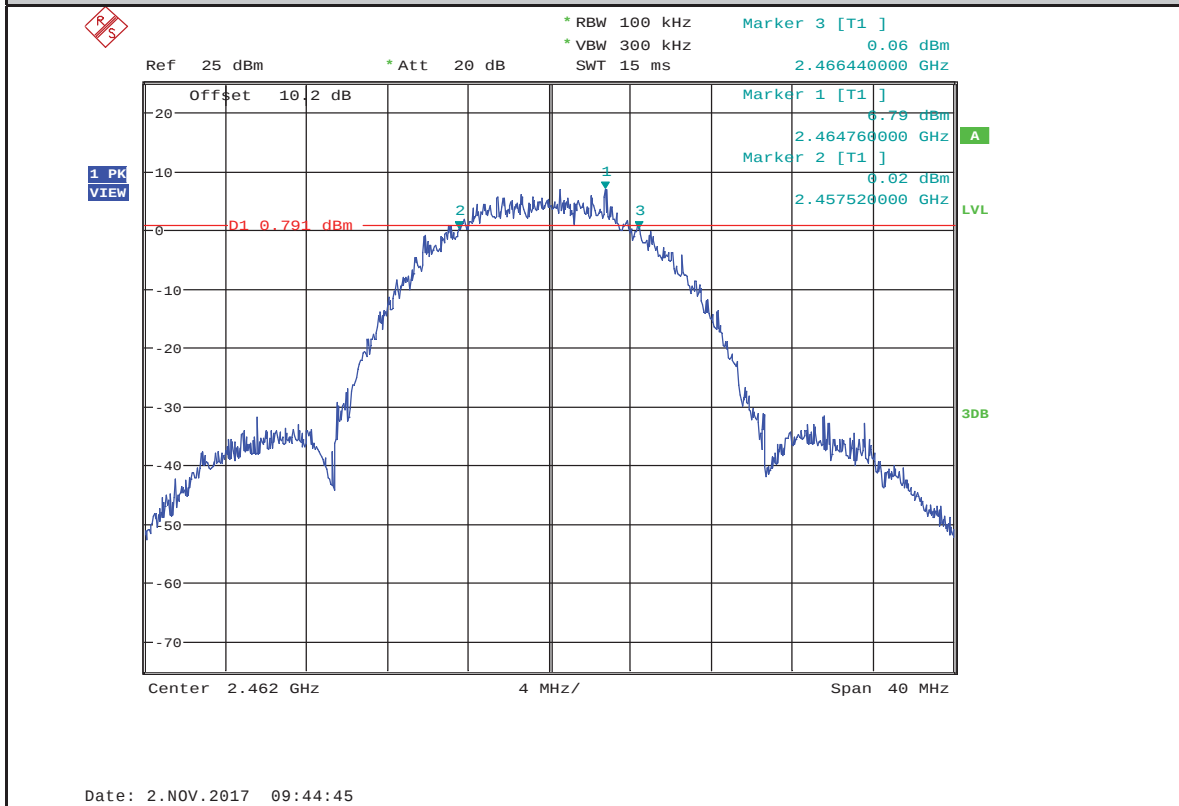


6dB Bandwidth_11BMIMO_2462_Ant2

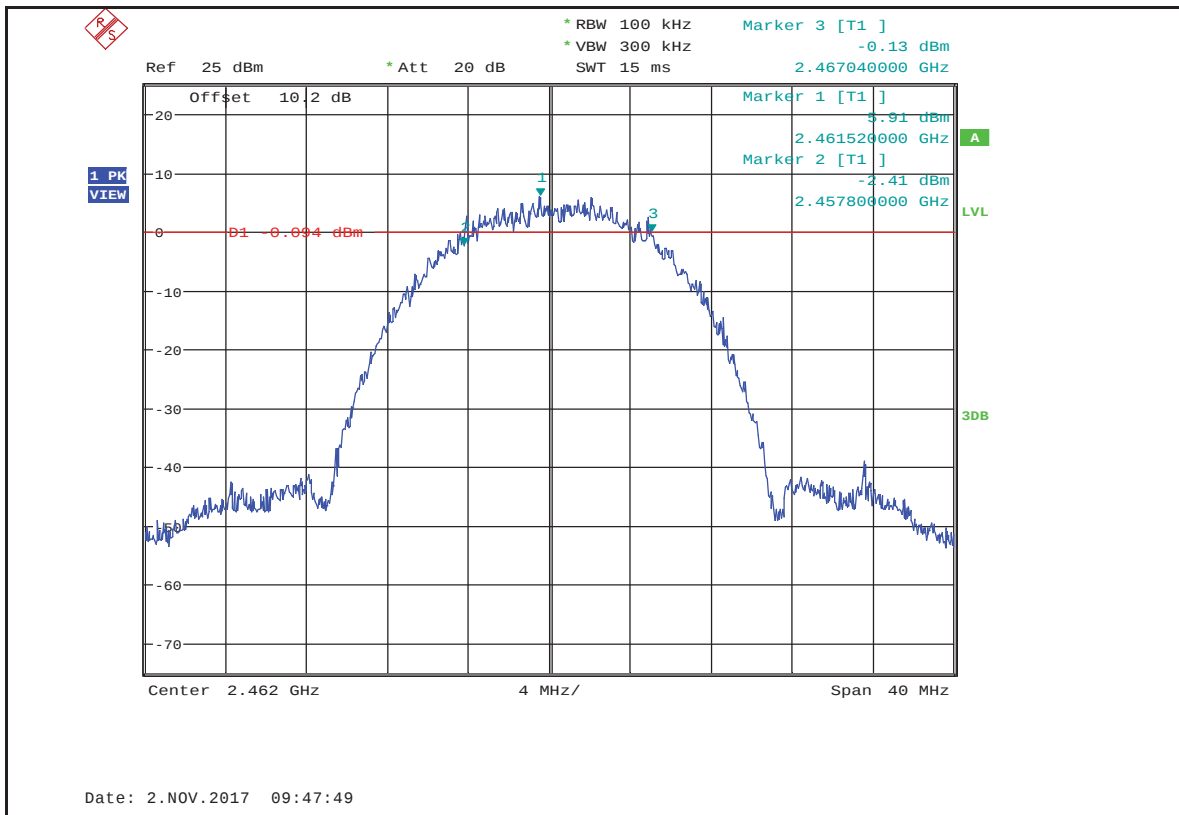

6dB Bandwidth_11GMIMO_2412_Ant1

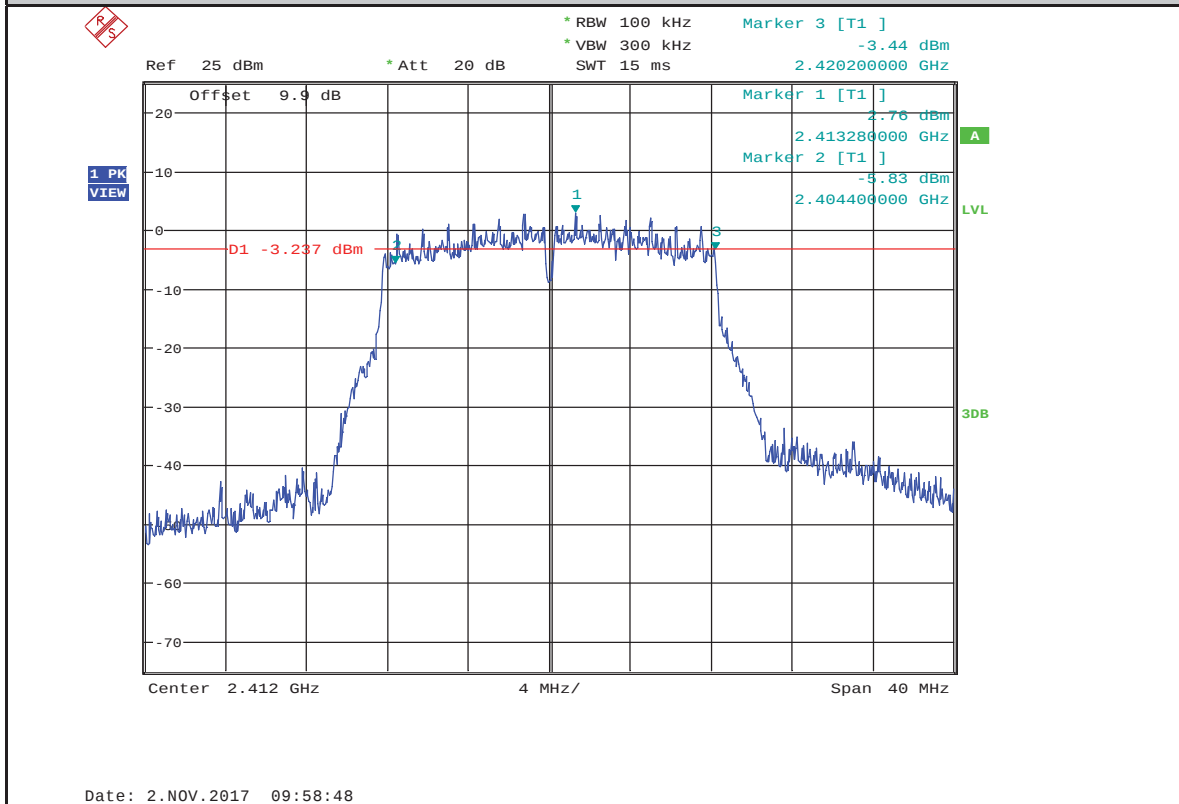


6dB Bandwidth_11GMIMO_2412_Ant2

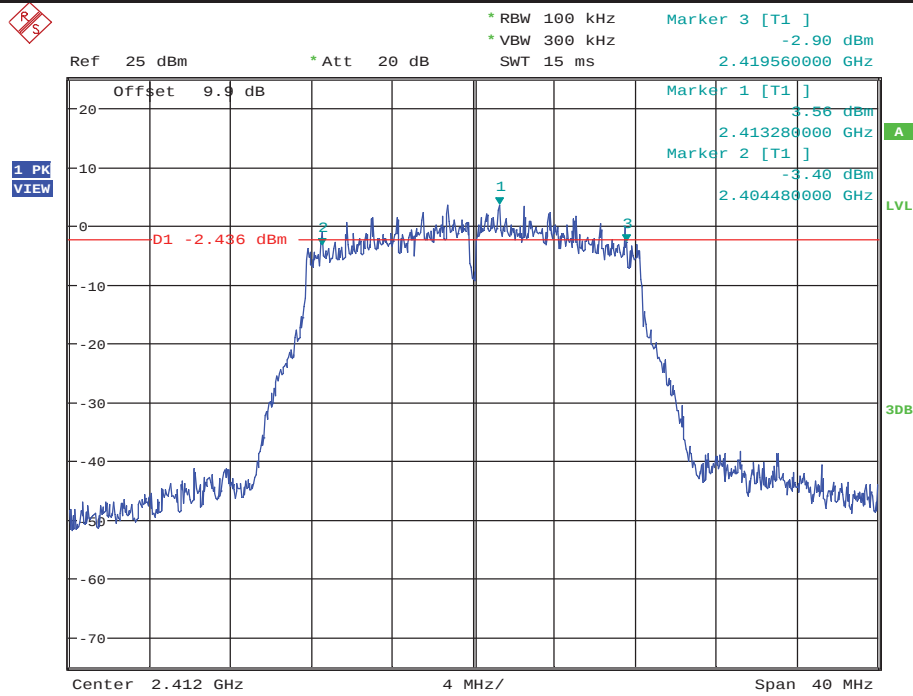


Date: 2.NOV.2017 10:01:16

6dB Bandwidth_11GMIMO_2437_Ant1

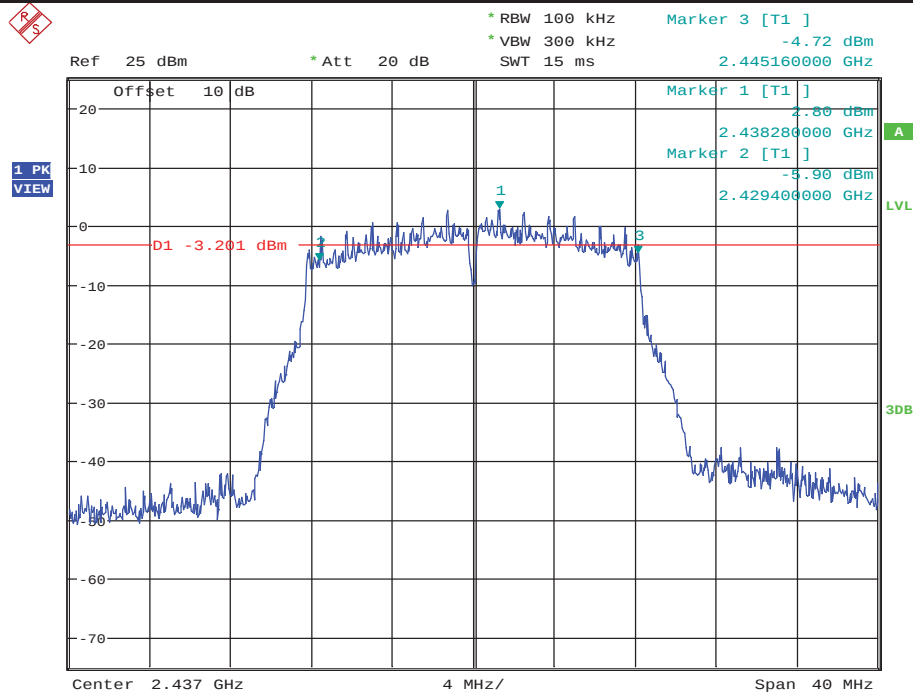


Date: 2.NOV.2017 12:47:16


6dB Bandwidth_11GMIMO_2437_Ant2

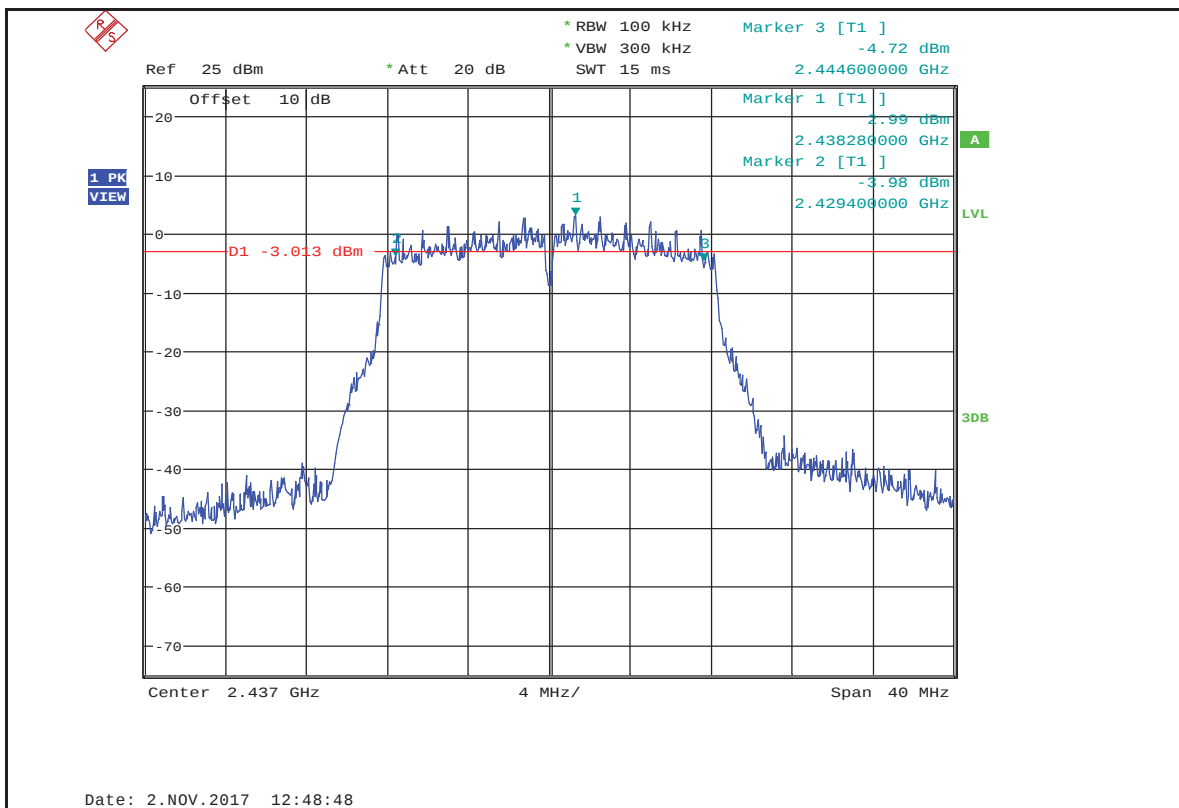

6dB Bandwidth_11GMIMO_2462_Ant1

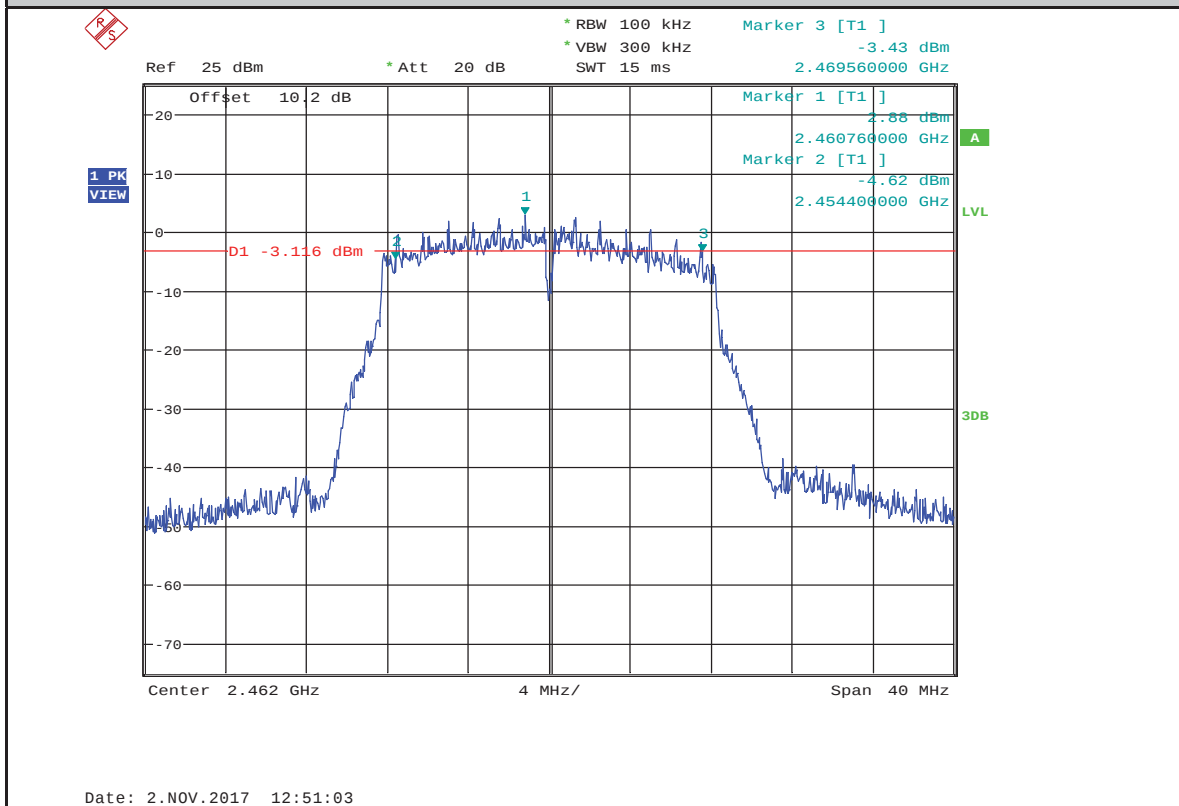


6dB Bandwidth_11GMIMO_2462_Ant2

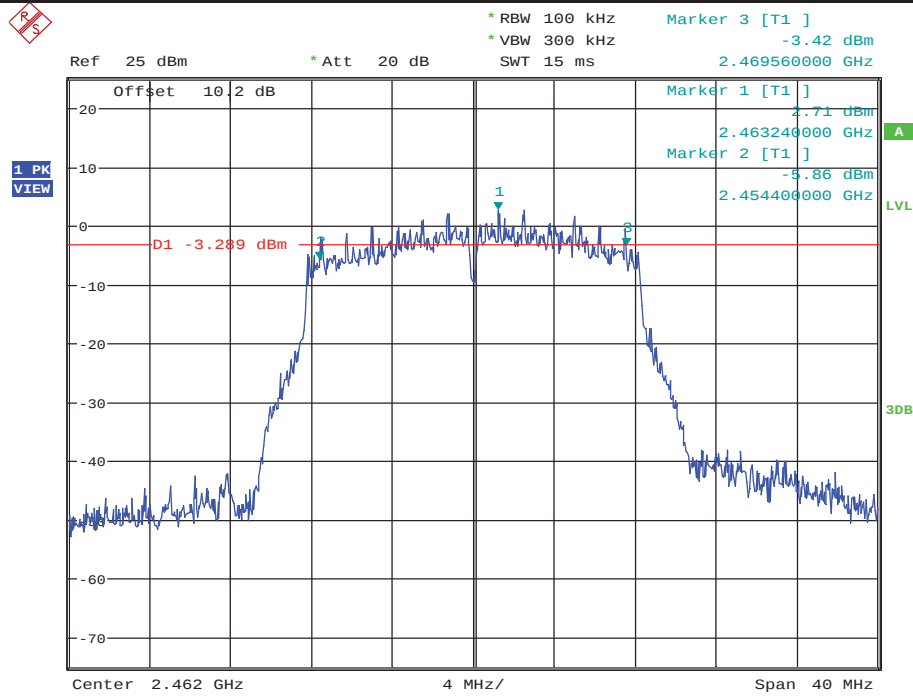


Date: 2.NOV.2017 12:53:33

6dB Bandwidth_11N20MIMO_2412_Ant1

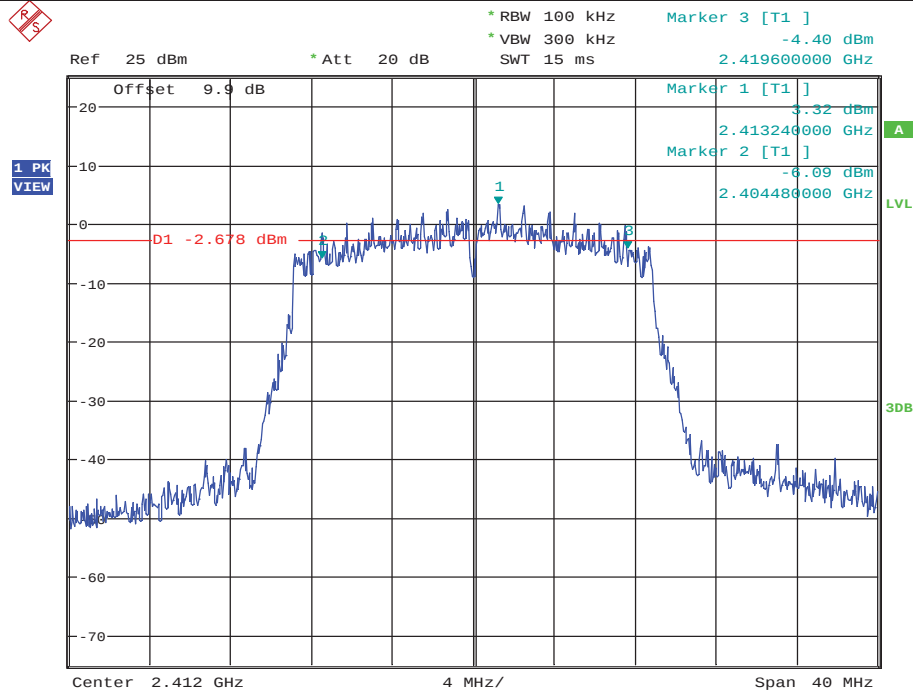


Date: 2.NOV.2017 12:57:22

6dB Bandwidth_11N20MIMO_2412_Ant2

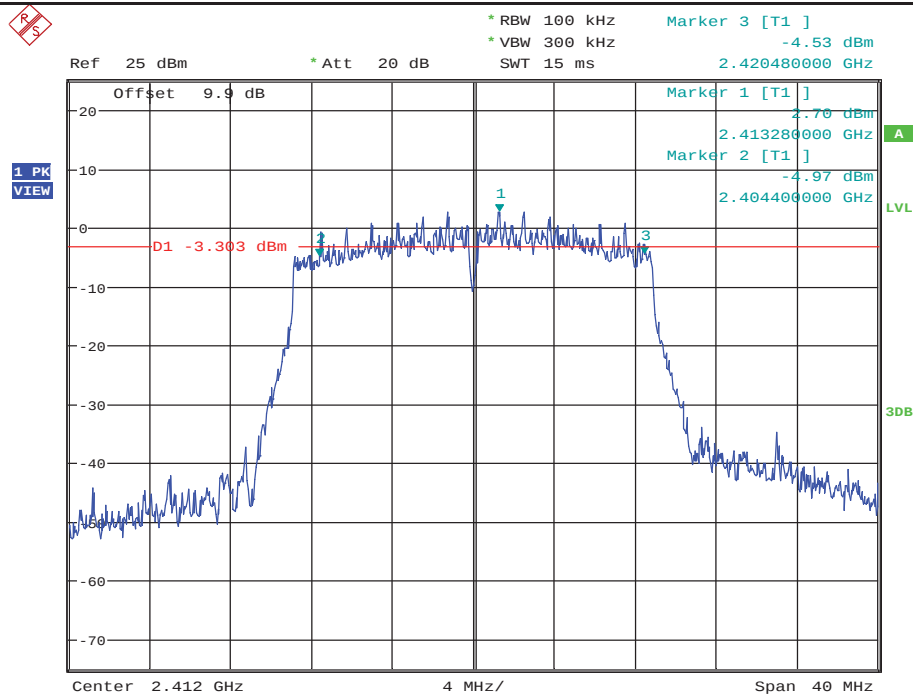


Date: 2.NOV.2017 12:59:51

6dB Bandwidth_11N20MIMO_2437_Ant1

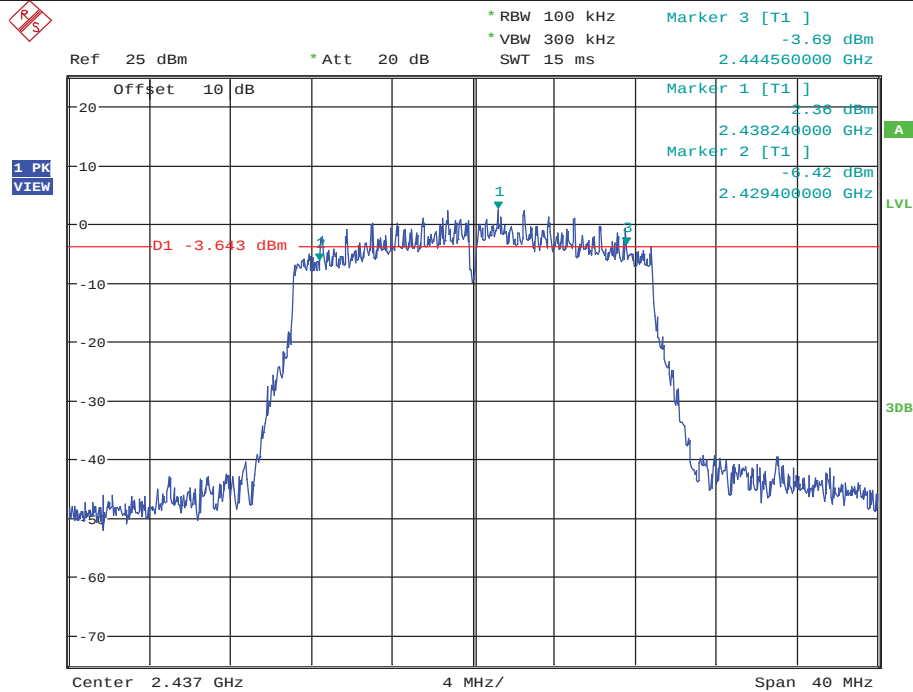


Date: 2.NOV.2017 13:07:13

6dB Bandwidth_11N20MIMO_2437_Ant2

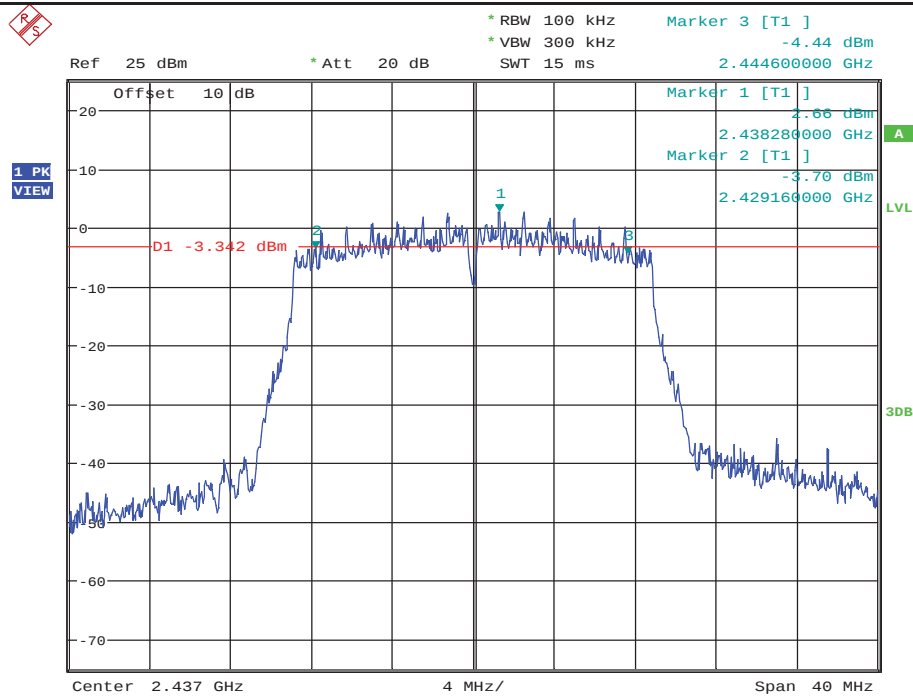


Date: 2.NOV.2017 13:08:45

6dB Bandwidth_11N20MIMO_2462_Ant1

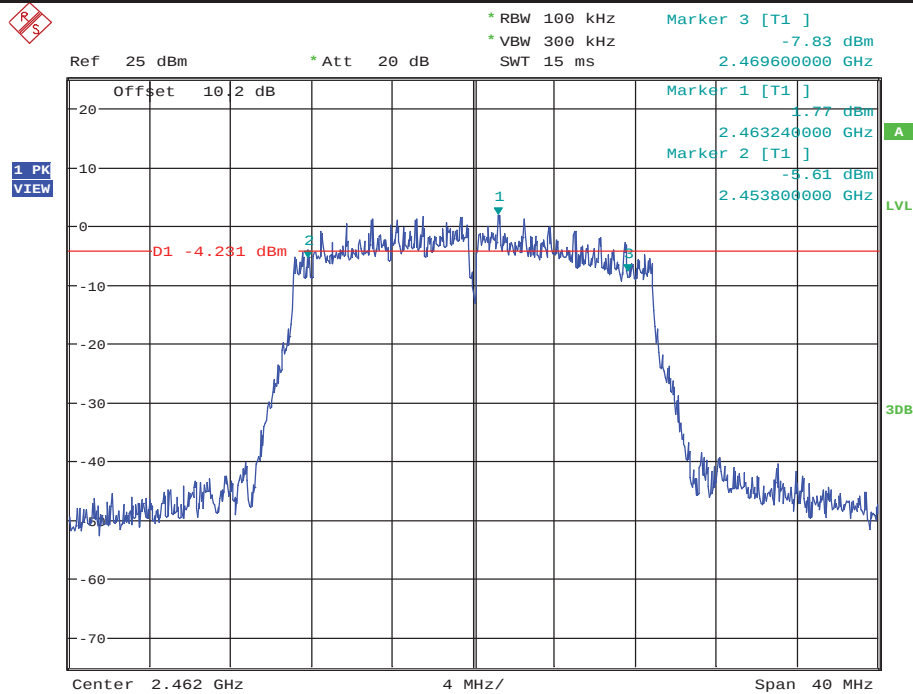


Date: 2.NOV.2017 13:12:59


6dB Bandwidth_11N20MIMO_2462_Ant2

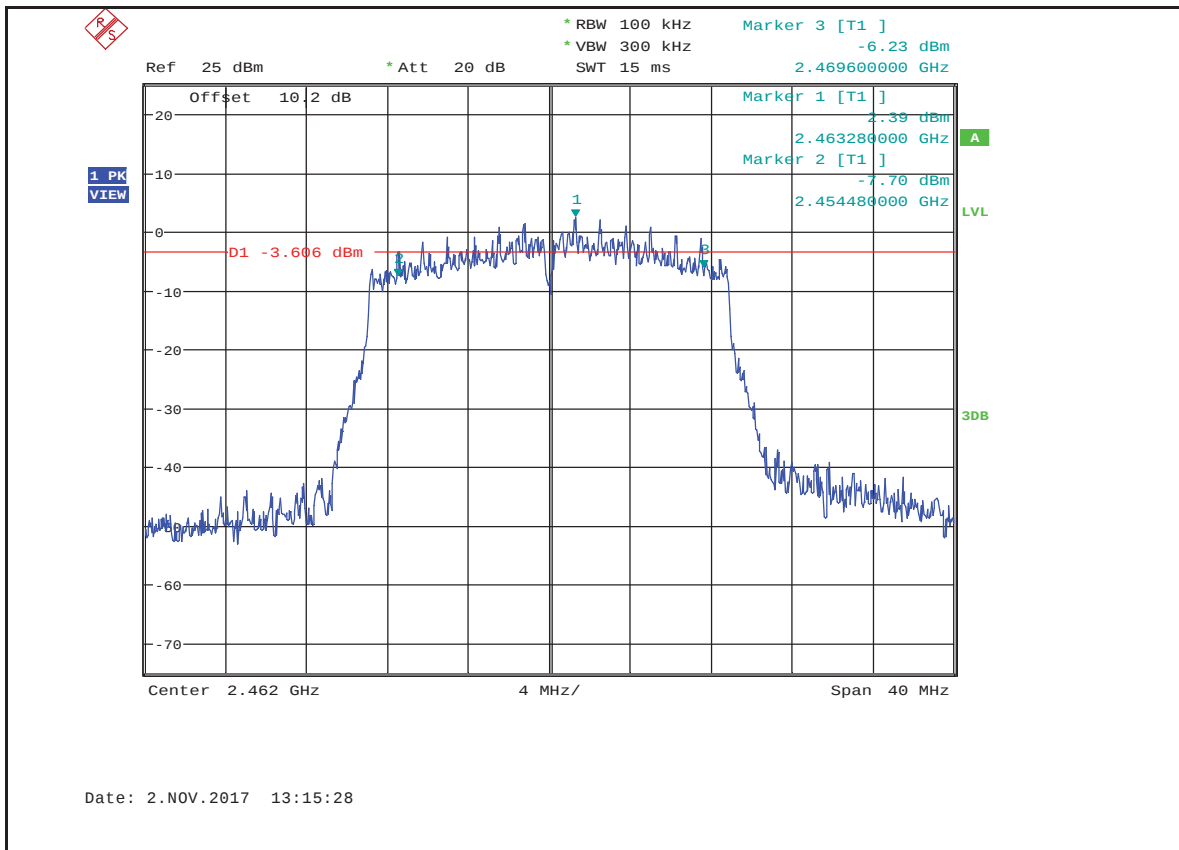


6dB Bandwidth_11N40MIMO_2422_Ant1

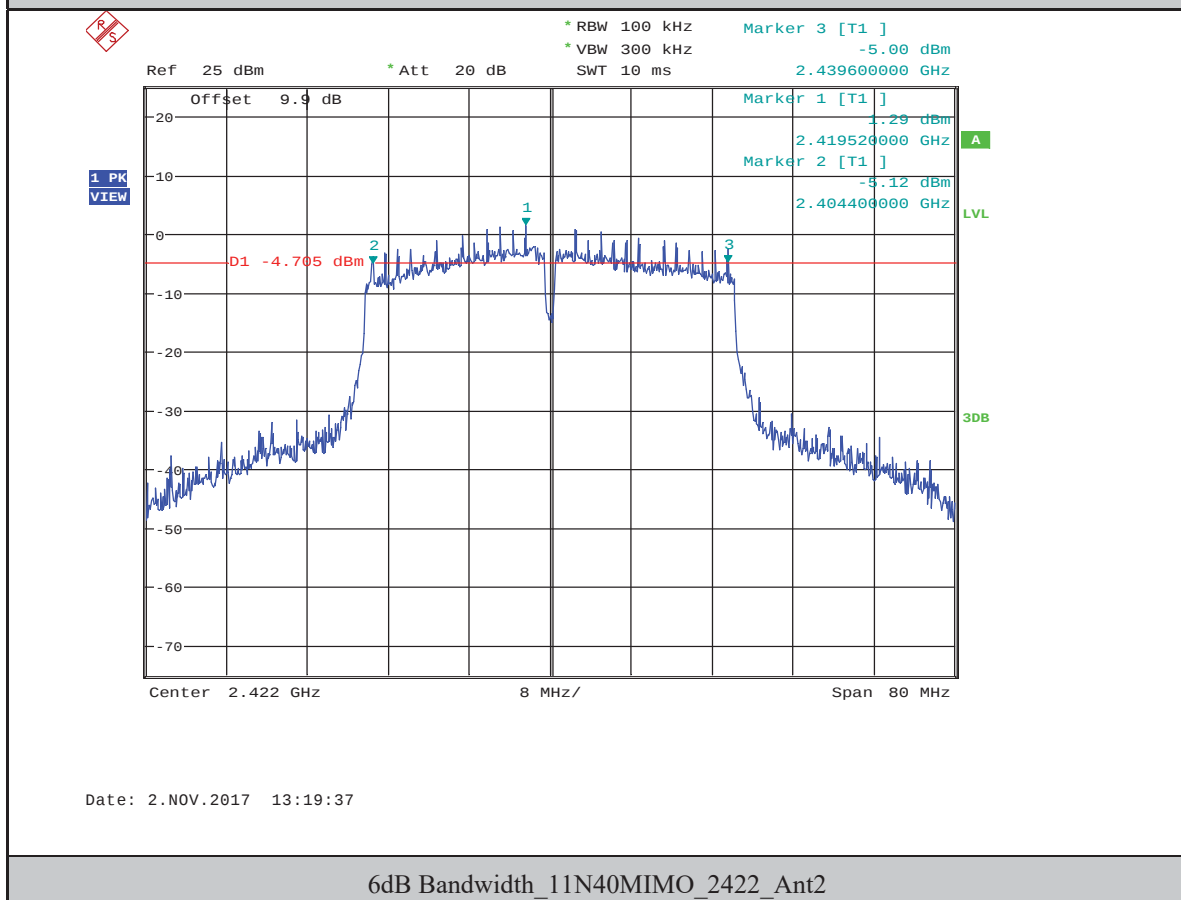


6dB Bandwidth_11N40MIMO_2422_Ant2

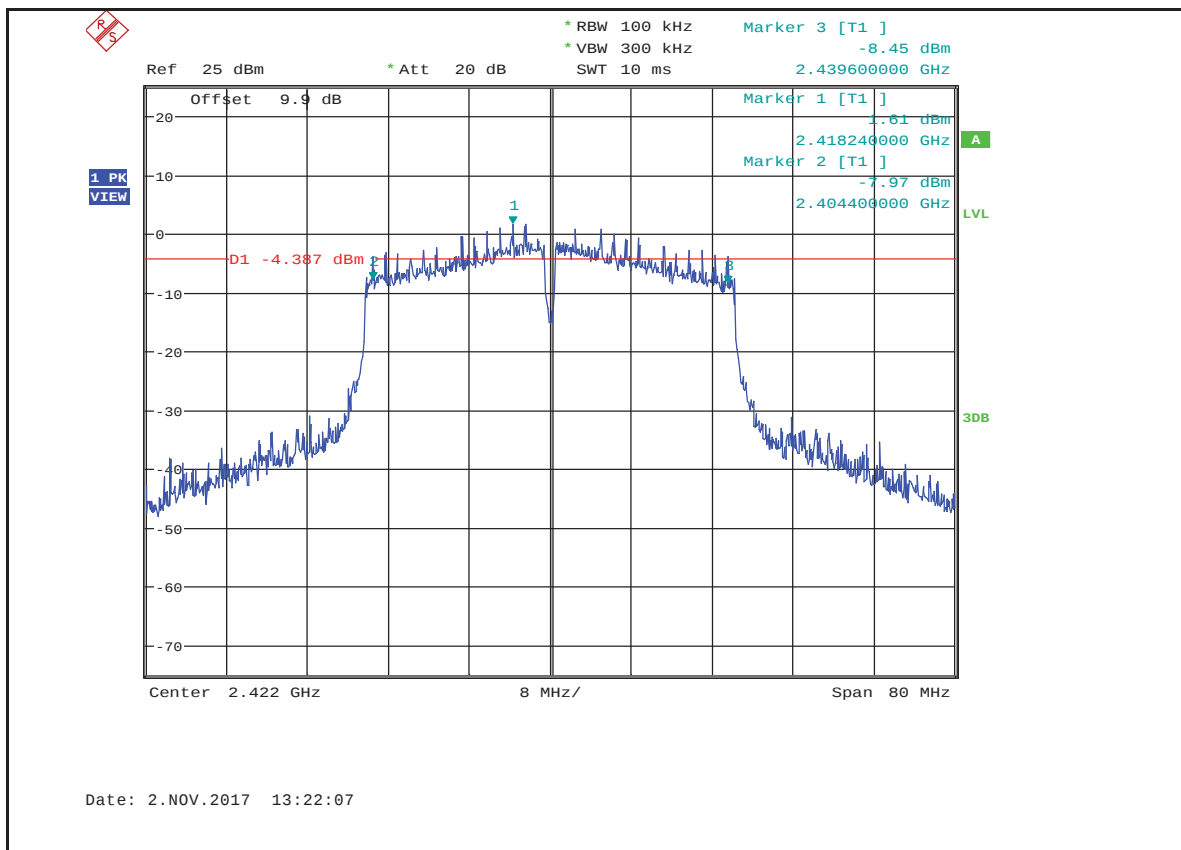


6dB Bandwidth_11N40MIMO_2437_Ant1

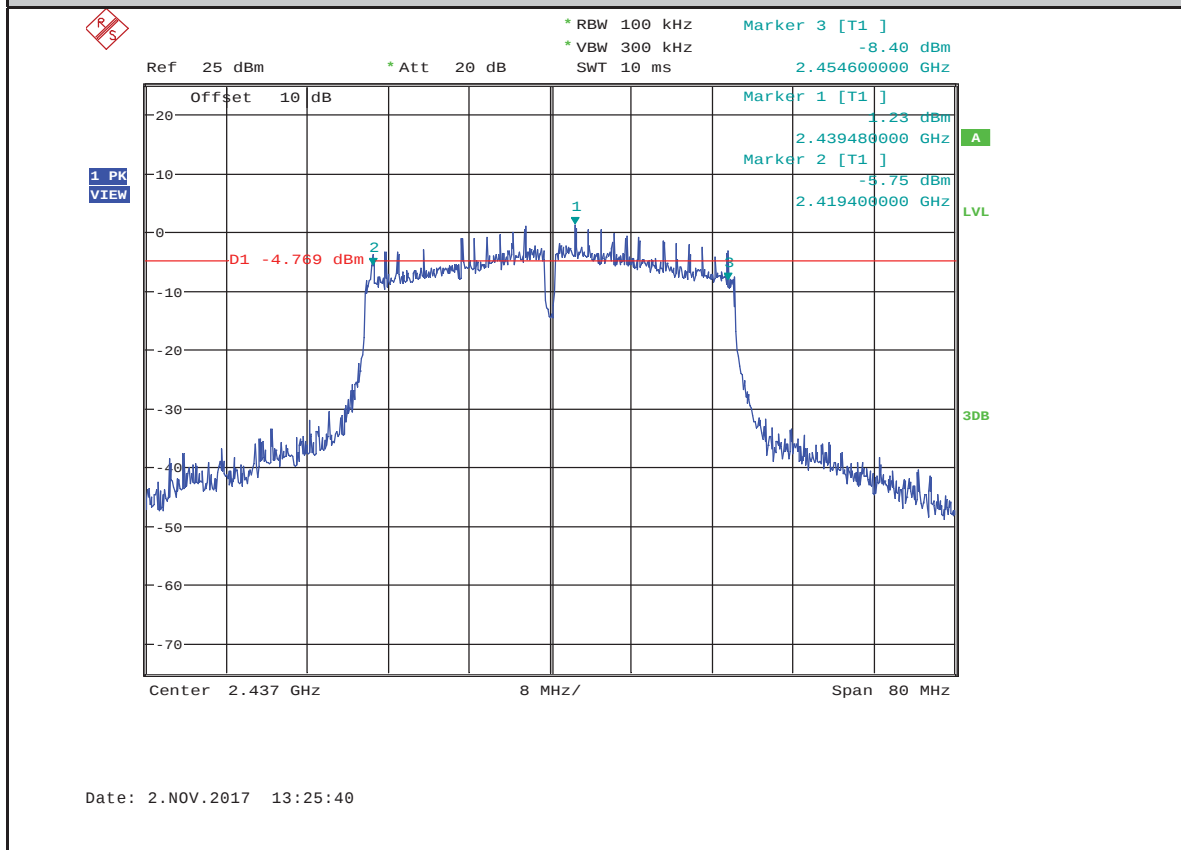



6dB Bandwidth_11N40MIMO_2437_Ant2

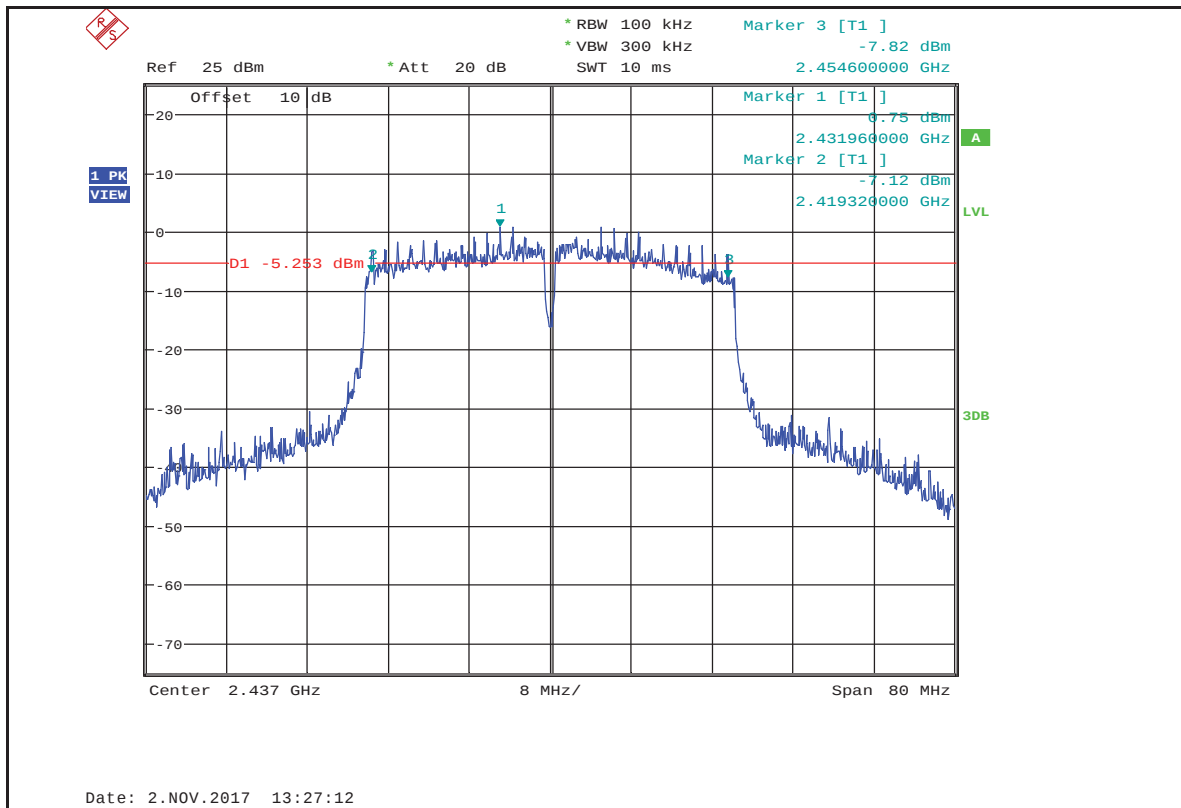


6dB Bandwidth_11N40MIMO_2452_Ant1

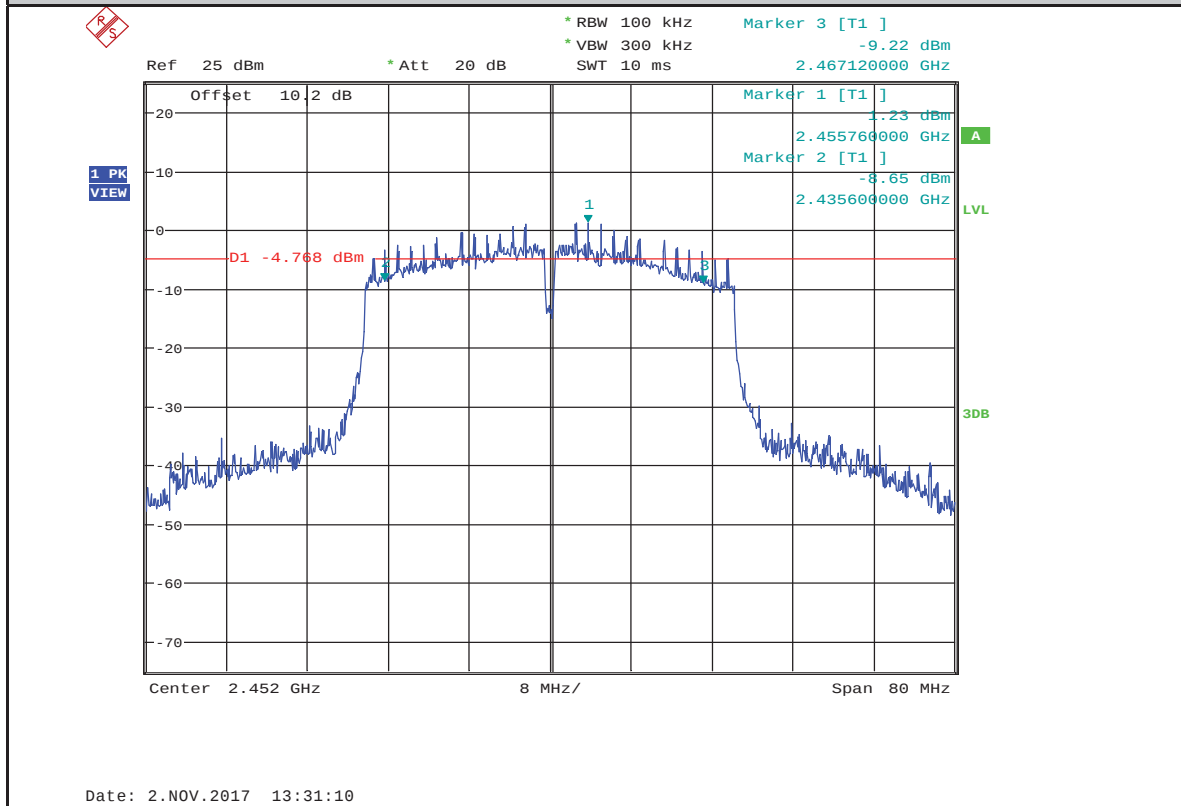

6dB Bandwidth_11N40MIMO_2452_Ant2

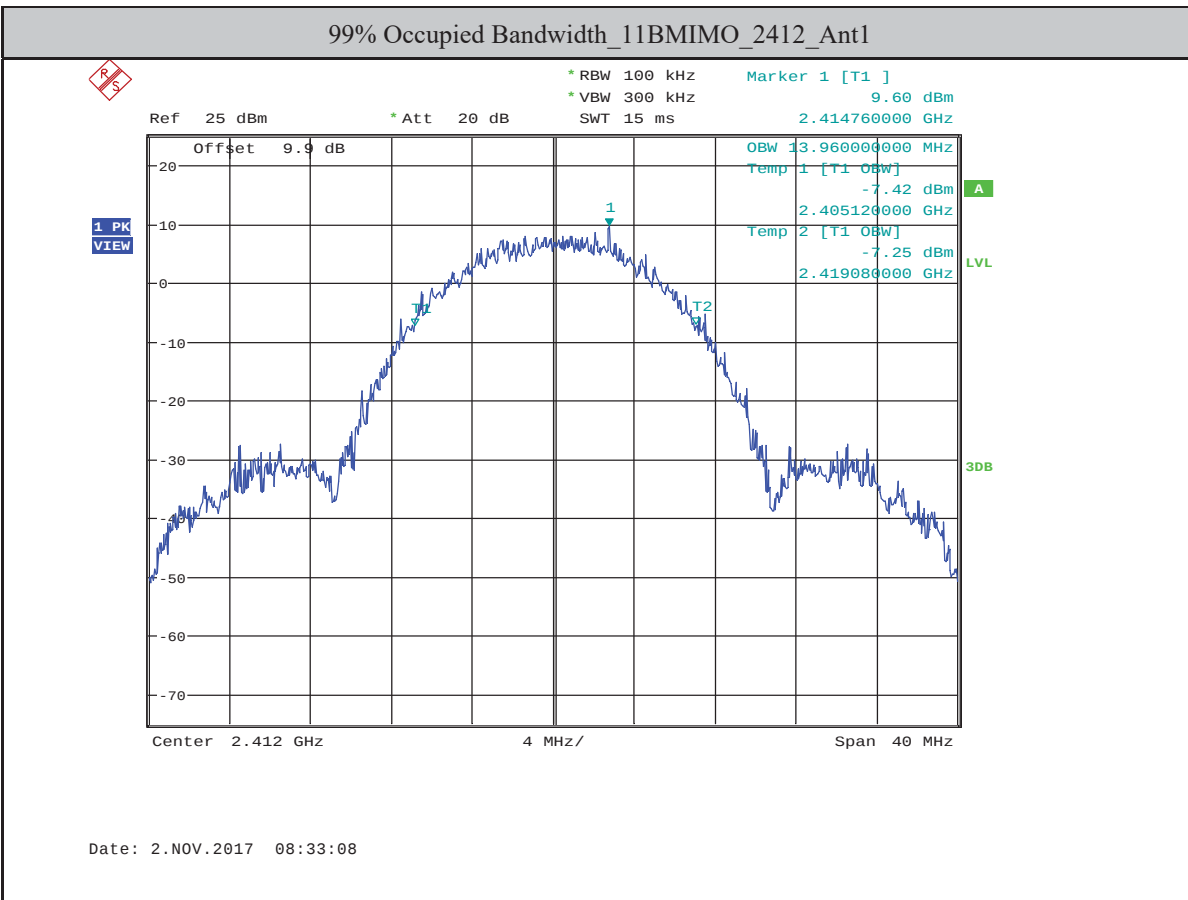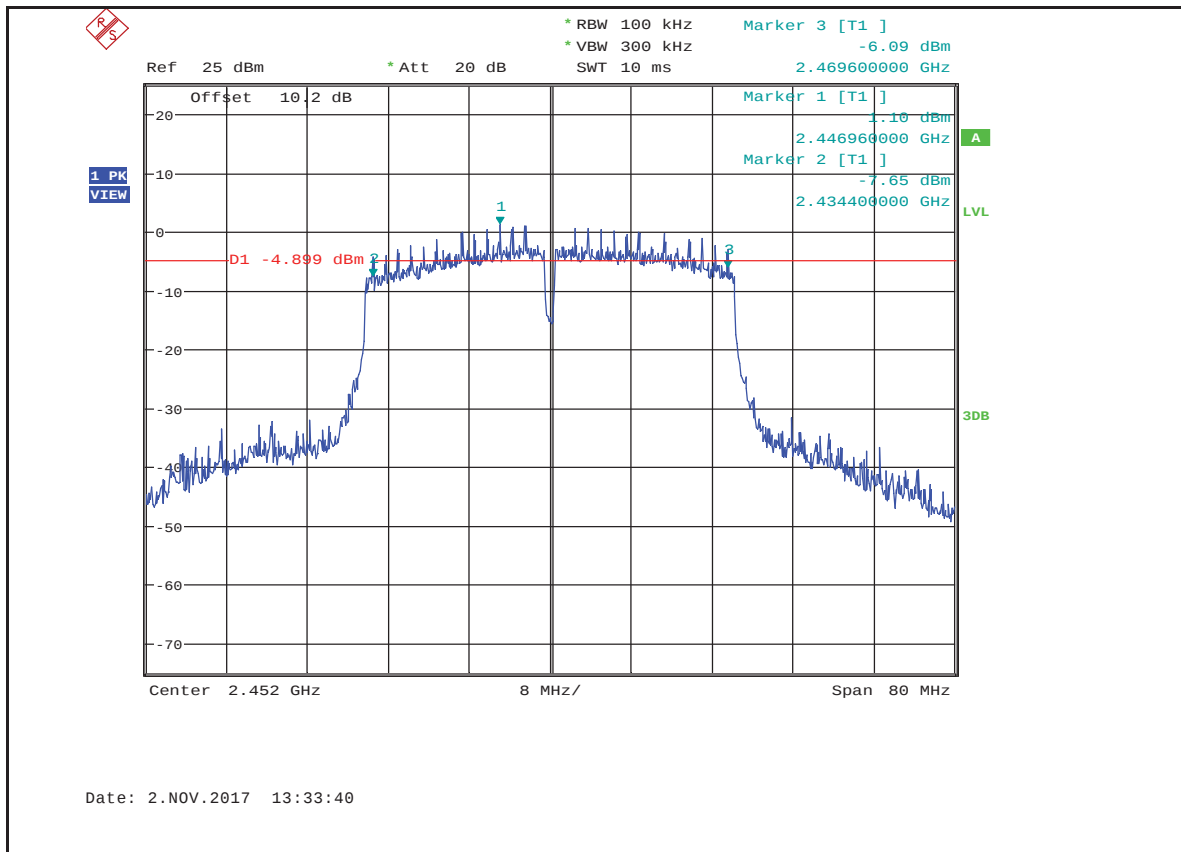


99% Occupied Bandwidth_11BMIMO_2412_Ant2

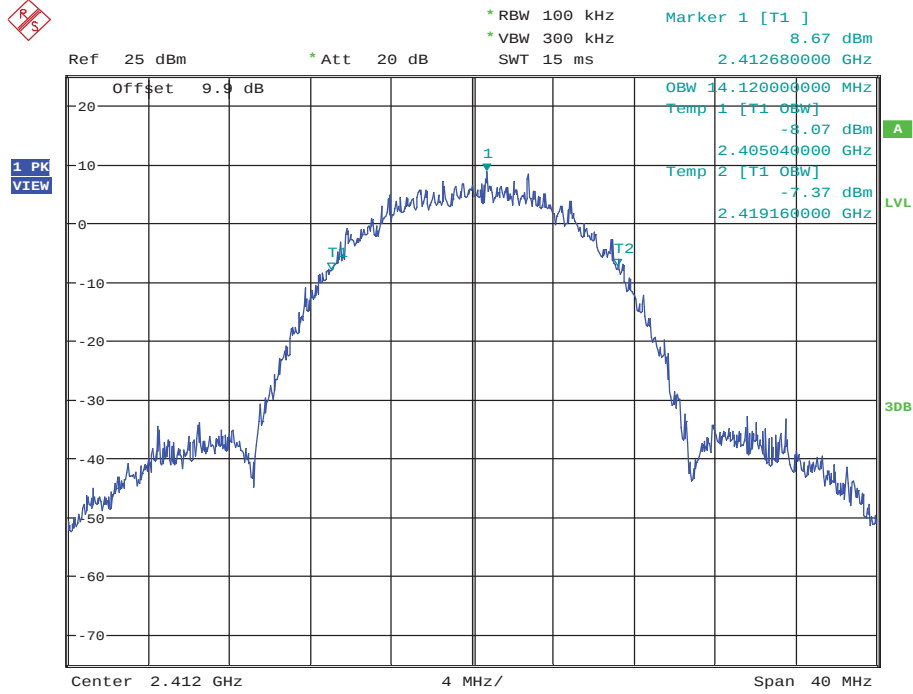


Date: 2.NOV.2017 08:38:24

99% Occupied Bandwidth_11BMIMO_2437_Ant1

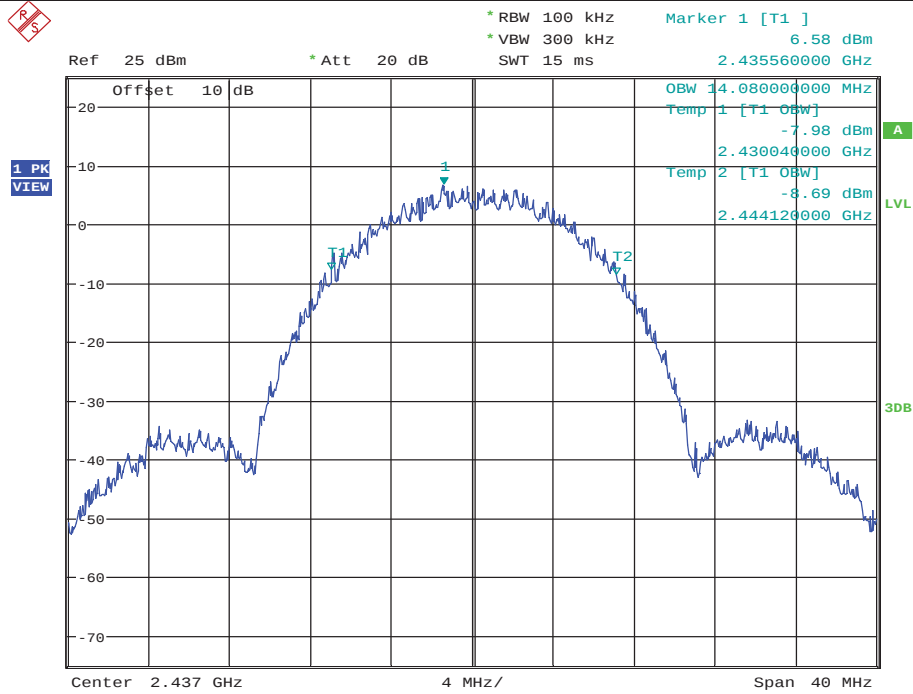


Date: 2.NOV.2017 09:34:52

99% Occupied Bandwidth_11BMIMO_2437_Ant2

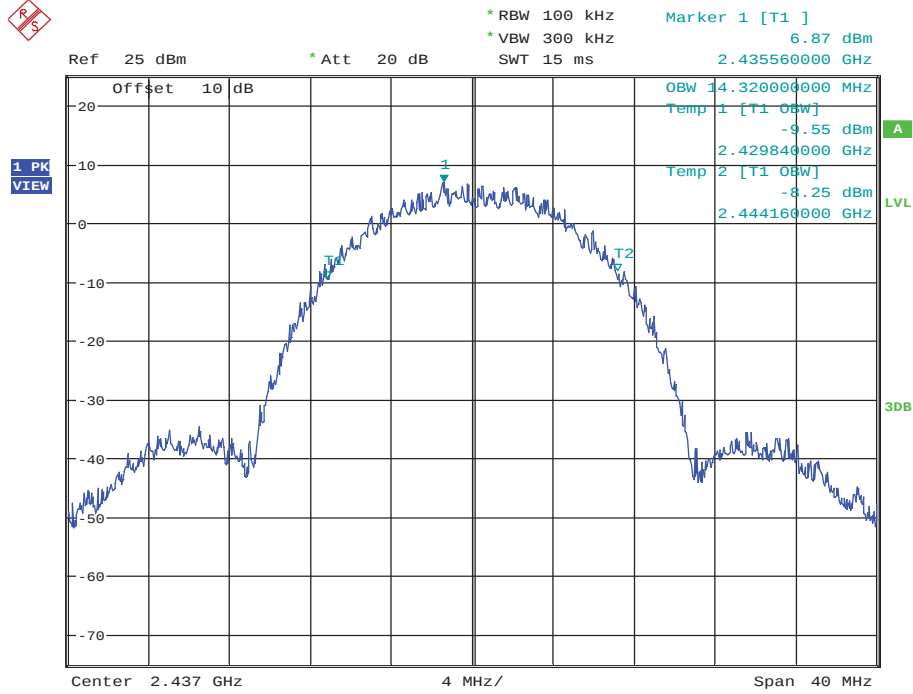


Date: 2.NOV.2017 09:36:24

99% Occupied Bandwidth_11BMIMO_2462_Ant1

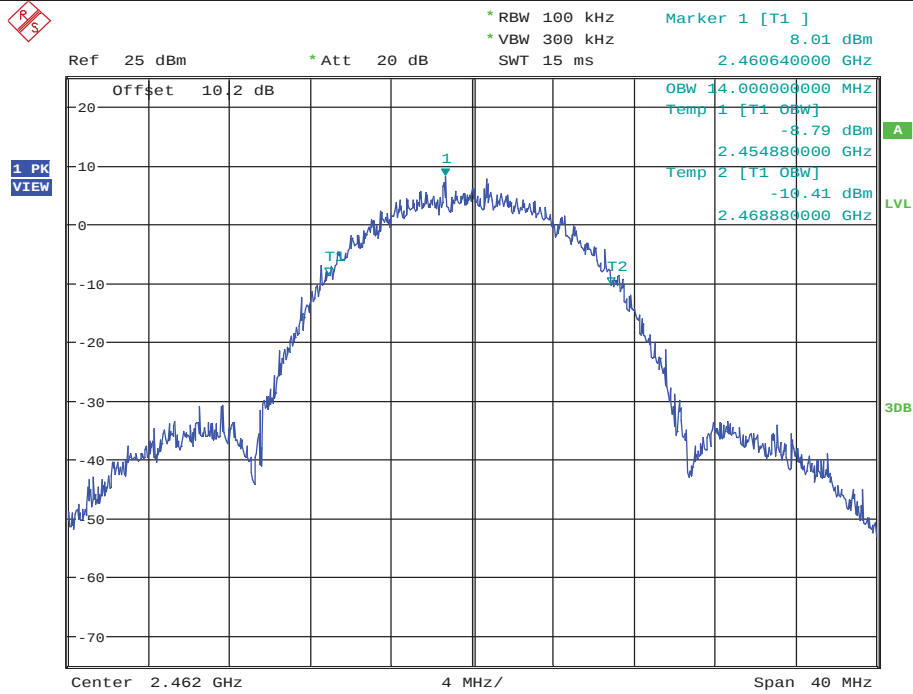


Date: 2.NOV.2017 09:45:03

99% Occupied Bandwidth_11BMIMO_2462_Ant2

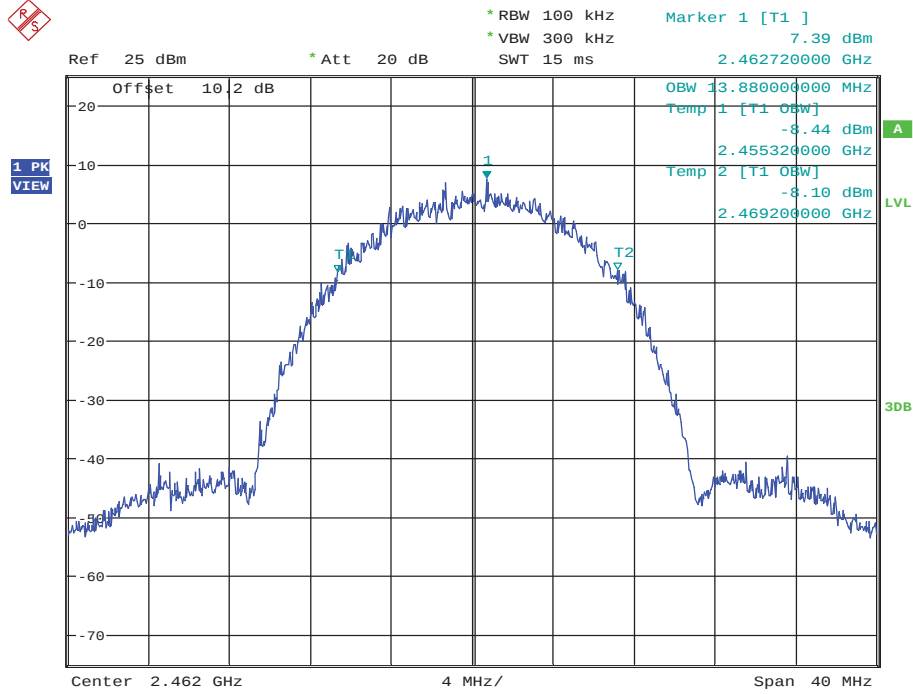


Date: 2.NOV.2017 09:48:08

99% Occupied Bandwidth_11GMIMO_2412_Ant1

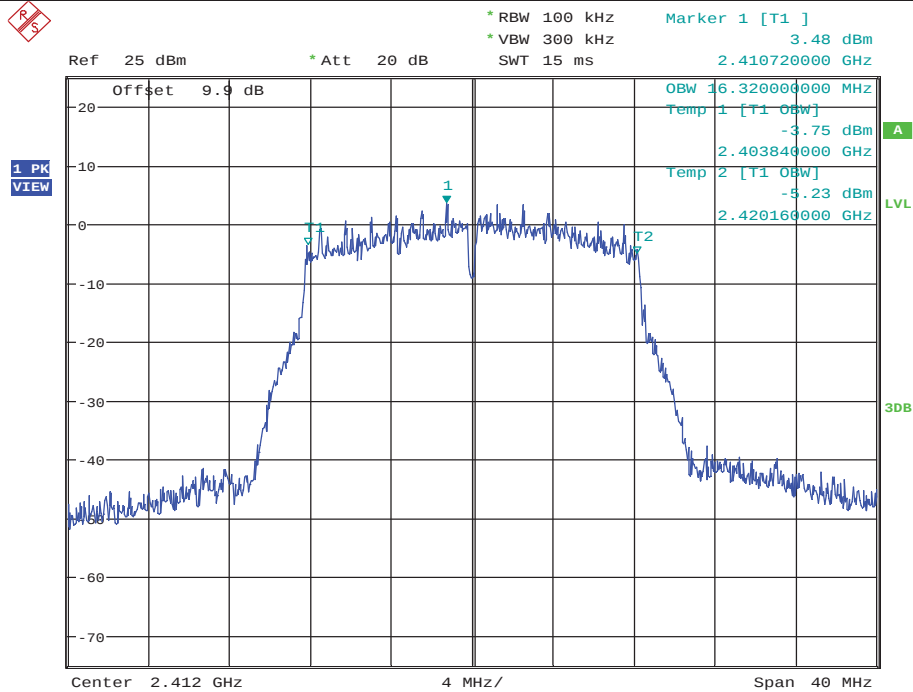


Date: 2.NOV.2017 09:59:06

99% Occupied Bandwidth_11GMIMO_2412_Ant2

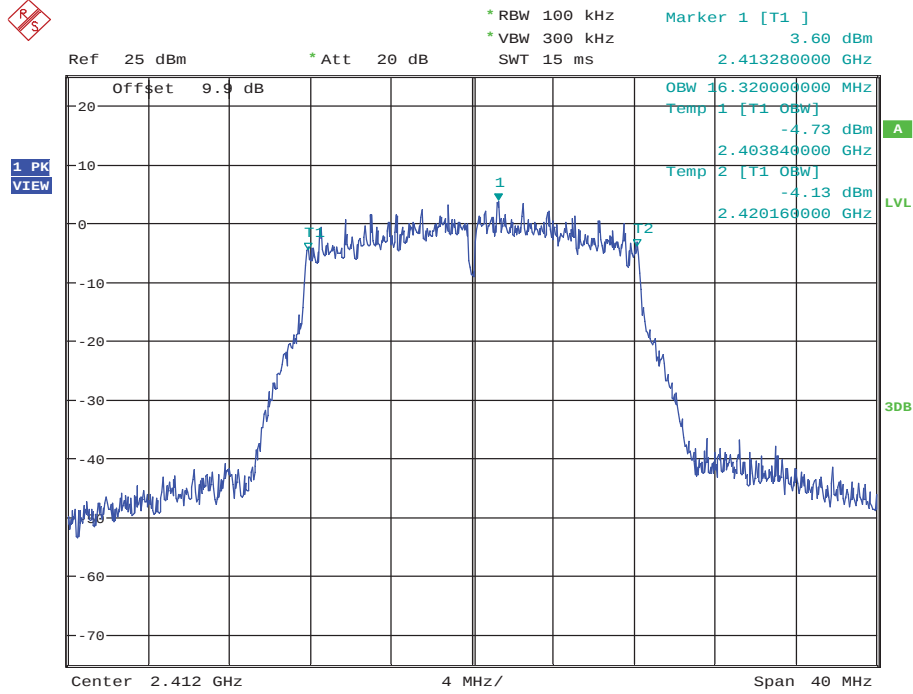


Date: 2.NOV.2017 10:01:34

99% Occupied Bandwidth_11GMIMO_2437_Ant1

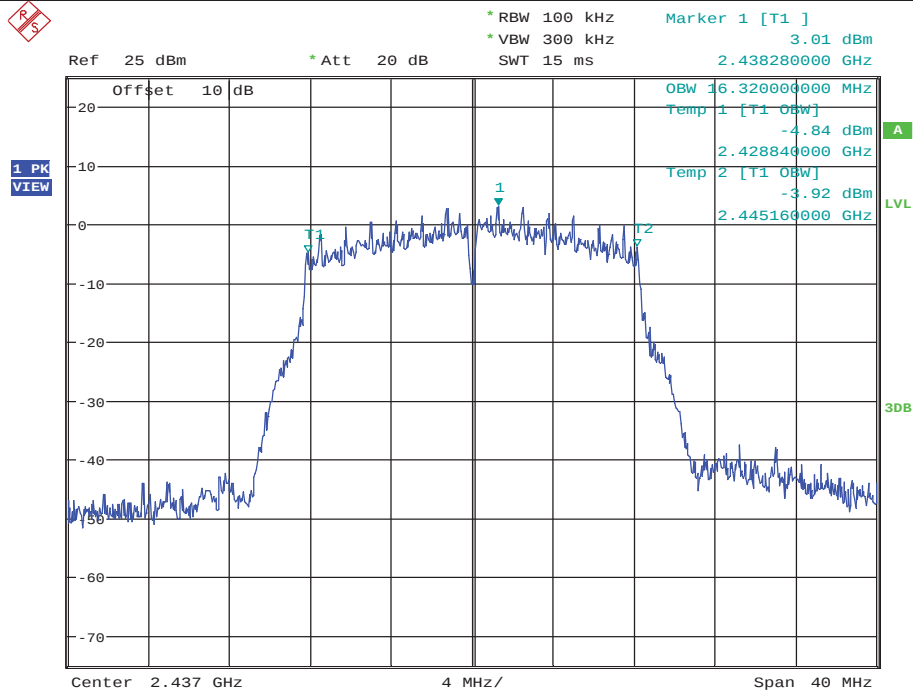


Date: 2.NOV.2017 12:47:34

99% Occupied Bandwidth_11GMIMO_2437_Ant2

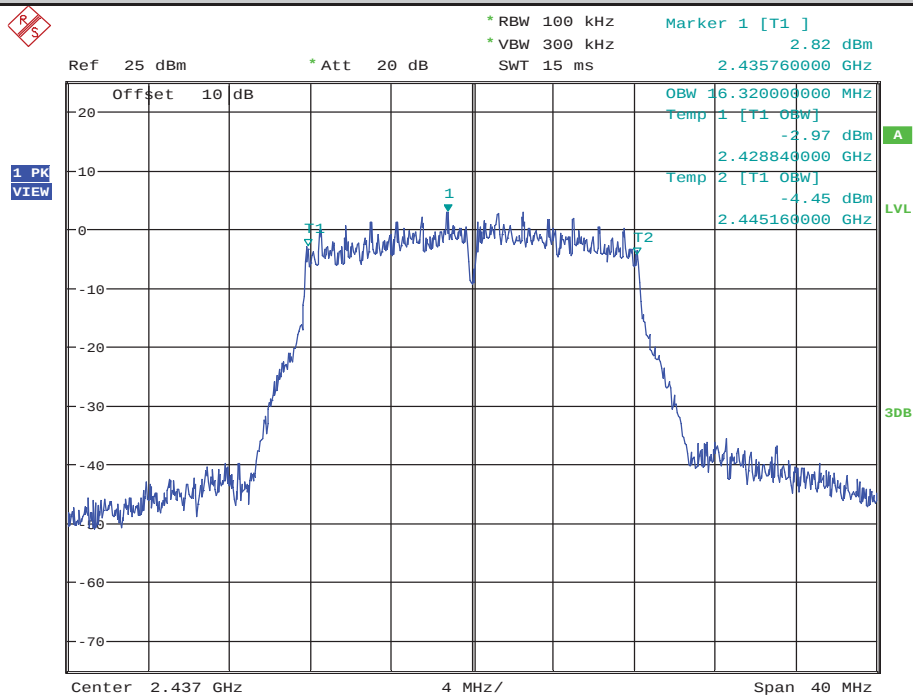


Date: 2.NOV.2017 12:49:06

99% Occupied Bandwidth_11GMIMO_2462_Ant1

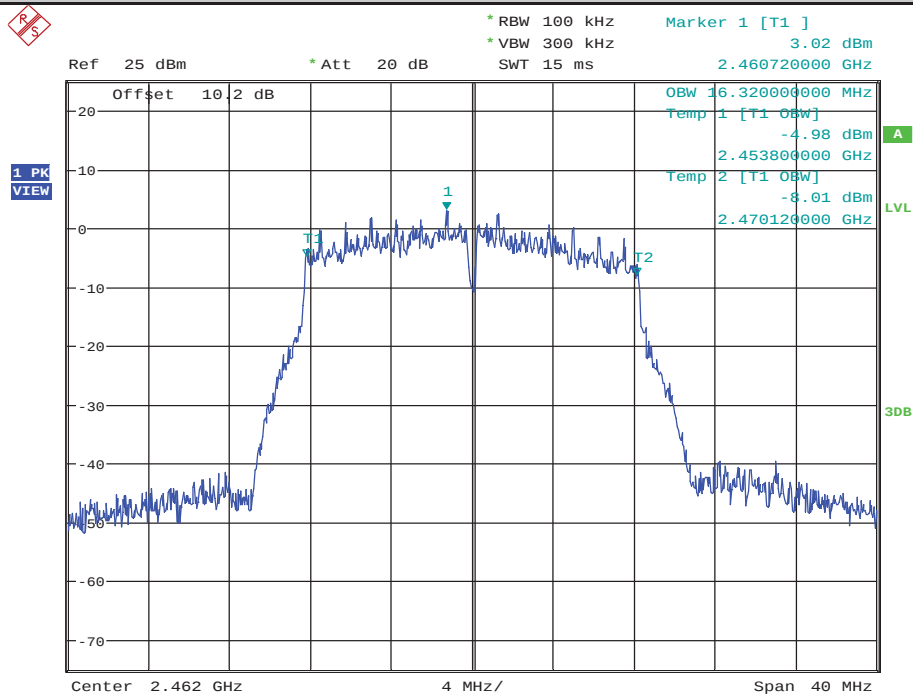


Date: 2.NOV.2017 12:51:21

99% Occupied Bandwidth_11GMIMO_2462_Ant2

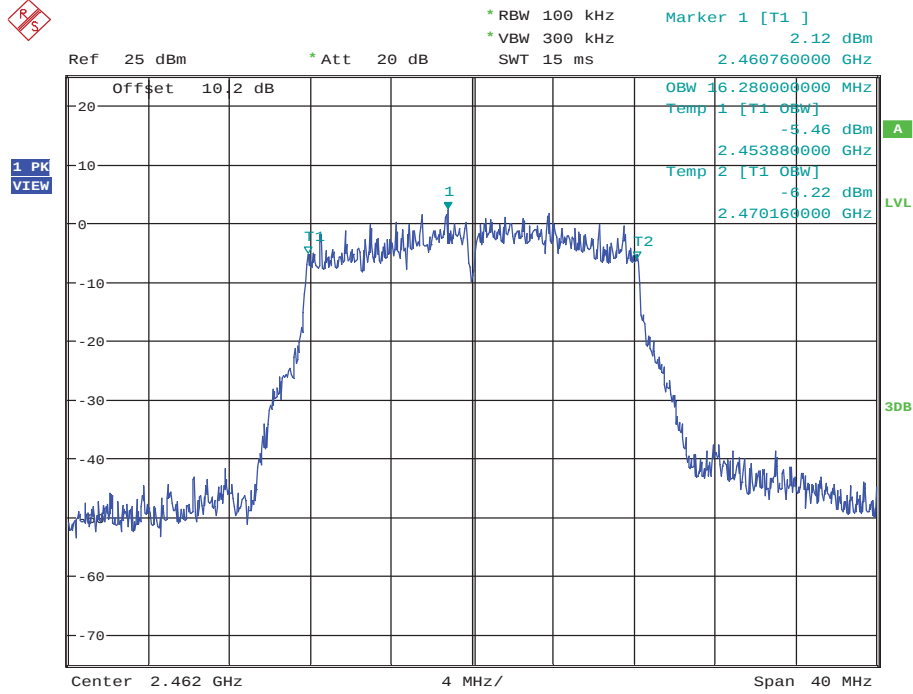


Date: 2.NOV.2017 12:53:51

99% Occupied Bandwidth_11N20MIMO_2412_Ant1

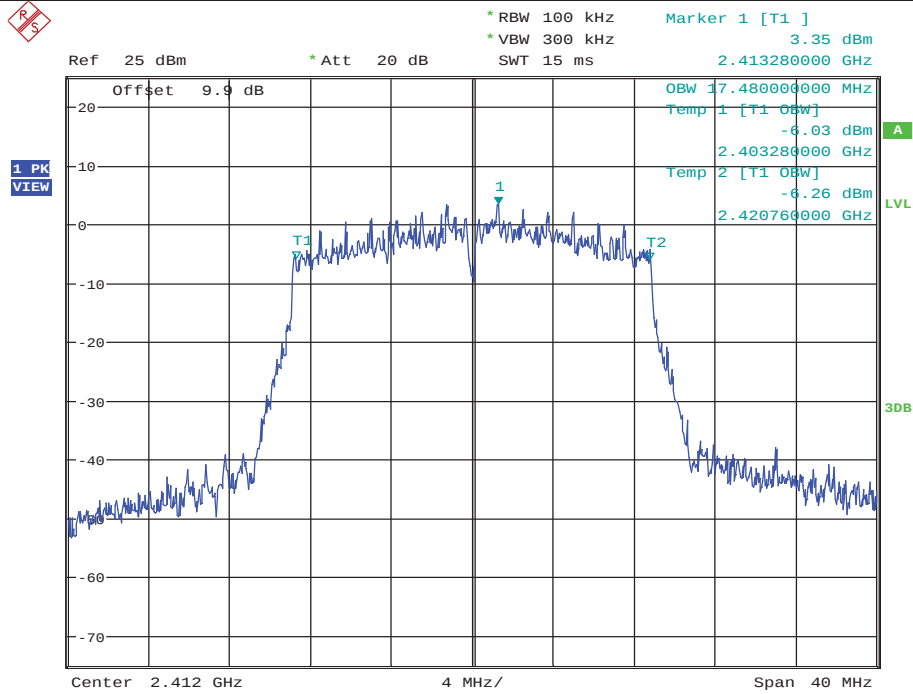


Date: 2.NOV.2017 12:57:40

99% Occupied Bandwidth_11N20MIMO_2412_Ant2

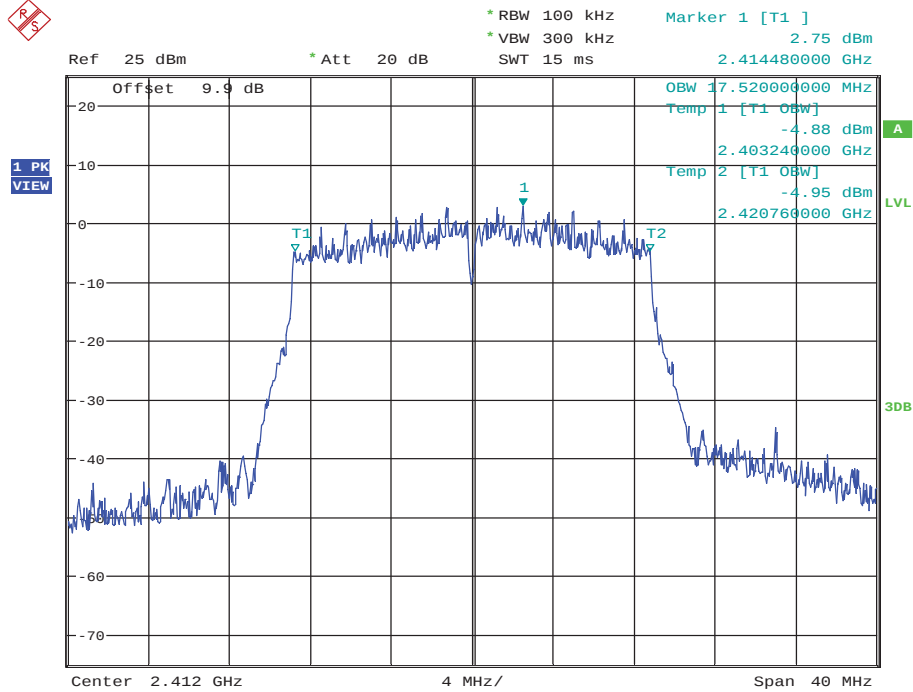


Date: 2.NOV.2017 13:00:10

99% Occupied Bandwidth_11N20MIMO_2437_Ant1

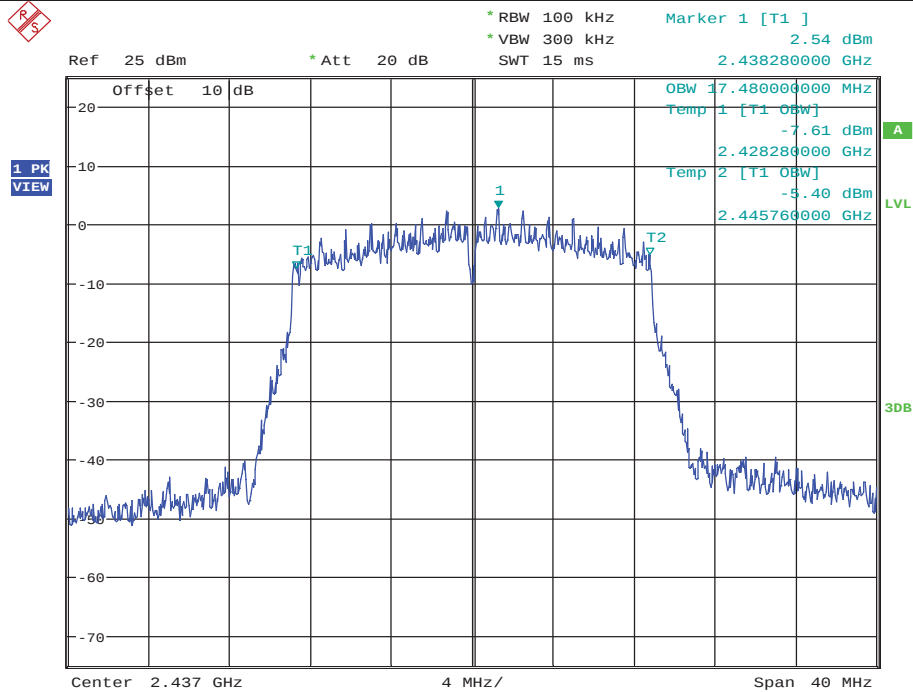


Date: 2.NOV.2017 13:07:31

99% Occupied Bandwidth_11N20MIMO_2437_Ant2

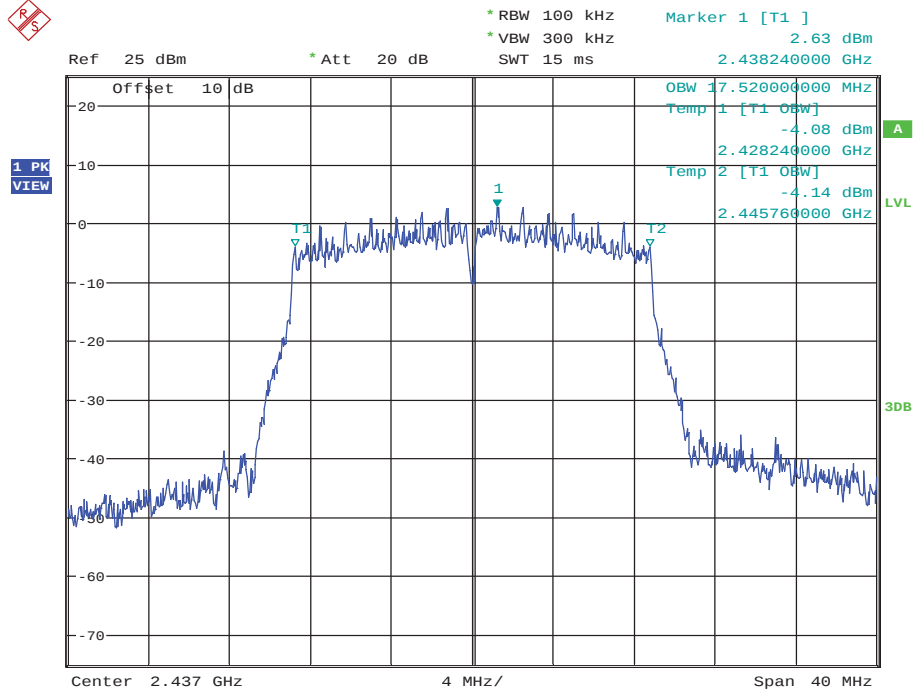


Date: 2.NOV.2017 13:09:04

99% Occupied Bandwidth_11N20MIMO_2462_Ant1

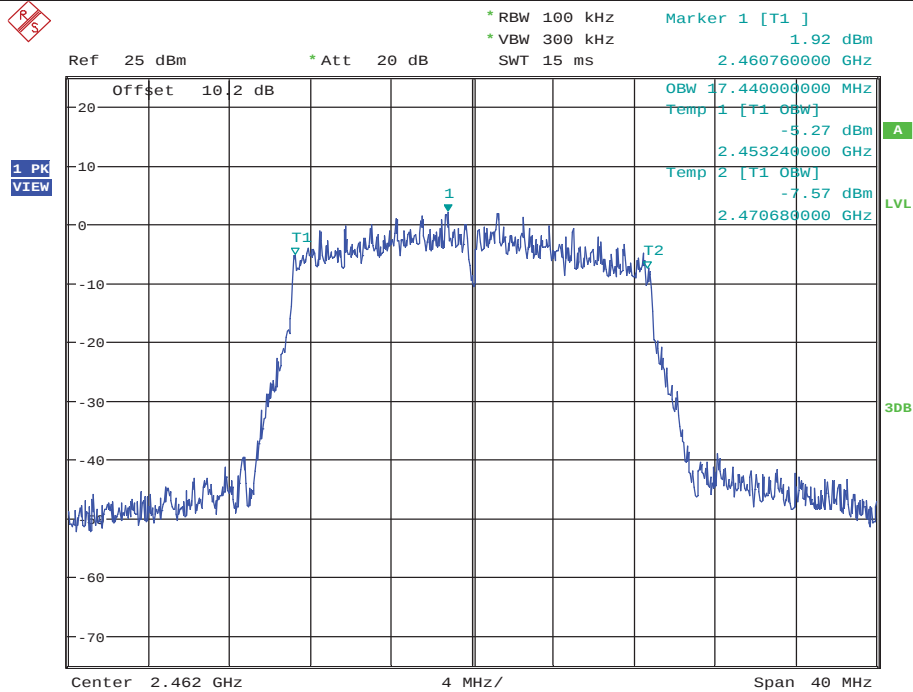


Date: 2.NOV.2017 13:13:17

99% Occupied Bandwidth_11N20MIMO_2462_Ant2

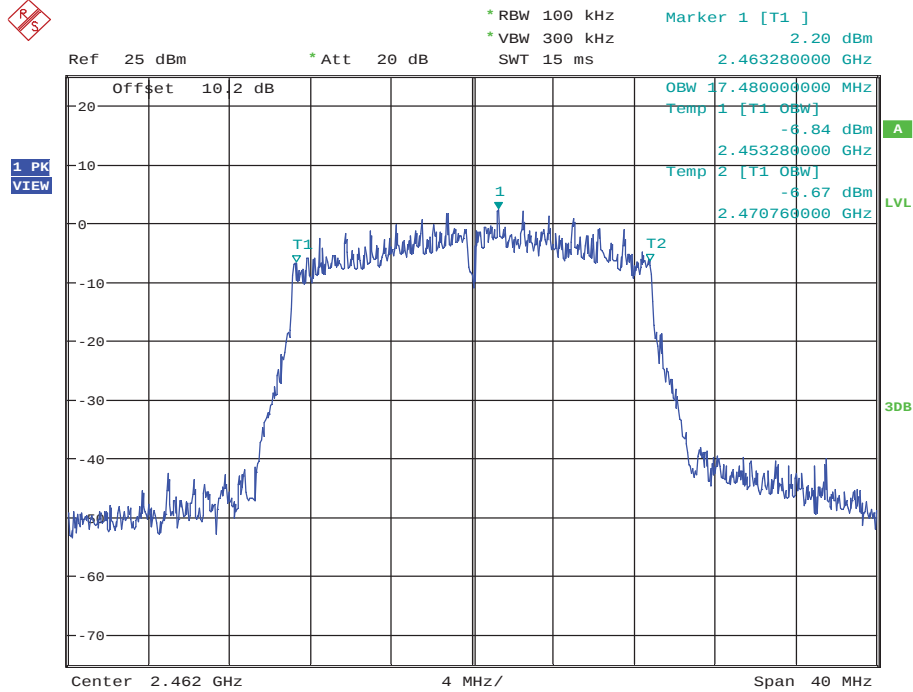


Date: 2.NOV.2017 13:15:46

99% Occupied Bandwidth_11N40MIMO_2422_Ant1

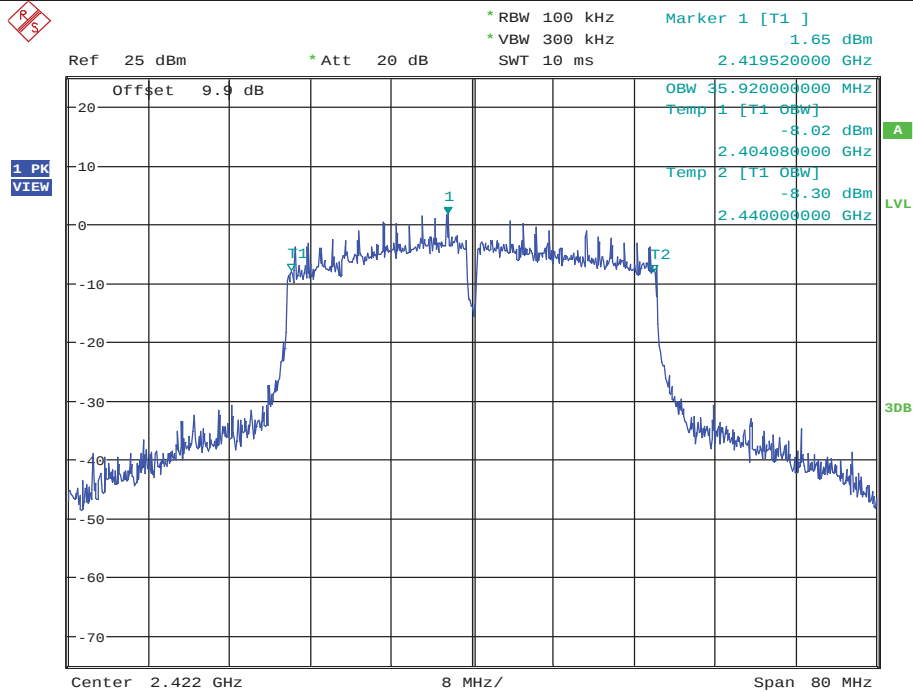


Date: 2.NOV.2017 13:19:55

99% Occupied Bandwidth_11N40MIMO_2422_Ant2

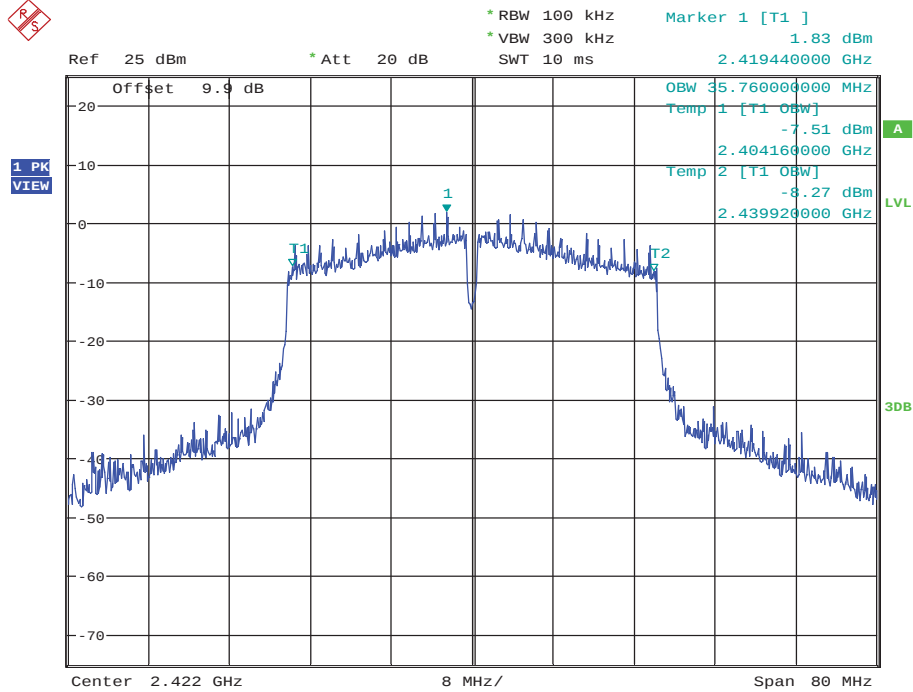


Date: 2.NOV.2017 13:22:25

99% Occupied Bandwidth_11N40MIMO_2437_Ant1

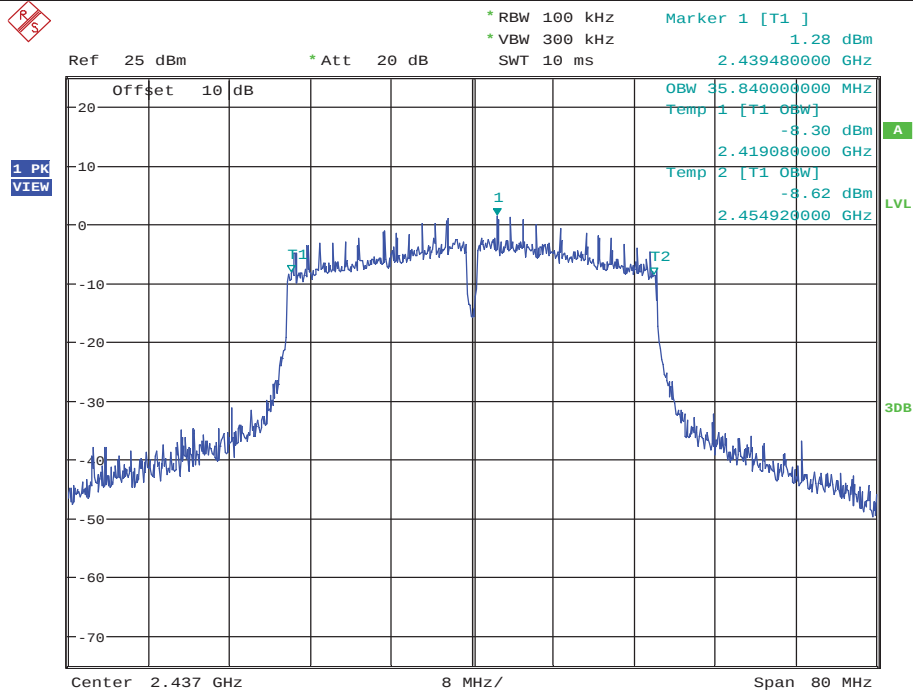


Date: 2.NOV.2017 13:25:58

99% Occupied Bandwidth_11N40MIMO_2437_Ant2

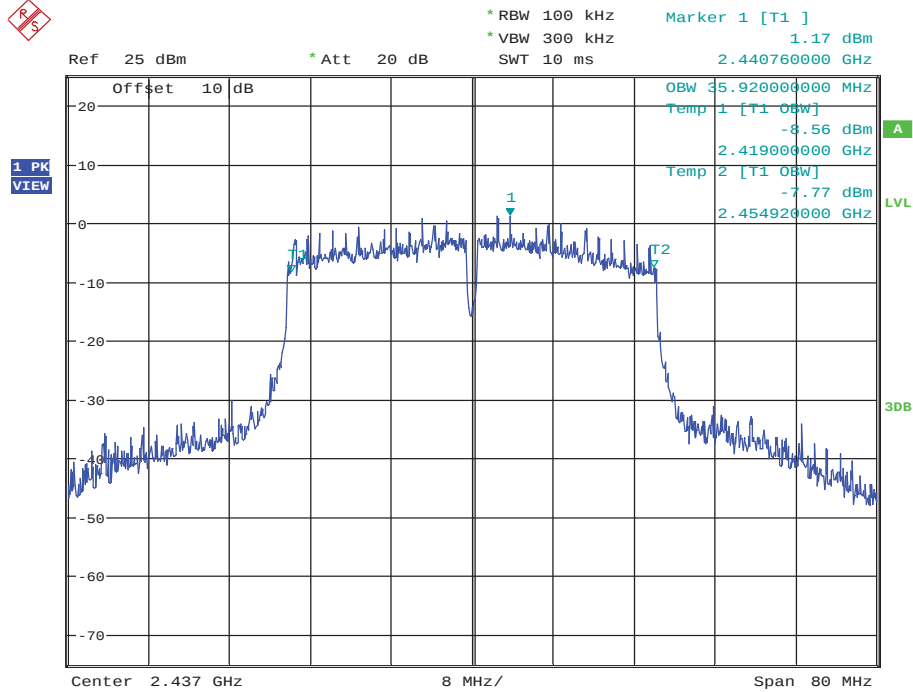


Date: 2.NOV.2017 13:27:30

99% Occupied Bandwidth_11N40MIMO_2452_Ant1

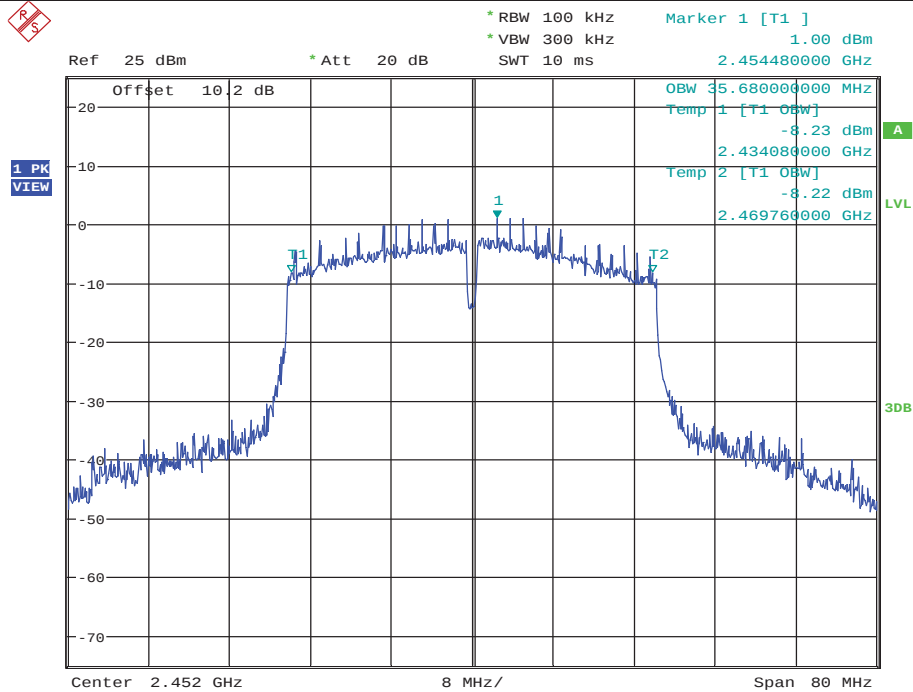

Date: 2.NOV.2017 13:31:28

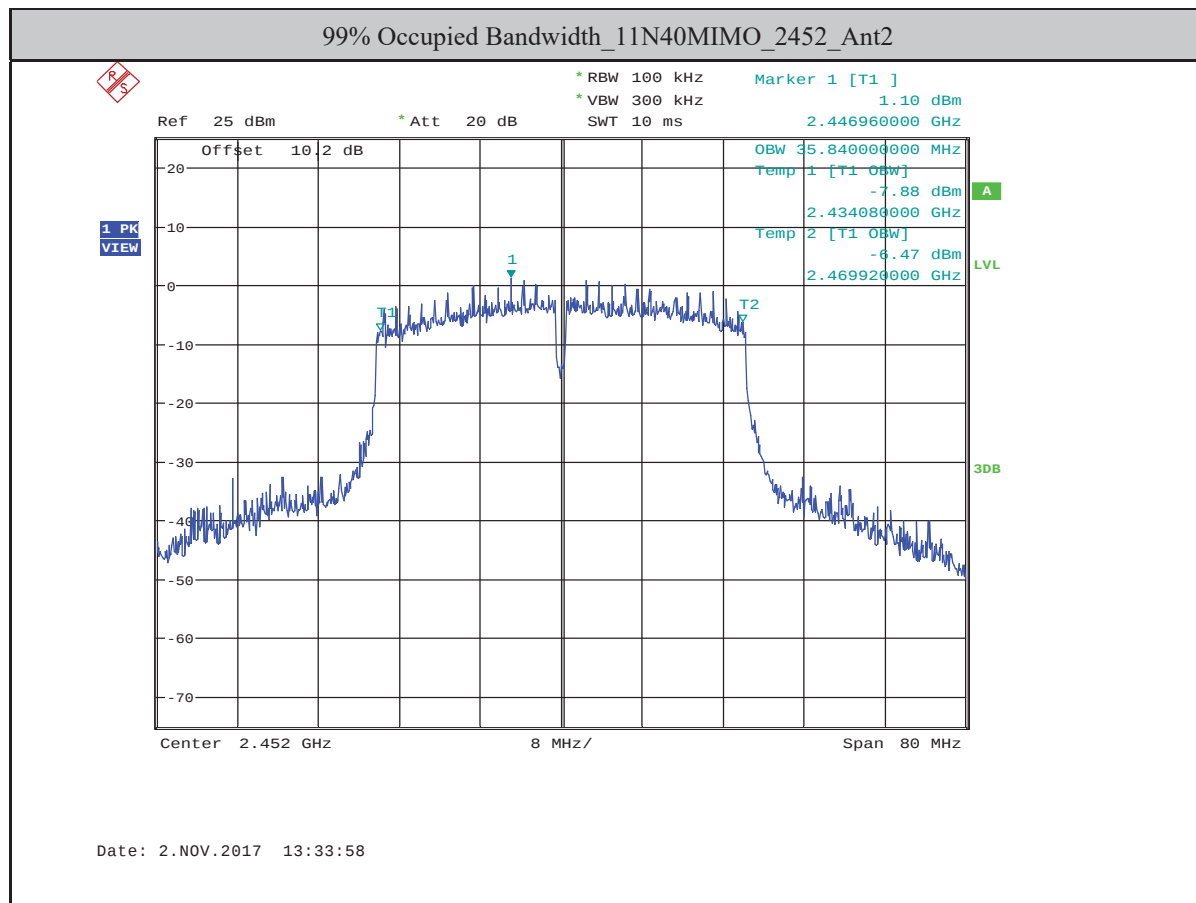

5 Conducted peak Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power sensor.

5.4. Test Result

Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
11B	2412	Ant1	23.48	30	PASS
11B	2412	Ant2	22.07	30	PASS
11B	2412	Ant1+ Ant2	25.84	30	PASS
11B	2437	Ant1	22.14	30	PASS
11B	2437	Ant2	22.30	30	PASS
11B	2437	Ant1+ Ant2	25.23	30	PASS
11B	2462	Ant1	21.72	30	PASS
11B	2462	Ant2	20.81	30	PASS
11B	2462	Ant1+ Ant2	24.30	30	PASS
11G	2412	Ant1	21.46	30	PASS
11G	2412	Ant2	21.18	30	PASS
11G	2412	Ant1+ Ant2	24.33	30	PASS
11G	2437	Ant1	20.94	30	PASS
11G	2437	Ant2	21.52	30	PASS
11G	2437	Ant1+ Ant2	24.25	30	PASS
11G	2462	Ant1	20.86	30	PASS
11G	2462	Ant2	20.80	30	PASS
11G	2462	Ant1+ Ant2	23.84	30	PASS
11N20	2412	Ant1	21.26	30	PASS
11N20	2412	Ant2	21.10	30	PASS
11N20	2412	Ant1+ Ant2	24.19	30	PASS
11N20	2437	Ant1	20.36	30	PASS
11N20	2437	Ant2	20.93	30	PASS
11N20	2437	Ant1+ Ant2	23.66	30	PASS
11N20	2462	Ant1	20.25	30	PASS
11N20	2462	Ant2	19.96	30	PASS
11N20	2462	Ant1+ Ant2	23.12	30	PASS
11N40	2422	Ant1	21.44	30	PASS
11N40	2422	Ant2	22.96	30	PASS
11N40	2422	Ant1+ Ant2	25.28	30	PASS

11N40	2437	Ant1	21.04	30	PASS
11N40	2437	Ant2	23.04	30	PASS
11N40	2437	Ant1+ Ant2	25.16	30	PASS
11N40	2452	Ant1	20.88	30	PASS
11N40	2452	Ant2	23.04	30	PASS
11N40	2452	Ant1+ Ant2	25.10	30	PASS

Max EIRP is MIMO mode 11b 2412MHz: 25.84dBm+5.72dBi=31.56dBm<36dBm

6 Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.


(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test Result


Test Mode	Test Channel	Ant	PSD[dBm]	Limit[dBm/KHz]	Verdict
11B	2412	Ant1	-4.98	8.00	PASS
11B	2412	Ant2	-6.22	8.00	PASS
11B	2412	Ant1+Ant2	-2.99	8.00	PASS
11B	2437	Ant1	-6.80	8.00	PASS
11B	2437	Ant2	-6.36	8.00	PASS
11B	2437	Ant1+Ant2	-3.56	8.00	PASS
11B	2462	Ant1	-5.68	8.00	PASS
11B	2462	Ant2	-5.67	8.00	PASS
11B	2462	Ant1+Ant2	-2.66	8.00	PASS
11G	2412	Ant1	-11.97	8.00	PASS
11G	2412	Ant2	-11.89	8.00	PASS
11G	2412	Ant1+Ant2	-8.92	8.00	PASS
11G	2437	Ant1	-13.03	8.00	PASS
11G	2437	Ant2	-11.82	8.00	PASS
11G	2437	Ant1+Ant2	-9.37	8.00	PASS
11G	2462	Ant1	-12.76	8.00	PASS
11G	2462	Ant2	-13.10	8.00	PASS
11G	2462	Ant1+Ant2	-9.92	8.00	PASS
11N20	2412	Ant1	-12.05	8.00	PASS
11N20	2412	Ant2	-11.45	8.00	PASS
11N20	2412	Ant1+Ant2	-8.73	8.00	PASS
11N20	2437	Ant1	-11.54	8.00	PASS
11N20	2437	Ant2	-12.56	8.00	PASS
11N20	2437	Ant1+Ant2	-9.01	8.00	PASS
11N20	2462	Ant1	-12.48	8.00	PASS
11N20	2462	Ant2	-12.45	8.00	PASS
11N20	2462	Ant1+Ant2	-9.45	8.00	PASS
11N40	2422	Ant1	-17.69	8.00	PASS
11N40	2422	Ant2	-18.07	8.00	PASS
11N40	2422	Ant1+Ant2	-14.87	8.00	PASS
11N40	2437	Ant1	-18.64	8.00	PASS
11N40	2437	Ant2	-19.03	8.00	PASS
11N40	2437	Ant1+Ant2	-15.82	8.00	PASS
11N40	2452	Ant1	-17.72	8.00	PASS
11N40	2452	Ant2	-16.97	8.00	PASS
11N40	2452	Ant1+Ant2	-14.32	8.00	PASS

6.5. original test data


Maximum Peak power spectral density_11BMIMO_2412_Ant1

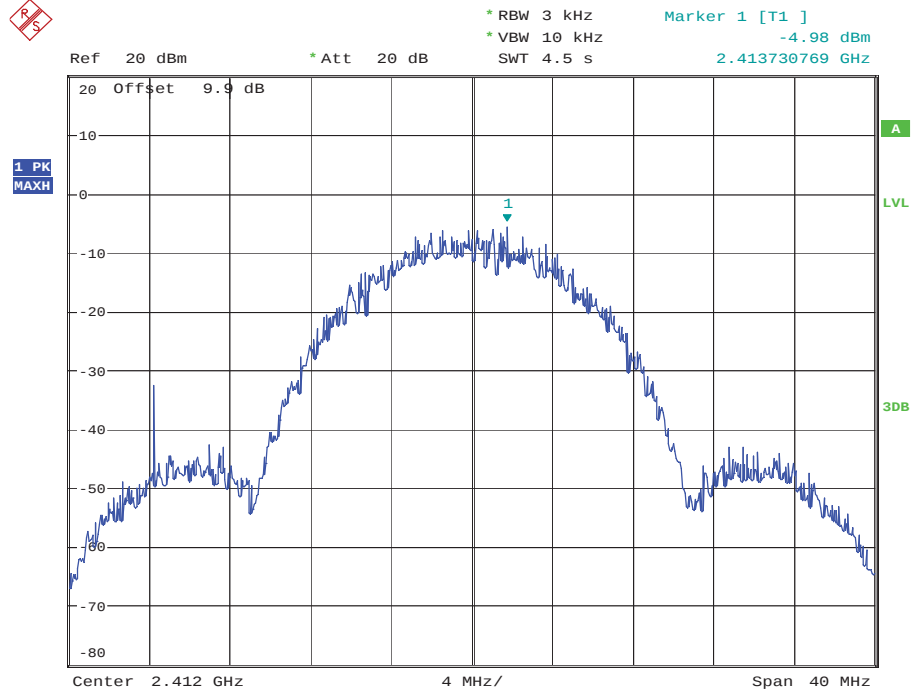


Maximum Peak power spectral density_11BMIMO_2412_Ant2

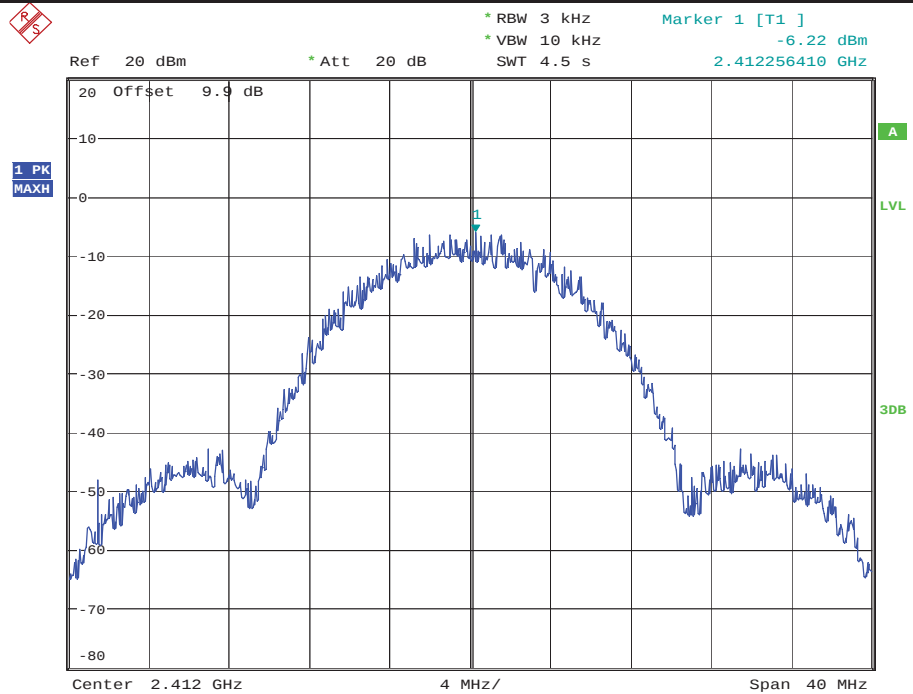


Maximum Peak power spectral density_11BMIMO_2437_Ant1

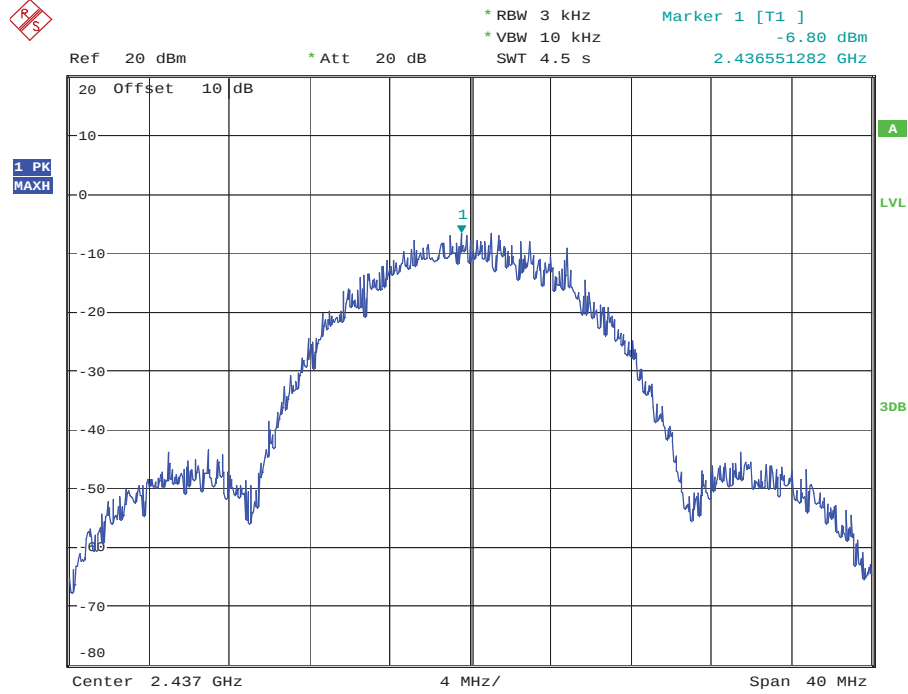


Maximum Peak power spectral density_11BMIMO_2437_Ant2

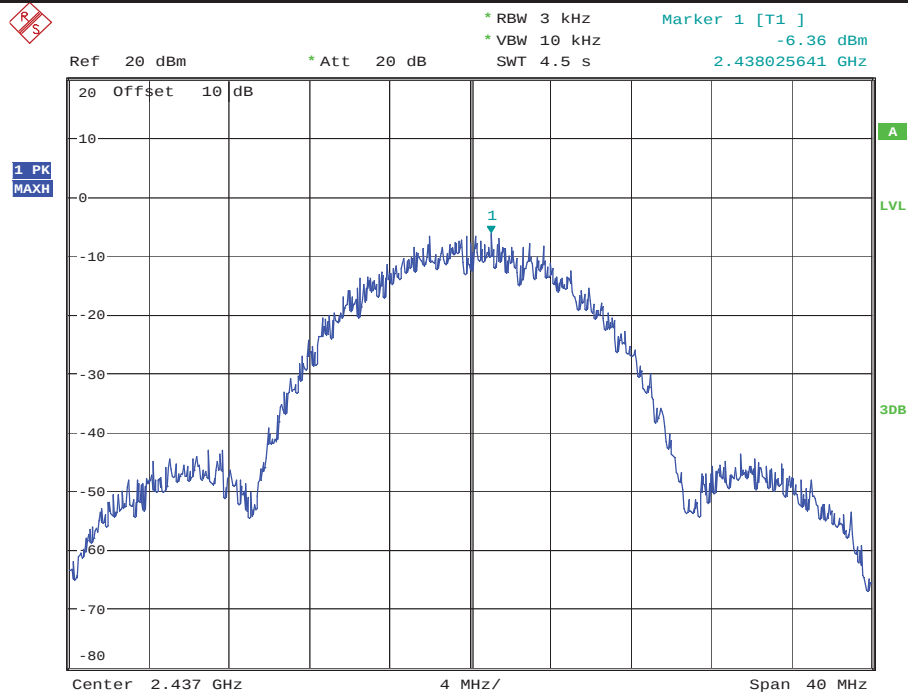


Maximum Peak power spectral density_11BMIMO_2462_Ant1

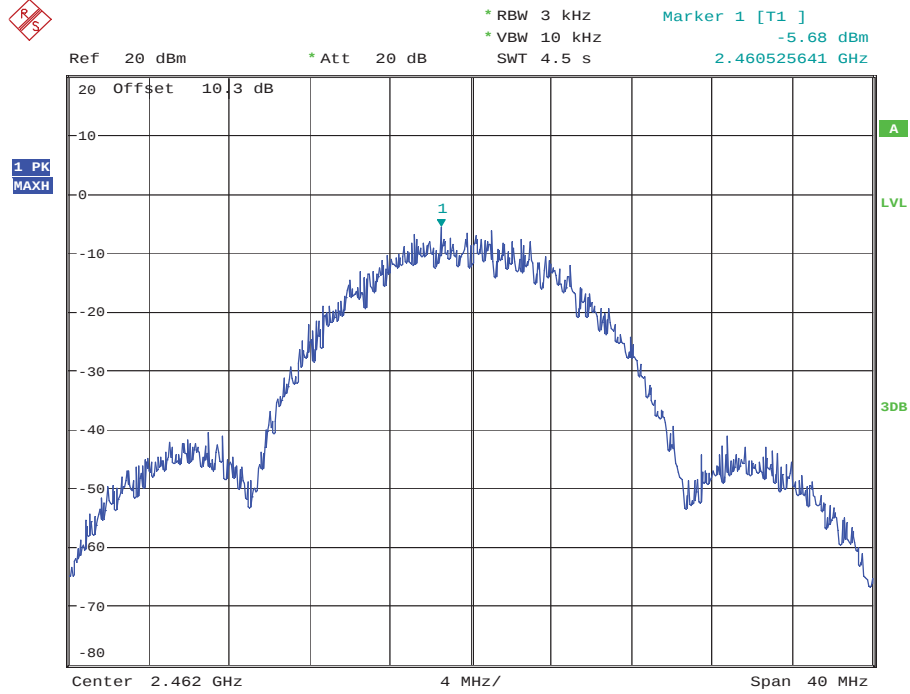


Maximum Peak power spectral density_11BMIMO_2462_Ant2

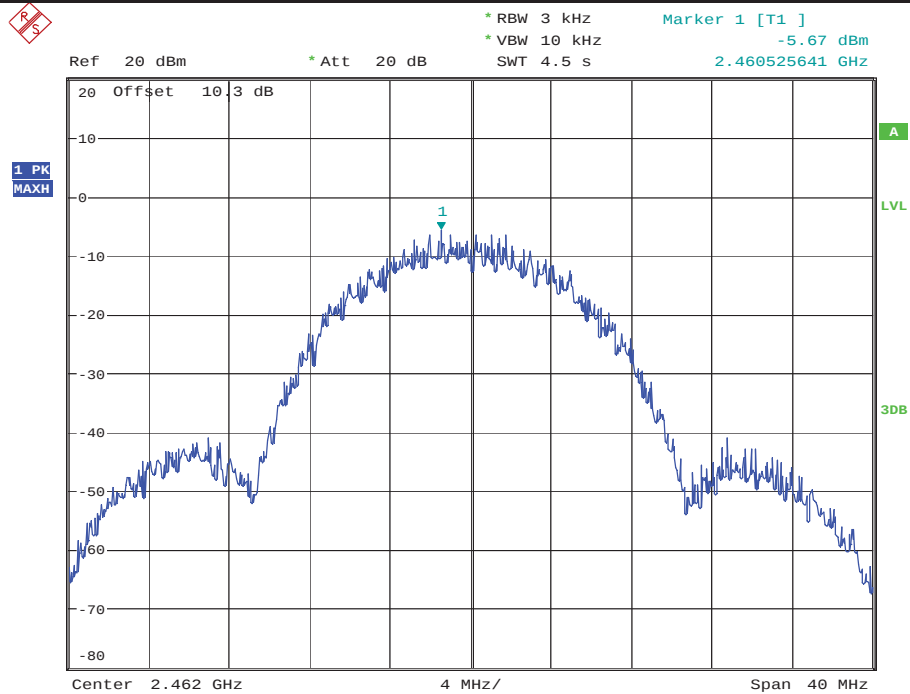


Maximum Peak power spectral density_11GMIMO_2412_Ant1

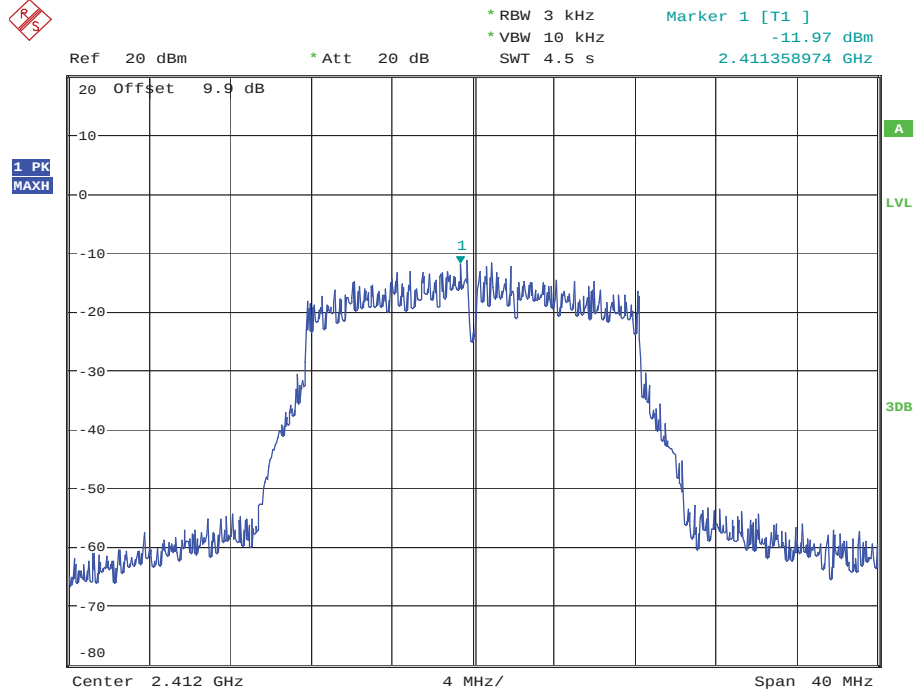


Maximum Peak power spectral density_11GMIMO_2412_Ant2

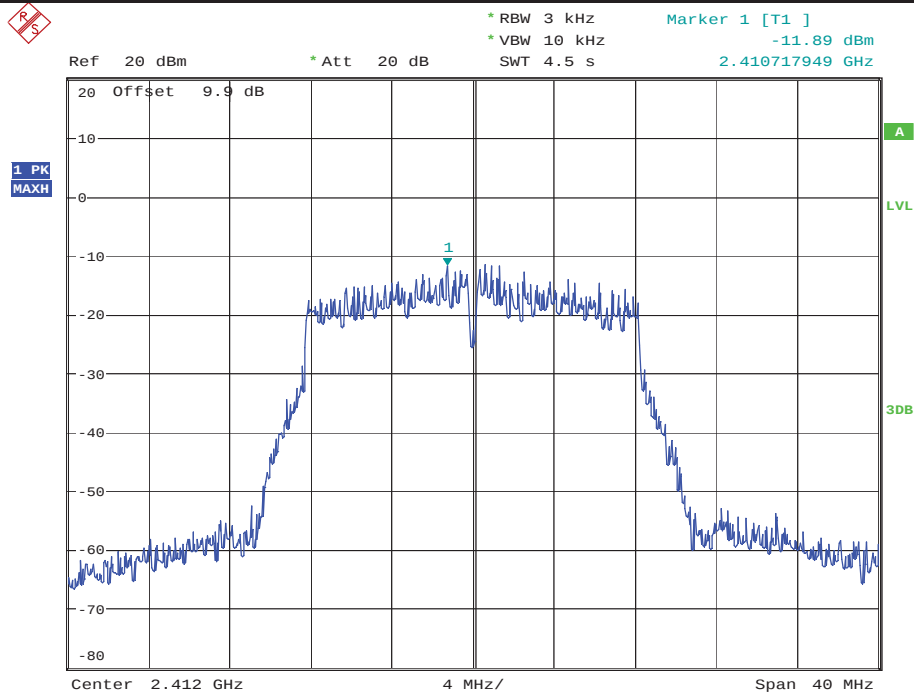


Maximum Peak power spectral density_11GMIMO_2437_Ant1

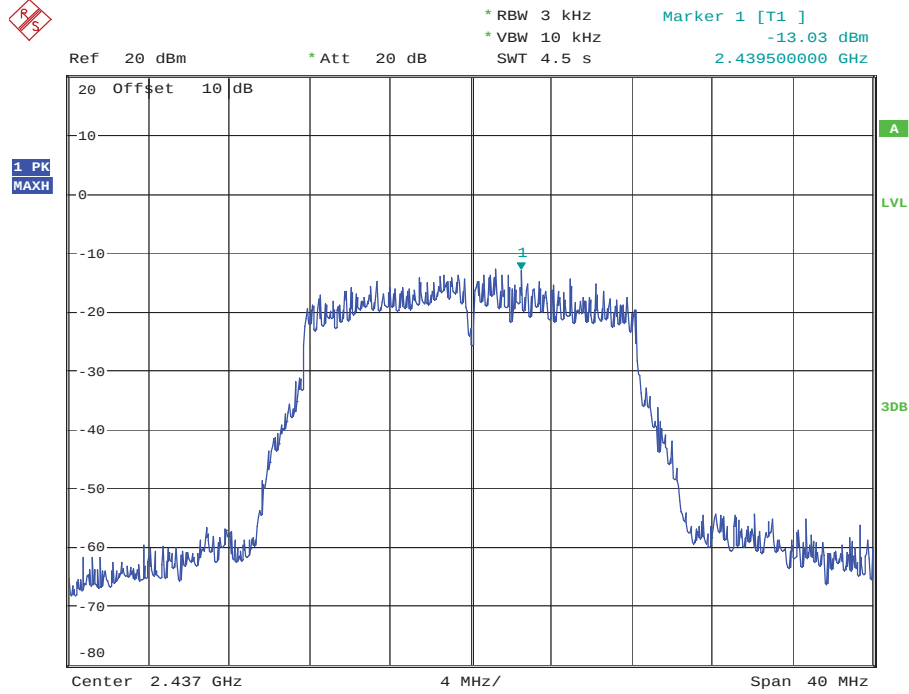


Maximum Peak power spectral density_11GMIMO_2437_Ant2

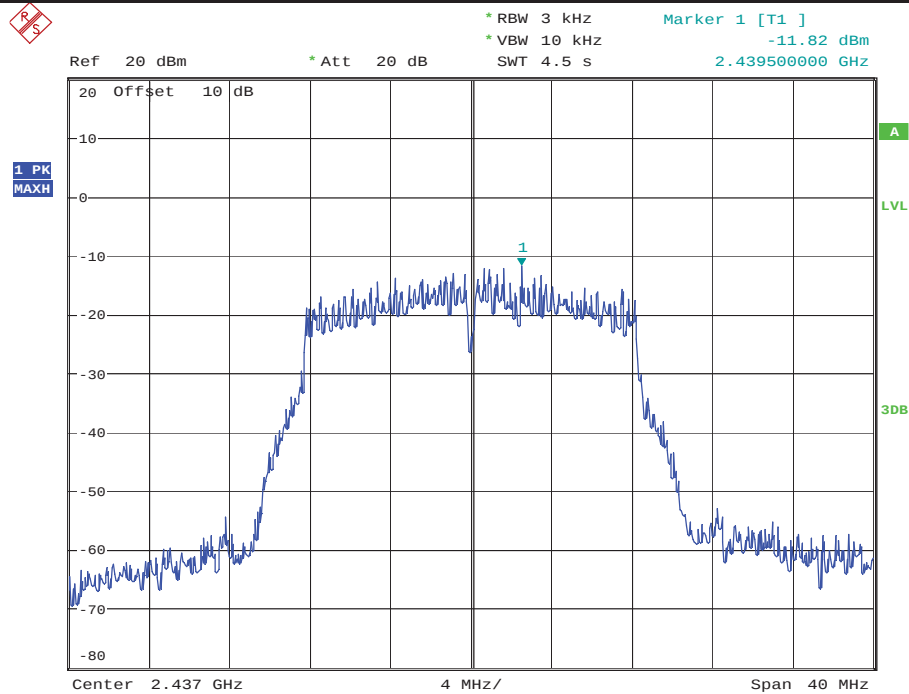


Maximum Peak power spectral density_11GMIMO_2462_Ant1

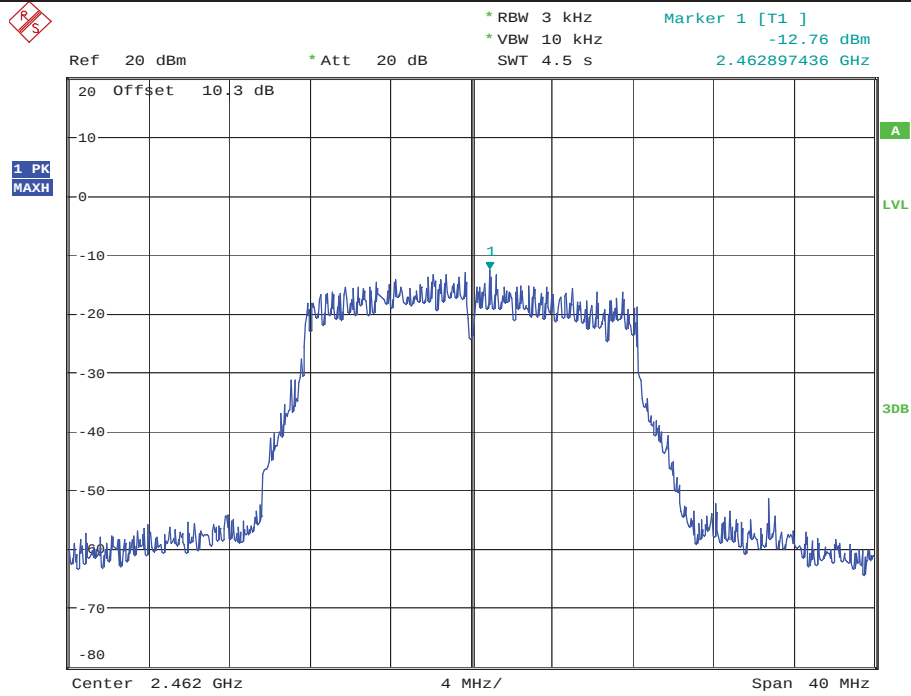


Maximum Peak power spectral density_11GMIMO_2462_Ant2

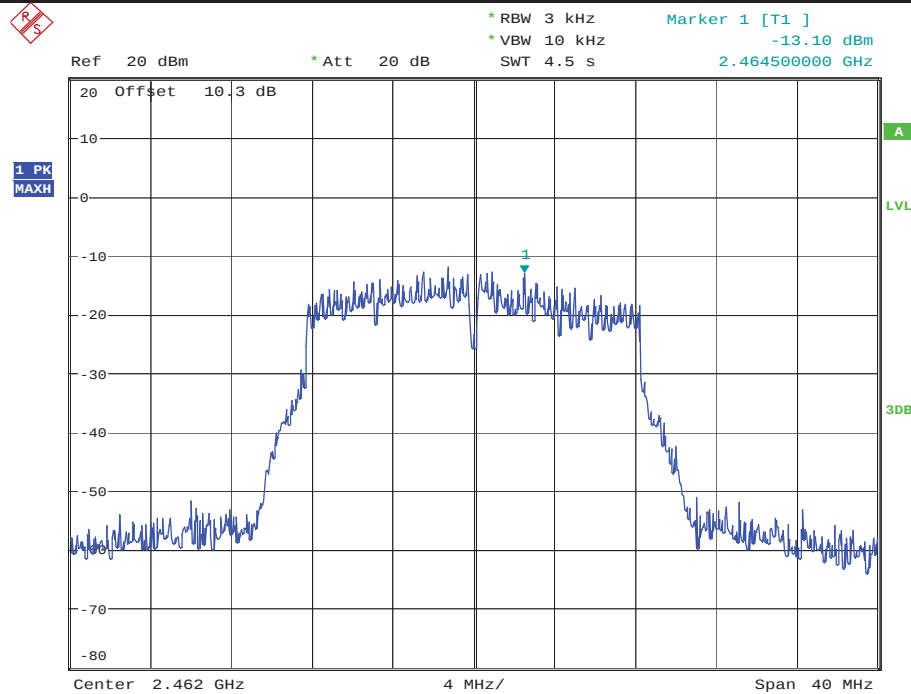


Maximum Peak power spectral density_11N20MIMO_2412_Ant1

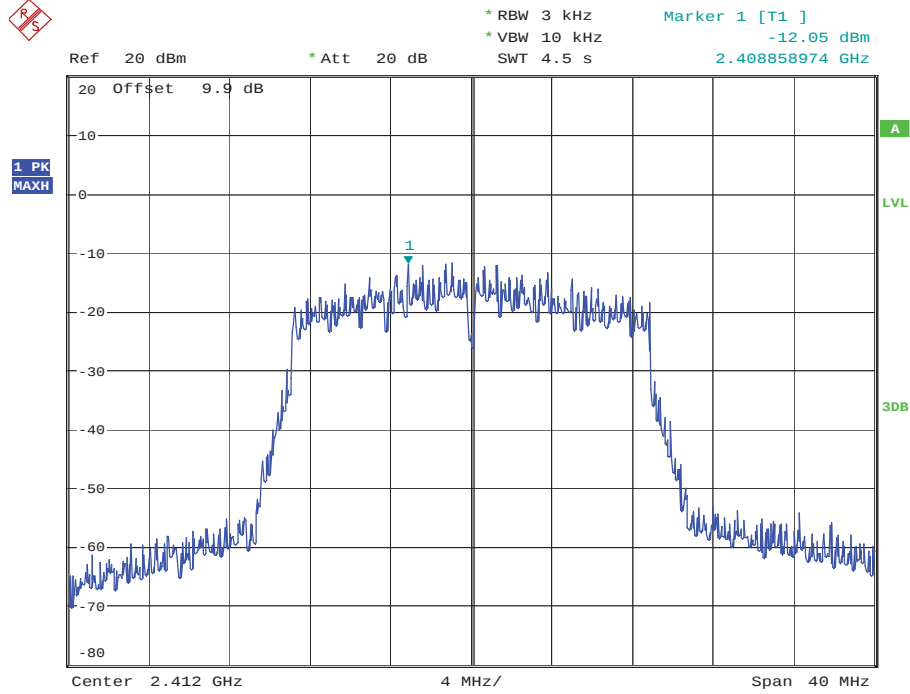


Maximum Peak power spectral density_11N20MIMO_2412_Ant2

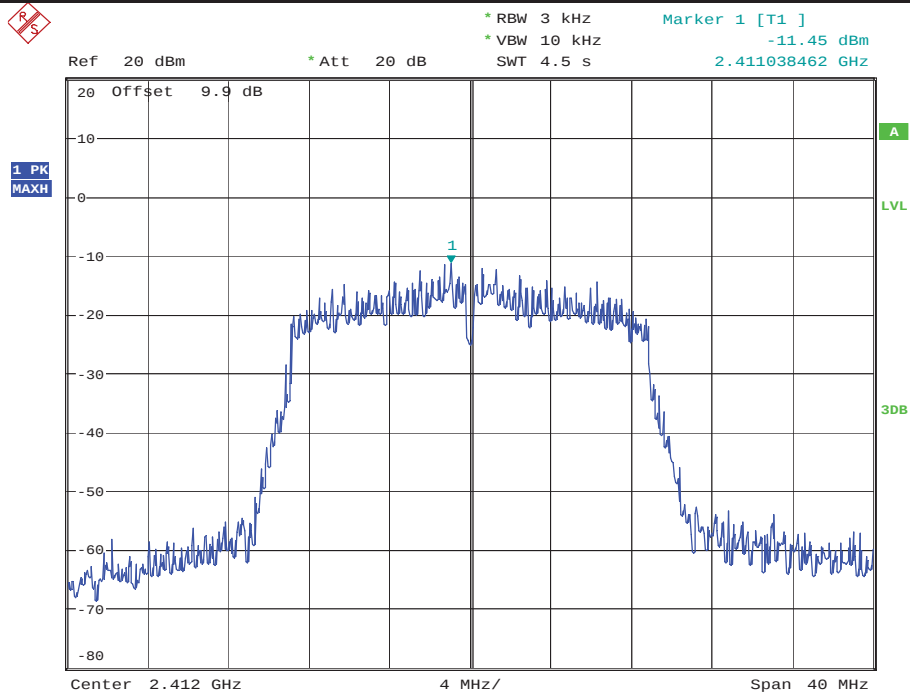


Maximum Peak power spectral density_11N20MIMO_2437_Ant1

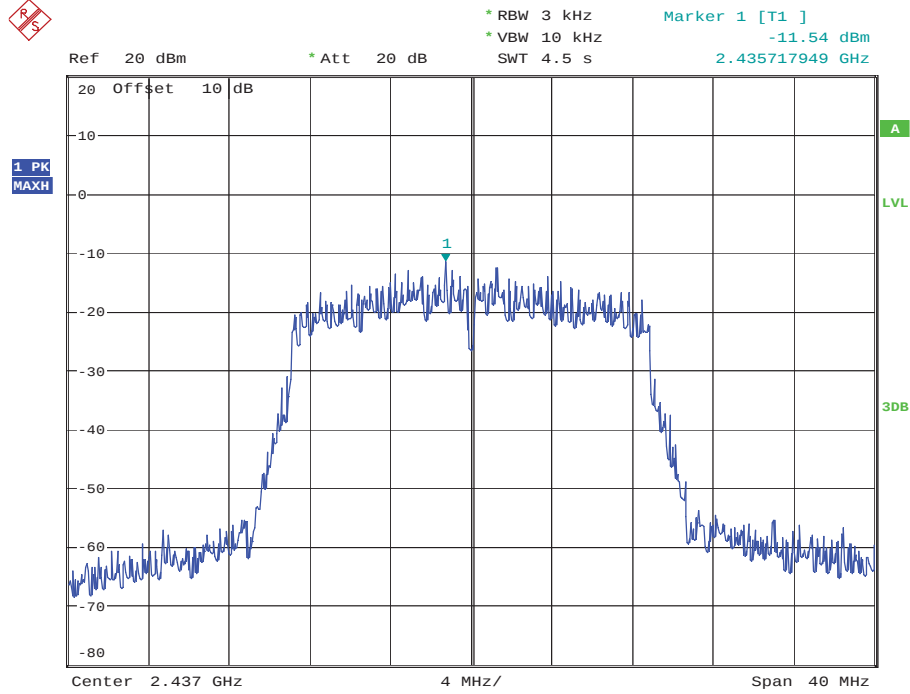


Maximum Peak power spectral density_11N20MIMO_2437_Ant2

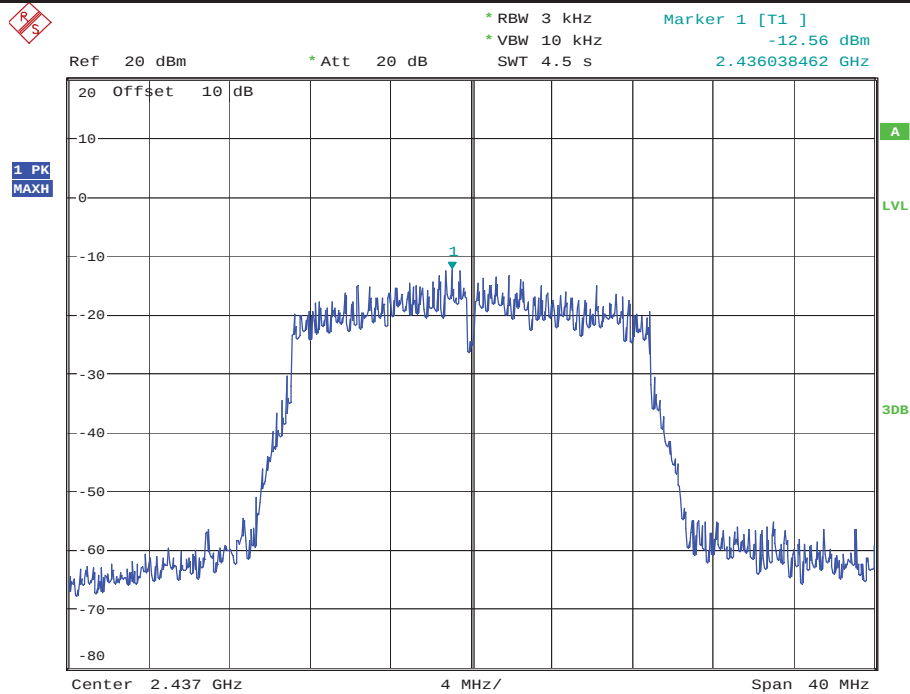


Maximum Peak power spectral density_11N20MIMO_2462_Ant1

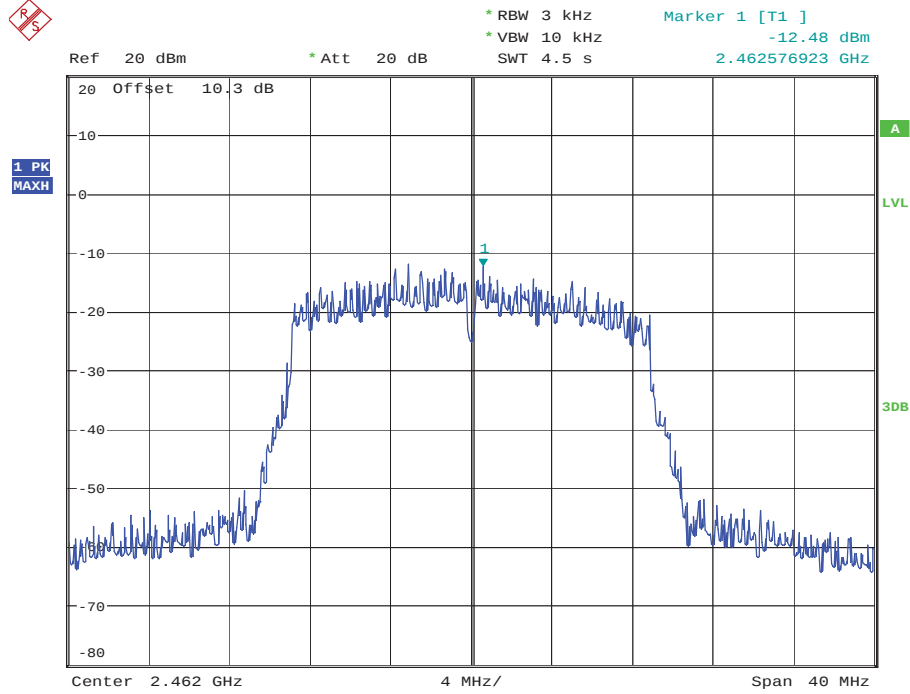


Maximum Peak power spectral density_11N20MIMO_2462_Ant2

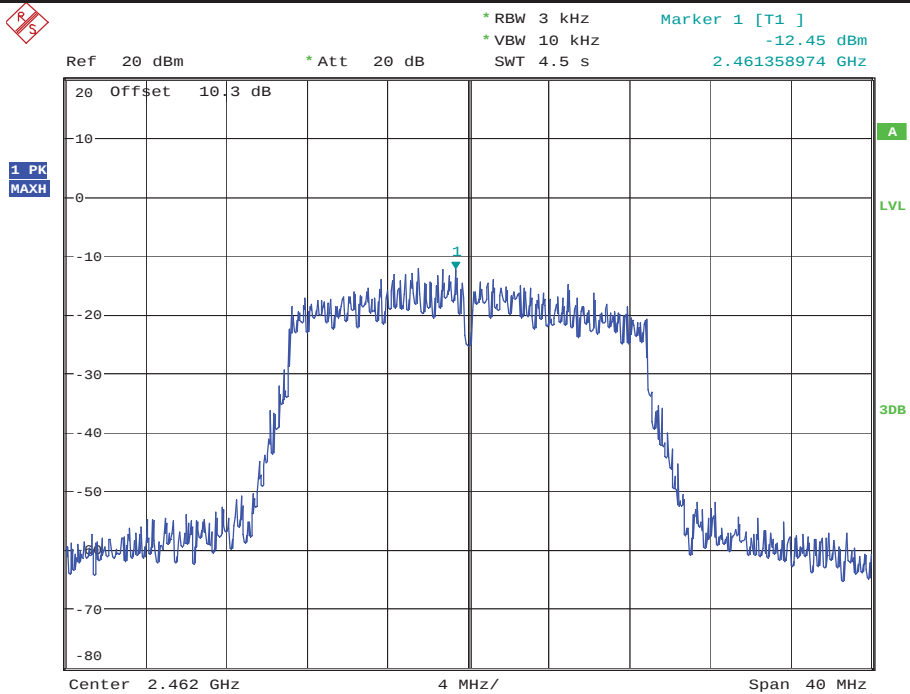


Maximum Peak power spectral density_11N40MIMO_2422_Ant1

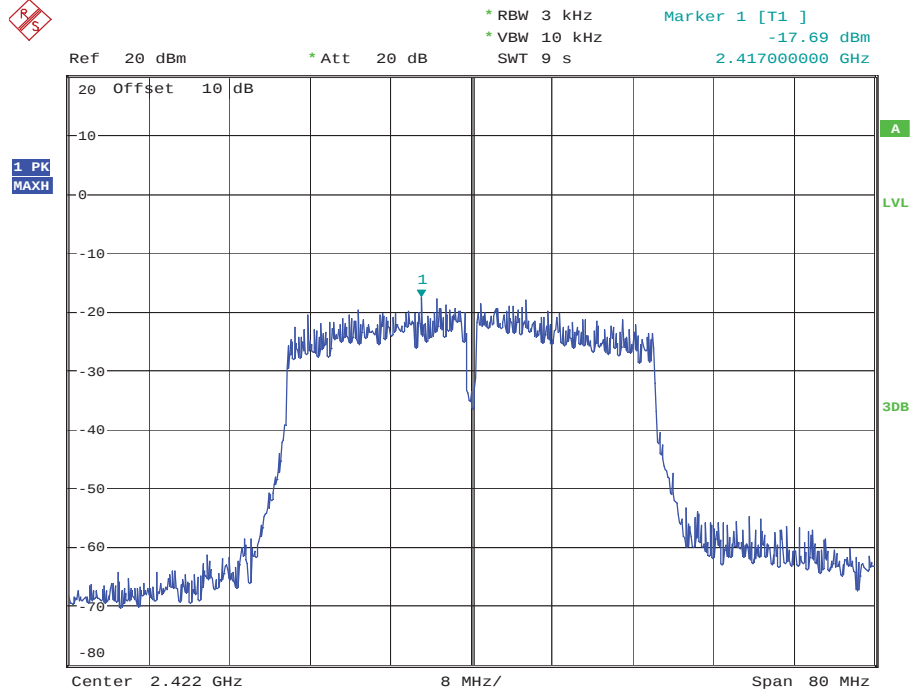


Maximum Peak power spectral density_11N40MIMO_2422_Ant2

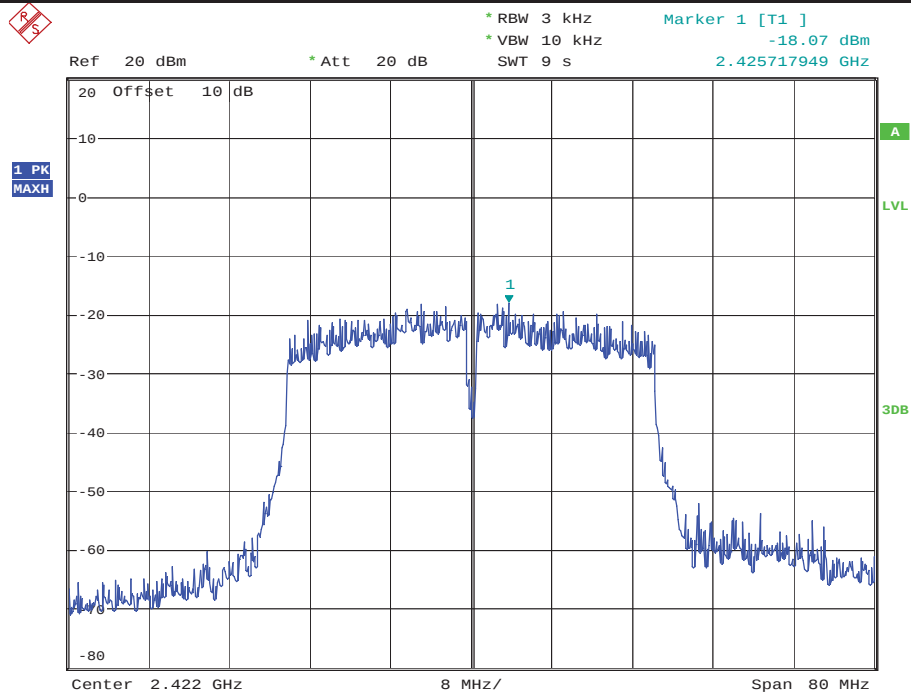


Maximum Peak power spectral density_11N40MIMO_2437_Ant1

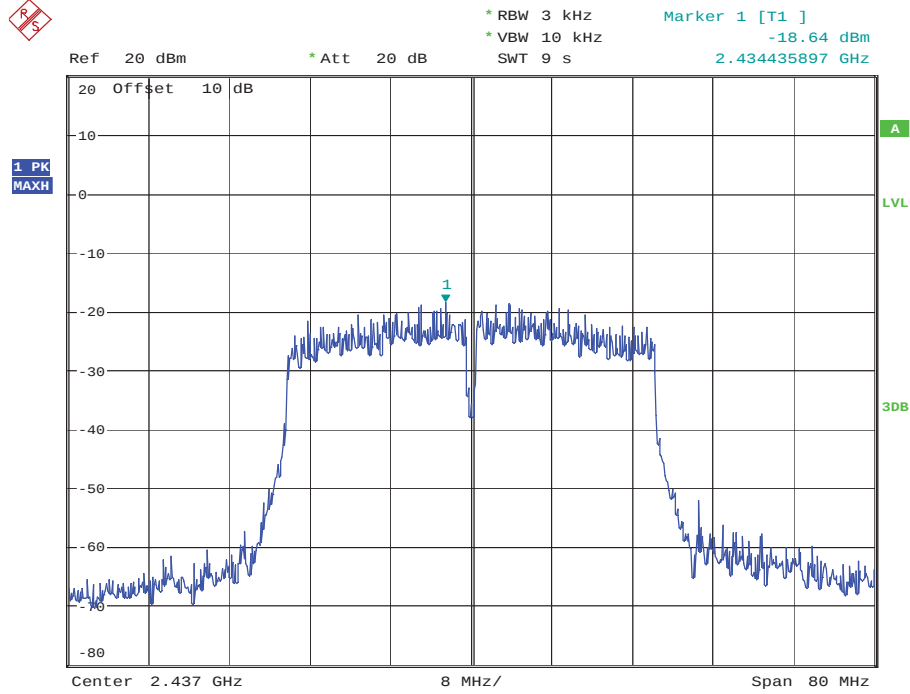


Maximum Peak power spectral density_11N40MIMO_2437_Ant2

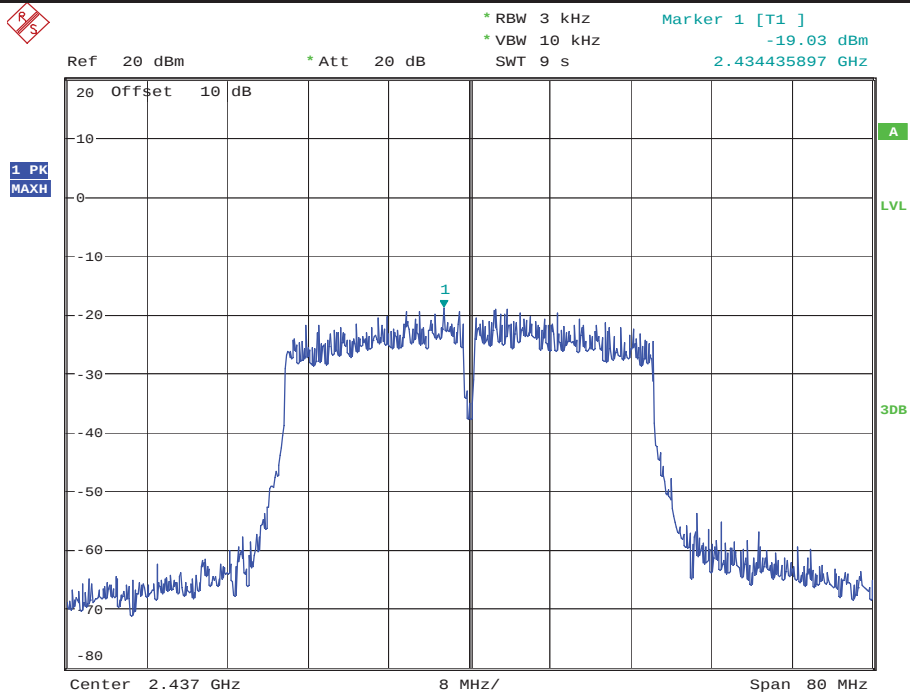

Maximum Peak power spectral density_11N40MIMO_2452_Ant1

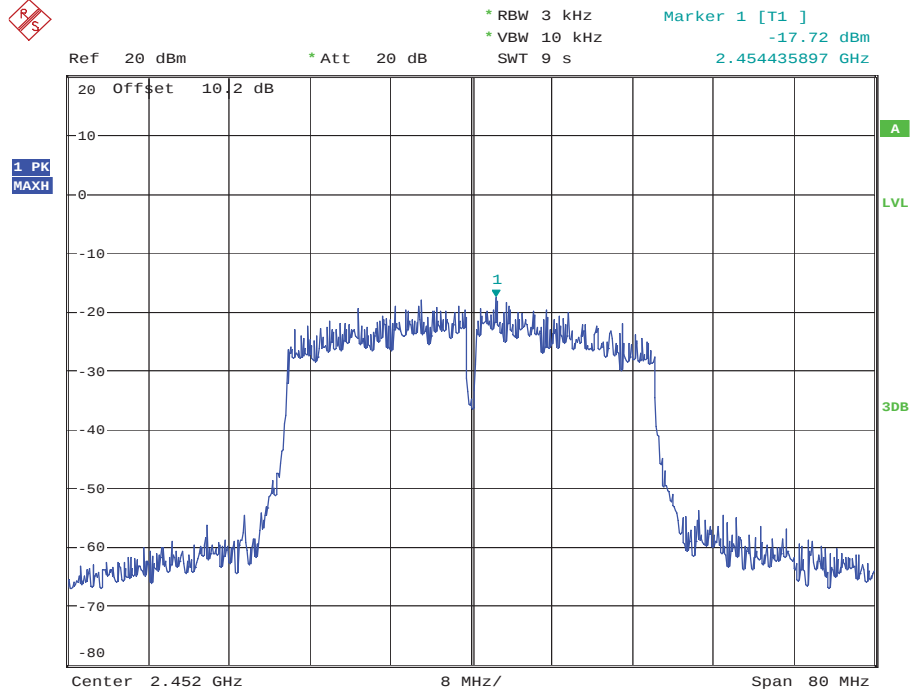

Maximum Peak power spectral density_11N40MIMO_2452_Ant2

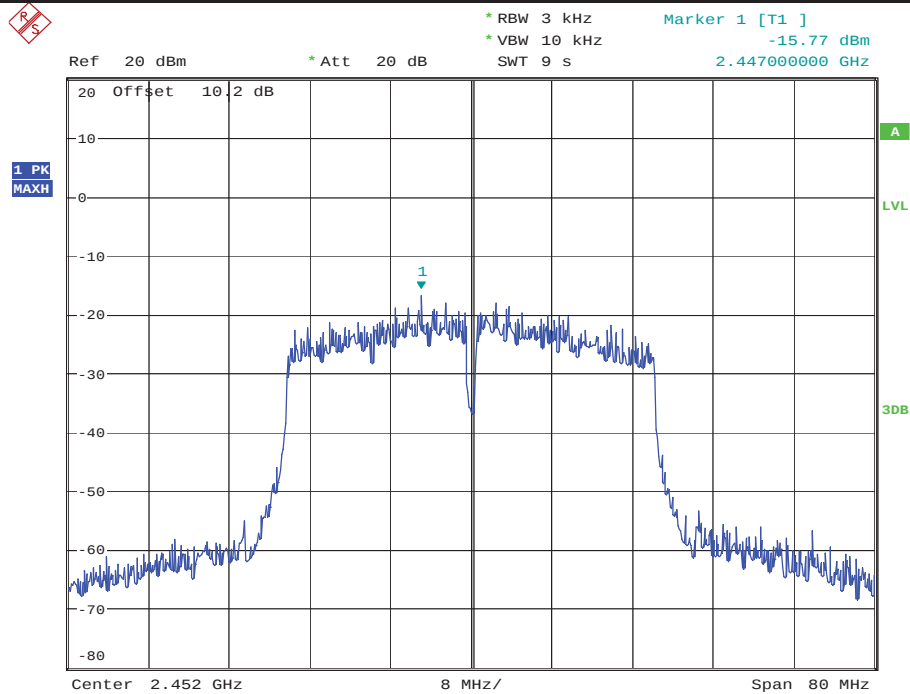

7 Band Edge and Spurious Emissions (Conducted)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100KHz
VBW:	300KHz
Span	1.5times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100KHz
VBW:	300KHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

7.4. Test Result


EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result Result (dBm)
--------------	-----------------	-------------------	--------------	-----------------	--------------------------


EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result Result (dBm)
11b	CH1	PASS	11n HT 20	CH1	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH11	PASS
11g	CH1	PASS	11n HT 40	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS

EUT Set Mode	CH or Frequency	Ant2 Result (dBm)	EUT Set Mode	CH or Frequency	Ant2 Result (dBm)
11b	CH1	PASS	11n HT 20	CH1	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH11	PASS
11g	CH1	PASS	11n HT 40	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS

7.5. original test data


Band Edge

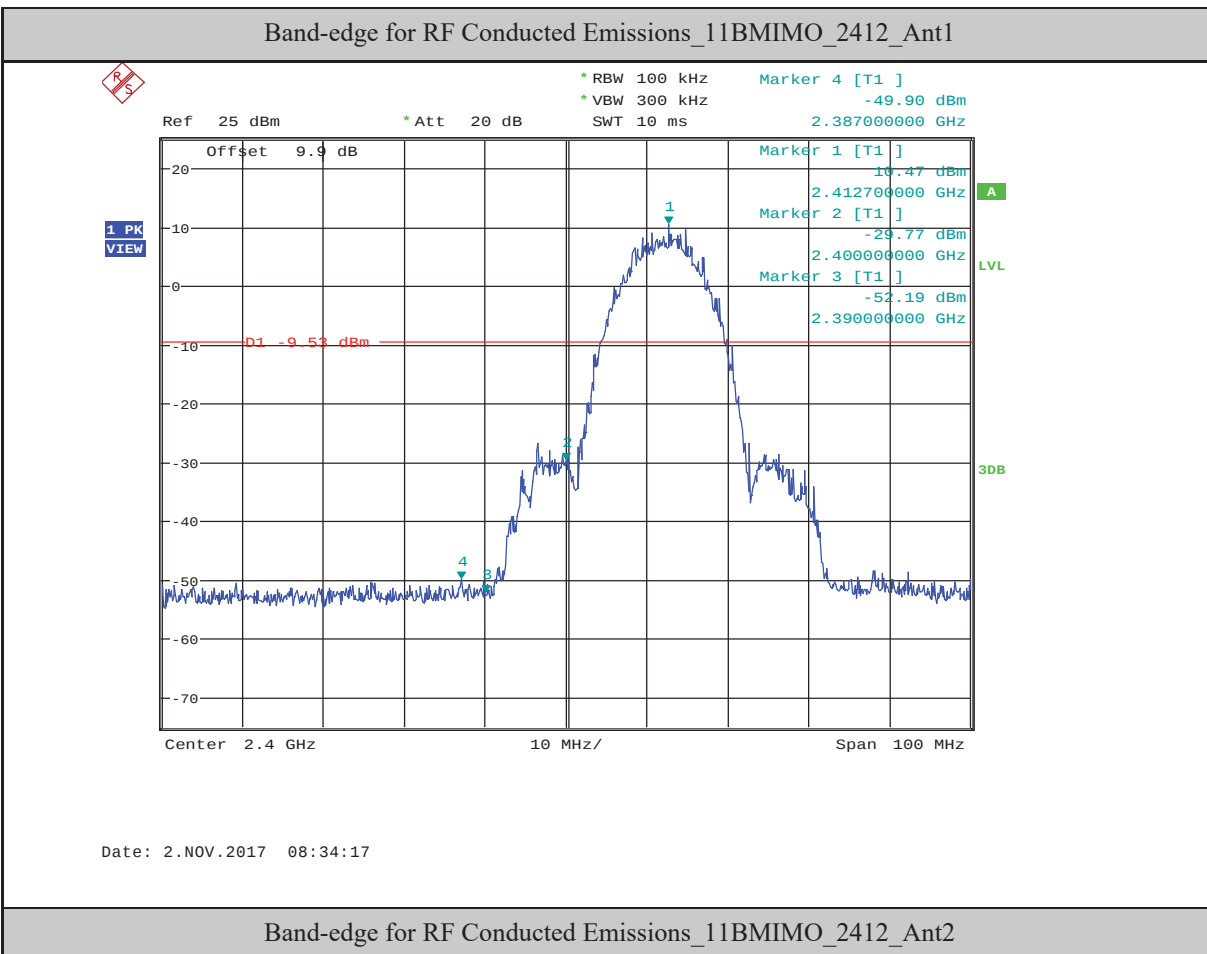

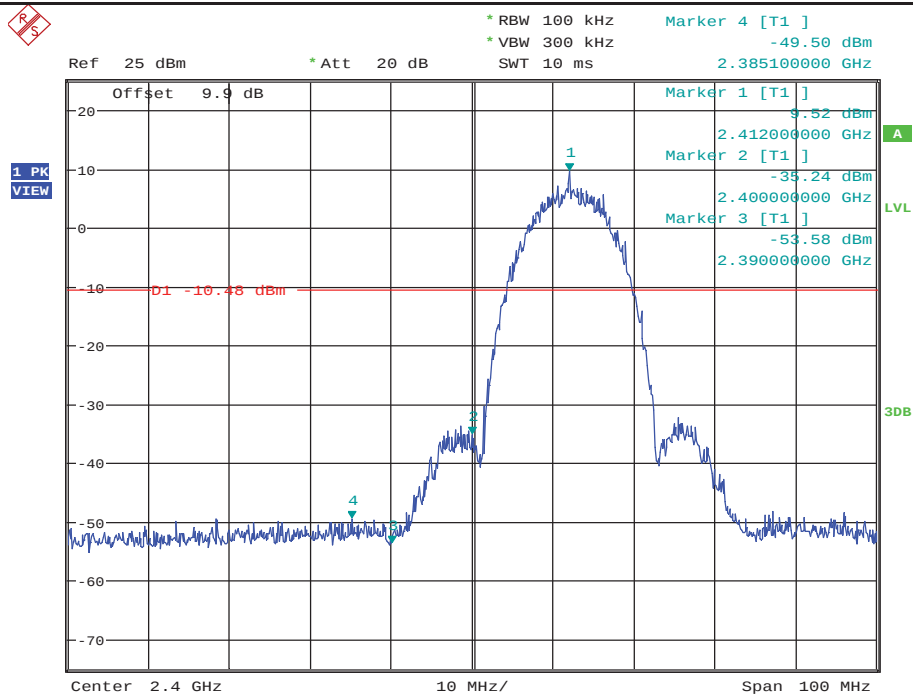


Date: 2.NOV.2017 09:02:32

Band-edge for RF Conducted Emissions_11BMIMO_2462_Ant1

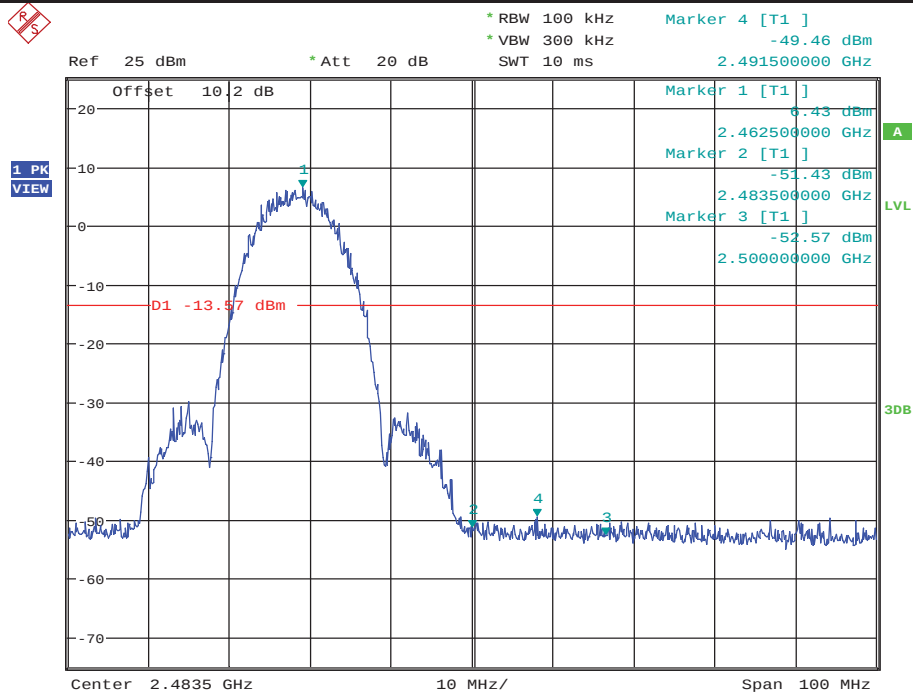


Date: 2.NOV.2017 09:46:47

Band-edge for RF Conducted Emissions_11BMIMO_2462_Ant2

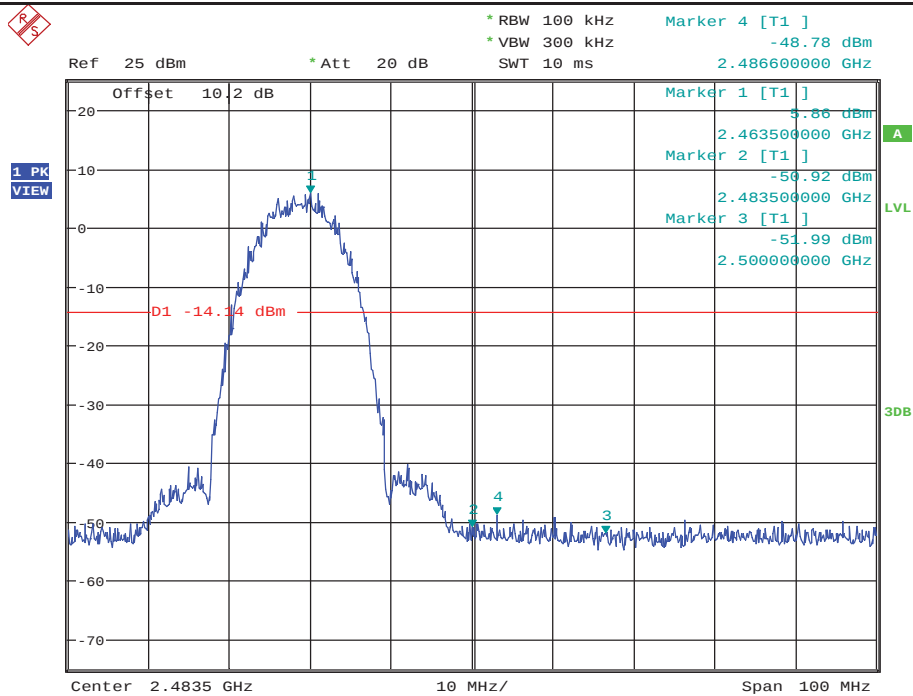


Date: 2.NOV.2017 09:49:18

Band-edge for RF Conducted Emissions_11GMIMO_2412_Ant1

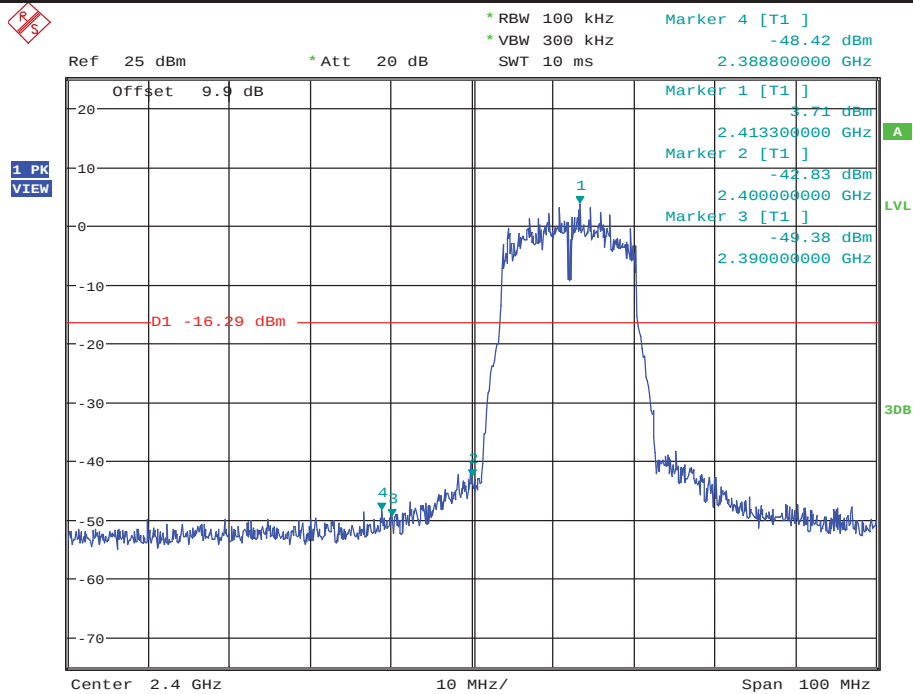


Date: 2.NOV.2017 10:00:15

Band-edge for RF Conducted Emissions_11GMIMO_2412_Ant2

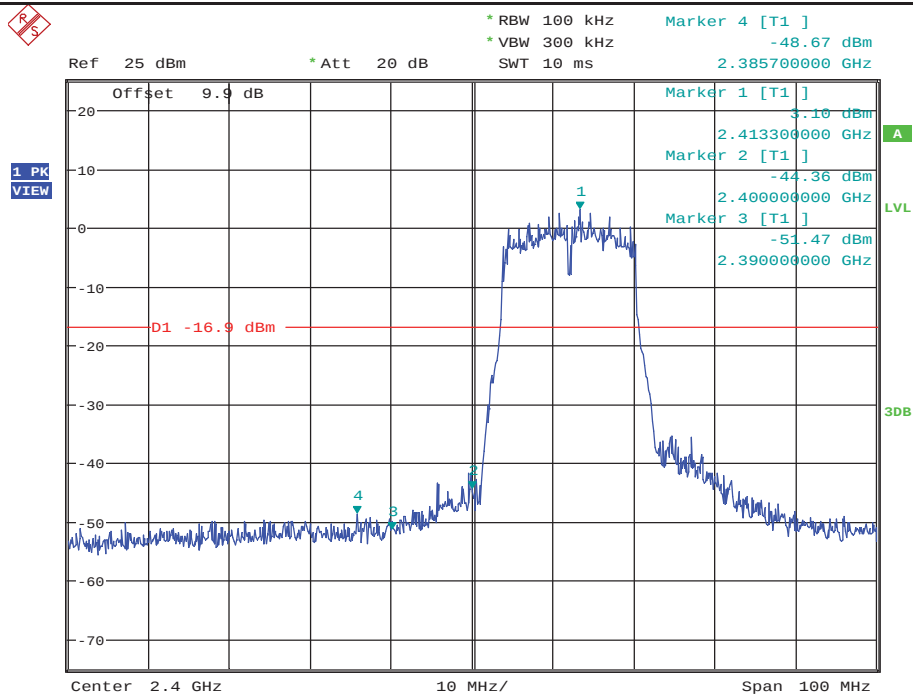


Date: 2.NOV.2017 10:02:44

Band-edge for RF Conducted Emissions_11GMIMO_2462_Ant1

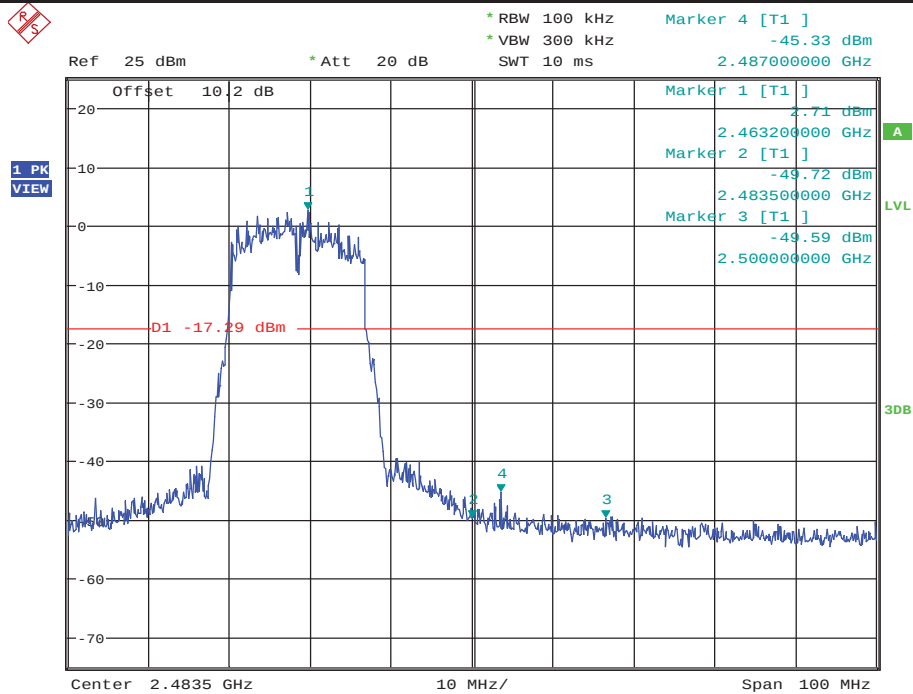


Date: 2.NOV.2017 12:52:30

Band-edge for RF Conducted Emissions_11GMIMO_2462_Ant2

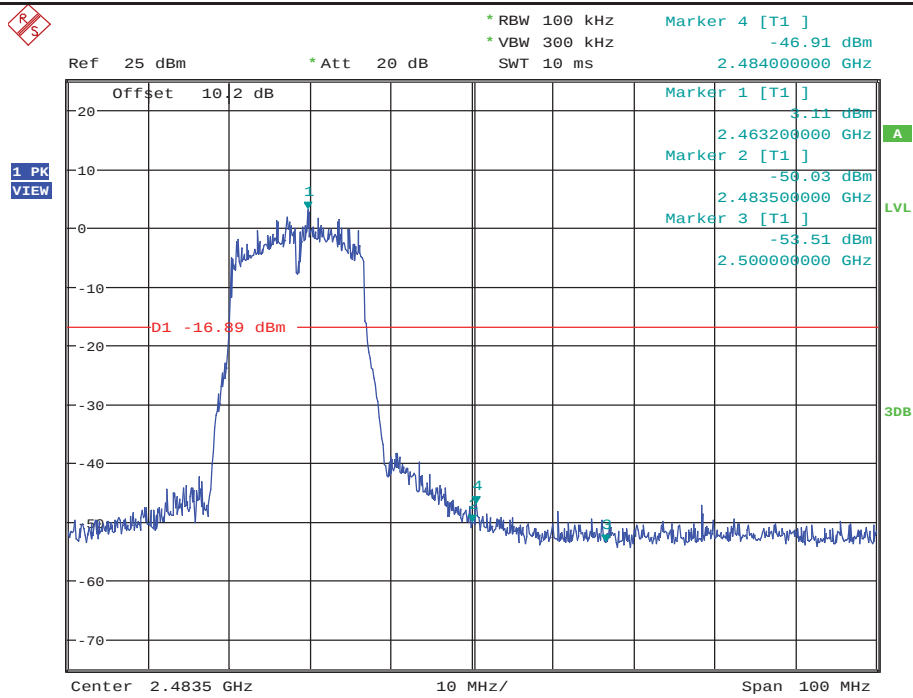


Date: 2.NOV.2017 12:55:02

Band-edge for RF Conducted Emissions_11N20MIMO_2412_Ant1

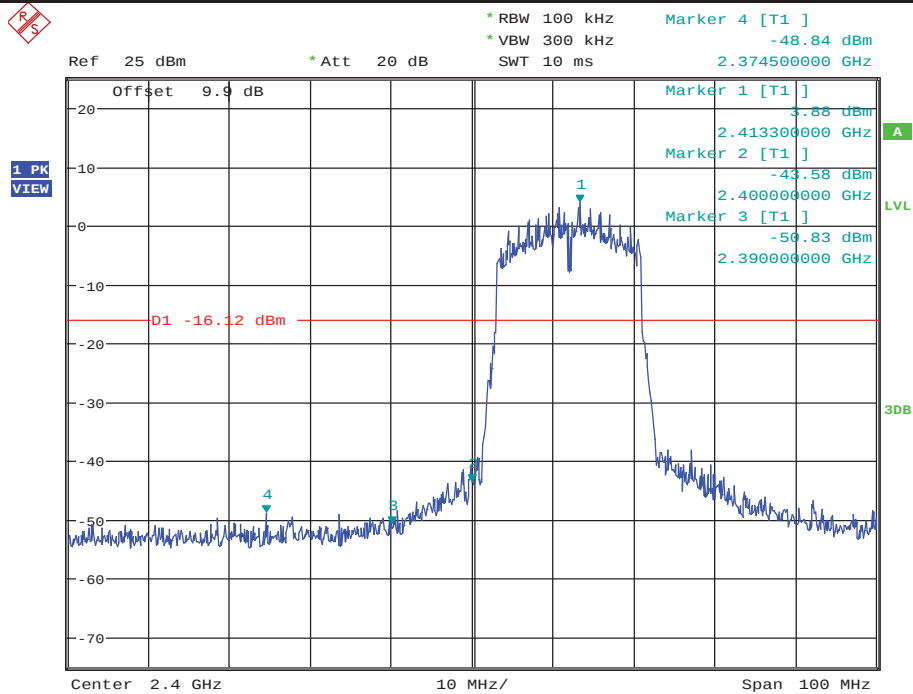


Date: 2.NOV.2017 12:58:49

Band-edge for RF Conducted Emissions_11N20MIMO_2412_Ant2

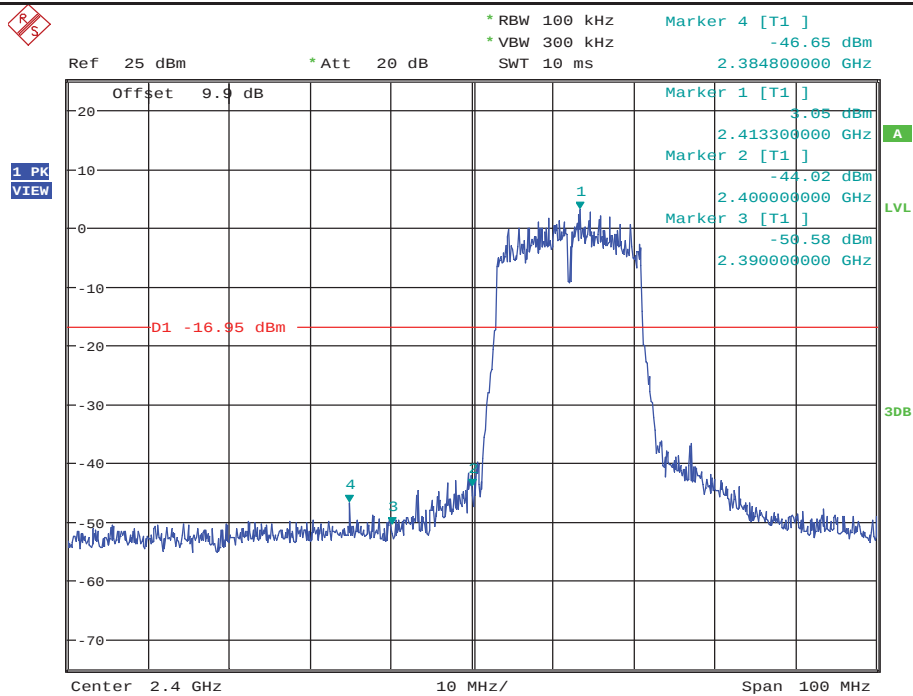


Date: 2.NOV.2017 13:01:20

Band-edge for RF Conducted Emissions_11N20MIMO_2462_Ant1

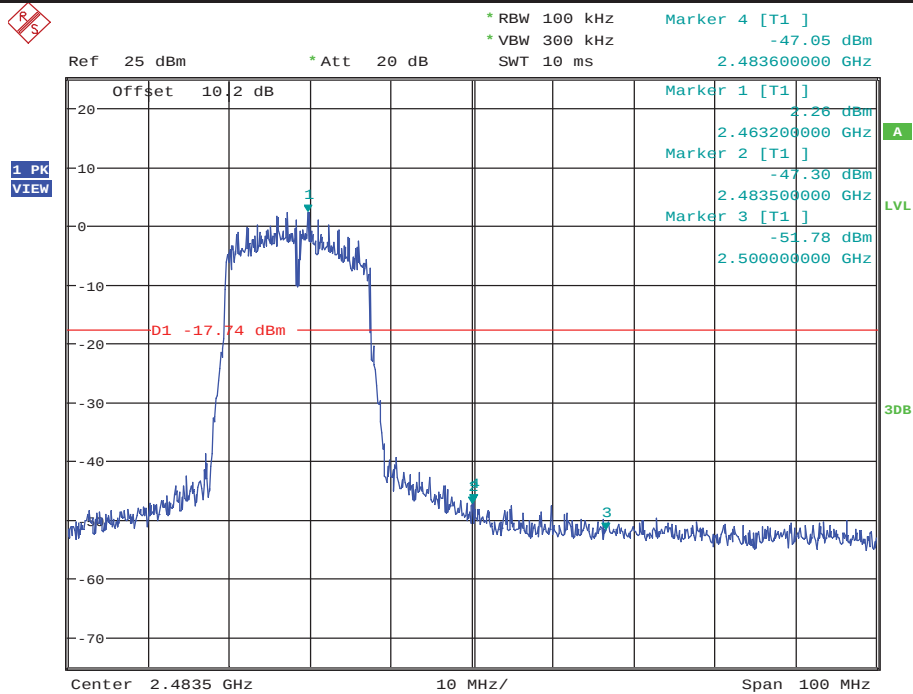


Date: 2.NOV.2017 13:14:26

Band-edge for RF Conducted Emissions_11N20MIMO_2462_Ant2

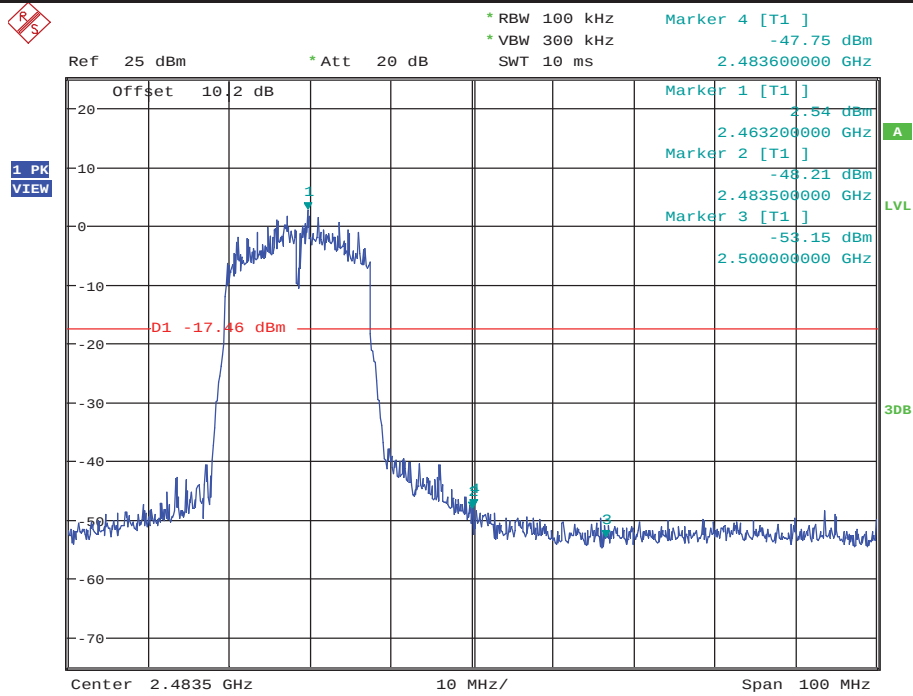


Date: 2.NOV.2017 13:16:57

Band-edge for RF Conducted Emissions_11N40MIMO_2422_Ant1

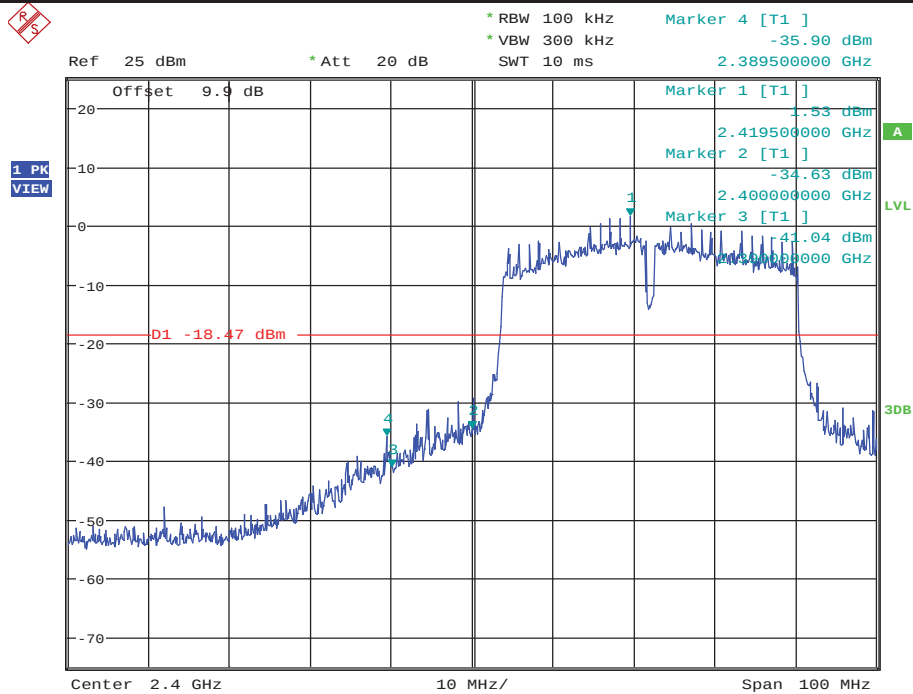


Date: 2.NOV.2017 13:21:04

Band-edge for RF Conducted Emissions_11N40MIMO_2422_Ant2

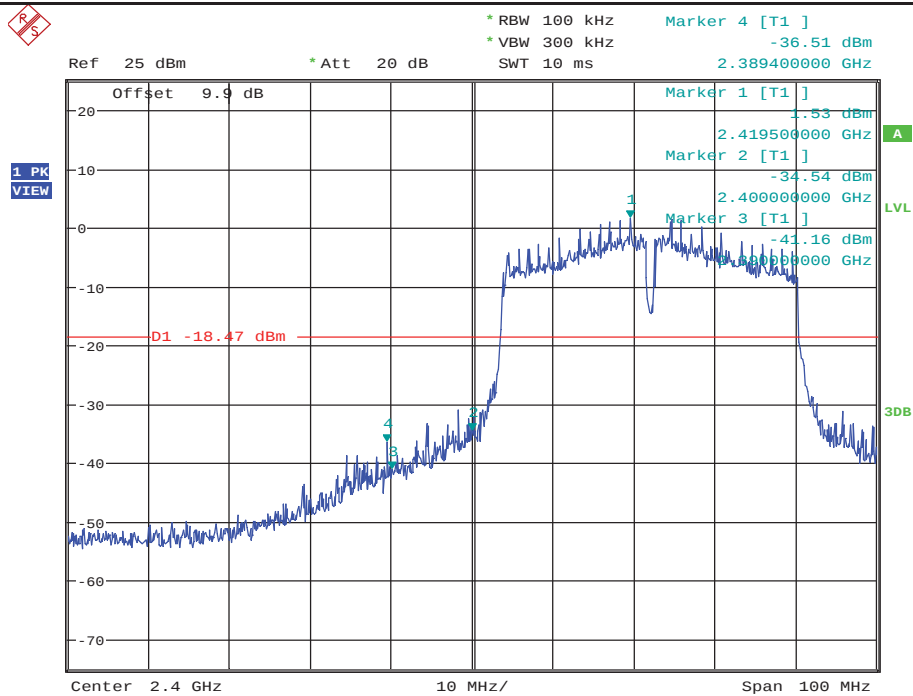


Date: 2.NOV.2017 13:23:36

Band-edge for RF Conducted Emissions_11N40MIMO_2452_Ant1

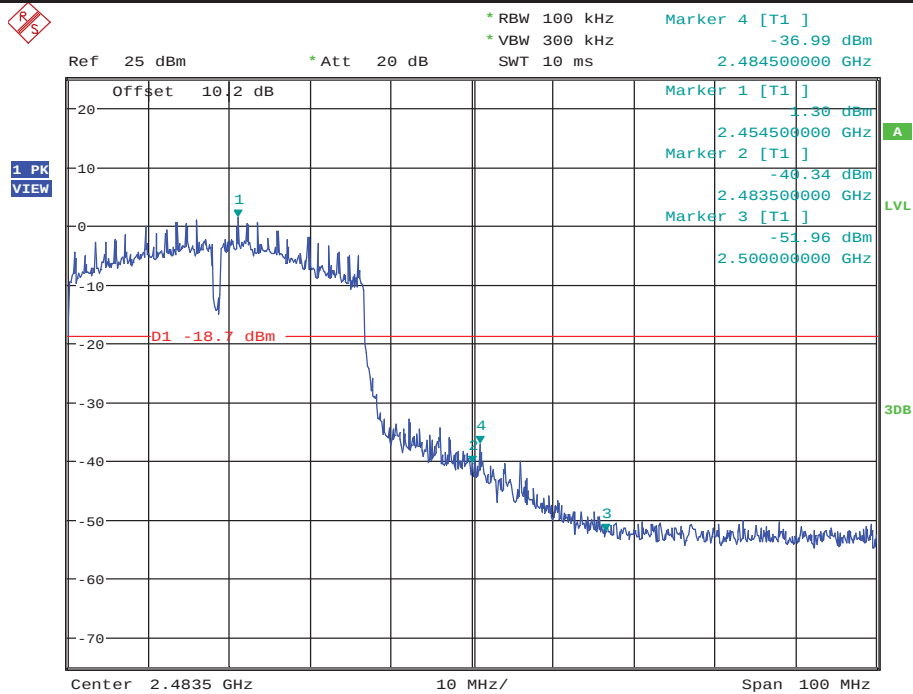


Date: 2.NOV.2017 13:32:37

Band-edge for RF Conducted Emissions_11N40MIMO_2452_Ant2

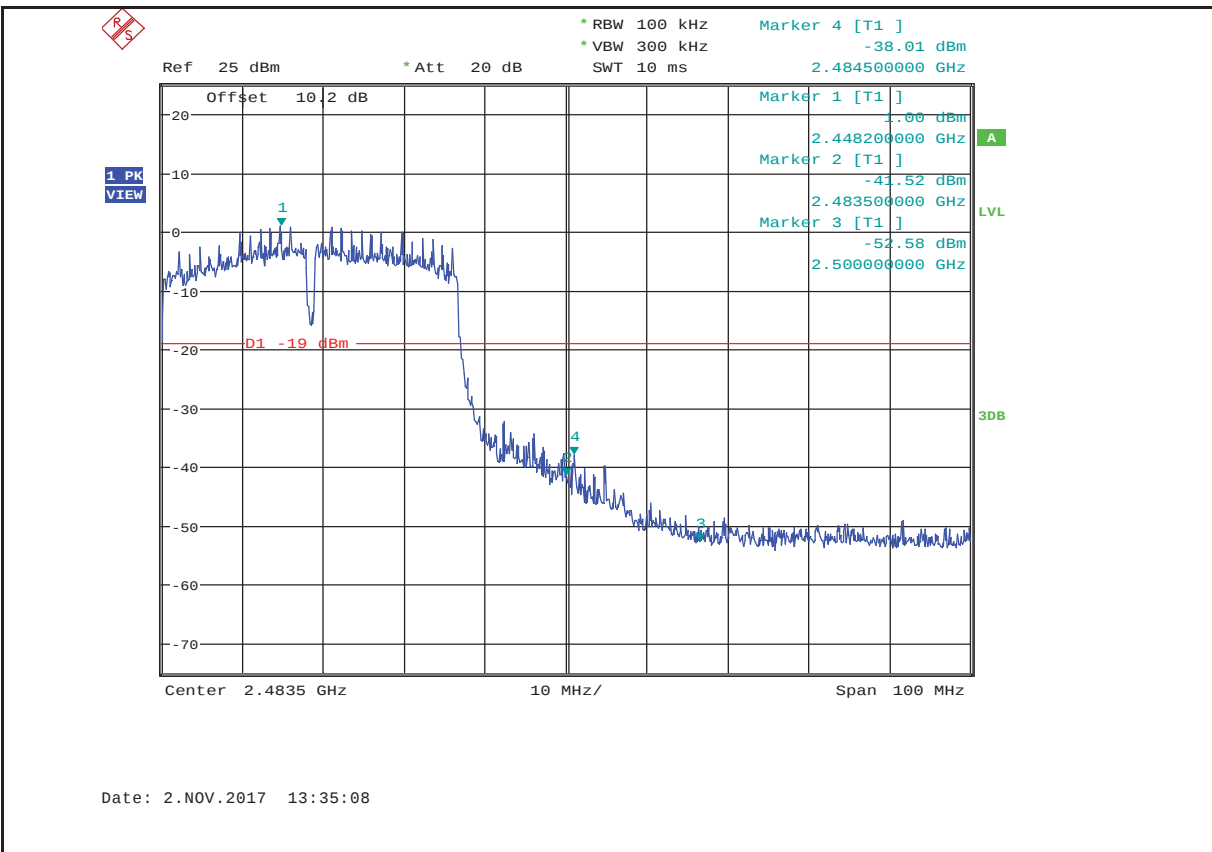


Spurious Emissions


RF Conducted Spurious Emissions_11BMIMO_2412_Ant1

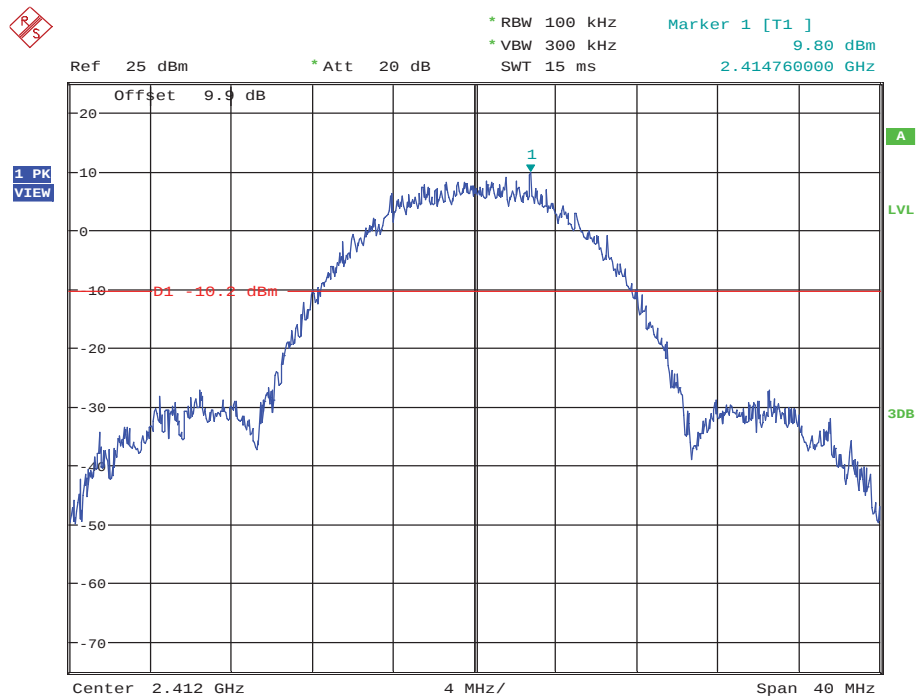


Date: 2.NOV.2017 08:34:33

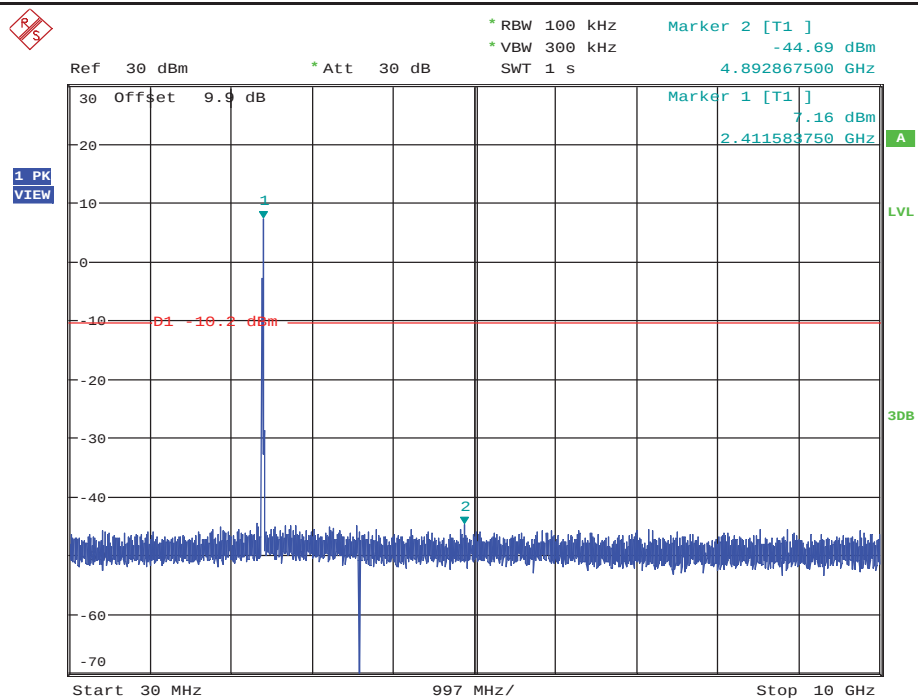


Date: 2.NOV.2017 08:34:44

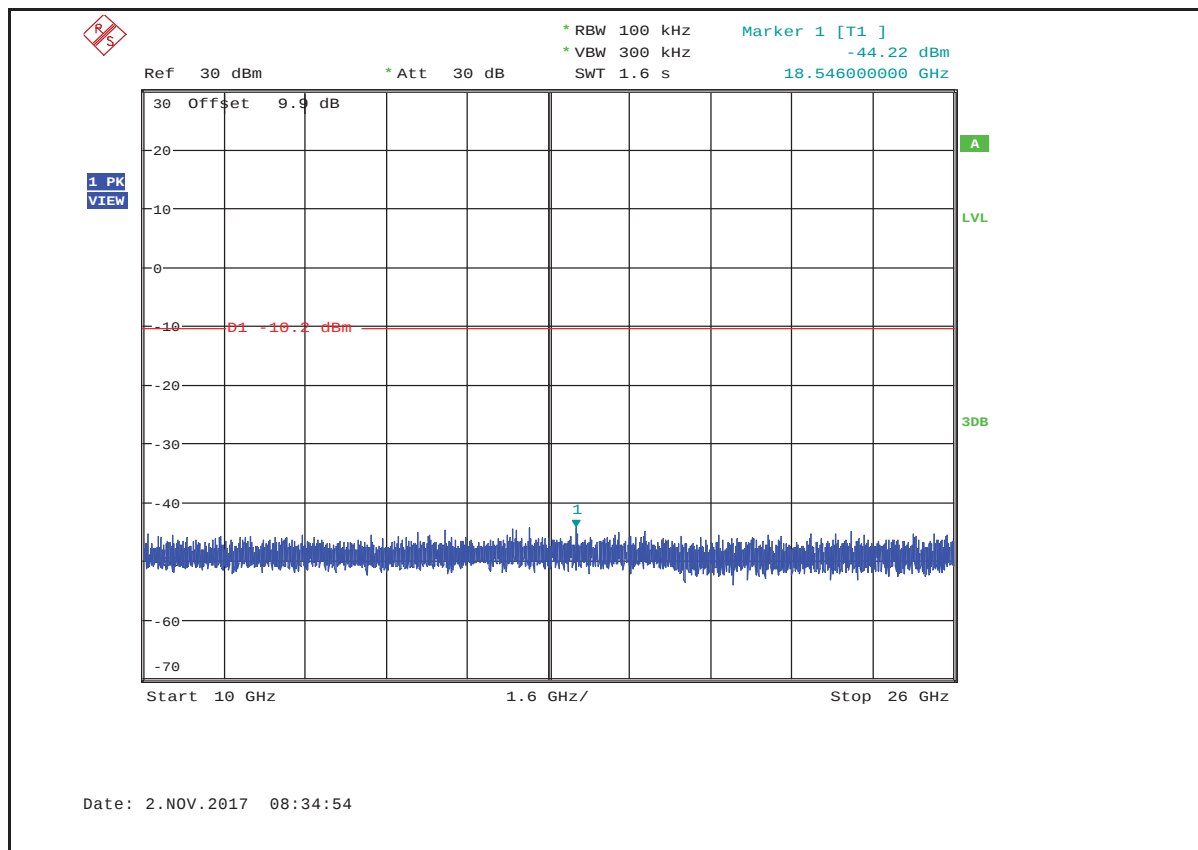


RF Conducted Spurious Emissions_11BMIMO_2412_Ant2

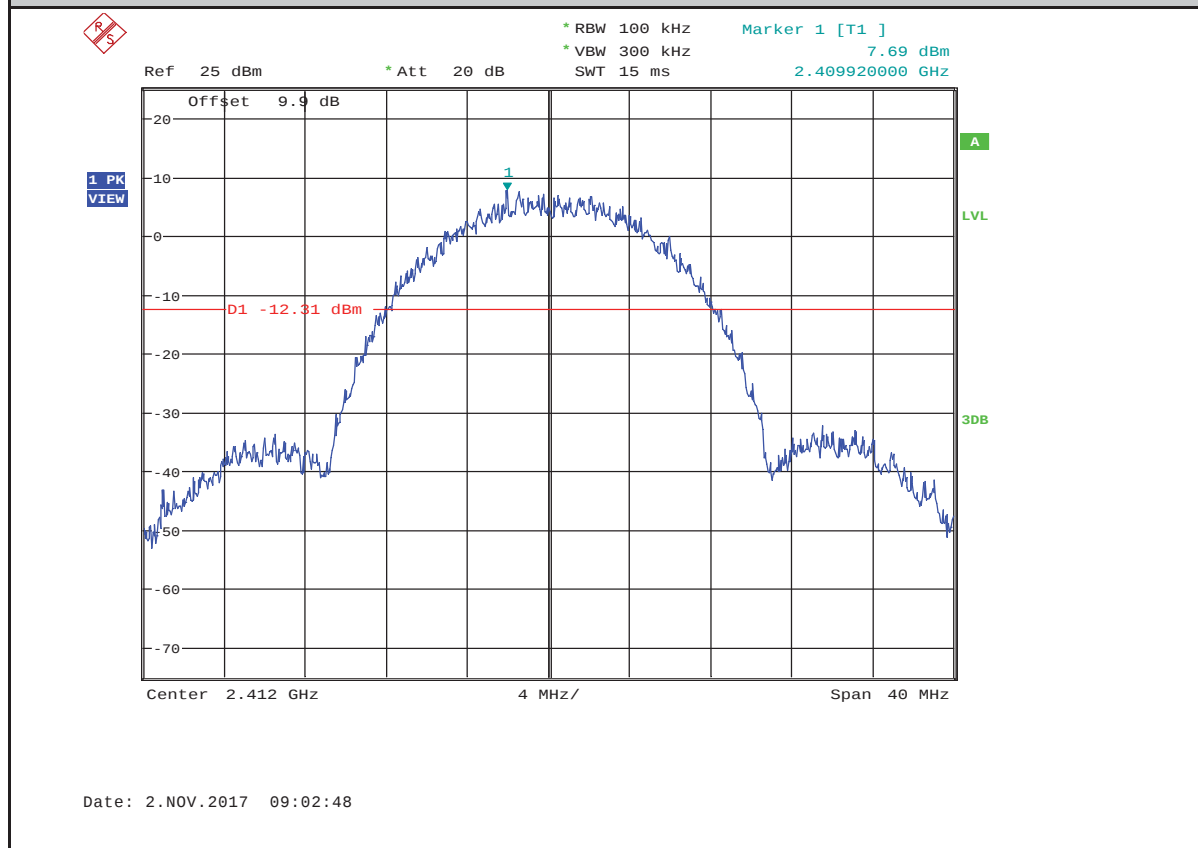


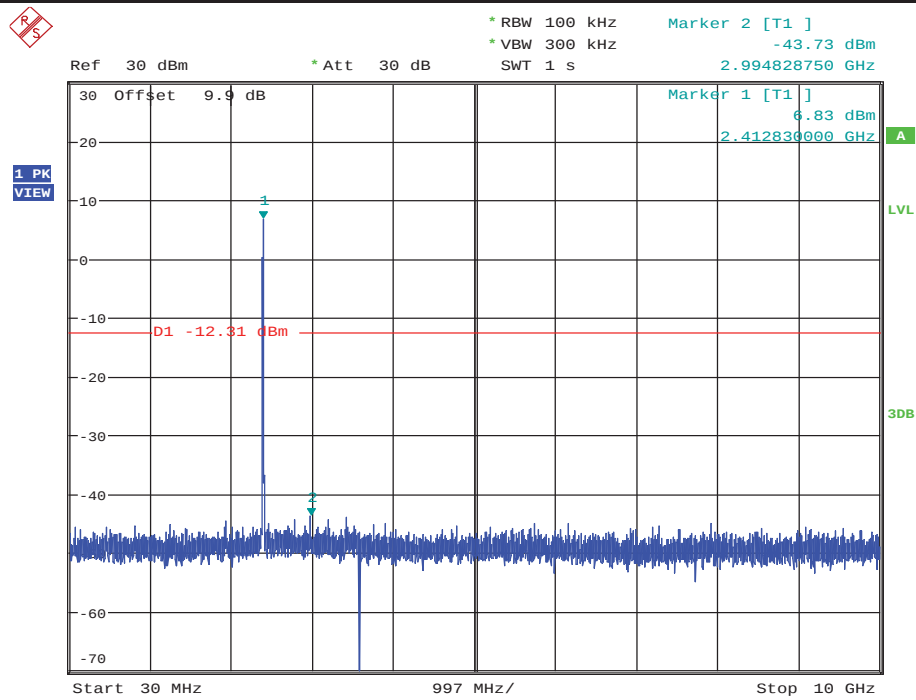



Date: 2.NOV.2017 09:02:59

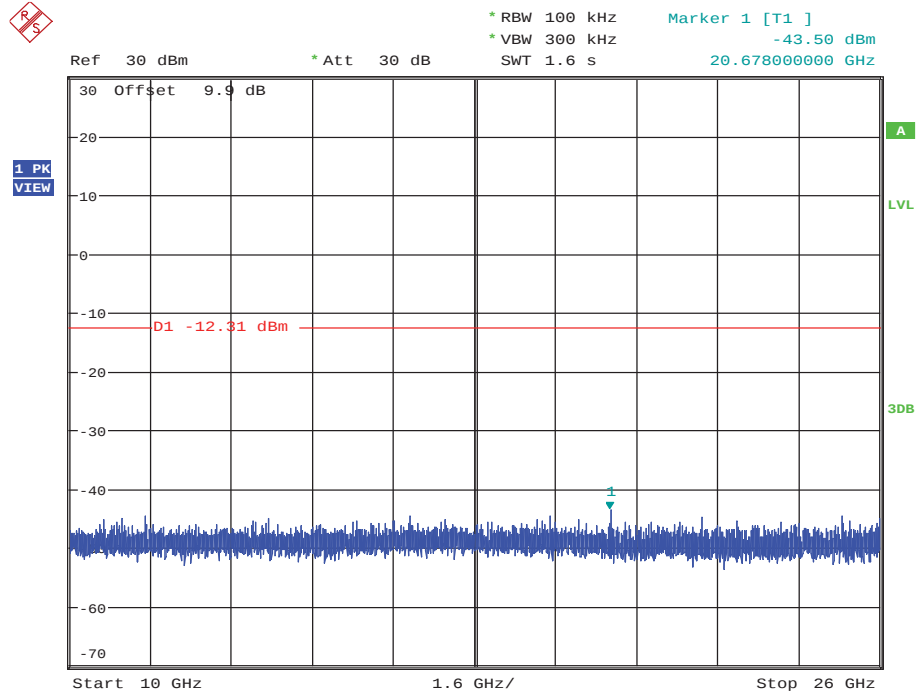


Date: 2.NOV.2017 09:03:09



RF Conducted Spurious Emissions_11BMIMO_2462_Ant1

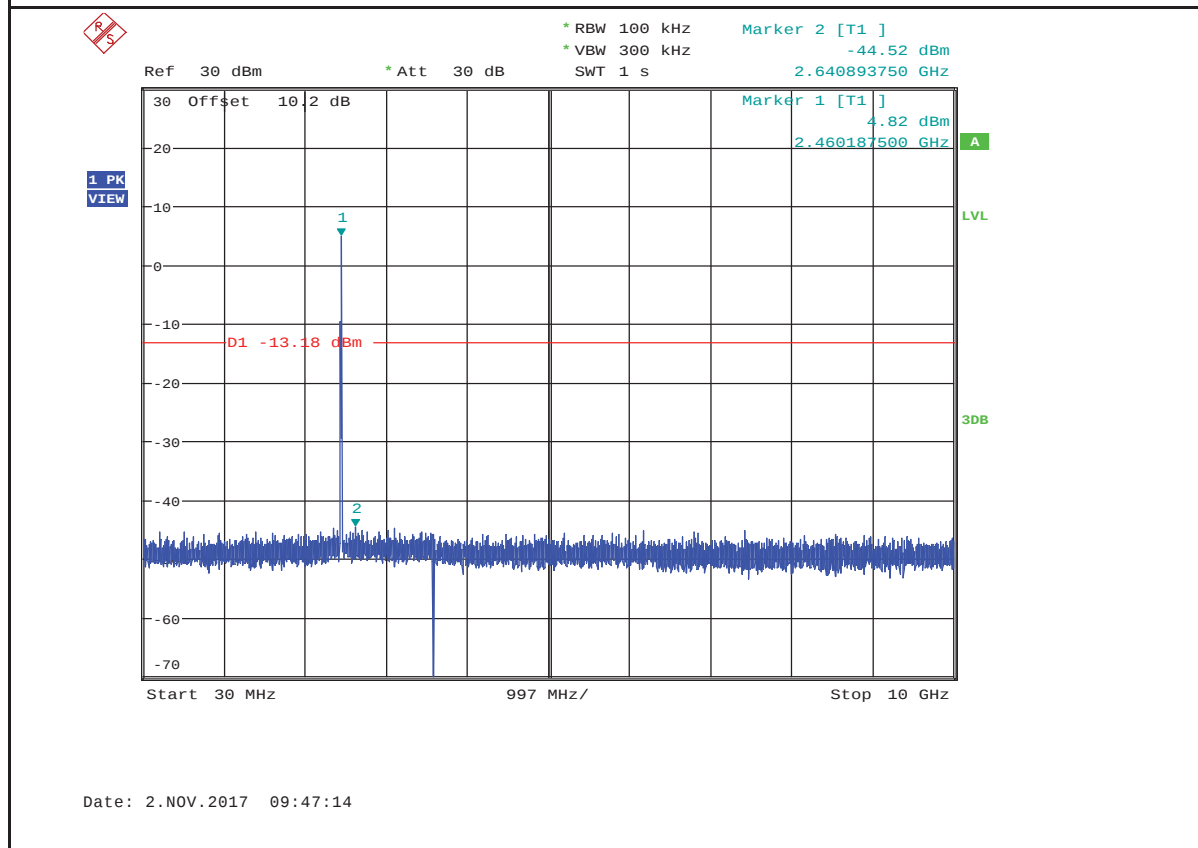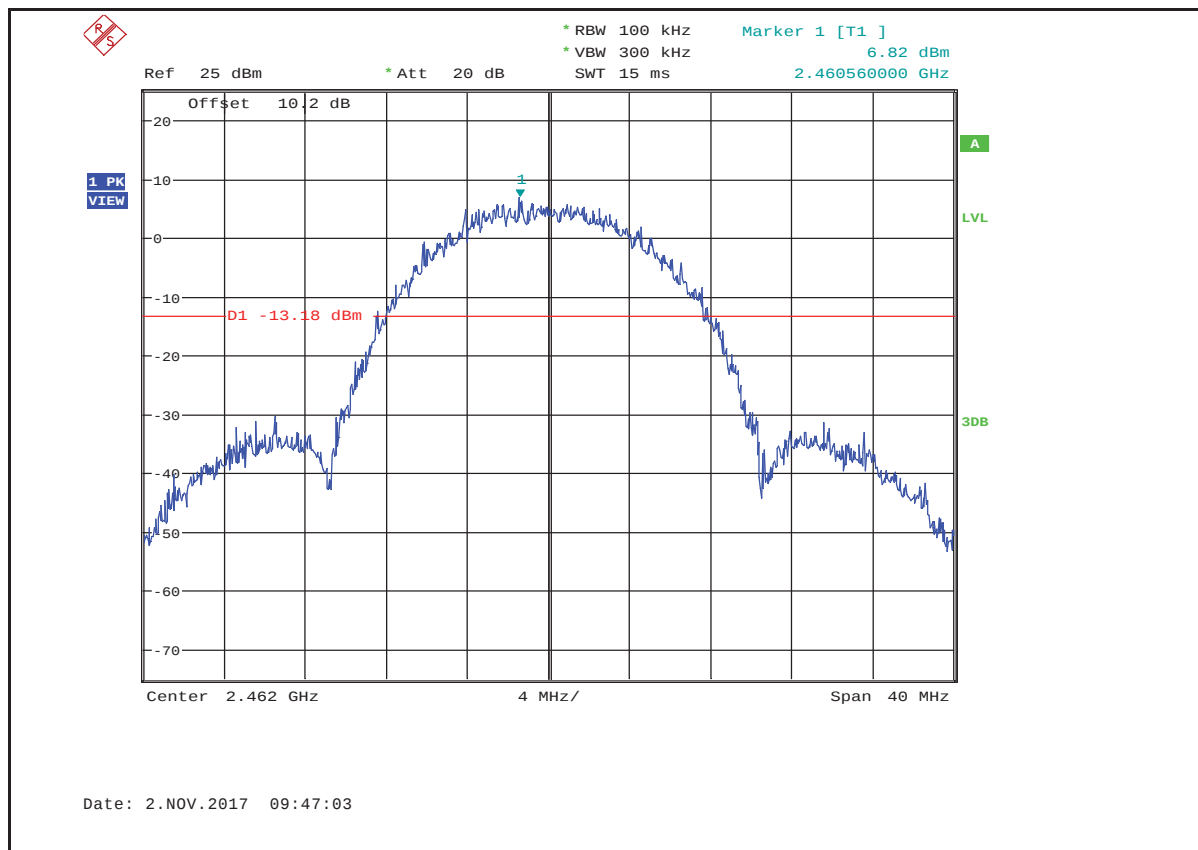


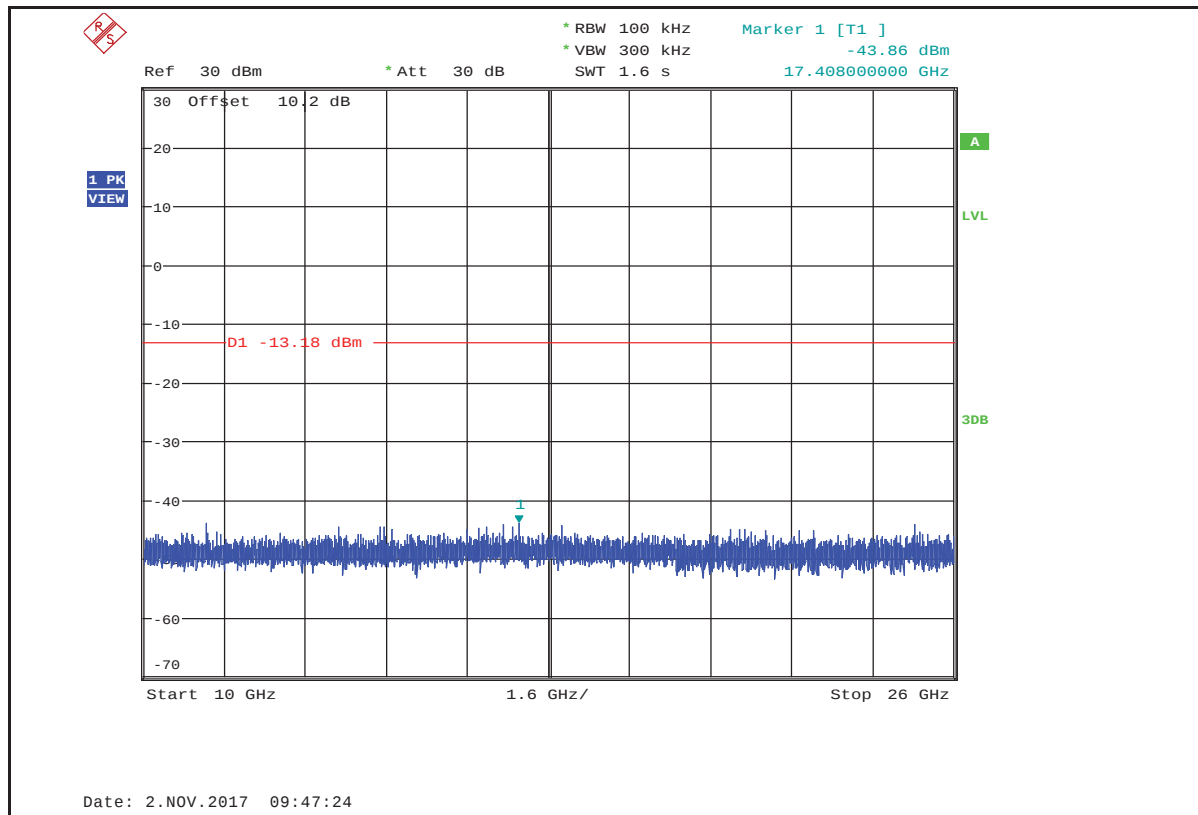



RF Conducted Spurious Emissions_11BMIMO_2462_Ant2

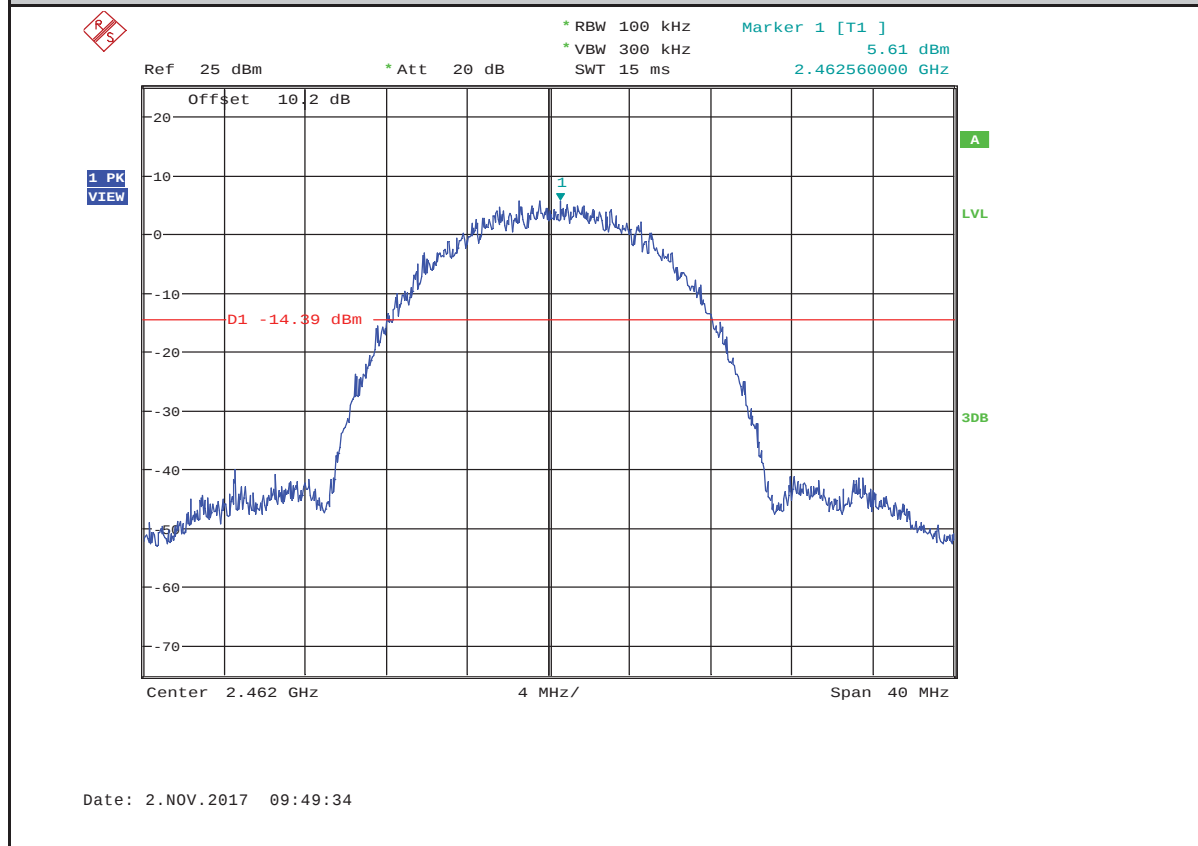

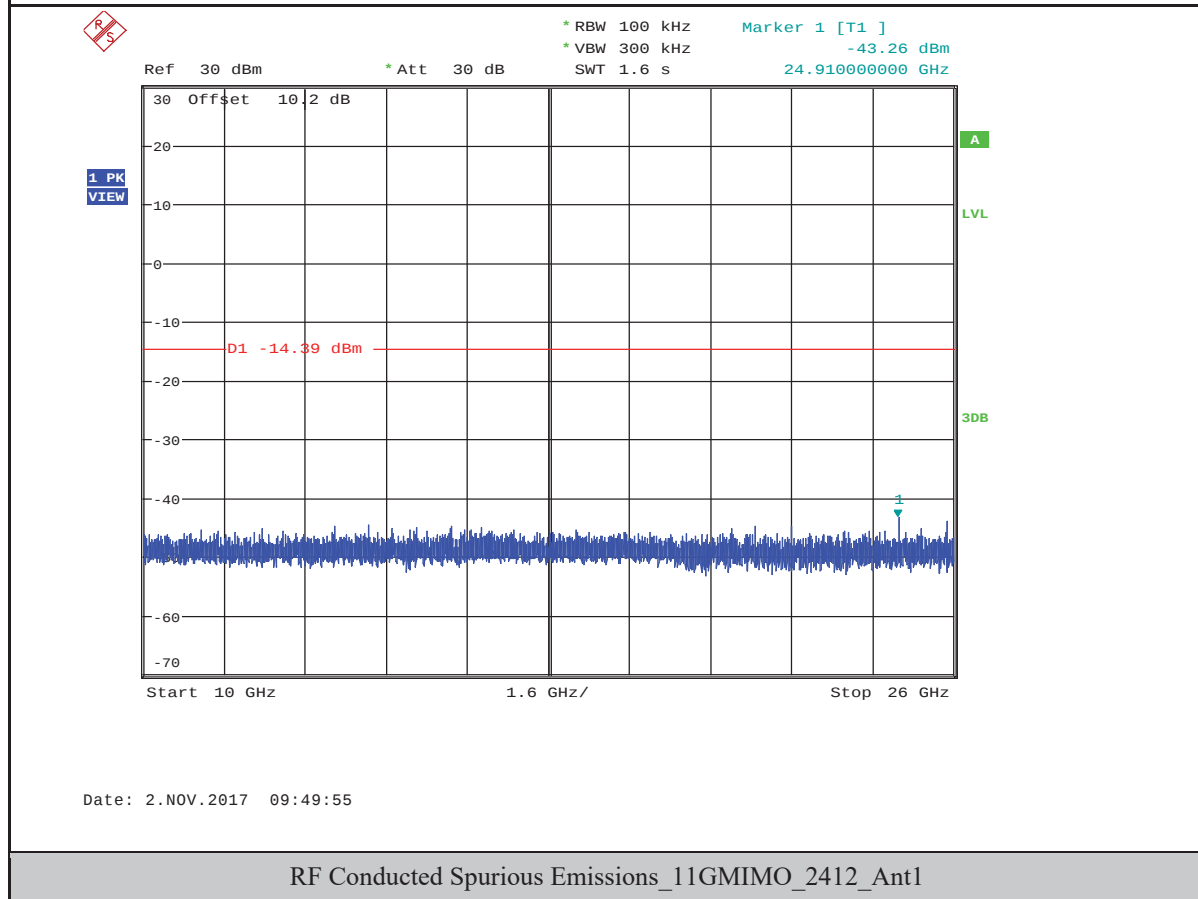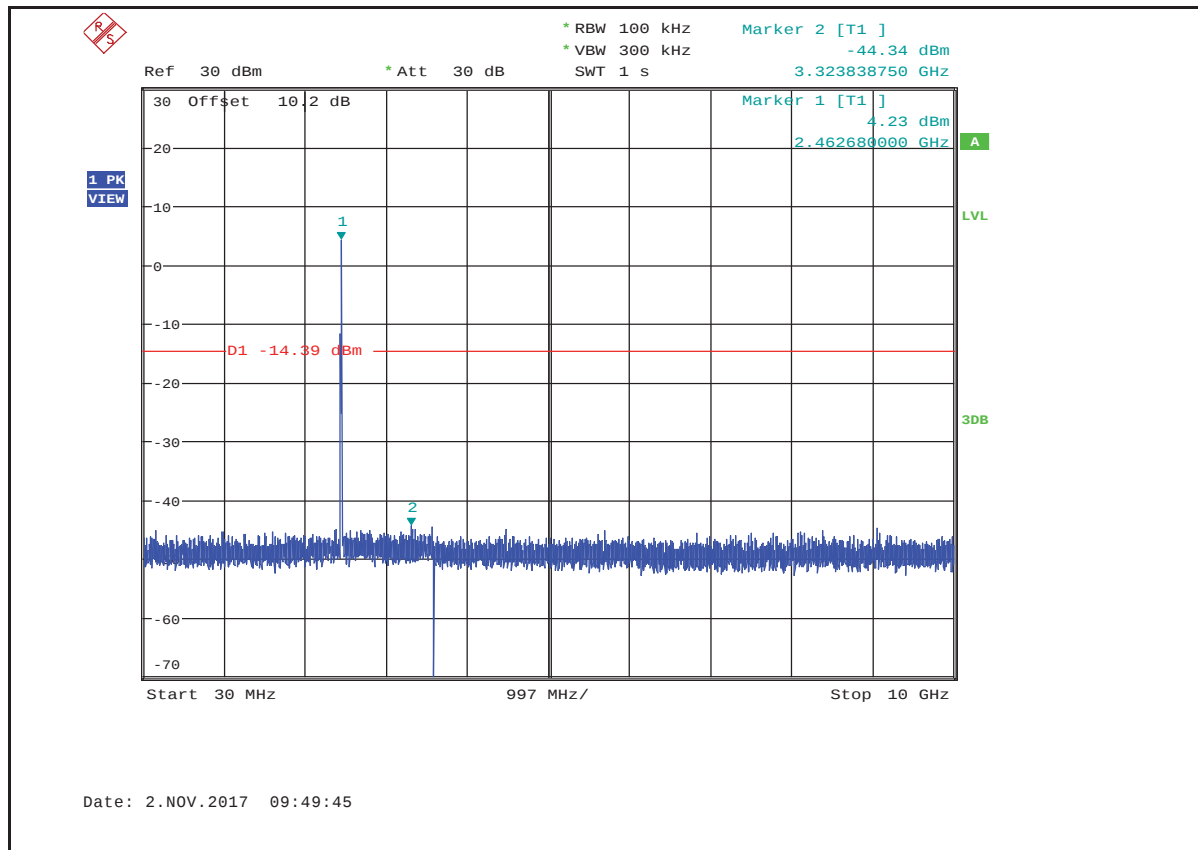




RF Conducted Spurious Emissions_11GMIMO_2412_Ant1

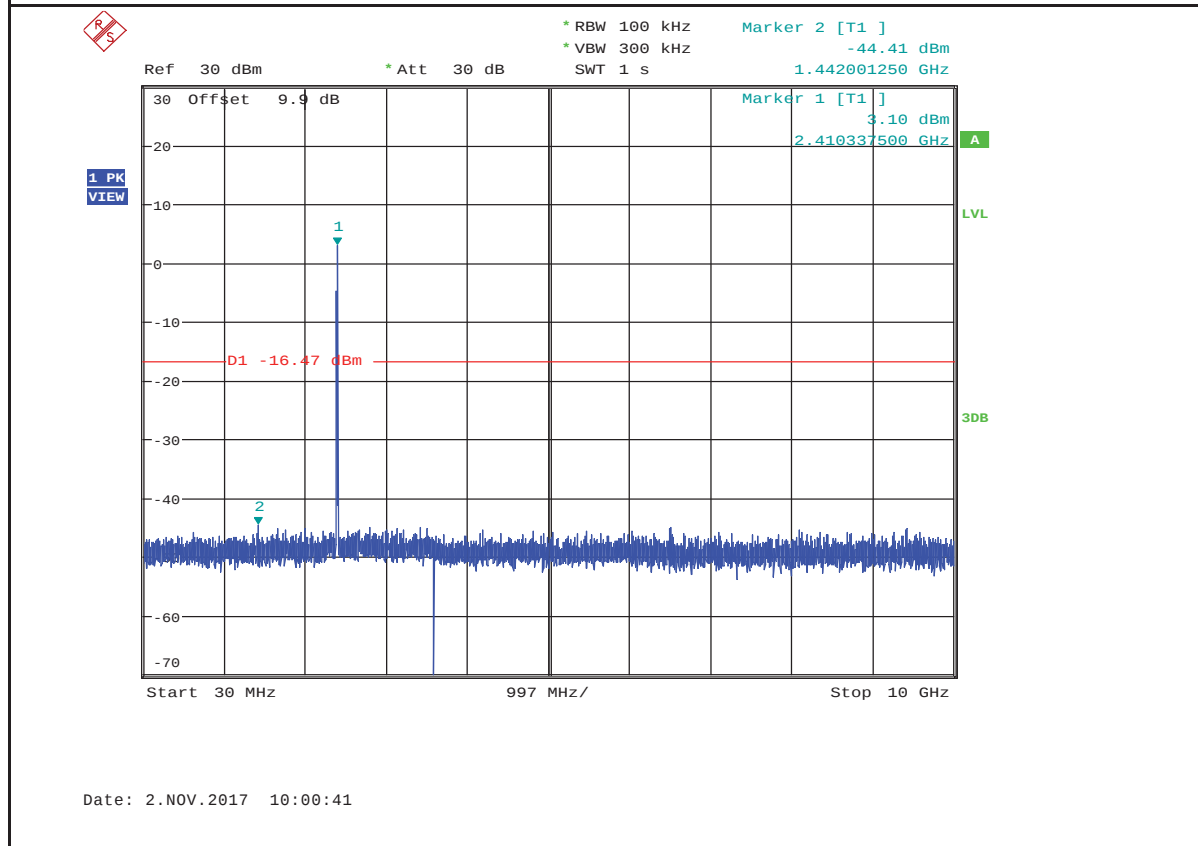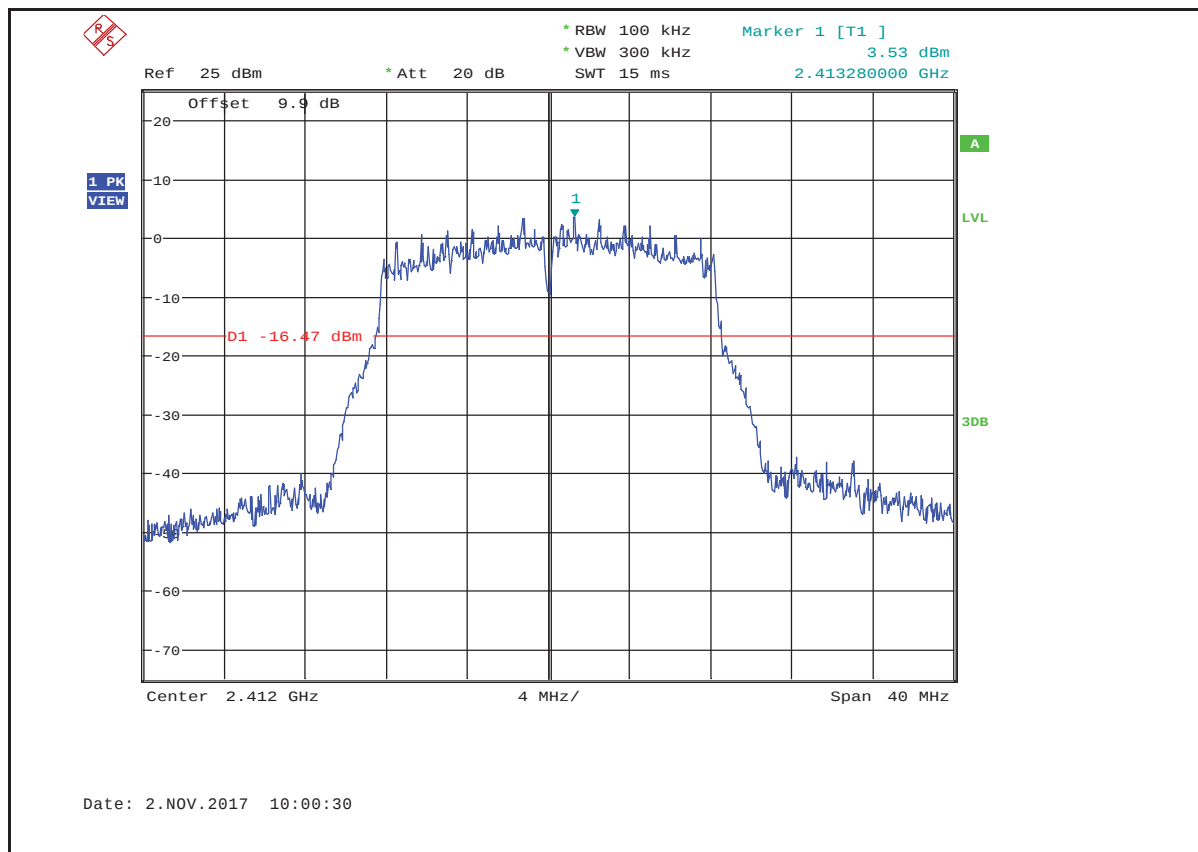


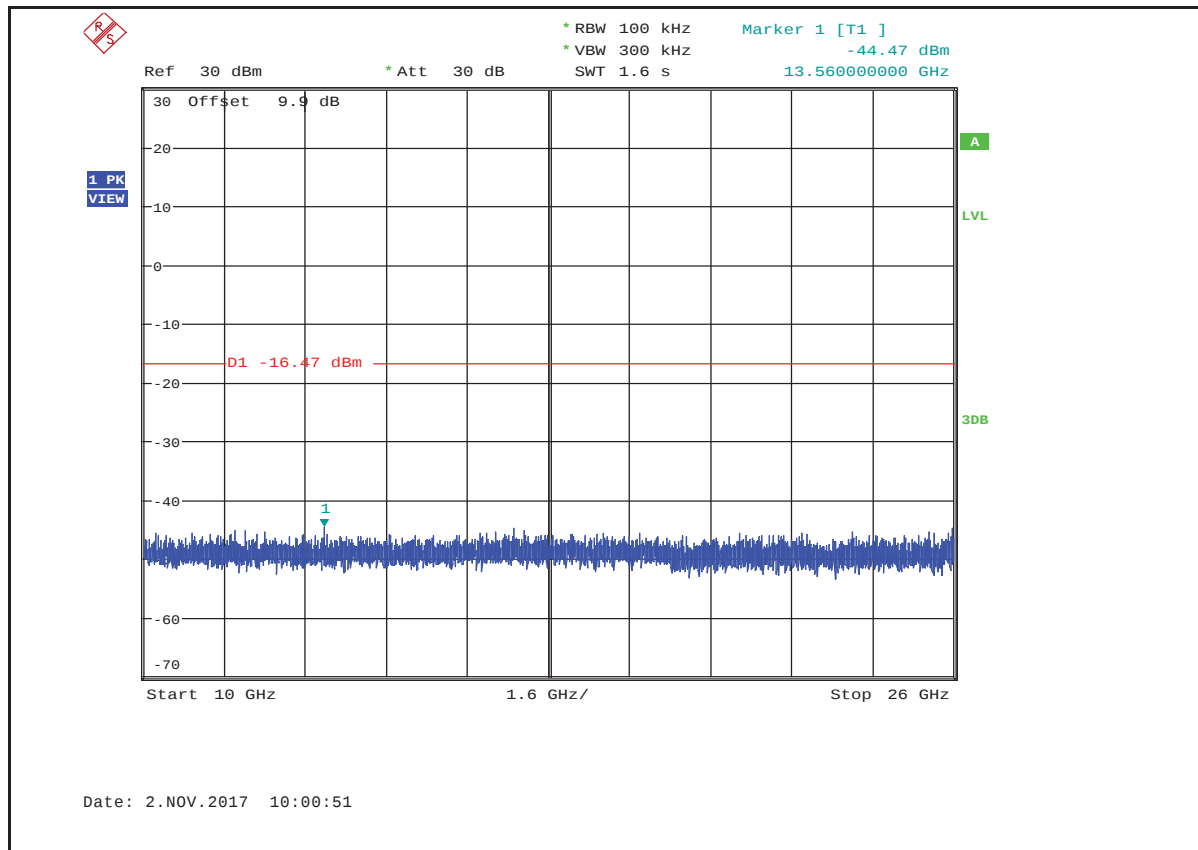



RF Conducted Spurious Emissions_11GMIMO_2412_Ant2

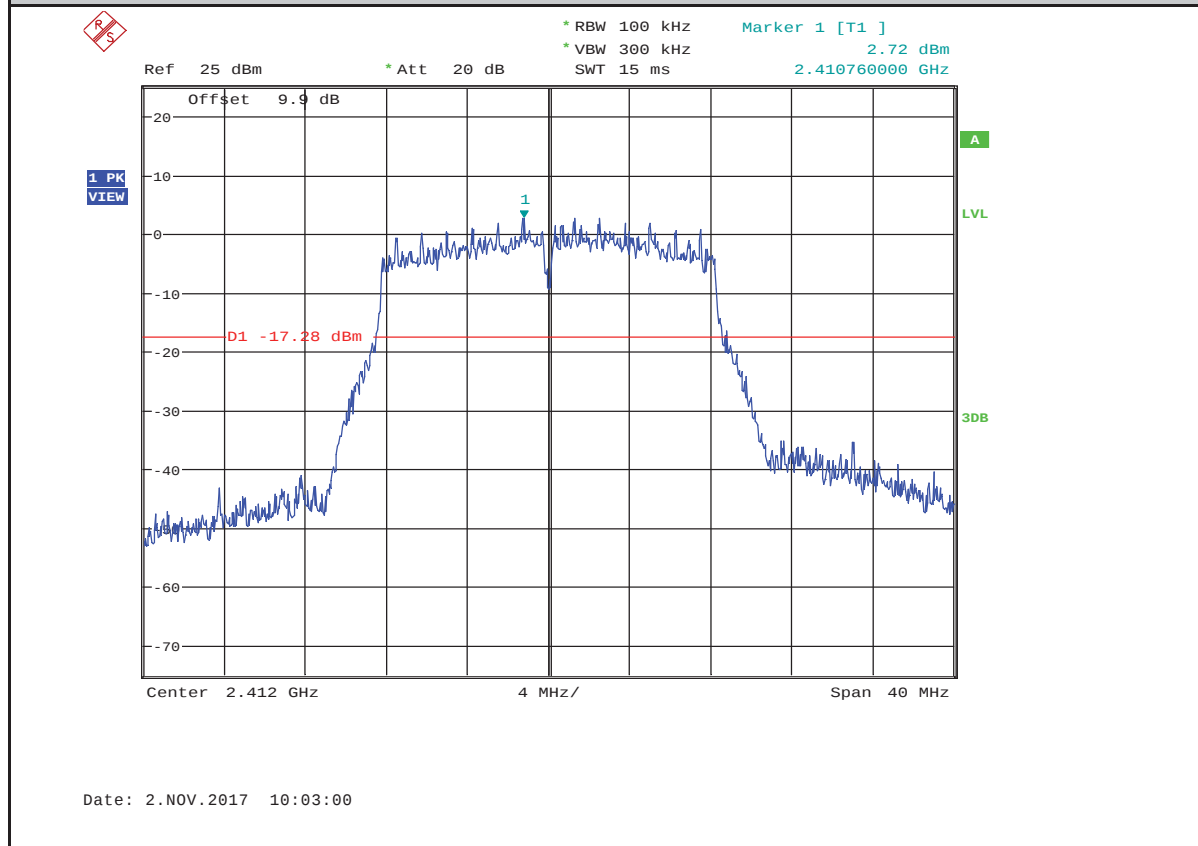

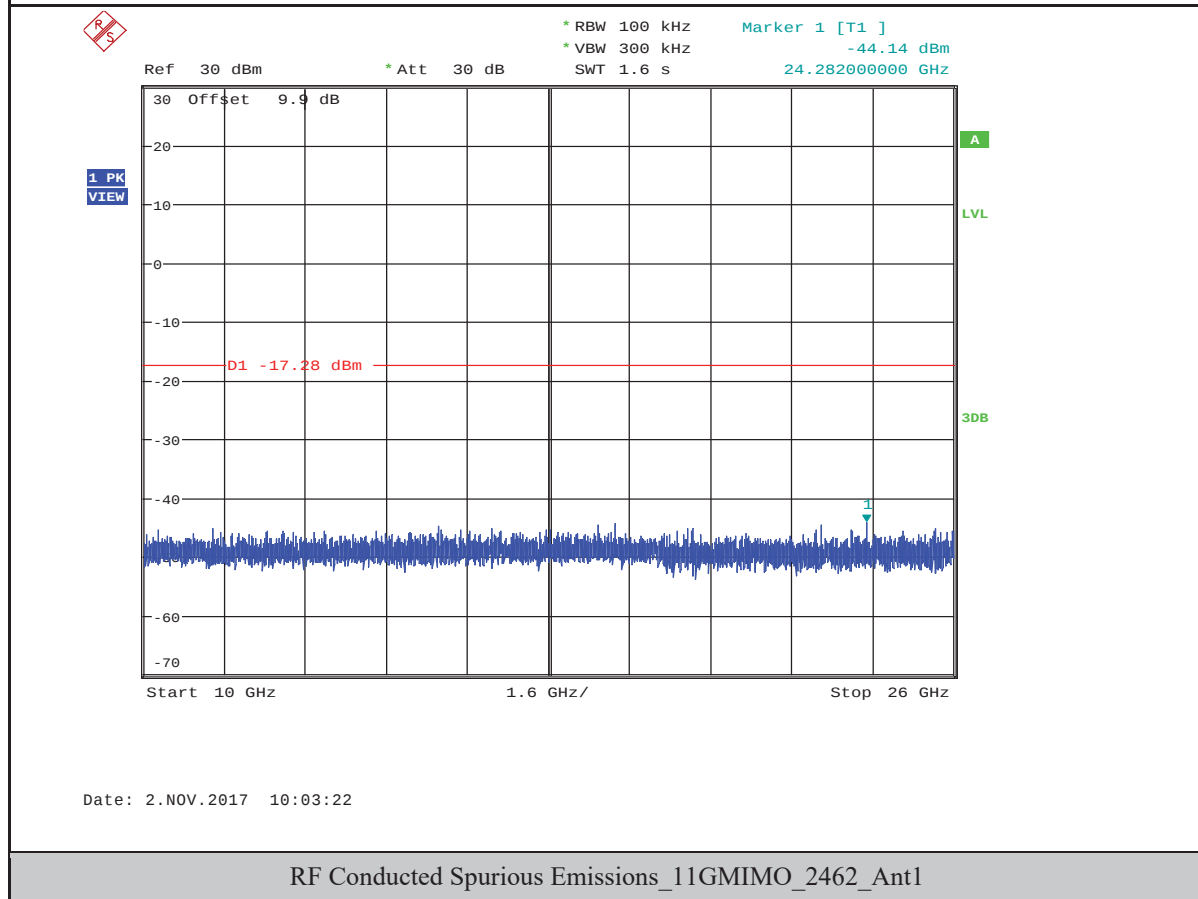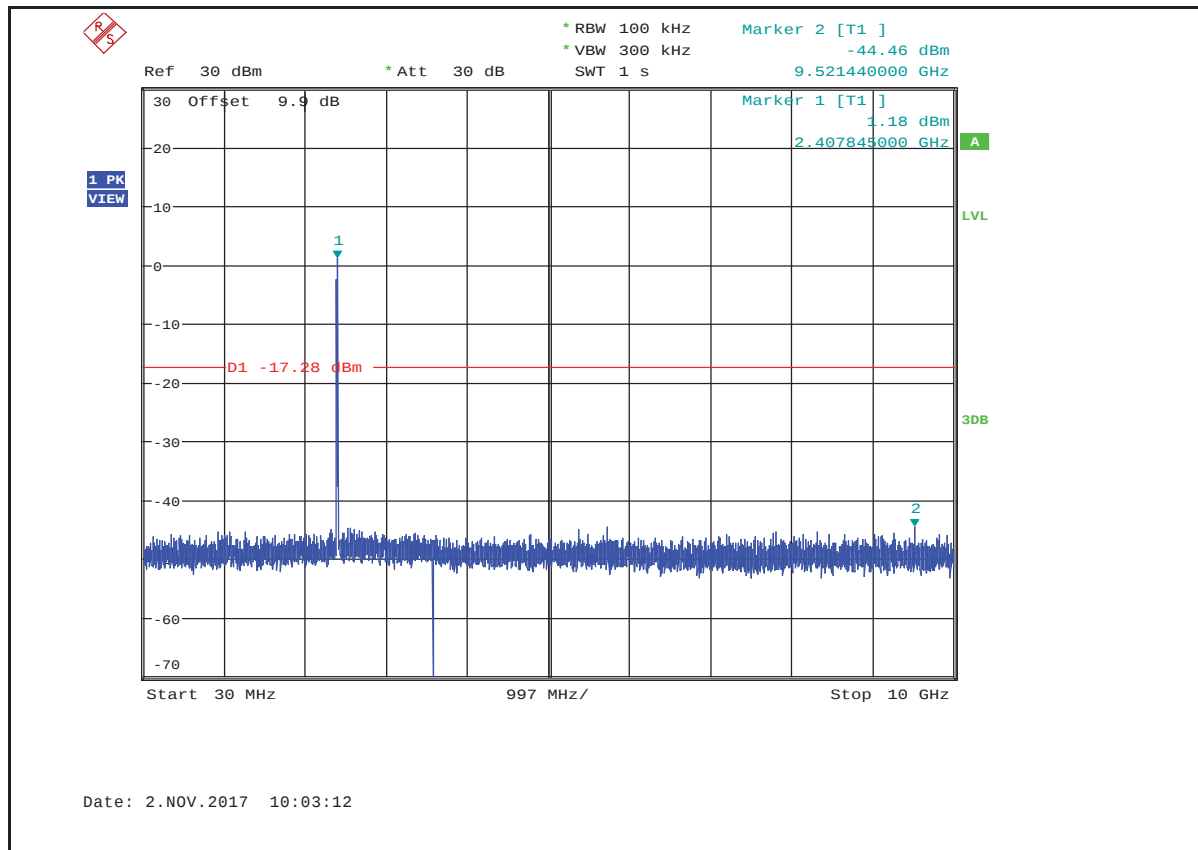




RF Conducted Spurious Emissions_11GMIMO_2462_Ant1

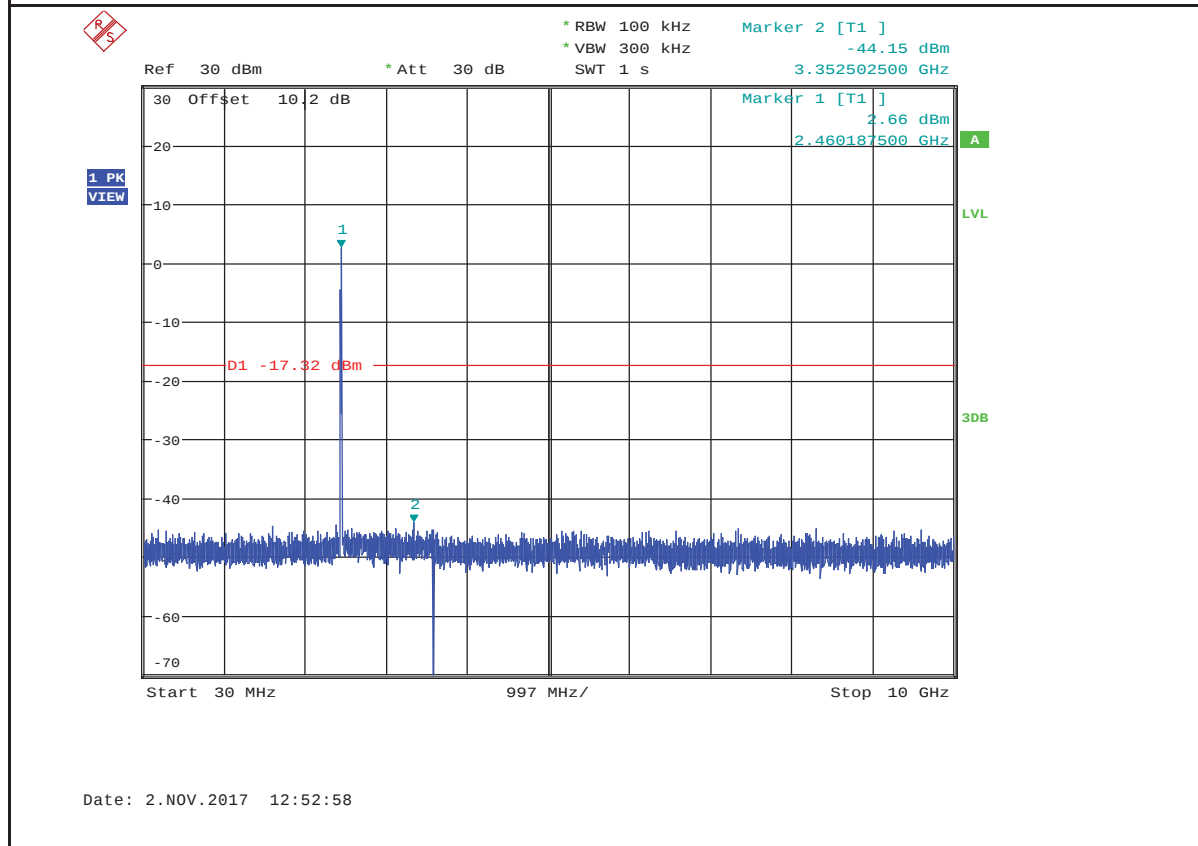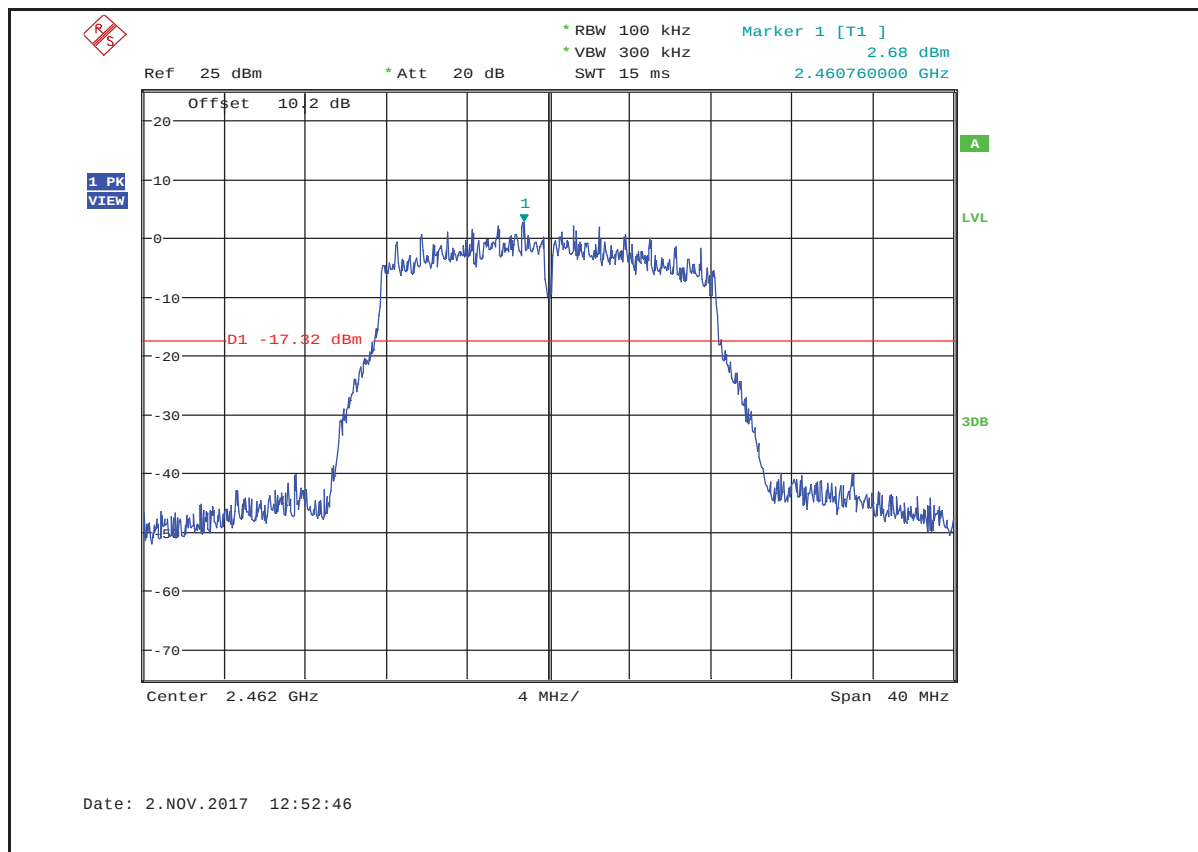


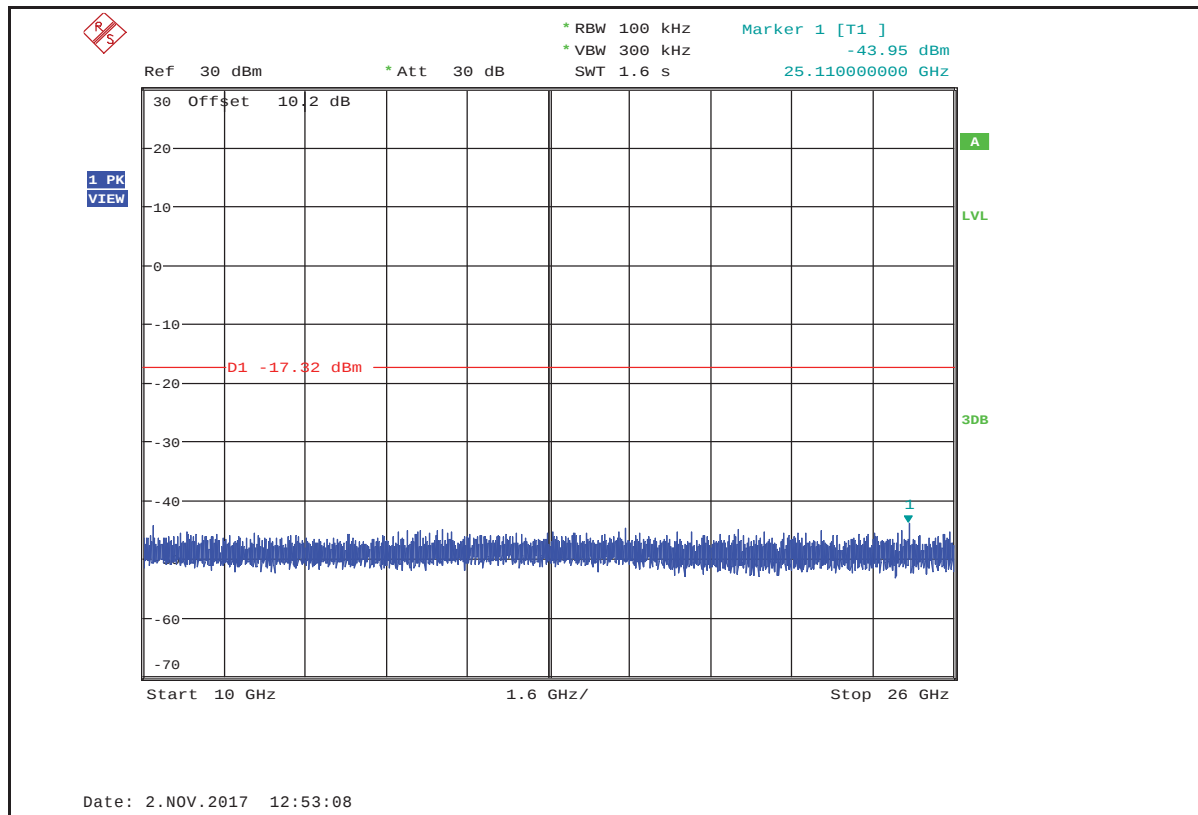



RF Conducted Spurious Emissions_11GMIMO_2462_Ant2

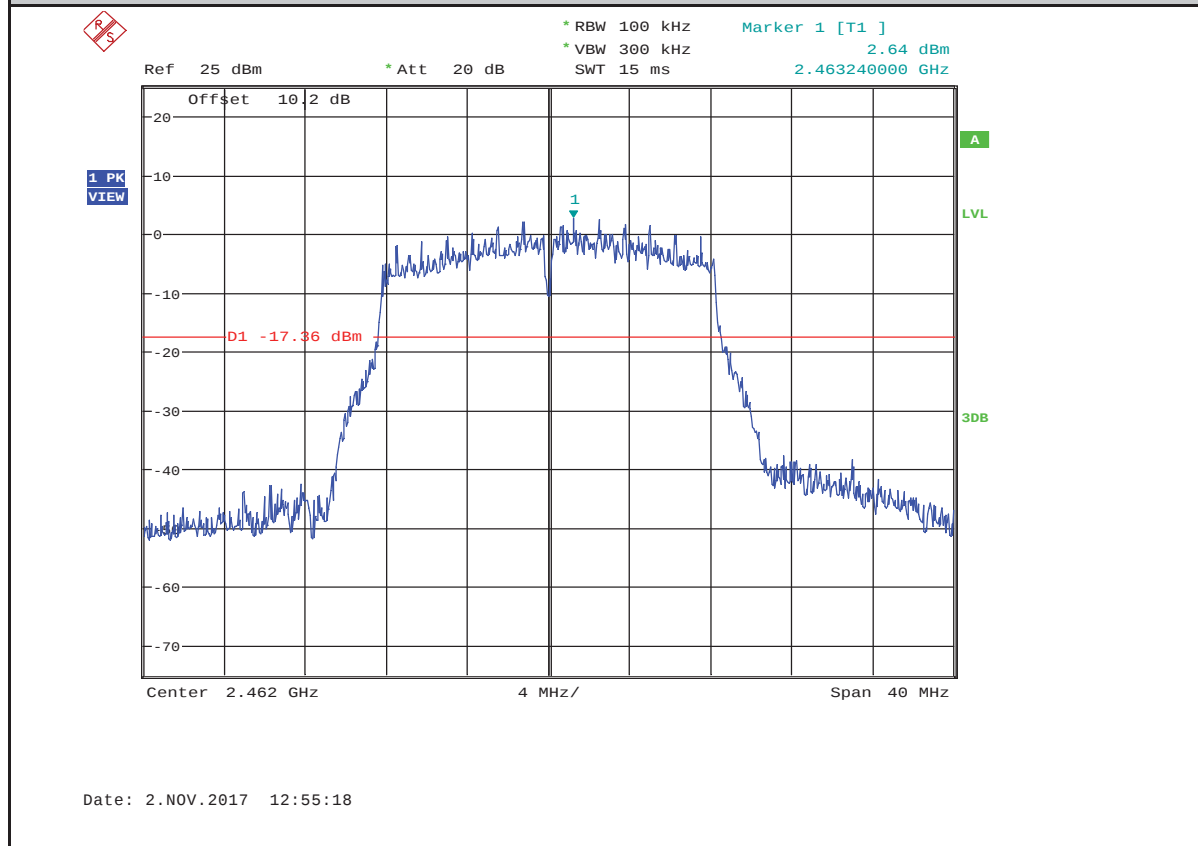

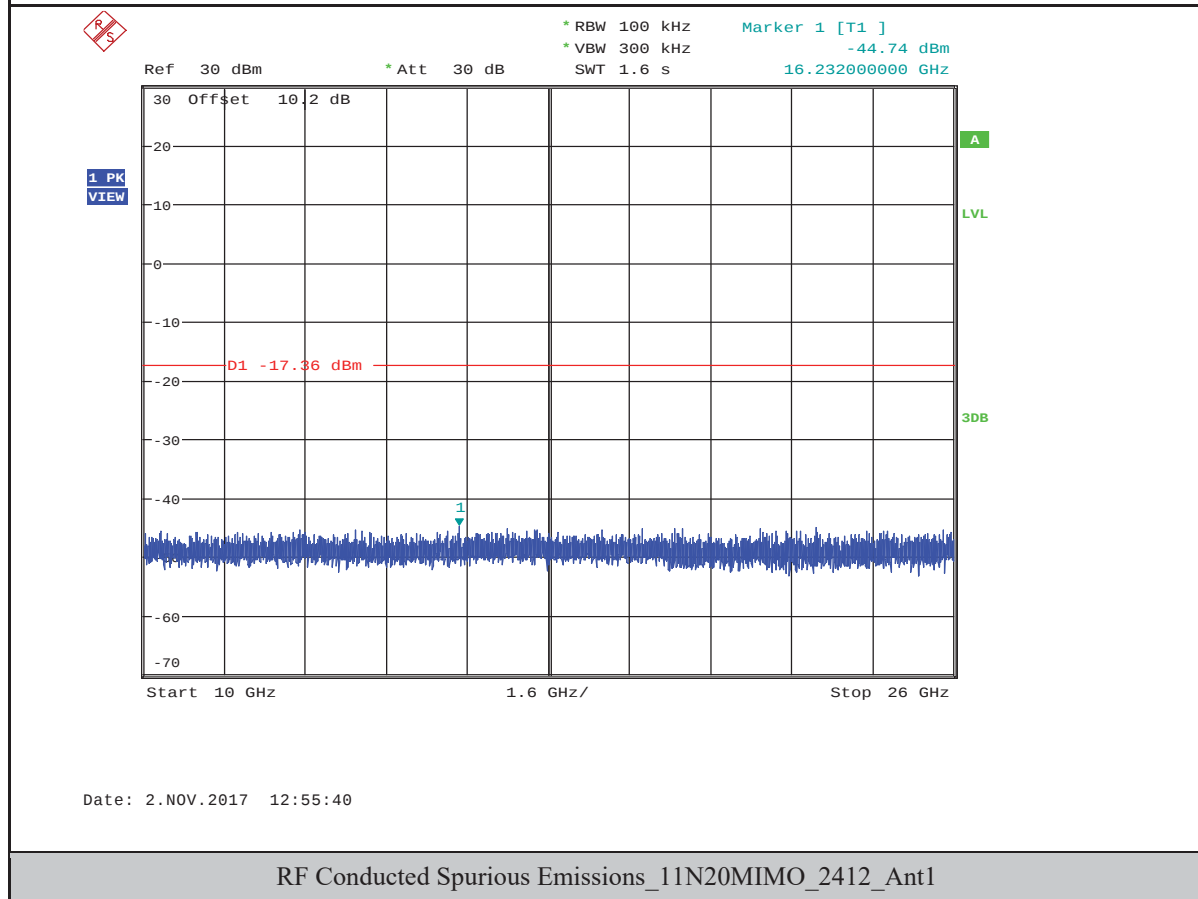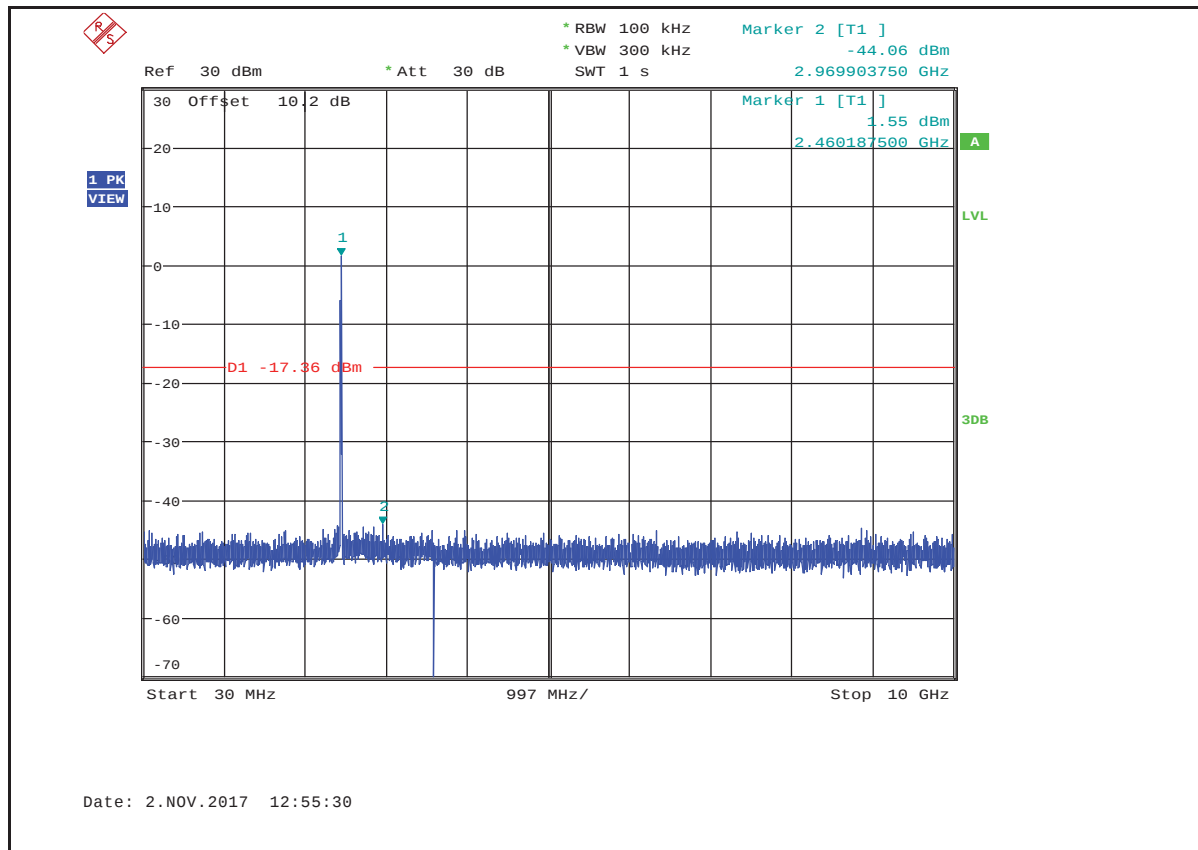




RF Conducted Spurious Emissions_11N20MIMO_2412_Ant1

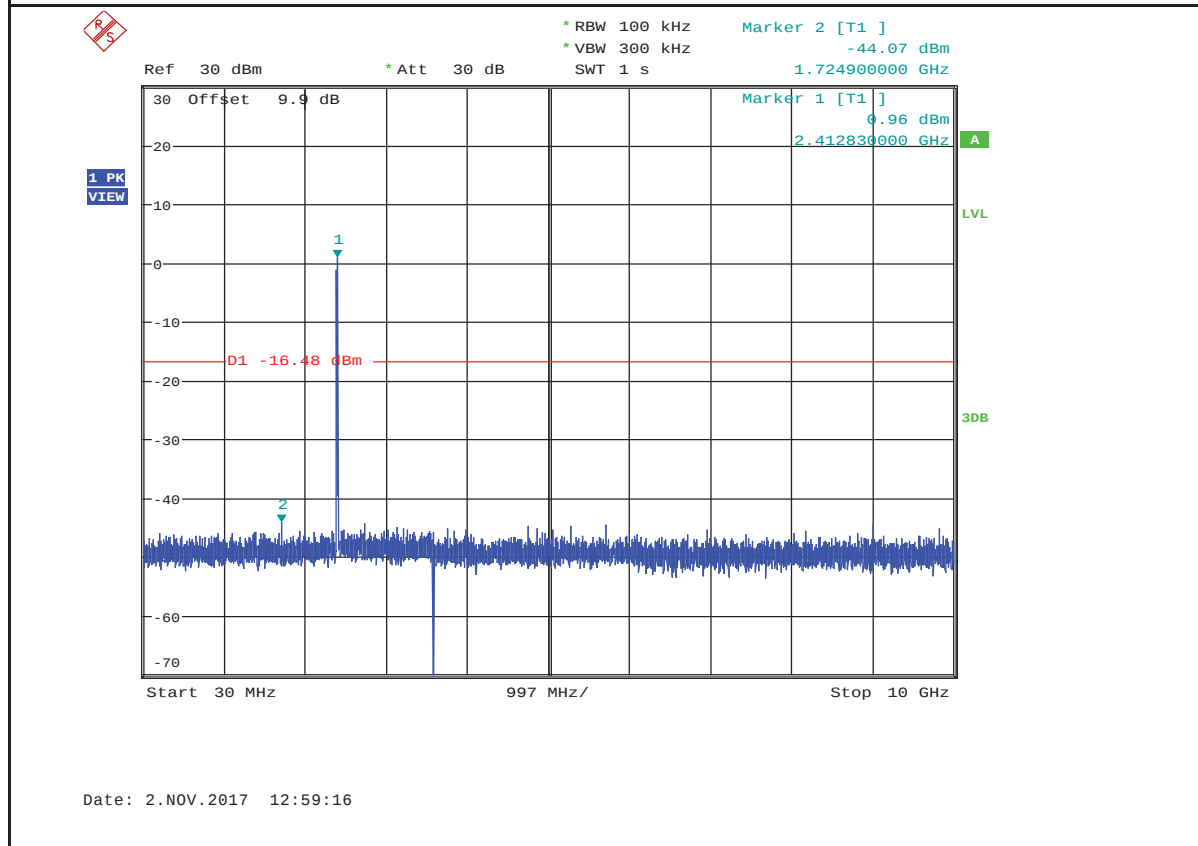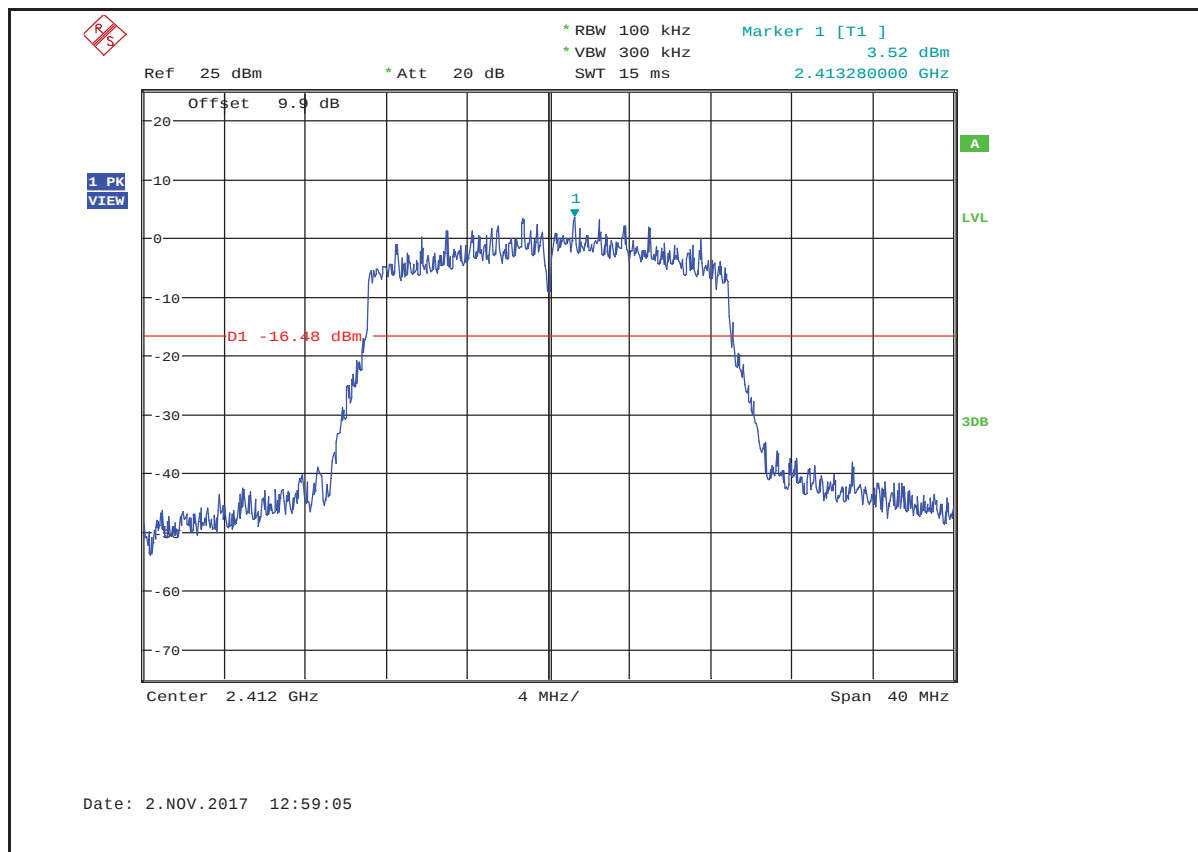


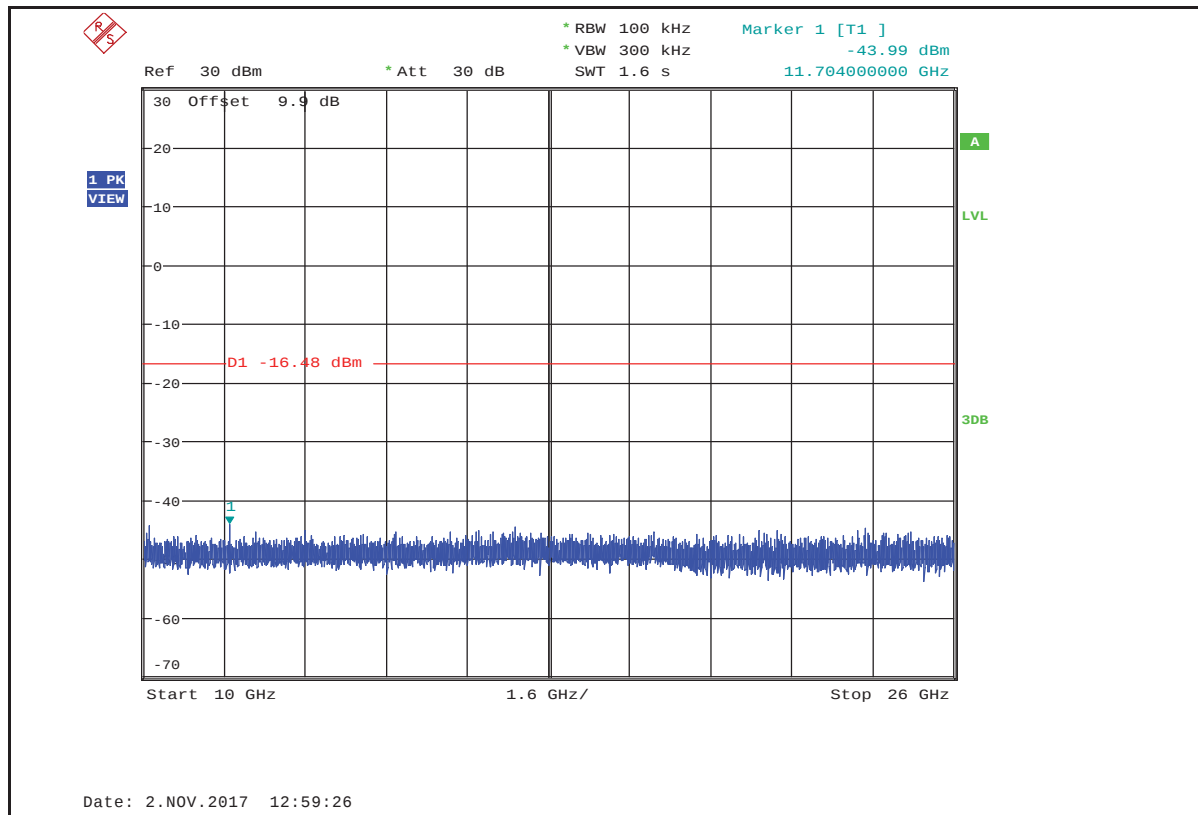



RF Conducted Spurious Emissions_11N20MIMO_2412_Ant2

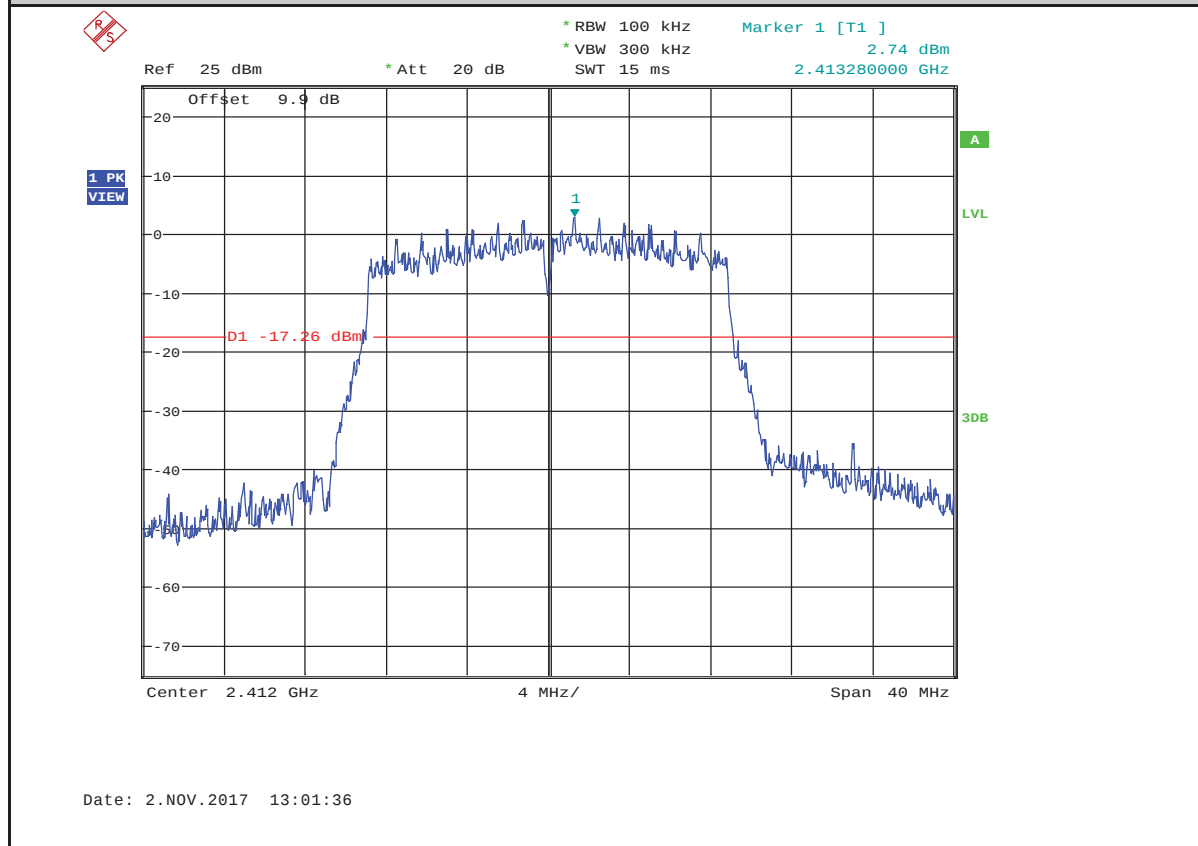

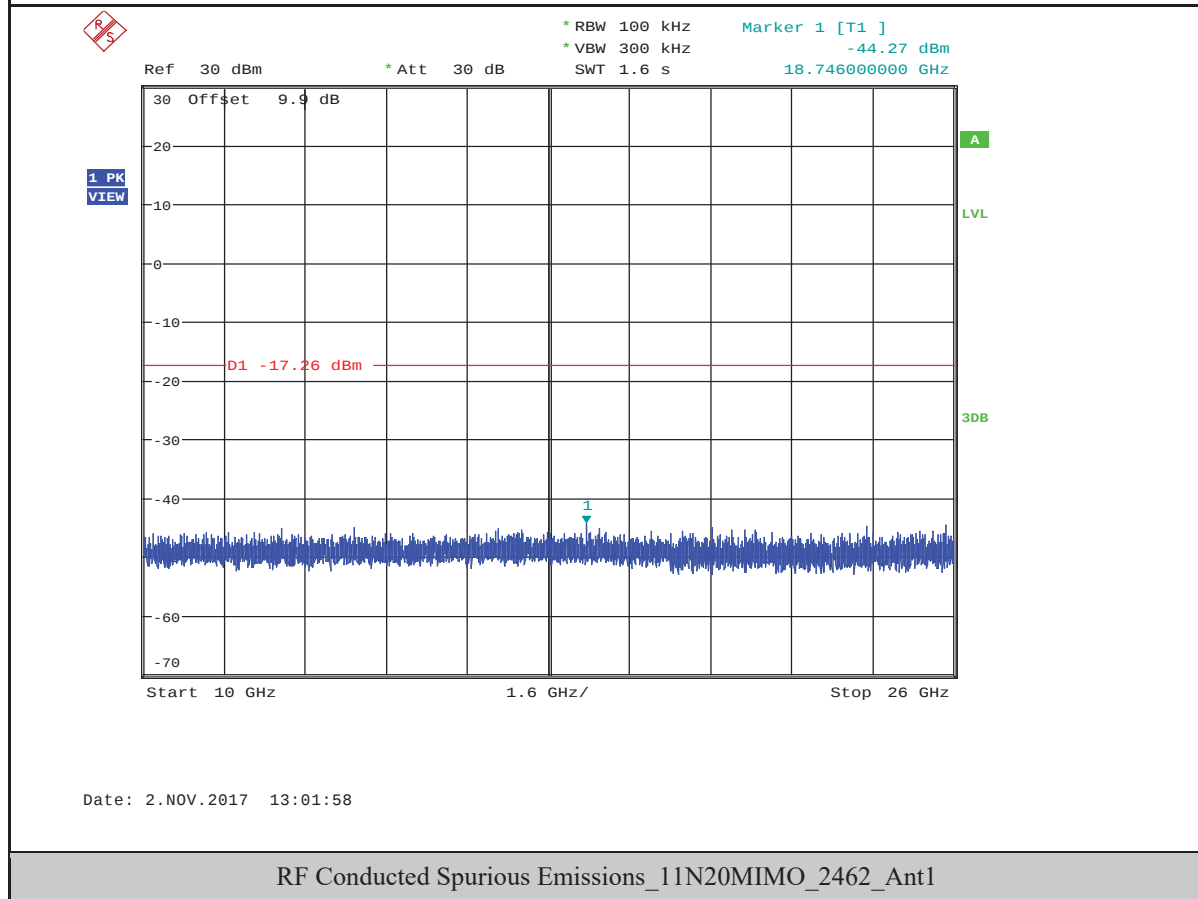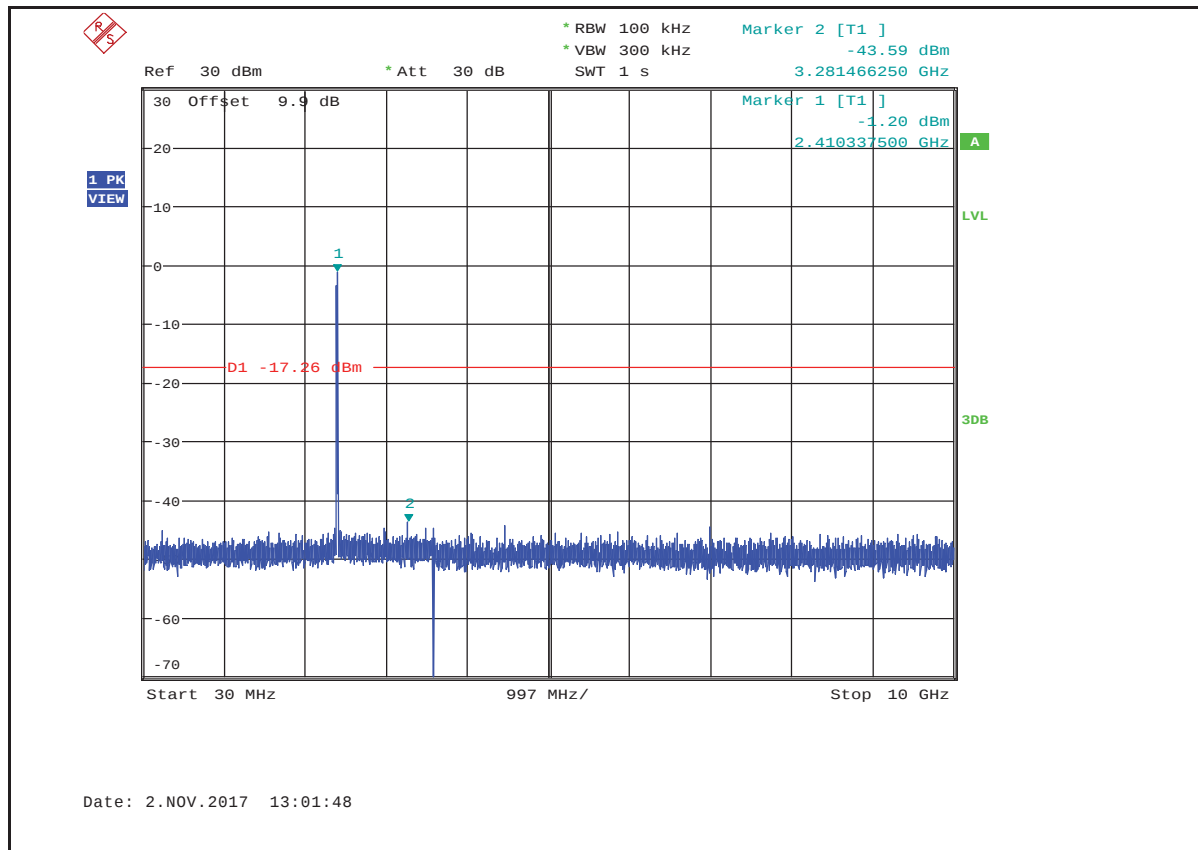




RF Conducted Spurious Emissions_11N20MIMO_2462_Ant1

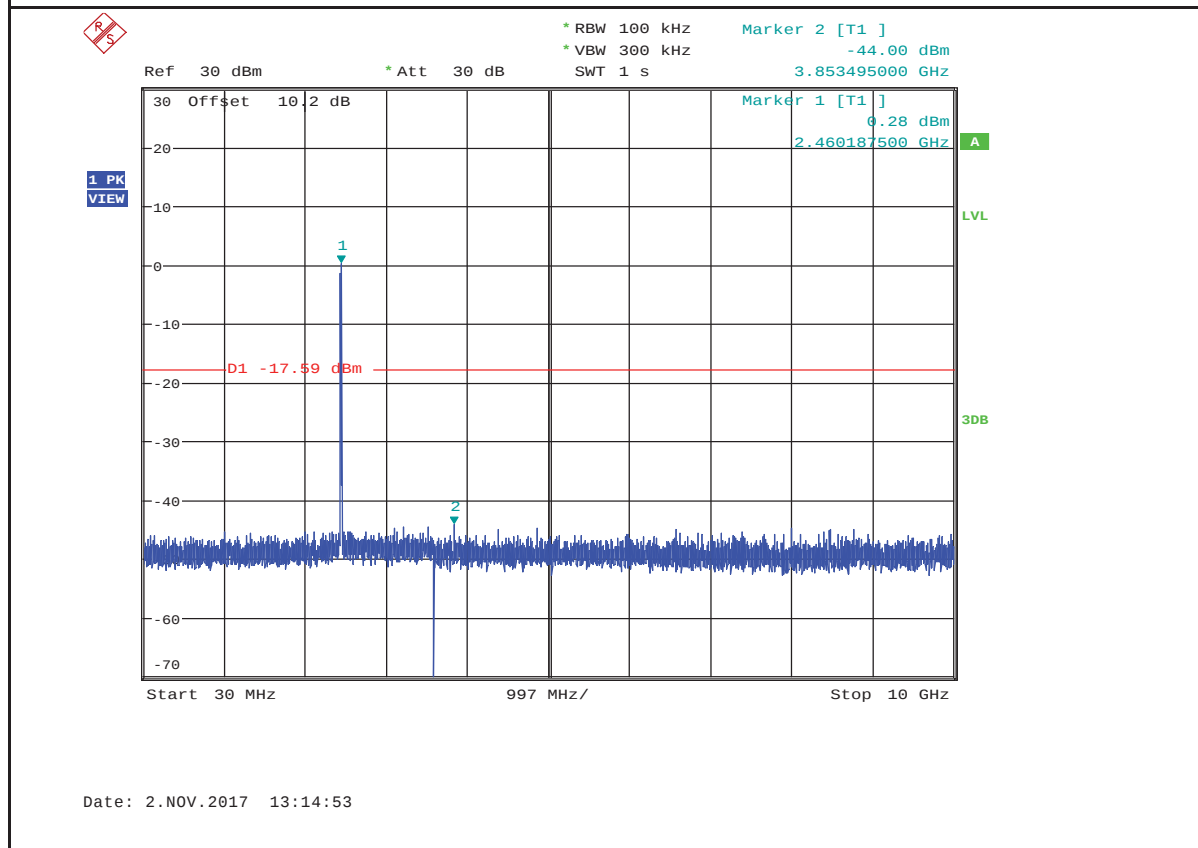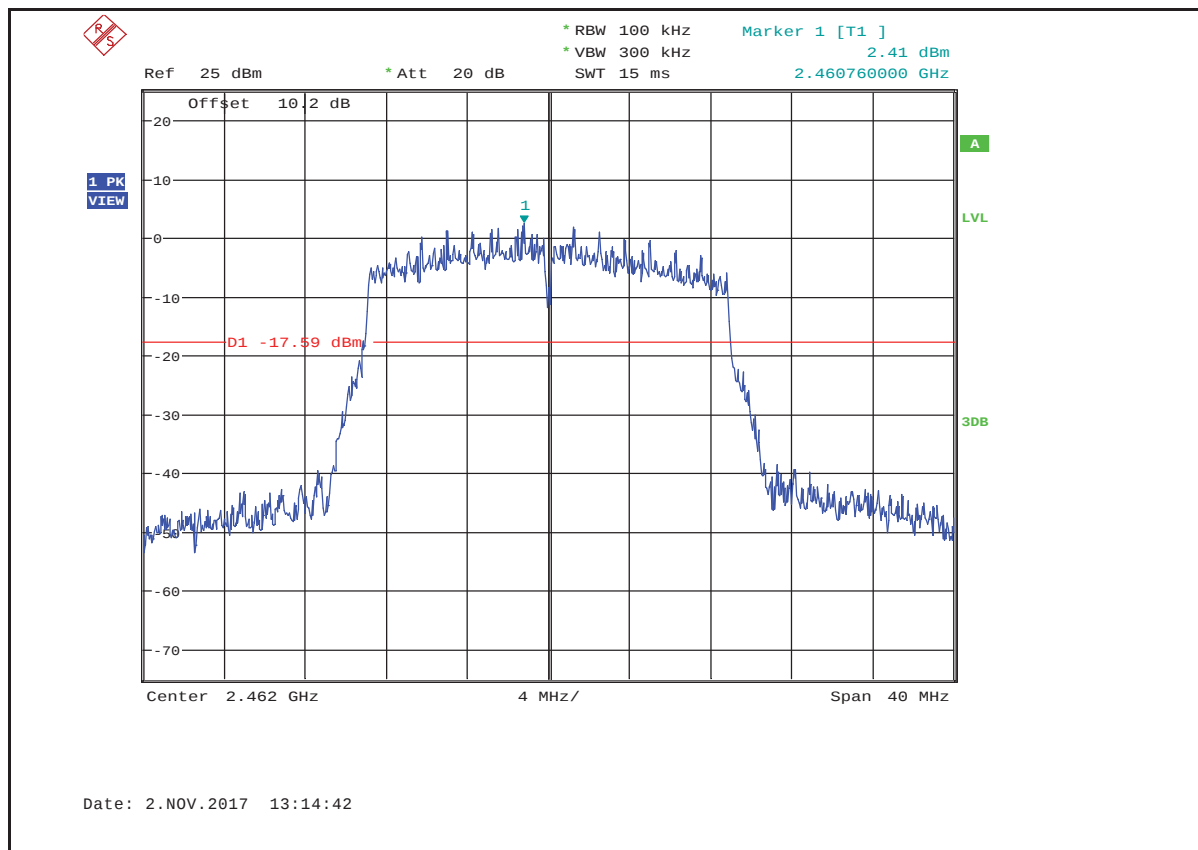

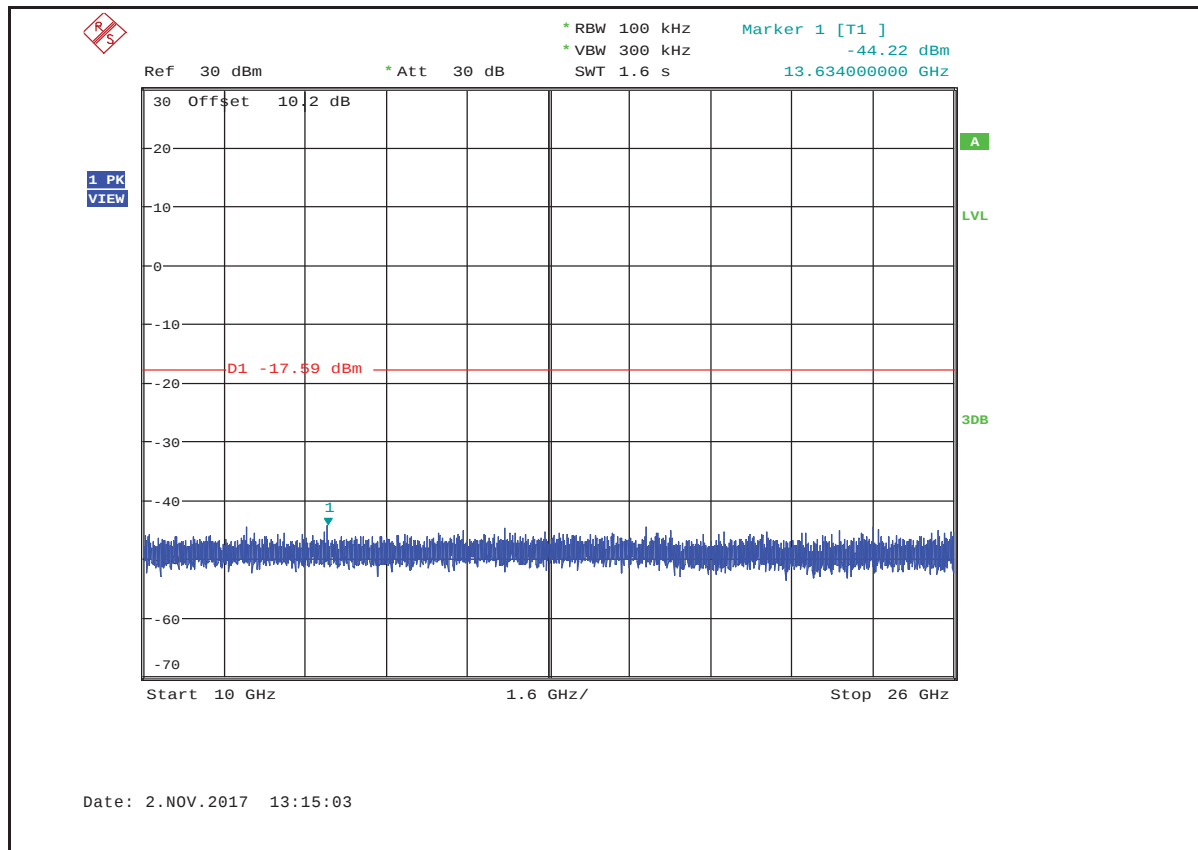


RF Conducted Spurious Emissions_11N20MIMO_2462_Ant2

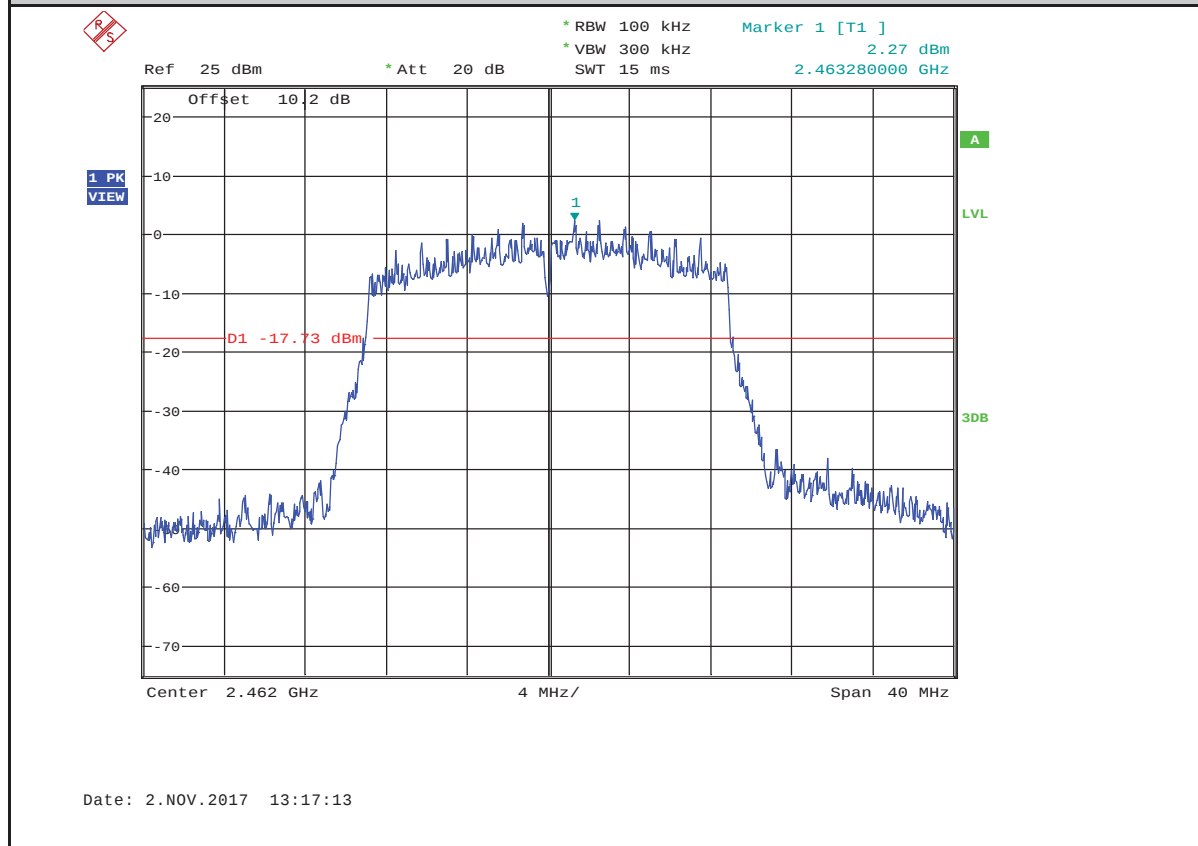


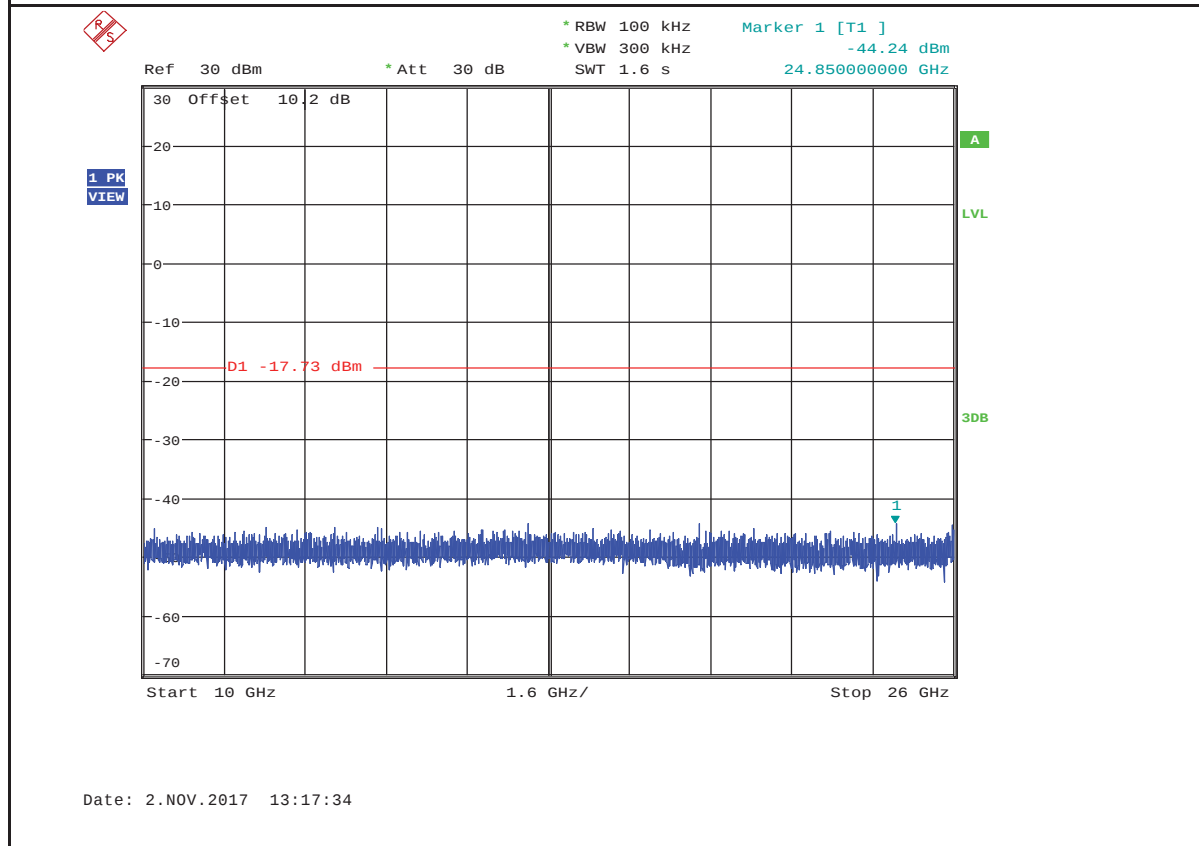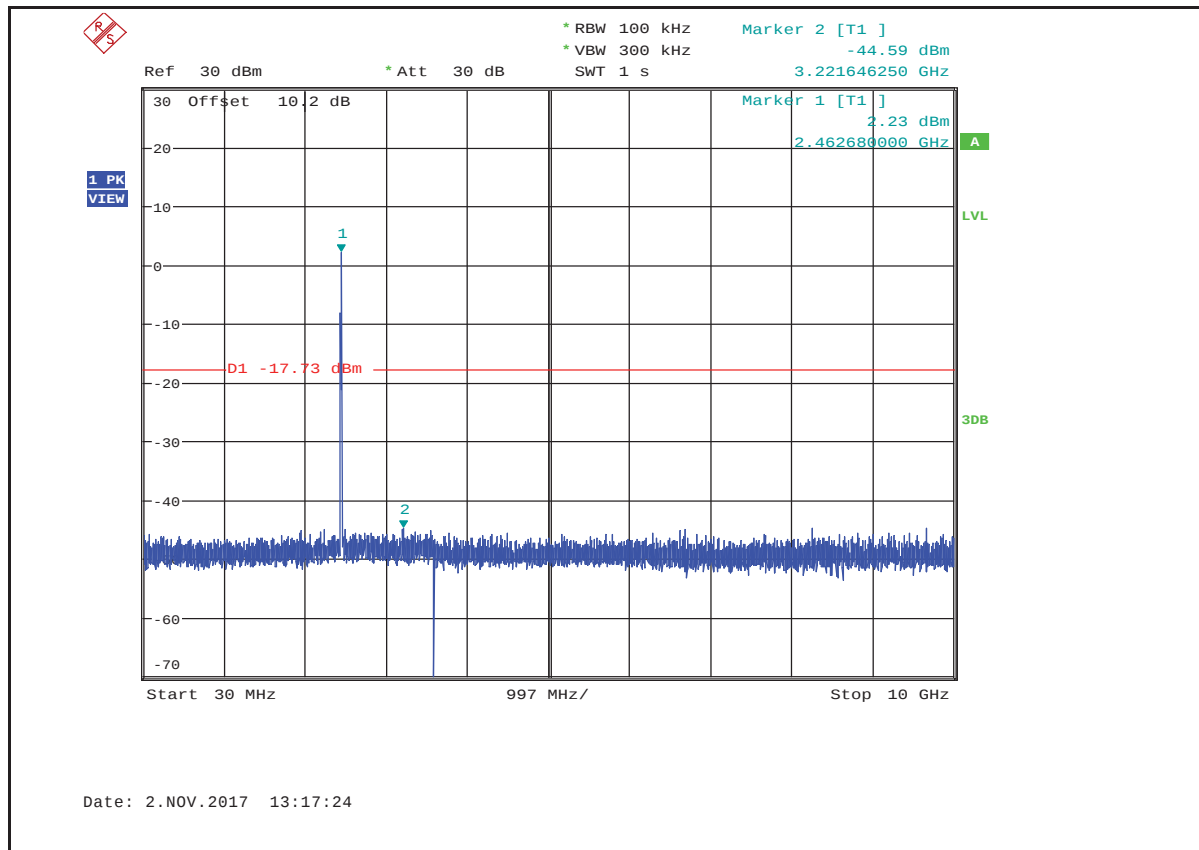


RF Conducted Spurious Emissions_11N40MIMO_2422_Ant1

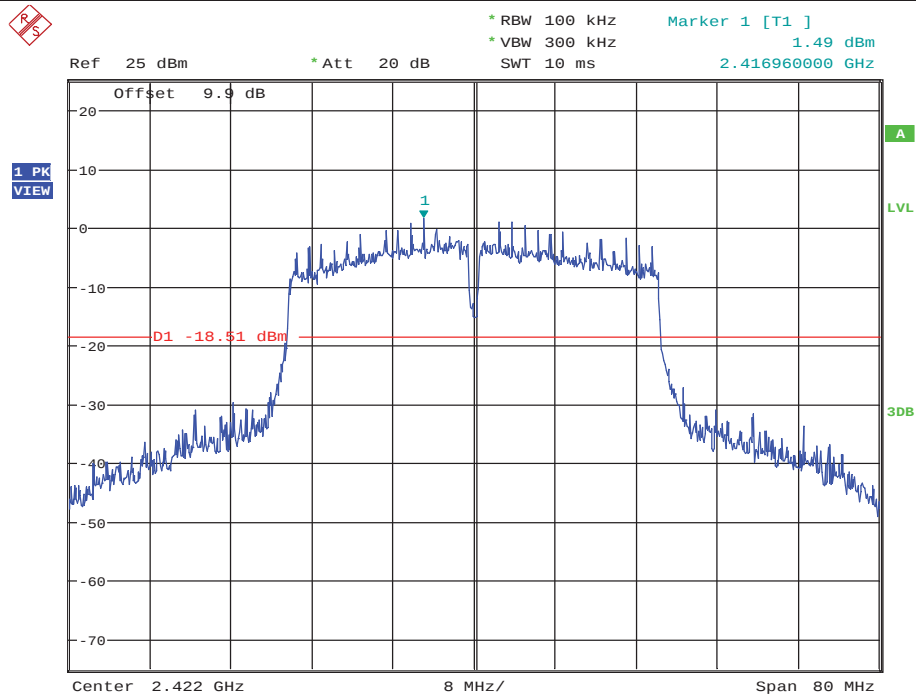


Date: 2.NOV.2017 13:21:20

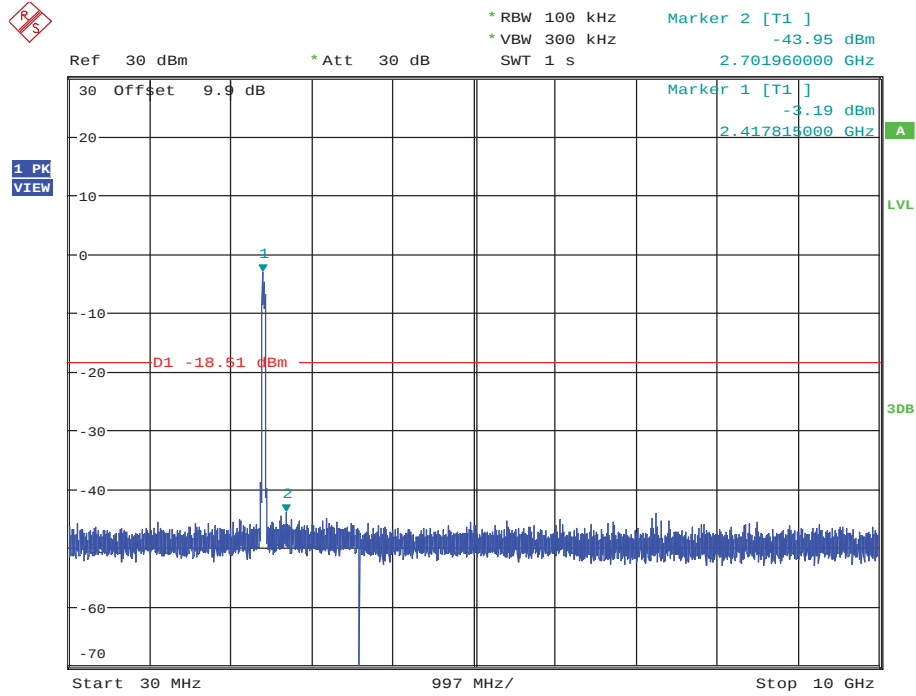


Date: 2.NOV.2017 13:21:32

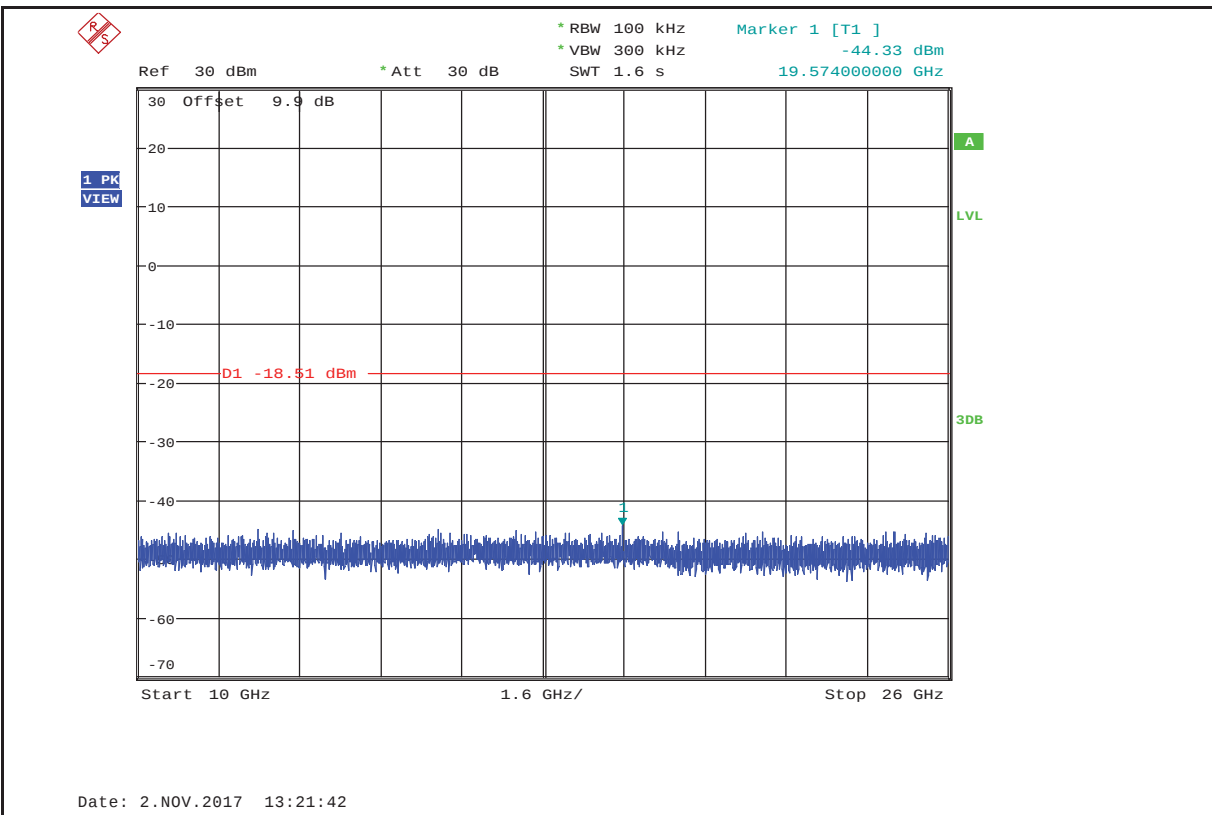


RF Conducted Spurious Emissions_11N40MIMO_2422_Ant2

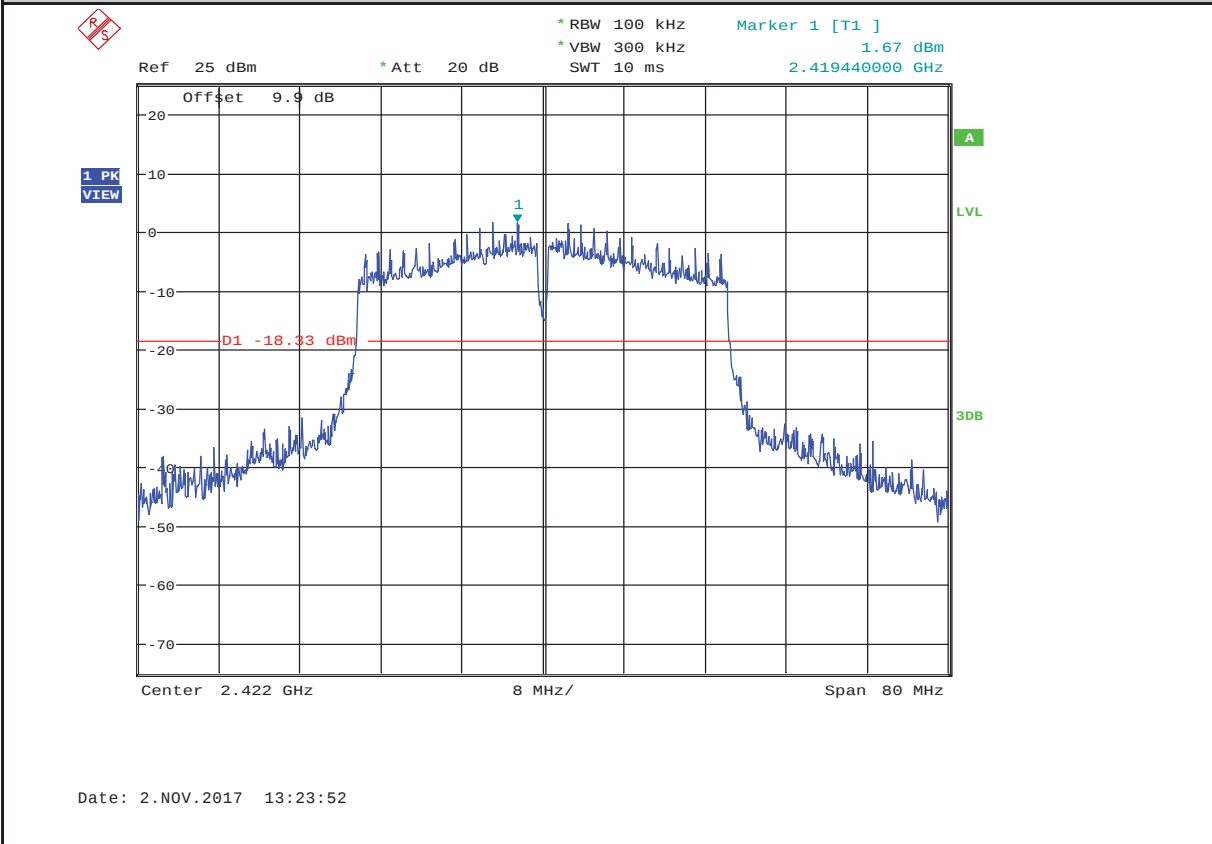

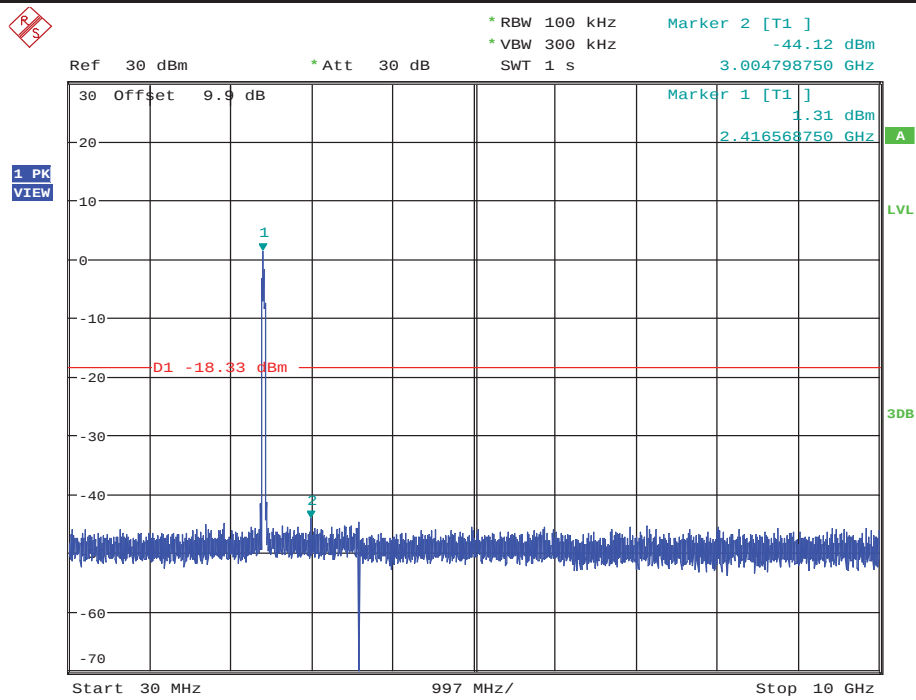


Date: 2.NOV.2017 13:24:03

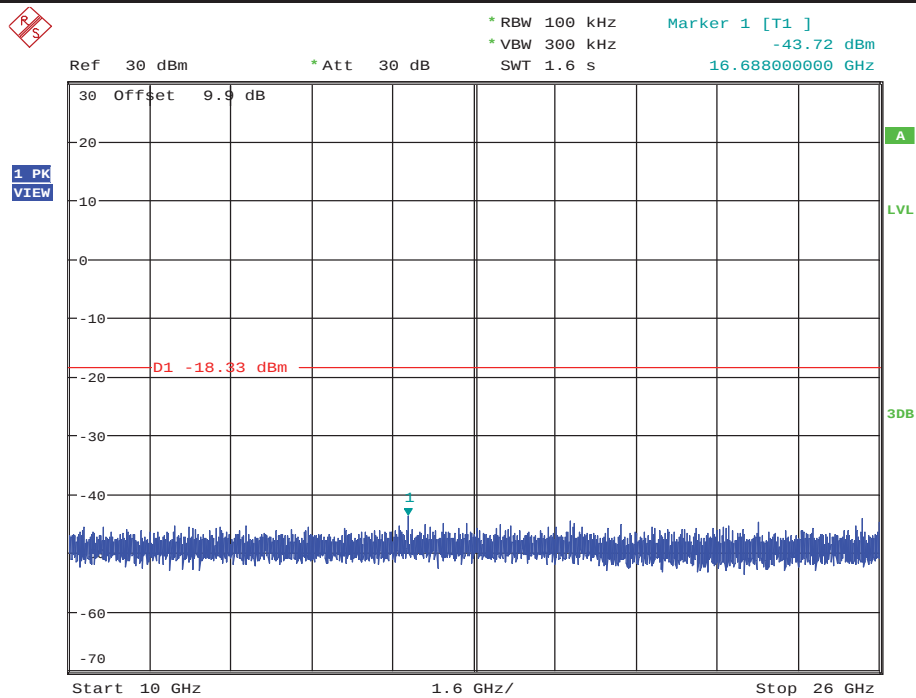


Date: 2.NOV.2017 13:24:13


RF Conducted Spurious Emissions_11N40MIMO_2452_Ant1

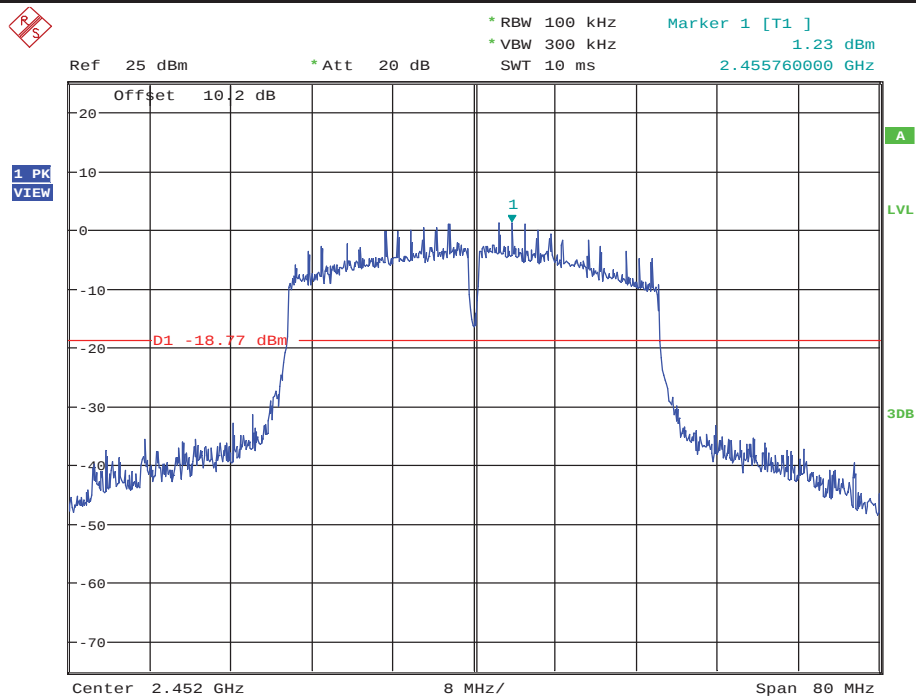


Date: 2.NOV.2017 13:32:53

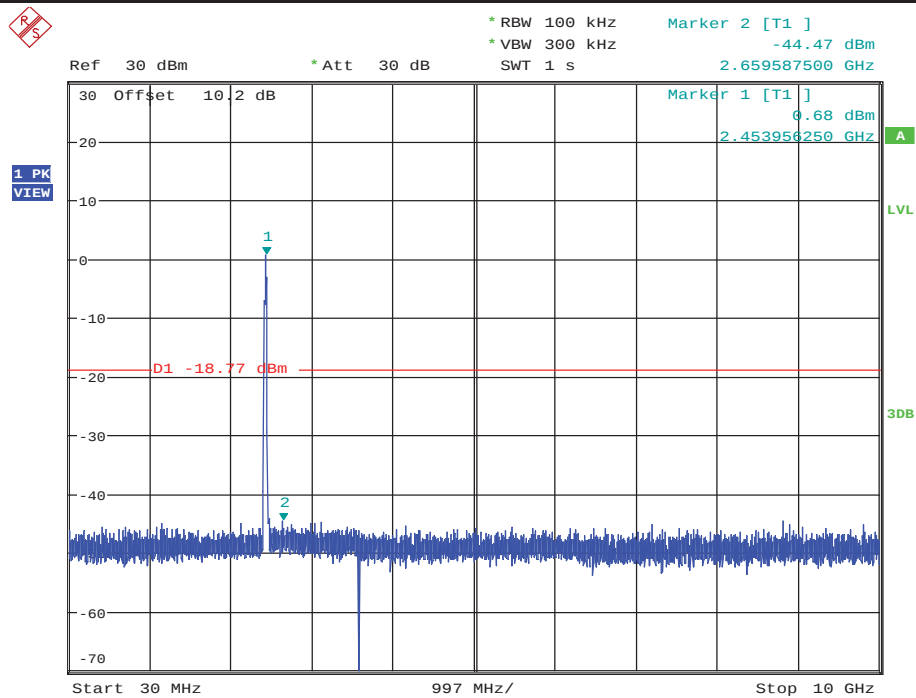


Date: 2.NOV.2017 13:33:04

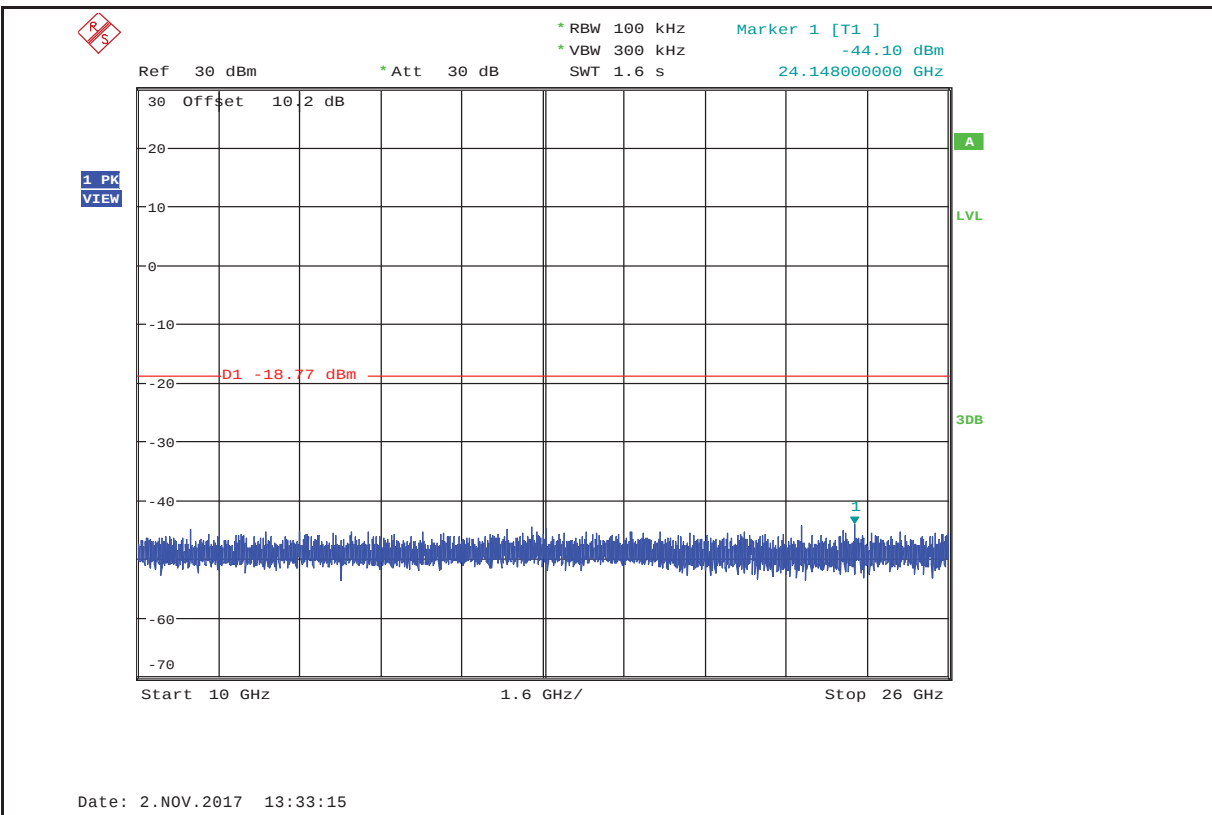


RF Conducted Spurious Emissions_11N40MIMO_2452_Ant2

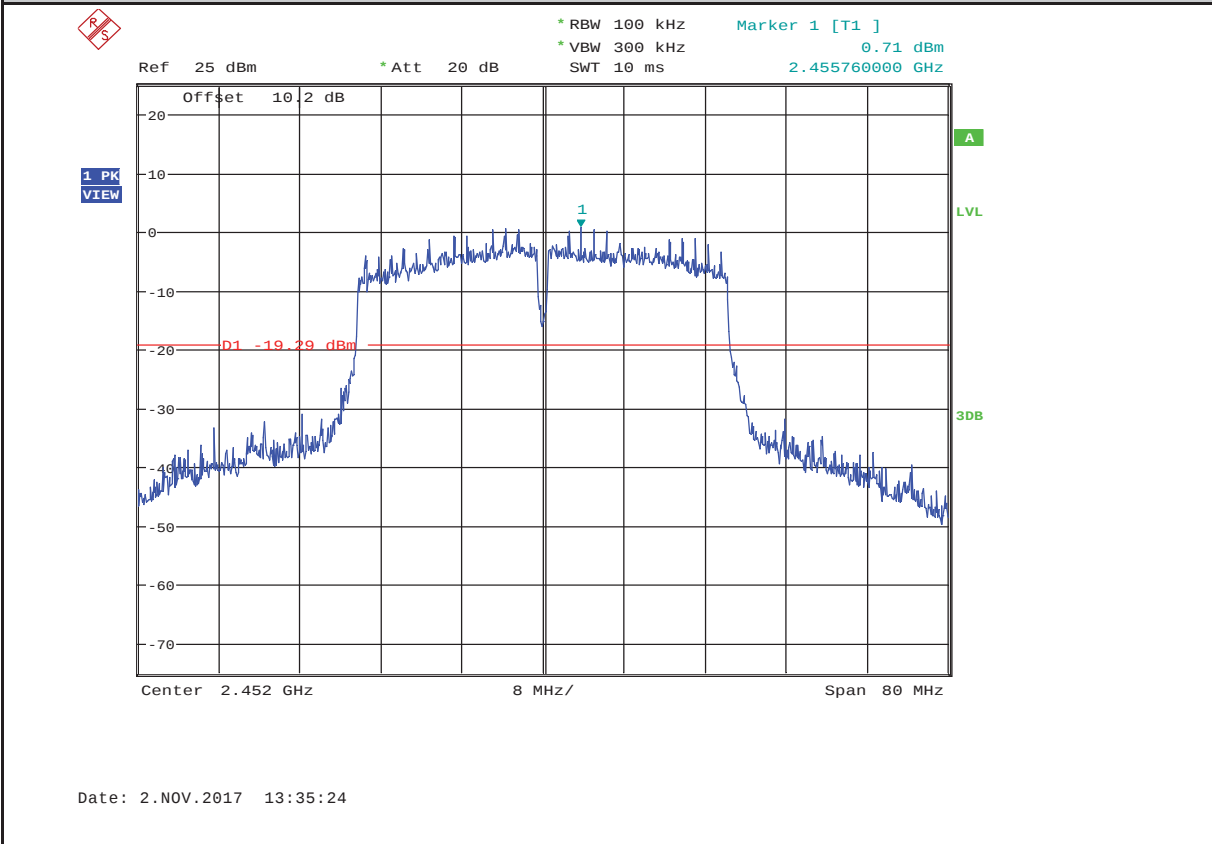


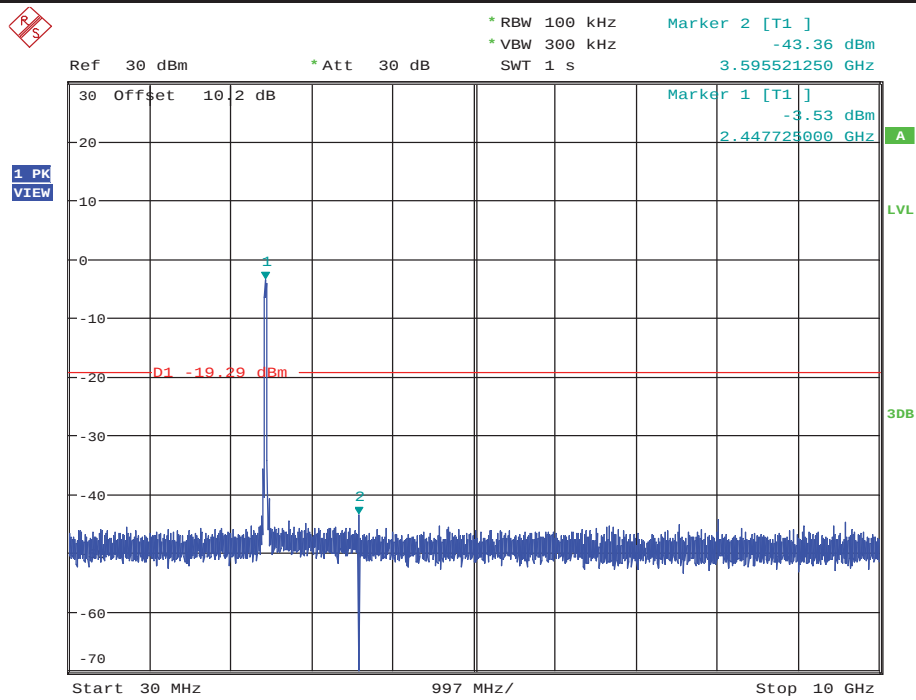



Date: 2.NOV.2017 13:35:36

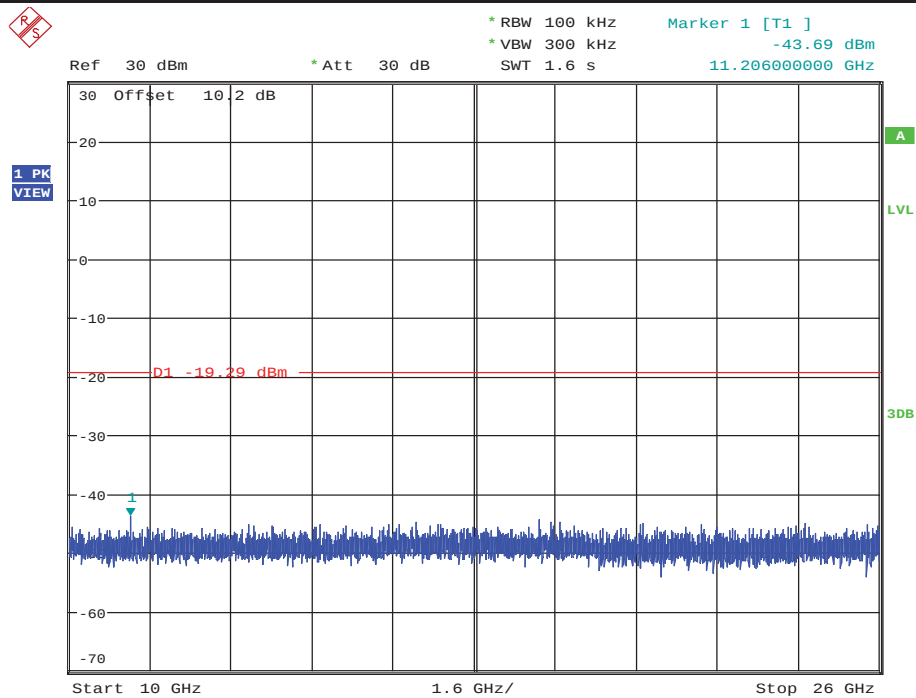


Date: 2.NOV.2017 13:35:46



RF Conducted Spurious Emissions_11BMIMO_2437_Ant1

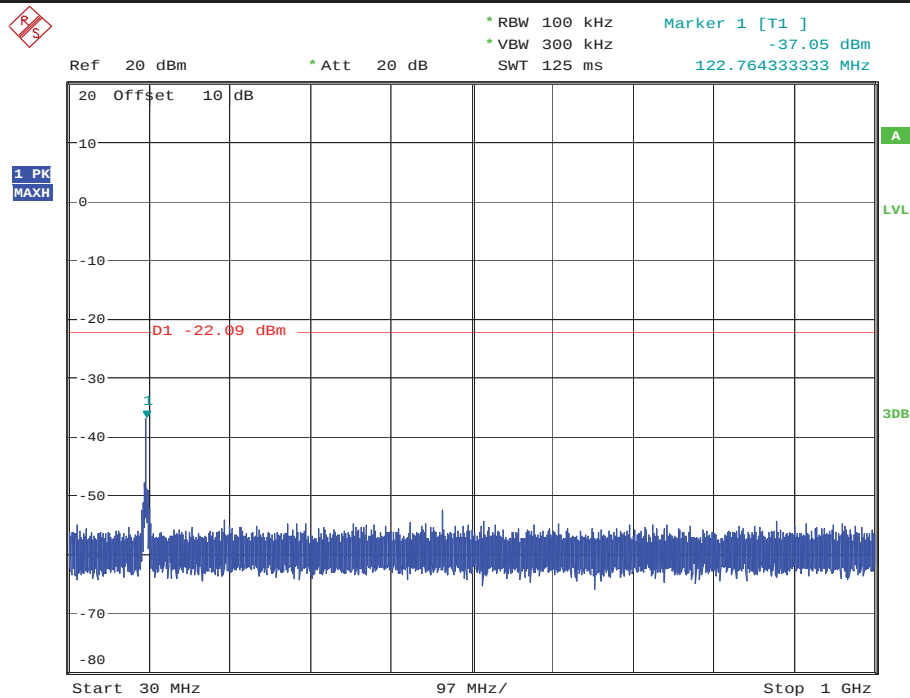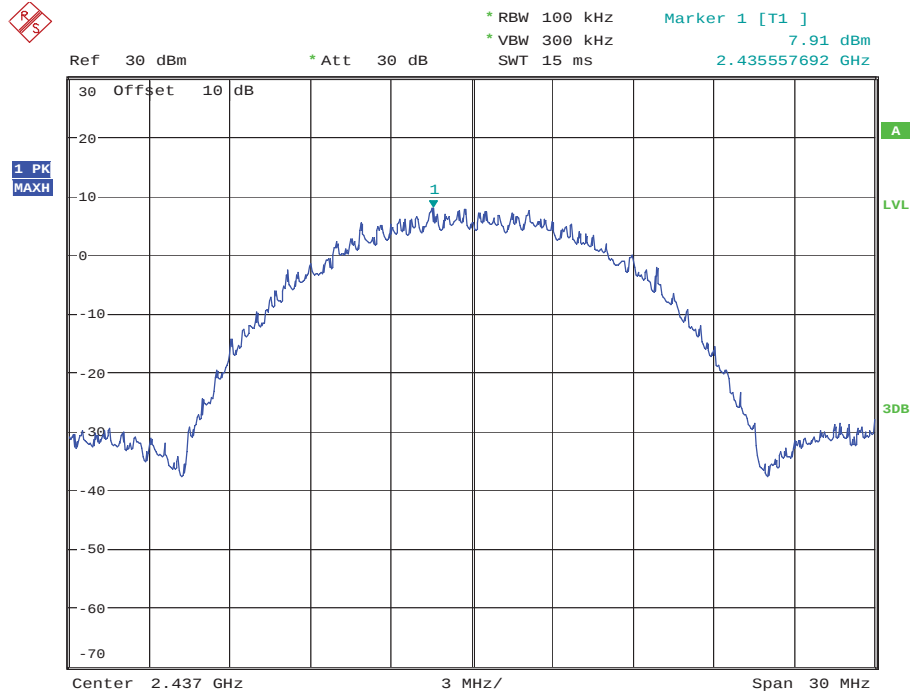


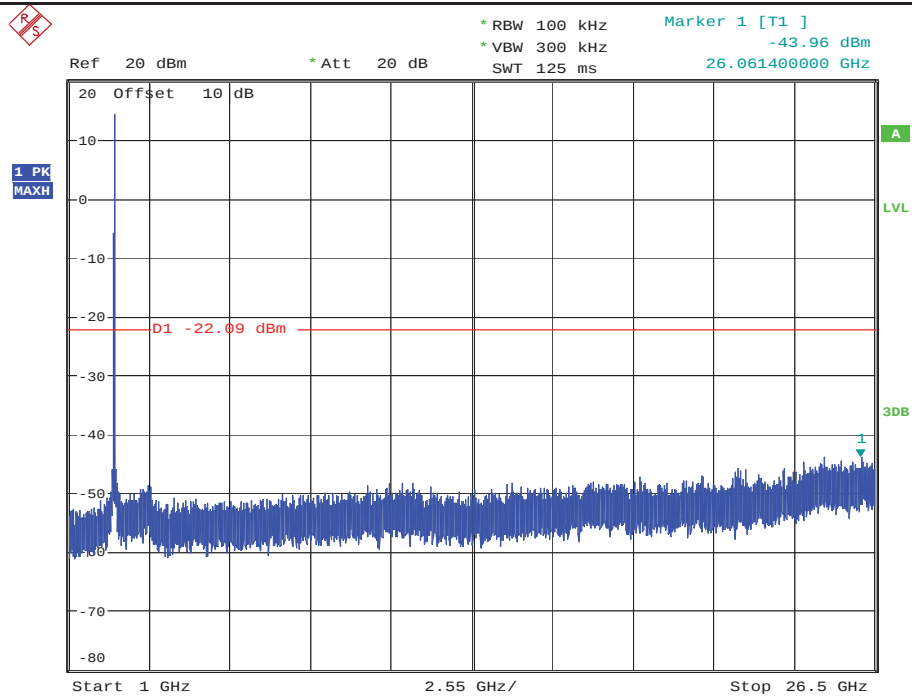



RF Conducted Spurious Emissions_11BMIMO_2437_Ant2

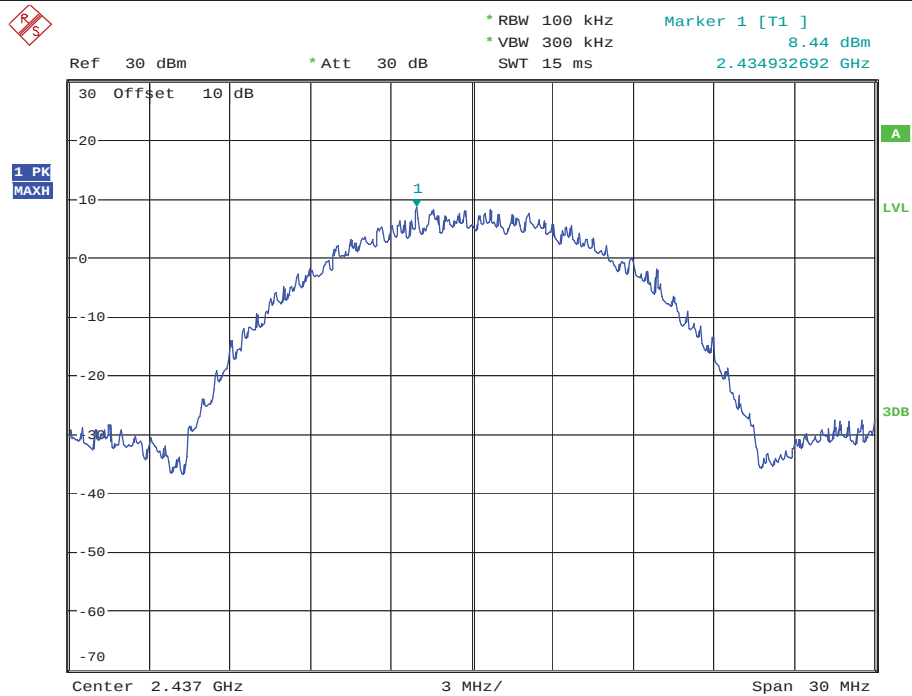

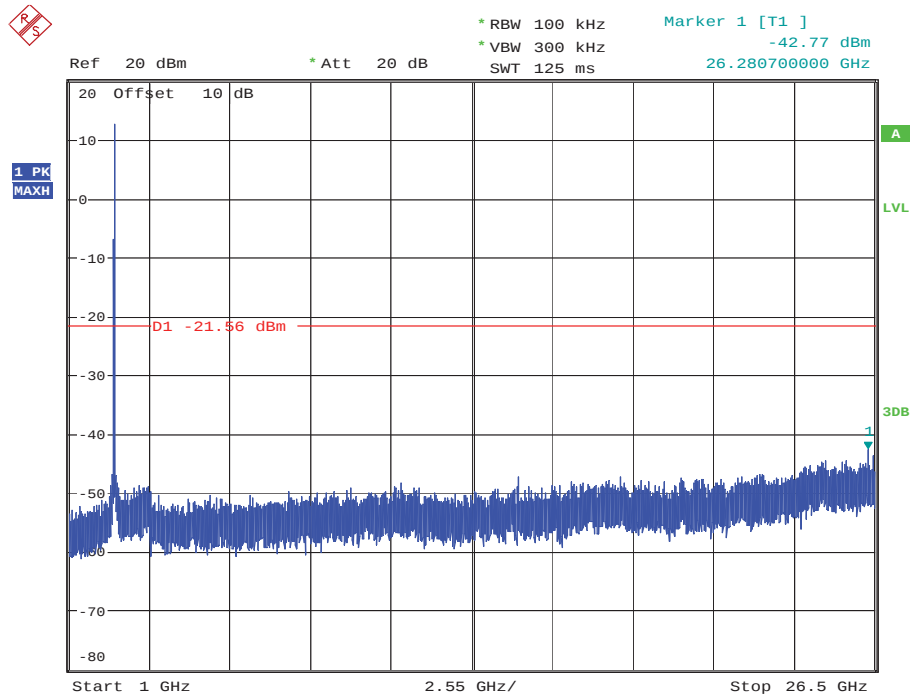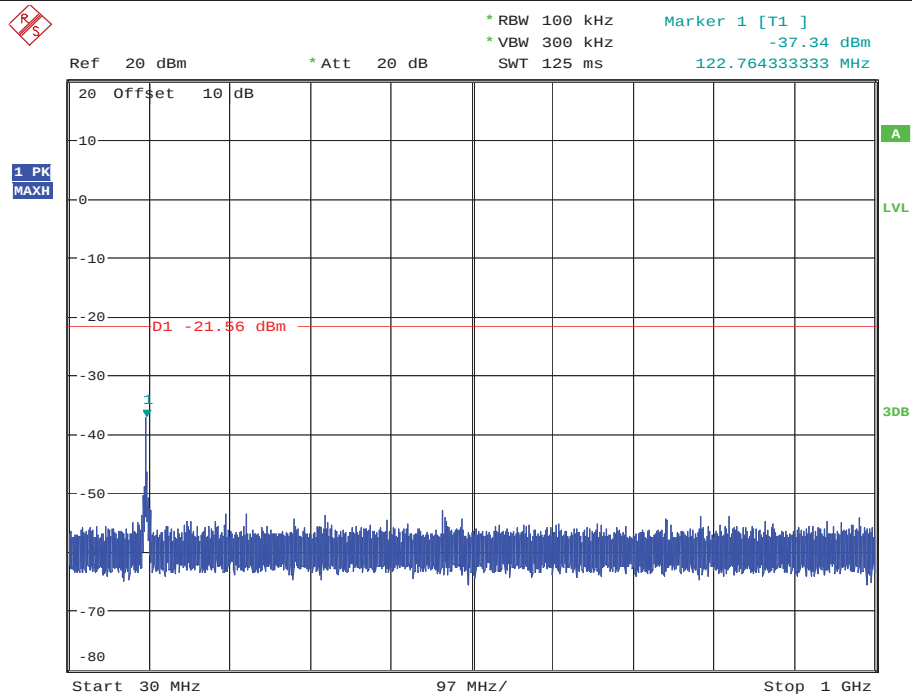




RF Conducted Spurious Emissions_11GMIMO_2437_Ant1

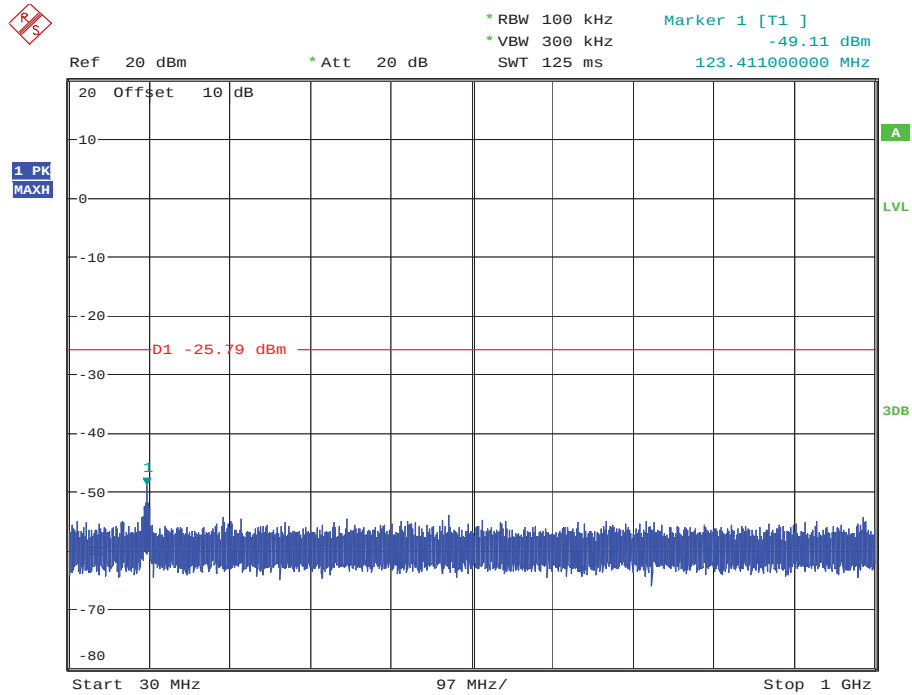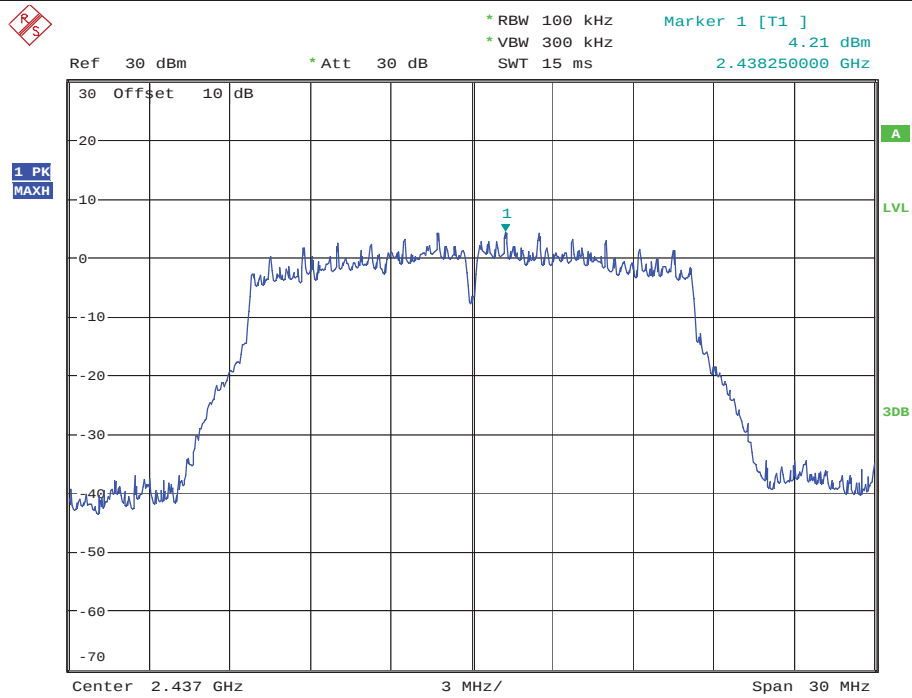


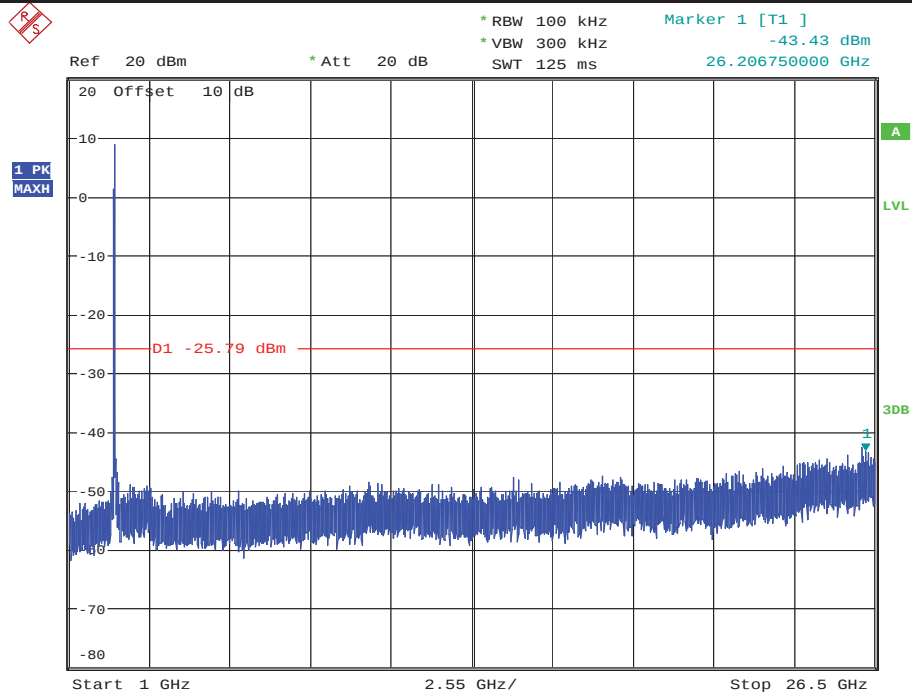



RF Conducted Spurious Emissions_11GMIMO_2437_Ant2

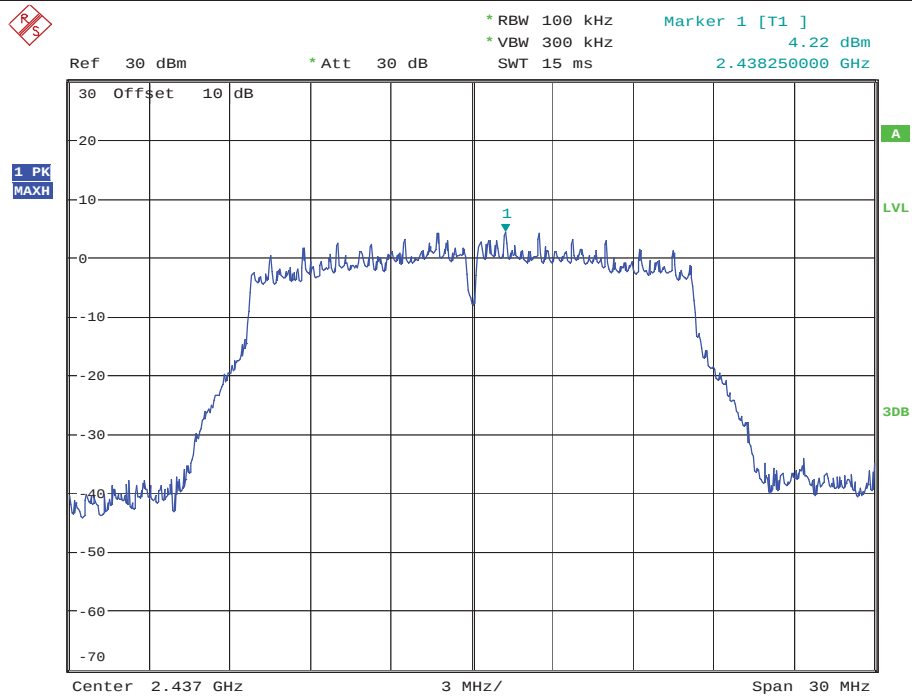

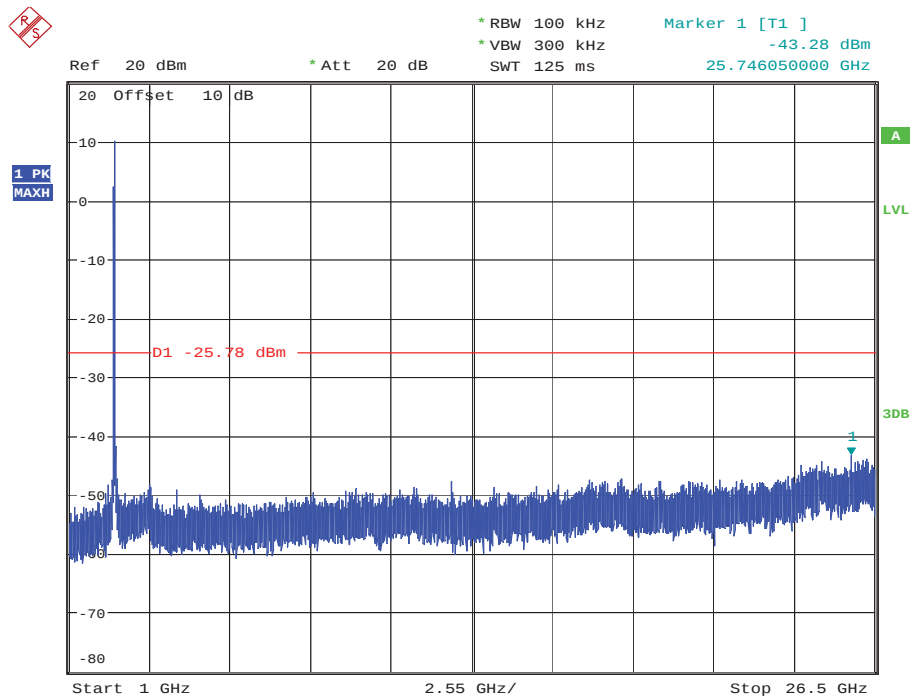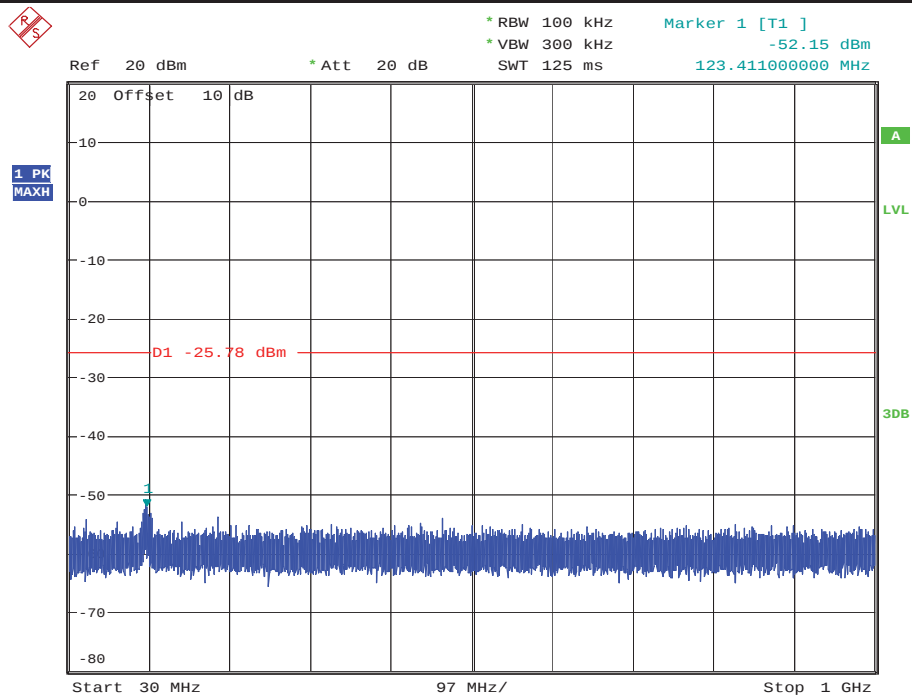




RF Conducted Spurious Emissions_11N20MIMO_2437_Ant1

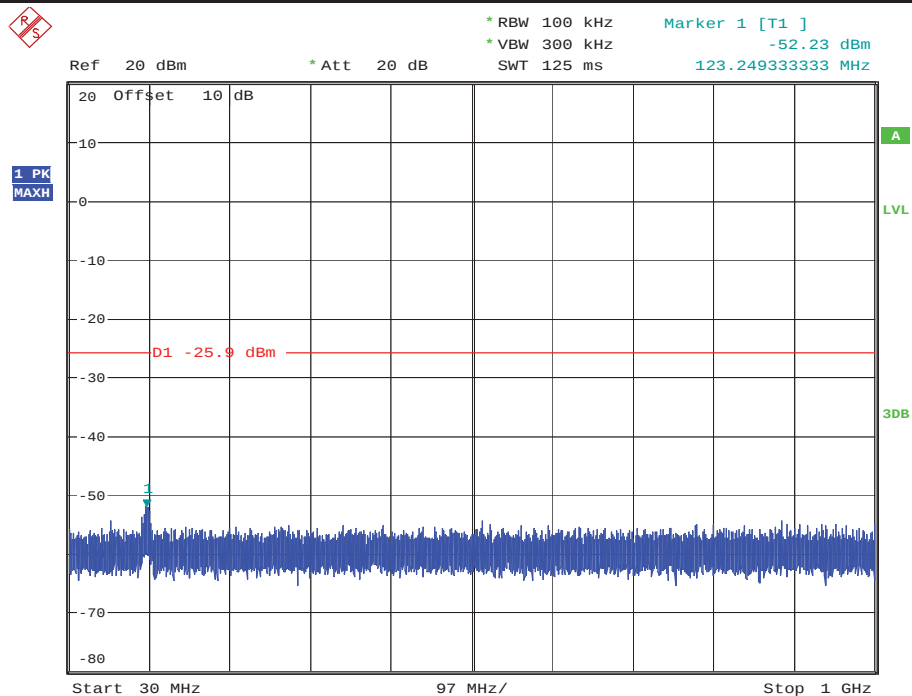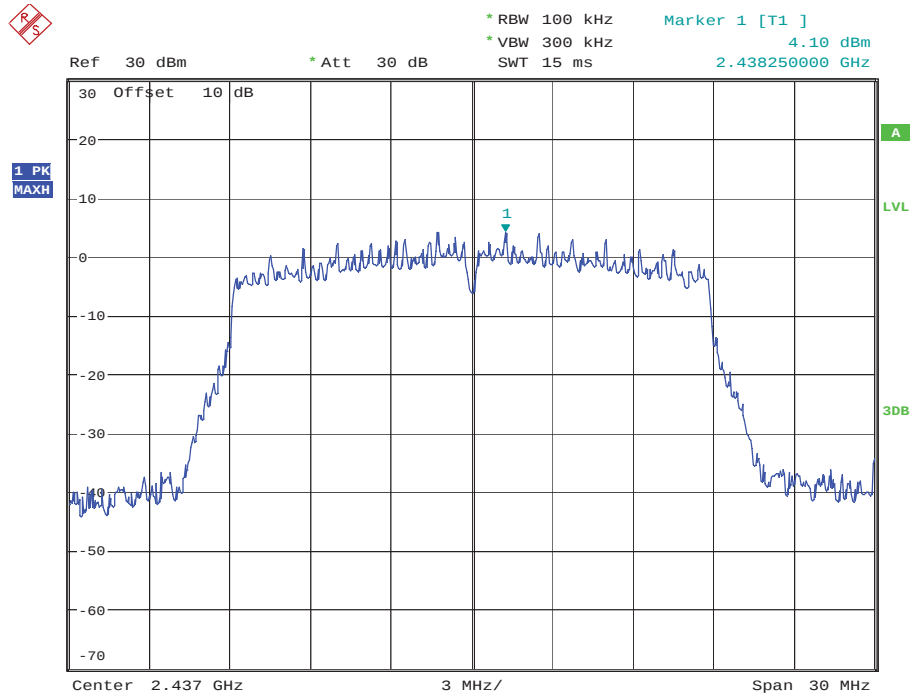


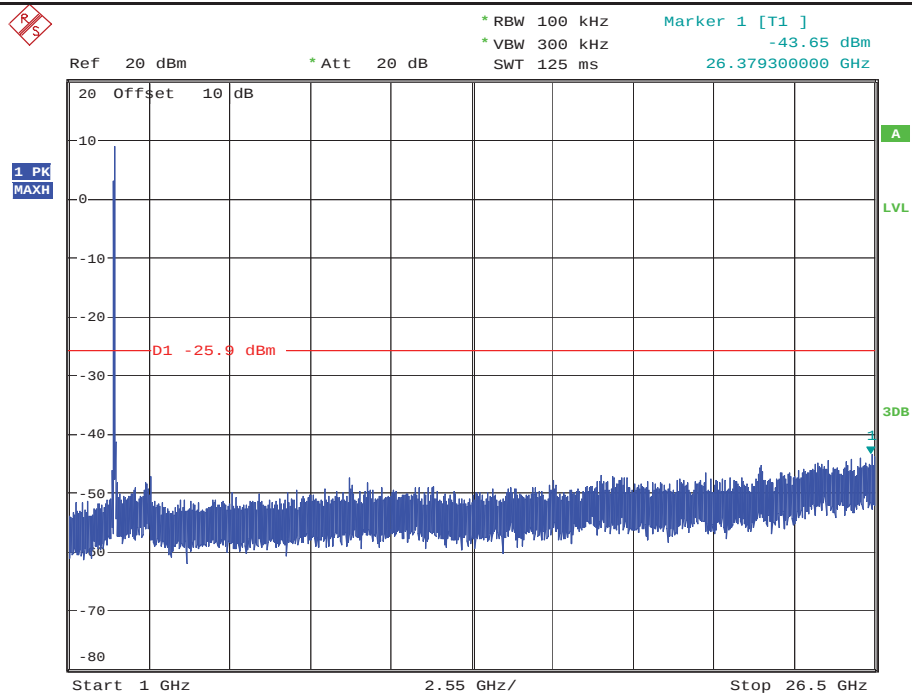



RF Conducted Spurious Emissions_11N20MIMO_2437_Ant2

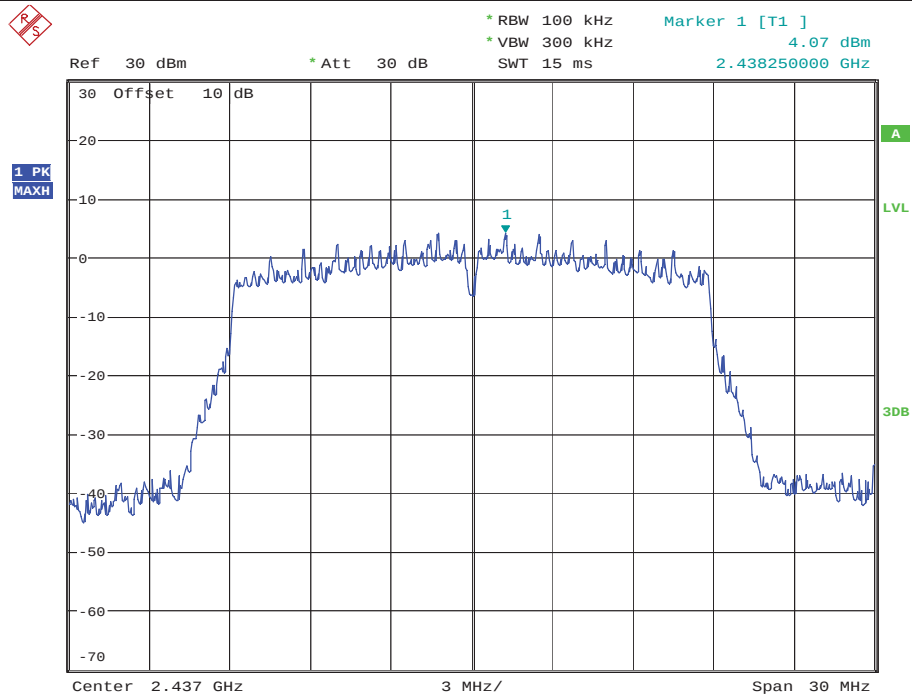

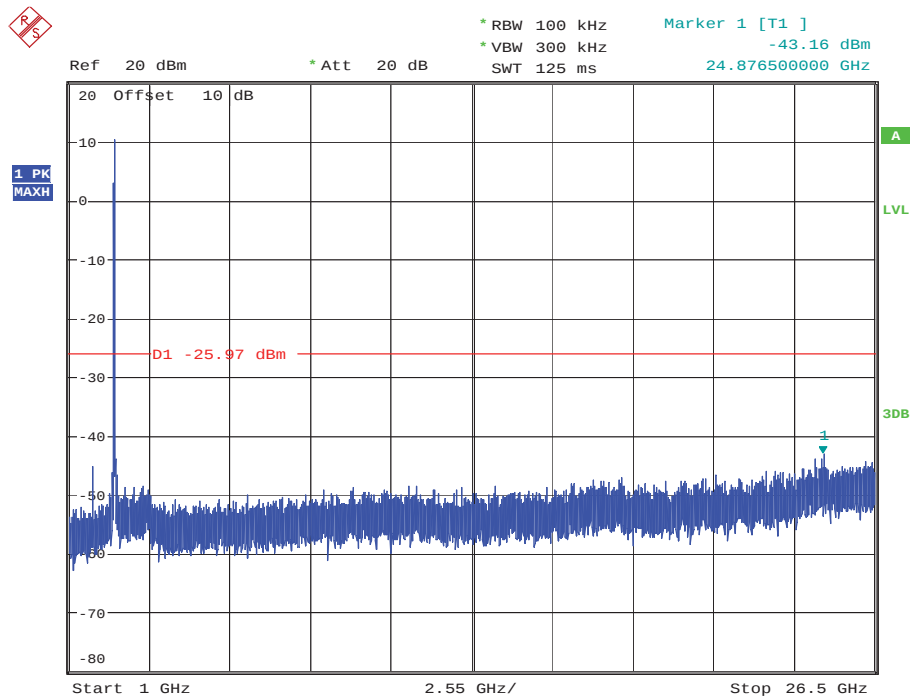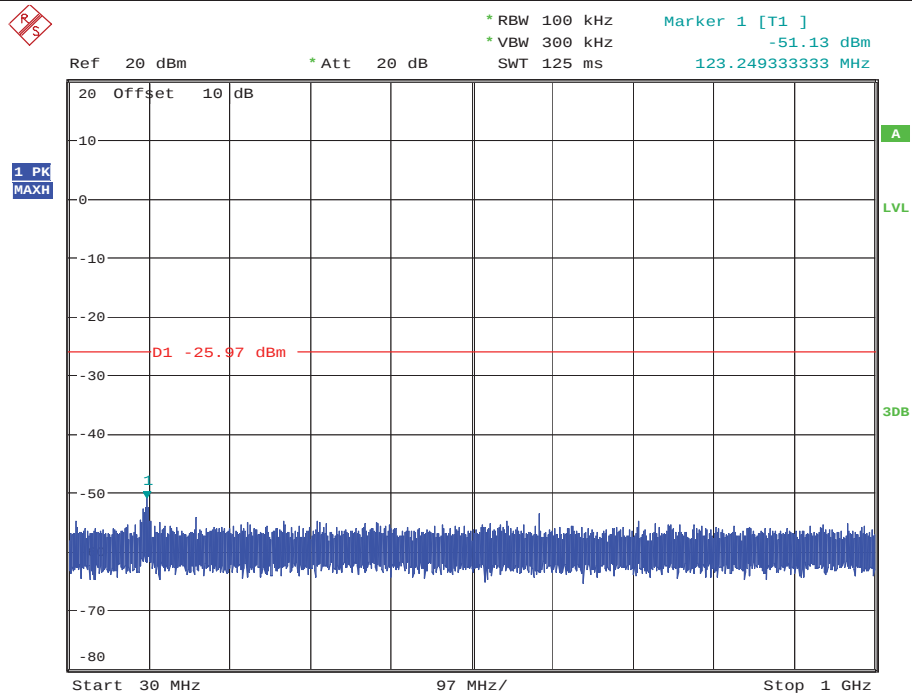




RF Conducted Spurious Emissions_11N40MIMO_2437_Ant1

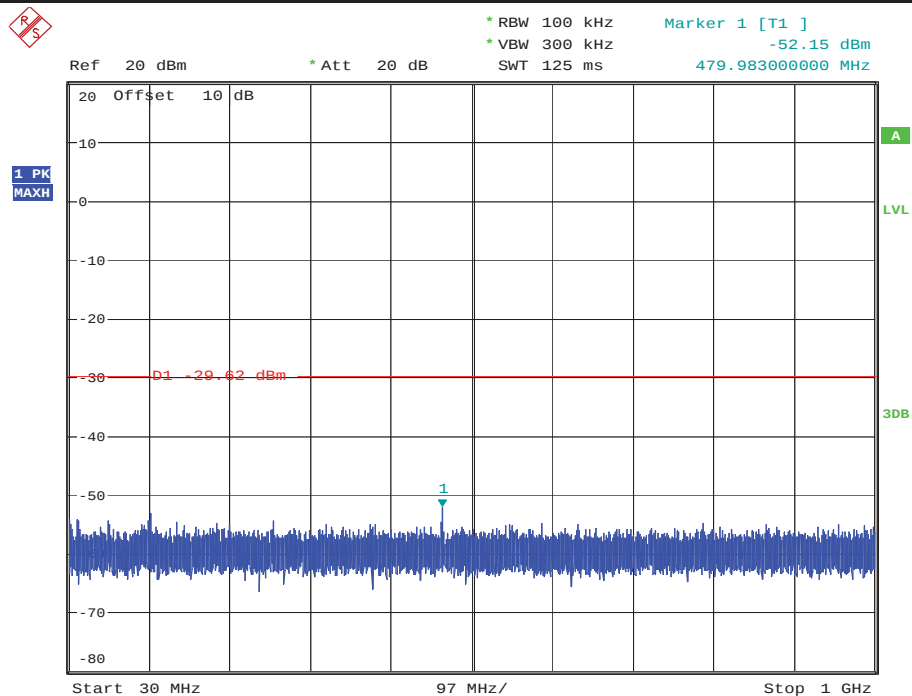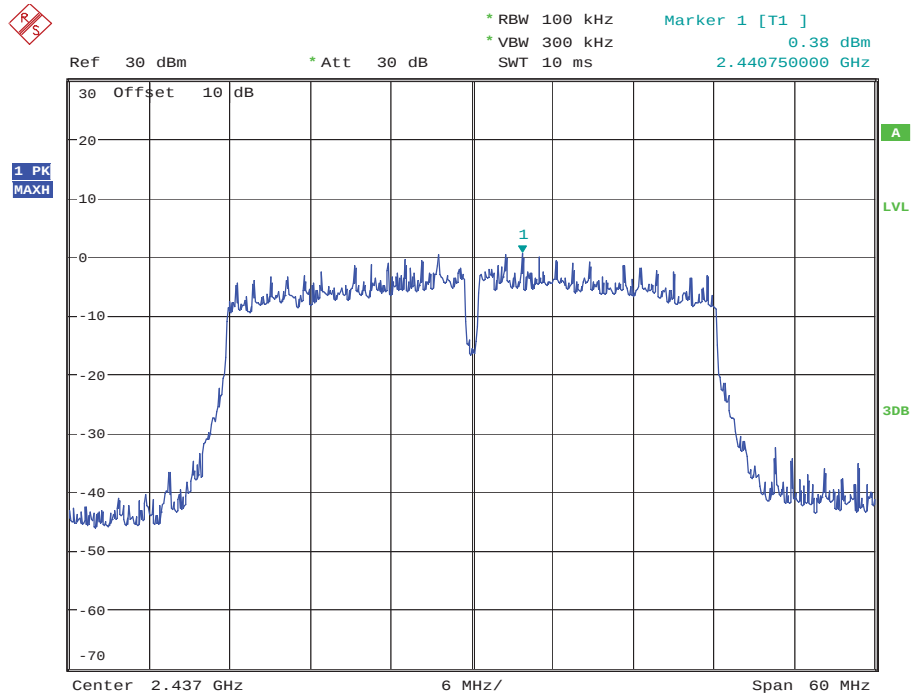

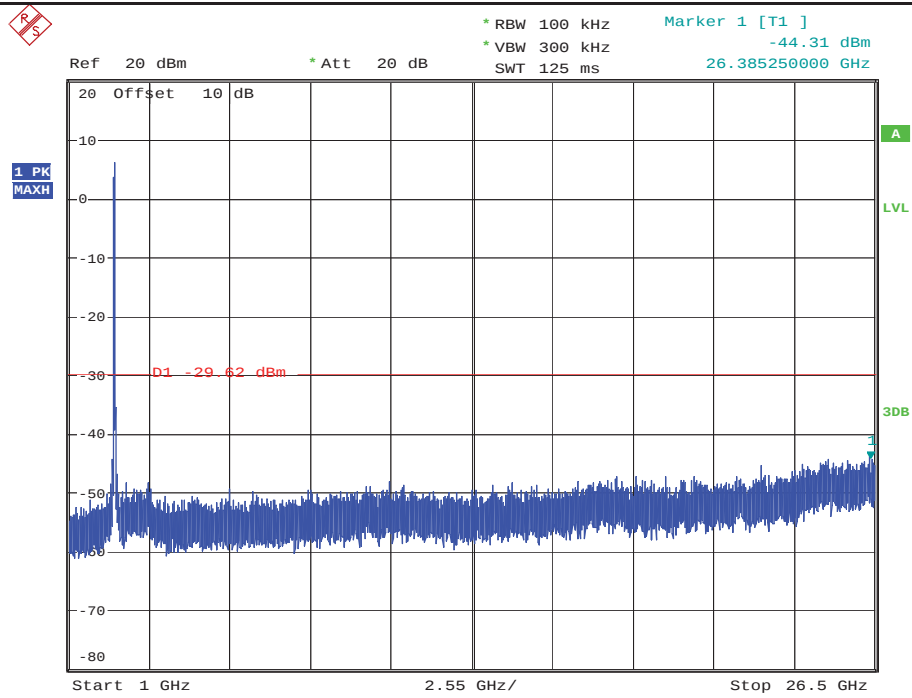

RF Conducted Spurious Emissions_11N40MIMO_2437_Ant2

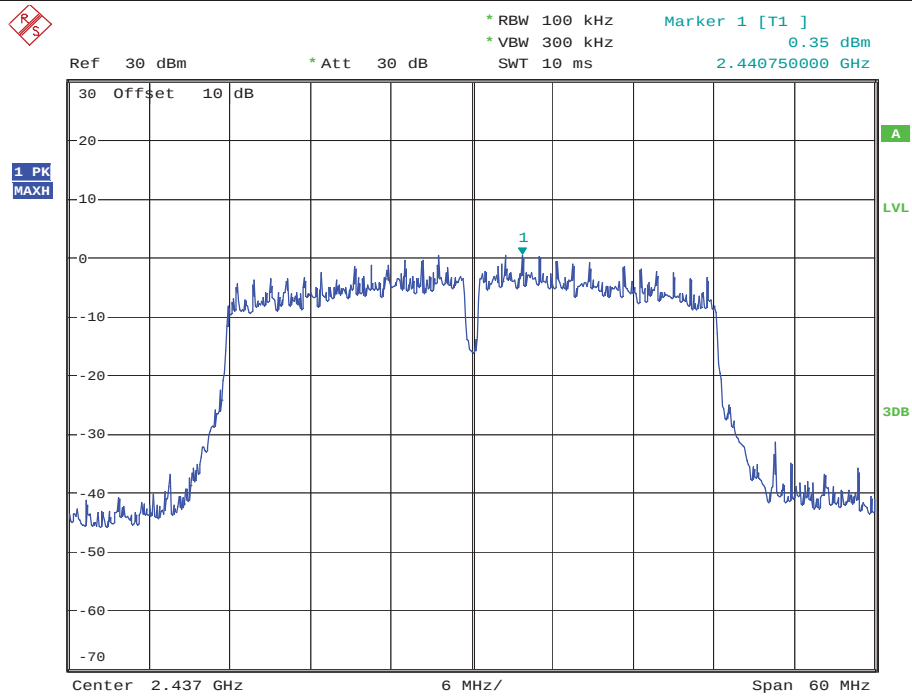


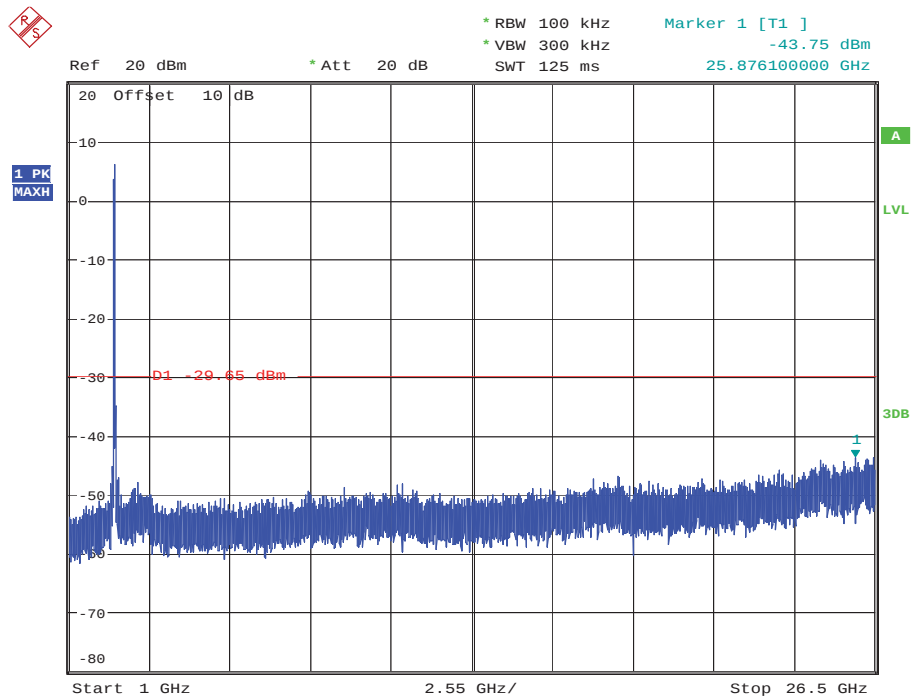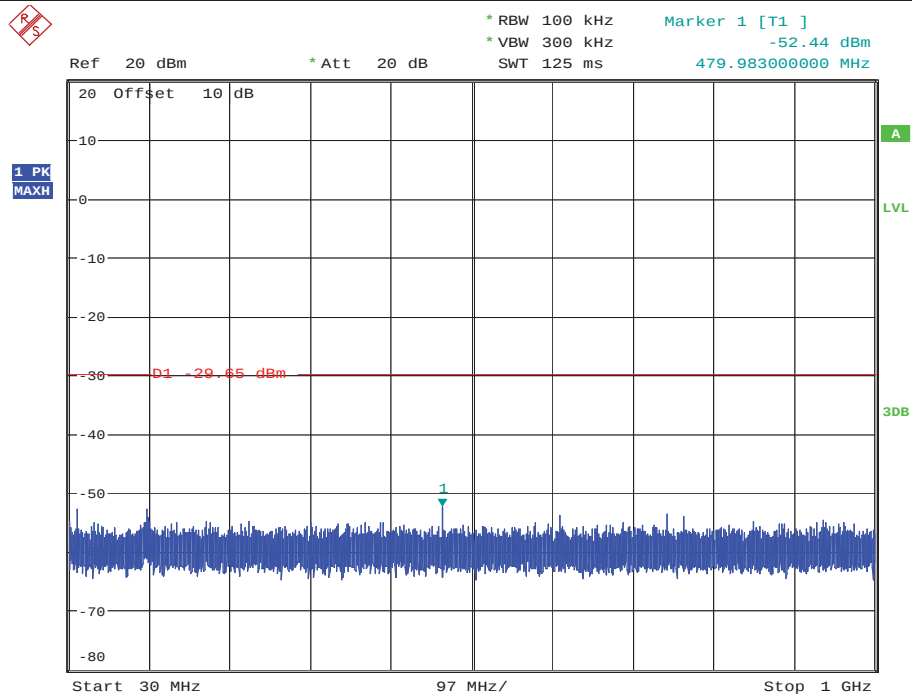


8 Radiated Spurious Emissions

8.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz-30MHz

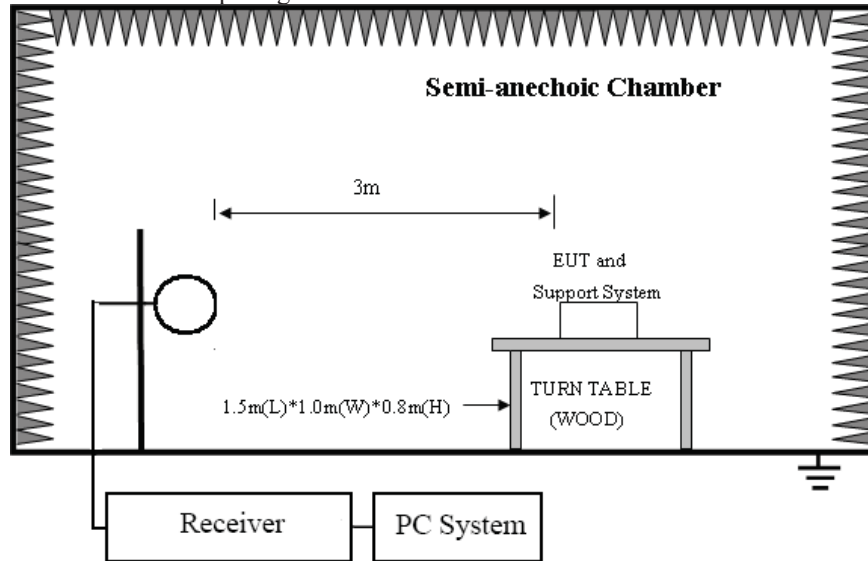

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

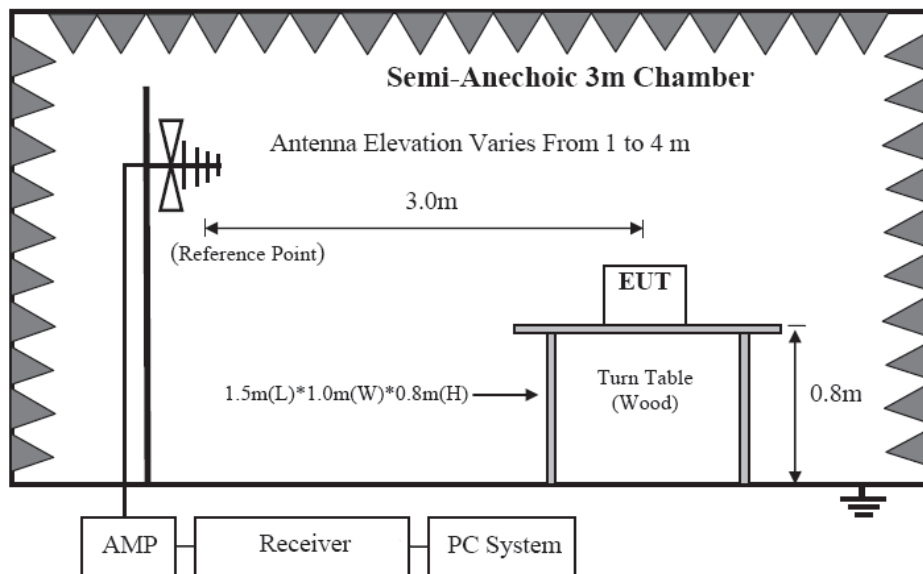

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

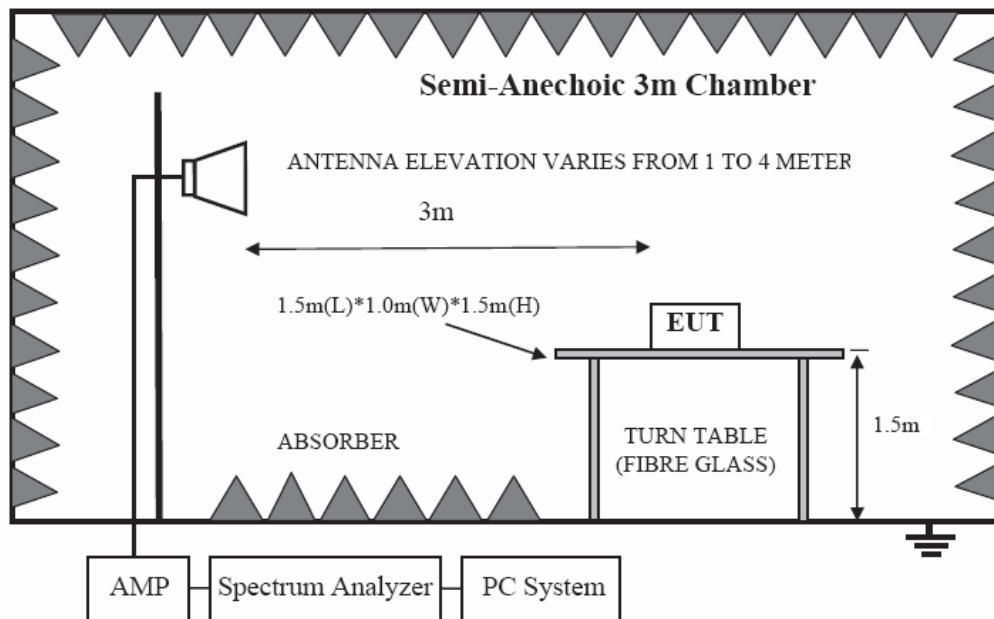

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(KHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(KHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)
------------	---	---

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

8.3. Test Procedure

(1) EUT height should be 0.8m for below 1GHz at a semi - anechoic chamber while EUT height should be 1.5m for above 1GHz at full chamber or semi - anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9KHz-30MHz	Active Loop antenna	3 m
30MHz-1GHz	Trilog Broadband Antenna	3 m
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18GHz-40GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9KHz to 25GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9KHz to 18GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.
- (5) The emissions from 9KHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz, for emissions from 9KHz-90KHz, 110KHz-490KHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure(according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

8.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9KHz to 25GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.


Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in 11b, Tx CH6 MIMO mode.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2# **E:\2017 RE2# Report Data\Q17092506-1E\RE.EM6**
Test Date : 2017-10-23 **Tested By** : Sunny
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : AC 120V/60Hz **Test Mode** : Wifi mode
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2016 VULB9163 2#/3m/HORIZONTAL
Memo :

Data: 18

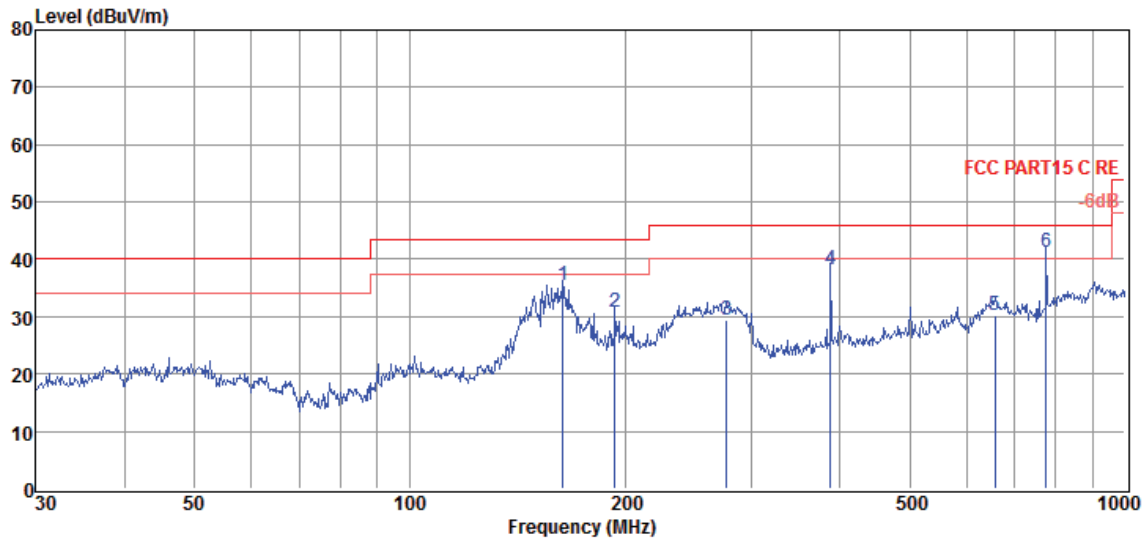

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	163.76	23.02	8.10	4.28	35.40	43.50	-8.10	QP	HORIZONTAL
2	193.77	15.97	10.41	4.38	30.76	43.50	-12.74	QP	HORIZONTAL
3	277.09	12.04	12.69	4.76	29.49	46.00	-16.51	QP	HORIZONTAL
4	387.99	17.98	15.13	5.19	38.30	46.00	-7.70	QP	HORIZONTAL
5	658.84	2.77	21.48	6.01	30.26	46.00	-15.74	QP	HORIZONTAL
6	776.88	14.37	20.67	6.29	41.33	46.00	-4.67	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2# **E:\2017 RE2# Report Data\Q17092506-1E\RE.EM6**
Test Date : 2017-10-23 **Tested By** : Sunny
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : AC 120V/60Hz **Test Mode** : Wifi mode
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2016 VULB9163 2#/3m/VERTICAL
Memo :

Data: 17

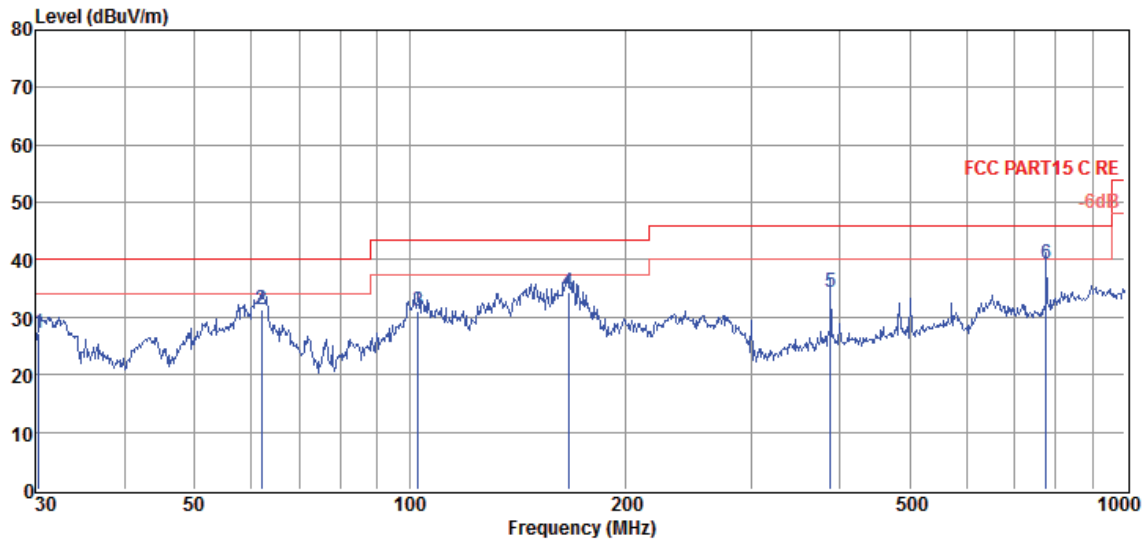

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	30.32	14.75	8.98	3.40	27.13	40.00	-12.87	QP	VERTICAL
2	62.00	16.38	11.31	3.73	31.42	40.00	-8.58	QP	VERTICAL
3	102.72	15.86	11.16	4.02	31.04	43.50	-12.46	QP	VERTICAL
4	166.65	21.92	8.22	4.29	34.43	43.50	-9.07	QP	VERTICAL
5	387.99	14.11	15.13	5.19	34.43	46.00	-11.57	QP	VERTICAL
6	776.88	12.26	20.67	6.29	39.22	46.00	-6.78	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

Freq (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
11b CH1									
4825.00	54.71	34.72	43.91	5.85	51.37	74.00	-22.63	Peak	HORIZONTAL
7239.00	42.74	36.90	43.57	7.22	43.29	54.00	-10.71	Average	HORIZONTAL
7239.00	54.36	36.90	43.57	7.22	54.91	74.00	-19.09	Peak	HORIZONTAL
9024.00	48.19	37.51	44.11	8.14	49.73	74.00	-24.27	Peak	HORIZONTAL
9840.00	48.79	38.04	44.35	8.36	50.84	74.00	-23.16	Peak	HORIZONTAL
12135.00	48.13	38.87	44.13	9.40	52.27	74.00	-21.73	Peak	HORIZONTAL
4825.00	55.03	34.72	43.91	5.85	51.69	74.00	-22.31	Peak	VERTICAL
7239.00	49.97	36.90	43.57	7.22	50.52	54.00	-3.48	Average	VERTICAL
7239.00	57.73	36.90	43.57	7.22	58.28	74.00	-15.72	Peak	VERTICAL
8905.00	47.92	37.46	44.07	8.08	49.39	74.00	-24.61	Peak	VERTICAL
10775.00	47.72	38.67	44.28	8.91	51.02	74.00	-22.98	Peak	VERTICAL
12220.00	48.23	38.86	44.15	9.43	52.37	74.00	-21.63	Peak	VERTICAL
11b CH6									
4825.00	48.89	34.72	43.91	5.85	45.55	74.00	-28.45	Peak	HORIZONTAL
5488.00	47.75	35.49	43.51	6.24	45.97	74.00	-28.03	Peak	HORIZONTAL
7001.00	47.92	36.80	43.50	7.09	48.31	74.00	-25.69	Peak	HORIZONTAL
7834.00	49.20	37.13	43.75	7.54	50.12	74.00	-23.88	Peak	HORIZONTAL
9874.00	48.64	38.07	44.36	8.37	50.72	74.00	-23.28	Peak	HORIZONTAL
12339.00	47.84	38.83	44.18	9.48	51.97	74.00	-22.03	Peak	HORIZONTAL
4791.00	49.44	34.67	43.93	5.83	46.01	74.00	-27.99	Peak	VERTICAL
7154.00	48.39	36.86	43.55	7.17	48.87	74.00	-25.13	Peak	VERTICAL
8769.00	47.74	37.41	44.03	8.01	49.13	74.00	-24.87	Peak	VERTICAL
9925.00	48.33	38.12	44.38	8.38	50.45	74.00	-23.55	Peak	VERTICAL
10996.00	48.33	38.80	44.25	9.06	51.94	74.00	-22.06	Peak	VERTICAL
13376.00	48.19	39.68	44.44	9.77	53.20	74.00	-20.80	Peak	VERTICAL
11b CH11									
4706.00	49.08	34.53	43.98	5.79	45.42	74.00	-28.58	Peak	HORIZONTAL
5675.00	48.57	35.57	43.40	6.35	47.09	74.00	-26.91	Peak	HORIZONTAL
6916.00	48.82	36.62	43.47	7.04	49.01	74.00	-24.99	Peak	HORIZONTAL
8871.00	48.23	37.45	44.06	8.07	49.69	74.00	-24.31	Peak	HORIZONTAL
9874.00	48.78	38.07	44.36	8.37	50.86	74.00	-23.14	Peak	HORIZONTAL
10860.00	48.09	38.72	44.27	8.97	51.51	74.00	-22.49	Peak	HORIZONTAL
4944.00	53.54	34.91	43.83	5.91	50.53	74.00	-23.47	Peak	VERTICAL
7375.00	50.55	36.95	43.61	7.29	51.18	74.00	-22.82	Peak	VERTICAL
8735.00	48.47	37.39	44.02	8.00	49.84	74.00	-24.16	Peak	VERTICAL
9891.00	48.46	38.09	44.37	8.37	50.55	74.00	-23.45	Peak	VERTICAL
11081.00	47.75	38.77	44.24	9.08	51.36	74.00	-22.64	Peak	VERTICAL
12186.00	49.59	38.86	44.15	9.42	53.72	74.00	-20.28	Peak	VERTICAL

Note: 1.30MHz~25GHz: (Scan with 11b MIMO mode, 11g MIMO mode, 11n HT20 MIMO mode and 11n HT40 MIMO mode, the worst case is 11b MIMO mode)


2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

9 Radiated Band Edge Compliance

9.1. Block diagram of test setup

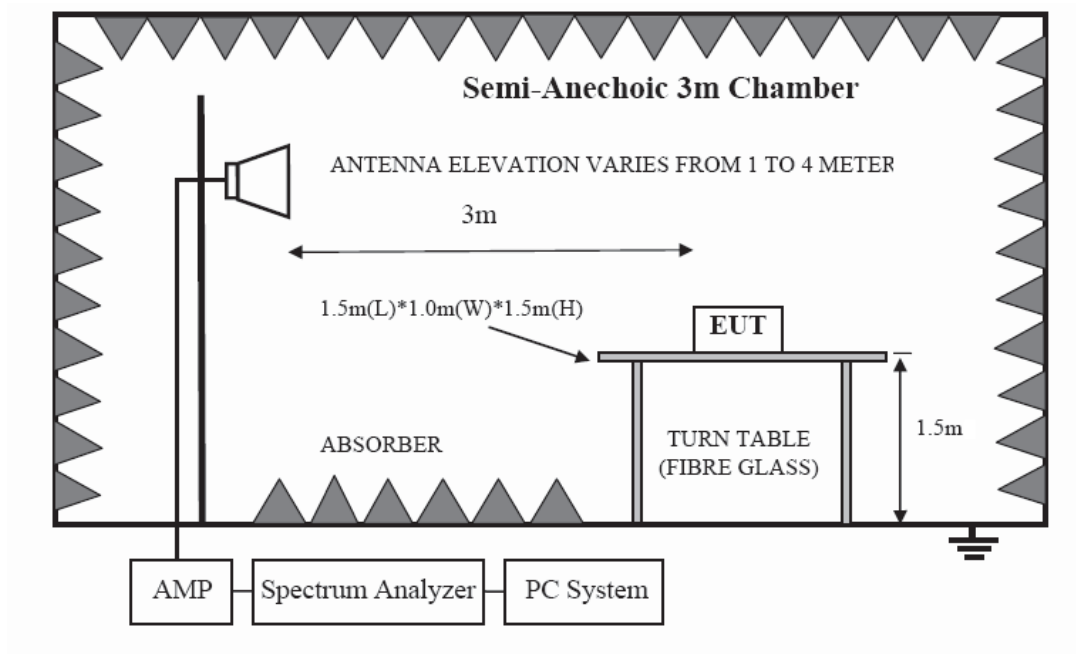

9.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

9.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2100MHz to 2450MHz and 2450MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worse case is shown in report.

9.4. Test result


PASS. (See below detailed test result)

Note: 11b, 11g, n20 and n40 mode MIMO mode all have been tested.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode B 2412
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 2.4G

Data: 56

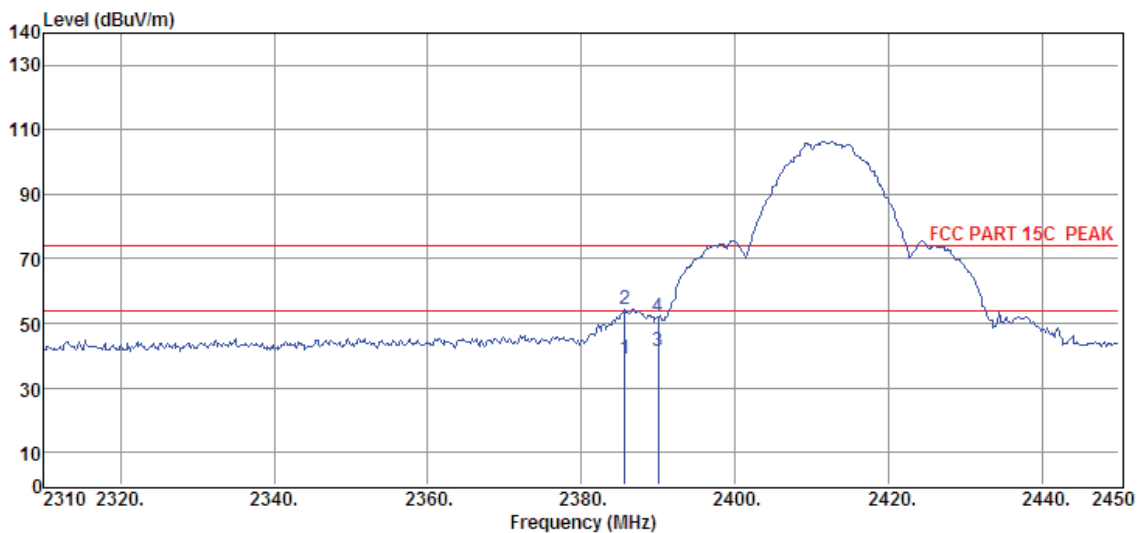


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2385.60	52.39	26.99	44.32	4.13	39.19	54.00	-14.81	Average	HORIZONTAL
2	2385.60	67.48	26.99	44.32	4.13	54.28	74.00	-19.72	Peak	HORIZONTAL
3	2390.00	54.63	27.00	44.32	4.13	41.44	54.00	-12.56	Average	HORIZONTAL
4	2390.00	65.08	27.00	44.32	4.13	51.89	74.00	-22.11	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode B 2412
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 2.4G

Data: 55

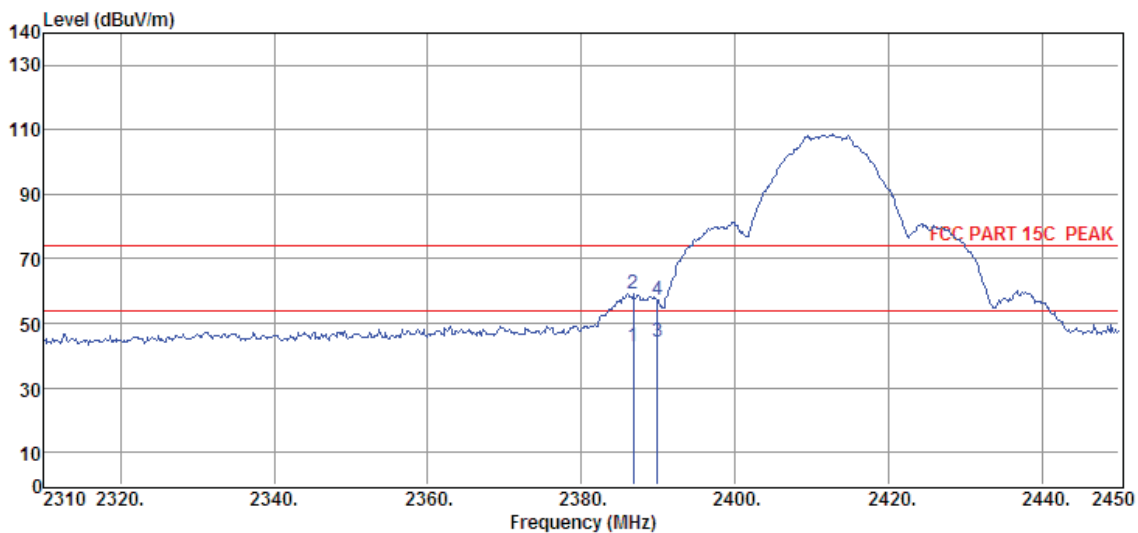


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2386.72	56.10	26.99	44.32	4.13	42.90	54.00	-11.10	Average	VERTICAL
2	2386.72	72.22	26.99	44.32	4.13	59.02	74.00	-14.98	Peak	VERTICAL
3	2389.94	57.26	27.00	44.32	4.13	44.07	54.00	-9.93	Average	VERTICAL
4	2389.94	70.40	27.00	44.32	4.13	57.21	74.00	-16.79	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode B 2462
Condition : Temp:24.5°C,Humi:55%,
Antenna/Distance : 2017 HF907/3m/HORIZONTAL
Press:100.1kPa
Memo : 2.4G

Data: 57

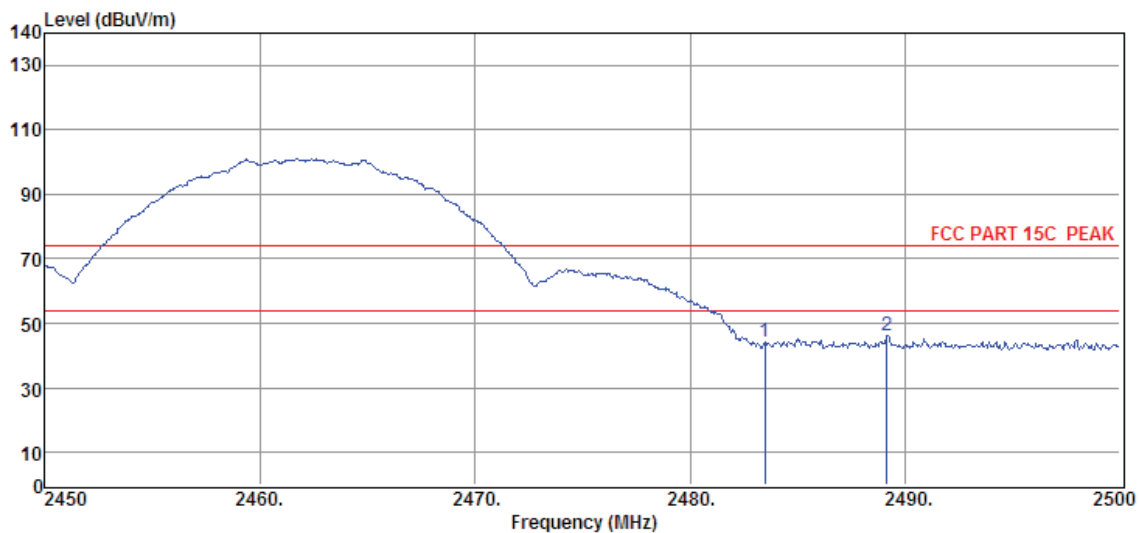


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	56.93	27.34	44.32	4.22	44.17	74.00	-29.83	Peak	HORIZONTAL
2	2489.15	58.79	27.36	44.32	4.22	46.05	74.00	-27.95	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode B 2462
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 2.4G

Data: 58

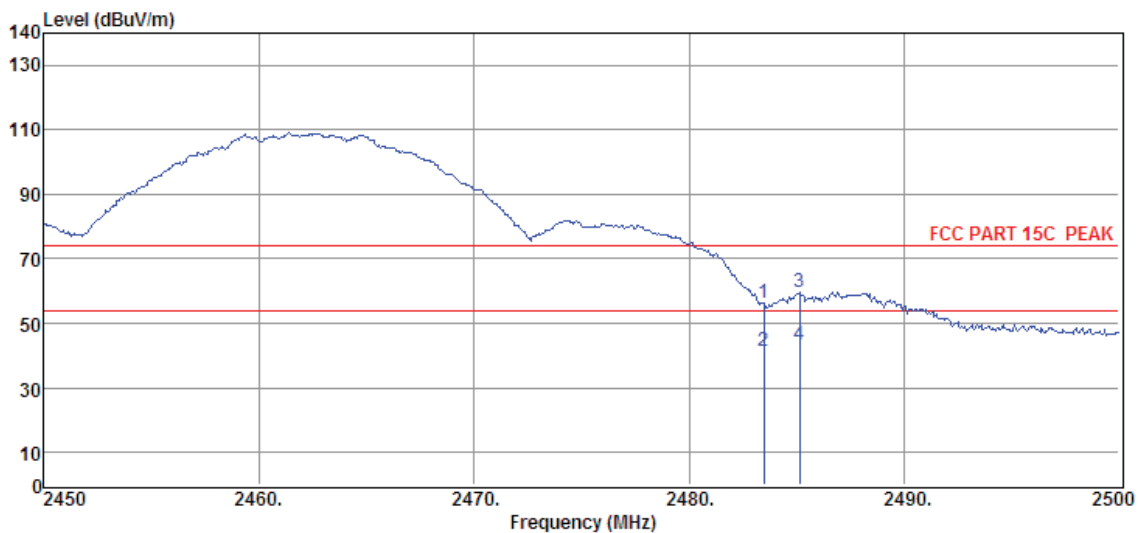


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	68.90	27.34	44.32	4.22	56.14	74.00	-17.86	Peak	VERTICAL
2	2483.50	54.37	27.34	44.32	4.22	41.61	54.00	-12.39	Average	VERTICAL
3	2485.15	72.60	27.35	44.32	4.22	59.85	74.00	-14.15	Peak	VERTICAL
4	2485.15	56.23	27.35	44.32	4.22	43.48	54.00	-10.52	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode G2412
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 2.4G

Data: 60

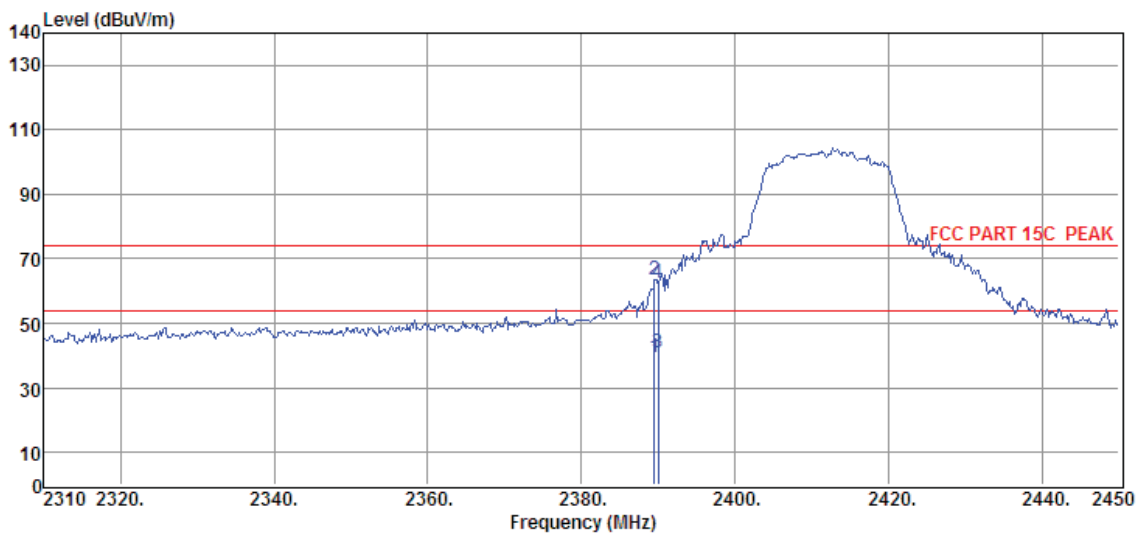


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.52	52.43	27.00	44.32	4.13	39.24	54.00	-14.76	Average	HORIZONTAL
2	2389.52	76.49	27.00	44.32	4.13	63.30	74.00	-10.70	Peak	HORIZONTAL
3	2390.00	54.29	27.00	44.32	4.13	41.10	54.00	-12.90	Average	HORIZONTAL
4	2390.00	75.91	27.00	44.32	4.13	62.72	74.00	-11.28	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode G2412
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 2.4G

Data: 59

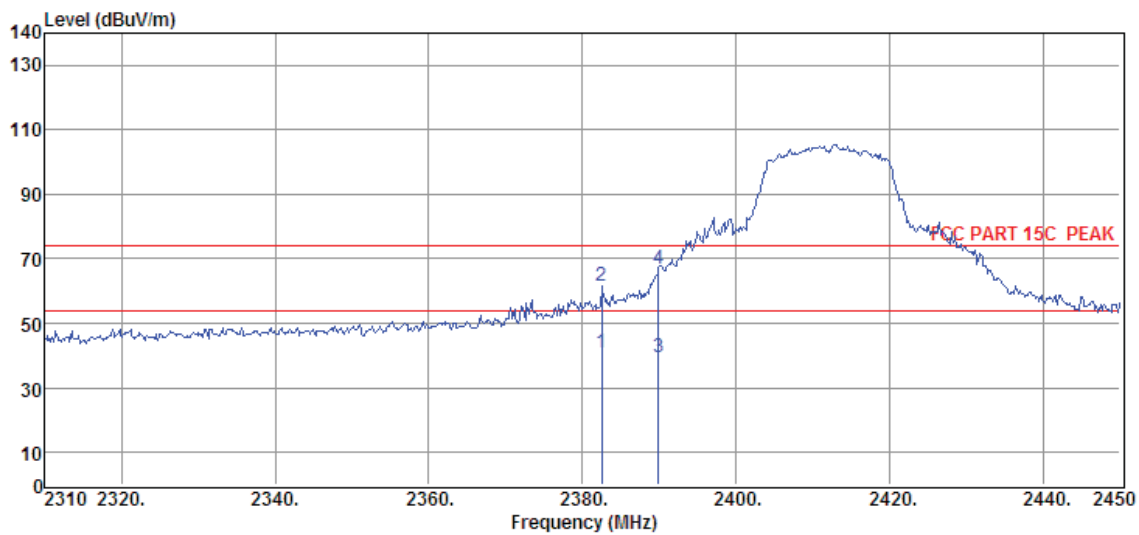


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2382.52	54.21	26.98	44.32	4.13	41.00	54.00	-13.00	Average	VERTICAL
2	2382.52	74.86	26.98	44.32	4.13	61.65	74.00	-12.35	Peak	VERTICAL
3	2389.94	52.73	27.00	44.32	4.13	39.54	54.00	-14.46	Average	VERTICAL
4	2389.94	79.90	27.00	44.32	4.13	66.71	74.00	-7.29	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode G 2462
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 2.4G

Data: 64

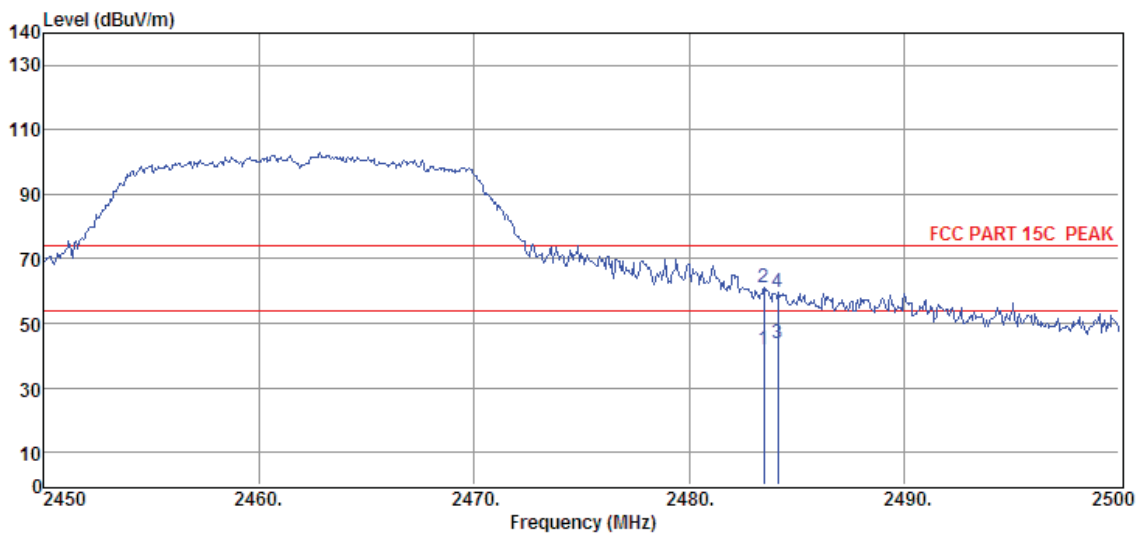


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	54.62	27.34	44.32	4.22	41.86	54.00	-12.14	Average	HORIZONTAL
2	2483.50	73.88	27.34	44.32	4.22	61.12	74.00	-12.88	Peak	HORIZONTAL
3	2484.15	56.44	27.34	44.32	4.22	43.68	54.00	-10.32	Average	HORIZONTAL
4	2484.15	72.46	27.34	44.32	4.22	59.70	74.00	-14.30	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode G 2462
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 2.4G

Data: 63

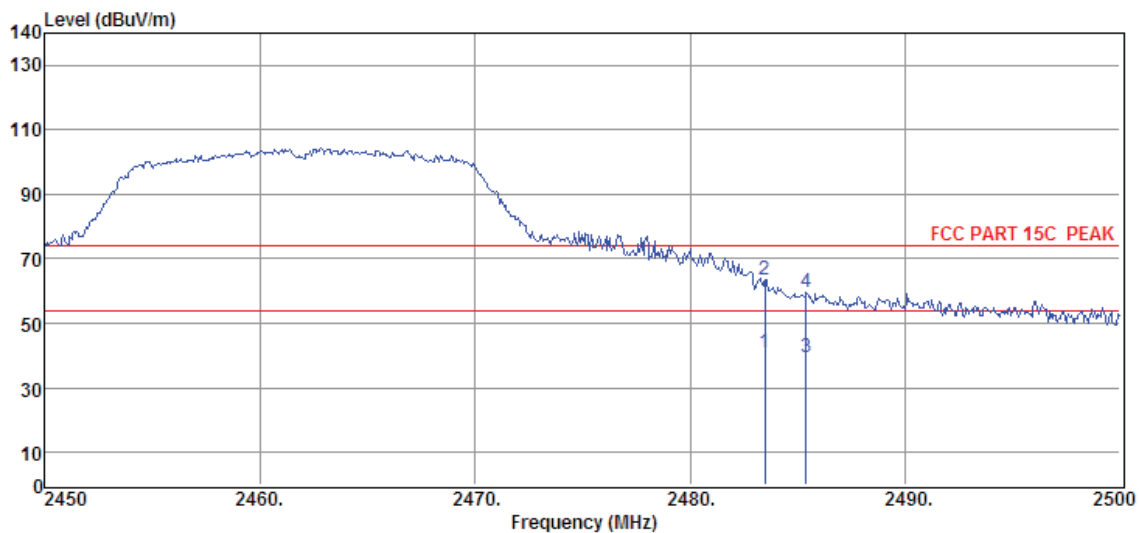


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	53.64	27.34	44.32	4.22	40.88	54.00	-13.12	Average	VERTICAL
2	2483.50	76.42	27.34	44.32	4.22	63.66	74.00	-10.34	Peak	VERTICAL
3	2485.40	52.44	27.35	44.32	4.22	39.69	54.00	-14.31	Average	VERTICAL
4	2485.40	72.33	27.35	44.32	4.22	59.58	74.00	-14.42	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode N20 2412
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 2.4G

Data: 61

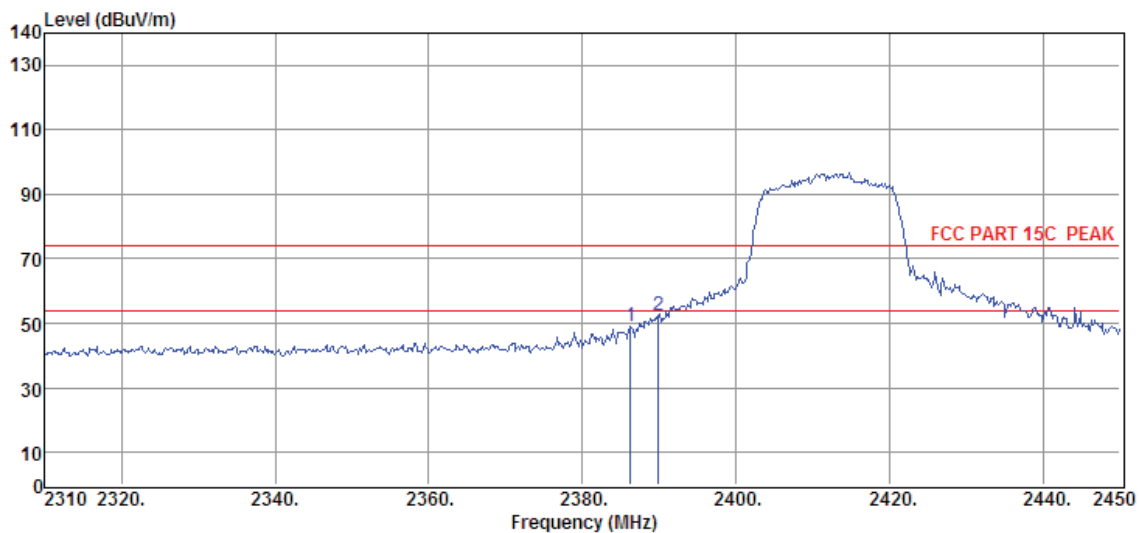


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2386.30	62.40	26.99	44.32	4.13	49.20	74.00	-24.80	Peak	HORIZONTAL
2	2389.94	65.77	27.00	44.32	4.13	52.58	74.00	-21.42	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode N20 2412
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 2.4G

Data: 62

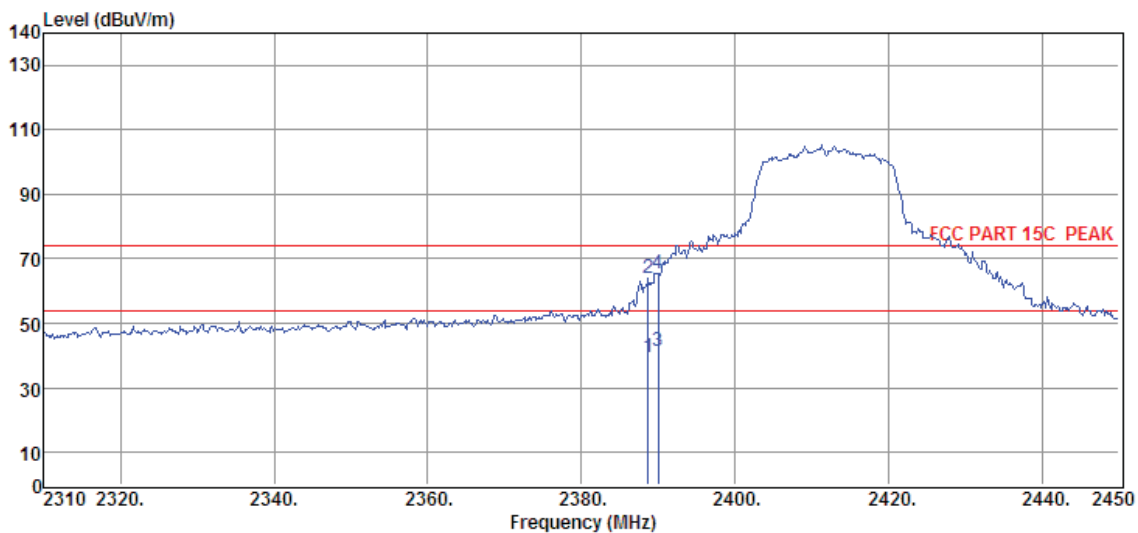


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.68	52.44	27.00	44.32	4.13	39.25	54.00	-14.75	Average	VERTICAL
2	2388.68	77.34	27.00	44.32	4.13	64.15	74.00	-9.85	Peak	VERTICAL
3	2390.00	54.37	27.00	44.32	4.13	41.18	54.00	-12.82	Average	VERTICAL
4	2390.00	78.69	27.00	44.32	4.13	65.50	74.00	-8.50	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18G.EM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode N20 2462
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 2.4G

Data: 65

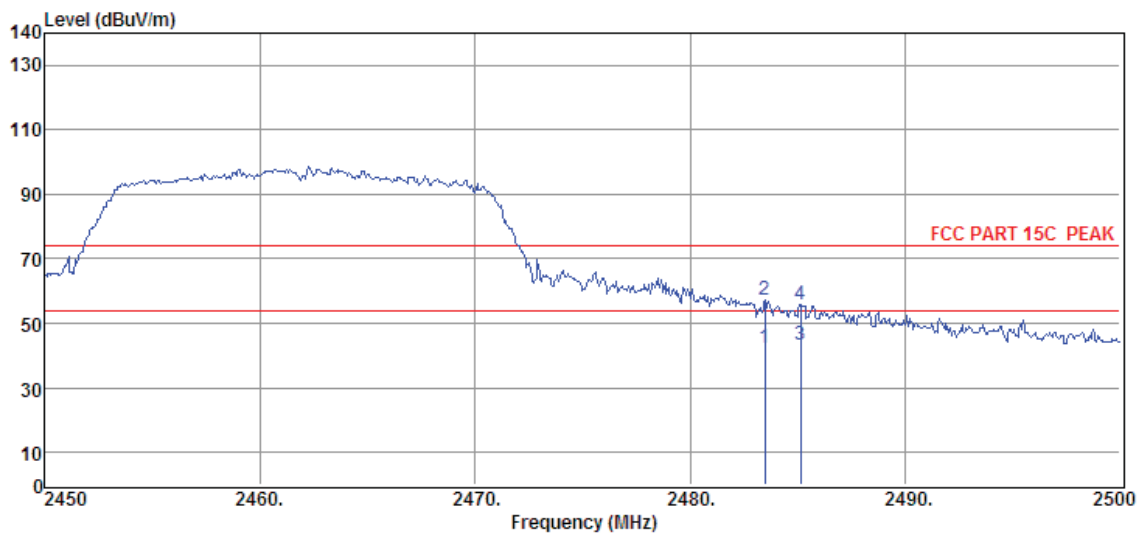


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	55.25	27.34	44.32	4.22	42.49	54.00	-11.51	Average	HORIZONTAL
2	2483.50	70.15	27.34	44.32	4.22	57.39	74.00	-16.61	Peak	HORIZONTAL
3	2485.15	56.24	27.35	44.32	4.22	43.49	54.00	-10.51	Average	HORIZONTAL
4	2485.15	68.60	27.35	44.32	4.22	55.85	74.00	-18.15	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode N20 2462
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 2.4G

Data: 66

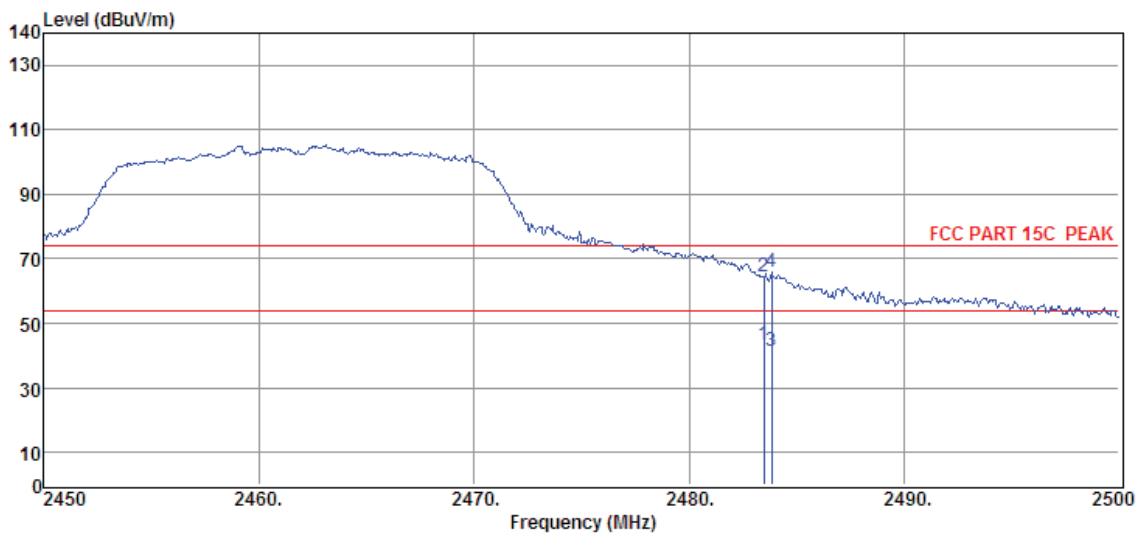


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	56.24	27.34	44.32	4.22	43.48	54.00	-10.52	Average	VERTICAL
2	2483.50	77.21	27.34	44.32	4.22	64.45	74.00	-9.55	Peak	VERTICAL
3	2483.85	54.25	27.34	44.32	4.22	41.49	54.00	-12.51	Average	VERTICAL
4	2483.85	78.74	27.34	44.32	4.22	65.98	74.00	-8.02	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode N40 2422
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 2.4G

Data: 68

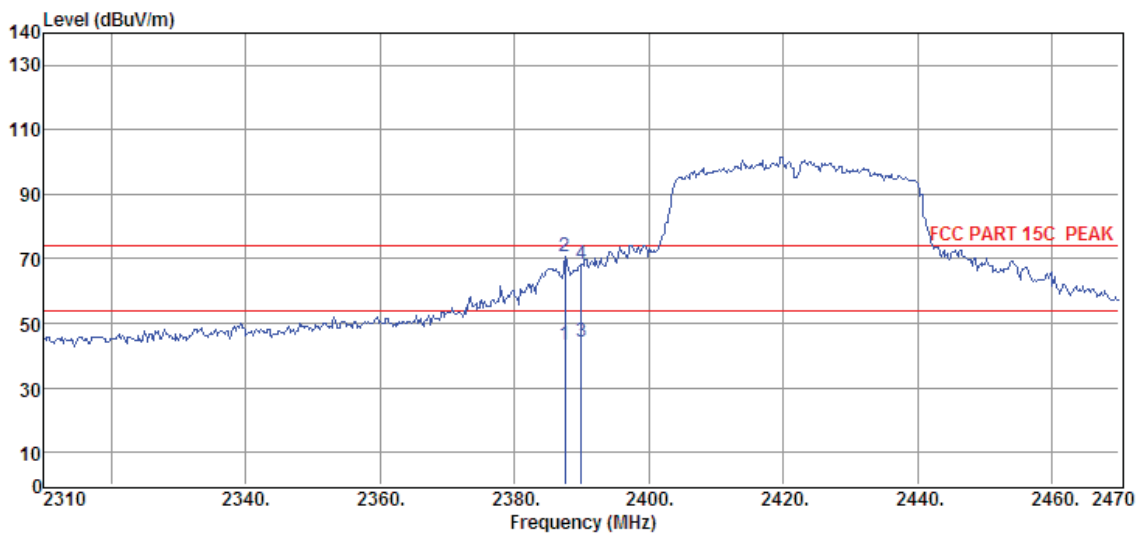


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.60	56.52	27.00	44.32	4.13	43.33	54.00	-10.67	Average	HORIZONTAL
2	2387.60	83.85	27.00	44.32	4.13	70.66	74.00	-3.34	Peak	HORIZONTAL
3	2390.00	57.46	27.00	44.32	4.13	44.27	54.00	-9.73	Average	HORIZONTAL
4	2390.00	81.63	27.00	44.32	4.13	68.44	74.00	-5.56	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode N40 2422
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 2.4G

Data: 67

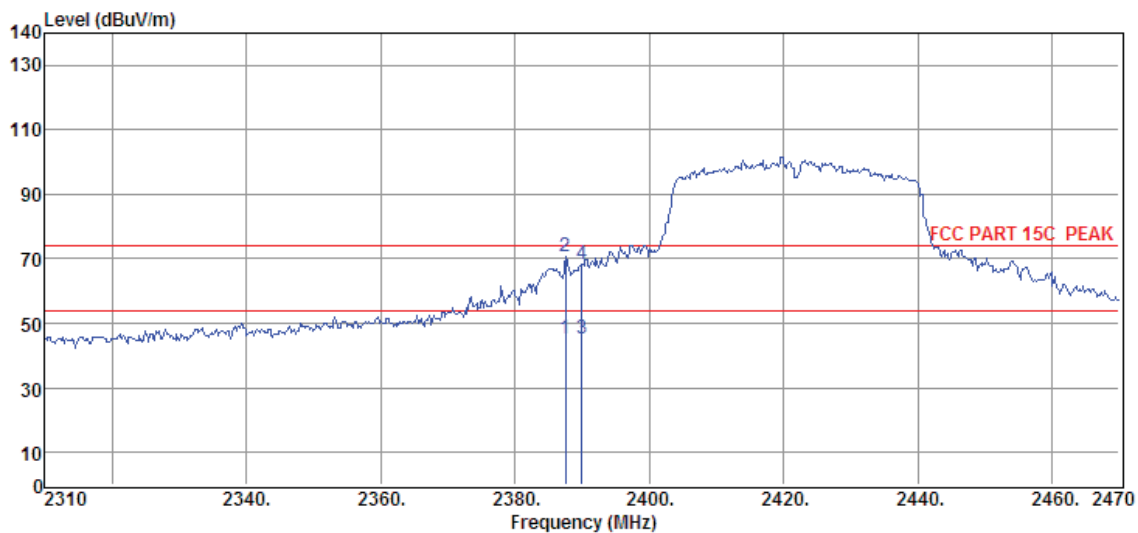


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.60	58.24	27.00	44.32	4.13	45.05	54.00	-8.95	Average	VERTICAL
2	2387.60	83.85	27.00	44.32	4.13	70.66	74.00	-3.34	Peak	VERTICAL
3	2390.00	58.43	27.00	44.32	4.13	45.24	54.00	-8.76	Average	VERTICAL
4	2390.00	81.63	27.00	44.32	4.13	68.44	74.00	-5.56	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode N40 2452
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 2.4G

Data: 69

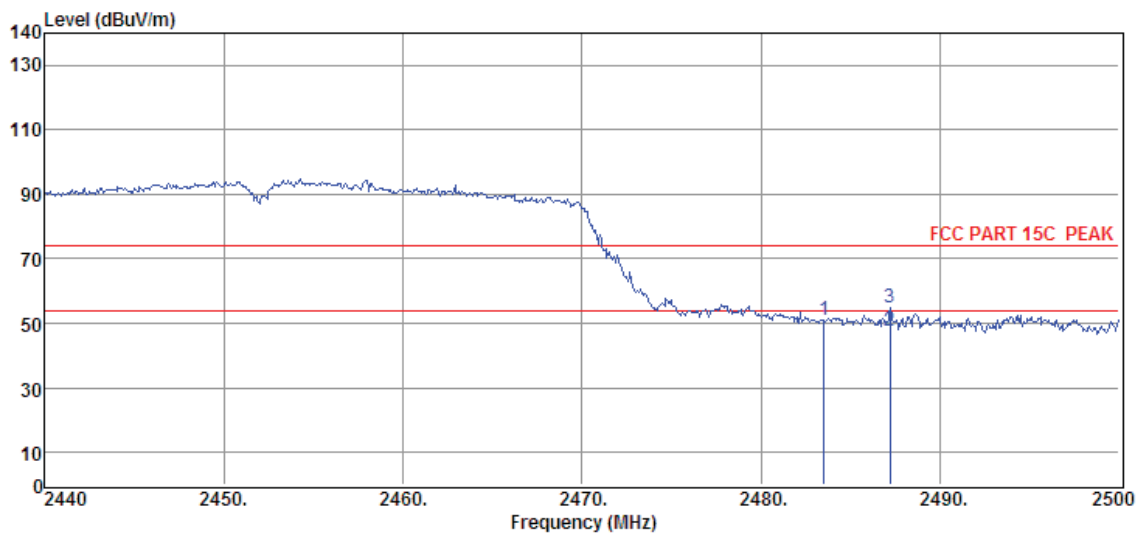


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	63.59	27.34	44.32	4.22	50.83	74.00	-23.17	Peak	HORIZONTAL
2	2487.22	60.25	27.35	44.32	4.22	47.50	54.00	-6.50	Average	HORIZONTAL
3	2487.22	67.50	27.35	44.32	4.22	54.75	74.00	-19.25	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2017 RE1# Report Data\Q17092506-1E\FCC 1-18GEM6**
Test Date : 2017-11-15 **Tested By** : TALENT
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : 120V/60Hz **Test Mode** : TX mode N40 2452
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 2.4G

Data: 70

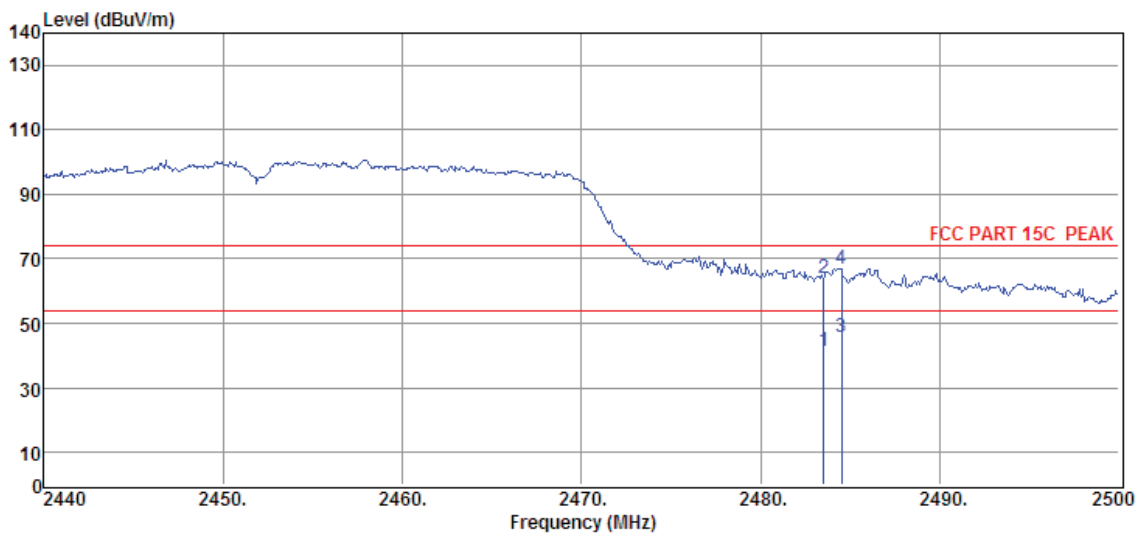


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	54.25	27.34	44.32	4.22	41.49	54.00	-12.51	Average	VERTICAL
2	2483.50	76.84	27.34	44.32	4.22	64.08	74.00	-9.92	Peak	VERTICAL
3	2484.52	58.32	27.34	44.32	4.22	45.56	54.00	-8.44	Average	VERTICAL
4	2484.52	79.85	27.34	44.32	4.22	67.09	74.00	-6.91	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

10 Power Line Conducted Emission

10.1. Block diagram of test setup

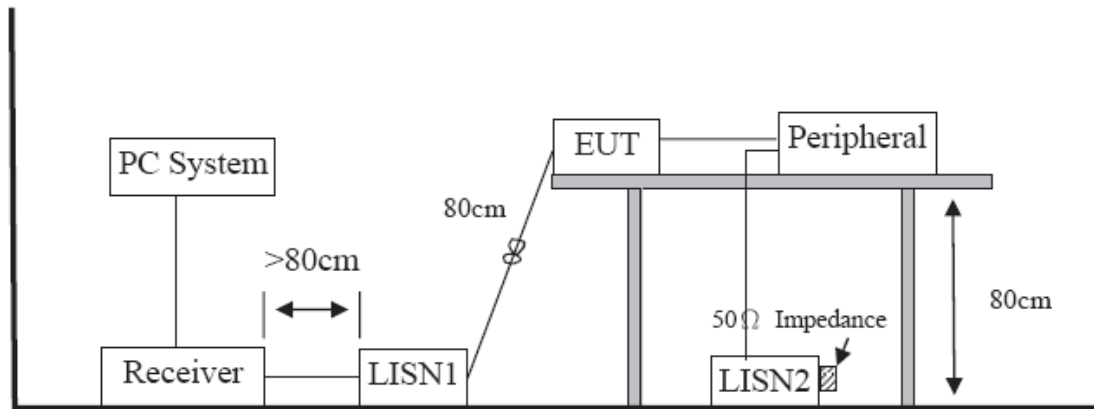

10.2. Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

10.4. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: “----” means peak detection; “-----” means average detection

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2017-10-25
EUT : WIRELESS SPEAKER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa
Memo :

E:\2017 CE report data\Q17092506-1E\CE.EM6
Tested By : Lewis
Model Number : ADDON C3
Test Mode : WIFI mode
LISN : 2016 ENV216/LINE

Data: 18

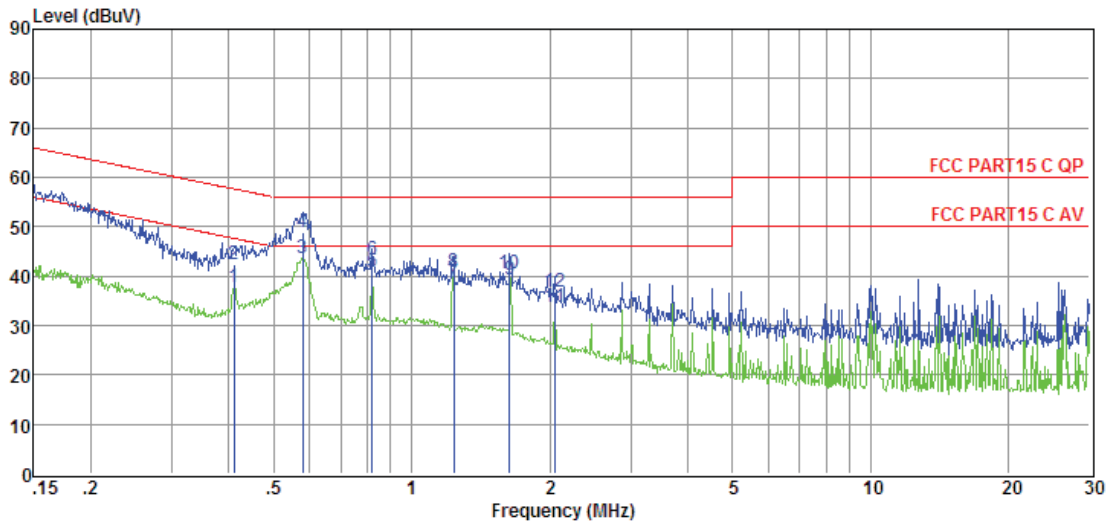

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.41	18.35	9.61	0.02	9.86	37.84	47.64	-9.80	Average	LINE
2	0.41	23.00	9.61	0.02	9.86	42.49	57.64	-15.15	QP	LINE
3	0.58	24.15	9.61	0.03	9.86	43.65	46.00	-2.35	Average	LINE
4	0.58	29.21	9.61	0.03	9.86	48.71	56.00	-7.29	QP	LINE
5	0.82	21.33	9.61	0.03	9.86	40.83	46.00	-5.17	Average	LINE
6	0.82	23.81	9.61	0.03	9.86	43.31	56.00	-12.69	QP	LINE
7	1.24	19.01	9.62	0.03	9.86	38.52	46.00	-7.48	Average	LINE
8	1.24	21.25	9.62	0.03	9.86	40.76	56.00	-15.24	QP	LINE
9	1.64	19.85	9.62	0.04	9.86	39.37	46.00	-6.63	Average	LINE
10	1.64	21.15	9.62	0.04	9.86	40.67	56.00	-15.33	QP	LINE
11	2.06	14.15	9.63	0.04	9.87	33.69	46.00	-12.31	Average	LINE
12	2.06	17.25	9.63	0.04	9.87	36.79	56.00	-19.21	QP	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **E:\2017 CE report data\Q17092506-1E\CE.EM6**
Test Date : 2017-10-25 **Tested By** : Lewis
EUT : WIRELESS SPEAKER **Model Number** : ADDON C3
Power Supply : AC 120V/60Hz **Test Mode** : WIFI mode
Condition : Temp:24.5°C,Humi:55%,
LISN : 2016 ENV216/NEUTRAL
Press:100.1kPa
Memo :

Data: 20

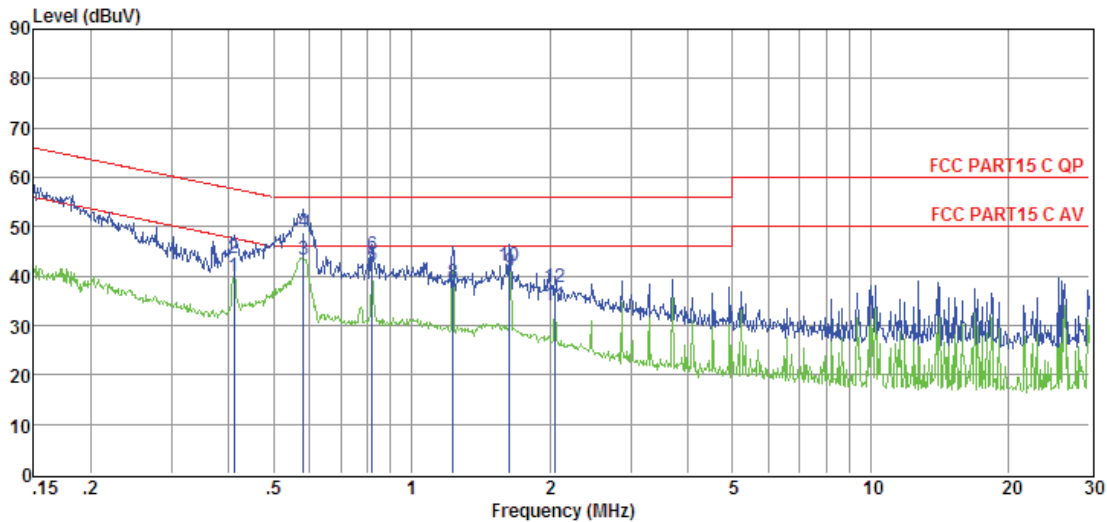

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.41	20.48	9.61	0.02	9.86	39.97	47.64	-7.67	Average	NEUTRAL
2	0.41	24.20	9.61	0.02	9.86	43.69	57.64	-13.95	QP	NEUTRAL
3	0.58	23.93	9.61	0.03	9.86	43.43	46.00	-2.57	Average	NEUTRAL
4	0.58	29.48	9.61	0.03	9.86	48.98	56.00	-7.02	QP	NEUTRAL
5	0.82	22.72	9.61	0.03	9.86	42.22	46.00	-3.78	Average	NEUTRAL
6	0.82	24.61	9.61	0.03	9.86	44.11	56.00	-11.89	QP	NEUTRAL
7	1.23	16.89	9.61	0.03	9.86	36.39	46.00	-9.61	Average	NEUTRAL
8	1.23	19.29	9.61	0.03	9.86	38.79	56.00	-17.21	QP	NEUTRAL
9	1.64	21.27	9.62	0.04	9.86	40.79	46.00	-5.21	Average	NEUTRAL
10	1.64	22.58	9.62	0.04	9.86	42.10	56.00	-13.90	QP	NEUTRAL
11	2.06	14.62	9.63	0.04	9.87	34.16	46.00	-11.84	Average	NEUTRAL
12	2.06	18.19	9.63	0.04	9.87	37.73	56.00	-18.27	QP	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

11 Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

Refer to clause 2.1, the transmit antenna of the EUT with directional gain of MIMO mode is 5.72dBi.

END OF REPORT