



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.407
RSS-GEN, ISSUE 5, AMENDMENT 1, MARCH 2019
RSS-247, ISSUE 2, FEBRUARY 2017
TEST REPORT

For

Autel Robotics Co., Ltd.

9th Floor, Bldg.B1, Zhiyuan, 1001 Xueyuan Rd. Xili, Nanshan, Shenzhen, China

FCC ID: 2AGNTEF9RC2409A
IC: 20910-EF9RC2409A

Report Type: Original Report	Product Name: Autel Smart Controller
Report Number: RSZ201027002-00C	
Report Date: 2020-12-09	
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	13
BLOCK DIAGRAM OF TEST SETUP	14
SUMMARY OF TEST RESULTS.....	15
FCC §15.407 (f) & §1.1310 & §2.1093, RSS-102 CLAUSE 4- RF EXPOSURE.....	16
APPLICABLE STANDARD	16
TEST RESULT	16
FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	18
FCC §15.207(a) RSS-GEN CLAUSE 8.8– CONDUCTED EMISSIONS	19
APPLICABLE STANDARD	19
EUT SETUP.....	19
EMI TEST RECEIVER SETUP.....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST PROCEDURE	20
TEST DATA	21
FCC §15.209, §15.205 , §15.407(b) &RSS-247 CLAUSE 6.2, RSS-GEN CLAUSE 8.10 –UNWANTED EMISSION	23
APPLICABLE STANDARD	23
EUT SETUP.....	25
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	27
TEST PROCEDURE	27
CORRECTED AMPLITUDE & MARGIN CALCULATION	28
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §15.407(a)(e) & RSS-247 CLAUSE 6.2,RSS-Gen CLAUSE 6.7–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	55
APPLICABLE STANDARD	55
TEST EQUIPMENT LIST AND DETAILS.....	55
TEST PROCEDURE	55
TEST DATA	55
FCC §15.407(a) & RSS-247 CLAUSE 6.2 –MAXIMUM CONDUCTED OUTPUT POWER.....	98

APPLICABLE STANDARD	98
TEST EQUIPMENT LIST AND DETAILS.....	100
TEST PROCEDURE	100
TEST DATA	100
FCC §15.407(a)& RSS-247 CLAUSE 6.2- POWER SPECTRAL DENSITY	103
APPLICABLE STANDARD	103
TEST PROCEDURE	105
TEST EQUIPMENT LIST AND DETAILS.....	105
TEST DATA	106
RSS-247 CLAUSE 6.4- ADDITIONAL REQUREMENT	149
APPLICABLE STANDARD	149
RESULT	150

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Autel Smart Controller
EUT Model:		EF9-1
Operation Frequency:		Wi-Fi 0: 5180-5240 MHz(802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5745-5825 MHz(802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80) Wi-Fi 1: 5180-5240 MHz(802.11a/n ht20) 5745-5825 MHz(802.11a/n ht20)
Maximum Average Output Power (Conducted):		Wi-Fi 0: 5150-5250 MHz: 13.95 dBm 5725-5850 MHz: 13.30 dBm Wi-Fi 1: 5150-5250 MHz: 13.34 dBm 5725-5850 MHz: 13.07 dBm
Modulation Type:		OFDM
Rated Input Voltage:		DC 11.55V from internal battery
Adapter Information:	Model:	GaN-001
	Input:	100-240VAC~50/60Hz 1.5A
	Output:	USB- C1/C2:5V=3A,9V=3A,12A=3A,15V=3A,20V=3.25A USB-A:3.4-5.5V=5A,5V=3A,9V=3A,12V=3A,20V=3A
Serial Number:		RSZ201027002-RF -S4
EUT Received Date:		2020.10.27
EUT Received Status:		Good

Objective

This type approval report is prepared on behalf of **Autel Robotics Co., Ltd.** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS, submissions with FCC ID: 2AGNTEF9RC2409A
 RSS-247 DTSs submissions with IC: 20910-EF9RC2409A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01, and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode (which was selected by manufacturer).

The device has two Wi-Fi Radio, Wi-Fi 0 supports 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, Wi-Fi 1 supports 802.11a/n ht20 only.

For 5150~5250 MHz band, 7 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n ht20,802.11ac vht20 channel 36, 40 and 48 was tested, for 802.11n ht40, 802.11ac vht40 channel 38, 46 were tested, for 802.11ac vht80, channel 42 was tested.

For 5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11n ht20, 802.11ac vht20 channel 149, 157 and 165 was tested, for 802.11n ht40, 802.11ac vht40 channel 151, 159 were tested, for 802.11ac vht80, channel 155 was tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO and MIMO in 802.11n and ac modes, per pretest, MIMO mode was the worst mode and reported.

EUT Exercise Software

Software " ADB " was used during test, which was provided by manufacturer and the maximum power was configured as below:

Wi-Fi 0:

Band	Mode	Channel	Frequency (MHz)	Data rate	Power level Setting	
					Chain 0	Chain 1
5150 - 5250 MHz	802.11a	Low	5180	6Mbps	11	11
		Middle	5200	6Mbps	11	11
		High	5240	6Mbps	11	11
	802.11n ht20	Low	5180	MCS8	11	11
		Middle	5200	MCS8	11	11
		High	5240	MCS8	11	11
	802.11n ht40	Low	5190	MCS8	11	11
		High	5230	MCS8	11	11
	802.11ac vht20	Low	5180	MCS8	11	11
		Middle	5200	MCS8	11	11
		High	5240	MCS8	11	11
	802.11ac vht40	Low	5190	MCS8	11	11
		High	5230	MCS8	11	11
	802.11ac vht80	Middle	5210	MCS9	11	11
5725 - 5850 MHz	802.11a	Low	5745	6Mbps	11	11
		Middle	5785	6Mbps	11	11
		High	5825	6Mbps	11	11
	802.11n ht20	Low	5745	MCS8	11	11
		Middle	5785	MCS8	11	11
		High	5825	MCS8	11	11
	802.11n ht40	Low	5755	MCS8	11	11
		High	5795	MCS8	11	11
	802.11ac vht20	Low	5745	MCS8	11	11
		Middle	5785	MCS8	11	11
		High	5825	MCS8	11	11
	802.11ac vht40	Low	5755	MCS8	11	11
		High	5795	MCS8	11	11
	802.11ac vht80	Middle	5775	MCS9	11	11

Wi-Fi 1:


Band	Mode	Channel	Frequency (MHz)	Data rate	Power level Setting	
					Chain 0	Chain 1
5150 - 5250 MHz	802.11a	Low	5180	6Mbps	28	28
		Middle	5200	6Mbps	28	28
		High	5240	6Mbps	28	28
	802.11n ht20	Low	5180	MCS8	28	28
		Middle	5200	MCS8	28	28
		High	5240	MCS8	28	28
5725 - 5850 MHz	802.11a	Low	5745	6Mbps	28	28
		Middle	5785	6Mbps	28	28
		High	5825	6Mbps	28	28
	802.11n ht20	Low	5745	MCS8	28	28
		Middle	5785	MCS8	28	28
		High	5825	MCS8	28	28

The maximum duty cycle as following table:


Wi-Fi	Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
0	802.11 a	1.391	1.450	95.93
	802.11n ht20	0.678	0.725	93.52
	802.11n ht40	0.347	0.389	89.20
	802.11ac vht20	0.148	0.190	77.89
	802.11ac vht40	0.091	0.131	69.47
	802.11 ac vht80	0.064	0.104	61.54
1	802.11 a	1.375	1.438	95.62
	802.11n ht20	0.672	0.720	93.33

Wi-Fi 0:


802.11a

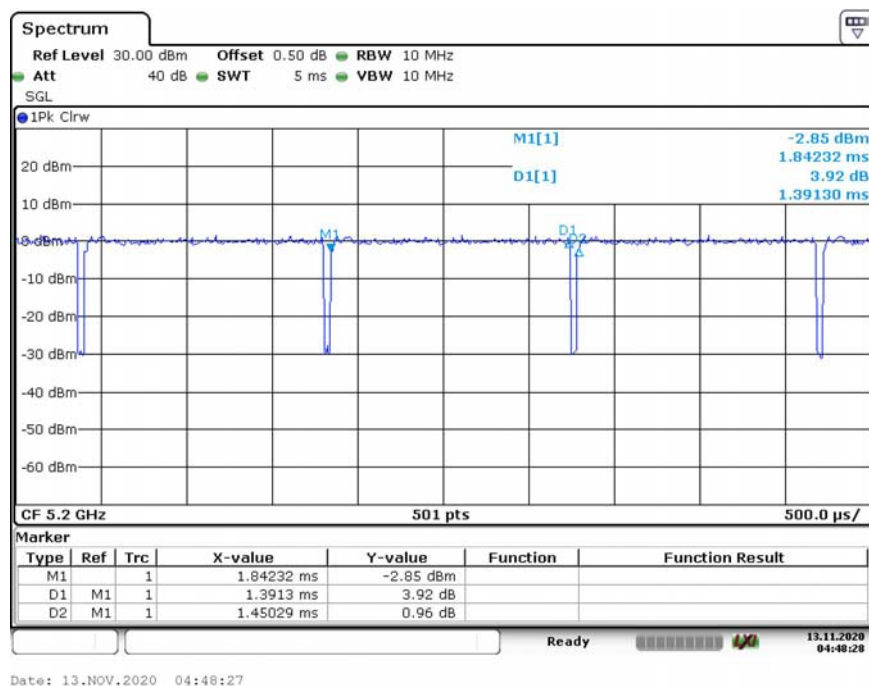


802.11n ht20

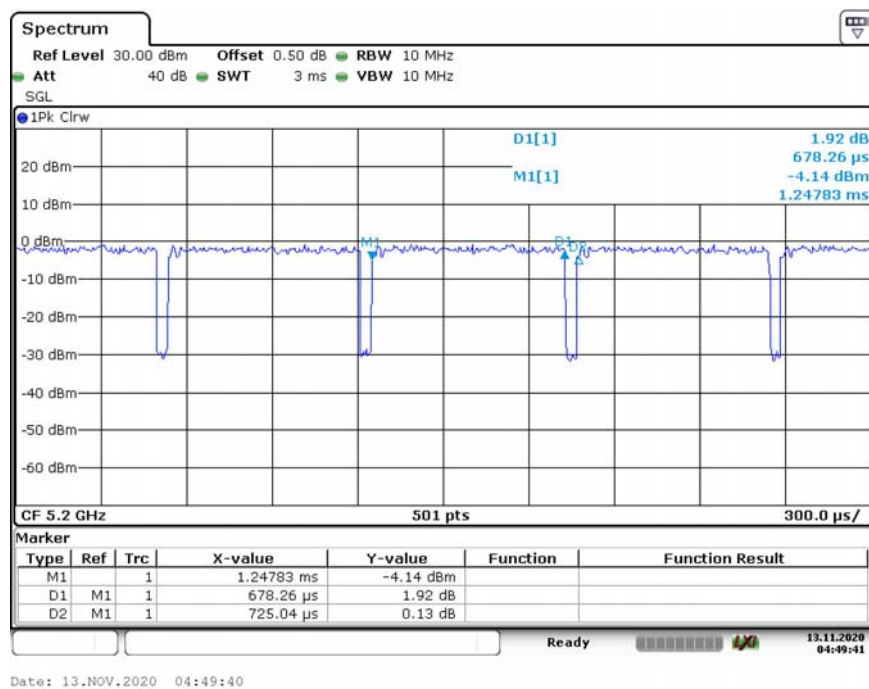

802.11ac vht20

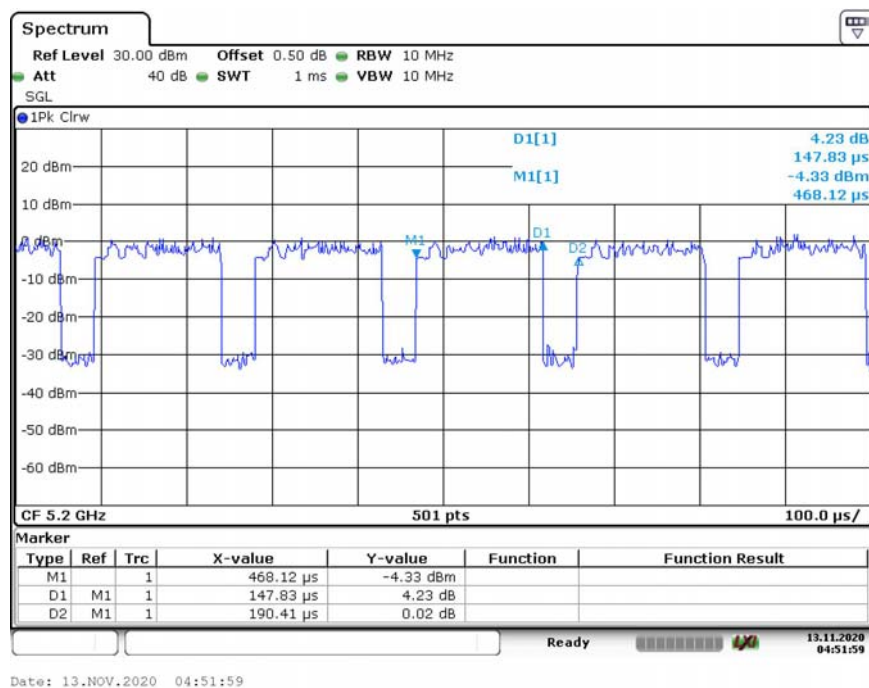


802.11n ht40

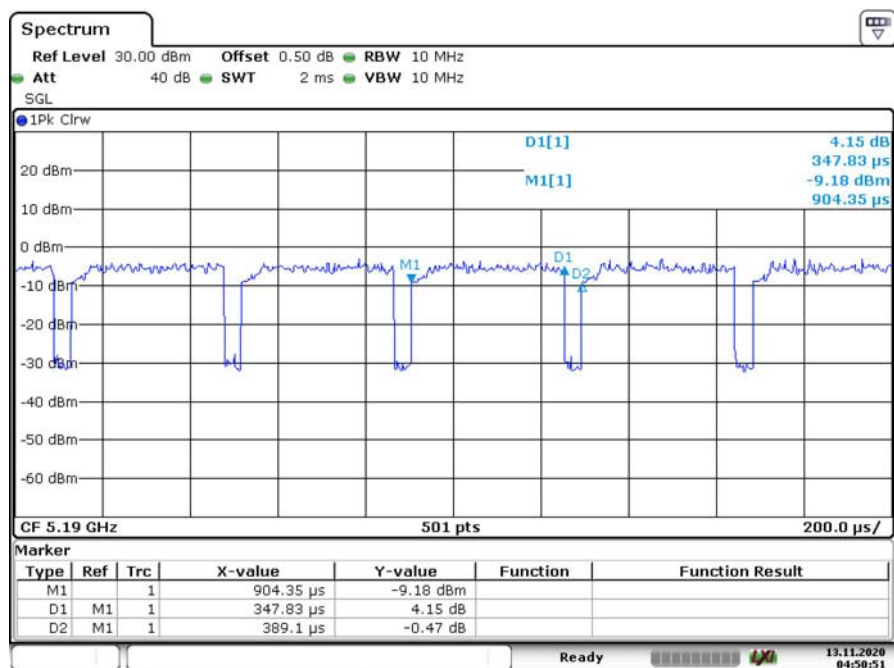


Date: 13.NOV.2020 04:50:51

802.11ac vht40

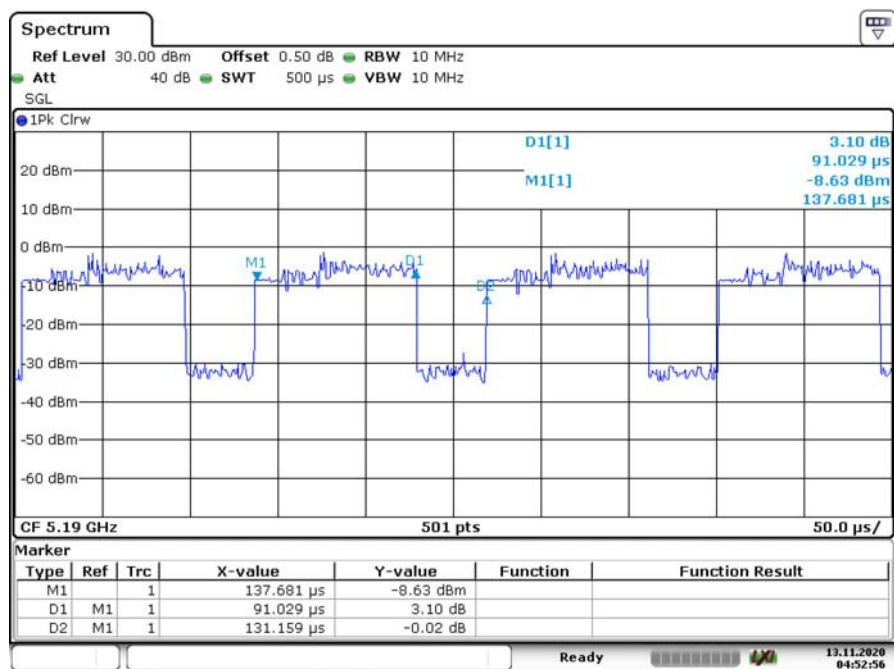


Date: 13.NOV.2020 04:52:56

802.11ac vht80

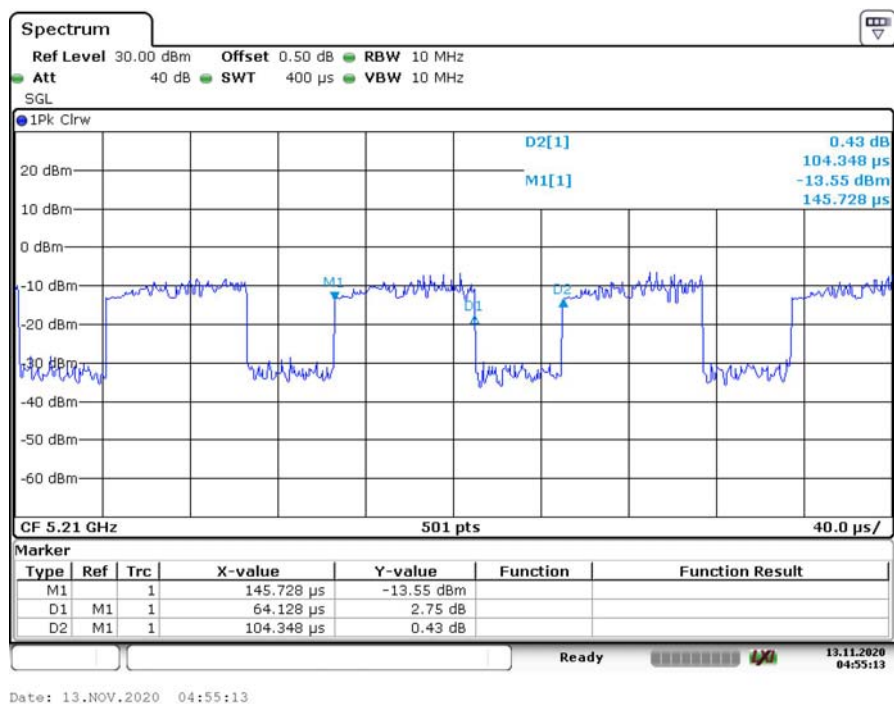


Wi-Fi 1:

802.11a

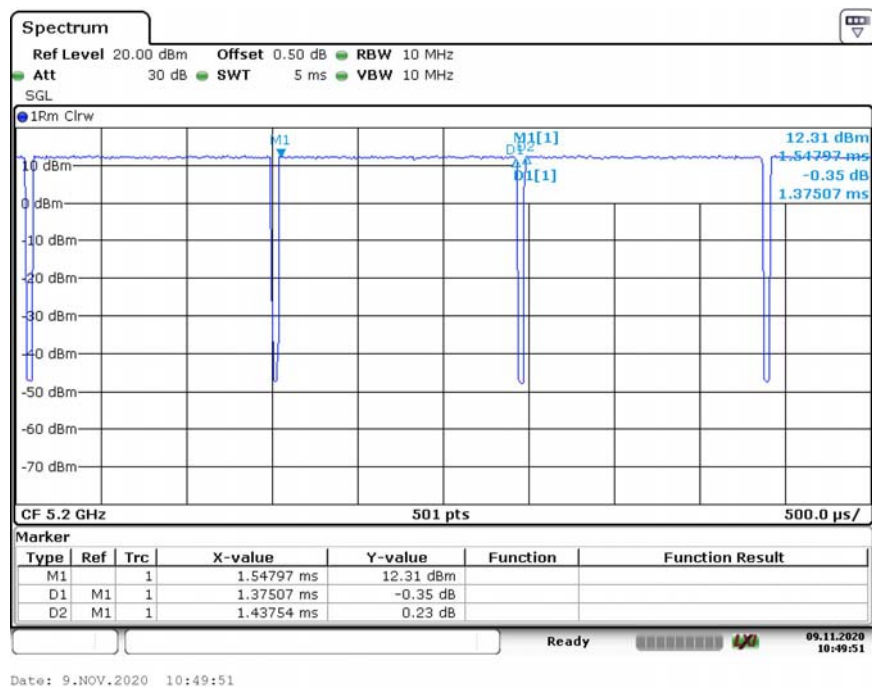

802.11n ht20

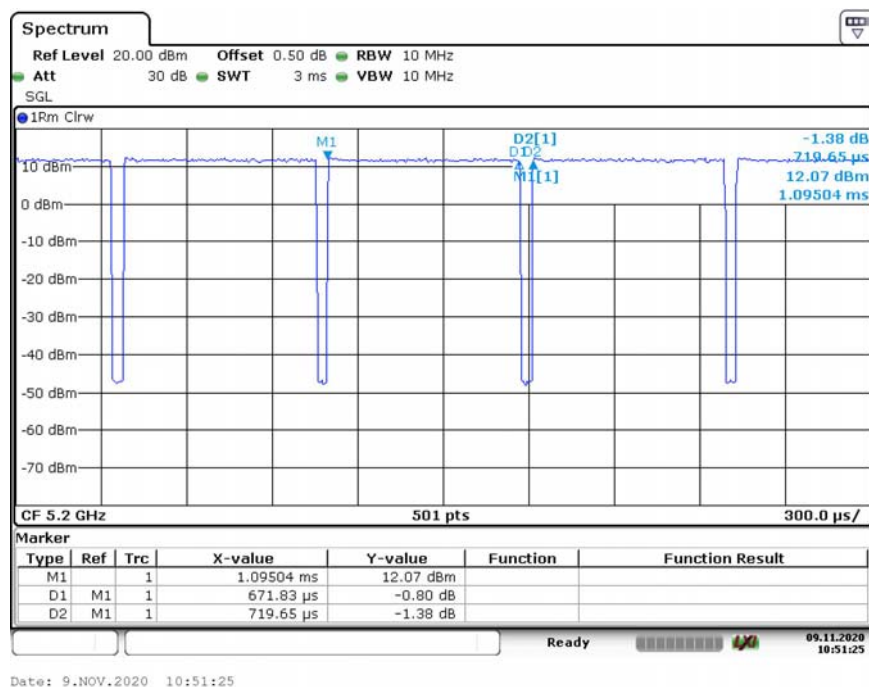

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Monitor	U3011t	CN-OPH5NY-74445-16T-290L
Unknown	Resistive load	1ohm	1ohm-1
Unknown	Resistive load	1ohm	1ohm-2

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB-C Cable	Yes	No	1.2	Adapter	EUT
HDMI Cable	Yes	Yes	1.5	EUT	Monitor
USB-A Cable*2	Yes	No	0.2	Adapter	Resistive Load

Block Diagram of Test Setup

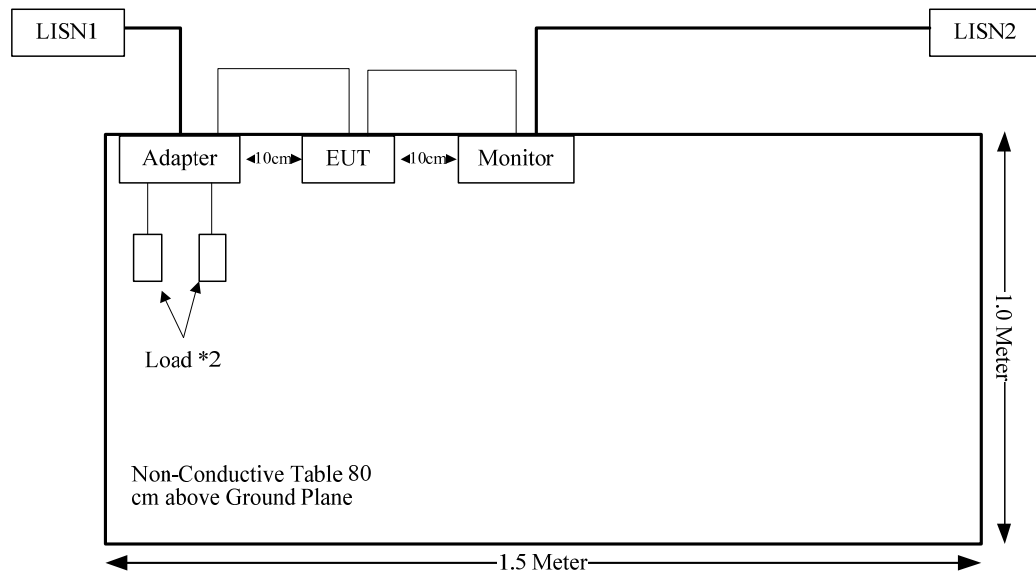

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1093 RSS-102 Clause 4	RF Exposure	Compliance
FCC§15.203, RSS-Gen Clause 6.8	Antenna Requirement	Compliance
FCC§15.407(b)(6)& §15.207(a), RSS-Gen Clause 8.8	Conducted Emissions	Compliance
FCC§15.205& §15.209 &§15.407(b), RSS-247 Clause 6.2	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(a) (e), RSS-247 Clause 6.2 RSS-Gen Clause 6.7	Emission Bandwidth	Compliance
FCC§15.407(a) RSS-247 Clause 6.2	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a), RSS-247 Clause 6.2	Power Spectral Density	Compliance
RSS-247 Clause 6.4	Additional requirements	Compliance

FCC §15.407 (f) & §1.1310 & §2.1093, RSS-102 CLAUSE 4- RF EXPOSURE**Applicable Standard**

According to §15.407(f), §1.1310 and §2.1093.

According to RSS-102 Clause 4 Table 3, SAR limits for device used by the general public

Body Region	Average SAR (W/Kg)	Averaging Time (minutes)	Mass Average (g)
Whole Body	0.08	6	Whole Body
Localized Head, Neck and Trunk	1.6	6	1
Localized Limbs	4	6	10

Test Result

Compliant, please refer to the SAR report: RSZ201027002-20.

FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen Clause 6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two internal antennas for Wi-Fi 0, two internal antennas for Wi-Fi 1, two external antennas permanently attached to the unit for SRD, all of them fulfill the requirement of this section. Please refer to the EUT photos.

Usage	Antenna Chain	Antenna Type	input impedance (Ohm)	Antenna Gain ^Δ /Frequency Range
Wi-Fi 0	0	FPC	50	2.1 dBi/2.4~2.5GHz 3.5 dBi/5.15~5.85GHz
	1	FPC	50	2.1 dBi/2.4~2.5GHz 4.1dBi/5.15~5.85GHz
Wi-Fi 1	0	FPC	50	4.4 dBi/5.15~5.85GHz
	1	FPC	50	4.5 dBi/5.15~5.85GHz
SRD	0	PCB	50	2.2 dBi/902-928 MHz 1.3 dBi/2.4~2.5GHz 4.0 dBi/5.15~5.85GHz
	1	PCB	50	2.2 dBi/902-928 MHz 1.3 dBi/2.4~2.5GHz 4.0 dBi/5.15~5.85GHz


Result: Compliance.

FCC §15.207(a) RSS-GEN CLAUSE 8.8– CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (6), RSS-GEN CLAUSE 8.8.

EUT Setup

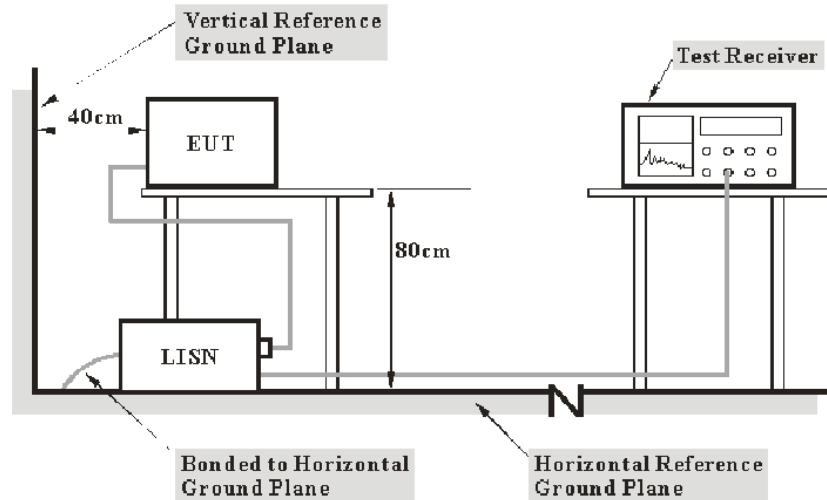

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits and RSS-Gen clause 8.8 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.


Test Data

Environmental Conditions

Temperature:	25.1°C
Relative Humidity:	60%
ATM Pressure:	101.2kPa
Tester:	Walker Chen
Test Date:	2021-04-21


Test Mode: Transmitting (Wi-Fi 0, 802.11a mode 5745 MHz chain 0 was the worst):

AC120 V, 60 Hz, Line:

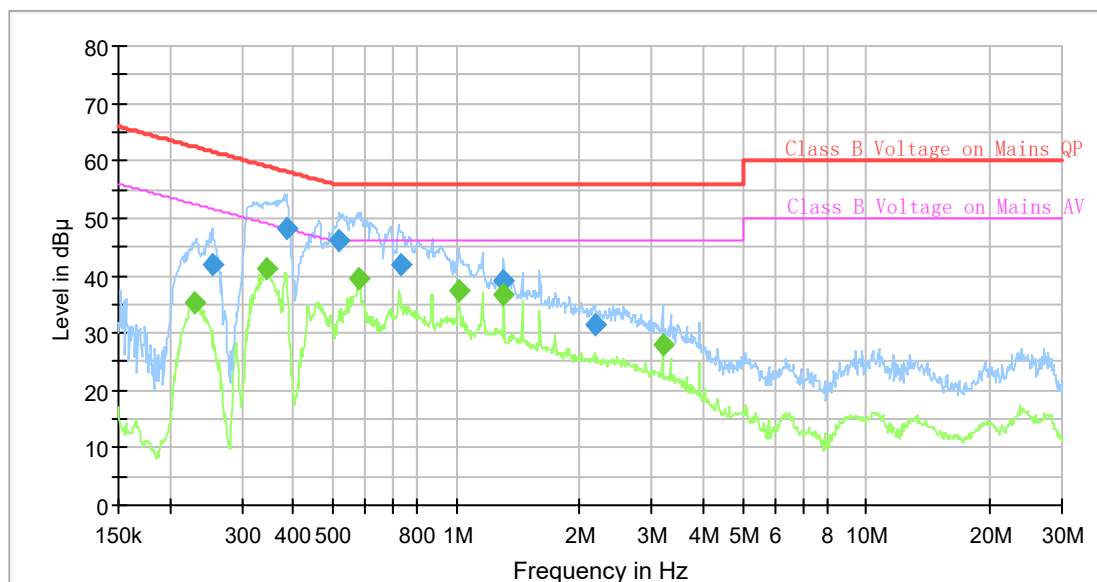

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.230342	---	35.20	52.44	17.24	9.000	L1	9.6
0.254504	41.82	---	61.61	19.79	9.000	L1	9.6
0.345004	---	41.21	49.08	7.87	9.000	L1	9.6
0.385014	48.21	---	58.17	9.96	9.000	L1	9.6
0.519327	46.00	---	56.00	10.00	9.000	L1	9.6
0.579554	---	39.33	46.00	6.67	9.000	L1	9.6
0.736317	41.77	---	56.00	14.23	9.000	L1	9.7
1.013195	---	37.26	46.00	8.74	9.000	L1	9.7
1.306658	39.24	---	56.00	16.76	9.000	L1	9.7
1.306658	---	36.56	46.00	9.44	9.000	L1	9.7
2.173203	31.34	---	56.00	24.66	9.000	L1	9.7
3.190708	---	27.86	46.00	18.14	9.000	L1	9.7

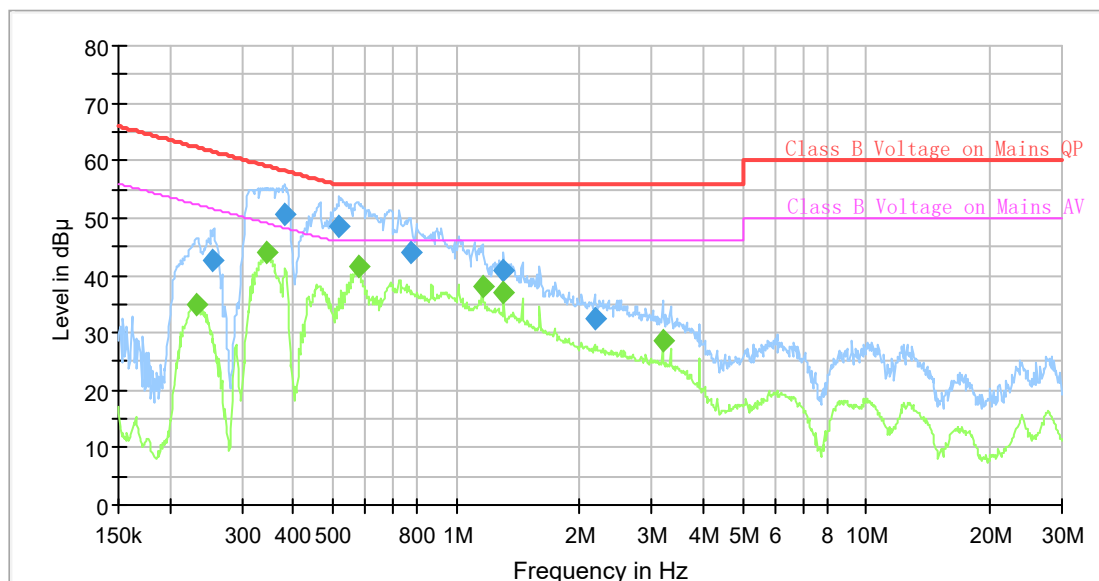AC120 V, 60 Hz, Neutral:**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.232651	---	34.93	52.35	17.42	9.000	N	9.6
0.254504	42.48	---	61.61	19.13	9.000	N	9.6
0.345004	---	44.19	49.08	4.89	9.000	N	9.6
0.383099	50.64	---	58.21	7.57	9.000	N	9.6
0.519327	48.39	---	56.00	7.61	9.000	N	9.6
0.579554	---	41.42	46.00	4.58	9.000	N	9.6
0.773973	44.04	---	56.00	11.96	9.000	N	9.6
1.159249	---	38.14	46.00	7.86	9.000	N	9.6
1.306658	40.84	---	56.00	15.16	9.000	N	9.6
1.306658	---	36.96	46.00	9.04	9.000	N	9.6
2.173203	32.54	---	56.00	23.46	9.000	N	9.6
3.190708	---	28.65	46.00	17.35	9.000	N	9.6

**FCC §15.209, §15.205 , §15.407(b) &RSS-247 CLAUSE 6.2, RSS-GEN
CLAUSE 8.10 –UNWANTED EMISSION**

Applicable Standard

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

According to RSS-247 Clause 6.2

Frequency band 5150-5250 MHz

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5250-5350 MHz

6.2.2.2 Unwanted emission limits

Devices shall comply with the following:

- a) All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

Frequency bands 5470-5600 MHz and 5650-5725 MHz:

6.2.3.2 Unwanted emission limits

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

Frequency band 5725-5850 MHz

6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.


Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.



Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

EUT Setup

Below 1 GHz:

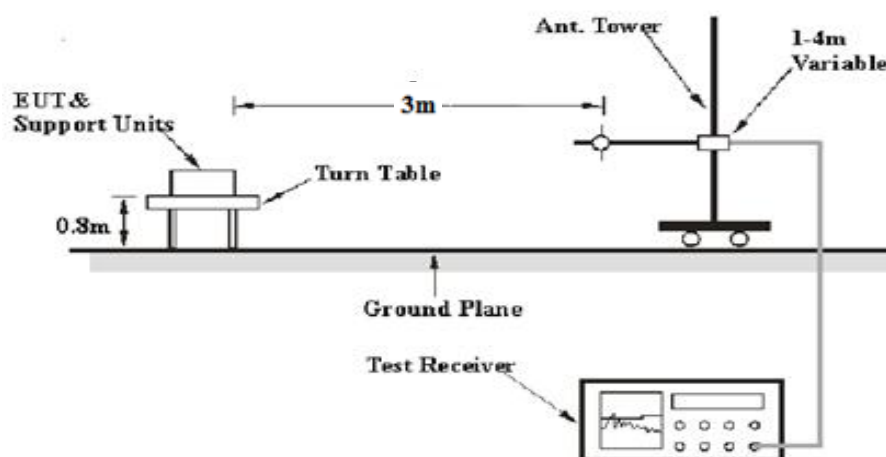

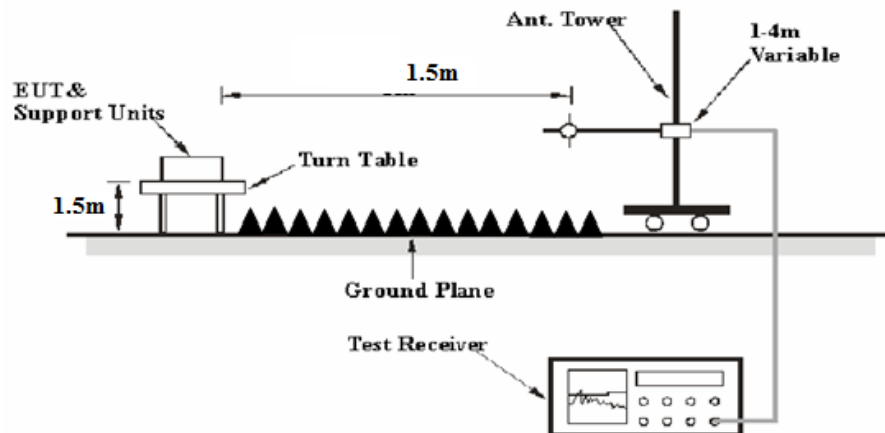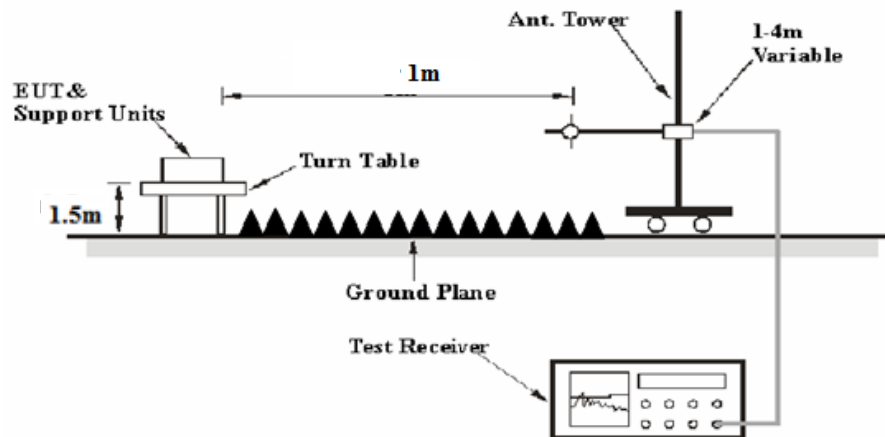1-26.5 GHz:**26.5-40 GHz:**

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A , above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits and RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB

or

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2020-11-10	2023-11-10
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-05-06	2021-05-06
HP	Amplifier	8447D	2727A05902	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz					
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2020-12-05	2023-12-04
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2020-12-05	2023-12-04
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
HUBER+SUHNER	Coaxial Cable	SUCOFLEX 126EA	MY369/26/26E A	2020-09-25	2021-09-25
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2020-06-27	2021-06-27
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Mini Circuits	High Pass Filter	VHF-6010+	31118	2020-06-16	2021-06-16
Sinoscite	Bandstop Filters	BSF5150-5850MN-0899-003	0899003	2020-05-06	2021-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	25.8°C	26.8°C
Relative Humidity:	51%	47%
ATM Pressure:	101.3kPa	101.2 kPa
Tester:	Joker Chen	Lee Li
Test Date:	2021-04-20	2021-04-21


Test Mode: Transmitting

1) Below 1GHz(Wi-Fi 0, 802.11a mode 5745 MHz chain 0 was the worst):

Horizontal

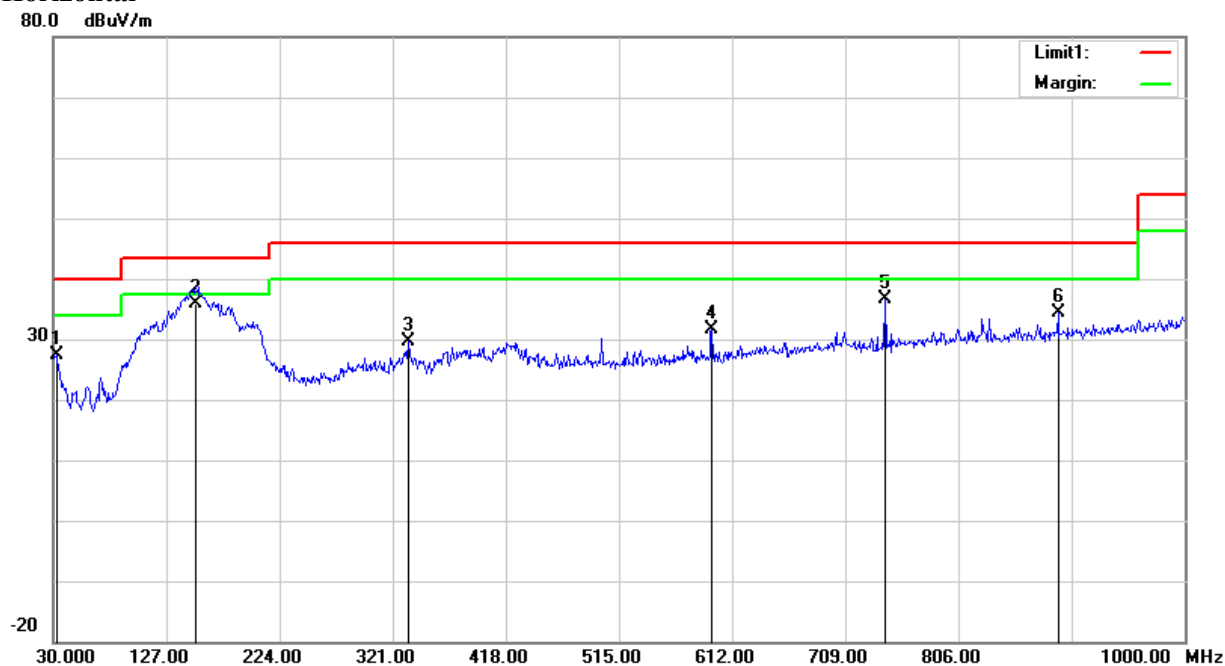

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
32.9100	28.08	peak	-0.76	27.32	40.00	12.68
152.2200	42.07	QP	-6.18	35.89	43.50	7.61
334.5800	33.01	peak	-3.34	29.67	46.00	16.33
594.5400	30.90	peak	0.67	31.57	46.00	14.43
742.9500	33.59	peak	2.92	36.51	46.00	9.49
891.3600	35.16	peak	-0.88	34.28	46.00	11.72

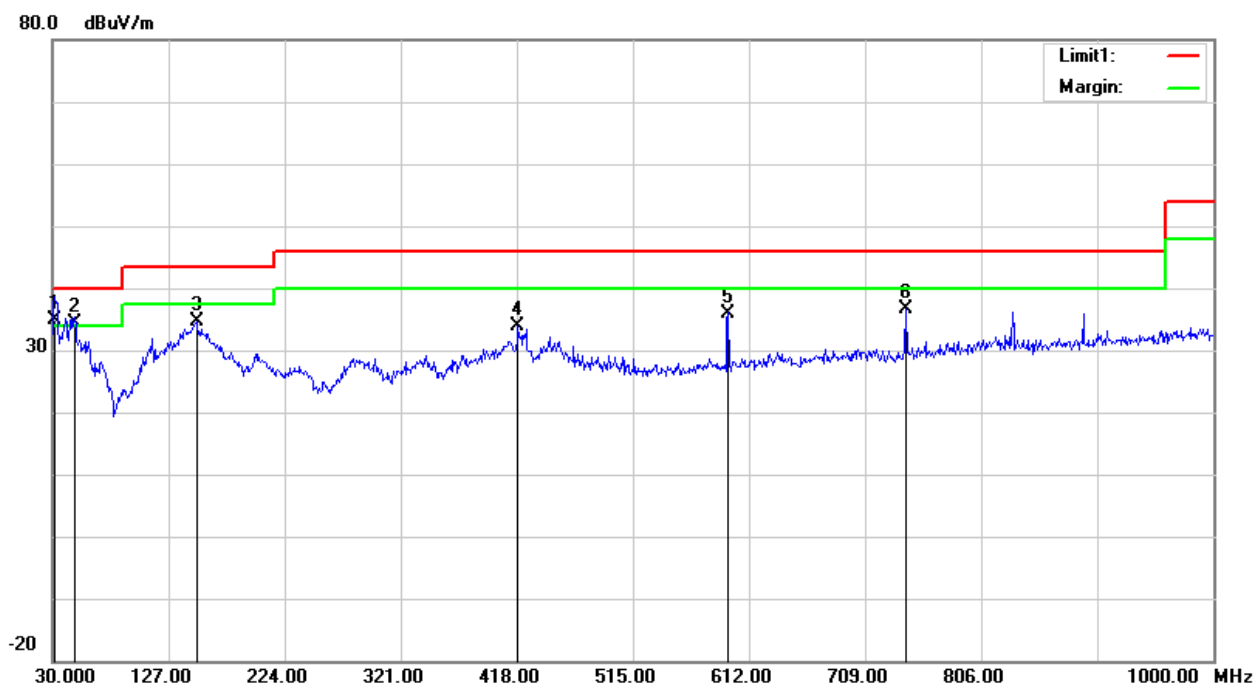Vertical

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
31.9400	34.86	QP	0.01	34.87	40.00	5.13
48.4300	45.35	QP	-10.93	34.42	40.00	5.58
150.2800	40.79	peak	-6.17	34.62	43.50	8.88
418.9700	35.63	peak	-1.70	33.93	46.00	12.07
594.5400	35.33	peak	0.67	36.00	46.00	10.00
742.9500	33.78	peak	2.92	36.70	46.00	9.30

2) 1GHz-40GHz:**Wifi 0****5150-5250 MHz:****802.11a, Chain 0**

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5180MHz										
5180.00	62.62	PK	H	33.59	3.58	0.00	99.79	93.77	N/A	N/A
5180.00	52.84	AV	H	33.59	3.58	0.00	90.01	83.99	N/A	N/A
5180.00	69.29	PK	V	33.59	3.58	0.00	106.46	100.44	N/A	N/A
5180.00	60.17	AV	V	33.59	3.58	0.00	97.34	91.32	N/A	N/A
5150.00	27.23	PK	V	33.54	3.56	0.00	64.33	58.31	74.00	15.69
5150.00	14.81	AV	V	33.54	3.56	0.00	51.91	45.89	54.00	8.11
10360.00	36.99	PK	V	38.17	6.29	25.46	55.99	49.97	68.20	18.23
15540.00	39.21	PK	V	38.06	8.85	24.27	61.85	55.83	74.00	18.17
15540.00	25.77	AV	V	38.06	8.85	24.27	48.41	42.39	54.00	11.61
Middle Channel: 5200 MHz										
5200.00	62.18	PK	H	33.62	3.60	0.00	99.40	93.38	N/A	N/A
5200.00	52.39	AV	H	33.62	3.60	0.00	89.61	83.59	N/A	N/A
5200.00	68.87	PK	V	33.62	3.60	0.00	106.09	100.07	N/A	N/A
5200.00	59.72	AV	V	33.62	3.60	0.00	96.94	90.92	N/A	N/A
10400.00	37.07	PK	V	38.18	6.32	25.46	56.11	50.09	68.20	18.11
15600.00	39.01	PK	V	38.00	8.83	24.31	61.53	55.51	74.00	18.49
15600.00	25.85	AV	V	38.00	8.83	24.31	48.37	42.35	54.00	11.65
High Channel: 5240 MHz										
5240.00	62.36	PK	H	33.68	3.52	0.00	99.56	93.54	N/A	N/A
5240.00	52.57	AV	H	33.68	3.52	0.00	89.77	83.75	N/A	N/A
5240.00	69.03	PK	V	33.68	3.52	0.00	106.23	100.21	N/A	N/A
5240.00	59.90	AV	V	33.68	3.52	0.00	97.10	91.08	N/A	N/A
5350.00	26.94	PK	V	33.86	3.52	0.00	64.32	58.3	74.00	15.70
5350.00	15.07	AV	V	33.86	3.52	0.00	52.45	46.43	54.00	7.57
10480.00	37.25	PK	V	38.20	6.37	25.47	56.35	50.33	68.20	17.87
15720.00	39.22	PK	V	37.88	8.79	24.39	61.50	55.48	74.00	18.52
15720.00	26.03	AV	V	37.88	8.79	24.39	48.31	42.29	54.00	11.71

802.11a, Chain 1

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5180MHz										
5180.00	69.55	PK	H	33.59	3.58	0.00	106.72	100.7	N/A	N/A
5180.00	59.36	AV	H	33.59	3.58	0.00	96.53	90.51	N/A	N/A
5180.00	65.58	PK	V	33.59	3.58	0.00	102.75	96.73	N/A	N/A
5180.00	55.24	AV	V	33.59	3.58	0.00	92.41	86.39	N/A	N/A
5150.00	26.53	PK	V	33.54	3.56	0.00	63.63	57.61	74.00	16.39
5150.00	15.02	AV	V	33.54	3.56	0.00	52.12	46.1	54.00	7.90
10360.00	38.41	PK	V	38.17	6.29	25.46	57.41	51.39	68.20	16.81
15540.00	37.22	PK	V	38.06	8.85	24.27	59.86	53.84	74.00	20.16
15540.00	25.47	AV	V	38.06	8.85	24.27	48.11	42.09	54.00	11.91
Middle Channel: 5200 MHz										
5200.00	69.27	PK	H	33.62	3.60	0.00	106.49	100.47	N/A	N/A
5200.00	59.08	AV	H	33.62	3.60	0.00	96.30	90.28	N/A	N/A
5200.00	65.30	PK	V	33.62	3.60	0.00	102.52	96.5	N/A	N/A
5200.00	54.96	AV	V	33.62	3.60	0.00	92.18	86.16	N/A	N/A
10400.00	38.13	PK	V	38.18	6.32	25.46	57.17	51.15	68.20	17.05
15600.00	36.94	PK	V	38.00	8.83	24.31	59.46	53.44	74.00	20.56
15600.00	25.19	AV	V	38.00	8.83	24.31	47.71	41.69	54.00	12.31
High Channel: 5240 MHz										
5240.00	69.29	PK	H	33.68	3.52	0.00	106.49	100.47	N/A	N/A
5240.00	59.10	AV	H	33.68	3.52	0.00	96.30	90.28	N/A	N/A
5240.00	65.32	PK	V	33.68	3.52	0.00	102.52	96.5	N/A	N/A
5240.00	54.98	AV	V	33.68	3.52	0.00	92.18	86.16	N/A	N/A
5350.00	26.27	PK	V	33.86	3.52	0.00	63.65	57.63	74.00	16.37
5350.00	14.76	AV	V	33.86	3.52	0.00	52.14	46.12	54.00	7.88
10480.00	38.15	PK	V	38.20	6.37	25.47	57.25	51.23	68.20	16.97
15720.00	36.96	PK	V	37.88	8.79	24.39	59.24	53.22	74.00	20.78
15720.00	25.21	AV	V	37.88	8.79	24.39	47.49	41.47	54.00	12.53

802.11n ht20(2Tx was the worst)

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5180 MHz										
5180.00	68.83	PK	H	33.59	3.58	0.00	106.00	99.98	N/A	N/A
5180.00	58.65	AV	H	33.59	3.58	0.00	95.82	89.8	N/A	N/A
5180.00	70.12	PK	V	33.59	3.58	0.00	107.29	101.27	N/A	N/A
5180.00	60.36	AV	V	33.59	3.58	0.00	97.53	91.51	N/A	N/A
5150.00	27.19	PK	V	33.54	3.56	0.00	64.29	58.27	74.00	15.73
5150.00	15.28	AV	V	33.54	3.56	0.00	52.38	46.36	54.00	7.64
10360.00	37.19	PK	V	38.17	6.29	25.46	56.19	50.17	68.20	18.03
15540.00	39.20	PK	V	38.06	8.85	24.27	61.84	55.82	74.00	18.18
15540.00	25.36	AV	V	38.06	8.85	24.27	48.00	41.98	54.00	12.02
Middle Channel: 5200 MHz										
5200.00	68.52	PK	H	33.62	3.60	0.00	105.74	99.72	N/A	N/A
5200.00	58.34	AV	H	33.62	3.60	0.00	95.56	89.54	N/A	N/A
5200.00	69.86	PK	V	33.62	3.60	0.00	107.08	101.06	N/A	N/A
5200.00	60.05	AV	V	33.62	3.60	0.00	97.27	91.25	N/A	N/A
10400.00	36.88	PK	V	38.18	6.32	25.46	55.92	49.9	68.20	18.30
15600.00	38.89	PK	V	38.00	8.83	24.31	61.41	55.39	74.00	18.61
15600.00	25.05	AV	V	38.00	8.83	24.31	47.57	41.55	54.00	12.45
High Channel: 5240 MHz										
5240.00	68.66	PK	H	33.68	3.52	0.00	105.86	99.84	N/A	N/A
5240.00	58.48	AV	H	33.68	3.52	0.00	95.68	89.66	N/A	N/A
5240.00	69.95	PK	V	33.68	3.52	0.00	107.15	101.13	N/A	N/A
5240.00	60.19	AV	V	33.68	3.52	0.00	97.39	91.37	N/A	N/A
5350.00	27.02	PK	V	33.86	3.52	0.00	64.40	58.38	74.00	15.62
5350.00	15.11	AV	V	33.86	3.52	0.00	52.49	46.47	54.00	7.53
10480.00	37.02	PK	V	38.20	6.37	25.47	56.12	50.1	68.20	18.10
15720.00	39.03	PK	V	37.88	8.79	24.39	61.31	55.29	74.00	18.71
15720.00	25.19	AV	V	37.88	8.79	24.39	47.47	41.45	54.00	12.55

802.11n ht40(2Tx was the worst)

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5190 MHz										
5190.00	65.39	PK	H	33.60	3.59	0.00	102.58	96.56	N/A	N/A
5190.00	55.46	AV	H	33.60	3.59	0.00	92.65	86.63	N/A	N/A
5190.00	68.36	PK	V	33.60	3.59	0.00	105.55	99.53	N/A	N/A
5190.00	58.24	AV	V	33.60	3.59	0.00	95.43	89.41	N/A	N/A
5150.00	28.09	PK	V	33.54	3.56	0.00	65.19	59.17	74.00	14.83
5150.00	16.34	AV	V	33.54	3.56	0.00	53.44	47.42	54.00	6.58
10380.00	36.06	PK	V	38.18	6.31	25.46	55.09	49.07	68.20	19.13
15570.00	36.47	PK	V	38.03	8.84	24.29	59.05	53.03	74.00	20.97
15570.00	24.42	AV	V	38.03	8.84	24.29	47.00	40.98	54.00	13.02
High Channel:5230 MHz										
5230.00	63.59	PK	H	33.67	3.54	0.00	100.80	94.78	N/A	N/A
5230.00	53.85	AV	H	33.67	3.54	0.00	91.06	85.04	N/A	N/A
5230.00	66.07	PK	V	33.67	3.54	0.00	103.28	97.26	N/A	N/A
5230.00	56.23	AV	V	33.67	3.54	0.00	93.44	87.42	N/A	N/A
5350.00	27.13	PK	V	33.86	3.52	0.00	64.51	58.49	74.00	15.51
5350.00	15.70	AV	V	33.86	3.52	0.00	53.08	47.06	54.00	6.94
10460.00	35.59	PK	V	38.19	6.36	25.47	54.67	48.65	68.20	19.55
15690.00	35.66	PK	V	37.91	8.80	24.37	58.00	51.98	74.00	22.02
15690.00	24.04	AV	V	37.91	8.80	24.37	46.38	40.36	54.00	13.64

802.11ac vht20(2Tx was the worst)

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5180 MHz										
5180.00	68.94	PK	H	33.59	3.58	0.00	106.11	100.09	N/A	N/A
5180.00	59.28	AV	H	33.59	3.58	0.00	96.45	90.43	N/A	N/A
5180.00	70.14	PK	V	33.59	3.58	0.00	107.31	101.29	N/A	N/A
5180.00	61.36	AV	V	33.59	3.58	0.00	98.53	92.51	N/A	N/A
5150.00	27.27	PK	V	33.54	3.56	0.00	64.37	58.35	74.00	15.65
5150.00	16.54	AV	V	33.54	3.56	0.00	53.64	47.62	54.00	6.38
10360.00	37.21	PK	V	38.17	6.29	25.46	56.21	50.19	68.20	18.01
15540.00	38.35	PK	V	38.06	8.85	24.27	60.99	54.97	74.00	19.03
15540.00	26.48	AV	V	38.06	8.85	24.27	49.12	43.1	54.00	10.90
Middle Channel: 5200 MHz										
5200.00	68.83	PK	H	33.62	3.60	0.00	106.05	100.03	N/A	N/A
5200.00	59.17	AV	H	33.62	3.60	0.00	96.39	90.37	N/A	N/A
5200.00	70.08	PK	V	33.62	3.60	0.00	107.30	101.28	N/A	N/A
5200.00	61.25	AV	V	33.62	3.60	0.00	98.47	92.45	N/A	N/A
10400.00	37.08	PK	V	38.18	6.32	25.46	56.12	50.1	68.20	18.10
15600.00	38.22	PK	V	38.00	8.83	24.31	60.74	54.72	74.00	19.28
15600.00	26.35	AV	V	38.00	8.83	24.31	48.87	42.85	54.00	11.15
High Channel: 5240 MHz										
5240.00	68.65	PK	H	33.68	3.52	0.00	105.85	99.83	N/A	N/A
5240.00	58.99	AV	H	33.68	3.52	0.00	96.19	90.17	N/A	N/A
5240.00	69.85	PK	V	33.68	3.52	0.00	107.05	101.03	N/A	N/A
5240.00	61.07	AV	V	33.68	3.52	0.00	98.27	92.25	N/A	N/A
5350.00	26.98	PK	V	33.86	3.52	0.00	64.36	58.34	74.00	15.66
5350.00	16.25	AV	V	33.86	3.52	0.00	53.63	47.61	54.00	6.39
10480.00	36.92	PK	V	38.20	6.37	25.47	56.02	50	68.20	18.20
15720.00	38.06	PK	V	37.88	8.79	24.39	60.34	54.32	74.00	19.68
15720.00	26.19	AV	V	37.88	8.79	24.39	48.47	42.45	54.00	11.55

802.11ac vht40(2Tx was the worst)

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5190 MHz										
5190.00	68.43	PK	H	33.60	3.59	0.00	105.62	99.6	N/A	N/A
5190.00	59.24	AV	H	33.60	3.59	0.00	96.43	90.41	N/A	N/A
5190.00	69.63	PK	V	33.60	3.59	0.00	106.82	100.8	N/A	N/A
5190.00	60.66	AV	V	33.60	3.59	0.00	97.85	91.83	N/A	N/A
5150.00	28.17	PK	V	33.54	3.56	0.00	65.27	59.25	74.00	14.75
5150.00	17.61	AV	V	33.54	3.56	0.00	54.71	48.69	54.00	5.31
10380.00	38.29	PK	V	38.18	6.31	25.46	57.32	51.3	68.20	16.90
15570.00	36.54	PK	V	38.03	8.84	24.29	59.12	53.1	74.00	20.90
15570.00	24.72	AV	V	38.03	8.84	24.29	47.30	41.28	54.00	12.72
High Channel: 5230 MHz										
5230.00	68.14	PK	H	33.67	3.54	0.00	105.35	99.33	N/A	N/A
5230.00	58.95	AV	H	33.67	3.54	0.00	96.16	90.14	N/A	N/A
5230.00	69.34	PK	V	33.67	3.54	0.00	106.55	100.53	N/A	N/A
5230.00	60.37	AV	V	33.67	3.54	0.00	97.58	91.56	N/A	N/A
5350.00	27.88	PK	V	33.86	3.52	0.00	65.26	59.24	74.00	14.76
5350.00	18.32	AV	V	33.86	3.52	0.00	55.70	49.68	54.00	4.32
10460.00	38.01	PK	V	38.19	6.36	25.47	57.09	51.07	68.20	17.13
15690.00	36.25	PK	V	37.91	8.80	24.37	58.59	52.57	74.00	21.43
15690.00	24.43	AV	V	37.91	8.80	24.37	46.77	40.75	54.00	13.25

802.11ac vht80(2Tx was the worst)

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Middle Channel: 5210 MHz										
5210.00	67.41	PK	H	33.64	3.58	0.00	104.63	98.61	N/A	N/A
5210.00	58.39	AV	H	33.64	3.58	0.00	95.61	89.59	N/A	N/A
5210.00	69.98	PK	V	33.64	3.58	0.00	107.20	101.18	N/A	N/A
5210.00	60.93	AV	V	33.64	3.58	0.00	98.15	92.13	N/A	N/A
5150.00	31.78	PK	V	33.54	3.56	0.00	68.88	62.86	74.00	11.14
5150.00	17.10	AV	V	33.54	3.56	0.00	54.20	48.18	54.00	5.82
5350.00	28.59	PK	V	33.86	3.52	0.00	65.97	59.95	74.00	14.05
5350.00	15.82	AV	V	33.86	3.52	0.00	53.20	47.18	54.00	6.82
10420.00	37.24	PK	V	38.18	6.33	25.47	56.28	50.26	68.20	17.94
15630.00	36.17	PK	V	37.97	8.82	24.33	58.63	52.61	74.00	21.39
15630.00	24.51	AV	V	37.97	8.82	24.33	46.97	40.95	54.00	13.05

**5725-5850 MHz:
802.11a, Chain 0**

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5745 MHz										
5745.00	61.70	PK	H	34.20	3.69	0.00	99.59	93.57	N/A	N/A
5745.00	51.29	AV	H	34.20	3.69	0.00	89.18	83.16	N/A	N/A
5745.00	68.90	PK	V	34.20	3.69	0.00	106.79	100.77	N/A	N/A
5745.00	58.71	AV	V	34.20	3.69	0.00	96.60	90.58	N/A	N/A
5725.00	28.96	PK	V	34.19	3.69	0.00	66.84	60.82	122.20	61.38
5720.00	28.30	PK	V	34.19	3.69	0.00	66.18	60.16	110.80	50.64
5700.00	27.89	PK	V	34.18	3.68	0.00	65.75	59.73	105.20	45.47
5650.00	27.16	PK	V	34.16	3.63	0.00	64.95	58.93	68.20	9.27
11490.00	39.57	PK	V	38.99	6.59	25.51	59.64	53.62	74.00	20.38
11490.00	27.75	AV	V	38.99	6.59	25.51	47.82	41.8	54.00	12.20
17235.00	37.32	PK	V	41.56	8.78	23.72	63.94	57.92	68.20	10.28
Middle Channel: 5785 MHz										
5785.00	61.36	PK	H	34.21	3.71	0.00	99.28	93.26	N/A	N/A
5785.00	50.95	AV	H	34.21	3.71	0.00	88.87	82.85	N/A	N/A
5785.00	68.56	PK	V	34.21	3.71	0.00	106.48	100.46	N/A	N/A
5785.00	58.37	AV	V	34.21	3.71	0.00	96.29	90.27	N/A	N/A
11570.00	39.23	PK	V	39.00	6.61	25.46	59.38	53.36	74.00	20.64
11570.00	27.41	AV	V	39.00	6.61	25.46	47.56	41.54	54.00	12.46
17355.00	36.90	PK	V	42.26	8.81	23.60	64.37	58.35	68.20	9.85
High Channel: 5825 MHz										
5825.00	61.47	PK	H	34.23	3.73	0.00	99.43	93.41	N/A	N/A
5825.00	51.06	AV	H	34.23	3.73	0.00	89.02	83	N/A	N/A
5825.00	68.67	PK	V	34.23	3.73	0.00	106.63	100.61	N/A	N/A
5825.00	58.48	AV	V	34.23	3.73	0.00	96.44	90.42	N/A	N/A
5850.00	28.73	PK	V	34.24	3.75	0.00	66.72	60.7	122.20	61.50
5855.00	28.07	PK	V	34.24	3.75	0.00	66.06	60.04	110.80	50.76
5875.00	27.66	PK	V	34.25	3.77	0.00	65.68	59.66	105.20	45.54
5925.00	26.93	PK	V	34.27	3.80	0.00	65.00	58.98	68.20	9.22
11650.00	39.34	PK	V	39.00	6.64	25.41	59.57	53.55	74.00	20.45
11650.00	27.52	AV	V	39.00	6.64	25.41	47.75	41.73	54.00	12.27
17475.00	37.09	PK	V	42.96	8.84	23.48	65.41	59.39	68.20	8.81

802.11a, Chain 1

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5745 MHz										
5745.00	66.47	PK	H	34.20	3.69	0.00	104.36	98.34	N/A	N/A
5745.00	56.06	AV	H	34.20	3.69	0.00	93.95	87.93	N/A	N/A
5745.00	68.67	PK	V	34.20	3.69	0.00	106.56	100.54	N/A	N/A
5745.00	58.32	AV	V	34.20	3.69	0.00	96.21	90.19	N/A	N/A
5725.00	28.57	PK	V	34.19	3.69	0.00	66.45	60.43	122.20	61.77
5720.00	27.91	PK	V	34.19	3.69	0.00	65.79	59.77	110.80	51.03
5700.00	27.50	PK	V	34.18	3.68	0.00	65.36	59.34	105.20	45.86
5650.00	26.77	PK	V	34.16	3.63	0.00	64.56	58.54	68.20	9.66
11490.00	39.18	PK	V	38.99	6.59	25.51	59.25	53.23	74.00	20.77
11490.00	27.36	AV	V	38.99	6.59	25.51	47.43	41.41	54.00	12.59
17235.00	36.93	PK	V	41.56	8.78	23.72	63.55	57.53	68.20	10.67
Middle Channel: 5785 MHz										
5785.00	66.26	PK	H	34.21	3.71	0.00	104.18	98.16	N/A	N/A
5785.00	55.85	AV	H	34.21	3.71	0.00	93.77	87.75	N/A	N/A
5785.00	68.46	PK	V	34.21	3.71	0.00	106.38	100.36	N/A	N/A
5785.00	58.11	AV	V	34.21	3.71	0.00	96.03	90.01	N/A	N/A
11570.00	38.97	PK	V	39.00	6.61	25.46	59.12	53.1	74.00	20.90
11570.00	27.15	AV	V	39.00	6.61	25.46	47.30	41.28	54.00	12.72
17355.00	36.72	PK	V	42.26	8.81	23.60	64.19	58.17	68.20	10.03
High Channel: 5825 MHz										
5825.00	66.22	PK	H	34.23	3.73	0.00	104.18	98.16	N/A	N/A
5825.00	55.81	AV	H	34.23	3.73	0.00	93.77	87.75	N/A	N/A
5825.00	68.49	PK	V	34.23	3.73	0.00	106.45	100.43	N/A	N/A
5825.00	58.07	AV	V	34.23	3.73	0.00	96.03	90.01	N/A	N/A
5850.00	28.32	PK	V	34.24	3.75	0.00	66.31	60.29	122.20	61.91
5855.00	27.66	PK	V	34.24	3.75	0.00	65.65	59.63	110.80	51.17
5875.00	27.25	PK	V	34.25	3.77	0.00	65.27	59.25	105.20	45.95
5925.00	26.50	PK	V	34.27	3.80	0.00	64.57	58.55	68.20	9.65
11650.00	38.93	PK	V	39.00	6.64	25.41	59.16	53.14	74.00	20.86
11650.00	27.11	AV	V	39.00	6.64	25.41	47.34	41.32	54.00	12.68
17475.00	36.68	PK	V	42.96	8.84	23.48	65.00	58.98	68.20	9.22

802.11n ht20(2Tx was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5745 MHz										
5745.00	66.08	PK	H	34.20	3.69	0.00	103.97	97.95	N/A	N/A
5745.00	55.67	AV	H	34.20	3.69	0.00	93.56	87.54	N/A	N/A
5745.00	68.35	PK	V	34.20	3.69	0.00	106.24	100.22	N/A	N/A
5745.00	57.99	AV	V	34.20	3.69	0.00	95.88	89.86	N/A	N/A
5725.00	28.18	PK	V	34.19	3.69	0.00	66.06	60.04	122.20	62.16
5720.00	27.54	PK	V	34.19	3.69	0.00	65.42	59.4	110.80	51.40
5700.00	27.11	PK	V	34.18	3.68	0.00	64.97	58.95	105.20	46.25
5650.00	26.36	PK	V	34.16	3.63	0.00	64.15	58.13	68.20	10.07
11490.00	38.79	PK	V	38.99	6.59	25.51	58.86	52.84	74.00	21.16
11490.00	26.97	AV	V	38.99	6.59	25.51	47.04	41.02	54.00	12.98
17235.00	36.54	PK	V	41.56	8.78	23.72	63.16	57.14	68.20	11.06
Middle Channel: 5785 MHz										
5785.00	67.15	PK	H	34.21	3.71	0.00	105.07	99.05	N/A	N/A
5785.00	56.74	AV	H	34.21	3.71	0.00	94.66	88.64	N/A	N/A
5785.00	69.35	PK	V	34.21	3.71	0.00	107.27	101.25	N/A	N/A
5785.00	59.00	AV	V	34.21	3.71	0.00	96.92	90.9	N/A	N/A
11570.00	38.84	PK	V	39.00	6.61	25.46	58.99	52.97	74.00	21.03
11570.00	27.02	AV	V	39.00	6.61	25.46	47.17	41.15	54.00	12.85
17355.00	36.59	PK	V	42.26	8.81	23.60	64.06	58.04	68.20	10.16
High Channel: 5825 MHz										
5825.00	66.04	PK	H	34.23	3.73	0.00	104.00	97.98	N/A	N/A
5825.00	55.63	AV	H	34.23	3.73	0.00	93.59	87.57	N/A	N/A
5825.00	68.31	PK	V	34.23	3.73	0.00	106.27	100.25	N/A	N/A
5825.00	57.81	AV	V	34.23	3.73	0.00	95.77	89.75	N/A	N/A
5850.00	28.14	PK	V	34.24	3.75	0.00	66.13	60.11	122.20	62.09
5855.00	27.48	PK	V	34.24	3.75	0.00	65.47	59.45	110.80	51.35
5875.00	27.08	PK	V	34.25	3.77	0.00	65.10	59.08	105.20	46.12
5925.00	26.32	PK	V	34.27	3.80	0.00	64.39	58.37	68.20	9.83
11650.00	38.76	PK	V	39.00	6.64	25.41	58.99	52.97	74.00	21.03
11650.00	26.93	AV	V	39.00	6.64	25.41	47.16	41.14	54.00	12.86
17475.00	36.50	PK	V	42.96	8.84	23.48	64.82	58.8	68.20	9.40

802.11n ht40(2Tx was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5755 MHz										
5755.00	66.29	PK	H	34.20	3.70	0.00	104.19	98.17	N/A	N/A
5755.00	55.88	AV	H	34.20	3.70	0.00	93.78	87.76	N/A	N/A
5755.00	68.56	PK	V	34.20	3.70	0.00	106.46	100.44	N/A	N/A
5755.00	58.06	AV	V	34.20	3.70	0.00	95.96	89.94	N/A	N/A
5725.00	28.39	PK	V	34.19	3.69	0.00	66.27	60.25	122.20	61.95
5720.00	27.73	PK	V	34.19	3.69	0.00	65.61	59.59	110.80	51.21
5700.00	27.33	PK	V	34.18	3.68	0.00	65.19	59.17	105.20	46.03
5650.00	26.57	PK	V	34.16	3.63	0.00	64.36	58.34	68.20	9.86
11510.00	39.01	PK	V	39.00	6.59	25.50	59.10	53.08	74.00	20.92
11510.00	27.18	AV	V	39.00	6.59	25.50	47.27	41.25	54.00	12.75
17265.00	36.75	PK	V	41.74	8.79	23.69	63.59	57.57	68.20	10.63
High Channel: 5795 MHz										
5795.00	66.02	PK	H	34.22	3.71	0.00	103.95	97.93	N/A	N/A
5795.00	56.95	AV	H	34.22	3.71	0.00	94.88	88.86	N/A	N/A
5795.00	69.96	PK	V	34.22	3.71	0.00	107.89	101.87	N/A	N/A
5795.00	61.05	AV	V	34.22	3.71	0.00	98.98	92.96	N/A	N/A
5850.00	28.39	PK	V	34.24	3.75	0.00	66.38	60.36	122.20	61.84
5855.00	27.95	PK	V	34.24	3.75	0.00	65.94	59.92	110.80	50.88
5875.00	26.88	PK	V	34.25	3.77	0.00	64.90	58.88	105.20	46.32
5925.00	28.79	PK	V	34.27	3.80	0.00	66.86	60.84	68.20	7.36
11590.00	39.04	PK	V	39.00	6.62	25.45	59.21	53.19	74.00	20.81
11590.00	27.83	AV	V	39.00	6.62	25.45	48.00	41.98	54.00	12.02
17385.00	34.03	PK	V	42.43	8.82	23.57	61.71	55.69	68.20	12.51

802.11ac vht20(2Tx was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5745 MHz										
5745.00	65.13	PK	H	34.20	3.69	0.00	103.02	97	N/A	N/A
5745.00	56.06	AV	H	34.20	3.69	0.00	93.95	87.93	N/A	N/A
5745.00	69.07	PK	V	34.20	3.69	0.00	106.96	100.94	N/A	N/A
5745.00	60.16	AV	V	34.20	3.69	0.00	98.05	92.03	N/A	N/A
5725.00	28.39	PK	V	34.19	3.69	0.00	66.27	60.25	122.20	61.95
5720.00	27.95	PK	V	34.19	3.69	0.00	65.83	59.81	110.80	50.99
5700.00	26.88	PK	V	34.18	3.68	0.00	64.74	58.72	105.20	46.48
5650.00	28.79	PK	V	34.16	3.63	0.00	66.58	60.56	68.20	7.64
11490.00	39.93	PK	V	38.99	6.59	25.51	60.00	53.98	74.00	20.02
11490.00	28.72	AV	V	38.99	6.59	25.51	48.79	42.77	54.00	11.23
17235.00	34.92	PK	V	41.56	8.78	23.72	61.54	55.52	68.20	12.68
Middle Channel: 5785 MHz										
5785.00	64.61	PK	H	34.21	3.71	0.00	102.53	96.51	N/A	N/A
5785.00	55.54	AV	H	34.21	3.71	0.00	93.46	87.44	N/A	N/A
5785.00	68.59	PK	V	34.21	3.71	0.00	106.51	100.49	N/A	N/A
5785.00	59.64	AV	V	34.21	3.71	0.00	97.56	91.54	N/A	N/A
11570.00	39.41	PK	V	39.00	6.61	25.46	59.56	53.54	74.00	20.46
11570.00	28.24	AV	V	39.00	6.61	25.46	48.39	42.37	54.00	11.63
17355.00	34.40	PK	V	42.26	8.81	23.60	61.87	55.85	68.20	12.35
High Channel: 5825 MHz										
5825.00	65.04	PK	H	34.23	3.73	0.00	103.00	96.98	N/A	N/A
5825.00	55.97	AV	H	34.23	3.73	0.00	93.93	87.91	N/A	N/A
5825.00	68.98	PK	V	34.23	3.73	0.00	106.94	100.92	N/A	N/A
5825.00	60.07	AV	V	34.23	3.73	0.00	98.03	92.01	N/A	N/A
5850.00	28.34	PK	V	34.24	3.75	0.00	66.33	60.31	122.20	61.89
5855.00	27.84	PK	V	34.24	3.75	0.00	65.83	59.81	110.80	50.99
5875.00	26.79	PK	V	34.25	3.77	0.00	64.81	58.79	105.20	46.41
5925.00	28.68	PK	V	34.27	3.80	0.00	66.75	60.73	68.20	7.47
11650.00	39.84	PK	V	39.00	6.64	25.41	60.07	54.05	74.00	19.95
11650.00	28.63	AV	V	39.00	6.64	25.41	48.86	42.84	54.00	11.16
17475.00	34.83	PK	V	42.96	8.84	23.48	63.15	57.13	68.20	11.07

802.11ac vht40(2Tx was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5755 MHz										
5755.00	65.38	PK	H	34.20	3.70	0.00	103.28	97.26	N/A	N/A
5755.00	56.31	AV	H	34.20	3.70	0.00	94.21	88.19	N/A	N/A
5755.00	69.32	PK	V	34.20	3.70	0.00	107.22	101.2	N/A	N/A
5755.00	60.41	AV	V	34.20	3.70	0.00	98.31	92.29	N/A	N/A
5725.00	28.64	PK	V	34.19	3.69	0.00	66.52	60.5	122.20	61.70
5720.00	28.18	PK	V	34.19	3.69	0.00	66.06	60.04	110.80	50.76
5700.00	27.13	PK	V	34.18	3.68	0.00	64.99	58.97	105.20	46.23
5650.00	29.02	PK	V	34.16	3.63	0.00	66.81	60.79	68.20	7.41
11510.00	40.18	PK	V	39.00	6.59	25.50	60.27	54.25	74.00	19.75
11510.00	28.97	AV	V	39.00	6.59	25.50	49.06	43.04	54.00	10.96
17265.00	35.17	PK	V	41.74	8.79	23.69	62.01	55.99	68.20	12.21
High Channel: 5795 MHz										
5795.00	65.94	PK	H	34.22	3.71	0.00	103.87	97.85	N/A	N/A
5795.00	56.87	AV	H	34.22	3.71	0.00	94.80	88.78	N/A	N/A
5795.00	69.94	PK	V	34.22	3.71	0.00	107.87	101.85	N/A	N/A
5795.00	60.97	AV	V	34.22	3.71	0.00	98.90	92.88	N/A	N/A
5850.00	29.20	PK	V	34.24	3.75	0.00	67.19	61.17	122.20	61.03
5855.00	28.74	PK	V	34.24	3.75	0.00	66.73	60.71	110.80	50.09
5875.00	27.68	PK	V	34.25	3.77	0.00	65.70	59.68	105.20	45.52
5925.00	29.58	PK	V	34.27	3.80	0.00	67.65	61.63	68.20	6.57
11590.00	40.74	PK	V	39.00	6.62	25.45	60.91	54.89	74.00	19.11
11590.00	29.53	AV	V	39.00	6.62	25.45	49.70	43.68	54.00	10.32
17385.00	35.73	PK	V	42.43	8.82	23.57	63.41	57.39	68.20	10.81

802.11ac vht80(2Tx was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5755 MHz										
5775.00	66.23	PK	H	34.21	3.70	0.00	104.14	98.12	N/A	N/A
5775.00	57.16	AV	H	34.21	3.70	0.00	95.07	89.05	N/A	N/A
5775.00	70.23	PK	V	34.21	3.70	0.00	108.14	102.12	N/A	N/A
5775.00	61.26	AV	V	34.21	3.70	0.00	99.17	93.15	N/A	N/A
5725.00	35.52	PK	V	34.19	3.69	0.00	73.40	67.38	122.20	54.82
5720.00	36.59	PK	V	34.19	3.69	0.00	74.47	68.45	110.80	42.35
5700.00	33.47	PK	V	34.18	3.68	0.00	71.33	65.31	105.20	39.89
5650.00	28.09	PK	V	34.16	3.63	0.00	65.88	59.86	68.20	8.34
5850.00	31.86	PK	V	34.24	3.75	0.00	69.85	63.83	122.20	58.37
5855.00	29.61	PK	V	34.24	3.75	0.00	67.60	61.58	110.80	49.22
5875.00	28.67	PK	V	34.25	3.77	0.00	66.69	60.67	105.20	44.53
5925.00	27.35	PK	V	34.27	3.80	0.00	65.42	59.4	68.20	8.80
11550.00	39.44	PK	V	39.00	6.61	25.48	59.57	53.55	74.00	20.45
11550.00	28.70	AV	V	39.00	6.61	25.48	48.83	42.81	54.00	11.19
17325.00	35.92	PK	V	42.09	8.80	23.63	63.18	57.16	68.20	11.04

Wi-Fi 1:**5150-5250 MHz:****802.11a, Chain 0**

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5180MHz										
5180.00	75.21	PK	H	33.59	3.58	0.00	112.38	106.36	N/A	N/A
5180.00	65.59	AV	H	33.59	3.58	0.00	102.76	96.74	N/A	N/A
5180.00	73.05	PK	V	33.59	3.58	0.00	110.22	104.2	N/A	N/A
5180.00	63.42	AV	V	33.59	3.58	0.00	100.59	94.57	N/A	N/A
5150.00	29.79	PK	H	33.54	3.56	0.00	66.89	60.87	74.00	13.13
5150.00	17.53	AV	H	33.54	3.56	0.00	54.63	48.61	54.00	5.39
10360.00	37.34	PK	H	38.17	6.29	25.46	56.34	50.32	68.20	17.88
15540.00	36.56	PK	H	38.06	8.85	24.27	59.20	53.18	74.00	20.82
15540.00	24.59	AV	H	38.06	8.85	24.27	47.23	41.21	54.00	12.79
Middle Channel: 5200 MHz										
5200.00	75.55	PK	H	33.62	3.60	0.00	112.77	106.75	N/A	N/A
5200.00	66.04	AV	H	33.62	3.60	0.00	103.26	97.24	N/A	N/A
5200.00	72.33	PK	V	33.62	3.60	0.00	109.55	103.53	N/A	N/A
5200.00	62.68	AV	V	33.62	3.60	0.00	99.90	93.88	N/A	N/A
10400.00	37.02	PK	H	38.18	6.32	25.46	56.06	50.04	68.20	18.16
15600.00	36.29	PK	H	38.00	8.83	24.31	58.81	52.79	74.00	21.21
15600.00	24.44	AV	H	38.00	8.83	24.31	46.96	40.94	54.00	13.06
High Channel: 5240 MHz										
5240.00	75.55	PK	H	33.68	3.52	0.00	112.75	106.73	N/A	N/A
5240.00	66.01	AV	H	33.68	3.52	0.00	103.21	97.19	N/A	N/A
5240.00	72.38	PK	V	33.68	3.52	0.00	109.58	103.56	N/A	N/A
5240.00	62.87	AV	V	33.68	3.52	0.00	100.07	94.05	N/A	N/A
5350.00	28.84	PK	H	33.86	3.52	0.00	66.22	60.2	74.00	13.80
5350.00	16.56	AV	H	33.86	3.52	0.00	53.94	47.92	54.00	6.08
10480.00	36.84	PK	H	38.20	6.37	25.47	55.94	49.92	68.20	18.28
15720.00	35.76	PK	H	37.88	8.79	24.39	58.04	52.02	74.00	21.98
15720.00	23.84	AV	H	37.88	8.79	24.39	46.12	40.1	54.00	13.90

802.11a, Chain 1

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5180MHz										
5180.00	71.18	PK	H	33.59	3.58	0.00	108.35	102.33	N/A	N/A
5180.00	61.58	AV	H	33.59	3.58	0.00	98.75	92.73	N/A	N/A
5180.00	70.66	PK	V	33.59	3.58	0.00	107.83	101.81	N/A	N/A
5180.00	60.07	AV	V	33.59	3.58	0.00	97.24	91.22	N/A	N/A
5150.00	28.05	PK	H	33.54	3.56	0.00	65.15	59.13	74.00	14.87
5150.00	17.43	AV	H	33.54	3.56	0.00	54.53	48.51	54.00	5.49
10360.00	37.83	PK	H	38.17	6.29	25.46	56.83	50.81	68.20	17.39
15540.00	36.86	PK	H	38.06	8.85	24.27	59.50	53.48	74.00	20.52
15540.00	25.16	AV	H	38.06	8.85	24.27	47.80	41.78	54.00	12.22
Middle Channel: 5200 MHz										
5200.00	71.63	PK	H	33.62	3.60	0.00	108.85	102.83	N/A	N/A
5200.00	61.97	AV	H	33.62	3.60	0.00	99.19	93.17	N/A	N/A
5200.00	70.90	PK	V	33.62	3.60	0.00	108.12	102.1	N/A	N/A
5200.00	61.31	AV	V	33.62	3.60	0.00	98.53	92.51	N/A	N/A
10400.00	38.95	PK	H	38.18	6.32	25.46	57.99	51.97	68.20	16.23
15600.00	36.80	PK	H	38.00	8.83	24.31	59.32	53.3	74.00	20.70
15600.00	24.87	AV	H	38.00	8.83	24.31	47.39	41.37	54.00	12.63
High Channel: 5240 MHz										
5240.00	71.29	PK	H	33.68	3.52	0.00	108.49	102.47	N/A	N/A
5240.00	61.72	AV	H	33.68	3.52	0.00	98.92	92.9	N/A	N/A
5240.00	70.59	PK	V	33.68	3.52	0.00	107.79	101.77	N/A	N/A
5240.00	60.93	AV	V	33.68	3.52	0.00	98.13	92.11	N/A	N/A
5350.00	29.58	PK	V	33.86	3.52	0.00	66.96	60.94	74.00	13.06
5350.00	16.61	AV	V	33.86	3.52	0.00	53.99	47.97	54.00	6.03
10480.00	39.22	PK	V	38.20	6.37	25.47	58.32	52.3	68.20	15.90
15720.00	38.63	PK	V	37.88	8.79	24.39	60.91	54.89	74.00	19.11
15720.00	26.47	AV	V	37.88	8.79	24.39	48.75	42.73	54.00	11.27

802.11n ht20(2Tx was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5180 MHz										
5180.00	75.72	PK	H	33.59	3.58	0.00	112.89	106.87	N/A	N/A
5180.00	66.29	AV	H	33.59	3.58	0.00	103.46	97.44	N/A	N/A
5180.00	73.40	PK	V	33.59	3.58	0.00	110.57	104.55	N/A	N/A
5180.00	64.03	AV	V	33.59	3.58	0.00	101.20	95.18	N/A	N/A
5150.00	32.07	PK	H	33.54	3.56	0.00	69.17	63.15	74.00	10.85
5150.00	18.74	AV	H	33.54	3.56	0.00	55.84	49.82	54.00	4.18
10360.00	38.18	PK	H	38.17	6.29	25.46	57.18	51.16	68.20	17.04
15540.00	36.55	PK	H	38.06	8.85	24.27	59.19	53.17	74.00	20.83
15540.00	24.43	AV	H	38.06	8.85	24.27	47.07	41.05	54.00	12.95
Middle Channel: 5200 MHz										
5200.00	75.57	PK	H	33.62	3.60	0.00	112.79	106.77	N/A	N/A
5200.00	66.14	AV	H	33.62	3.60	0.00	103.36	97.34	N/A	N/A
5200.00	73.25	PK	V	33.62	3.60	0.00	110.47	104.45	N/A	N/A
5200.00	63.88	AV	V	33.62	3.60	0.00	101.10	95.08	N/A	N/A
10400.00	39.39	PK	H	38.18	6.32	25.46	58.43	52.41	68.20	15.79
15600.00	37.05	PK	H	38.00	8.83	24.31	59.57	53.55	74.00	20.45
15600.00	25.12	AV	H	38.00	8.83	24.31	47.64	41.62	54.00	12.38
High Channel: 5240 MHz										
5240.00	76.67	PK	H	33.68	3.52	0.00	113.87	107.85	N/A	N/A
5240.00	67.45	AV	H	33.68	3.52	0.00	104.65	98.63	N/A	N/A
5240.00	71.65	PK	V	33.68	3.52	0.00	108.85	102.83	N/A	N/A
5240.00	62.43	AV	V	33.68	3.52	0.00	99.63	93.61	N/A	N/A
5350.00	29.01	PK	H	33.86	3.52	0.00	66.39	60.37	74.00	13.63
5350.00	16.88	AV	H	33.86	3.52	0.00	54.26	48.24	54.00	5.76
10480.00	40.29	PK	H	38.20	6.37	25.47	59.39	53.37	68.20	14.83
15720.00	38.83	PK	H	37.88	8.79	24.39	61.11	55.09	74.00	18.91
15720.00	26.95	AV	H	37.88	8.79	24.39	49.23	43.21	54.00	10.79

**5725-5850 MHz:
802.11a, Chain 0**

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5745 MHz										
5745.00	72.03	PK	H	34.20	3.69	0.00	109.92	103.9	N/A	N/A
5745.00	62.13	AV	H	34.20	3.69	0.00	100.02	94	N/A	N/A
5745.00	71.24	PK	V	34.20	3.69	0.00	109.13	103.11	N/A	N/A
5745.00	61.38	AV	V	34.20	3.69	0.00	99.27	93.25	N/A	N/A
5725.00	31.06	PK	H	34.19	3.69	0.00	68.94	62.92	122.20	59.28
5720.00	29.08	PK	H	34.19	3.69	0.00	66.96	60.94	110.80	49.86
5700.00	27.65	PK	H	34.18	3.68	0.00	65.51	59.49	105.20	45.71
5650.00	27.35	PK	H	34.16	3.63	0.00	65.14	59.12	68.20	9.08
11490.00	37.01	PK	H	38.99	6.59	25.51	57.08	51.06	74.00	22.94
11490.00	25.17	AV	H	38.99	6.59	25.51	45.24	39.22	54.00	14.78
17235.00	36.11	PK	H	41.56	8.78	23.72	62.73	56.71	68.20	11.49
Middle Channel: 5785 MHz										
5785.00	72.34	PK	H	34.21	3.71	0.00	110.26	104.24	N/A	N/A
5785.00	62.46	AV	H	34.21	3.71	0.00	100.38	94.36	N/A	N/A
5785.00	71.61	PK	V	34.21	3.71	0.00	109.53	103.51	N/A	N/A
5785.00	61.77	AV	V	34.21	3.71	0.00	99.69	93.67	N/A	N/A
11570.00	37.88	PK	H	39.00	6.61	25.46	58.03	52.01	74.00	21.99
11570.00	25.72	AV	H	39.00	6.61	25.46	45.87	39.85	54.00	14.15
17355.00	36.63	PK	H	42.26	8.81	23.60	64.10	58.08	68.20	10.12
High Channel: 5825 MHz										
5825.00	71.46	PK	H	34.23	3.73	0.00	109.42	103.4	N/A	N/A
5825.00	61.66	AV	H	34.23	3.73	0.00	99.62	93.6	N/A	N/A
5825.00	70.75	PK	V	34.23	3.73	0.00	108.71	102.69	N/A	N/A
5825.00	60.95	AV	V	34.23	3.73	0.00	98.91	92.89	N/A	N/A
5850.00	28.69	PK	H	34.24	3.75	0.00	66.68	60.66	122.20	61.54
5855.00	28.94	PK	H	34.24	3.75	0.00	66.93	60.91	110.80	49.89
5875.00	28.43	PK	H	34.25	3.77	0.00	66.45	60.43	105.20	44.77
5925.00	28.23	PK	H	34.27	3.80	0.00	66.30	60.28	68.20	7.92
11650.00	36.61	PK	H	39.00	6.64	25.41	56.84	50.82	74.00	23.18
11650.00	24.57	AV	H	39.00	6.64	25.41	44.80	38.78	54.00	15.22
17475.00	36.64	PK	H	42.96	8.84	23.48	64.96	58.94	68.20	9.26




802.11a, Chain 1


Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5745 MHz										
5745.00	69.71	PK	H	34.20	3.69	0.00	107.60	101.58	N/A	N/A
5745.00	60.29	AV	H	34.20	3.69	0.00	98.18	92.16	N/A	N/A
5745.00	67.75	PK	V	34.20	3.69	0.00	105.64	99.62	N/A	N/A
5745.00	58.26	AV	V	34.20	3.69	0.00	96.15	90.13	N/A	N/A
5725.00	29.37	PK	H	34.19	3.69	0.00	67.25	61.23	122.20	60.97
5720.00	28.37	PK	H	34.19	3.69	0.00	66.25	60.23	110.80	50.57
5700.00	28.28	PK	H	34.18	3.68	0.00	66.14	60.12	105.20	45.08
5650.00	28.17	PK	H	34.16	3.63	0.00	65.96	59.94	68.20	8.26
11490.00	37.26	PK	H	38.99	6.59	25.51	57.33	51.31	74.00	22.69
11490.00	25.56	AV	H	38.99	6.59	25.51	45.63	39.61	54.00	14.39
17235.00	37.08	PK	H	41.56	8.78	23.72	63.70	57.68	68.20	10.52
Middle Channel: 5785 MHz										
5785.00	69.06	PK	H	34.21	3.71	0.00	106.98	100.96	N/A	N/A
5785.00	59.52	AV	H	34.21	3.71	0.00	97.44	91.42	N/A	N/A
5785.00	67.04	PK	V	34.21	3.71	0.00	104.96	98.94	N/A	N/A
5785.00	57.52	AV	V	34.21	3.71	0.00	95.44	89.42	N/A	N/A
11570.00	37.77	PK	H	39.00	6.61	25.46	57.92	51.9	74.00	22.10
11570.00	25.93	AV	H	39.00	6.61	25.46	46.08	40.06	54.00	13.94
17355.00	37.12	PK	H	42.26	8.81	23.60	64.59	58.57	68.20	9.63
High Channel: 5825 MHz										
5825.00	67.90	PK	H	34.23	3.73	0.00	105.86	99.84	N/A	N/A
5825.00	58.38	AV	H	34.23	3.73	0.00	96.34	90.32	N/A	N/A
5825.00	65.82	PK	V	34.23	3.73	0.00	103.78	97.76	N/A	N/A
5825.00	56.34	AV	V	34.23	3.73	0.00	94.30	88.28	N/A	N/A
5850.00	28.31	PK	H	34.24	3.75	0.00	66.30	60.28	122.20	61.92
5855.00	28.45	PK	H	34.24	3.75	0.00	66.44	60.42	110.80	50.38
5875.00	29.22	PK	H	34.25	3.77	0.00	67.24	61.22	105.20	43.98
5925.00	27.93	PK	H	34.27	3.80	0.00	66.00	59.98	68.20	8.22
11650.00	36.97	PK	H	39.00	6.64	25.41	57.20	51.18	74.00	22.82
11650.00	24.93	AV	H	39.00	6.64	25.41	45.16	39.14	54.00	14.86
17475.00	36.58	PK	H	42.96	8.84	23.48	64.90	58.88	68.20	9.32

802.11n ht20(2Tx was the worst):



Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5745 MHz										
5745.00	73.27	PK	H	34.20	3.69	0.00	111.16	105.14	N/A	N/A
5745.00	64.34	AV	H	34.20	3.69	0.00	102.23	96.21	N/A	N/A
5745.00	71.22	PK	V	34.20	3.69	0.00	109.11	103.09	N/A	N/A
5745.00	62.23	AV	V	34.20	3.69	0.00	100.12	94.1	N/A	N/A
5725.00	35.38	PK	H	34.19	3.69	0.00	73.26	67.24	122.20	54.96
5720.00	31.77	PK	H	34.19	3.69	0.00	69.65	63.63	110.80	47.17
5700.00	27.90	PK	H	34.18	3.68	0.00	65.76	59.74	105.20	45.46
5650.00	27.73	PK	H	34.16	3.63	0.00	65.52	59.5	68.20	8.70
11490.00	40.15	PK	H	38.99	6.59	25.51	60.22	54.2	74.00	19.80
11490.00	30.30	AV	H	38.99	6.59	25.51	50.37	44.35	54.00	9.65
17235.00	35.52	PK	H	41.56	8.78	23.72	62.14	56.12	68.20	12.08
Middle Channel: 5785 MHz										
5785.00	72.83	PK	H	34.21	3.71	0.00	110.75	104.73	N/A	N/A
5785.00	63.22	AV	H	34.21	3.71	0.00	101.14	95.12	N/A	N/A
5785.00	70.69	PK	V	34.21	3.71	0.00	108.61	102.59	N/A	N/A
5785.00	61.07	AV	V	34.21	3.71	0.00	98.99	92.97	N/A	N/A
11570.00	40.47	PK	H	39.00	6.61	25.46	60.62	54.6	74.00	19.40
11570.00	29.08	AV	H	39.00	6.61	25.46	49.23	43.21	54.00	10.79
17355.00	34.71	PK	H	42.26	8.81	23.60	62.18	56.16	68.20	12.04
High Channel: 5825 MHz										
5825.00	72.62	PK	H	34.23	3.73	0.00	110.58	104.56	N/A	N/A
5825.00	63.58	AV	H	34.23	3.73	0.00	101.54	95.52	N/A	N/A
5825.00	70.49	PK	V	34.23	3.73	0.00	108.45	102.43	N/A	N/A
5825.00	61.42	AV	V	34.23	3.73	0.00	99.38	93.36	N/A	N/A
5850.00	30.94	PK	H	34.24	3.75	0.00	68.93	62.91	122.20	59.29
5855.00	30.88	PK	H	34.24	3.75	0.00	68.87	62.85	110.80	47.95
5875.00	27.76	PK	H	34.25	3.77	0.00	65.78	59.76	105.20	45.44
5925.00	27.99	PK	H	34.27	3.80	0.00	66.06	60.04	68.20	8.16
11650.00	42.57	PK	H	39.00	6.64	25.41	62.80	56.78	74.00	17.22
11650.00	31.08	AV	H	39.00	6.64	25.41	51.31	45.29	54.00	8.71
17475.00	35.82	PK	H	42.96	8.84	23.48	64.14	58.12	68.20	10.08
1100.00	43.21	PK	H	23.84	1.52	25.99	42.58	36.56	74.00	37.44
1100.00	31.05	AV	H	23.84	1.52	25.99	30.42	24.4	54.00	29.60



Test Plots(For worst mode Wi-Fi 0, 802.11a chain 0 mode 5745MHz)
Horizontal

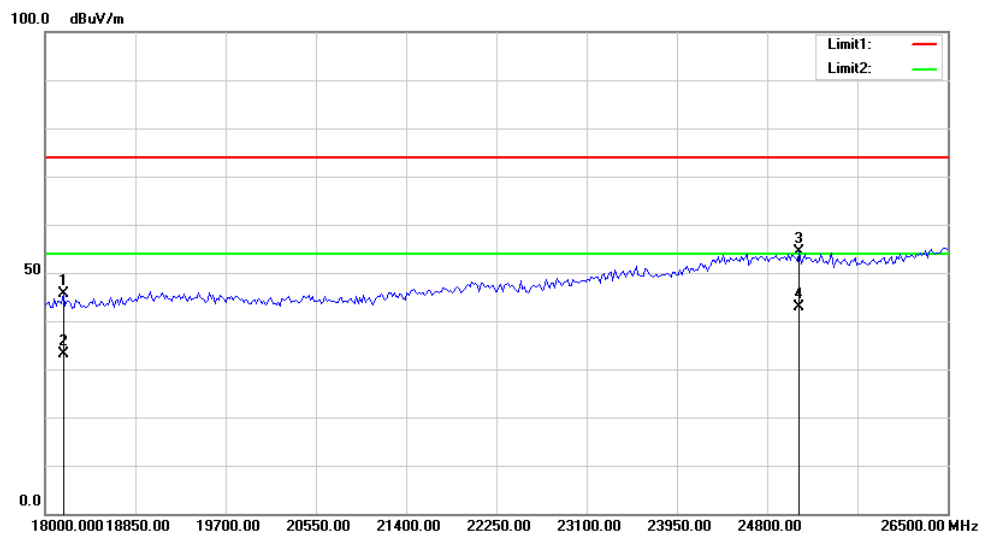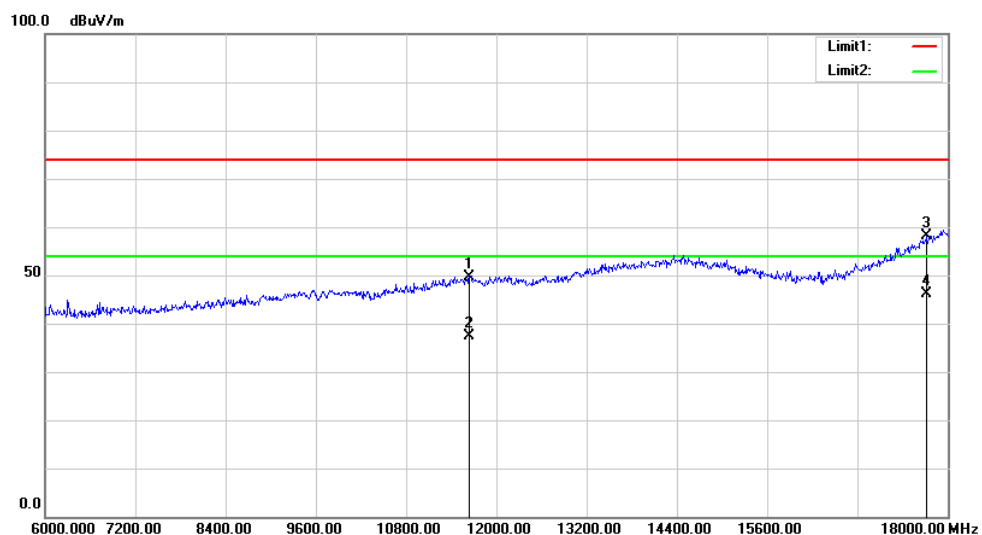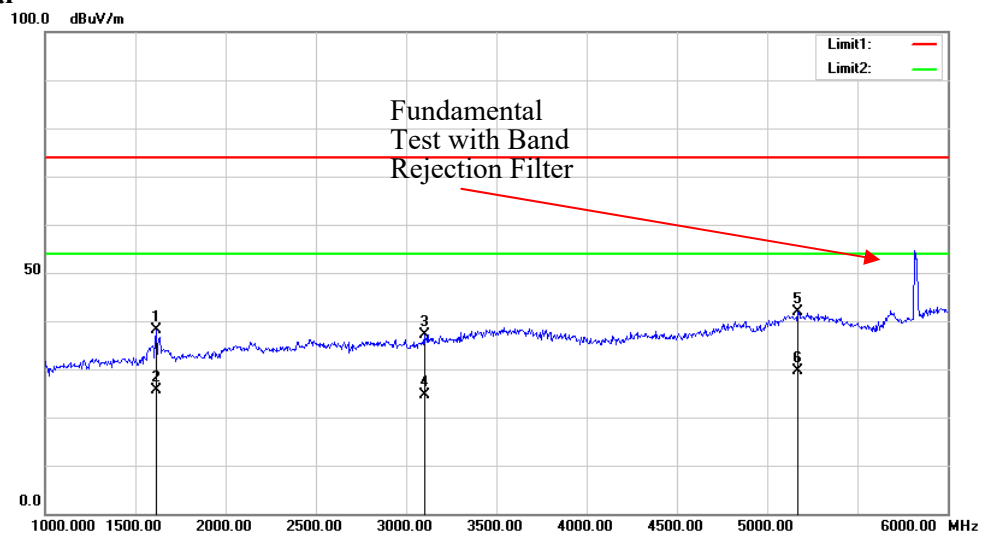

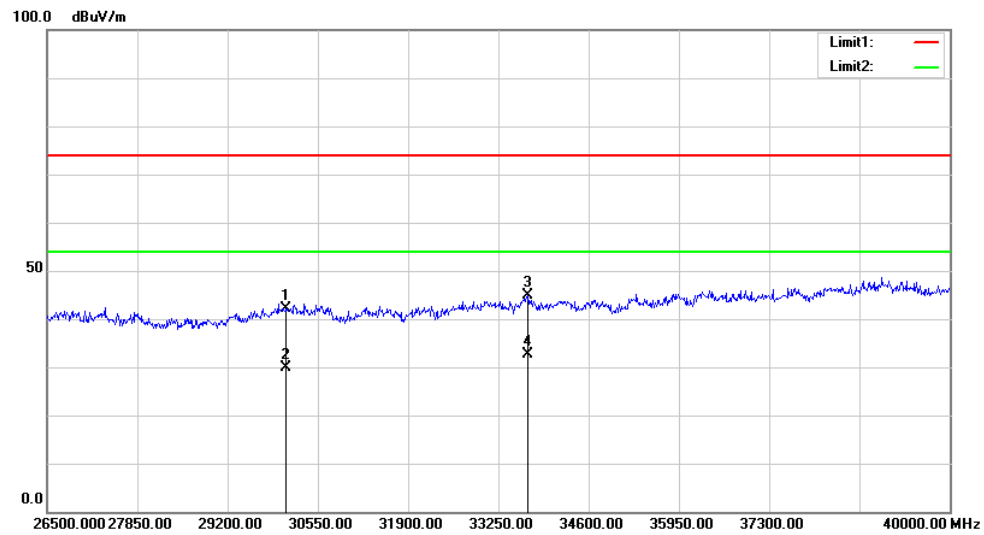

Vertical

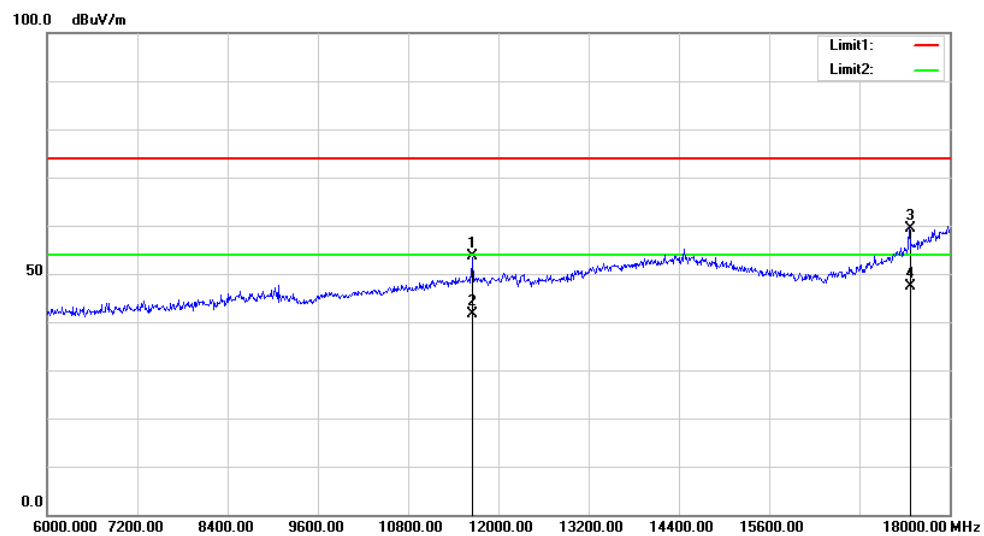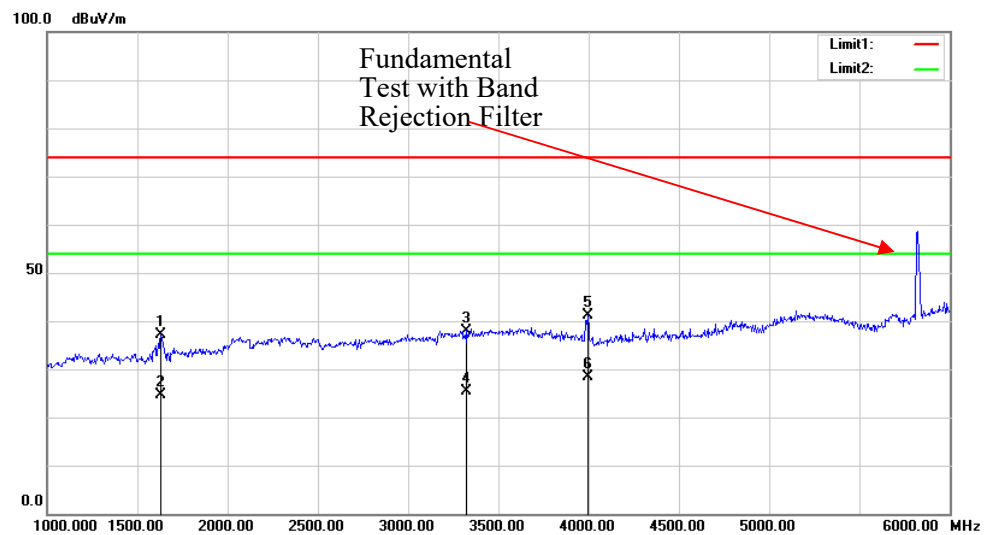

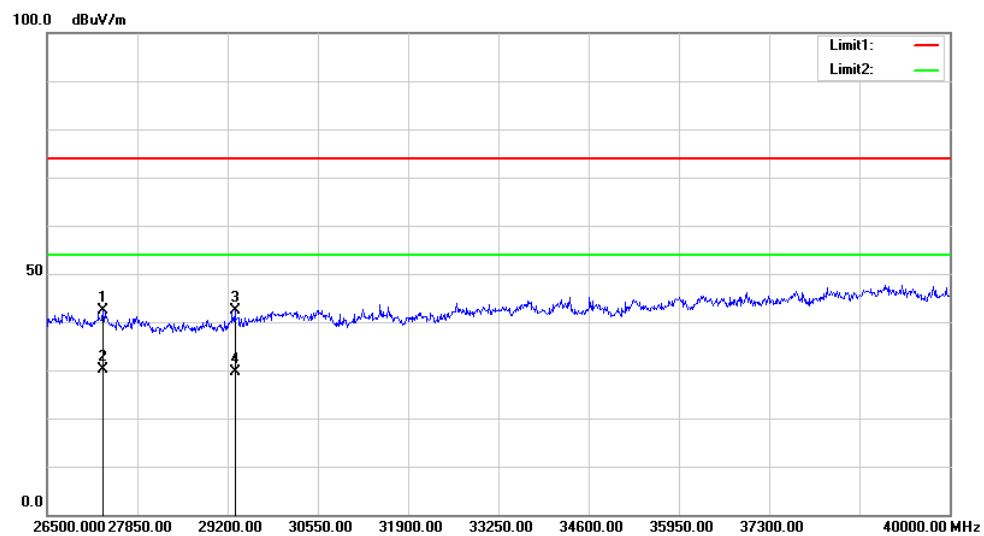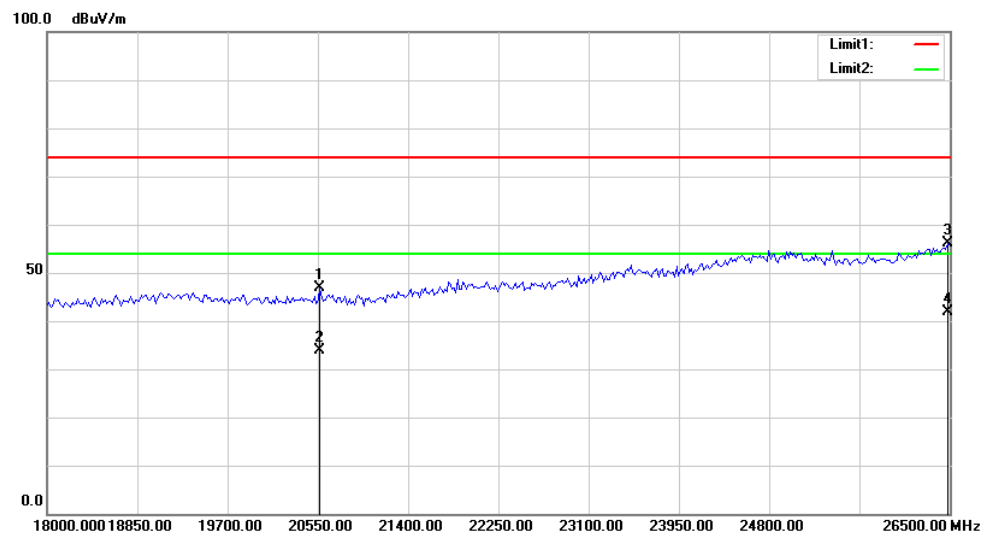

FCC §15.407(a)(e) & RSS-247 CLAUSE 6.2, RSS-Gen CLAUSE 6.7– EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

Applicable Standard

15.407(a) (e), RSS-247 Clause 6.2 and RSS-Gen Clause 6.7

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2020-07-07	2021-07-07
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201048	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	25.4 ~ 27.1°C
Relative Humidity:	30 ~ 49 %
ATM Pressure:	100.7 ~ 101.9 kPa
Tester:	Rennes Guo
Test Date:	2020-10-29~2020-11-25

Test Result: Pass. Please refer to the following tables and plots.

Test mode: Transmitting (Test only performed at chain 0)

Wi-Fi 0:

5150-5250 MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	21.360	16.687
	5200	21.360	16.687
	5240	21.280	16.687
802.11n ht20	5180	21.680	18.044
	5200	21.760	18.044
	5240	21.760	18.044
802.11ac vht20	5180	21.680	17.964
	5200	21.760	17.964
	5240	21.600	18.044
802.11n ht40	5190	39.680	36.886
	5230	39.680	36.886
802.11ac vht40	5190	39.680	36.886
	5230	39.680	36.886
802.11ac vht80	5210	81.920	76.008

5725-5850 MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6 dB Emission Bandwidth Limit (MHz)
802.11 a	5745	16.320	16.766	≥ 0.5
	5785	16.480	16.766	≥ 0.5
	5825	16.480	16.766	≥ 0.5
802.11n ht20	5745	17.840	18.044	≥ 0.5
	5785	17.840	18.044	≥ 0.5
	5825	17.840	18.124	≥ 0.5
802.11ac vht20	5745	17.840	18.044	≥ 0.5
	5785	17.840	18.044	≥ 0.5
	5825	17.840	18.044	≥ 0.5
802.11n ht40	5755	36.640	36.886	≥ 0.5
	5795	36.640	36.886	≥ 0.5
802.11ac vht40	5755	36.640	37.046	≥ 0.5
	5795	36.640	37.046	≥ 0.5
802.11ac vht80	5775	76.480	76.008	≥ 0.5

Note: the 99% Occupied Bandwidth has not fallen into the band 5250-5350 MHz or 5470-5725MHz.

*Wi-Fi 1:**5150-5250 MHz:*

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	21.840	17.246
	5200	21.920	17.246
	5240	21.920	17.246
802.11n ht20	5180	22.240	18.283
	5200	22.160	18.363
	5240	22.080	18.363


5725-5850 MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6 dB Emission Bandwidth Limit (MHz)
802.11 a	5745	16.480	17.246	≥ 0.5
	5785	16.480	17.246	≥ 0.5
	5825	16.400	17.246	≥ 0.5
802.11n ht20	5745	17.520	18.204	≥ 0.5
	5785	17.520	18.363	≥ 0.5
	5825	17.520	18.363	≥ 0.5

Note: the 99% Occupied Bandwidth has not fallen into the band 5250-5350 MHz or 5470-5725MHz.


Wi-Fi 0:
5150-5250 MHz:
26dB Emission Bandwidth:

802.11a Low Channel

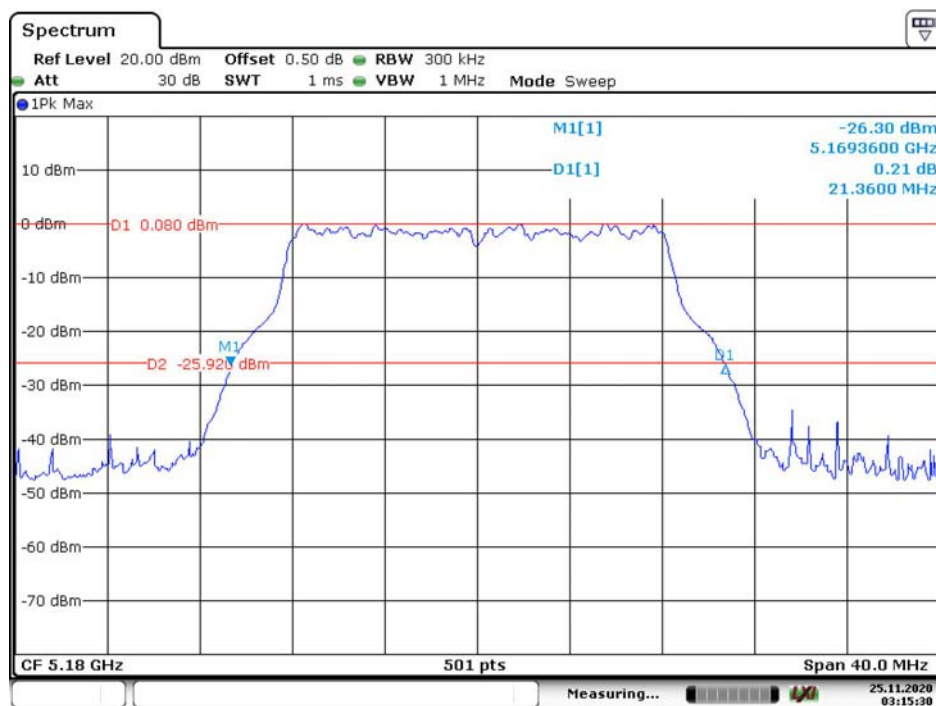


Date: 25.NOV.2020 03:15:30

802.11a Middle Channel

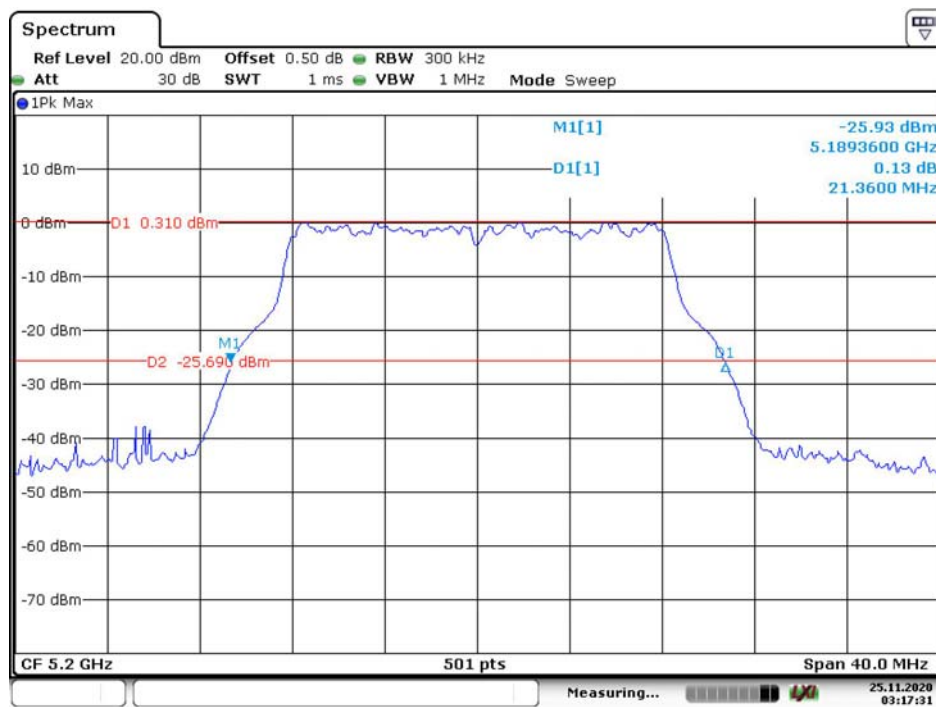


Date: 25.NOV.2020 03:17:31

802.11a High Channel

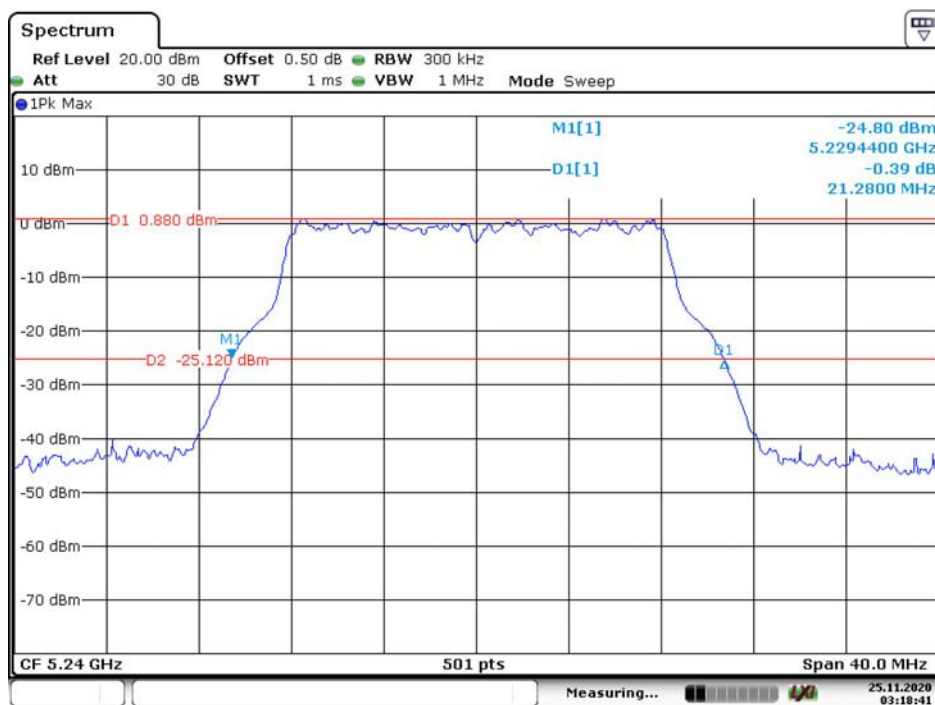


Date: 25.NOV.2020 03:18:41

802.11n ht20 Low Channel

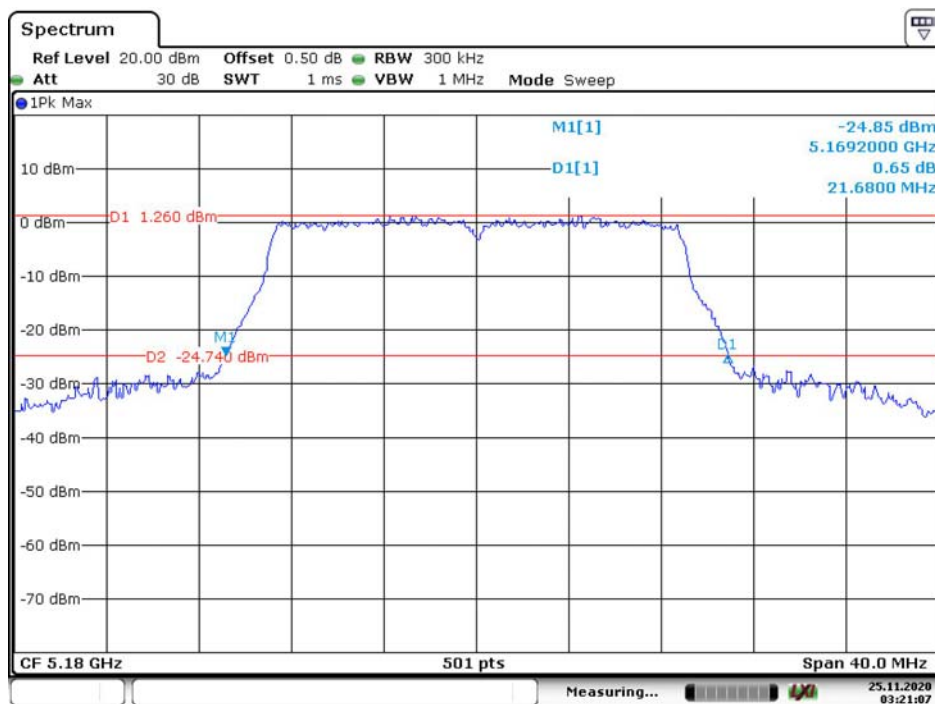


Date: 25.NOV.2020 03:21:07

802.11n ht20 Middle Channel

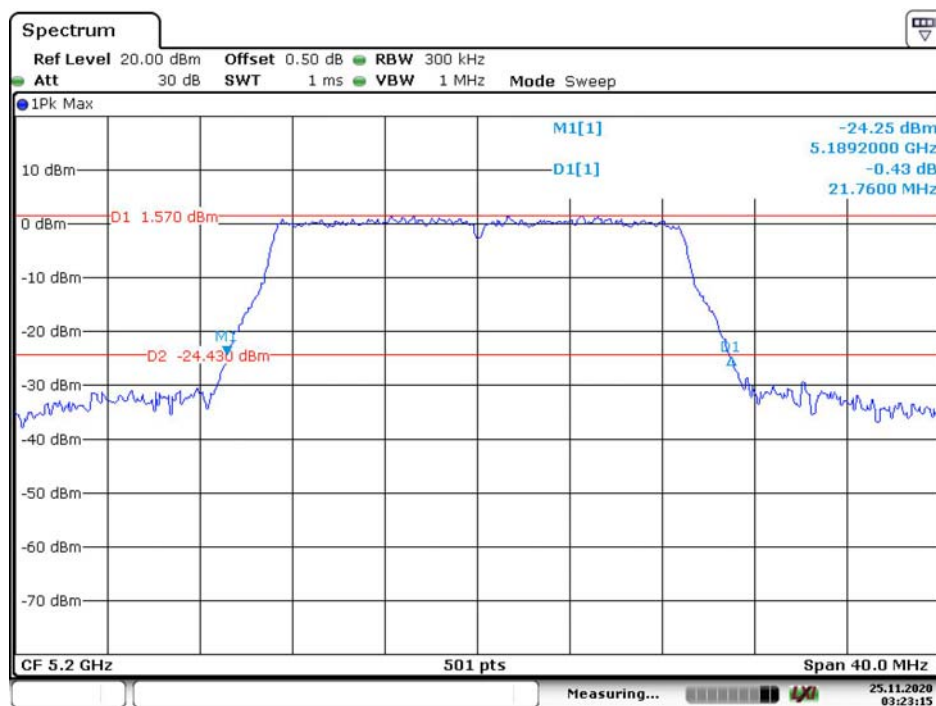


Date: 25.NOV.2020 03:23:15

802.11n ht20 High Channel

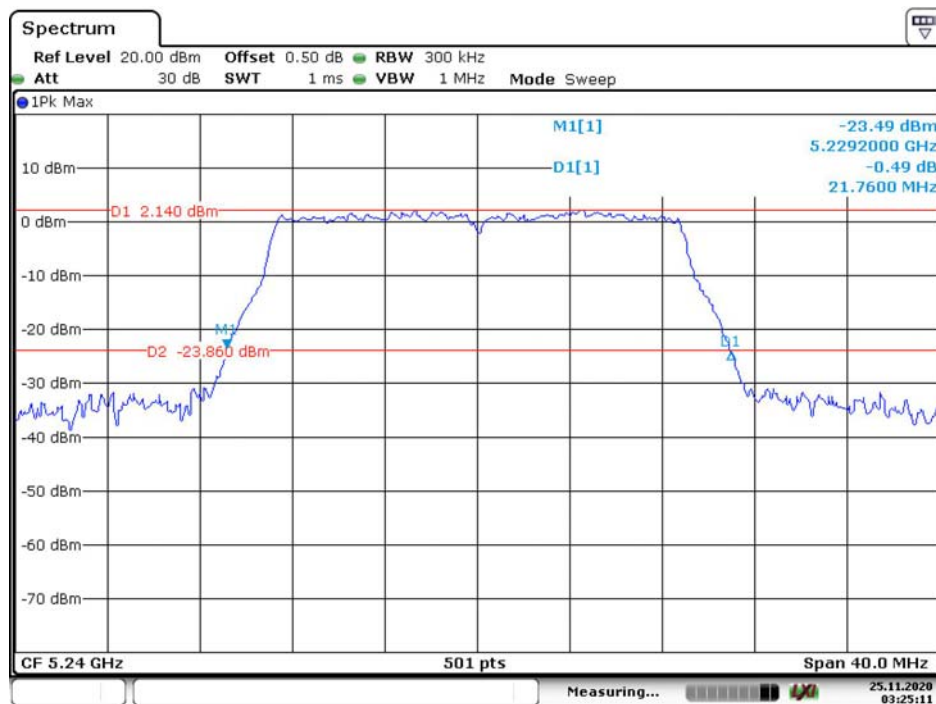


Date: 25.NOV.2020 03:25:11

802.11ac vht20 Low Channel

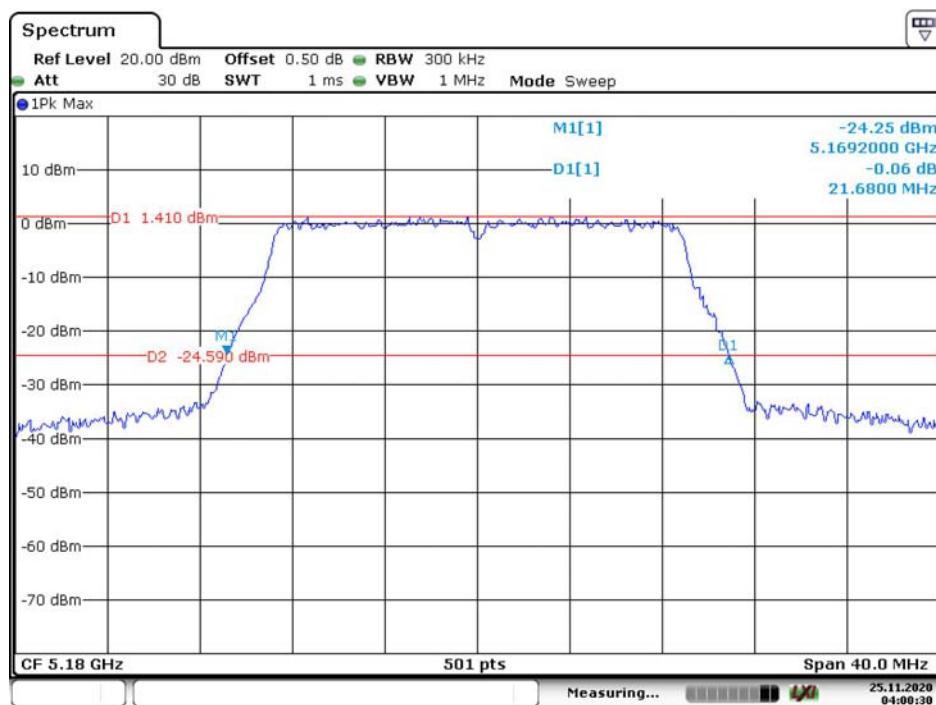


Date: 25.NOV.2020 04:00:30

802.11ac vht20 Middle Channel

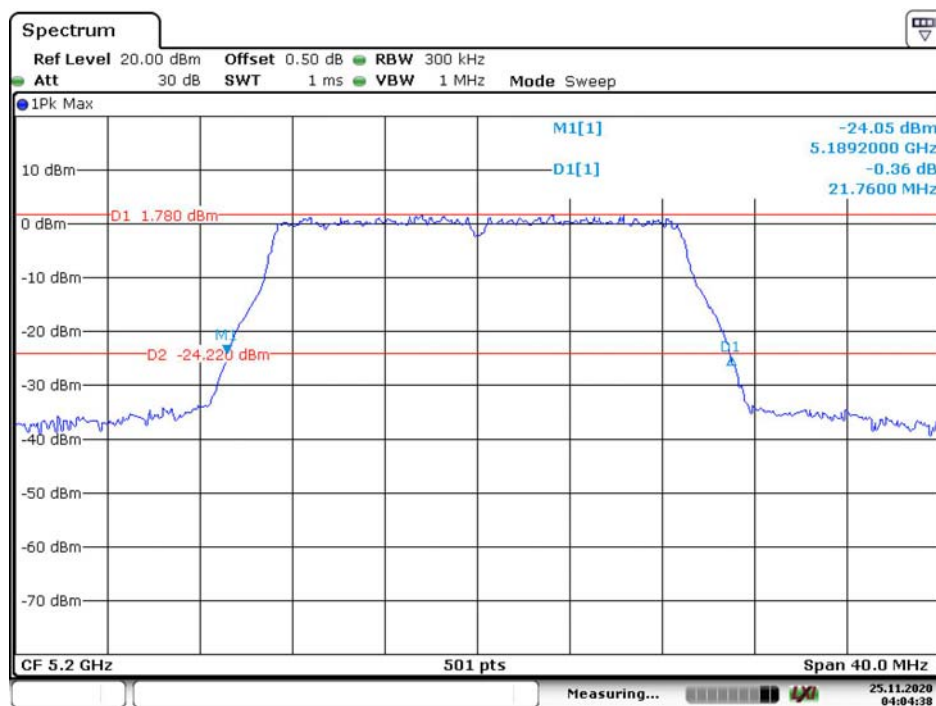


Date: 25.NOV.2020 04:04:38

802.11ac vht20 High Channel

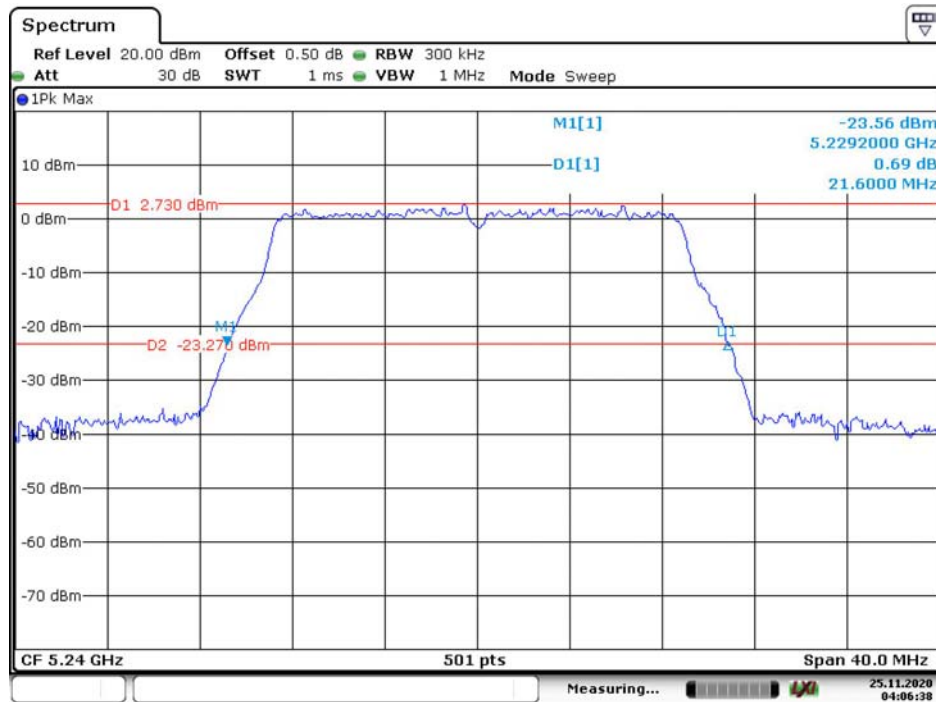


Date: 25.NOV.2020 04:06:38

802.11n ht40 Low Channel

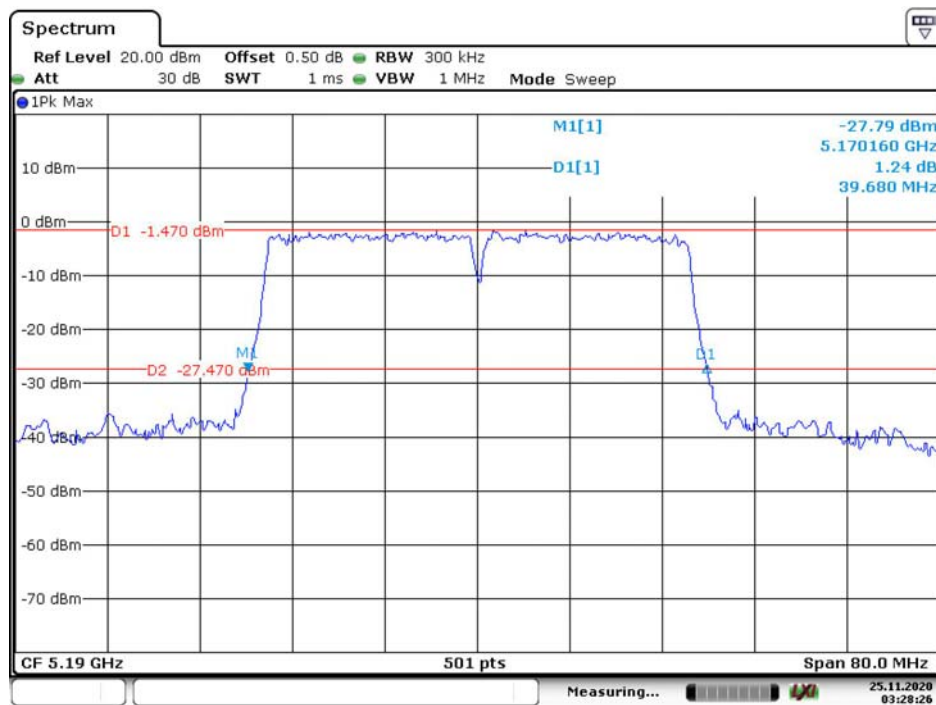


Date: 25.NOV.2020 03:28:26

802.11n ht40 High Channel

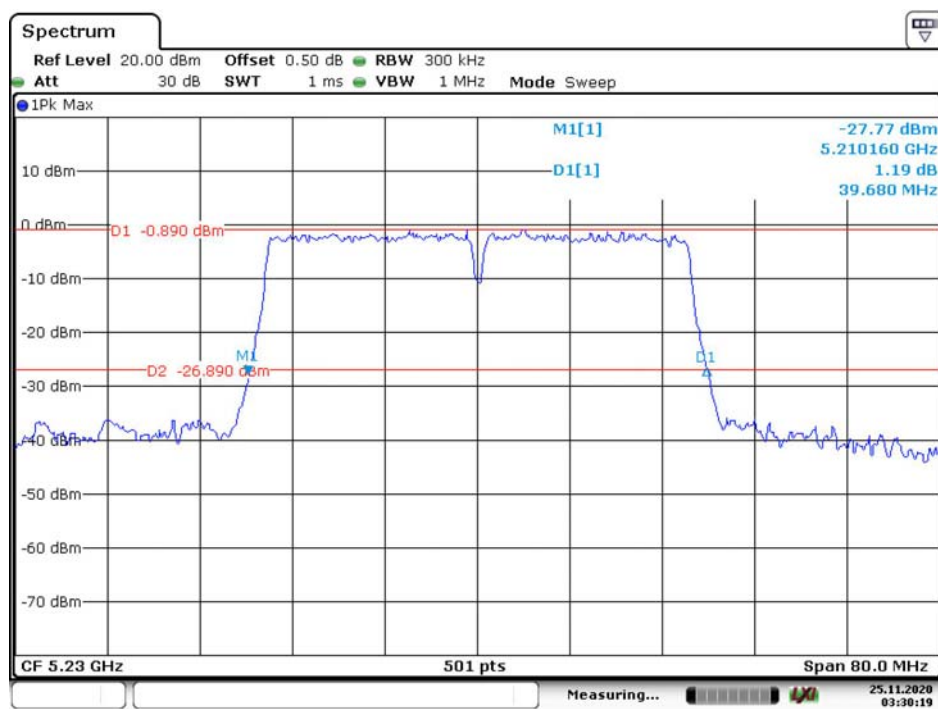

Date: 25.NOV.2020 03:30:19

802.11ac vht40 Low Channel

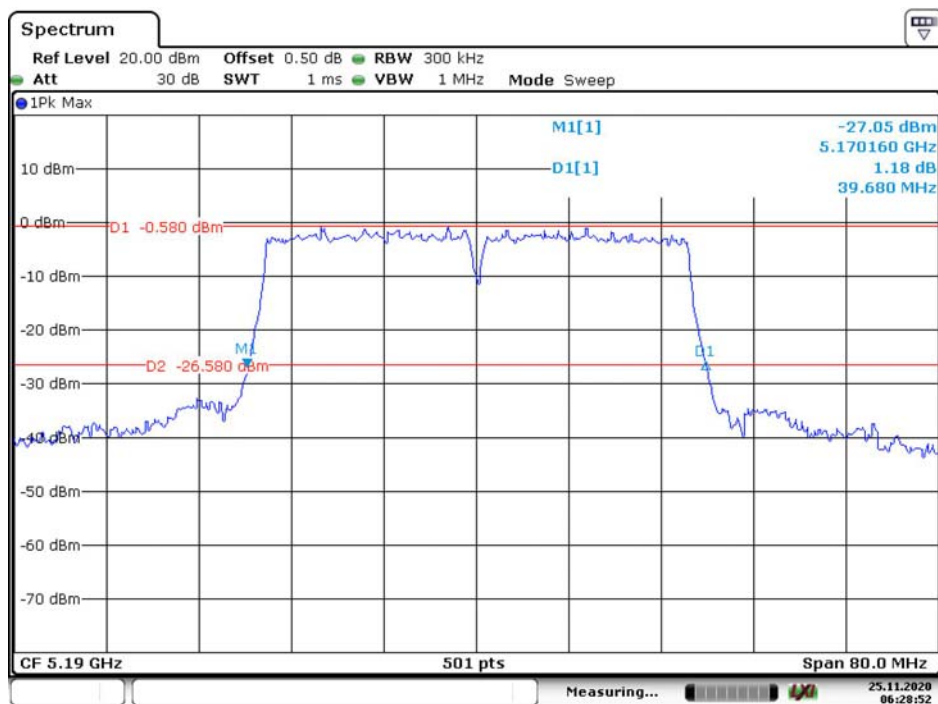

Date: 25.NOV.2020 06:28:53

Date: 25.NOV.2020 06:26:29

Date: 25.NOV.2020 04:25:46


99% Occupied Bandwidth:**802.11a Low Channel**

Date: 25.NOV.2020 03:15:47

802.11a Middle Channel


Date: 25.NOV.2020 03:17:45

802.11a High Channel

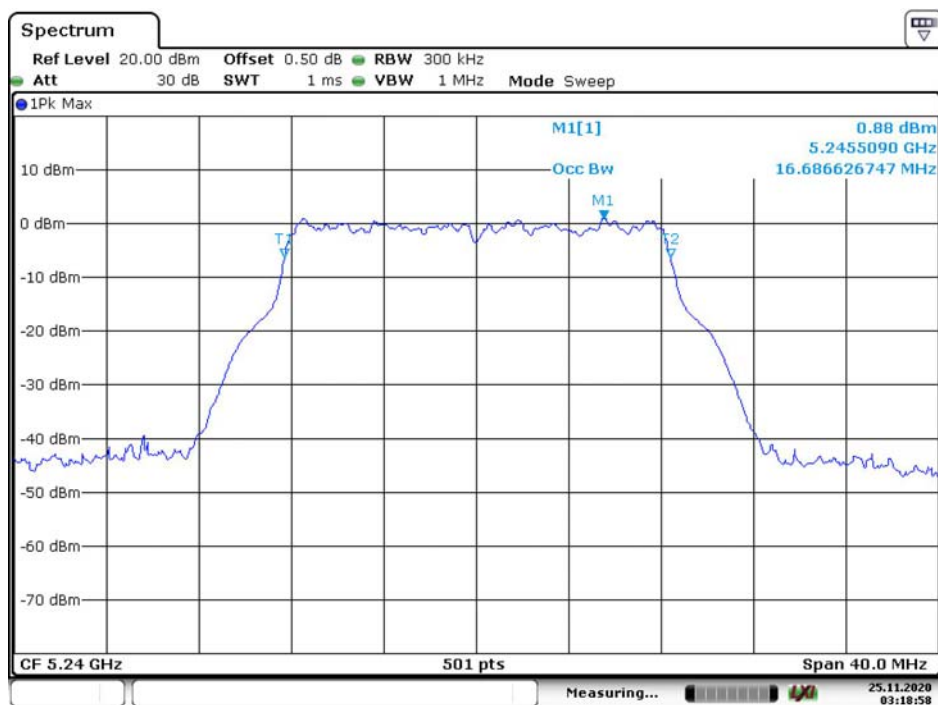


Date: 25.NOV.2020 03:18:58

802.11n ht20 Low Channel

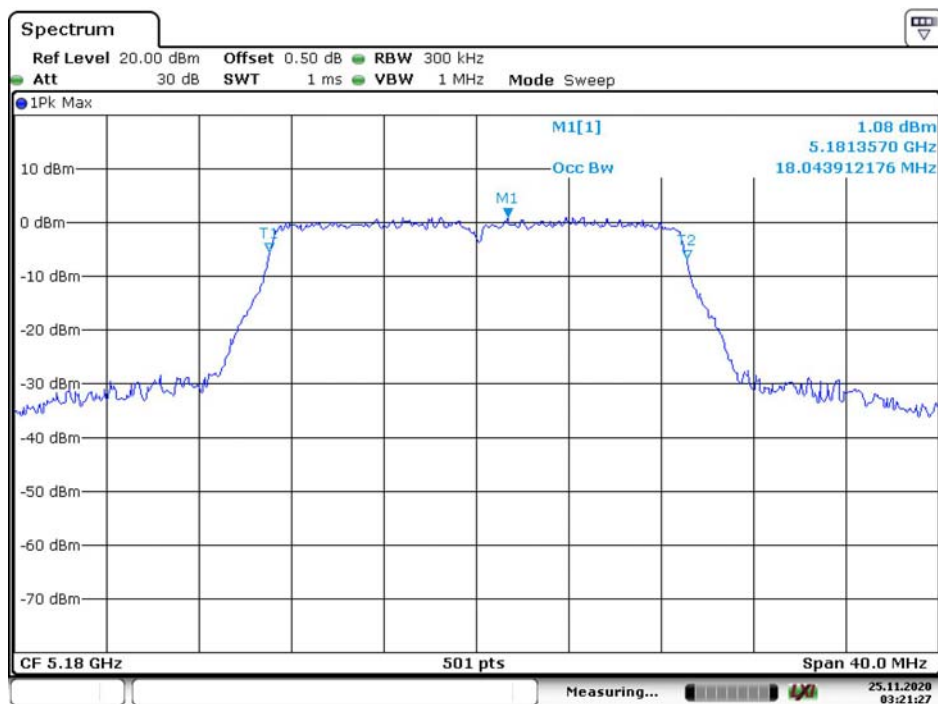


Date: 25.NOV.2020 03:21:27

802.11n ht20 Middle Channel

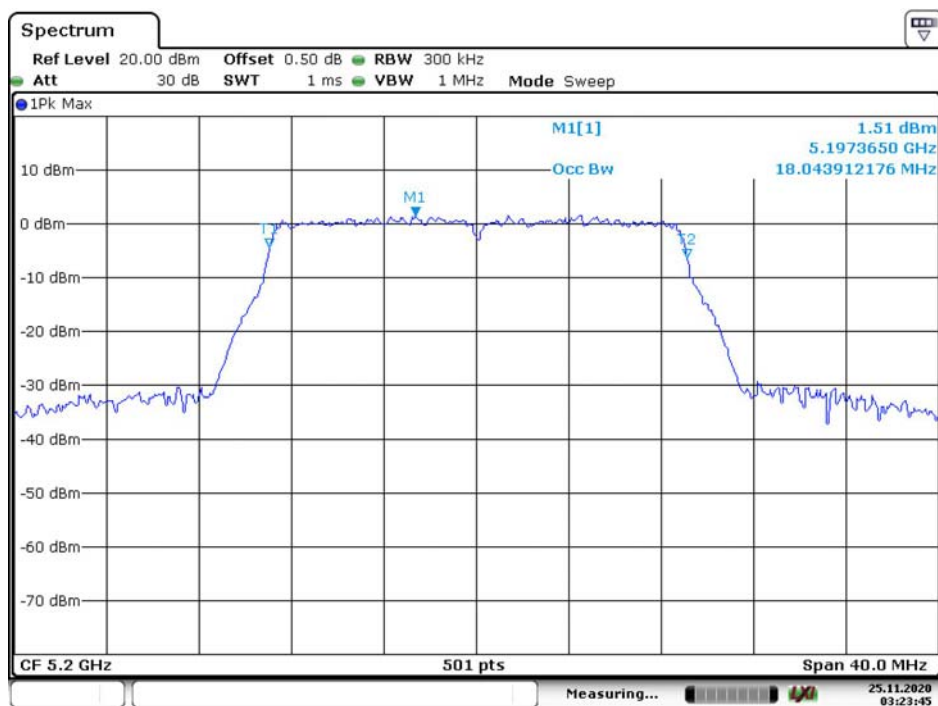


Date: 25.NOV.2020 03:23:45

802.11n ht20 High Channel

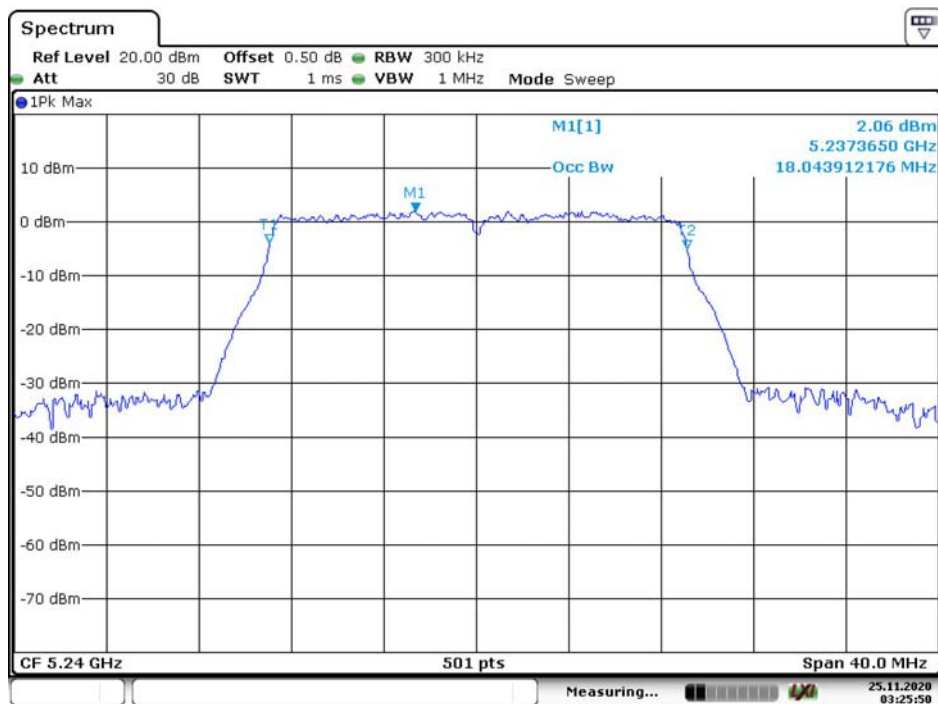


Date: 25.NOV.2020 03:25:50

802.11ac vht20 Low Channel

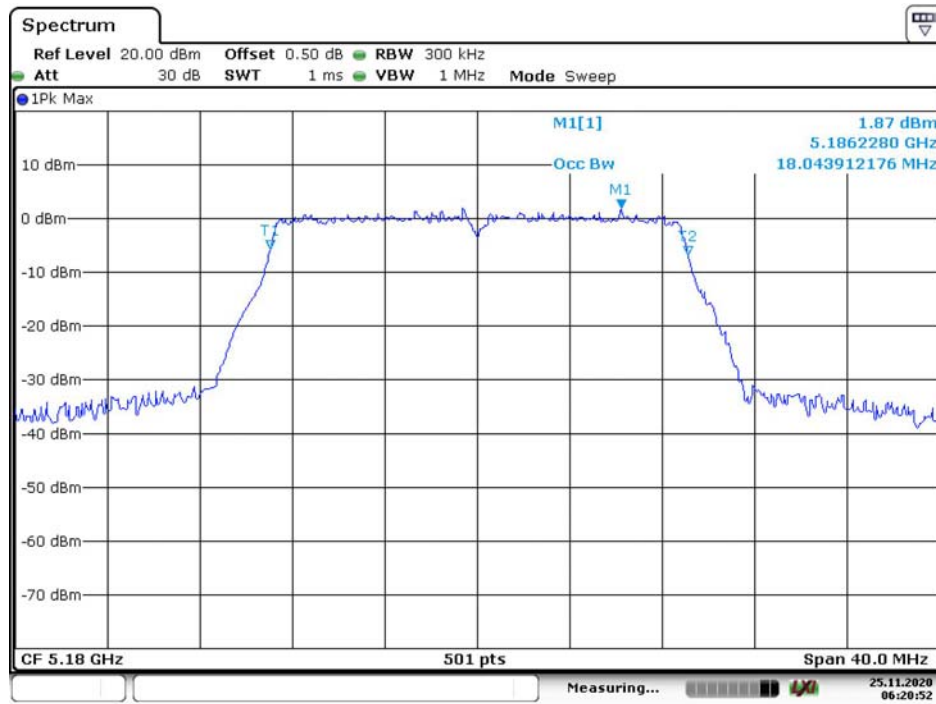


Date: 25.NOV.2020 06:20:52

802.11ac vht20 Middle Channel

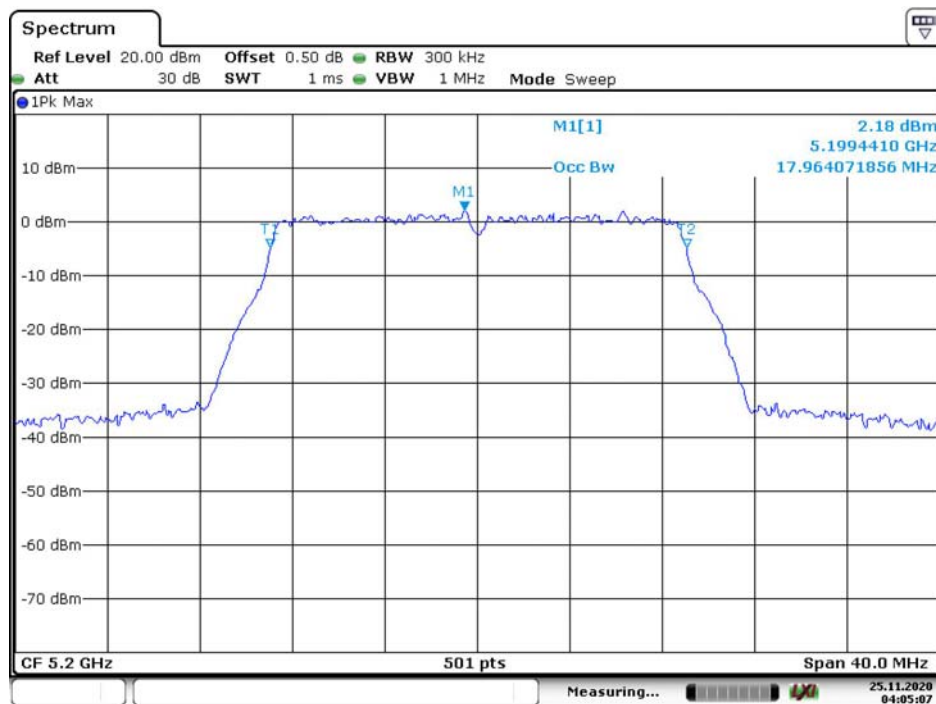

Date: 25.NOV.2020 04:05:07

802.11ac vht20 High Channel

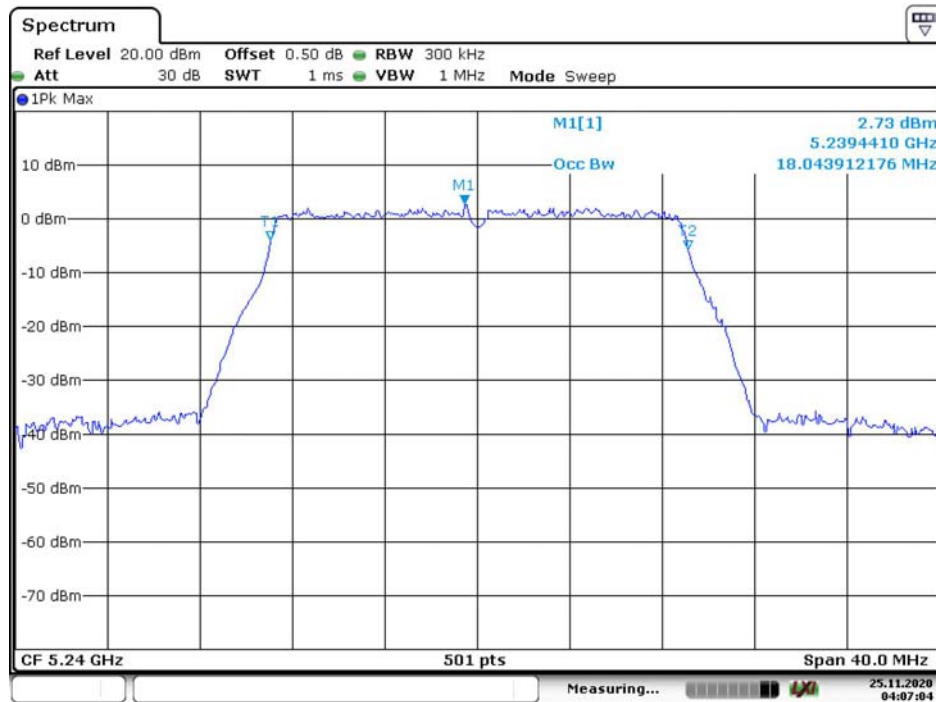


Date: 25.NOV.2020 04:07:04

802.11n ht40 Low Channel




Date: 25.NOV.2020 03:28:46

802.11n ht40 High Channel

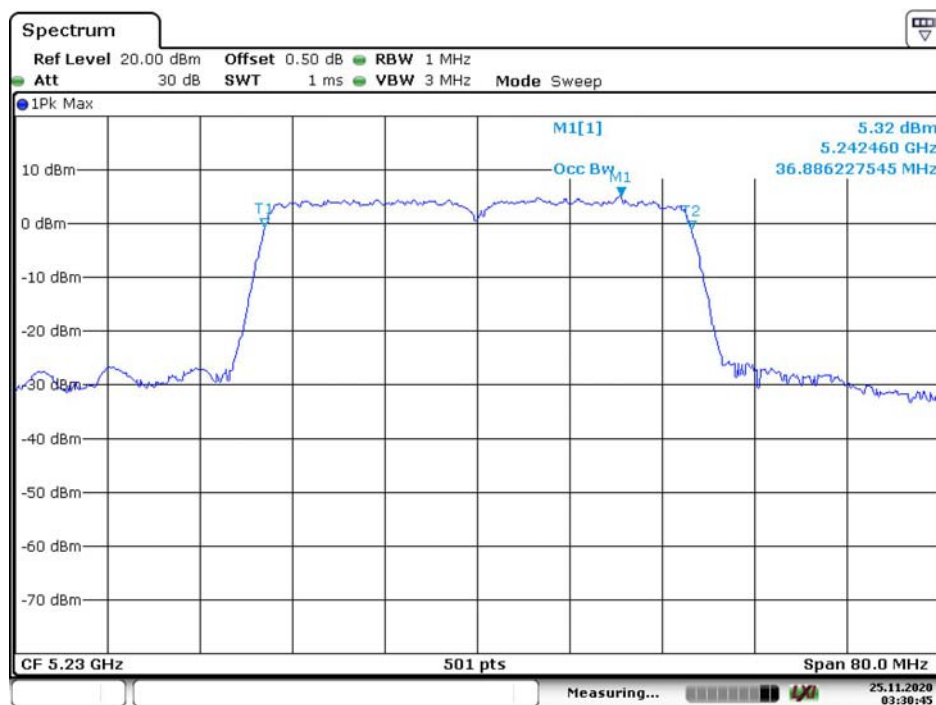

Date: 25.NOV.2020 03:30:45

802.11ac vht40 Low Channel

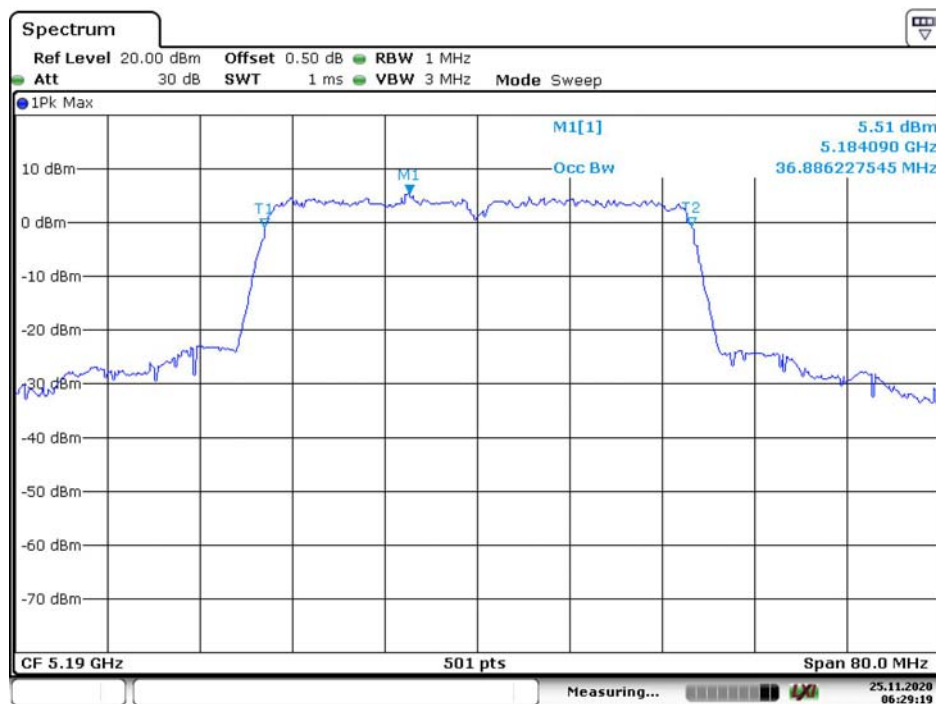


Date: 25.NOV.2020 06:29:19

802.11ac vht40 High Channel



Date: 25.NOV.2020 06:26:52


802.11ac vht80 Middle Channel

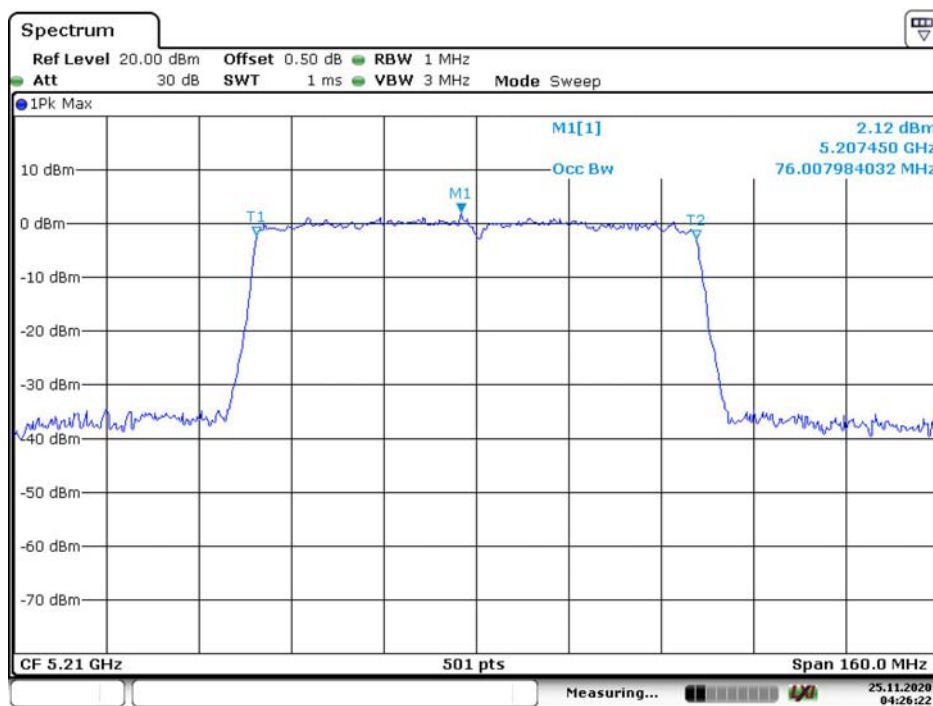


Date: 25.NOV.2020 04:26:22

5725-5850 MHz:
6dB Emission Bandwidth:


802.11a Low Channel

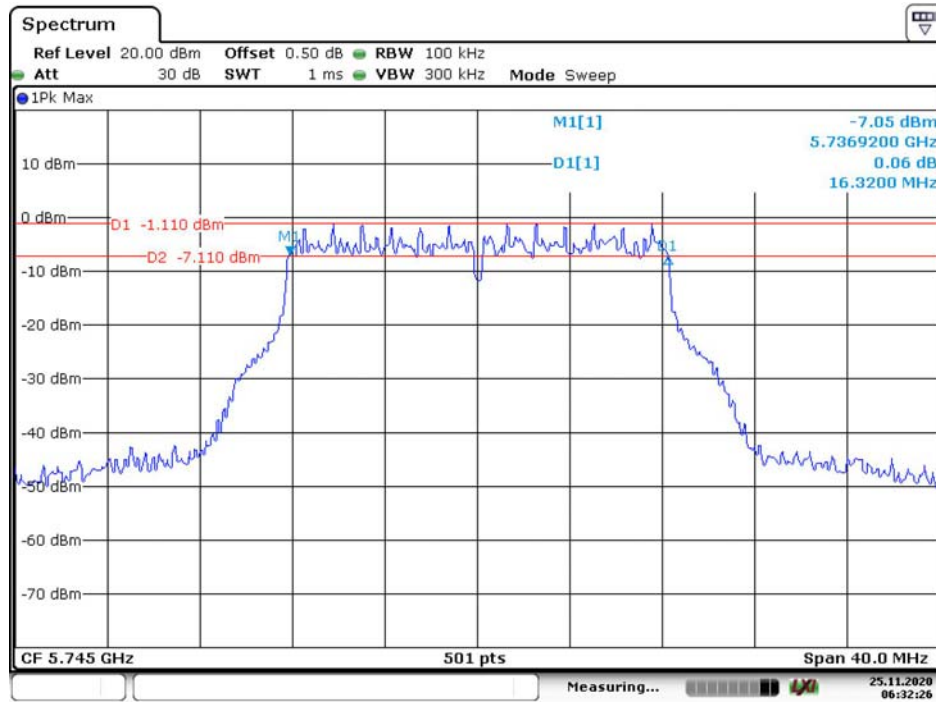

802.11a Middle Channel

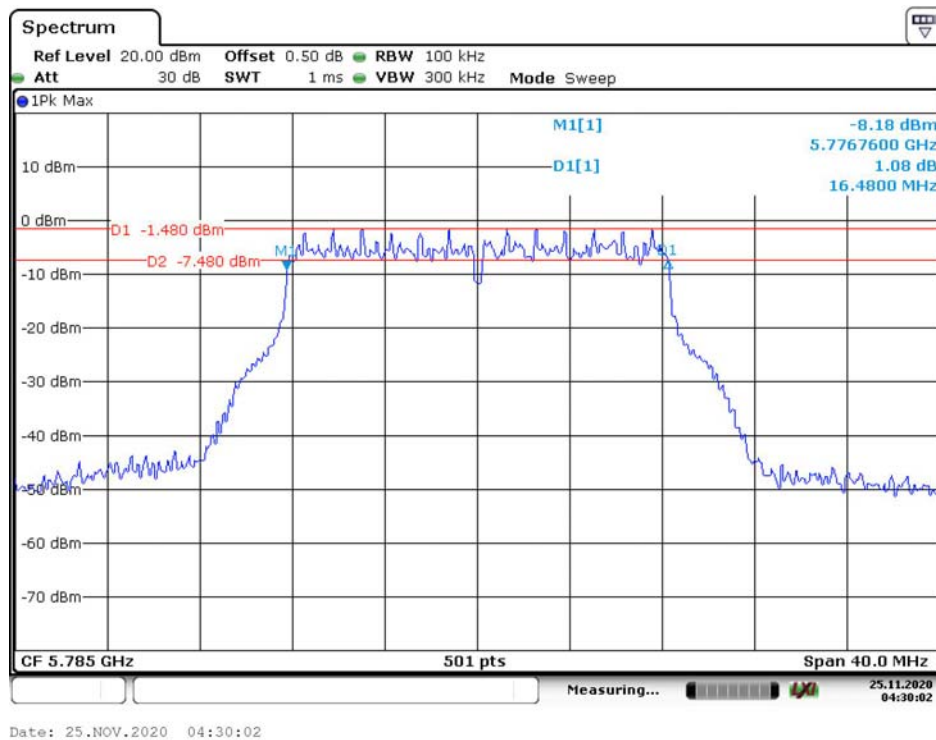


802.11a High Channel

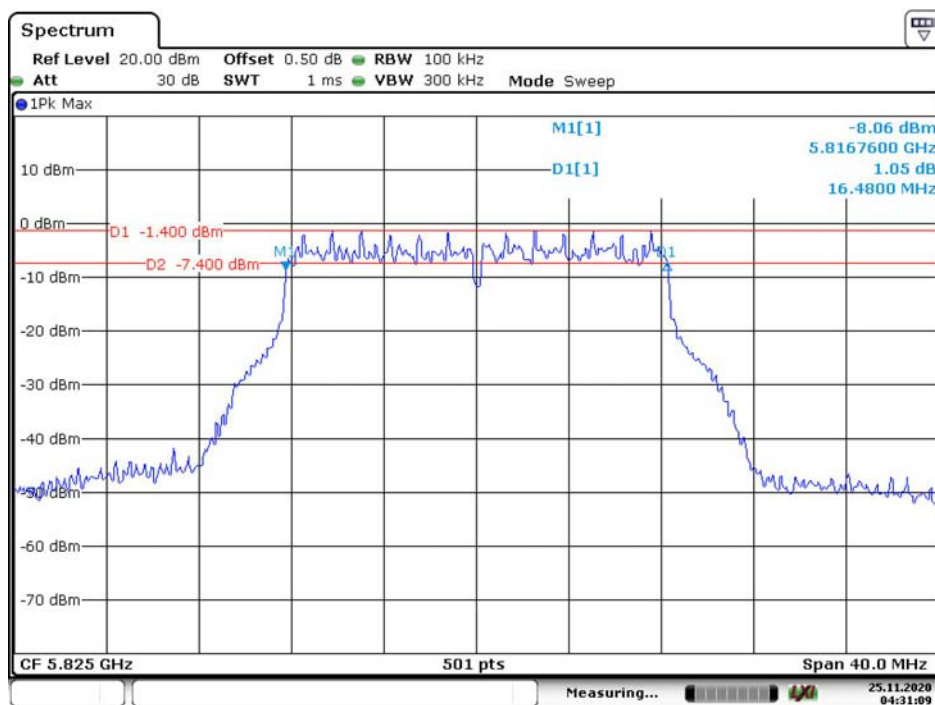


Date: 25.NOV.2020 04:31:10

802.11n ht20 Low Channel

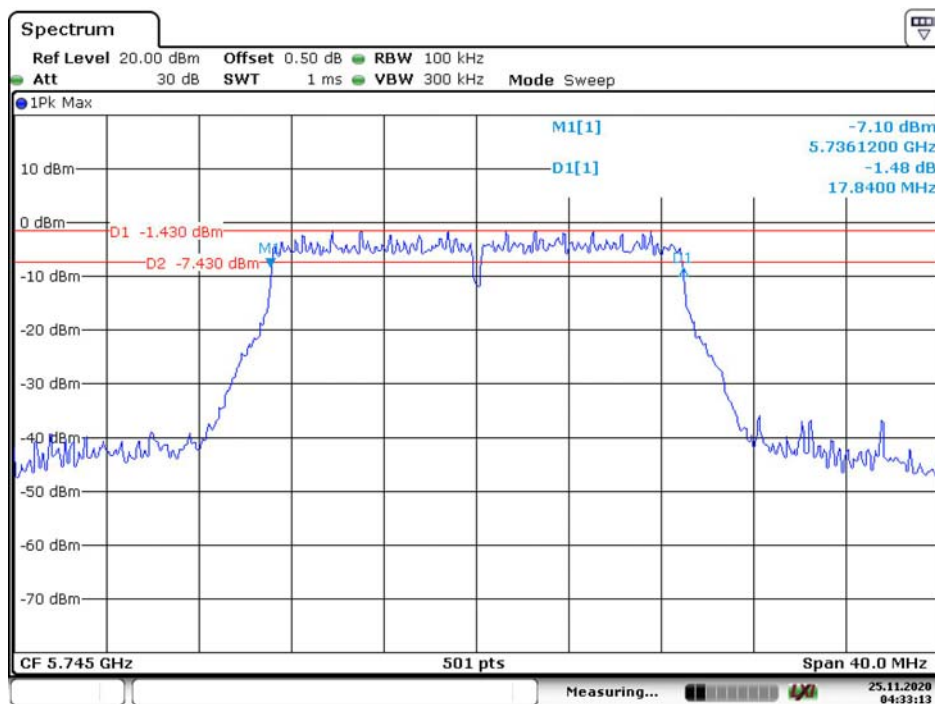


Date: 25.NOV.2020 04:33:13

802.11n ht20 Middle Channel

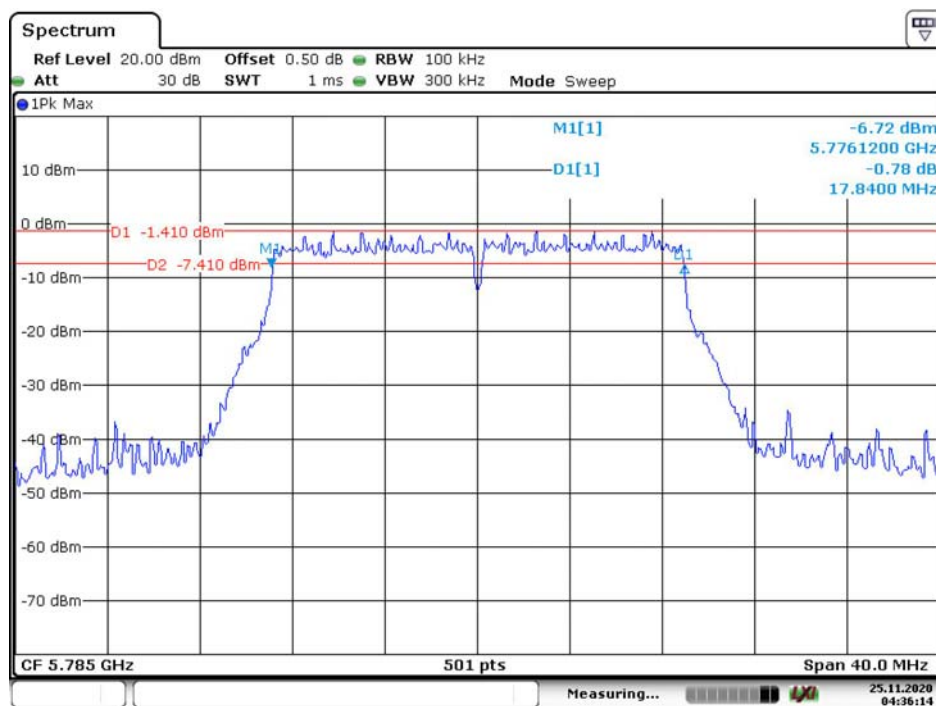


Date: 25.NOV.2020 04:36:14

802.11n ht20 High Channel

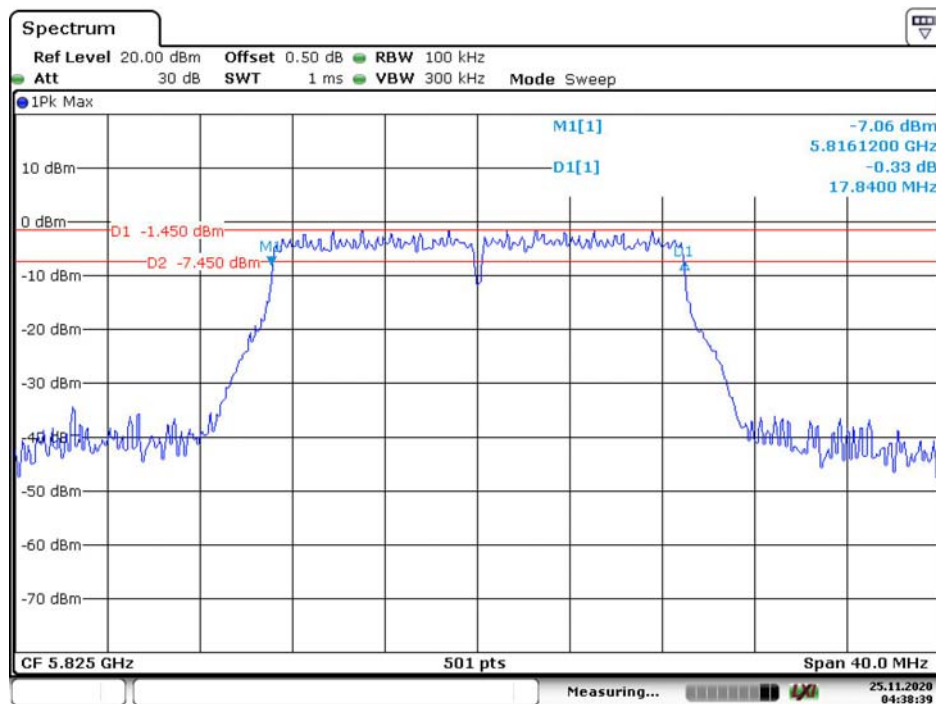


Date: 25.NOV.2020 04:38:40

802.11ac vht20 Low Channel

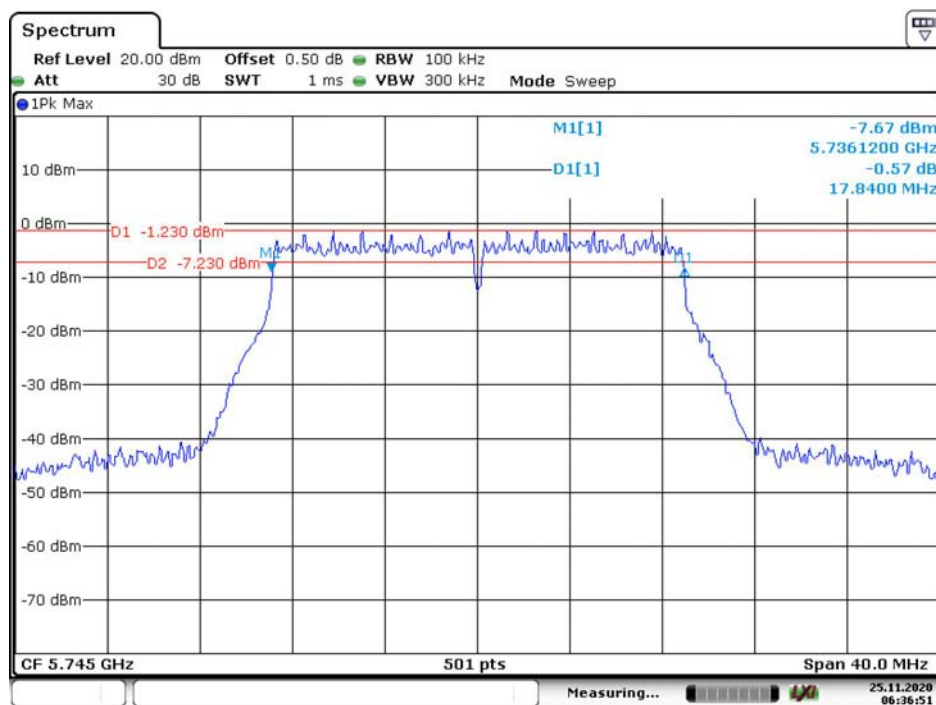


Date: 25.NOV.2020 06:36:51

802.11ac vht20 Middle Channel

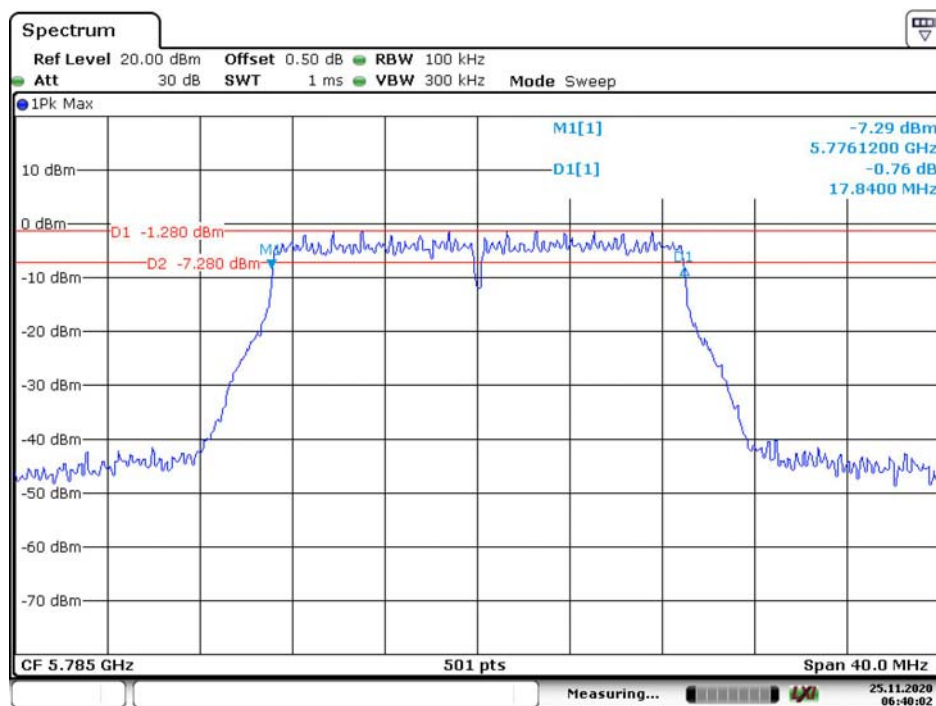


Date: 25.NOV.2020 06:40:02

802.11ac vht20 High Channel

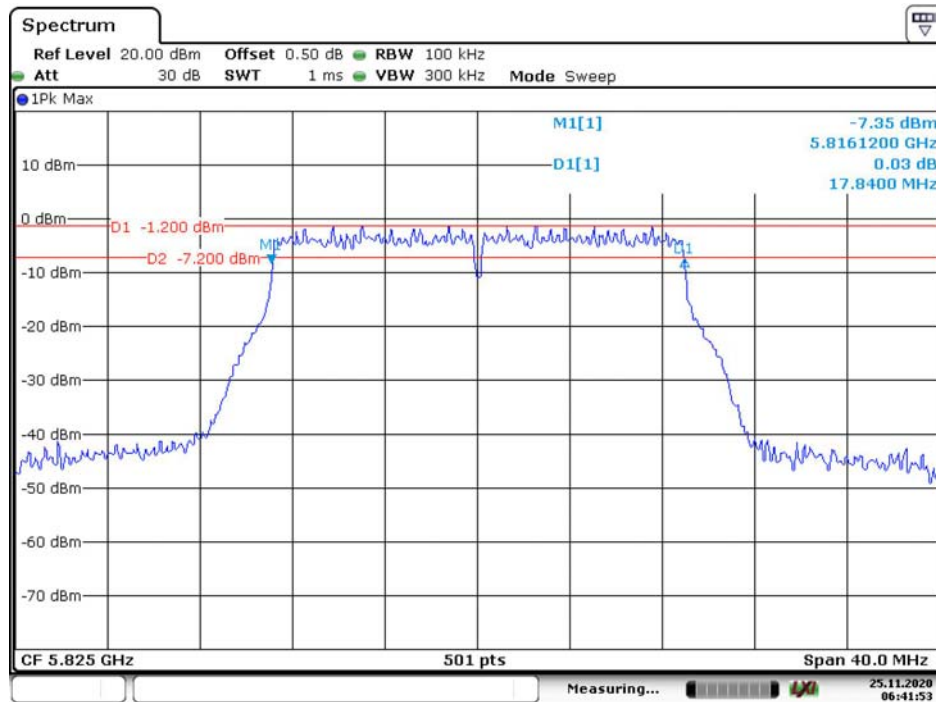


Date: 25.NOV.2020 06:41:54

802.11n ht40 Low Channel

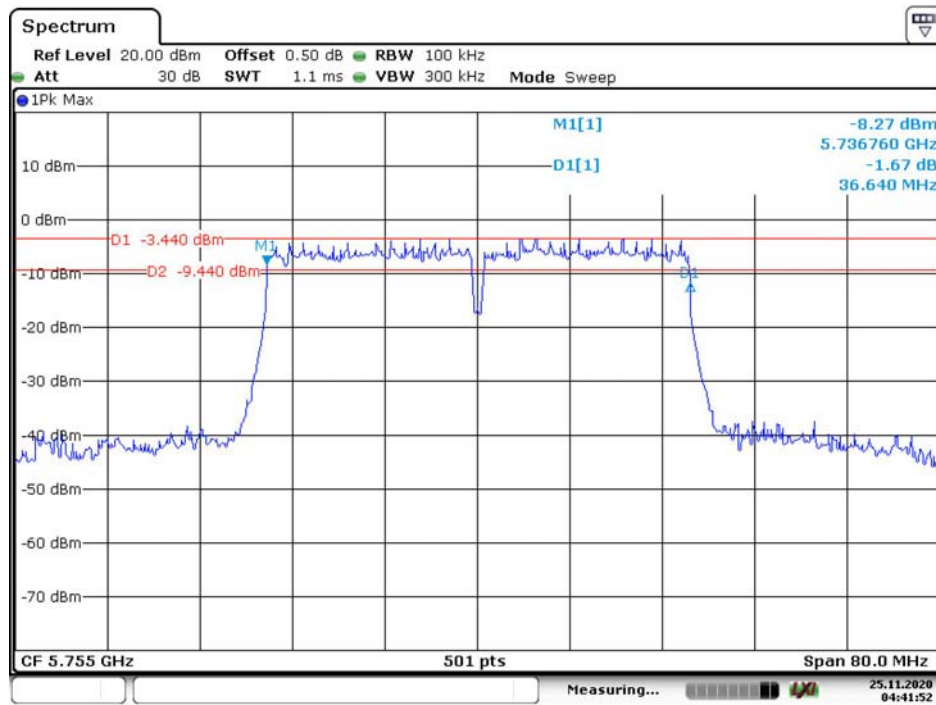


Date: 25.NOV.2020 04:41:52

802.11n ht40 High Channel

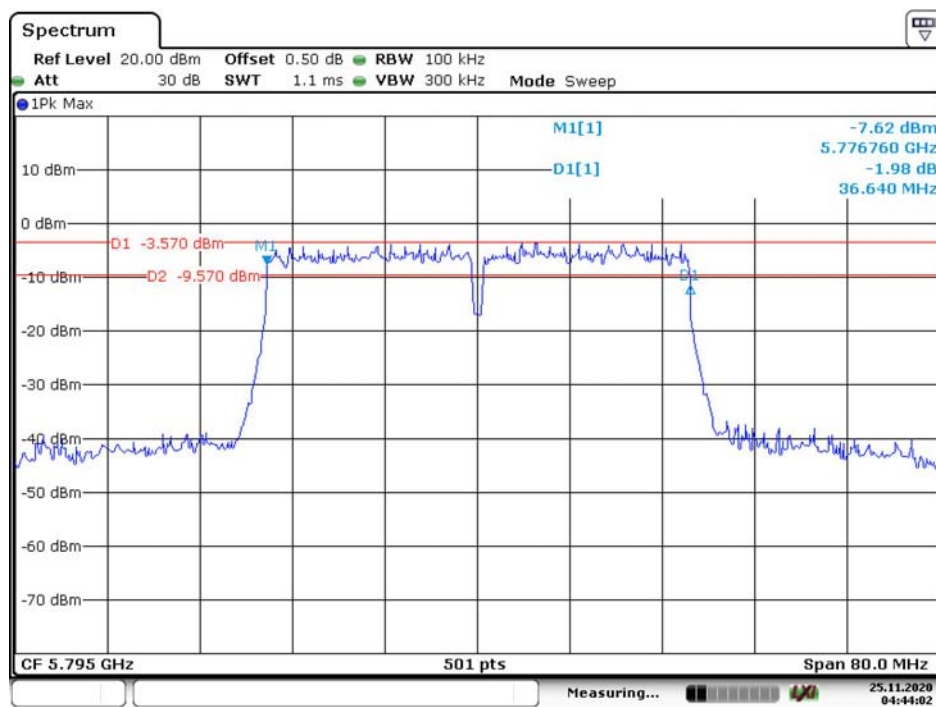


Date: 25.NOV.2020 04:44:02

802.11ac vht40 Low Channel

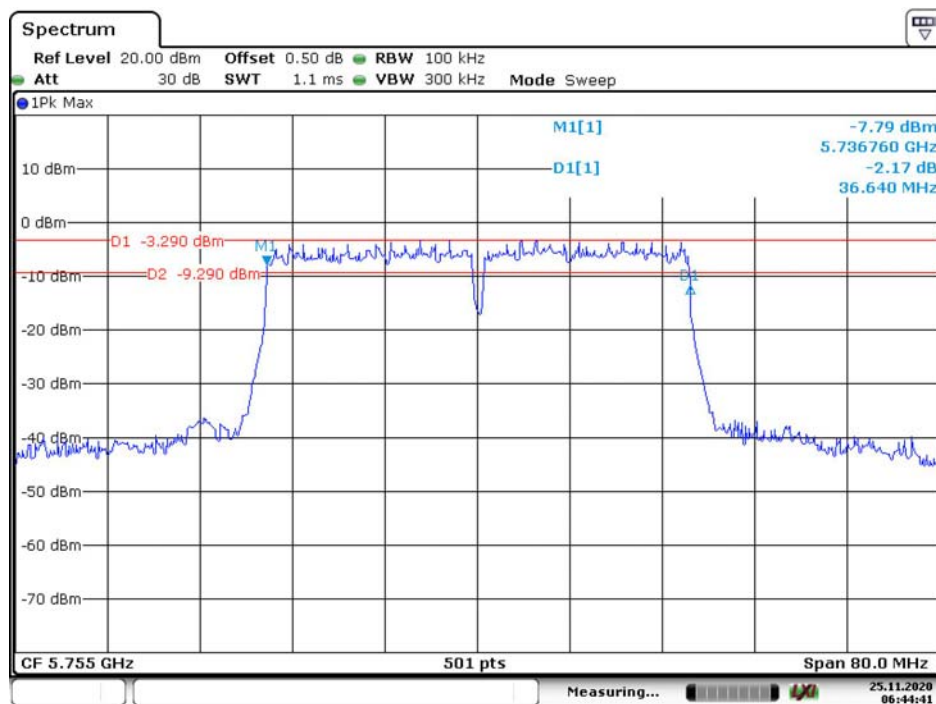


Date: 25.NOV.2020 06:44:42

802.11ac vht40 High Channel

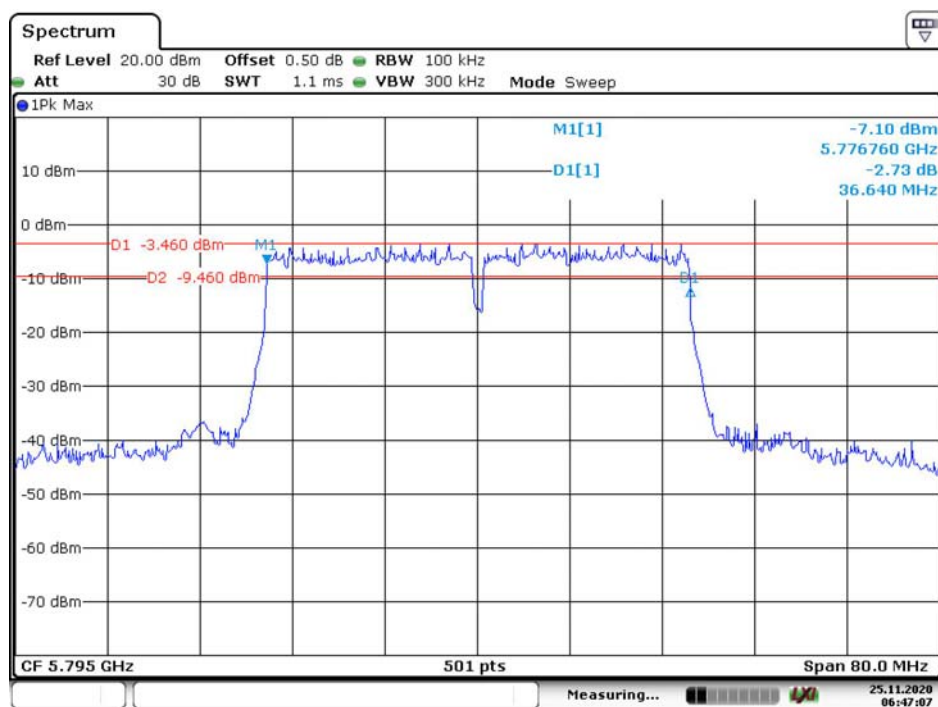


Date: 25.NOV.2020 06:47:08


802.11ac vht80 Middle Channel

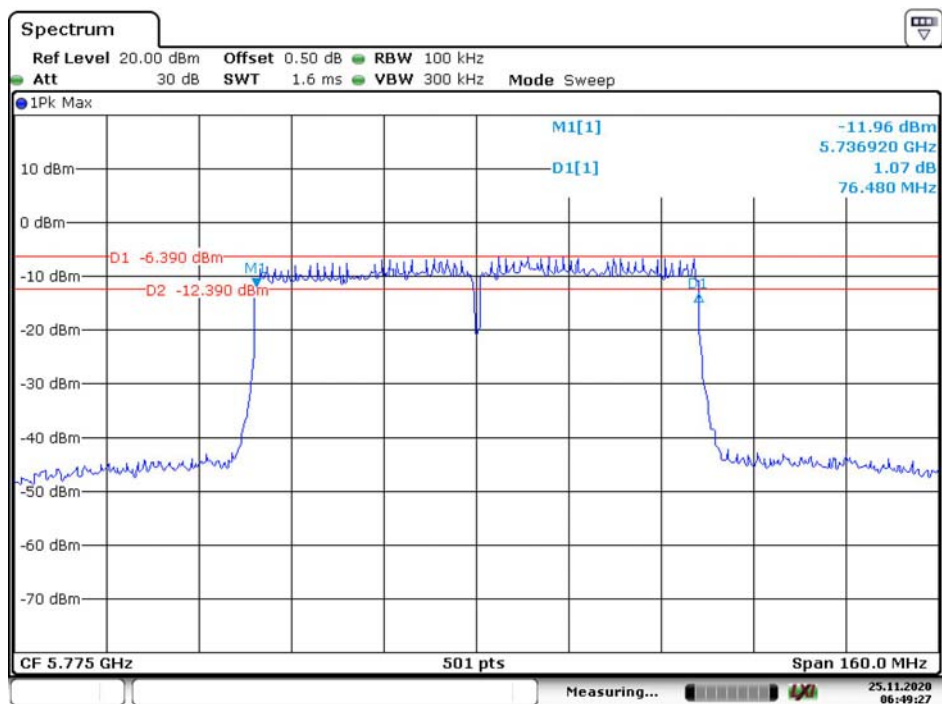

Date: 25.NOV.2020 06:49:27

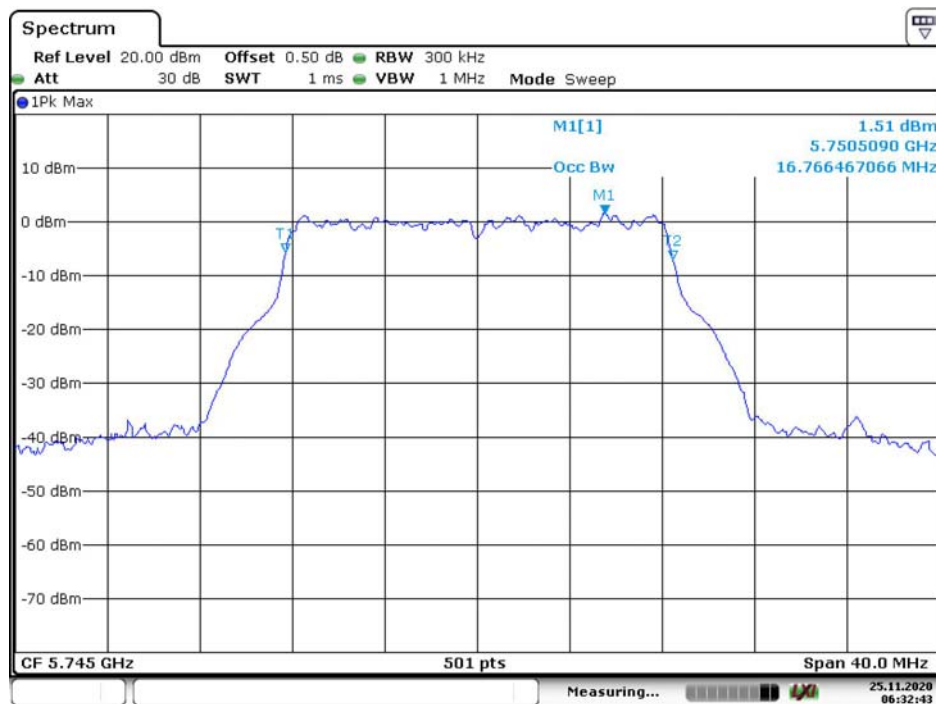99% Occupied Bandwidth:**802.11a Low Channel**

Date: 25.NOV.2020 06:32:44

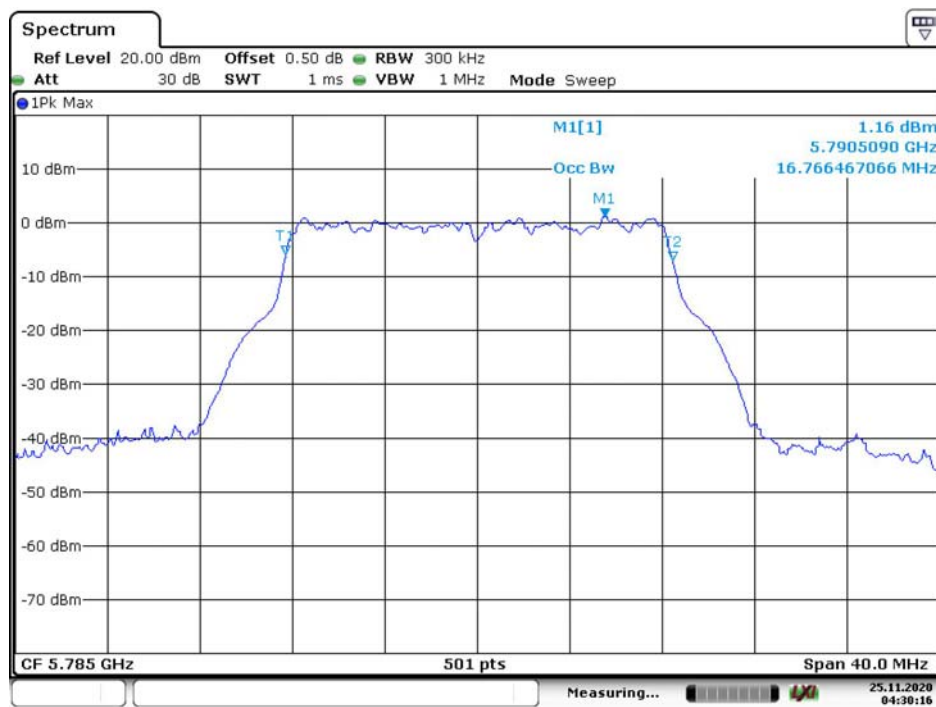802.11a Middle Channel


Date: 25.NOV.2020 04:30:16

802.11a High Channel




Date: 25.NOV.2020 04:31:28

802.11n ht20 Low Channel

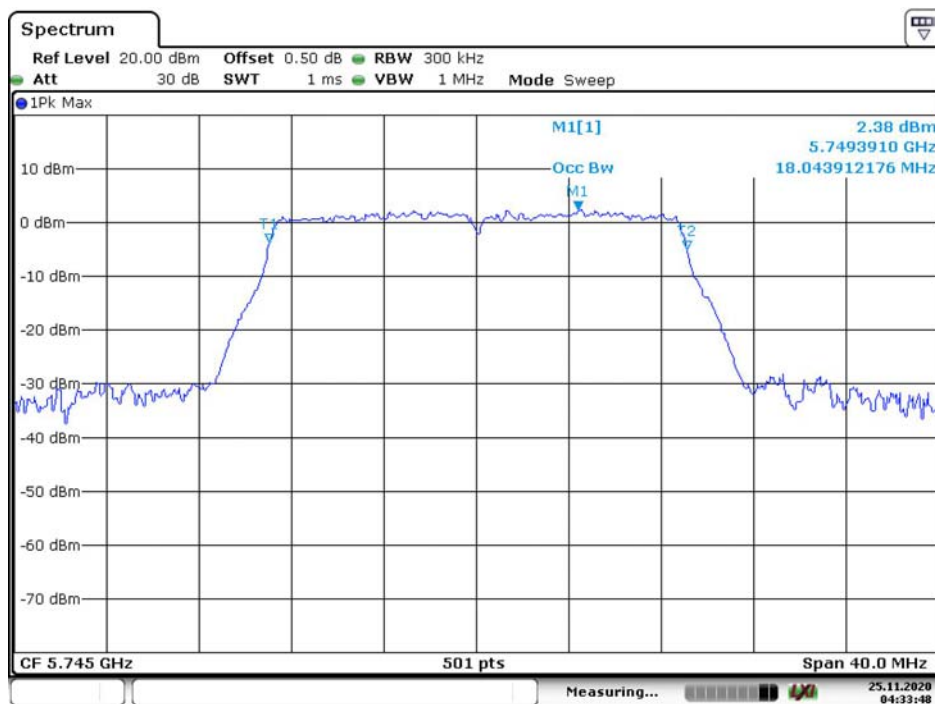


Date: 25.NOV.2020 04:33:48

802.11n ht20 Middle Channel

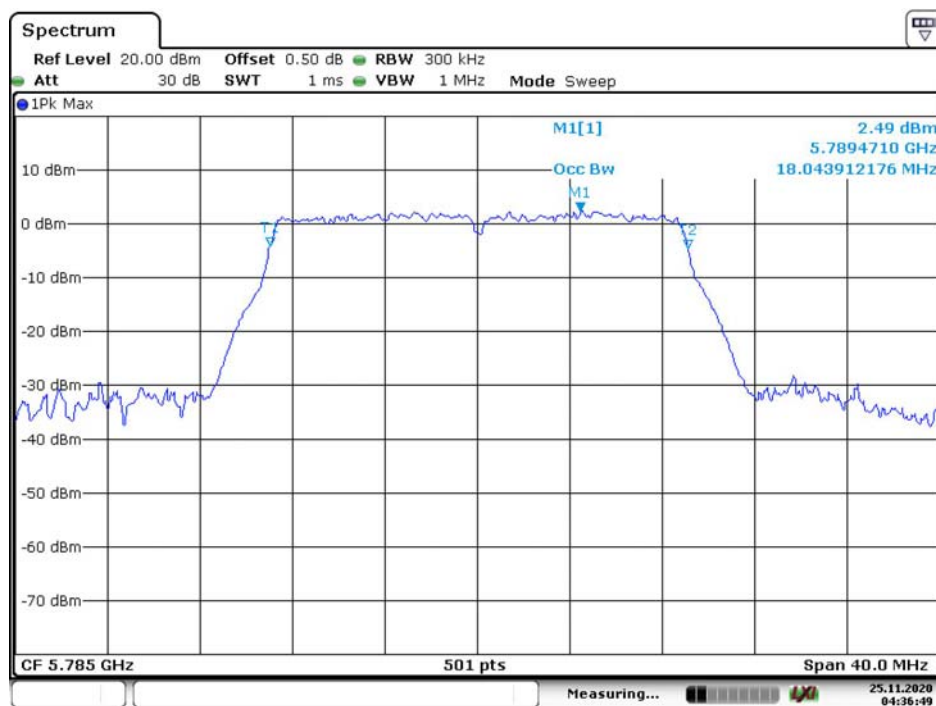


Date: 25.NOV.2020 04:36:49

802.11n ht20 High Channel

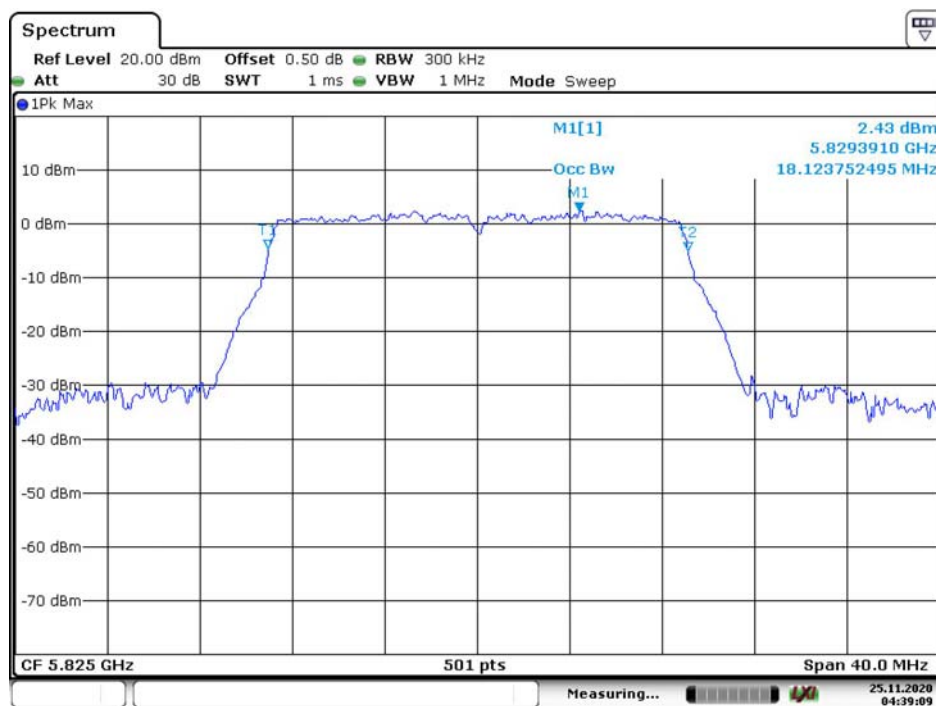


Date: 25.NOV.2020 04:39:09

802.11ac vht20 Low Channel

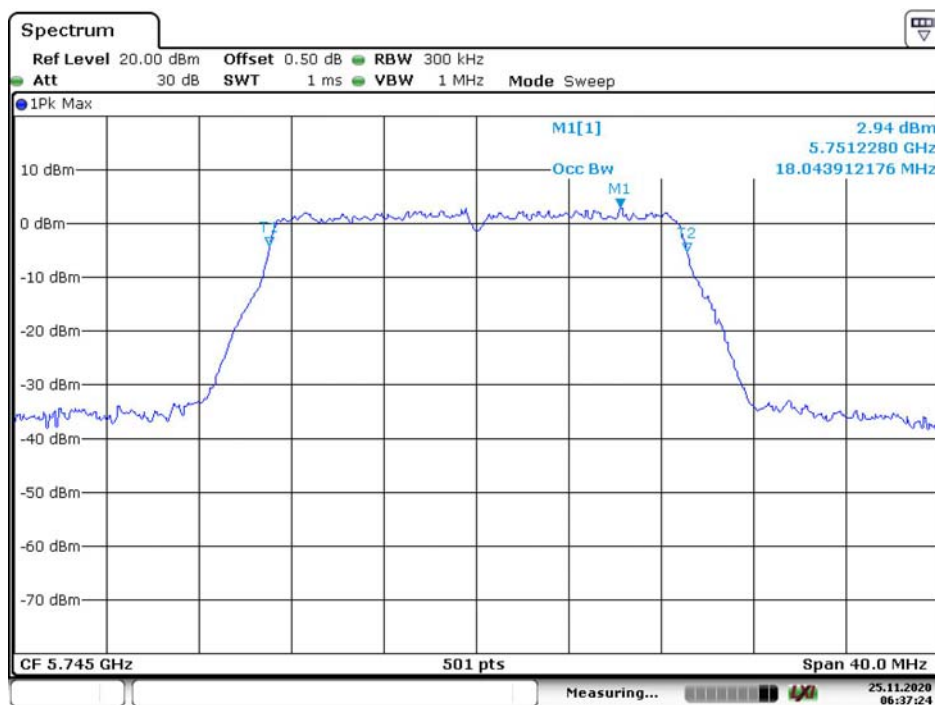

Date: 25.NOV.2020 06:37:24

802.11ac vht20 Middle Channel

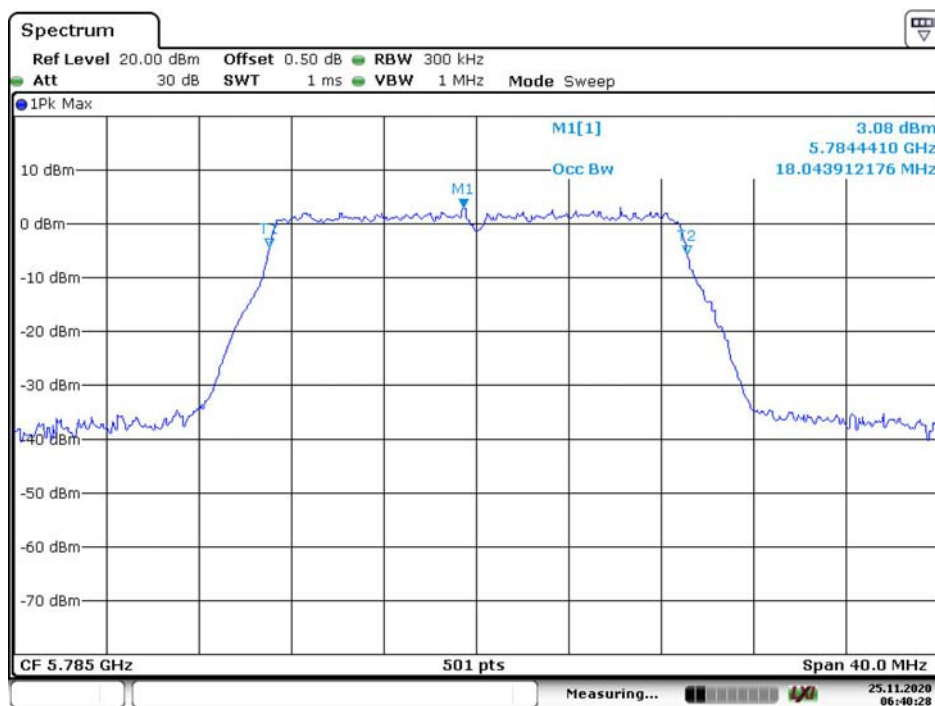

Date: 25.NOV.2020 06:40:28

802.11ac vht20 High Channel



802.11n ht40 Low Channel



802.11n ht40 High Channel




Date: 25.NOV.2020 04:44:22

802.11ac vht40 Low Channel




Date: 25.NOV.2020 06:45:08

802.11ac vht40 High Channel

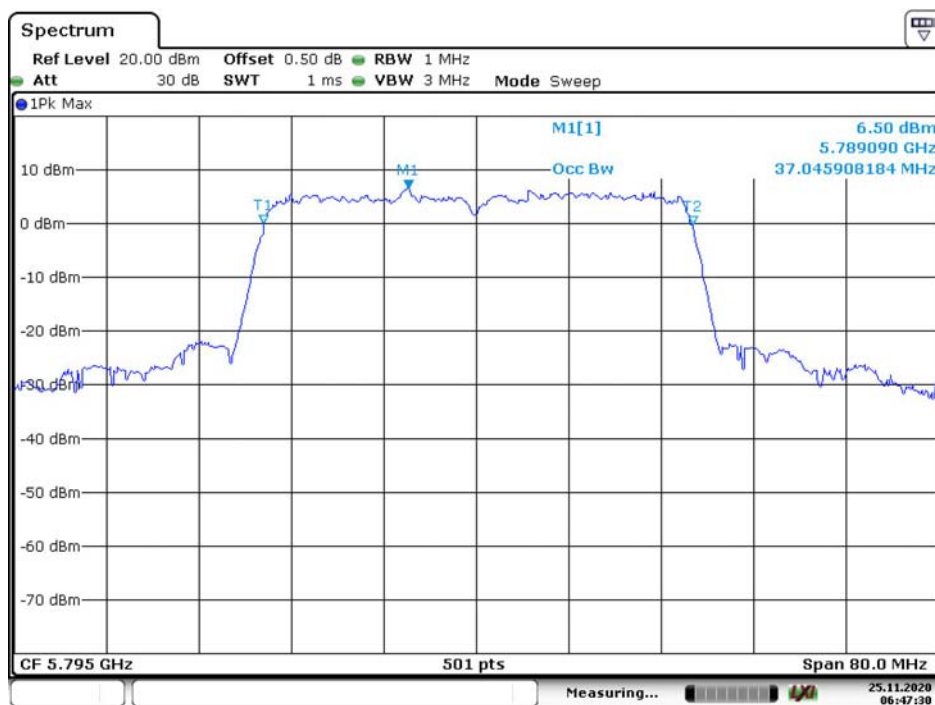

Date: 25.NOV.2020 06:47:31


802.11ac vht80 Middle Channel

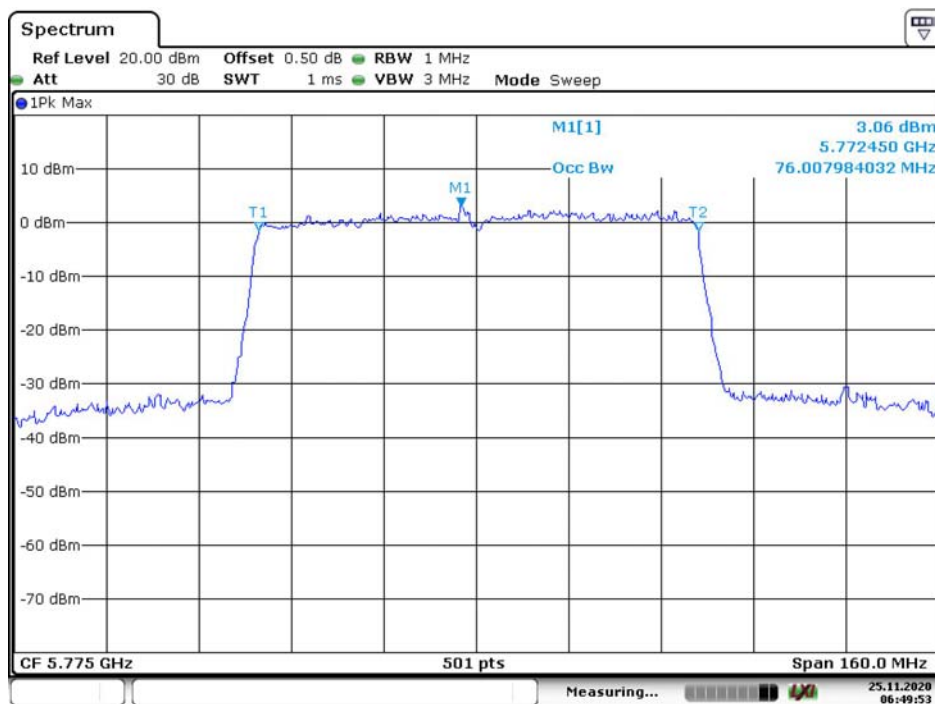

Date: 25.NOV.2020 06:49:54


Wi-Fi 1:
5150-5250 MHz:
26dB Emission Bandwidth:

802.11a Low Channel

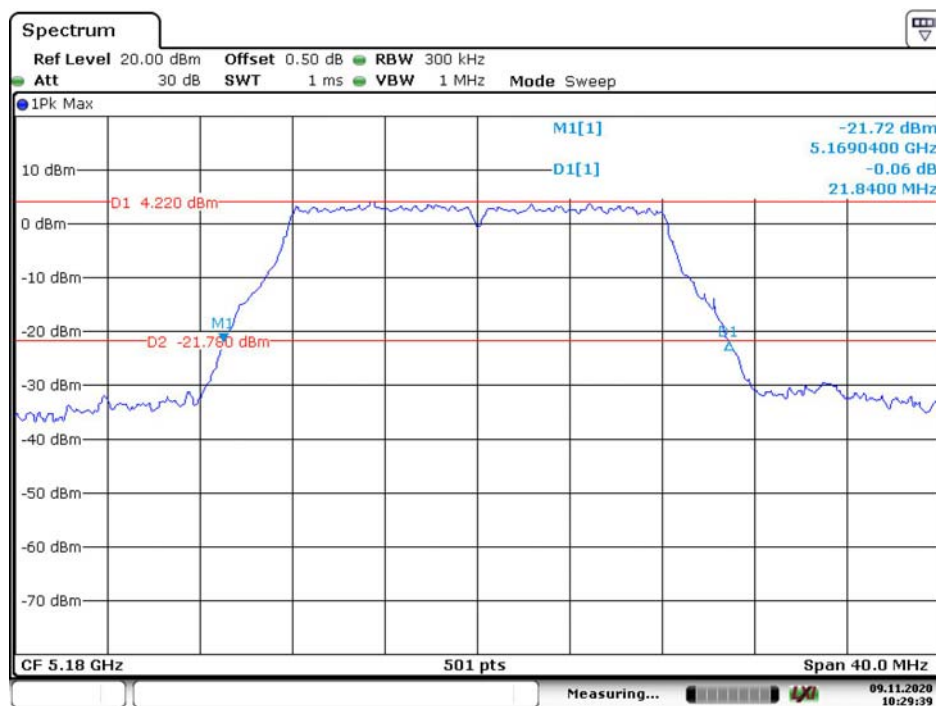


Date: 9.NOV.2020 10:29:39

802.11a Middle Channel

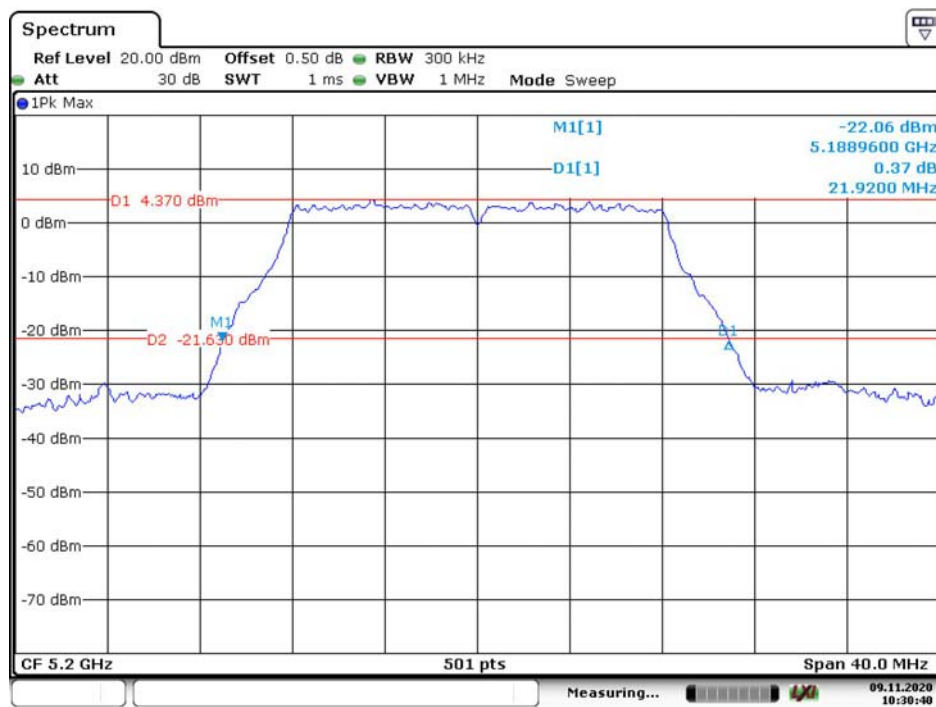


Date: 9.NOV.2020 10:30:40

802.11a High Channel

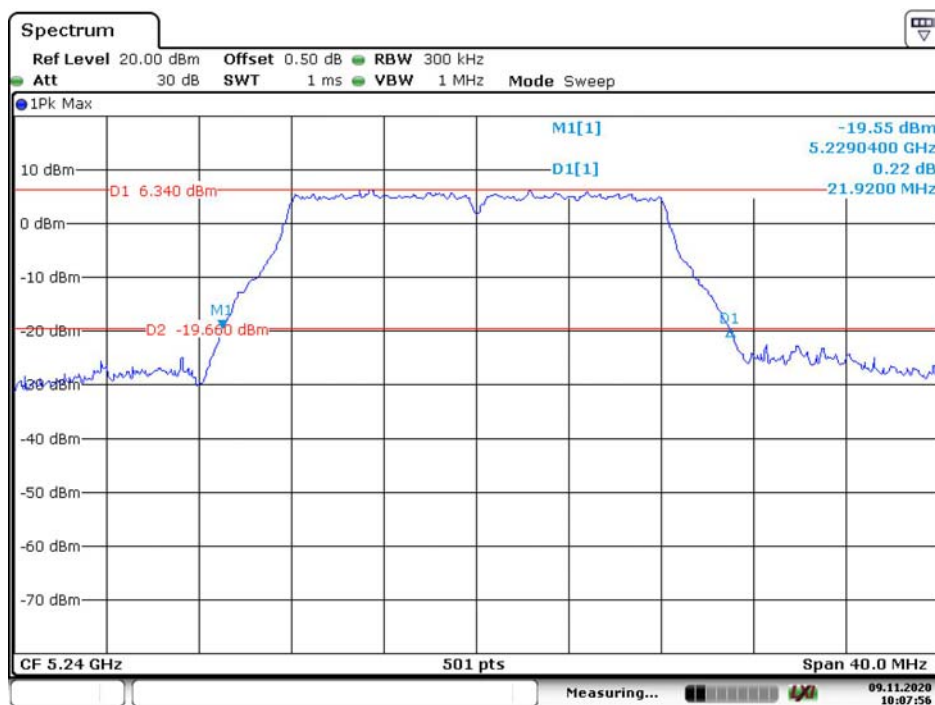

Date: 9.NOV.2020 10:07:56

802.11n ht20 Low Channel

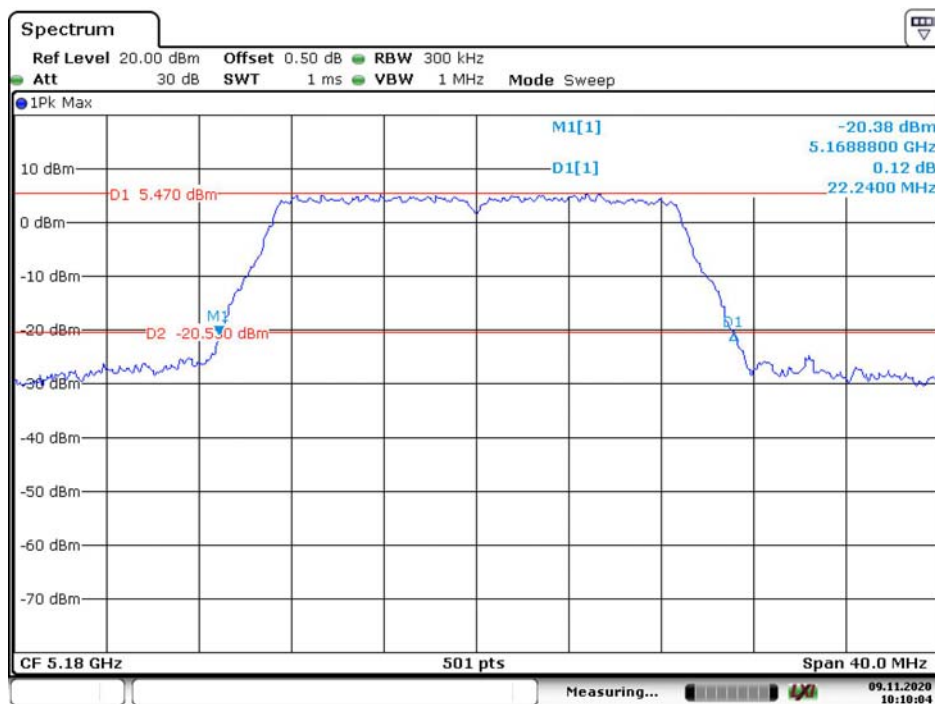

Date: 9.NOV.2020 10:10:03

Spectrum
 Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz
 Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep

1Pk Max

M1[1] -21.42 dBm
 5.1889600 GHz
 D1[1] -0.43 dBm
 22.1600 MHz

D1 4.250 dBm
 M1
 D2 -21.750 dBm

CF 5.2 GHz 501 pts Span 40.0 MHz

Measuring... 09.11.2020 10:33:51

Date: 9.NOV.2020 10:33:51

Spectrum

Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz
 Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep

1Pk Max

10 dBm
 0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm

D1 6.180 dBm
 D2 -19.820 dBm


M1[1]
 D1[1]

~19.44 dBm
 5.2290400 GHz
 -0.71 dB
 22.0800 MHz

CF 5.24 GHz 501 pts Span 40.0 MHz

Measuring... 09.11.2020 10:12:05

Date: 9.NOV.2020 10:12:05

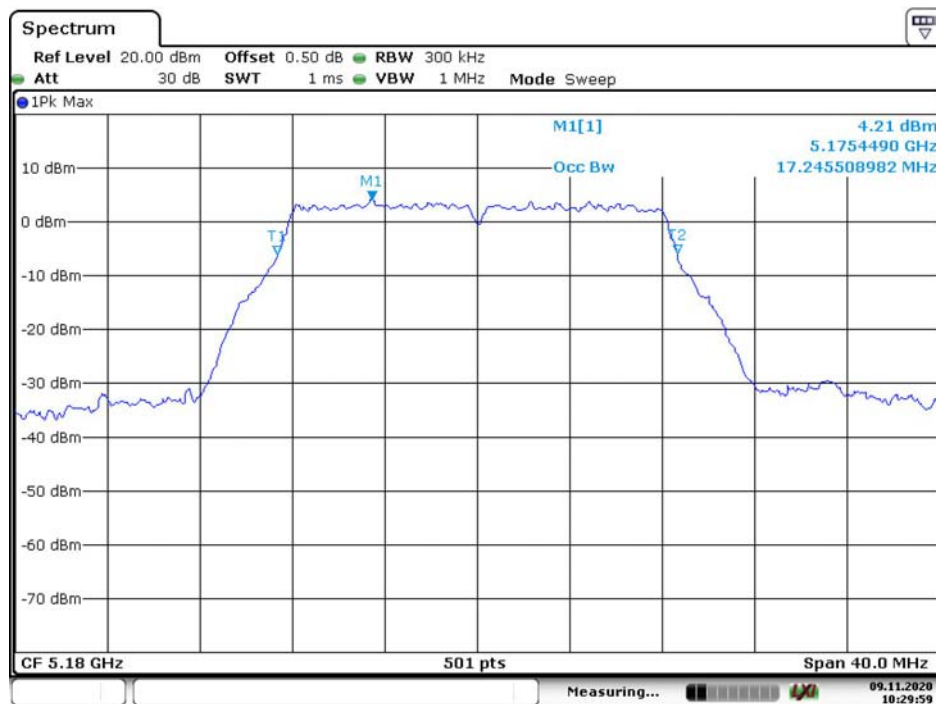
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 9.NOV.2020 10:29:59

802.11a Middle Channel


Date: 9.NOV.2020 10:30:56

802.11a High Channel

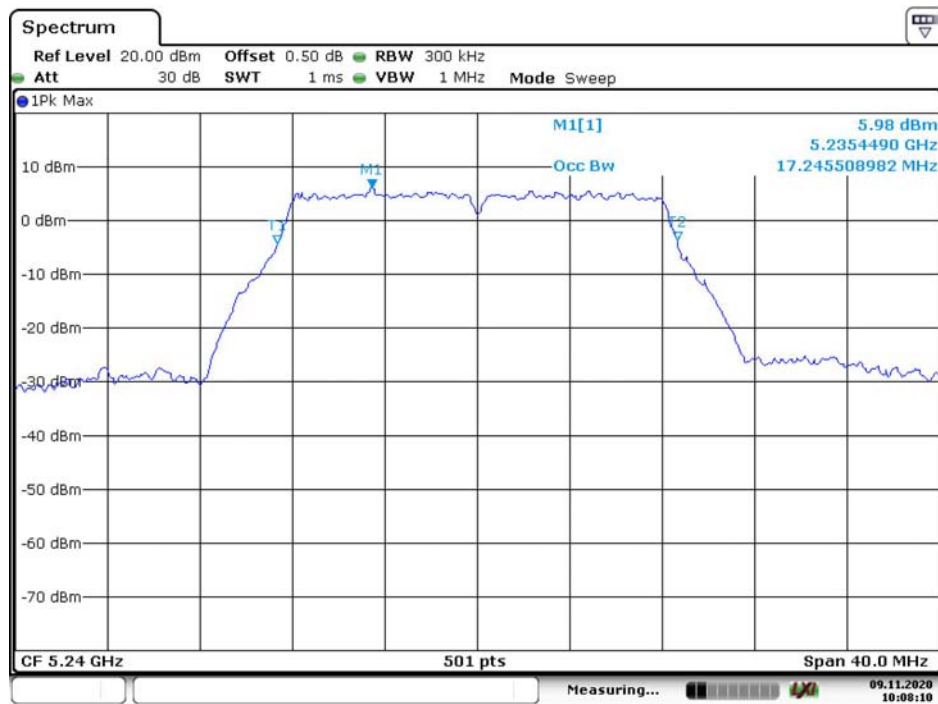


Date: 9.NOV.2020 10:08:10

802.11n ht20 Low Channel

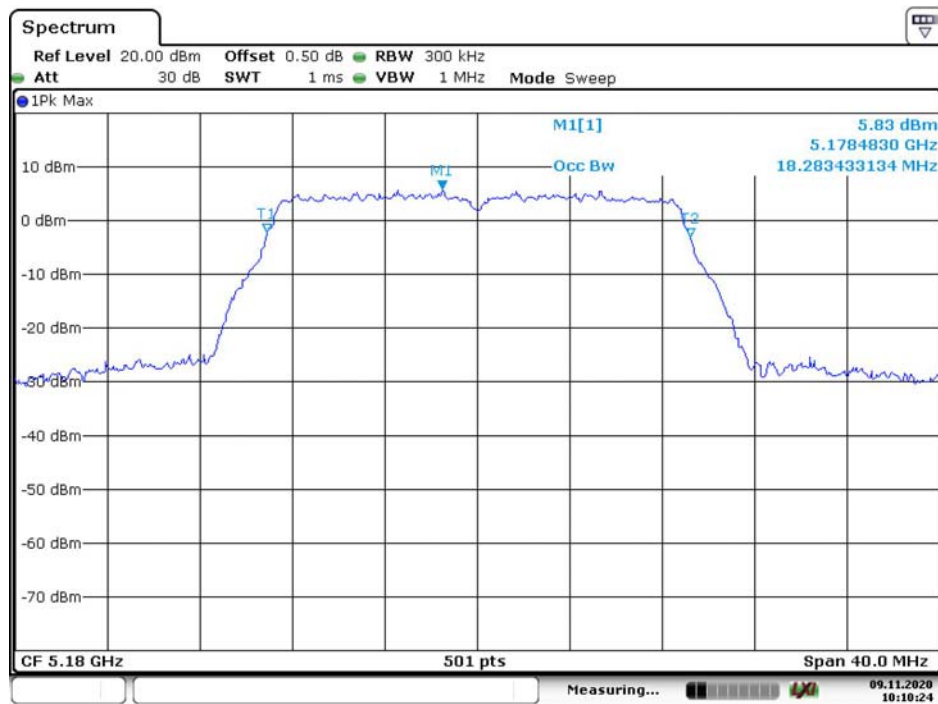


Date: 9.NOV.2020 10:10:24

802.11n ht20 Middle Channel

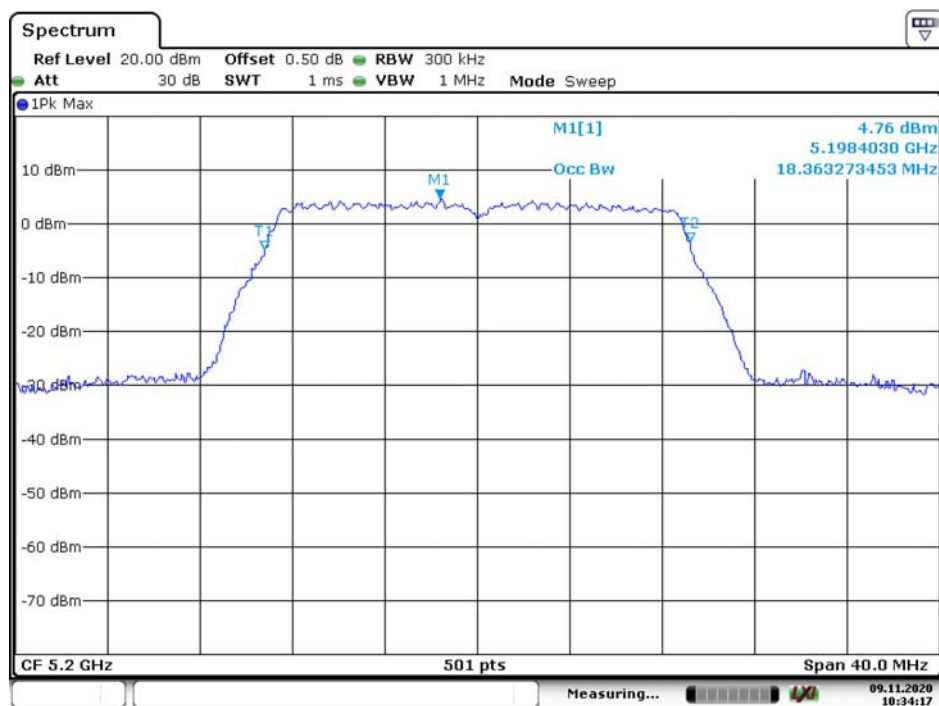

Date: 9.NOV.2020 10:34:17


802.11n ht20 High Channel

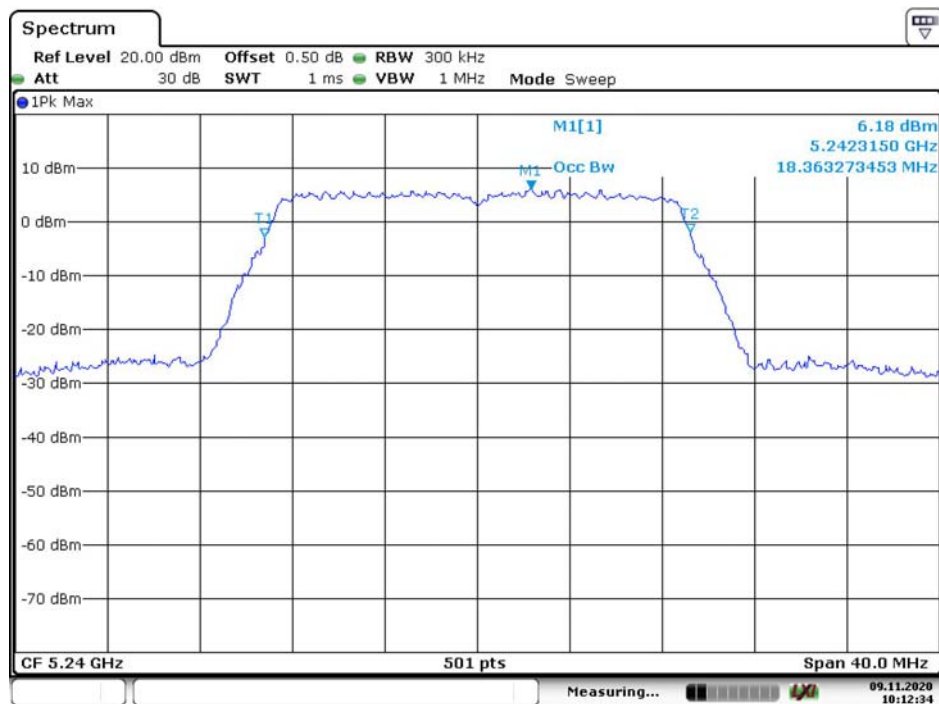


Date: 9.NOV.2020 10:12:34

5725-5850 MHz:
6dB Emission Bandwidth:


802.11a Low Channel

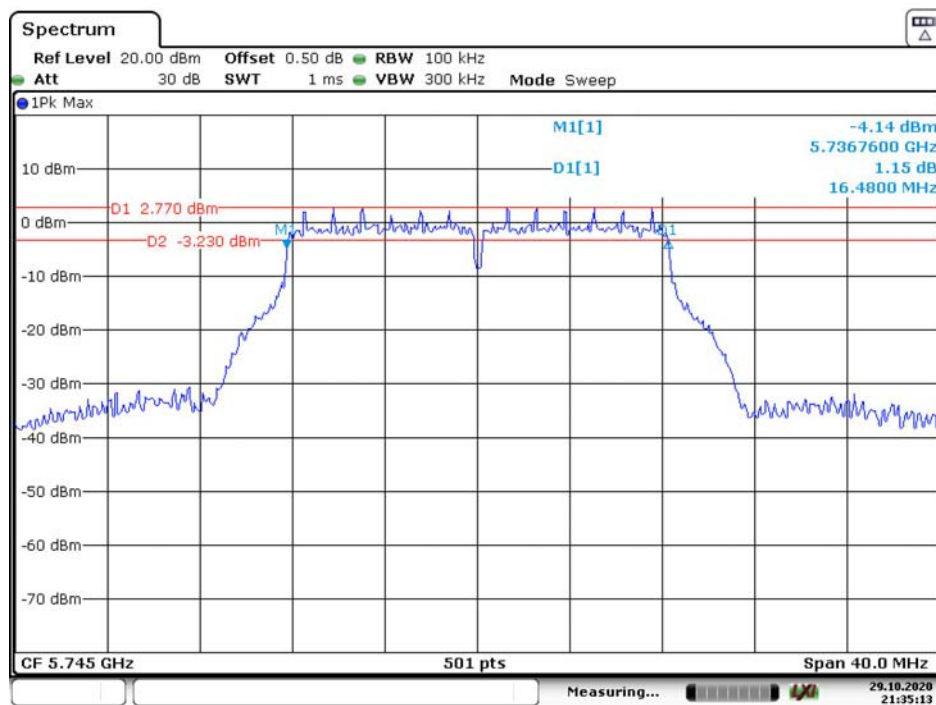

802.11a Middle Channel

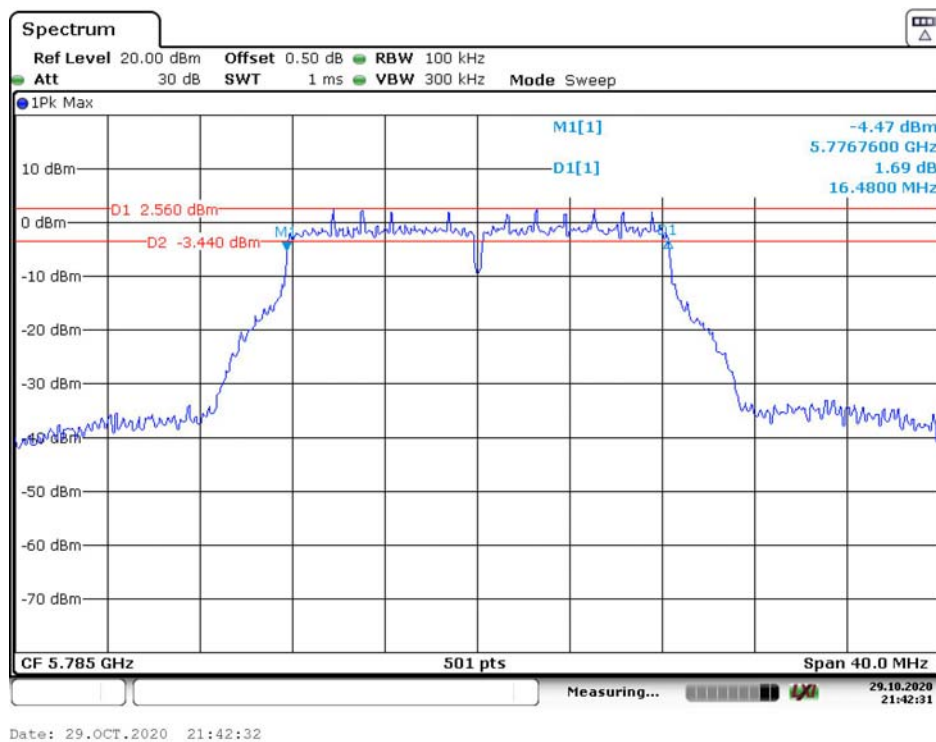


802.11a High Channel

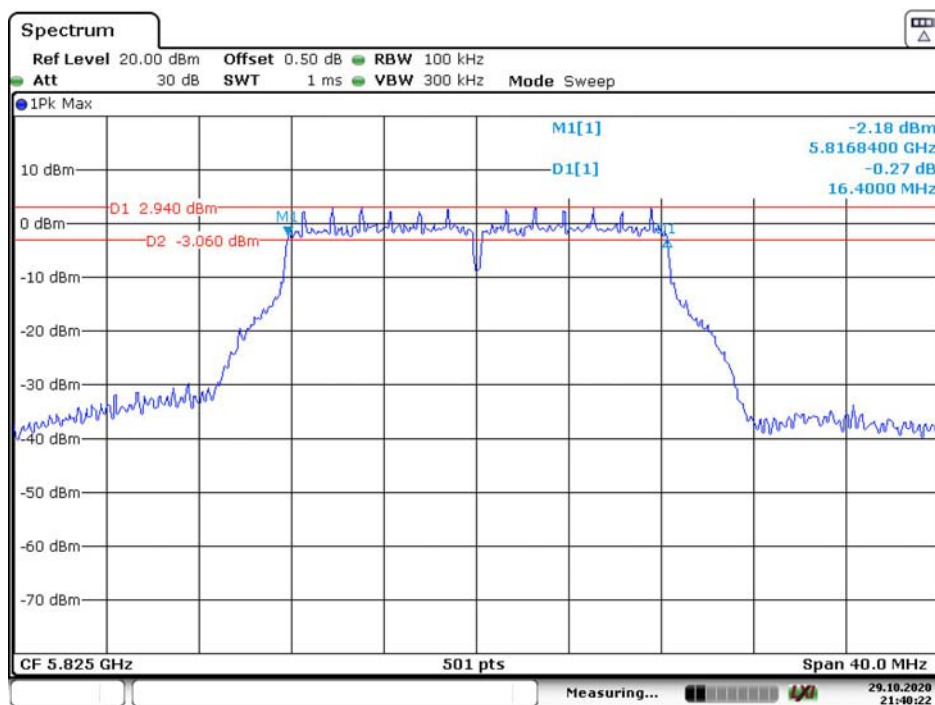


Date: 29.OCT.2020 21:40:22

802.11n ht20 Low Channel

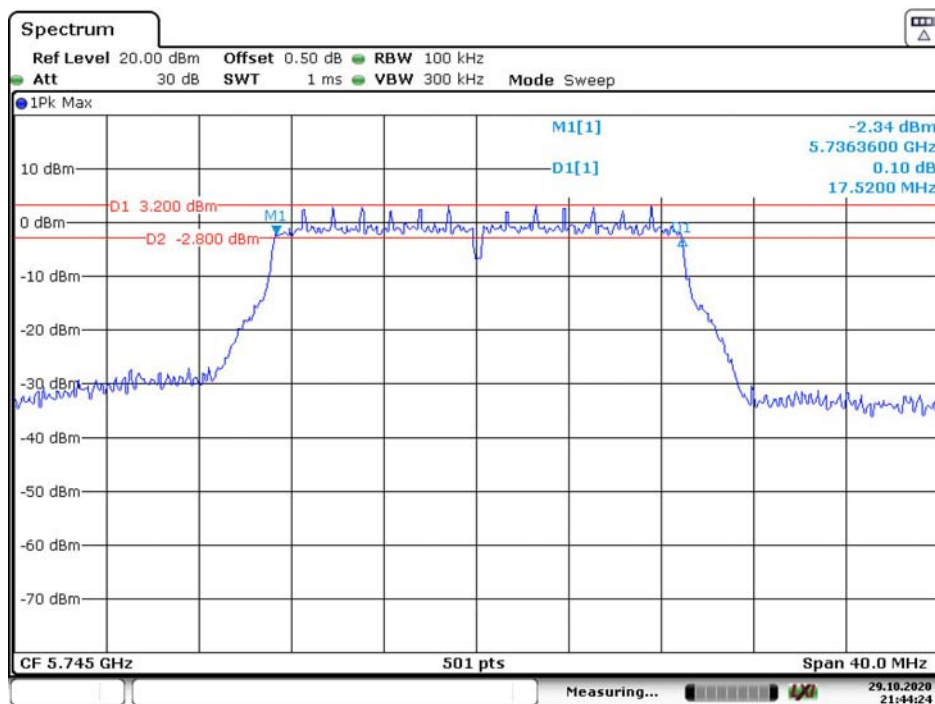


Date: 29.OCT.2020 21:44:24

802.11n ht20 Middle Channel

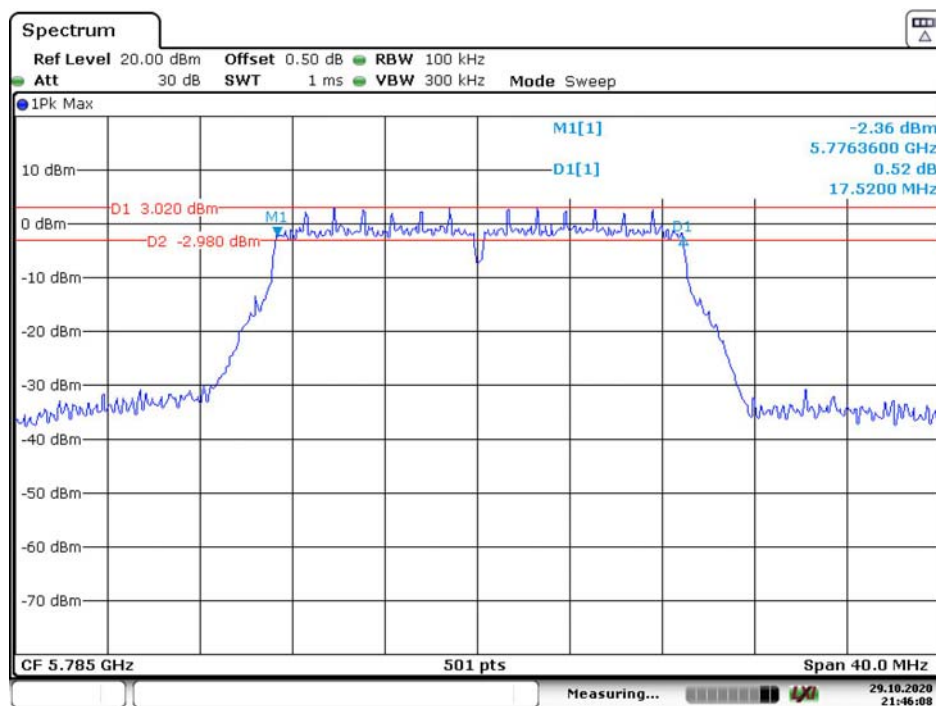


Date: 29.OCT.2020 21:46:08


802.11n ht20 High Channel

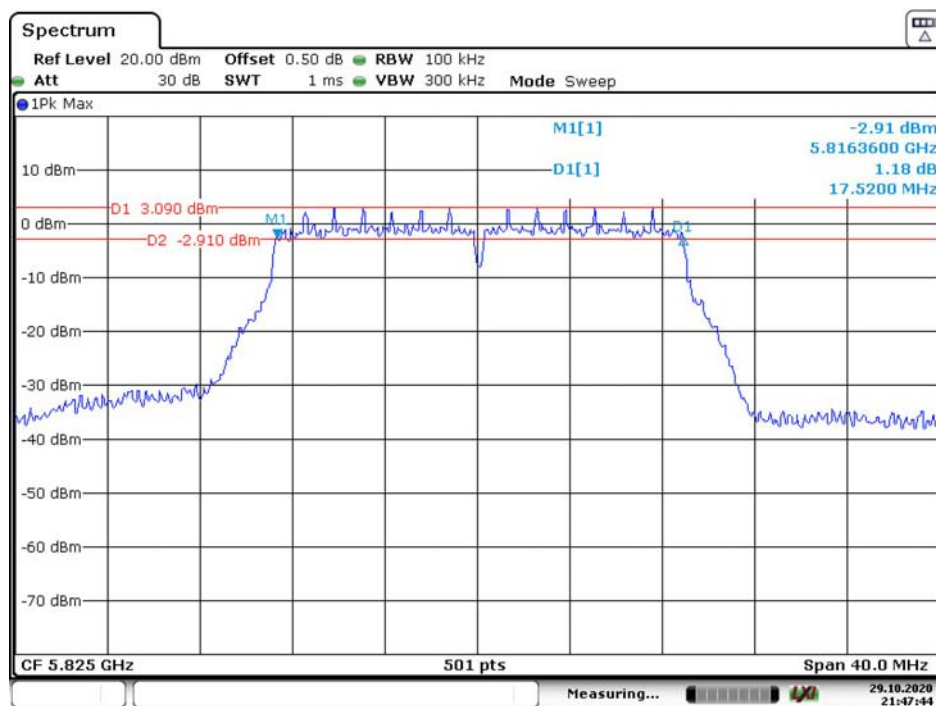

Date: 29.OCT.2020 21:47:45

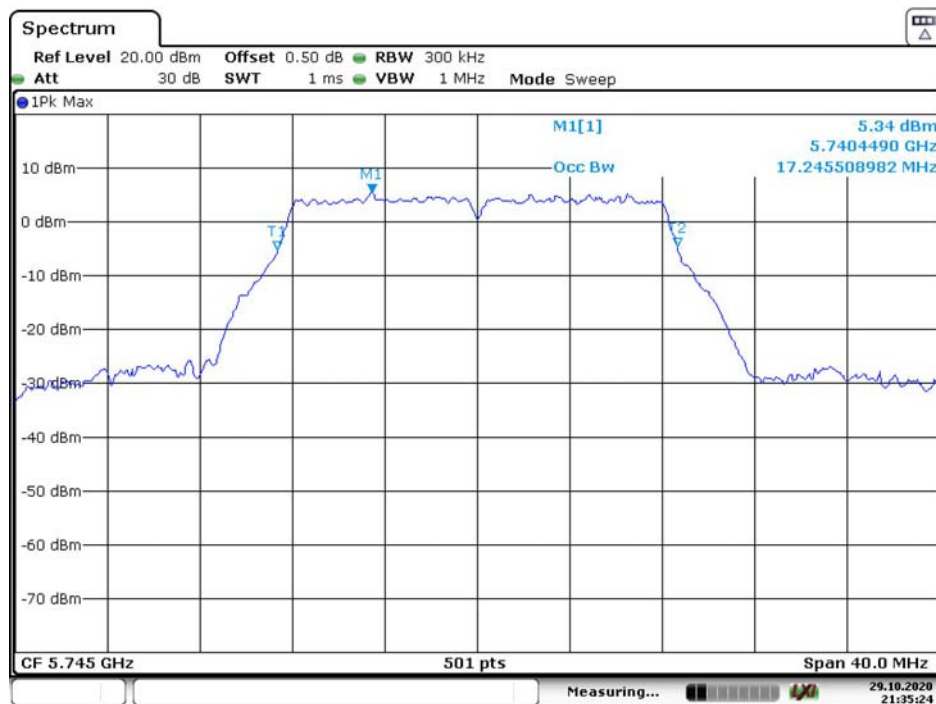
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 29.OCT.2020 21:35:24

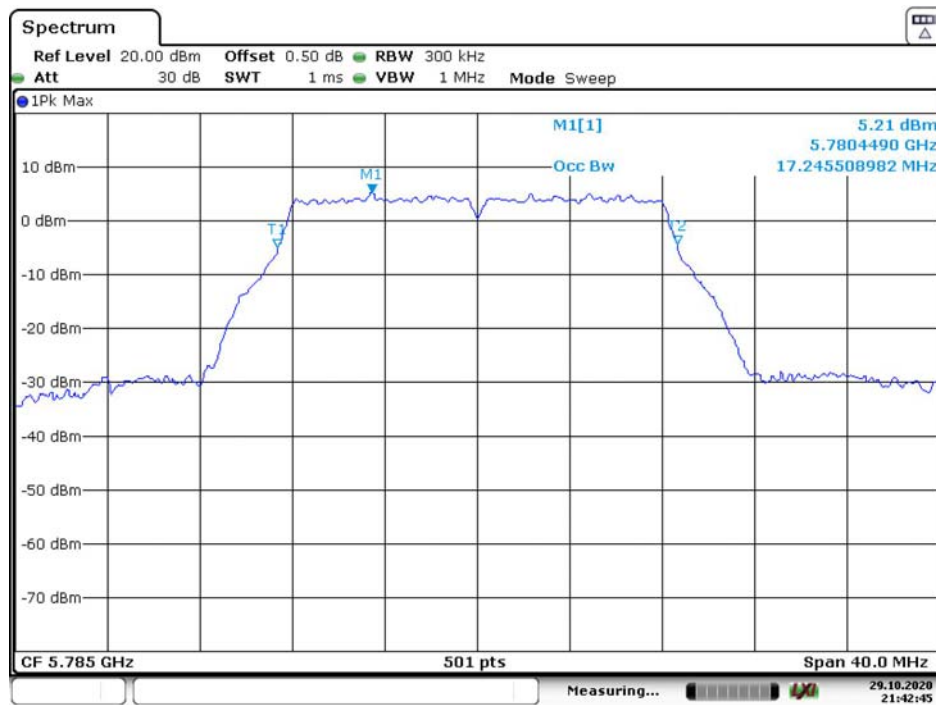802.11a Middle Channel


Date: 29.OCT.2020 21:42:46

802.11a High Channel

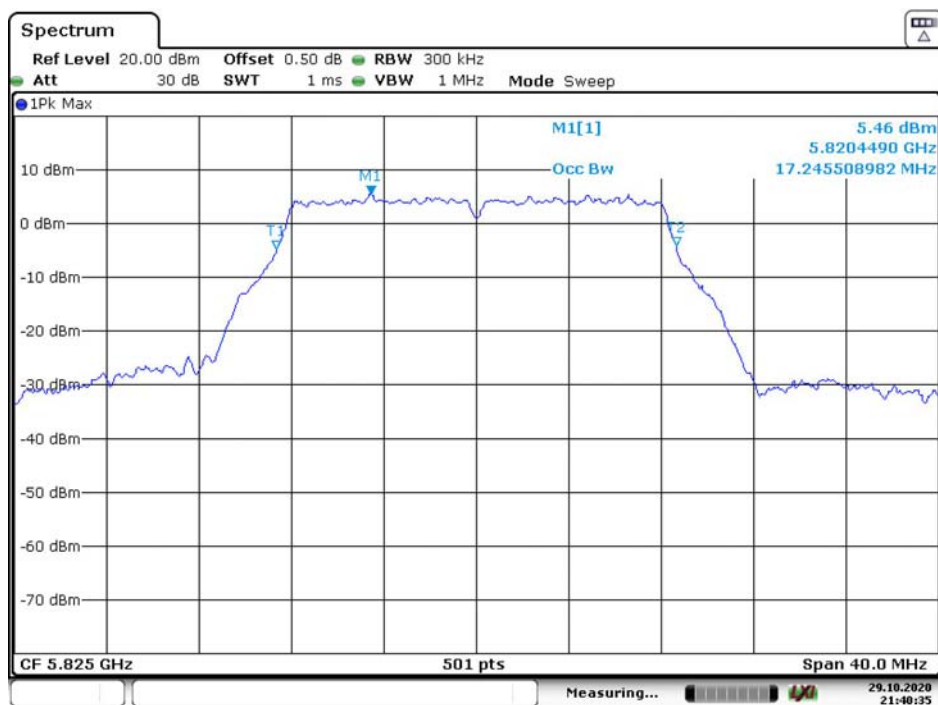


Date: 29.OCT.2020 21:40:36

802.11n ht20 Low Channel

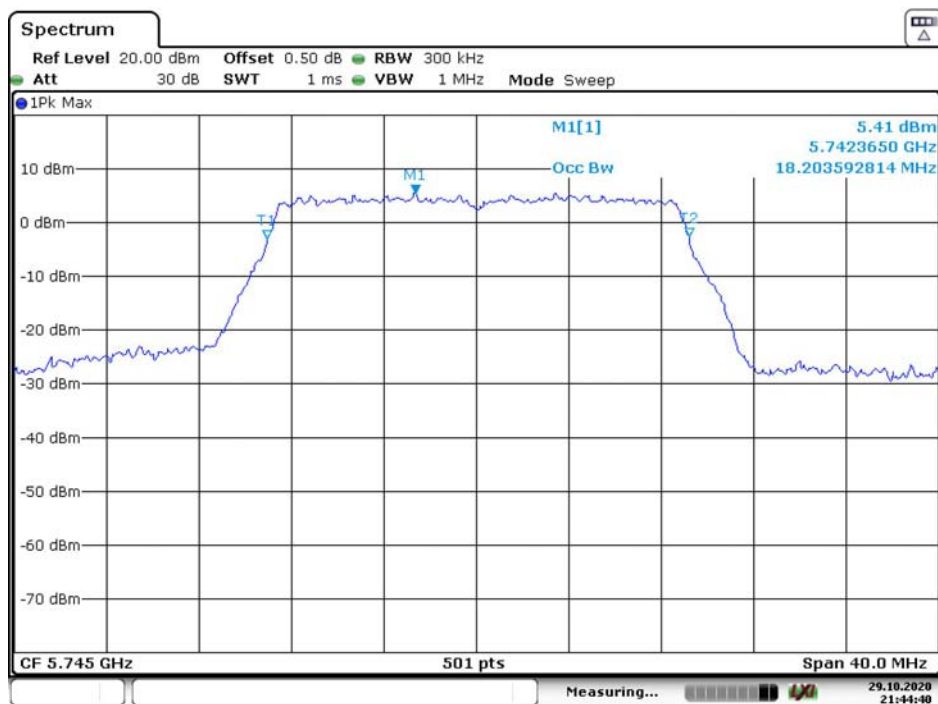


Date: 29.OCT.2020 21:44:41

802.11n ht20 Middle Channel

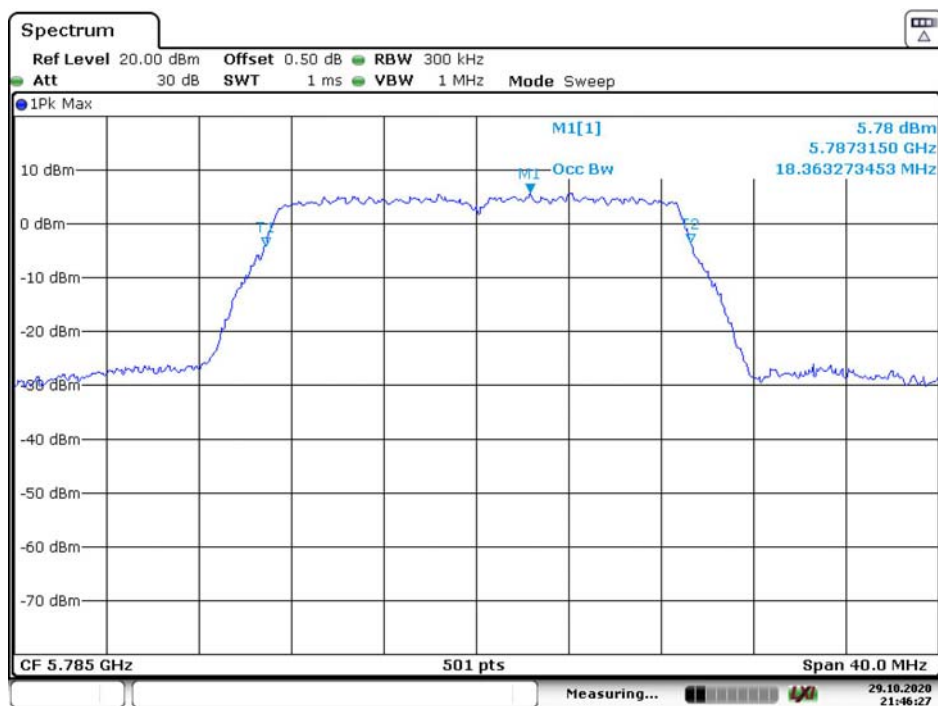

Date: 29.OCT.2020 21:46:28

802.11n ht20 High Channel

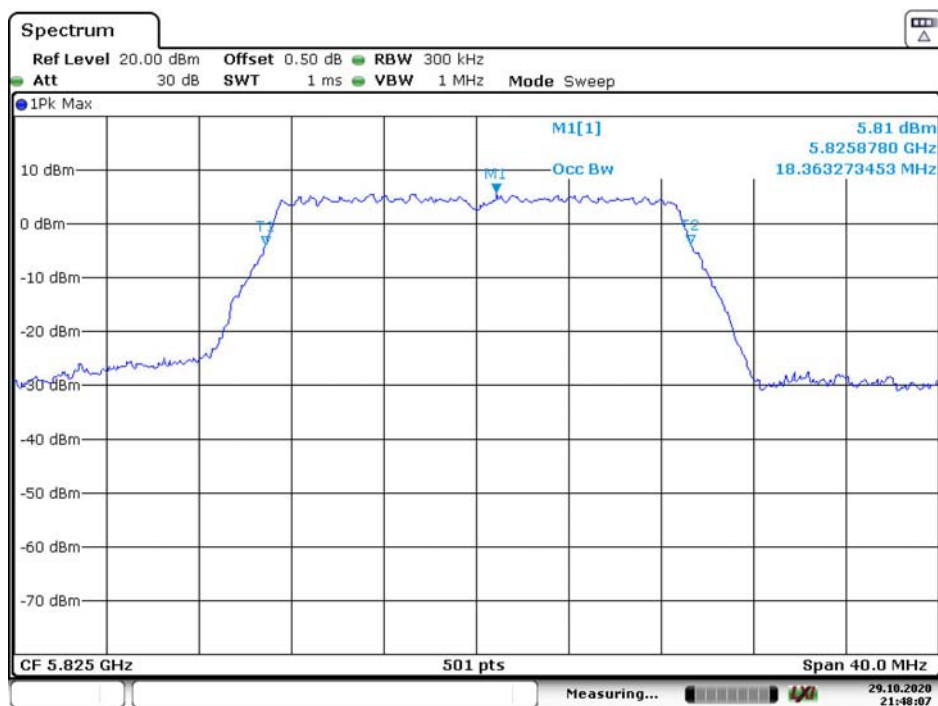

Date: 29.OCT.2020 21:46:08

FCC §15.407(a) & RSS-247 CLAUSE 6.2 –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

According to RSS-247 Clause 6.2:

Frequency band 5150-5250 MHz

6.2.1.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

6.2.2.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency bands 5470-5600 MHz and 5650-5725 MHz

6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint³ systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY54080014	2020-09-12	2021-09-12

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	28.4°C
Relative Humidity:	57 %
ATM Pressure:	100.1kPa
Tester:	Rennes Guo
Test Date:	2020-06-30