



FCC Test Report

Equipment : NxRemote Kit
Brand Name : NxRemote Kit
Model No. : NxBee
FCC ID : 2AGNZ-NXBEE01
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : Nxcontrol System Co., Ltd.
Manufacturer : 10F., No.257, Wenxing Rd., Zhubei City,
Hsinchu County 302, Taiwan (R.O.C.)

The product sample received on Nov. 26, 2015 and completely tested on Dec. 08, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Kevin Liang / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment.....	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Measurement Configuration.....	10
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	6dB Bandwidth	13
3.3	RF Output Power.....	15
3.4	Power Spectral Density	18
3.5	Transmitter Bandedge Emissions	20
3.6	Transmitter Unwanted Emissions.....	23
1.	TEST EQUIPMENT AND CALIBRATION DATA	38

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.3	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	Battery Power	FCC 15.207	-
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz]: 1.43	$\geq 500\text{kHz}$	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: -1.70	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/100kHz]: -24.29	PSD [dBm/3kHz]:8	Complied
3.5	15.247(d)	Transmitter Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2483.53MHz 65.04 (Margin 8.96dB) - PK 51.64 (Margin 2.36dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 4810.00MHz 40.19 (Margin 13.81dB) - AV 49.90 (Margin 24.10dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



Revision History



1 General Description

1.1 Information

1.1.1 Product Details

There are three sample of EUT. One is red color, white color and black color. The only difference is the appearance. For more detailed features description, please refer to the specifications or user's manual.

1.1.2 RF General Information

RF General Information					
Frequency Range (MHz)	Modulation	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)
2400-2483.5	O-QPSK	2405-2480	1-16 [16]	1	-1.70

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

1.1.3 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information				
No.	Ant. Cat.	Ant. Type	Ant. Connector	Gain (dBi)
1	Integral	Chip	Fixed on board	-8.57
2	Integral	Chip	Fixed on board	-16.3



1.1.4 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:	
<input type="checkbox"/> Other:	

1.1.5 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 27.03%	5.68

1.1.6 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input checked="" type="checkbox"/> Internal DC supply	<input type="checkbox"/> External AC adapter	<input type="checkbox"/> Li-ion Battery



1.2 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	ASUS Phone (Client Provide)	ASUS	ASUS_Z00XS	MSQZ00XS
2	NxRemote Kit	NxRemote Kit	NxRemote	2AGNZ-NXREMOTE01

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v03r03

1.4 Testing Location Information

Testing Location						
<input checked="" type="checkbox"/>	HWA YA	ADD :	No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.			
TEL : 886-3-327-0973 FAX : 886-3-327-0973						
Test Site Registration Number: 636805						
Test Condition	Test Site No.		Test Engineer	Test Environment		
RF Conducted	TH01-HY		Howard	22.5°C / 61%		
Radiated Emission	03CH09-HY		Terry	23.2°C / 59%		



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty		
Test Item	Uncertainty	
Emission bandwidth, 6dB bandwidth	±0.6 %	
RF output power, conducted	±0.1 dB	
Power density, conducted	±0.6 dB	
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.6 dB
	1 – 18 GHz	±0.5 dB
	18 – 40 GHz	±0.5 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature	±0.8 °C	
Humidity	±5 %	
DC and low frequency voltages	±0.9 %	
Time	±1.4 %	
Duty Cycle	±0.6 %	



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing		
Modulation Mode	Transmit Chains (N_{TX})	RF Output Power (dBm)
O-QPSK	1	-1.70

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Modulation Mode	Test Channel Frequencies (MHz)
O-QPSK	2405, 2440, 2480




2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	O-QPSK


The Worst Case Mode for Following Conformance Tests							
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions						
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.						
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.						
Operating Mode	Operating Mode Description						
Radiated Emissions	1. Normal Mode 2. Transmit Mode						
Modulation Mode	O-QPSK						
Orthogonal Planes of EUT	<table><thead><tr><th>X Plane</th><th>Y Plane</th><th>Z Plane</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					
Worst Planes of EUT	V						

2.4 Test Setup Diagram

Test Setup Diagram - Radiated Test Mode 1

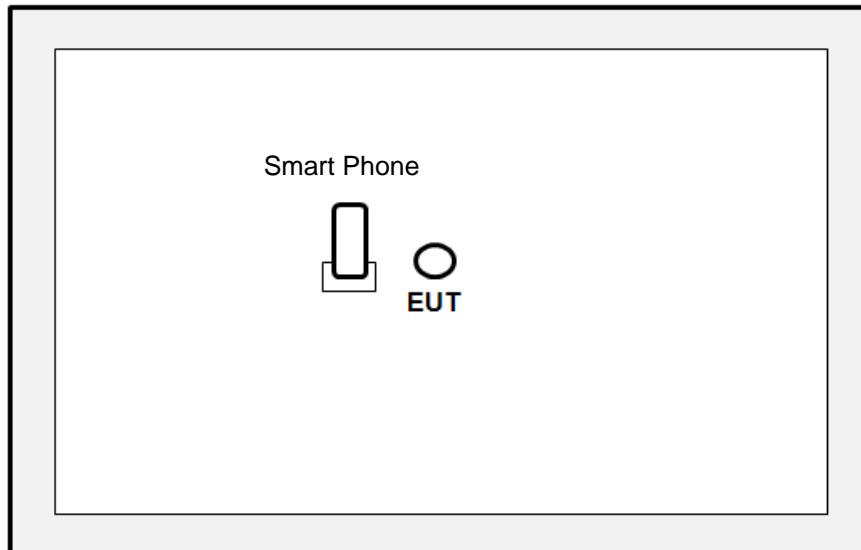

Test Setup Diagram - Radiated Test Mode 2

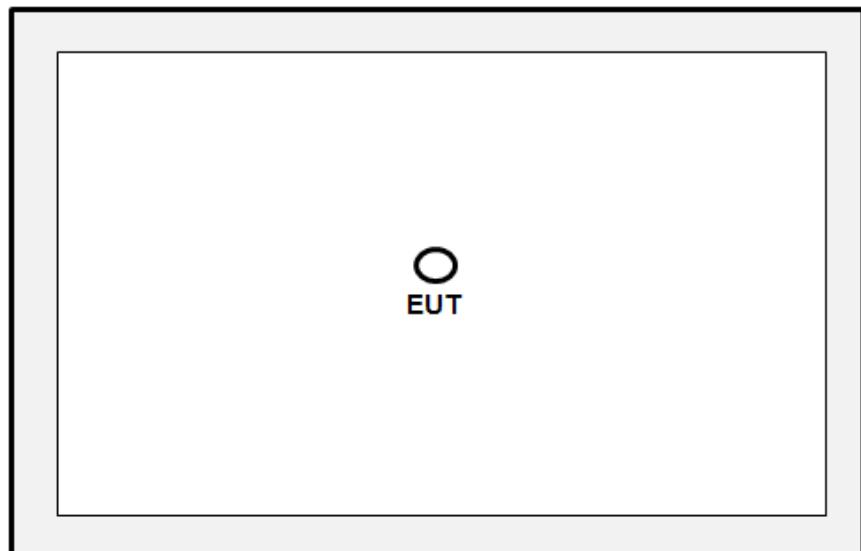

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

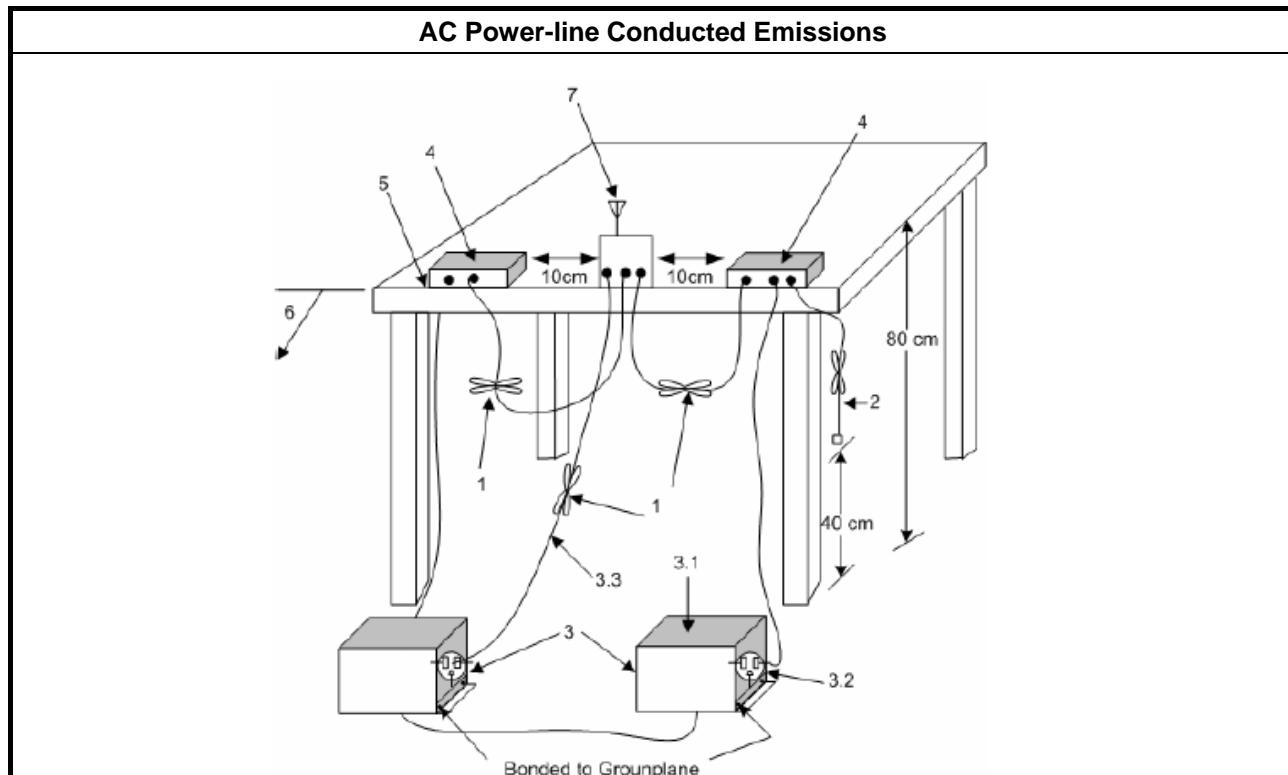

3.1.5 Test Result of AC Power-line Conducted Emissions

The EUT is battery powered and the AC power line Conducted Emission is not required.

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<input checked="" type="checkbox"/> 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.


3.2.4 Test Setup

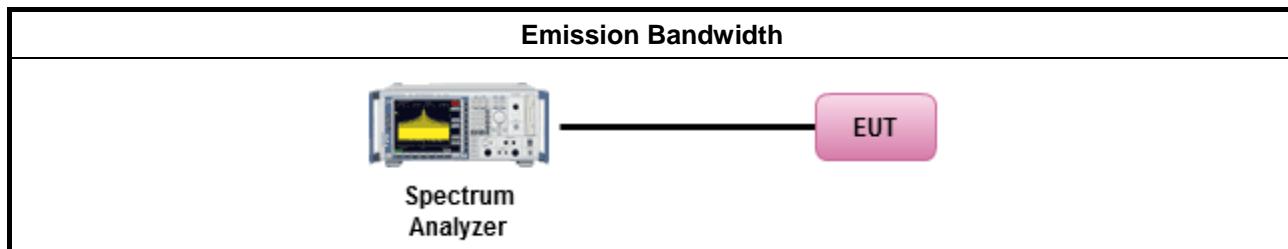



3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	6dB Bandwidth
O-QPSK	1	2405	2.30	1.55
O-QPSK	1	2440	2.34	1.43
O-QPSK	1	2480	2.32	1.47
Limit			N/A	≥500 kHz
Result			Complied	

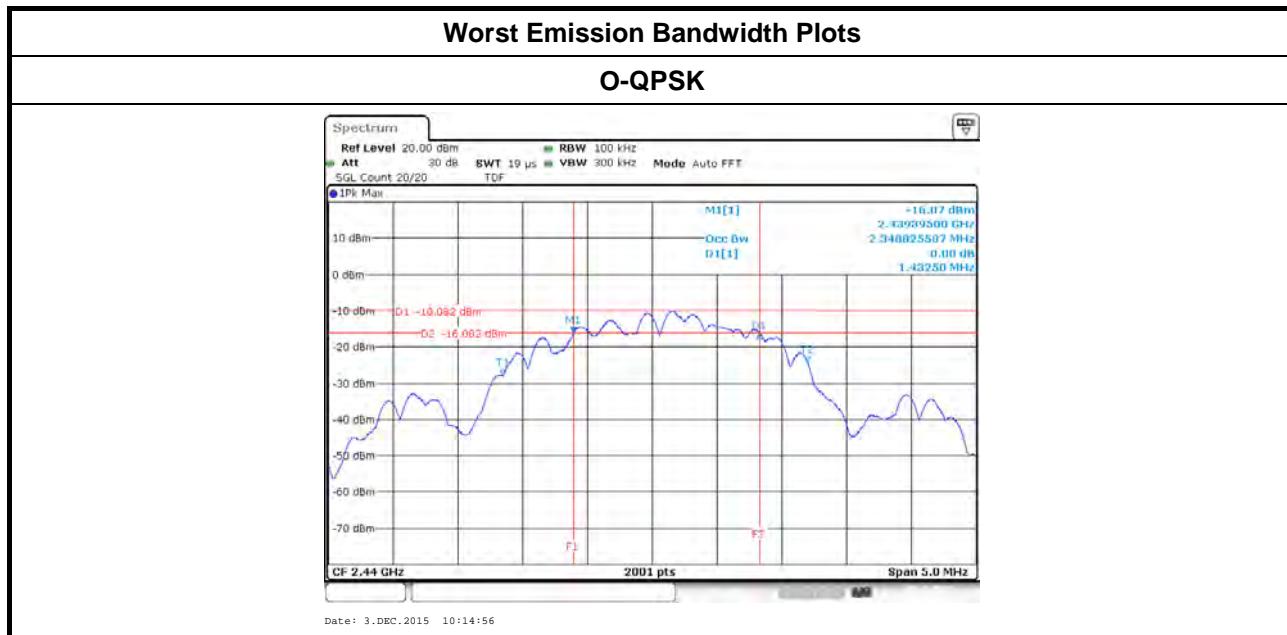Note 1: N_{TX} = Number of Transmit Chains



3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm	
<input type="checkbox"/> Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	
<input type="checkbox"/> Smart antenna system (SAS):	
	<input type="checkbox"/> Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)	
<input type="checkbox"/> Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm	
<input type="checkbox"/> Smart antenna system (SAS)	
	<input type="checkbox"/> Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.1 (RBW \geq EBW method). <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.2 (peak power meter for VBW \geq DTS BW).
<input checked="" type="checkbox"/> Maximum Conducted Output Power	[duty cycle \geq 98% or external video / power trigger] <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed) RF power meter and average over on/off periods with duty factor or gated trigger <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/> For conducted measurement.	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain. <input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case. <input type="checkbox"/> The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. <input type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

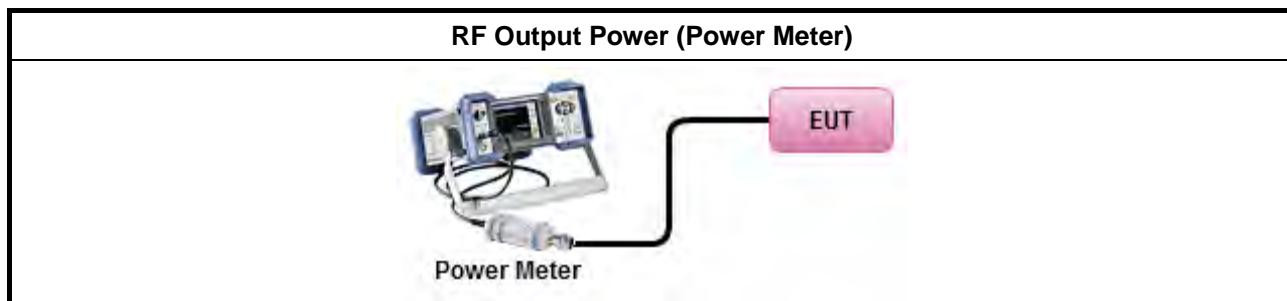



3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	Ant. Gain (dBi)	EIRP Power	EIRP Limit
O-QPSK	1	2405	-2.09	30.00	-8.57	-10.66	36.00
O-QPSK	1	2440	-1.70	30.00	-8.57	-10.27	36.00
O-QPSK	1	2480	-5.51	30.00	-8.57	-14.08	36.00
Result		Complied					

3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	Ant. Gain (dBi)	EIRP Power	EIRP Limit
O-QPSK	1	2405	-3.76	30.00	-8.57	-12.33	36.00
O-QPSK	1	2440	-4.00	30.00	-8.57	-12.57	36.00
O-QPSK	1	2480	-8.37	30.00	-8.57	-16.94	36.00
Result		Complied					



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) $\leq 8 \text{ dBm/3kHz}$


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak).. [duty cycle $\geq 98\%$ or external video / power trigger]
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)
duty cycle $< 98\%$ and average over on/off periods with duty factor
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N_{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

3.4.4 Test Setup

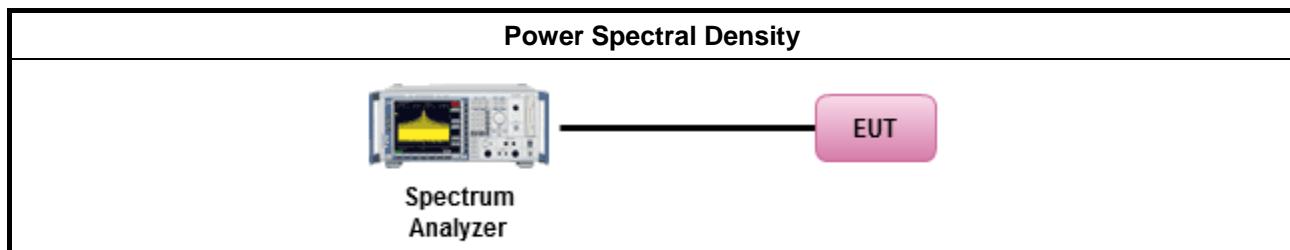

3.4.5 Test Result of Power Spectral Density


Power Spectral Density Result				
Modulation Mode	N _{TX}	Freq. (MHz)	Power Spectral Density (dBm/100kHz)	Power Limit (dBm/3kHz)
O-QPSK	1	2405	-24.29	8.00
O-QPSK	1	2440	-25.38	8.00
O-QPSK	1	2480	-30.03	8.00
Result		Complied		

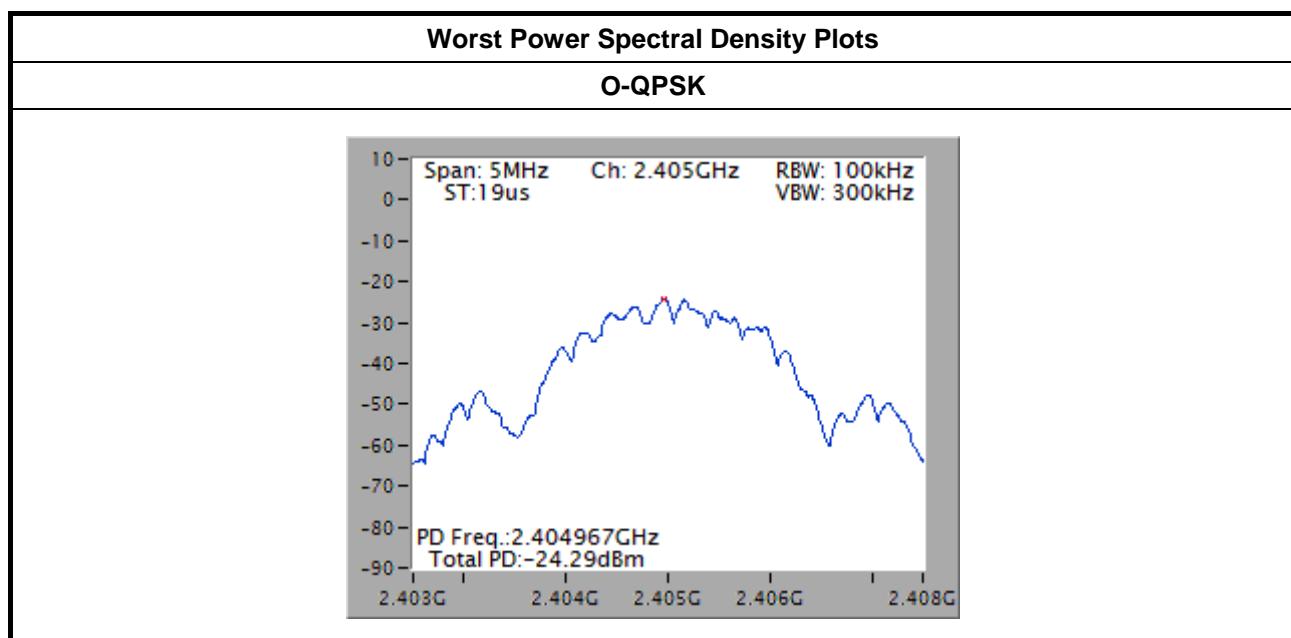

Note: Have been offset 15.2dBm for 3kHz data.

3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

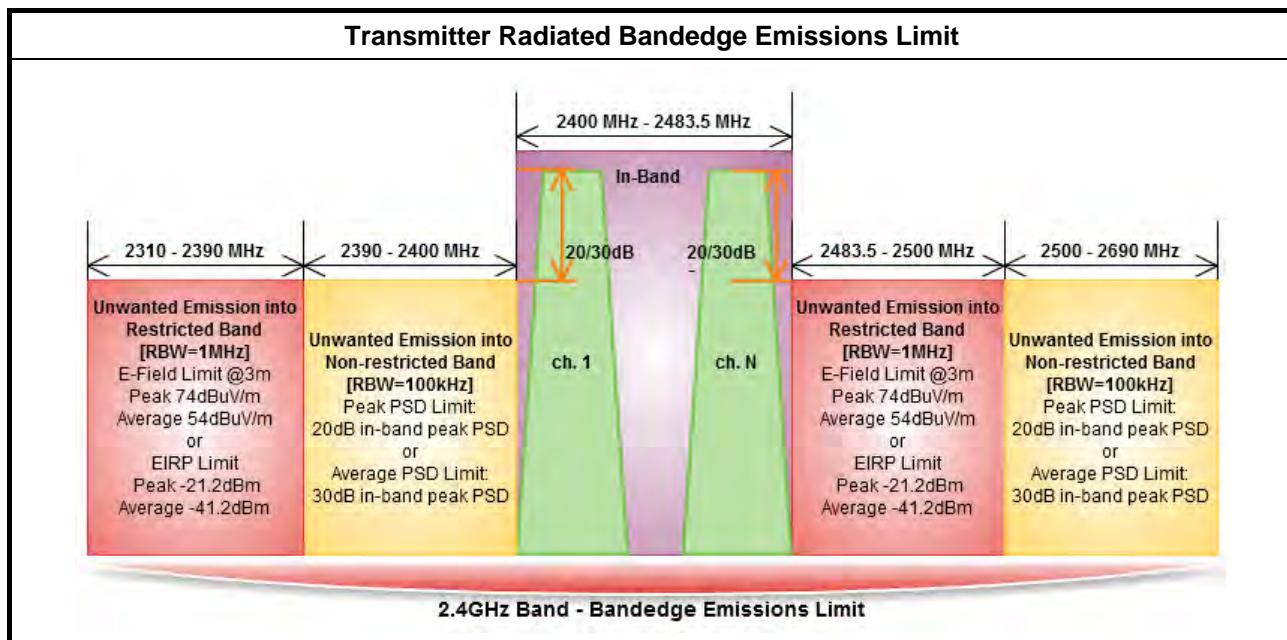

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW \geq 1/T).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.

3.5.4 Test Setup



3.5.5 Transmitter Radiated Bandedge Emissions

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)

Modulation	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
O-QPSK	2405	96.32	2399.99	56.97	39.35	20	H
O-QPSK	2475	83.92	2507.88	46.39	37.53	20	H

Note 1: Measurement worst emissions of receive antenna polarization

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)

Modulation Mode	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
O-QPSK	2405	3	2389.59	62.64	74	2373.21	47.34	54	H
O-QPSK	2475	3	2483.61	65.04	74	2483.53	51.64	54	H

Note 1: Measurement worst emissions of receive antenna polarization.

Note 2: Average emission setting: RBW=1MHz; VBW \geq 1/T, where T is "Pulse On Time", e.g., LE VBW \geq 1/625us, VBW=3kHz.



3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/> The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/> For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/> For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/> The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/> All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.6.4 Test Setup

Transmitter Radiated Unwanted Emissions (below 1GHz)

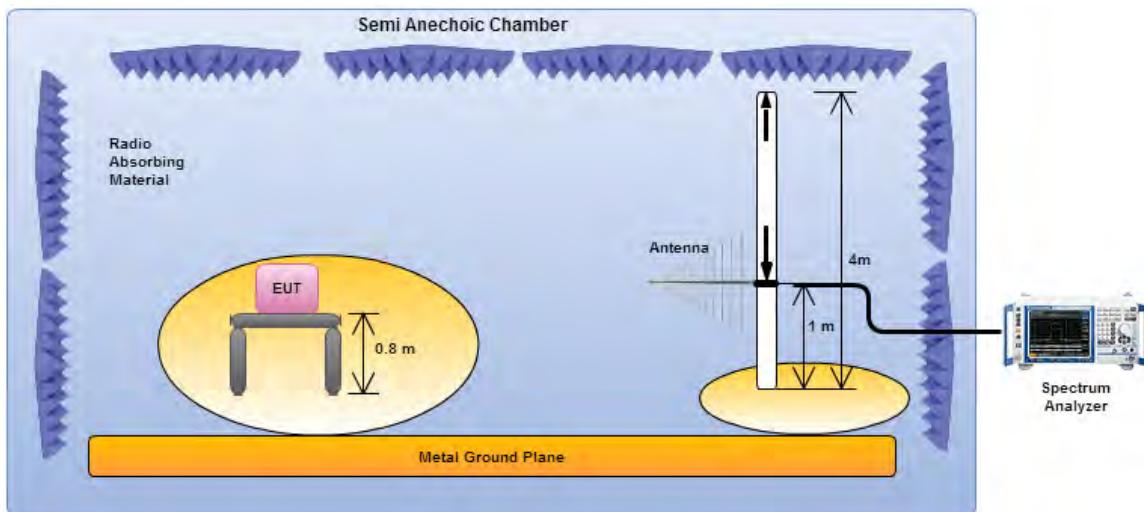

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

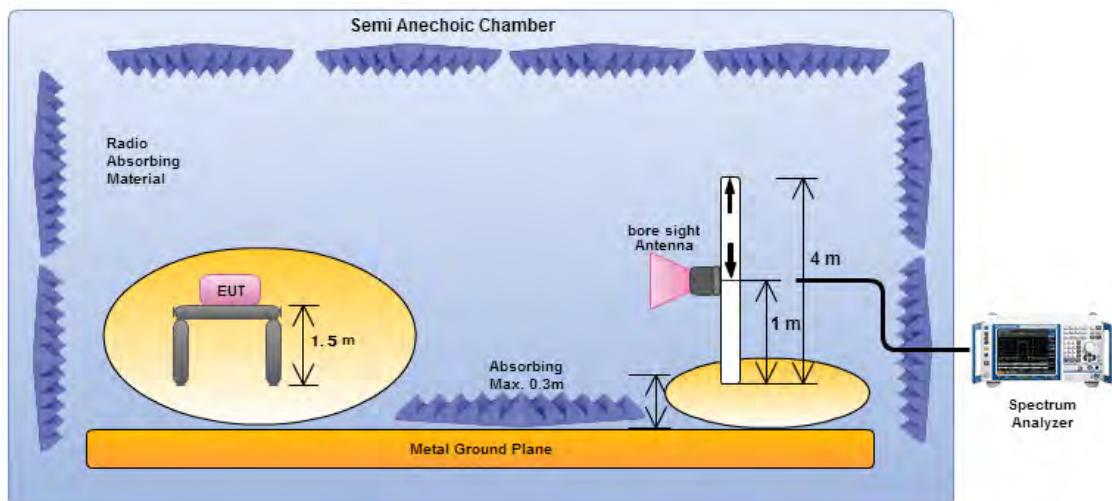


Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

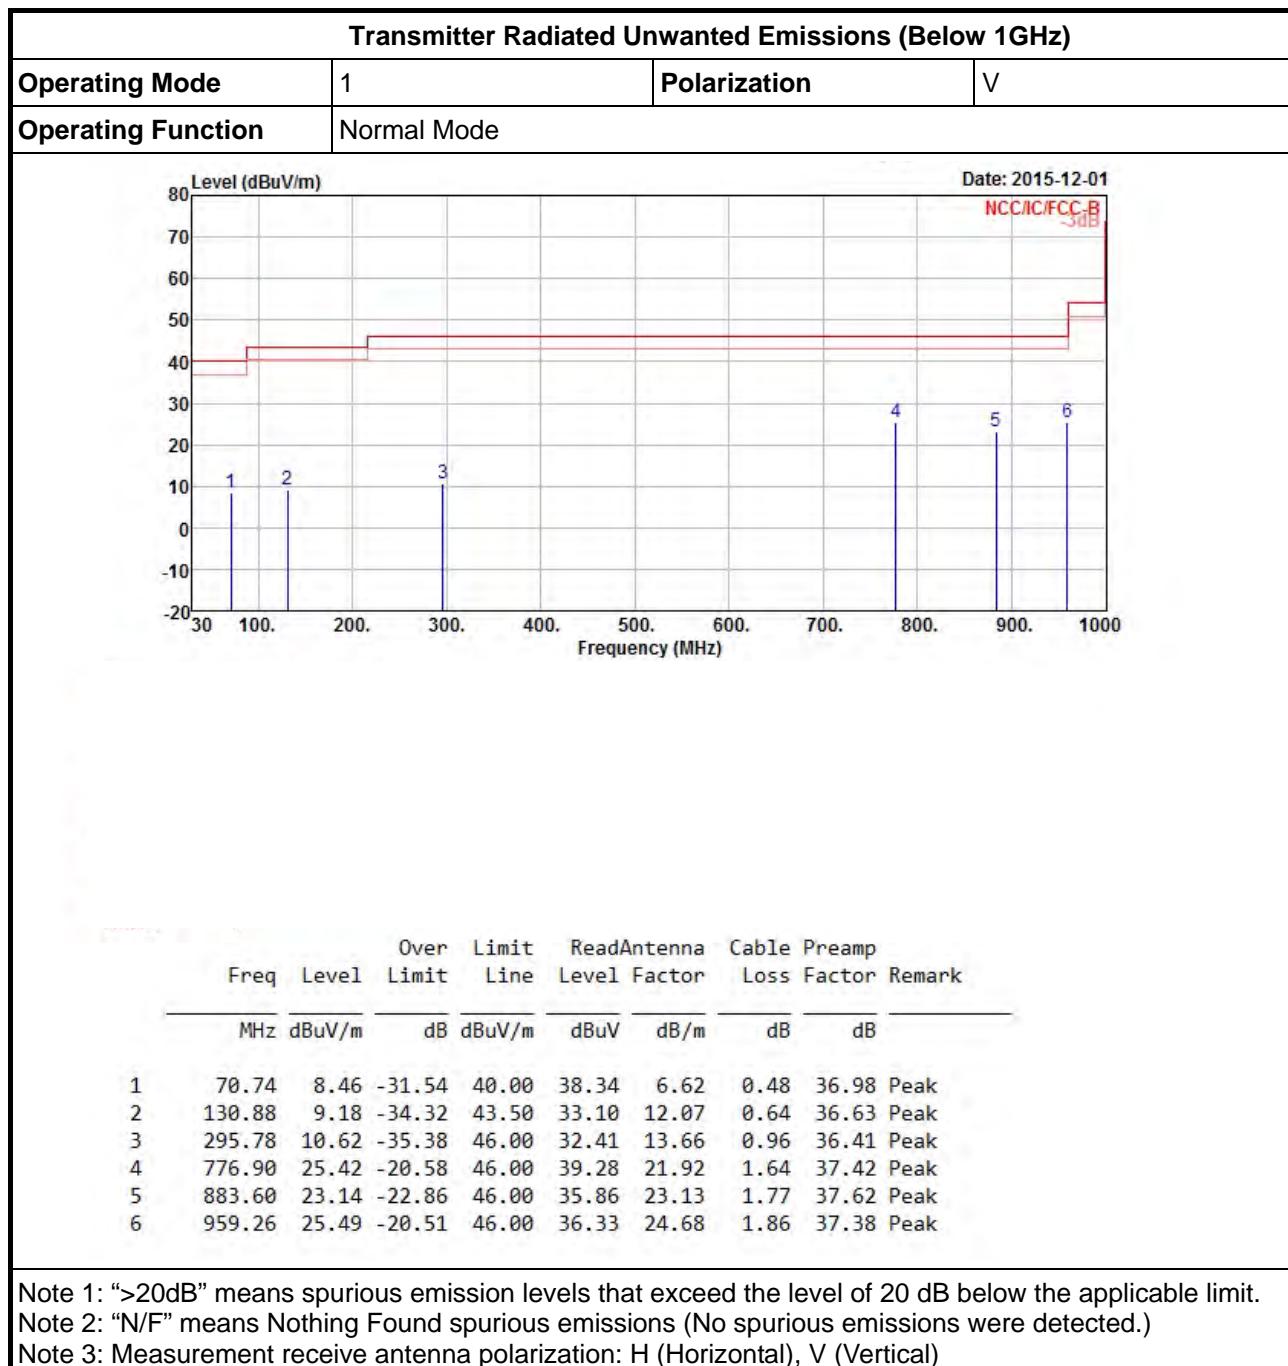





Transmitter Radiated Unwanted Emissions (Below 1GHz)

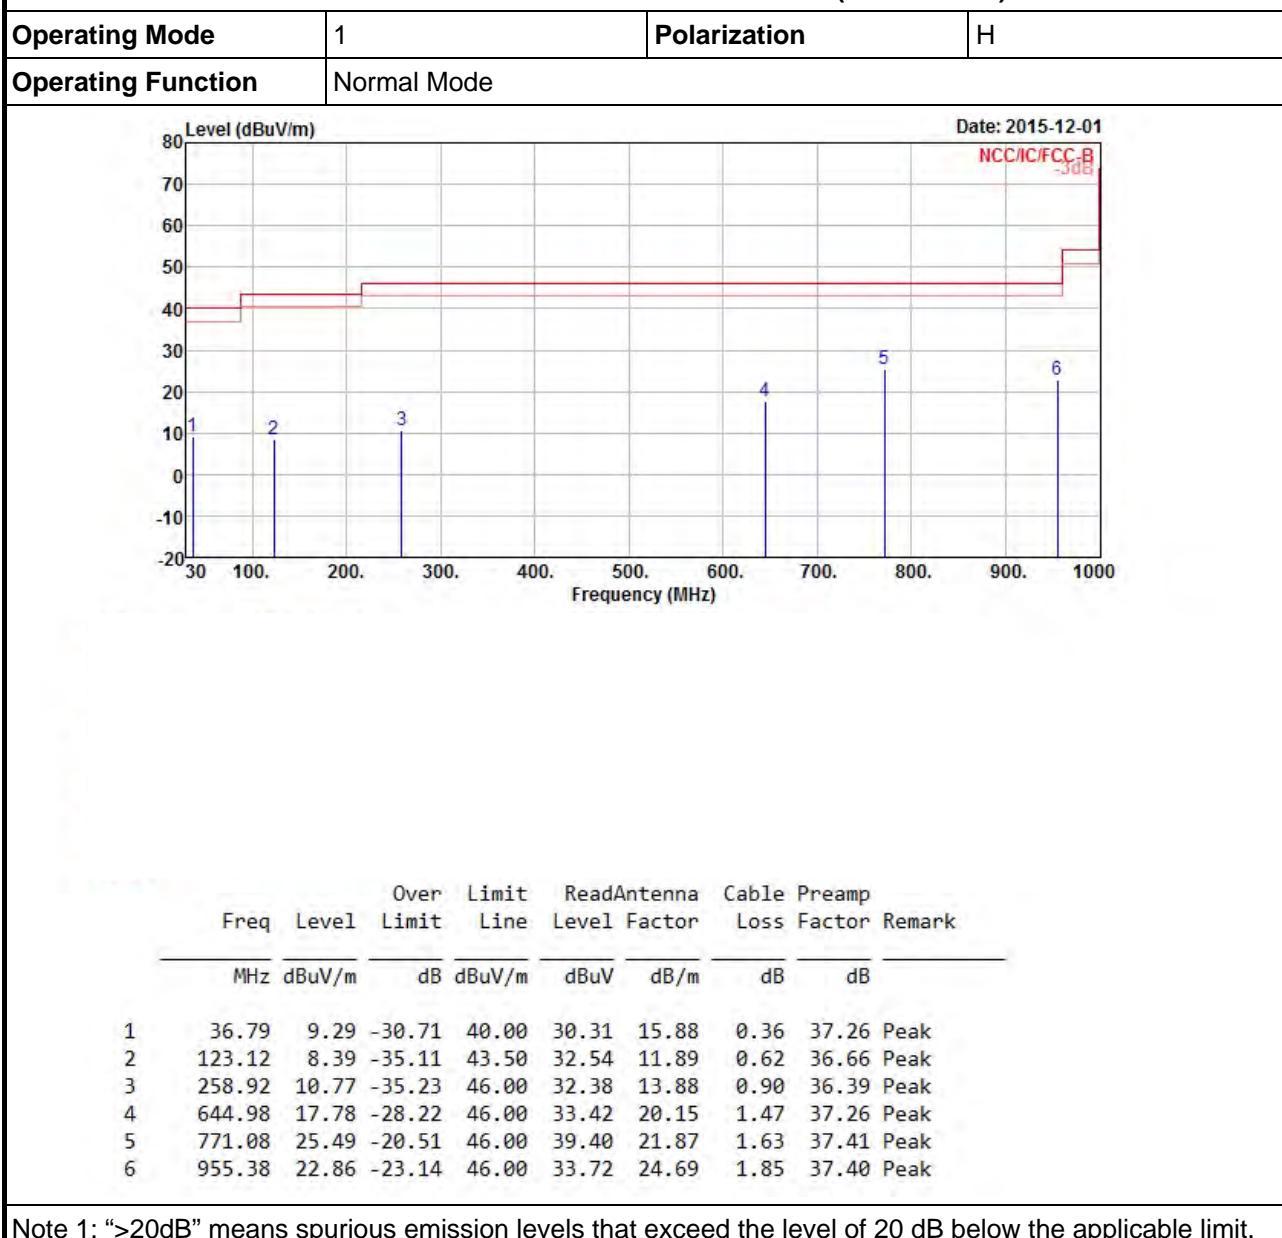



Radiated Unwanted Emissions (Below 1GHz)

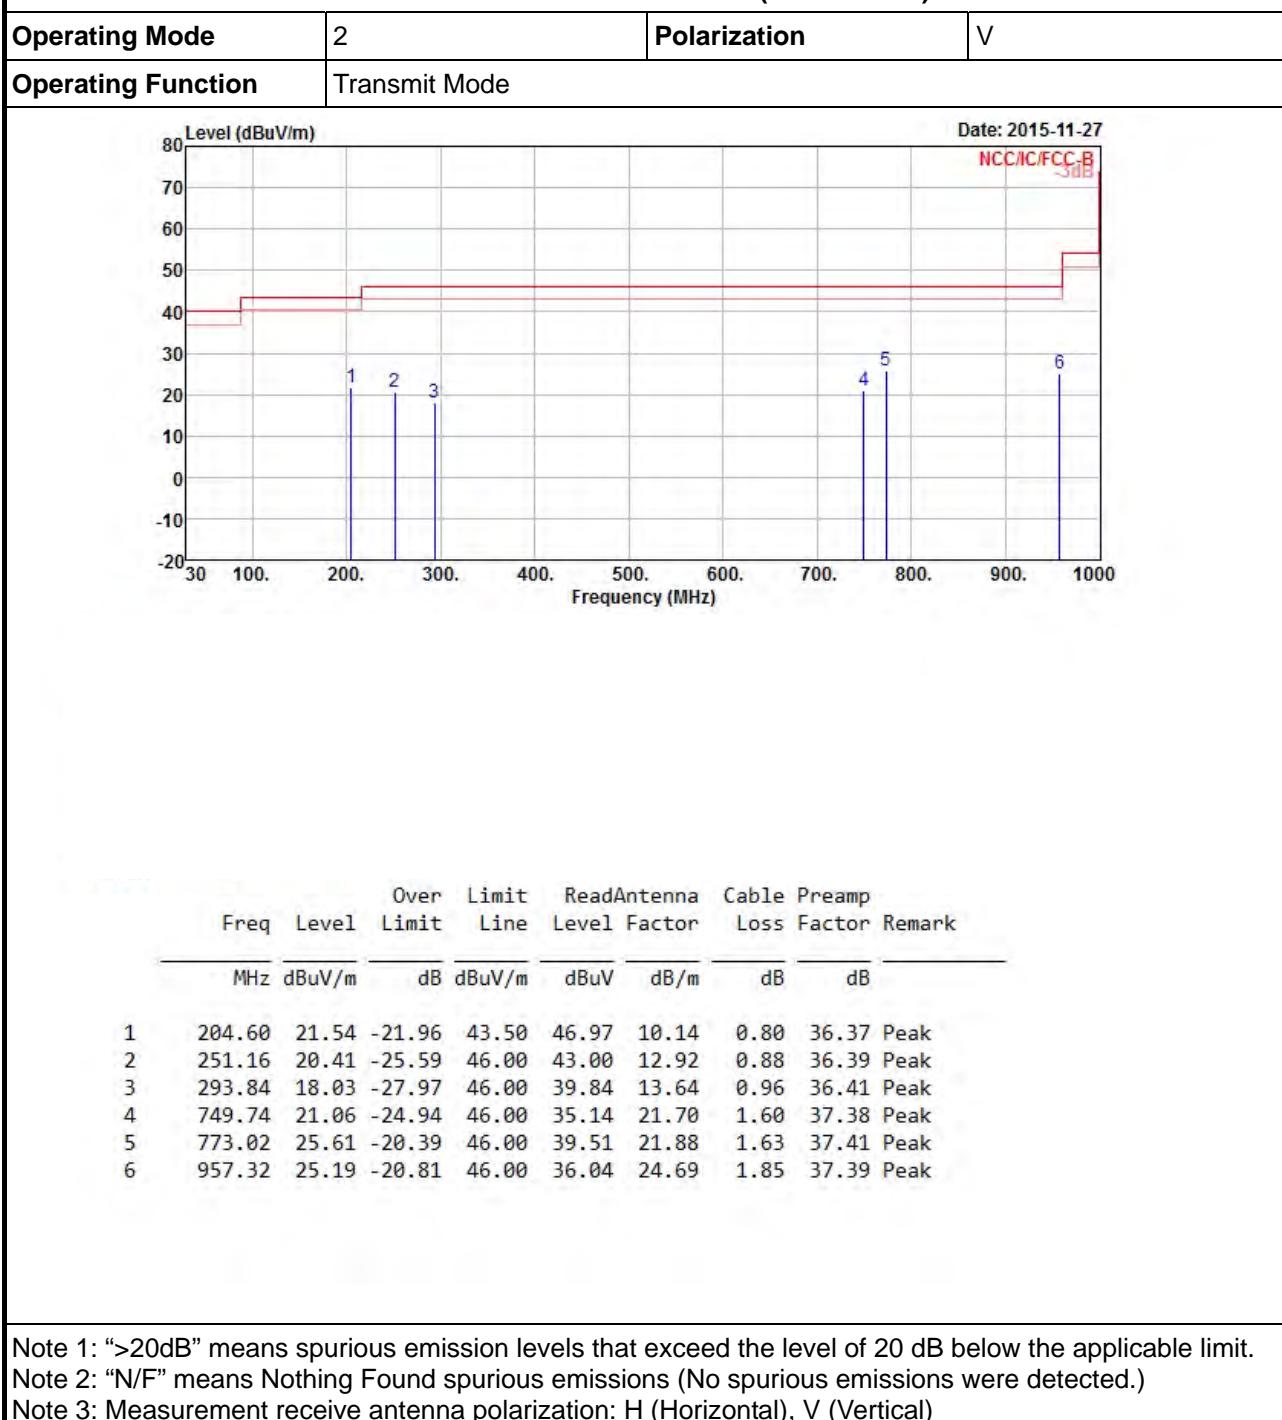

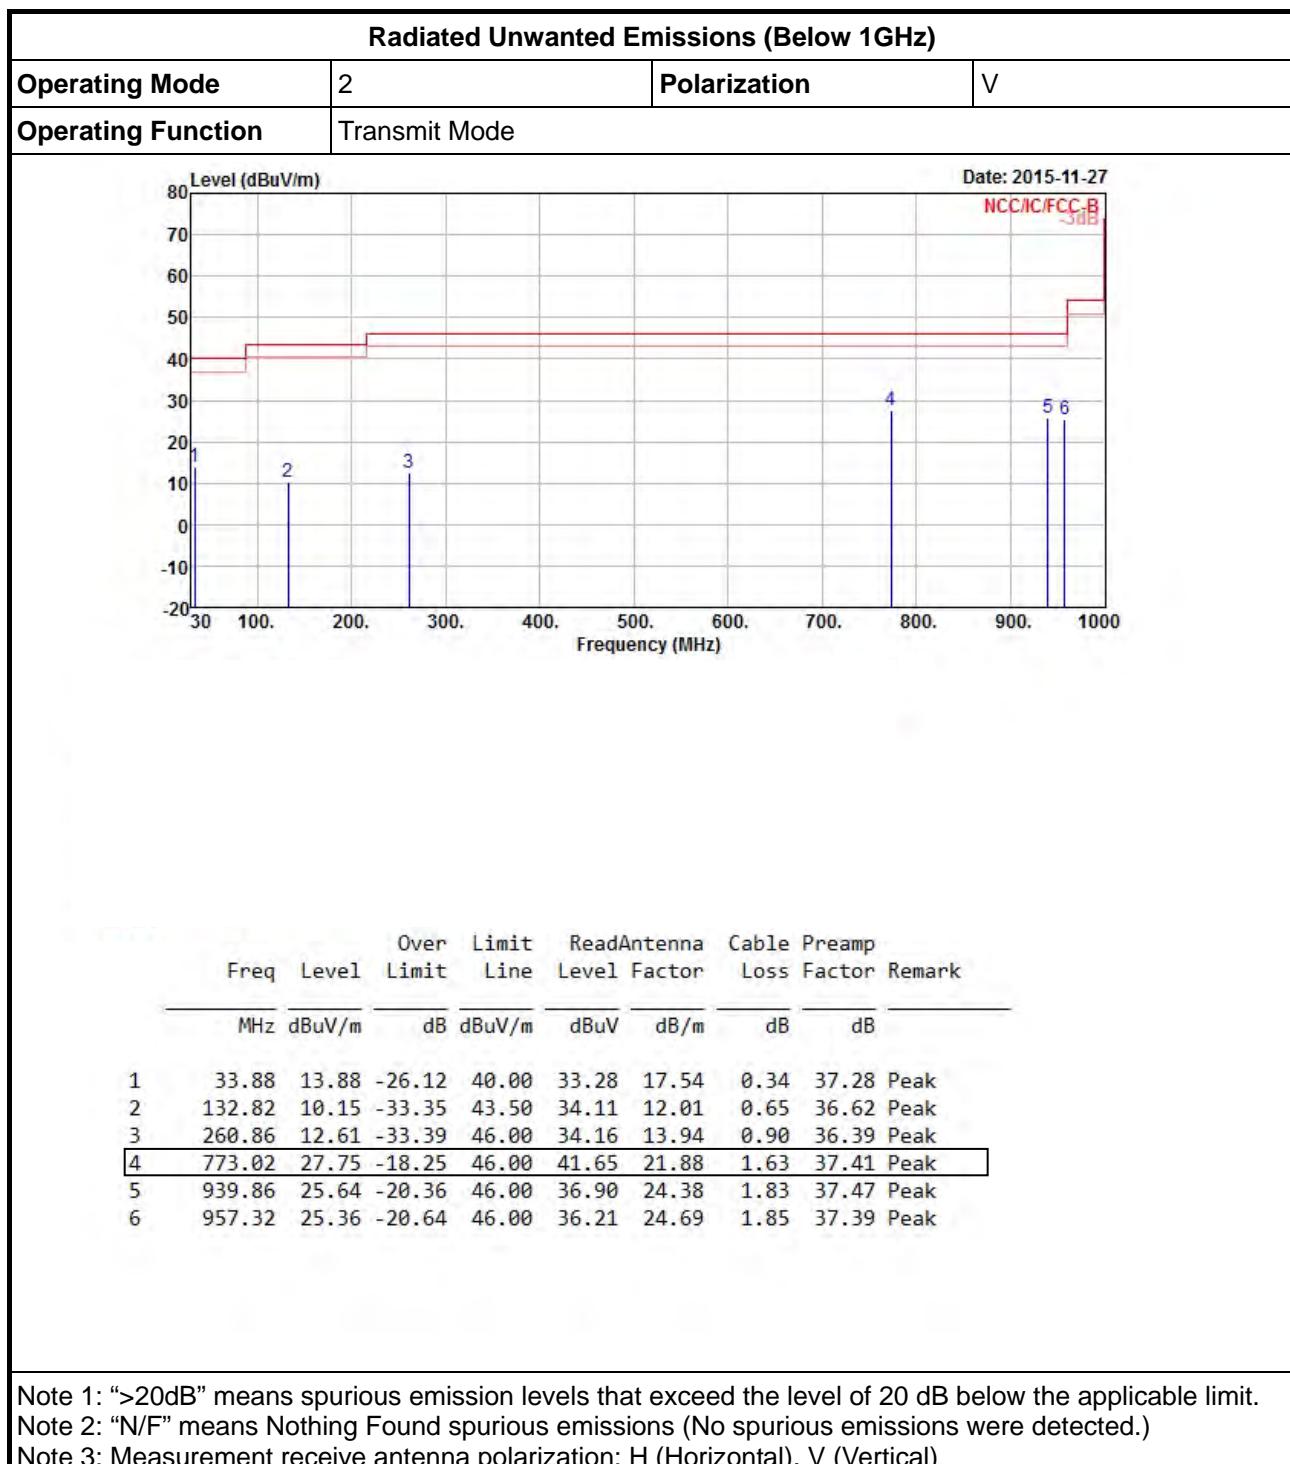




3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Transmitter Radiated Unwanted Emissions (Above 1GHz)_Mode 1																																																																																									
Modulation Mode		O-QPSK		Polarization		V																																																																																			
Operating Function		Normal Mode																																																																																							
Level (dBuV/m)									Date: 2015-12-08																																																																																
<table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Line</th><th>Read</th><th>Antenna</th><th>Cable</th><th>Preamp</th><th colspan="2"></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th colspan="2"></th></tr></thead><tbody><tr><td>1</td><td>1028.00</td><td>30.69</td><td>-23.31</td><td>54.00</td><td>34.40</td><td>28.97</td><td>2.60</td><td>35.28</td><td>Average</td></tr><tr><td>2</td><td>1028.00</td><td>42.24</td><td>-31.76</td><td>74.00</td><td>45.95</td><td>28.97</td><td>2.60</td><td>35.28</td><td>Peak</td></tr><tr><td>3</td><td>3840.00</td><td>32.87</td><td>-21.13</td><td>54.00</td><td>30.23</td><td>32.24</td><td>5.06</td><td>34.66</td><td>Average</td></tr><tr><td>4</td><td>3840.00</td><td>45.22</td><td>-28.78</td><td>74.00</td><td>42.58</td><td>32.24</td><td>5.06</td><td>34.66</td><td>Peak</td></tr><tr><td>5</td><td>5668.00</td><td>35.50</td><td></td><td></td><td>29.66</td><td>34.20</td><td>6.20</td><td>34.56</td><td>Average</td></tr><tr><td>6</td><td>5668.00</td><td>47.19</td><td></td><td></td><td>41.35</td><td>34.20</td><td>6.20</td><td>34.56</td><td>Peak</td></tr></tbody></table>										Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			1	1028.00	30.69	-23.31	54.00	34.40	28.97	2.60	35.28	Average	2	1028.00	42.24	-31.76	74.00	45.95	28.97	2.60	35.28	Peak	3	3840.00	32.87	-21.13	54.00	30.23	32.24	5.06	34.66	Average	4	3840.00	45.22	-28.78	74.00	42.58	32.24	5.06	34.66	Peak	5	5668.00	35.50			29.66	34.20	6.20	34.56	Average	6	5668.00	47.19			41.35	34.20	6.20	34.56	Peak
Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp																																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																		
1	1028.00	30.69	-23.31	54.00	34.40	28.97	2.60	35.28	Average																																																																																
2	1028.00	42.24	-31.76	74.00	45.95	28.97	2.60	35.28	Peak																																																																																
3	3840.00	32.87	-21.13	54.00	30.23	32.24	5.06	34.66	Average																																																																																
4	3840.00	45.22	-28.78	74.00	42.58	32.24	5.06	34.66	Peak																																																																																
5	5668.00	35.50			29.66	34.20	6.20	34.56	Average																																																																																
6	5668.00	47.19			41.35	34.20	6.20	34.56	Peak																																																																																
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>																																																																																									



Transmitter Radiated Unwanted Emissions (Above 1GHz) _Mode 1

Modulation Mode	O-QPSK	Polarization	H
Operating Function	Normal Mode		

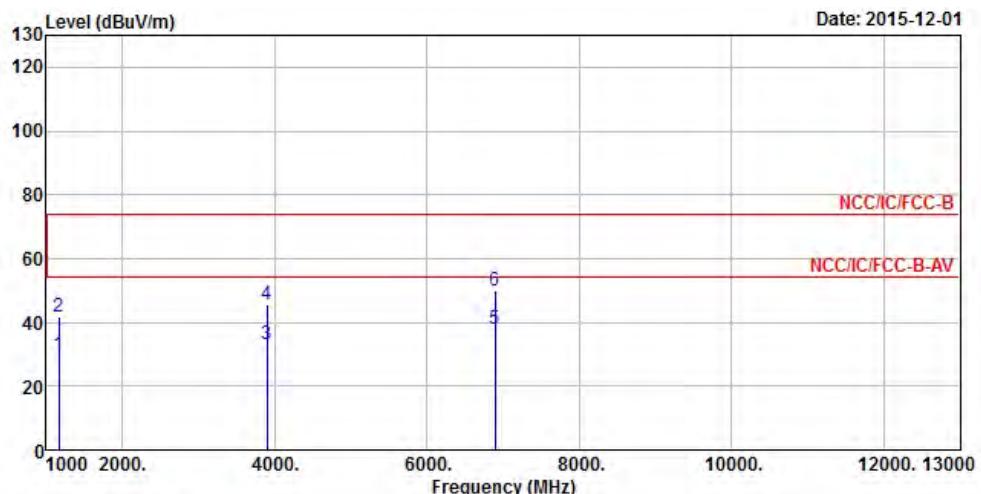

Freq	Level	Over Limit	Limit Line	Read		Cable Loss	Antenna Factor	Preamp Factor	Remark
				Antenna	Cable				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	
1	1162.00	29.57	-24.43	54.00	33.07	28.86	2.73	35.09	Average
2	1162.00	41.50	-32.50	74.00	45.00	28.86	2.73	35.09	Peak
3	3896.00	33.18	-20.82	54.00	30.44	32.30	5.09	34.65	Average
4	3896.00	45.49	-28.51	74.00	42.75	32.30	5.09	34.65	Peak
5	6892.00	37.79	-	-	29.96	35.73	6.89	34.79	Average
6	6892.00	49.85	-	-	42.02	35.73	6.89	34.79	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

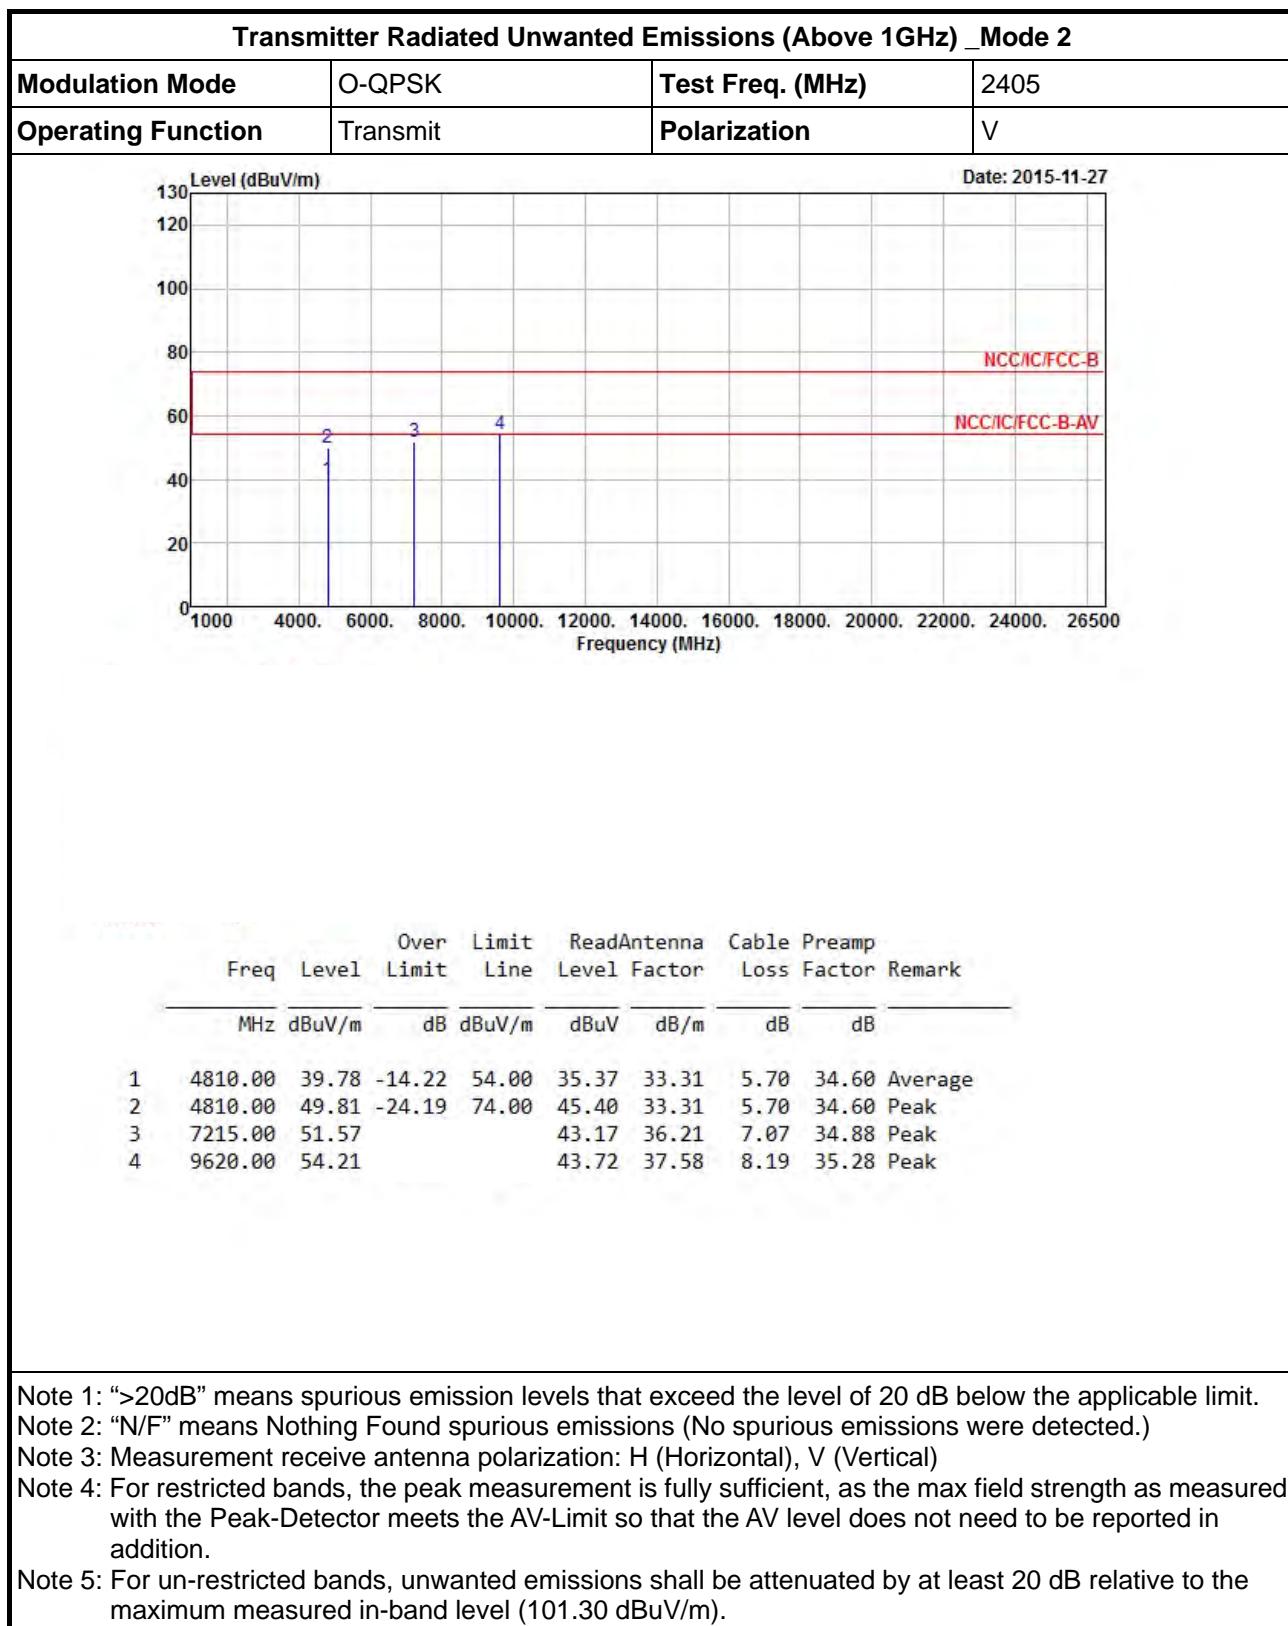



Transmitter Radiated Unwanted Emissions (Above 1GHz) _ Mode 2

Modulation Mode	O-QPSK	Test Freq. (MHz)	2405
Operating Function	Transmit	Polarization	H

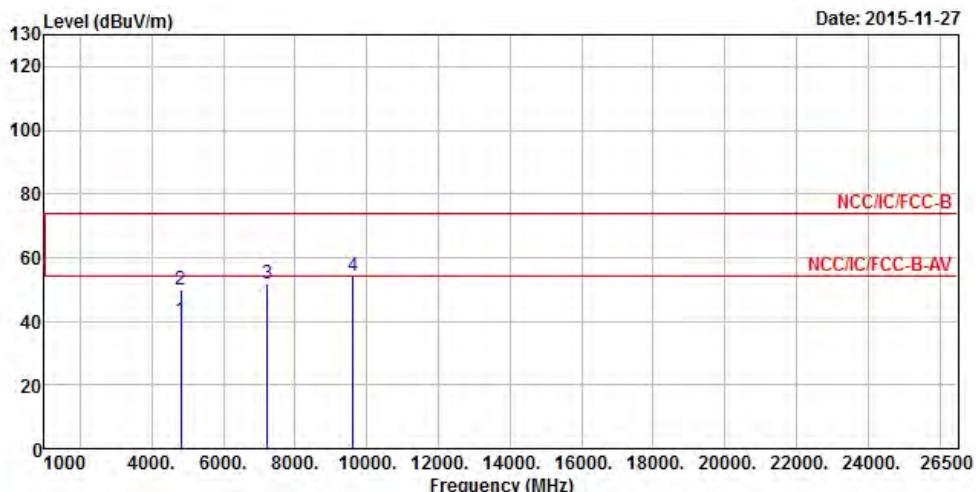

Freq	Level	Over Limit	Line	ReadAntenna	Cable Preamp			Remark
					Level	Factor	Loss	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4810.00	40.19	-13.81	54.00	35.78	33.31	5.70	34.60 Average
2	4810.00	49.90	-24.10	74.00	45.49	33.31	5.70	34.60 Peak
3	7215.00	51.62			43.22	36.21	7.07	34.88 Peak
4	9620.00	54.12			43.63	37.58	8.19	35.28 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.30 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz) _Mode 2

Modulation Mode	O-QPSK	Test Freq. (MHz)	2440
Operating Function	Transmit	Polarization	V

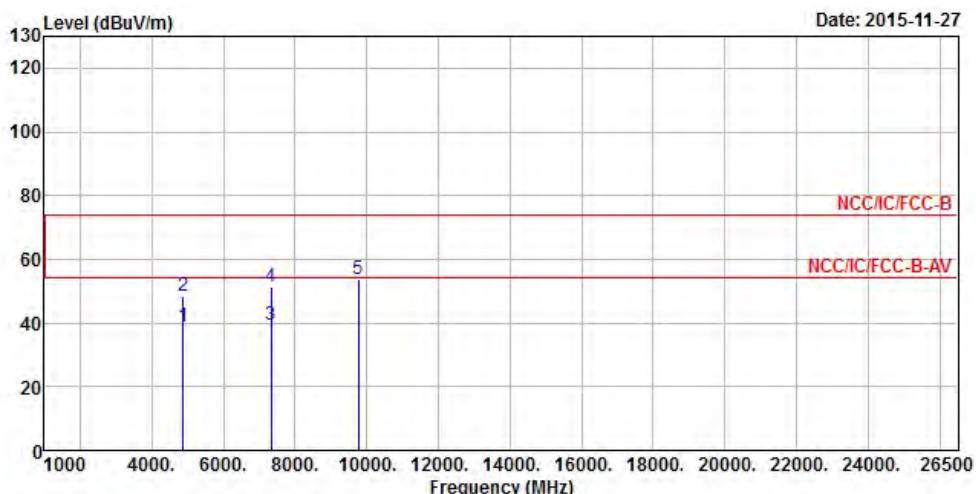

Freq	Level	Over Limit	Line	Read		Cable Loss	Preamp Factor	Remark
				Antenna	Level			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4880.00	38.91	-15.09	54.00	34.39	33.38	5.72	34.58 Average
2	4880.00	48.43	-25.57	74.00	43.91	33.38	5.72	34.58 Peak
3	7320.00	39.36	-14.64	54.00	30.77	36.36	7.14	34.91 Average
4	7320.00	51.56	-22.44	74.00	42.97	36.36	7.14	34.91 Peak
5	9760.00	53.70			43.17	37.55	8.28	35.30 Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (98.71 dBuV/m).

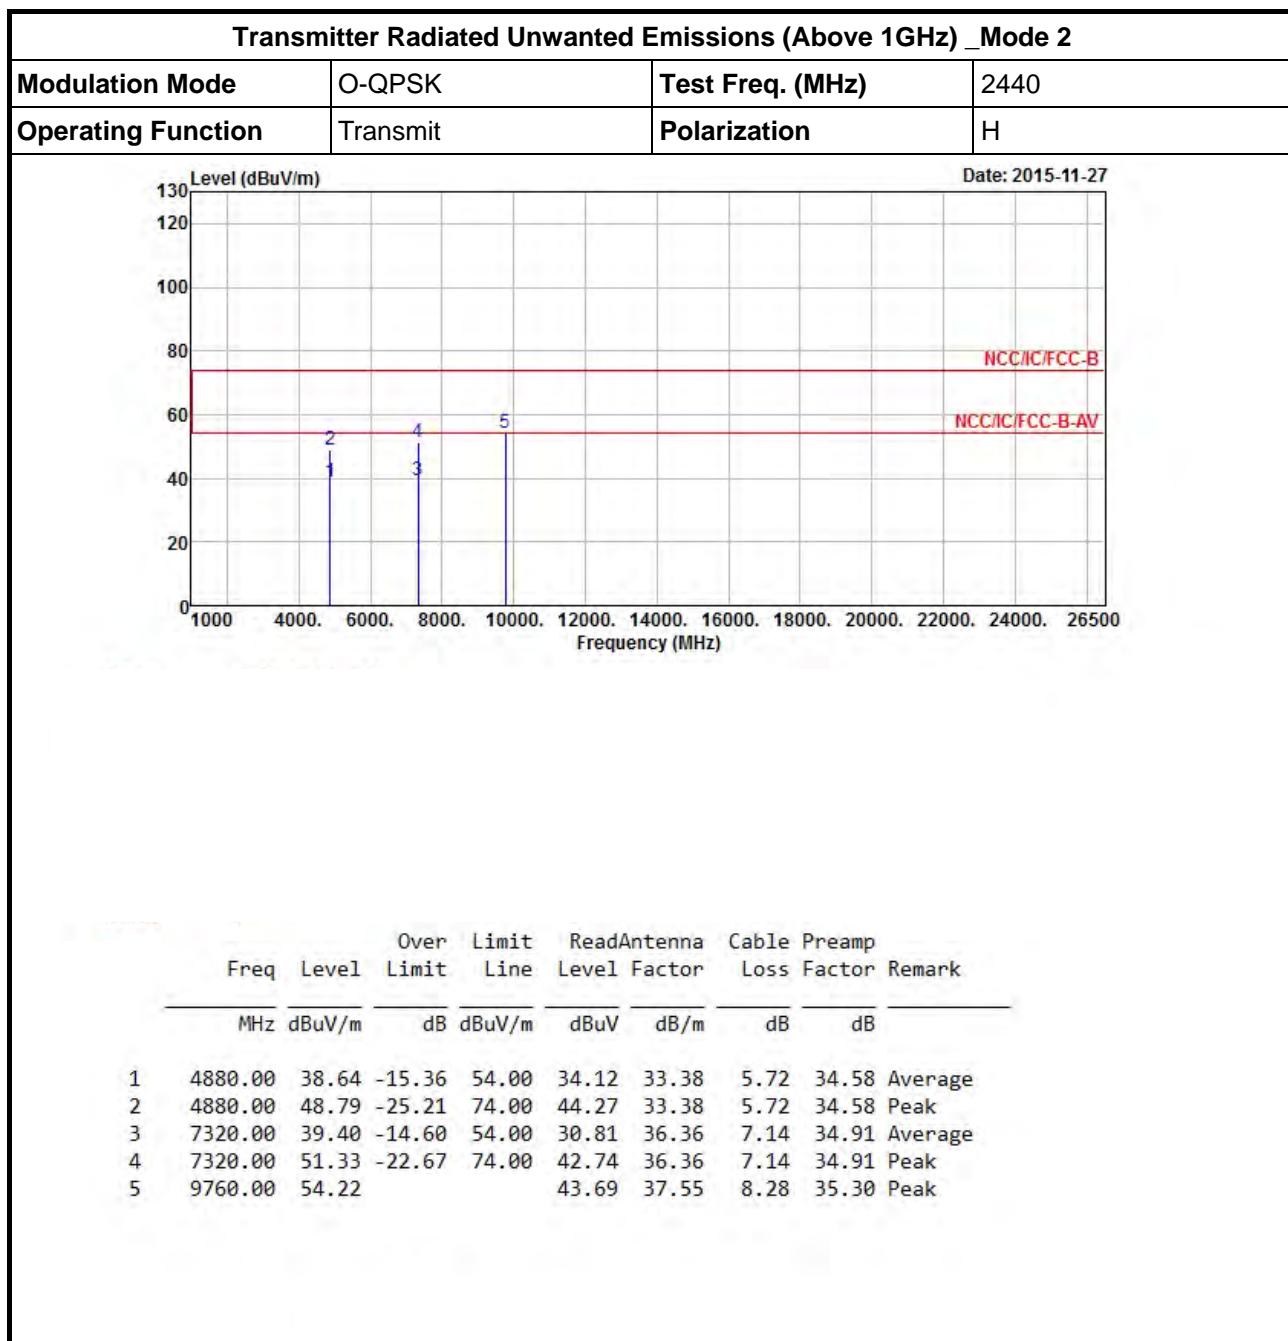


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (98.71 dBuV/m).

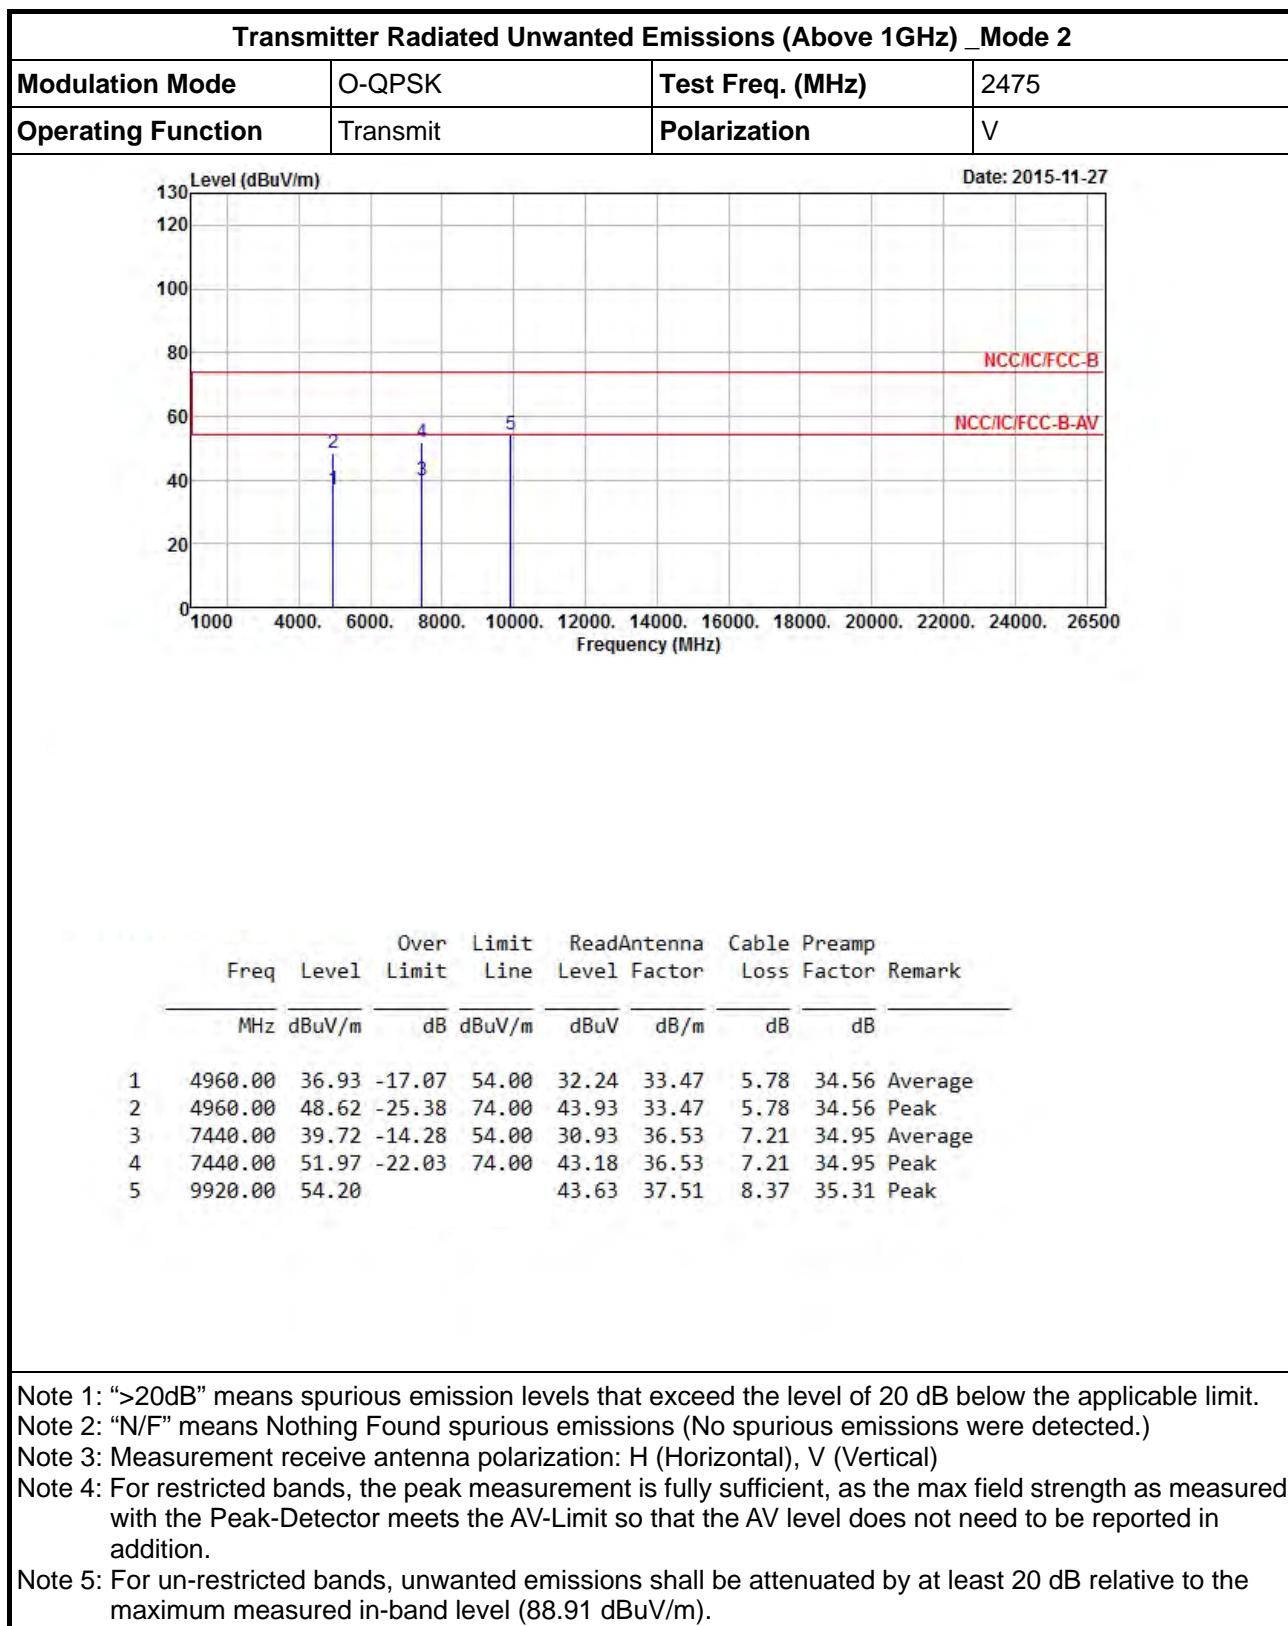



Transmitter Radiated Unwanted Emissions (Above 1GHz) _ Mode 2

Modulation Mode	O-QPSK	Test Freq. (MHz)	2475
Operating Function	Transmit	Polarization	H

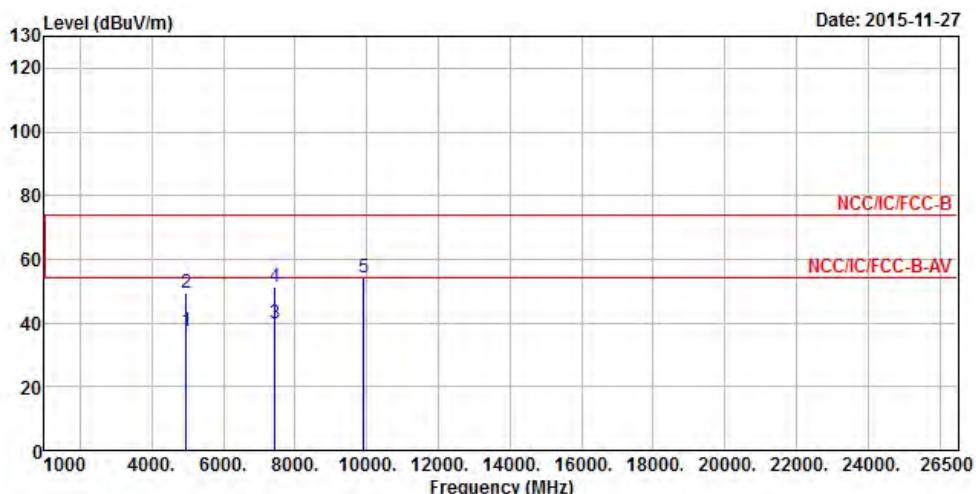

Freq	Level	Over Limit	Line	Read		Cable Loss	Antenna Factor	Preamp Factor	Remark
				Antenna	Cable				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		dB	
1	4960.00	37.20	-16.80	54.00	32.51	33.47	5.78	34.56	Average
2	4960.00	49.18	-24.82	74.00	44.49	33.47	5.78	34.56	Peak
3	7440.00	39.60	-14.40	54.00	30.81	36.53	7.21	34.95	Average
4	7440.00	51.39	-22.61	74.00	42.60	36.53	7.21	34.95	Peak
5	9920.00	54.22			43.65	37.51	8.37	35.31	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (88.91 dBuV/m).



1. Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101500	9KHz~40GHz	May 06, 2015	RF Conduction
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 28, 2015	RF Conduction
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 17, 2015	RF Conduction
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 17, 2015	RF Conduction
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jul. 22, 2015	RF Conduction

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz ~ 1GHz 3m	Jul. 01, 2015	Radiation
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz ~ 18GHz 3m	Jul. 01, 2015	Radiation
Amplifier	EMC	EMC9135	980232	9kHz ~ 1.0GHz	Jan 27, 2015	Radiation
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Sep. 10, 2015	Radiation
Spectrum	KEYSIGHT	N9010A	MY54200885	10Hz ~ 44GHz	Jul. 15, 2015	Radiation
Bilog Antenna	TESEQ	CBL 6112D	35418	30MHz ~ 1GHz	Mar. 30, 2015	Radiation
Horn Antenna	AARONIA AG	POWERLOG 70180	05192	1GHz ~ 18GHz	Jan. 05, 2015	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170614	18GHz ~ 40GHz	Dec. 29, 2014	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Jul. 23, 2015	Radiation
RF Cable-high	Jye Bao	RG142	03CH09-HY	1GHz ~ 40GHz	Jul. 23, 2015	Radiation
Turn Table	Chain Tek	T-200S	1308028	0 ~ 360 degree	N/A	Radiation
Antenna Mast	Chain Tek	MBS-400	1308049	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	ROHDE&SCHWARZ	HFH2-Z2	100330	9 kHz~30 MHz	Nov. 10, 2014	Radiation

Note: Calibration Interval of instruments listed above is two years.