# **FCC Test Report**

Report No.: AGC04482151001FE03

FCC ID : 2AGORBTLOOP

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Bluetooth Speaker

**BRAND NAME** : TOUCHPOINT

**MODEL NAME** : BT LOOP

**CLIENT**: INTERMED ASIA LIMITED

**DATE OF ISSUE** : Dec.04,2015

STANDARD(S)

TEST PROCEDURE(S)

: FCC Part 15 Rules

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

## **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 51

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Dec.04,2015	Valid	Original Report

# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	7
5.1. CONFIGURATION OF EUT SYSTEM	7
5.2. EQUIPMENT USED IN EUT SYSTEM	7
5.3. SUMMARY OF TEST RESULTS	7
6. TEST FACILITY	8
7. ALL TEST EQUIPMENT LIST	8
8. RADIATED EMISSION	10
8.1TEST LIMIT	10
8.2. MEASUREMENT PROCEDURE	11
8.3. TEST SETUP	13
8.4. TEST RESULT	15
9. BAND EDGE EMISSION	28
9.1. MEASUREMENT PROCEDURE	
9.2 TEST SETUP	28
9.3 RADIATED TEST RESULT	29
10. 20DB BANDWIDTH	33
10.1. MEASUREMENT PROCEDURE	33
10.2. TEST SET-UP	33
10.3. LIMITS AND MEASUREMENT RESULTS	33
11. FCC LINE CONDUCTED EMISSION TEST	40
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	40
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	40
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	41
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	41
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	42
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	44
APPENDIX B: PHOTOGRAPHS OF EUT	46

Page 4 of 51

### 1. VERIFICATION OF CONFORMITY

Applicant	INTERMED ASIA LIMITED		
Address	6/F, BLOCK B, ELDEX IND BLDG, 21 MA TAU WAI RD, HUNG HOM, KOWLOON, HONG KONG		
Manufacturer	INTERMED ASIA LIMITED		
Address	6/F, BLOCK B, ELDEX IND BLDG, 21 MA TAU WAI RD, HUNG HOM, KOWLOON, HONG KONG		
Product Designation	Bluetooth Speaker		
Brand Name	TOUCHPOINT		
Test Model	BT LOOP		
Date of test	Nov.07,2015 to Nov.10,2015		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested By

Time Huang(Huang Nanhui) Dec.04,2015

Reviewed By

Forrest Lei(Lei Yonggang) Dec.04,2015

Approved By

Solger Zhang(Zhang Hongyi)
Authorized Officer

Dec.04,2015

Page 5 of 51

### 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency 2.402 GHz to 2.480GHz			
RF Output Power	0.33dBm(Max)		
Bluetooth Version	V2.1+EDR		
Modulation	GFSK, π /4-DQPSK, 8DPSK		
Number of channels 79			
Hardware Version	V1.1		
Software Version	N/A		
Antenna Designation PCB Antenna (Met 15.203 Antenna requirement)			
Antenna Gain 0dBi			
Power Supply DC 3.7V by battery			
Note: The USB port only used for charging and can't be used to transfer data with PC.			

# 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band Channel Number		Frequency		
	0	2402MHZ		
	1	2403MHZ		
	:	:		
	38	2440 MHZ		
2400~2483.5MHZ	39	2441 MHZ		
	40	2442 MHZ		
	·	:		
	77	2479 MHZ		
	78	2480 MHZ		

Report No.: AGC04482151001FE03 Page 6 of 51

### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y  $\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %  $\circ$ 

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

### 4. DESCRIPTION OF TEST MODES

1 Low channel GFSK 2 Middle channel GFSK 3 High channel GFSK 4 Low channel π /4-DQPSK 5 Middle channel π /4-DQPSK 6 High channel π /4-DQPSK 7 Low channel 8DPSK 8 Middle channel 8DPSK 9 High channel 8DPSK	NO.	TEST MODE DESCRIPTION
3 High channel GFSK 4 Low channel π /4-DQPSK 5 Middle channel π /4-DQPSK 6 High channel π /4-DQPSK 7 Low channel 8DPSK 8 Middle channel 8DPSK 9 High channel 8DPSK	1	Low channel GFSK
4 Low channel π /4-DQPSK  5 Middle channel π /4-DQPSK  6 High channel π /4-DQPSK  7 Low channel 8DPSK  8 Middle channel 8DPSK  9 High channel 8DPSK	2	Middle channel GFSK
5 Middle channel π /4-DQPSK 6 High channel π /4-DQPSK 7 Low channel 8DPSK 8 Middle channel 8DPSK 9 High channel 8DPSK	3	High channel GFSK
6 High channel π /4-DQPSK 7 Low channel 8DPSK 8 Middle channel 8DPSK 9 High channel 8DPSK	4	Low channel π /4-DQPSK
7 Low channel 8DPSK 8 Middle channel 8DPSK 9 High channel 8DPSK	5	Middle channel π /4-DQPSK
8 Middle channel 8DPSK 9 High channel 8DPSK	6	High channel π /4-DQPSK
9 High channel 8DPSK	7	Low channel 8DPSK
	8	Middle channel 8DPSK
10 DT Link with charging	9	High channel 8DPSK
BT Link with charging	10	BT Link with charging


- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.

Page 7 of 51

# **5. SYSTEM TEST CONFIGURATION**

### **5.1. CONFIGURATION OF EUT SYSTEM**

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Speaker	TOUCHPOI	BT LOOP	EUT
2	Control box	N/A	N/A	A.E
3	PC	SONY	E1412AYCW	A.E
4	USB Cable	N/A	0.6m, unshielded	A.E
5	Temporary Antenna Connector	T10	N/A	A.E

# **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWITH Compliant	

Report No.: AGC04482151001FE03 Page 8 of 51

# **6. TEST FACILITY**

Site Dongguan Precise Testing Service Co., Ltd.		
Location  Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,		
FCC Registration No.	371540	
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.	

# 7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016	
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016	
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016	
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016	
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A	
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016	
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016	

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016	
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016	
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016	
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016	
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016	
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A	
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016	

Report No.: AGC04482151001FE03 Page 9 of 51

	Conducted Emission Test Site												
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration								
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016								
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016								
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016								
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016								
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016								

Page 10 of 51

### 8. RADIATED EMISSION

#### 8.1TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics		
	(millivolts/meter)	(microvolts/meter)		
900-928MHz	50	500		
2400-2483.5MHz	50	500		
5725-5875MHz	50	500		
24.0-24.25GHz	250	2500		

#### Standard FCC 15.209

Frequency	Distance	Field Strengths Limit				
(MHz) Meters		μ <b>V/m</b>	dB(μV)/m			
0.009 ~ 0.490	300	2400/F(kHz)				
0.490 ~ 1.705	30	24000/F(kHz)				
1.705 ~ 30	30	30				
30 ~ 88	3	100	40.0			
88 ~ 216	3	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3	Other:74.0 dB(µV)/m (Peal	k) 54.0 dB(μV)/m (Average)			

Remark:

- (1) Emission level dB  $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Report No.: AGC04482151001FE03 Page 11 of 51

#### **8.2. MEASUREMENT PROCEDURE**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC04482151001FE03 Page 12 of 51

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Start Stop Froquency	1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Page 13 of 51

#### 8.3. TEST SETUP

# Radiated Emission Test-Setup Frequency Below 30MHz

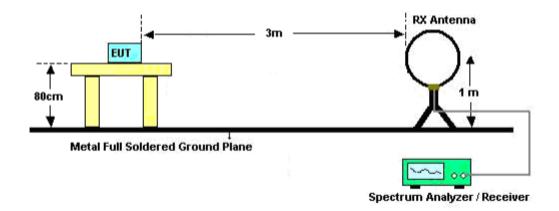


### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

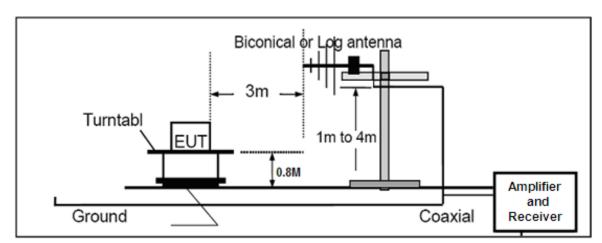

Page 14 of 51

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

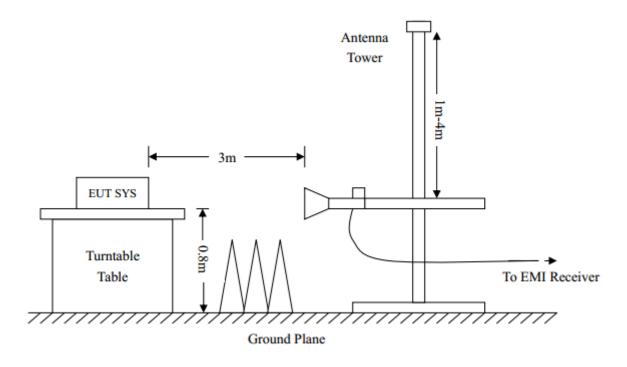

Page 15 of 51

#### **8.4. TEST RESULT**


#### (Worst modulation:GFSK)

#### **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHZ**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

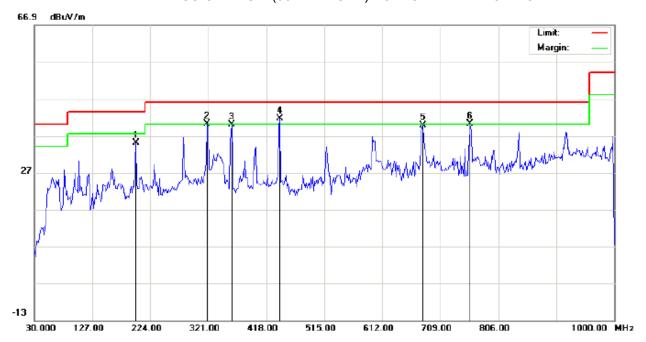

Site: site #1 Polarization: Horizontal Temperature: 22.7
Limit: FCC Class B 3M Radiation Power: Humidity: 53.6 %

EUT: Bluetooth Speaker Distance: 3m

M/N: BT LOOP

Mode: Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		199.7500	22.99	11.99	34.98	43.50	-8.52	peak			
2	ļ	319.3833	23.52	16.70	40.22	46.00	-5.78	peak			
3		359.8000	21.16	18.80	39.96	46.00	-6.04	peak			
4	*	440.6333	21.24	20.31	41.55	46.00	-4.45	peak			
5		679.9000	15.23	24.65	39.88	46.00	-6.12	peak			
6	ļ	759.1167	13.50	26.76	40.26	46.00	-5.74	peak			

Humidity: 53.6 %

Page 16 of 51

### RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

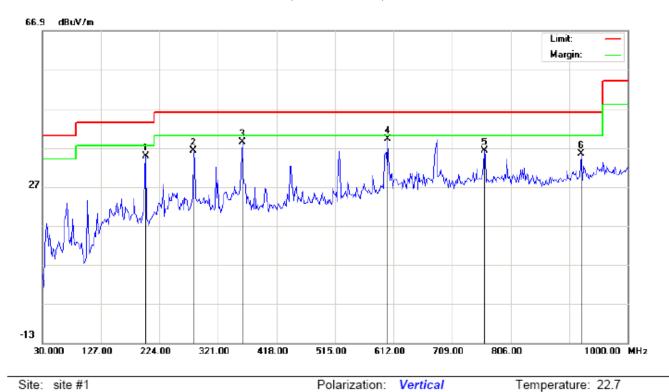

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BT LOOP

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		201.3667	25.62	9.13	34.75	43.50	-8.75	peak			
2		280.5833	21.45	14.82	36.27	46.00	-9.73	peak			
3		361.4167	19.55	18.82	38.37	46.00	-7.63	peak			
4	*	602.3000	16.39	22.78	39.17	46.00	-6.83	peak			
5		762.3500	9.34	26.80	36.14	46.00	-9.86	peak			
6		922.4000	6.14	29.23	35.37	46.00	-10.63	peak			

Power:

Distance: 3m

#### **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

Temperature: 22.7

Humidity: 53.6 %

Page 17 of 51

### RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

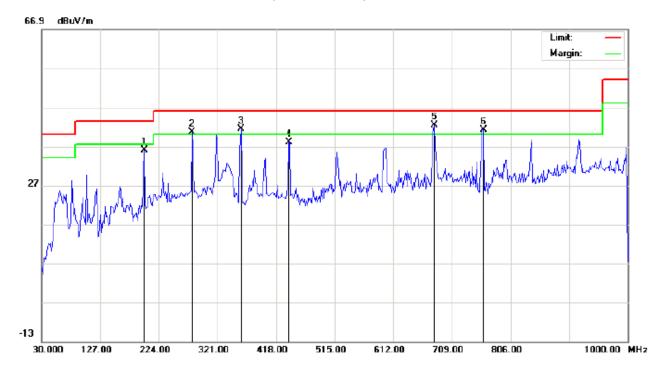

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BT LOOP

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		199.7500	23.99	11.99	35.98	43.50	-7.52	peak			
2	İ	278.9667	25.90	14.77	40.67	46.00	-5.33	peak			
3	į	359.8000	22.66	18.80	41.46	46.00	-4.54	peak			
4		439.0167	17.84	20.26	38.10	46.00	-7.90	peak			
5	*	679.9000	17.73	24.65	42.38	46.00	-3.62	peak			
6	į	760.7333	14.48	26.78	41.26	46.00	-4.74	peak			

Power:


Distance: 3m

Polarization: Horizontal

Temperature: 22.7 Humidity: 53.6 %

Page 18 of 51

### RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

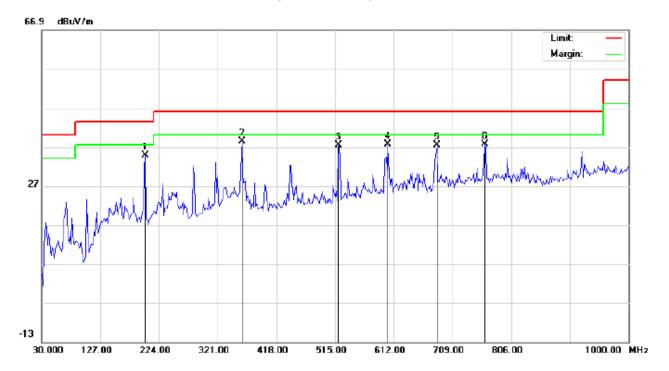

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BT LOOP

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		201.3667	25.62	9.13	34.75	43.50	-8.75	peak			
2	*	361.4167	19.55	18.82	38.37	46.00	-7.63	peak			
3		521.4666	15.74	21.71	37.45	46.00	-8.55	peak			
4		602.3000	14.89	22.78	37.67	46.00	-8.33	peak			
5		683.1333	12.74	24.74	37.48	46.00	-8.52	peak			
6		762.3500	10.84	26.80	37.64	46.00	-8.36	peak			

Power:

Distance: 3m


#### **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 19 of 51

# RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

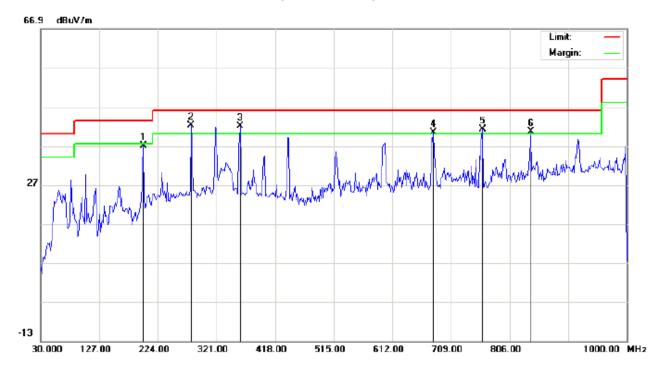

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BT LOOP

Mode: High Channel TX

Note:

Polarization:	Horizontal	Temperature: 22	2.7
Power:		Humidity: 53.6 9	%


Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		199.7500	24.99	11.99	36.98	43.50	-6.52	peak			
2	*	278.9667	27.40	14.77	42.17	46.00	-3.83	peak			
3	į	359.8000	23.16	18.80	41.96	46.00	-4.04	peak			
4	İ	679.9000	15.73	24.65	40.38	46.00	-5.62	peak			
5	İ	760.7333	14.48	26.78	41.26	46.00	-4.74	peak			
6	į	841.5667	13.37	27.31	40.68	46.00	-5.32	peak			

Humidity: 53.6 %

Page 20 of 51

### RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

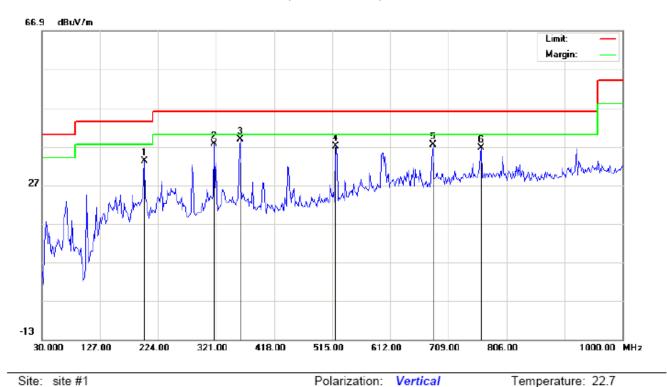

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BT LOOP

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over		Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree		
1		201.3667	24.12	9.13	33.25	43.50	-10.25	peak				
2		317.7667	21.01	16.59	37.60	46.00	-8.40	peak				
3	*	361.4167	20.05	18.82	38.87	46.00	-7.13	peak				
4		521.4666	15.24	21.71	36.95	46.00	-9.05	peak				
5		683.1333	12.74	24.74	37.48	46.00	-8.52	peak				
6		763.9666	9.69	26.82	36.51	46.00	-9.49	peak				

Power:

Distance: 3m

#### **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 21 of 51

#### **RADIATED EMISSION ABOVE 1GHZ**

### RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

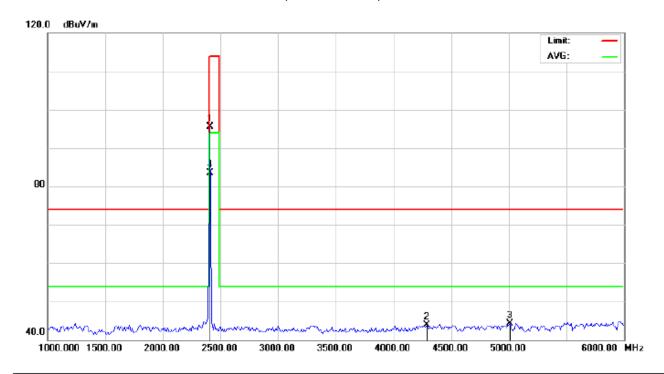

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: BT LOOP


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	105.25	-9.68	95.57	114.00	-18.43	peak			
2		4291.667	47.70	-3.82	43.88	74.00	-30.12	peak			
3		5008.333	46.11	-1.80	44.31	74.00	-29.69	peak			
4	*	2402.000	93.21	-9.68	83.53	94.00	-10.47	AVG	100	167	

Page 22 of 51

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

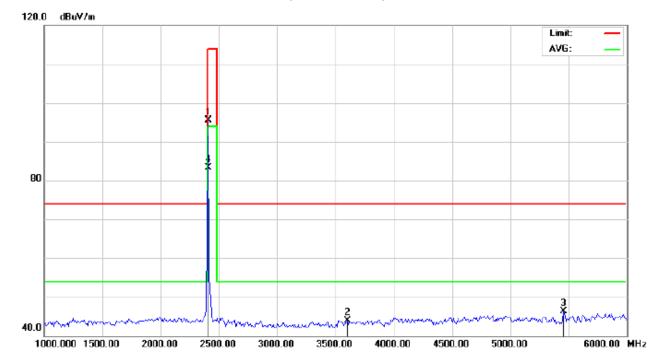

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: BT LOOP


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	105.20	-9.68	95.52	114.00	-18.48	peak			
2		3600.000	51.21	-7.27	43.94	74.00	-30.06	peak			
3		5458.333	48.13	-1.81	46.32	74.00	-27.68	peak			
4	*	2402.000	92.94	-9.68	83.26	94.00	-10.74	AVG	100	219	

Page 23 of 51

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

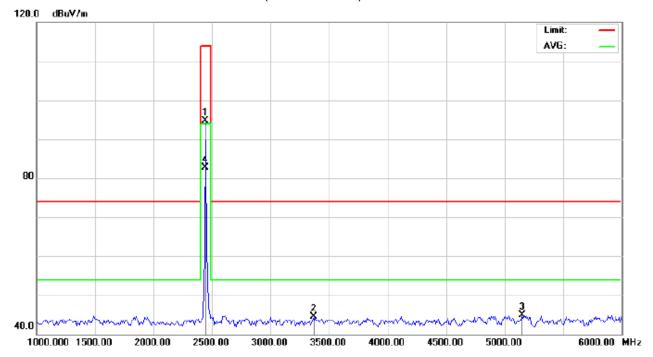

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: BT LOOP


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	104.29	-9.63	94.66	114.00	-19.34	peak			
2		3366.667	52.43	-8.02	44.41	74.00	-29.59	peak			
3		5150.000	46.74	-1.80	44.94	74.00	-29.06	peak			
4	*	2441.000	92.29	-9.63	82.66	94.00	-11.34	AVG	100	165	

Page 24 of 51

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

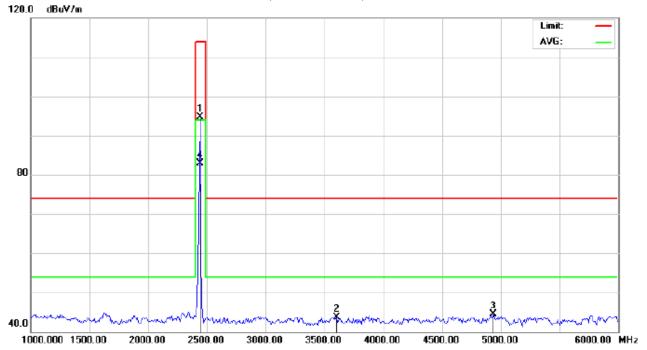

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: BT LOOP


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	104.30	-9.63	94.67	114.00	-19.33	peak			
2		3600.000	50.87	-7.27	43.60	74.00	-30.40	peak			
3		4933.333	46.43	-1.97	44.46	74.00	-29.54	peak			
4	*	2441.000	92.51	-9.63	82.88	94.00	-11.12	AVG	100	223	

Page 25 of 51

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

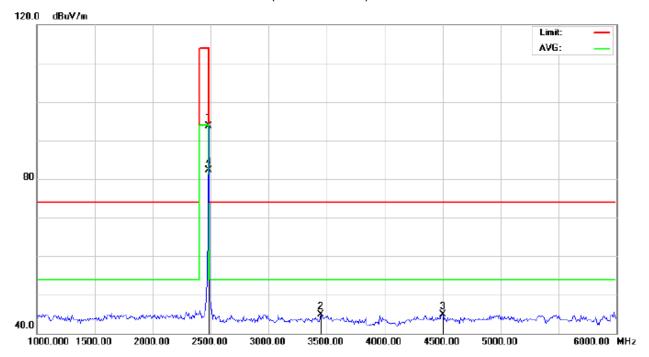

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: BT LOOP

Mode: High Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	103.34	-9.59	93.75	114.00	-20.25	peak			
2		3450.000	52.94	-7.94	45.00	74.00	-29.00	peak			
3		4500.000	48.08	-3.11	44.97	74.00	-29.03	peak			
4	*	2480.000	91.96	-9.59	82.37	94.00	-11.63	AVG	100	169	

Temperature: 26

Humidity: 60 %

Page 26 of 51

### RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

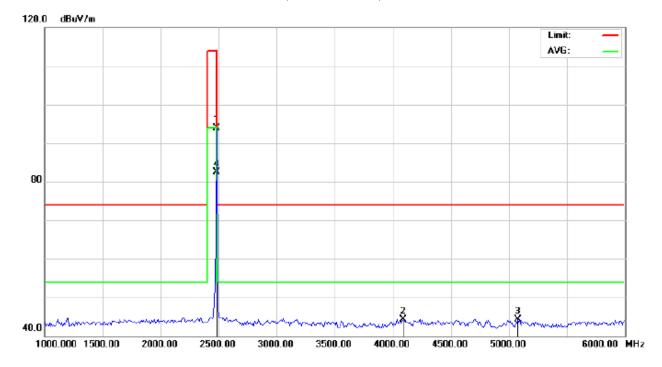

Site: site #1 Polarization: Vertical
Limit: FCC Class B 3M Radiation above 1GHZ(PK)Power:

EUT: Bluetooth Speaker Distance: 3m

M/N: BT LOOP

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	103.41	-9.59	93.82	114.00	-20.18	peak			
2		4091.667	48.78	-4.50	44.28	74.00	-29.72	peak			
3		5075.000	46.12	-1.80	44.32	74.00	-29.68	peak			
4	*	2480.000	92.08	-9.59	82.49	94.00	-11.51	AVG	100	225	

#### **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 27 of 51

# Field strength of the fundamental signal

# Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	105.25	-9.68	95.57	114	-18.43	Horizontal
2402	105.20	-9.68	95.52	114	-18.48	Vertical
2441	104.29	-9.63	94.66	114	-19.34	Horizontal
2441	104.30	-9.63	94.67	114	-19.33	Vertical
2480	103.34	-9.59	93.75	114	-20.25	Horizontal
2480	103.41	-9.59	93.82	114	-20.18	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	93.21	-9.68	83.53	94	-10.47	Horizontal
2402	92.94	-9.68	83.26	94	-10.74	Vertical
2441	92.29	-9.63	82.66	94	-11.34	Horizontal
2441	92.51	-9.63	82.88	94	-11.12	Vertical
2480	91.96	-9.59	82.37	94	-11.63	Horizontal
2480	92.08	-9.59	82.49	94	-11.51	Vertical

Page 28 of 51

### 9. BAND EDGE EMISSION

#### 9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

#### 9.2 TEST SETUP

#### RADIATED EMISSION TEST SETUP

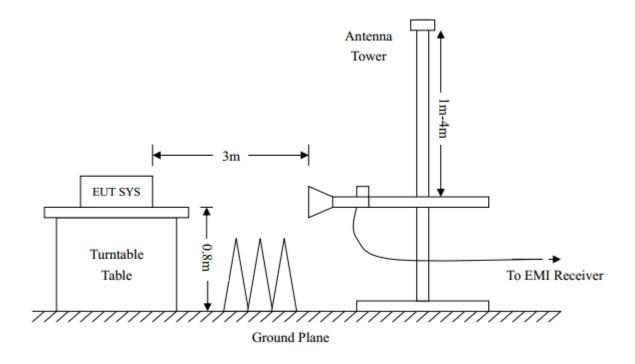


Page 29 of 51

#### 9.3 RADIATED TEST RESULT

#### (Worst modulation:GFSK)

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

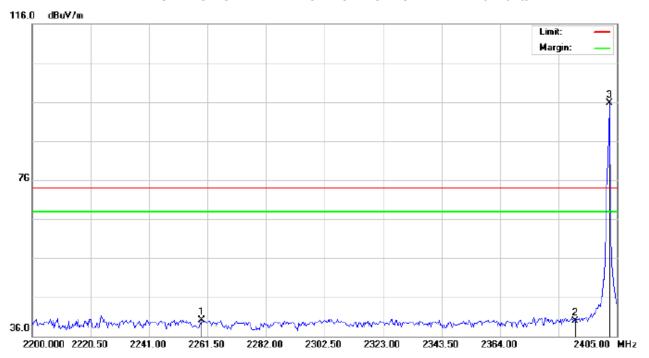

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:


M/N: BT LOOP

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2259.450	29.99	10.17	40.16	74.00	-33.84	peak			
2		2390.000	29.62	10.31	39.93	74.00	-34.07	peak			
3	*	2402.000	85.41	10.32	95.73	74.00	21.73	peak			

Page 30 of 51

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

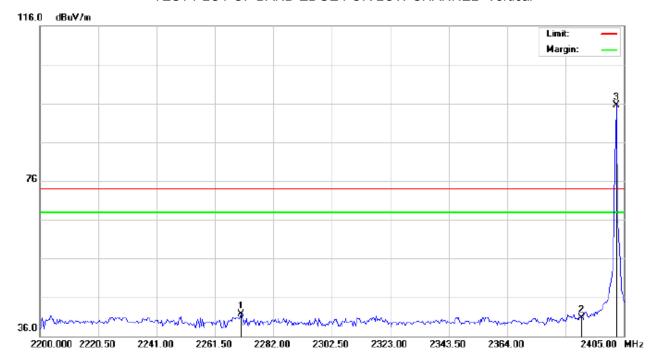

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:


M/N: BT LOOP

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2270.725	31.48	10.18	41.66	74.00	-32.34	peak			
2		2390.000	30.35	10.31	40.66	74.00	-33.34	peak			
3	*	2402.000	85.22	10.32	95.54	74.00	21.54	peak			

Page 31 of 51

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

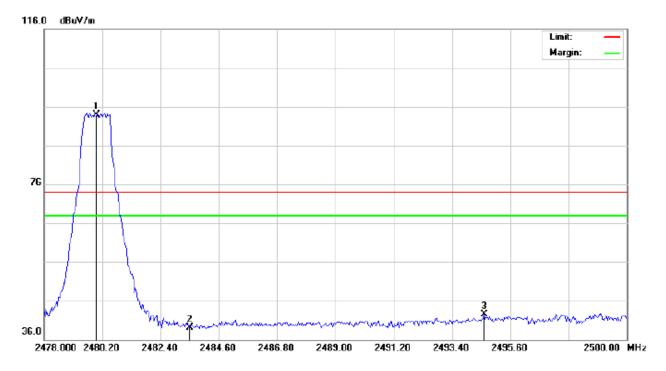

Site: site #1 Polarization: Horizontal Temperature: 26 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:

M/N: BT LOOP

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.46	10.41	93.87	74.00	19.87	peak			
2		2483.500	28.75	10.41	39.16	74.00	-34.84	peak			
3		2494.610	32.07	10.42	42.49	74.00	-31.51	peak			

Page 32 of 51

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical



Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:

M/N: BT LOOP

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.35	10.41	93.76	74.00	19.76	peak			
2		2483.500	29.37	10.41	39.78	74.00	-34.22	peak			
3		2496.040	31.90	10.43	42.33	74.00	-31.67	peak			

#### **RESULT: PASS**

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 33 of 51


# 10. 20DB BANDWIDTH

#### 10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

#### 10.2. TEST SET-UP

### (BLOCK DIAGRAM OF CONFIGURATION)

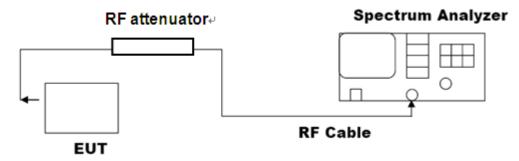


Note: The EUT has been used temporary antenna connector for testing.

#### 10.3. LIMITS AND MEASUREMENT RESULTS


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL				
Applicable Limits	Measurement Result			
	Test Data (MHz)		Criteria	
N/A	Low Channel	1.154	PASS	
	Middle Channel	1.146	PASS	
	High Channel	1.155	PASS	

Page 34 of 51

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

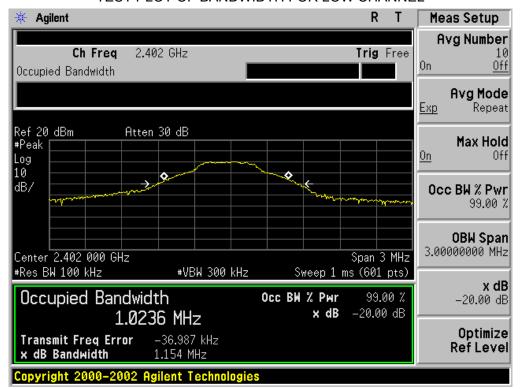


#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

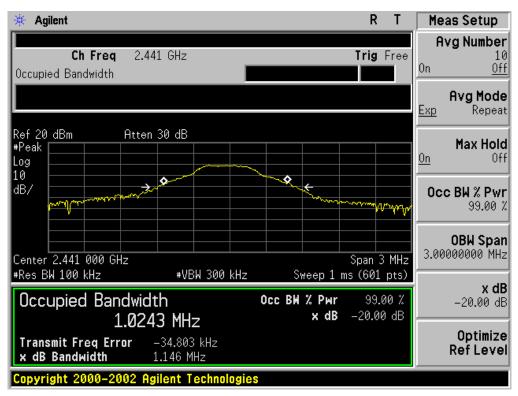

Page 35 of 51

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

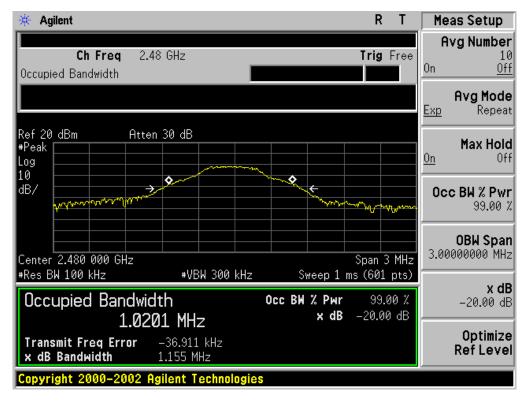

Report No.: AGC04482151001FE03 Page 36 of 51


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESUL				
Applicable Limits	Measurement Result			
	Test Data (MHz)		Criteria	
N/A	Low Channel	1.351	PASS	
	Middle Channel	1.352	PASS	
	High Channel	1.343	PASS	

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Report No.: AGC04482151001FE03 Page 37 of 51

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

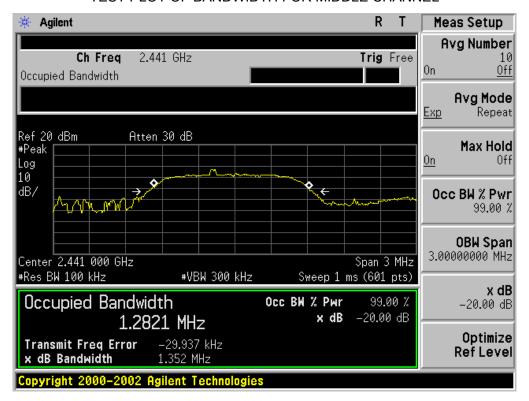


#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

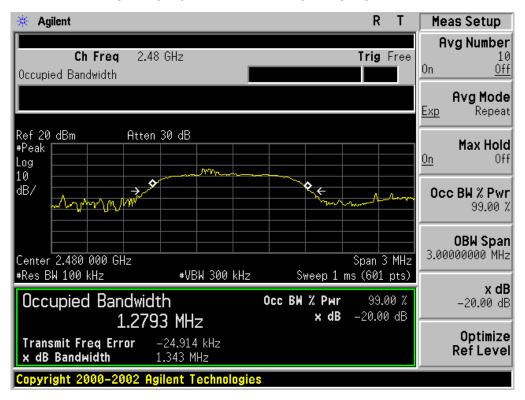

Report No.: AGC04482151001FE03 Page 38 of 51


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL									
Annliagh Ia Limita	Measurement Result								
Applicable Limits	Test Da	Criteria							
	Low Channel	1.387	PASS						
N/A	Middle Channel	1.379	PASS						
	High Channel	1.394	PASS						

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

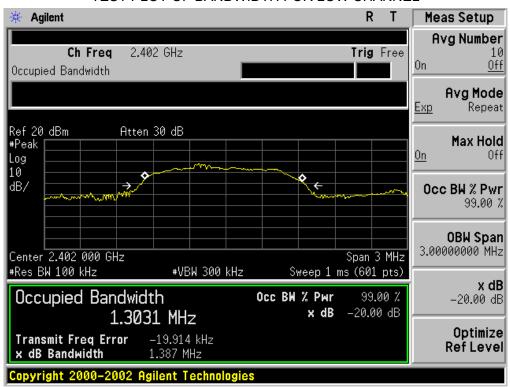


Report No.: AGC04482151001FE03 Page 39 of 51

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

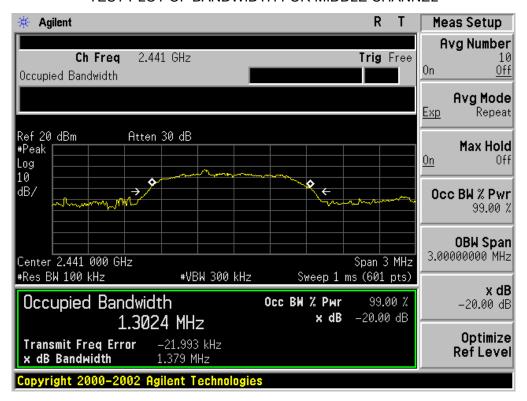

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

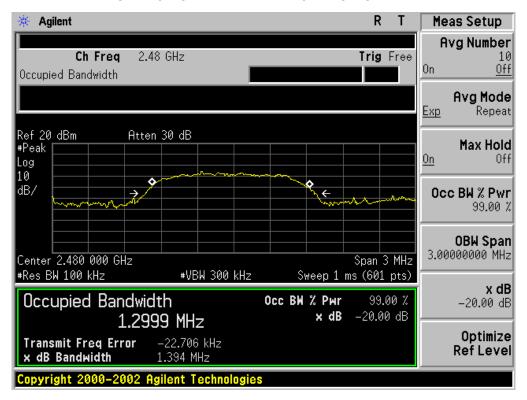

Page 40 of 51

### 11. FCC LINE CONDUCTED EMISSION TEST


# 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

<b>F</b>	Maximum RF Line Voltage							
Frequency	Q.P.( dBuV)	Average( dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

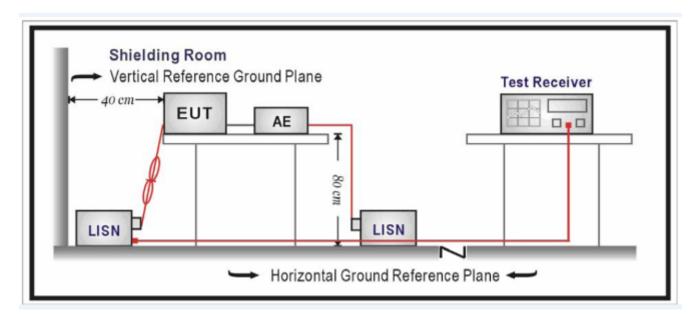

Page 41 of 51

#### 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC which received 120V/60Hzpower by a LISN..
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 57.2 %

Page 42 of 51

# 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

### Line Conducted Emission Test Line 1-L

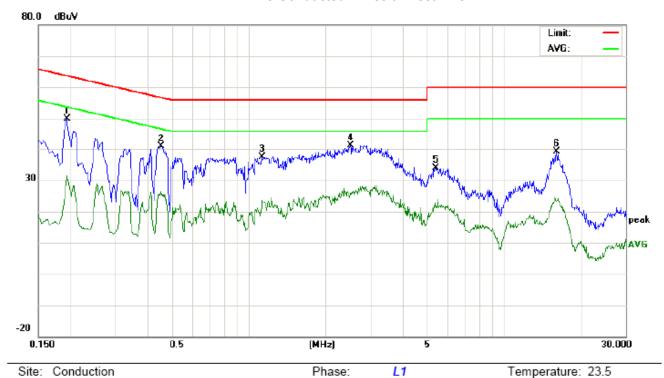

Limit: FCC Class B Conduction(QP)

EUT: Bluetooth Speaker

M/N: BT LOOP

Mode: BT Link with charging

Note:


No. Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1940	39.74		21.23	10.21	49.95		31.44	63.86	53.86	-13.91	-22.42	Р	
2	0.4540	30.63		16.09	10.37	41.00		26.46	56.80	46.80	-15.80	-20.34	Р	
3	1.1260	27.10		10.86	10.37	37.47		21.23	56.00	46.00	-18.53	-24.77	Р	
4	2.5020	30.82		15.52	10.43	41.25		25.95	56.00	46.00	-14.75	-20.05	Р	
5	5.4340	23.74		11.64	10.25	33.99		21.89	60.00	50.00	-26.01	-28.11	Р	
6	16.1299	29.12		13.25	10.11	39.23		23.36	60.00	50.00	-20.77	-26.64	Р	

Power:

Humidity: 57.2 %

Page 43 of 51

# Line Conducted Emission Test Line 2-N

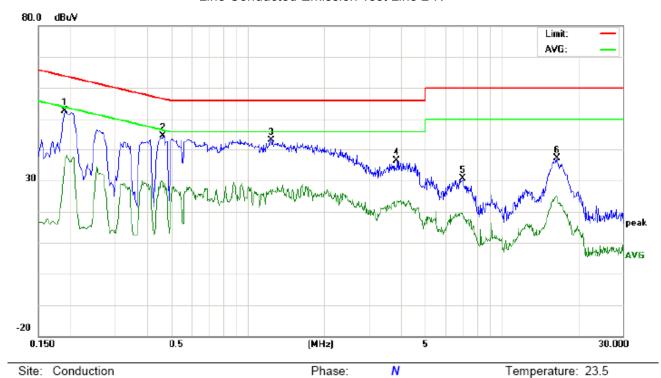

Site: Conduction Phase:
Limit: FCC Class B Conduction(QP) Power:

EUT: Bluetooth Speaker

M/N: BT LOOP

Mode: BT Link with charging

Note:

No. Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1900	42.39		25.99	10.20	52.59		36.19	64.03	54.03	-11.44	-17.84	Р	
2	0.4660	34.29		17.48	10.38	44.67		27.86	56.58	46.58	-11.91	-18.72	Р	
3	1.2380	32.71		16.73	10.37	43.08		27.10	56.00	46.00	-12.92	-18.90	Р	
4	3.8740	25.81		12.47	10.45	36.26		22.92	56.00	46.00	-19.74	-23.08	Р	
5	7.0580	20.26		8.12	10.36	30.62		18.48	60.00	50.00	-29.38	-31.52	Р	
6	16.5500	26.88		14.70	10.12	37.00		24.82	60.00	50.00	-23.00	-25.18	Р	


Page 44 of 51


# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

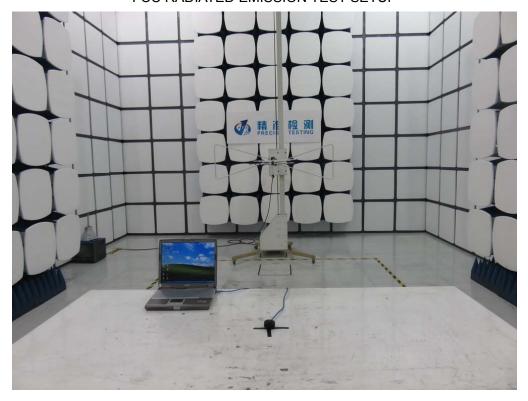

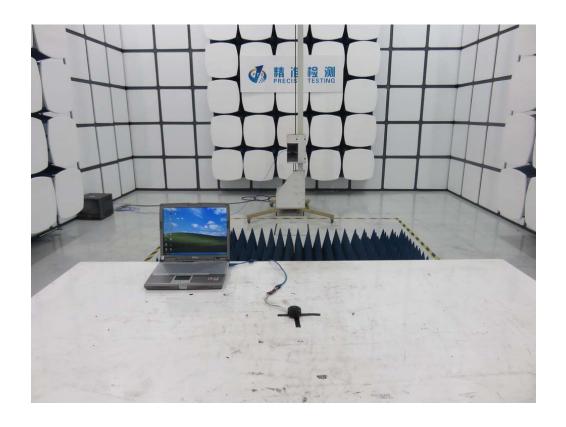

Page 46 of 51

# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOP VIEW OF EUT



**BOTTOM VIEW OF EUT** 



Page 47 of 51

FRONT VIEW OF EUT



**BACK VIEW OF EUT** 



Report No.: AGC04482151001FE03 Page 48 of 51

LEFT VIEW OF EUT




RIGHT VIEW OF EUT




VIEW OF EUT (Port)




**OPEN VIEW OF EUT** 

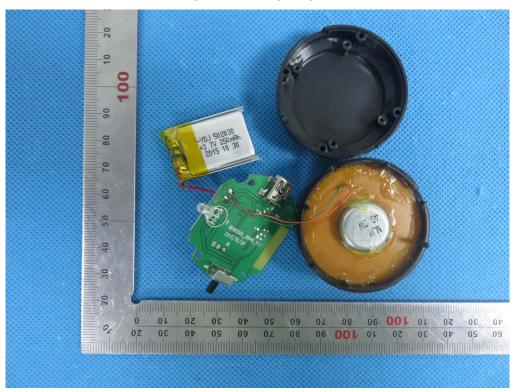


**INTERNAL VIEW OF EUT-1** 

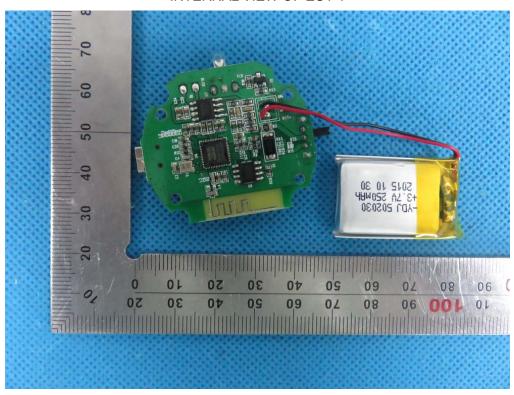

**INTERNAL VIEW OF EUT-2** 

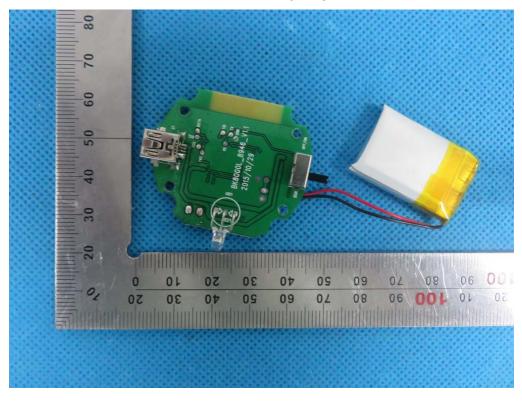

# **INTERNAL VIEW OF EUT-3**

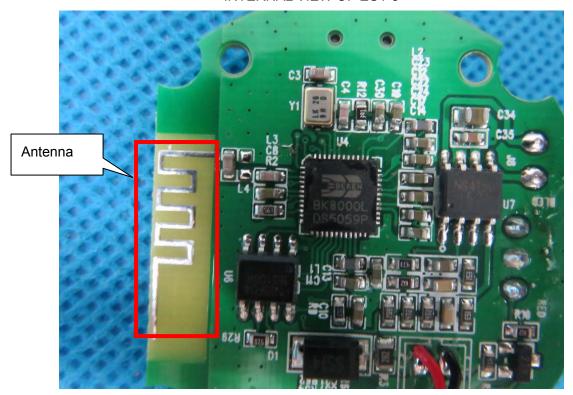

----END OF REPORT----