



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 110 of 341

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	9.29	9.07	12.19	/	Pass
			6175	SU	/	8.69	8.77	11.74	/	Pass
			6415	SU	/	9.14	8.71	11.94	/	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	9.82	9.60	12.72	/	Pass
			6165	SU	/	9.73	8.71	12.26	/	Pass
			6405	SU	/	9.49	9.10	12.31	/	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	9.32	9.09	12.22	/	Pass
			6145	SU	/	9.18	8.88	12.04	/	Pass
			6385	SU	/	9.26	8.48	11.90	/	Pass

3.1.2 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	9.16	8.46	12.06	<=24	Pass
			6175	SU	/	8.56	8.16	11.61	<=24	Pass
			6415	SU	/	9.01	8.10	11.81	<=24	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	9.69	8.99	12.59	<=24	Pass
			6165	SU	/	9.60	8.10	12.13	<=24	Pass
			6405	SU	/	9.36	8.49	12.18	<=24	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	9.19	8.48	12.09	<=24	Pass
			6145	SU	/	9.05	8.27	11.91	<=24	Pass
			6385	SU	/	9.13	7.87	11.77	<=24	Pass

Note1: Antenna Gain: ANT3: -0.61dBi; ANT2: -0.13dBi
Note2: E.I.R.P = Measured Power + Antenna Gain

3.1.3 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	8.97	8.75	11.87	/	Pass
			6475	SU	/	7.85	8.11	10.99	/	Pass
			6515	SU	/	7.69	8.26	10.99	/	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	9.82	9.59	12.71	/	Pass
			6485	SU	/	9.84	9.21	12.55	/	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	9.71	9.50	12.62	/	Pass

3.1.4 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 111 of 341

NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	6.67	5.43	9.57	<=24	Pass
			6475	SU	/	5.55	4.79	8.69	<=24	Pass
			6515	SU	/	5.39	4.94	8.69	<=24	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	7.52	6.27	10.41	<=24	Pass
			6485	SU	/	7.54	5.89	10.25	<=24	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	7.41	6.18	10.32	<=24	Pass

Note1: Antenna Gain: ANT3: -3.32dBi; ANT2: -2.30dBi;
Note2: E.I.R.P = Measured Power + Antenna Gain

3.1.5 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	8.48	8.23	11.37	/	Pass
			6695	SU	/	7.71	8.13	10.94	/	Pass
			6855	SU	/	7.53	8.14	10.86	/	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	8.94	9.35	12.16	/	Pass
			6685	SU	/	9.45	9.24	12.36	/	Pass
			6845	SU	/	8.70	8.96	11.84	/	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	8.54	8.69	11.63	/	Pass
			6705	SU	/	9.29	9.08	12.20	/	Pass
			6785	SU	/	8.87	9.00	11.95	/	Pass

3.1.6 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	5.68	5.14	8.57	<=24	Pass
			6695	SU	/	4.91	5.04	8.14	<=24	Pass
			6855	SU	/	4.73	5.05	8.06	<=24	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	6.14	6.26	9.36	<=24	Pass
			6685	SU	/	6.65	6.15	9.56	<=24	Pass
			6845	SU	/	5.90	5.87	9.04	<=24	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	5.74	5.60	8.83	<=24	Pass
			6705	SU	/	6.49	5.99	9.40	<=24	Pass
			6785	SU	/	6.07	5.91	9.15	<=24	Pass

Note1: Antenna Gain: ANT3: -3.09dBi; ANT2: -2.80dBi;
Note2: E.I.R.P = Measured Power + Antenna Gain

3.1.7 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	-3.15	-3.39	-0.26	/	Pass
			6995	SU	/	-2.24	-2.76	0.52	/	Pass
			7115	SU	/	-4.19	-4.41	-1.29	/	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	9.31	9.10	12.22	/	Pass
			7005	SU	/	9.33	8.98	12.17	/	Pass
			7085	SU	/	9.39	9.15	12.28	/	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	9.48	9.27	12.39	/	Pass
			7025	SU	/	9.70	9.49	12.61	/	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 112 of 341

3.1.8 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	-3.28	-11.40	-0.39	<=24	Pass
			6995	SU	/	-2.37	-10.77	0.39	<=24	Pass
			7115	SU	/	-4.32	-12.42	-1.42	<=24	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	9.18	1.09	12.09	<=24	Pass
			7005	SU	/	9.20	0.97	12.04	<=24	Pass
			7085	SU	/	9.26	1.14	12.15	<=24	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	9.35	1.26	12.26	<=24	Pass
			7025	SU	/	9.57	1.48	12.48	<=24	Pass

Note1: Antenna Gain: ANT3: -8.01dBi; ANT2: -0.13dBi;
Note2: E.I.R.P = Measured Power + Antenna Gain

3.1.9 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6875	SU	/	9.20	8.49	11.87	/	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	8.67	9.03	11.86	/	Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	8.77	9.28	12.04	/	Pass

3.1.10 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6875	SU	/	9.07	0.48	11.74	<=24	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	8.54	1.02	11.73	<=24	Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	8.64	1.27	11.91	<=24	Pass

Note1: Antenna Gain: ANT3: -8.01dBi; ANT2: -0.13dBi;
Note2: E.I.R.P = Measured Power + Antenna Gain

3.1.11 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	8.95	8.71	11.84	/	Pass
	802.11ax (HEW80)	MIMO	6545	SU	/	9.14	9.08	12.12	/	Pass

3.1.12 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 114 of 341

4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	-5.47	-4.39	-2.04	/	Pass
			6175	SU	/	-3.79	-4.87	-1.43	/	Pass
			6415	SU	/	-4.22	-4.69	-1.67	/	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	-4.66	-4.22	-1.79	/	Pass
			6165	SU	/	-3.50	-5.04	-1.30	/	Pass
			6405	SU	/	-3.99	-5.72	-2.01	/	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	-5.75	-5.61	-2.89	/	Pass
			6145	SU	/	-5.21	-5.63	-2.66	/	Pass
			6385	SU	/	-4.46	-6.07	-2.19	/	Pass

4.1.2 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	-5.60	-5.00	-2.17	<=-1	Pass
			6175	SU	/	-3.92	-5.48	-1.56	<=-1	Pass
			6415	SU	/	-4.35	-5.30	-1.80	<=-1	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	-4.79	-4.83	-1.92	<=-1	Pass
			6165	SU	/	-3.63	-5.65	-1.43	<=-1	Pass
			6405	SU	/	-4.12	-6.33	-2.14	<=-1	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	-5.88	-6.22	-3.02	<=-1	Pass
			6145	SU	/	-5.34	-6.24	-2.79	<=-1	Pass
			6385	SU	/	-4.59	-6.68	-2.32	<=-1	Pass

Note1: Antenna Gain: ANT3: -0.61dBi; ANT2: -0.13dBi;

Note2: E.I.R.PSD = Measured PSD + Antenna Gain

4.1.3 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	-5.63	-5.01	-2.39	/	Pass
			6475	SU	/	-5.90	-5.22	-2.70	/	Pass
			6515	SU	/	-4.97	-4.28	-1.80	/	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	-5.66	-6.02	-2.97	/	Pass
			6485	SU	/	-5.86	-5.57	-2.78	/	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	-6.65	-7.07	-4.08	/	Pass

4.1.4 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	-7.93	-8.33	-4.69	<=-1	Pass
			6475	SU	/	-8.20	-8.54	-5.00	<=-1	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 115 of 341

			6515	SU	/	-7.27	-7.60	-4.10	<=-1	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	-7.96	-9.34	-5.27	<=-1	Pass
			6485	SU	/	-8.16	-8.89	-5.08	<=-1	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	-8.95	-10.39	-6.38	<=-1	Pass

Note1: Antenna Gain: ANT3: -3.32dBi; ANT2: -2.30dBi;
Note2: E.I.R.PSD = Measured PSD + Antenna Gain

4.1.5 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	-4.51	-3.70	-1.28	/	Pass
			6695	SU	/	-4.85	-4.55	-1.86	/	Pass
			6855	SU	/	-4.03	-5.05	-1.86	/	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	-5.84	-4.61	-2.35	/	Pass
			6685	SU	/	-5.46	-4.62	-2.02	/	Pass
			6845	SU	/	-4.18	-5.81	-2.23	/	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	-6.38	-5.52	-3.14	/	Pass
			6705	SU	/	-5.93	-5.85	-3.09	/	Pass
			6785	SU	/	-4.01	-6.23	-2.17	/	Pass

4.1.6 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	-7.31	-6.79	-4.08	<=-1	Pass
			6695	SU	/	-7.65	-7.64	-4.66	<=-1	Pass
			6855	SU	/	-6.83	-8.14	-4.66	<=-1	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	-8.64	-7.70	-5.15	<=-1	Pass
			6685	SU	/	-8.26	-7.71	-4.82	<=-1	Pass
			6845	SU	/	-6.98	-8.90	-5.03	<=-1	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	-9.18	-8.61	-5.94	<=-1	Pass
			6705	SU	/	-8.73	-8.94	-5.89	<=-1	Pass
			6785	SU	/	-6.81	-9.32	-4.97	<=-1	Pass

Note1: Antenna Gain: ANT3: -3.09dBi; ANT2: -2.80dBi;
Note2: E.I.R.PSD = Measured PSD + Antenna Gain

4.1.7 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	-3.67	-5.16	-1.47	/	Pass
			6995	SU	/	-4.15	-5.76	-2.15	/	Pass
			7115	SU	/	-4.38	-5.02	-1.88	/	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	-3.17	-5.73	-1.40	/	Pass
			7005	SU	/	-4.54	-5.72	-2.21	/	Pass
			7085	SU	/	-4.60	-5.48	-2.01	/	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	-3.35	-5.73	-1.37	/	Pass
			7025	SU	/	-4.72	-5.30	-2.11	/	Pass

4.1.8 E.I.R.PSD

ENV	Mode	TX	Frequency	RU	RU	Maximum E.I.R.PSD (dBm/MHz)	Verdict
-----	------	----	-----------	----	----	-----------------------------	---------

Note2: E.I.R.P.SD = Measured PSD + Antenna Gain




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 117 of 341

4.2 Test Graph


4.2.1 PSD

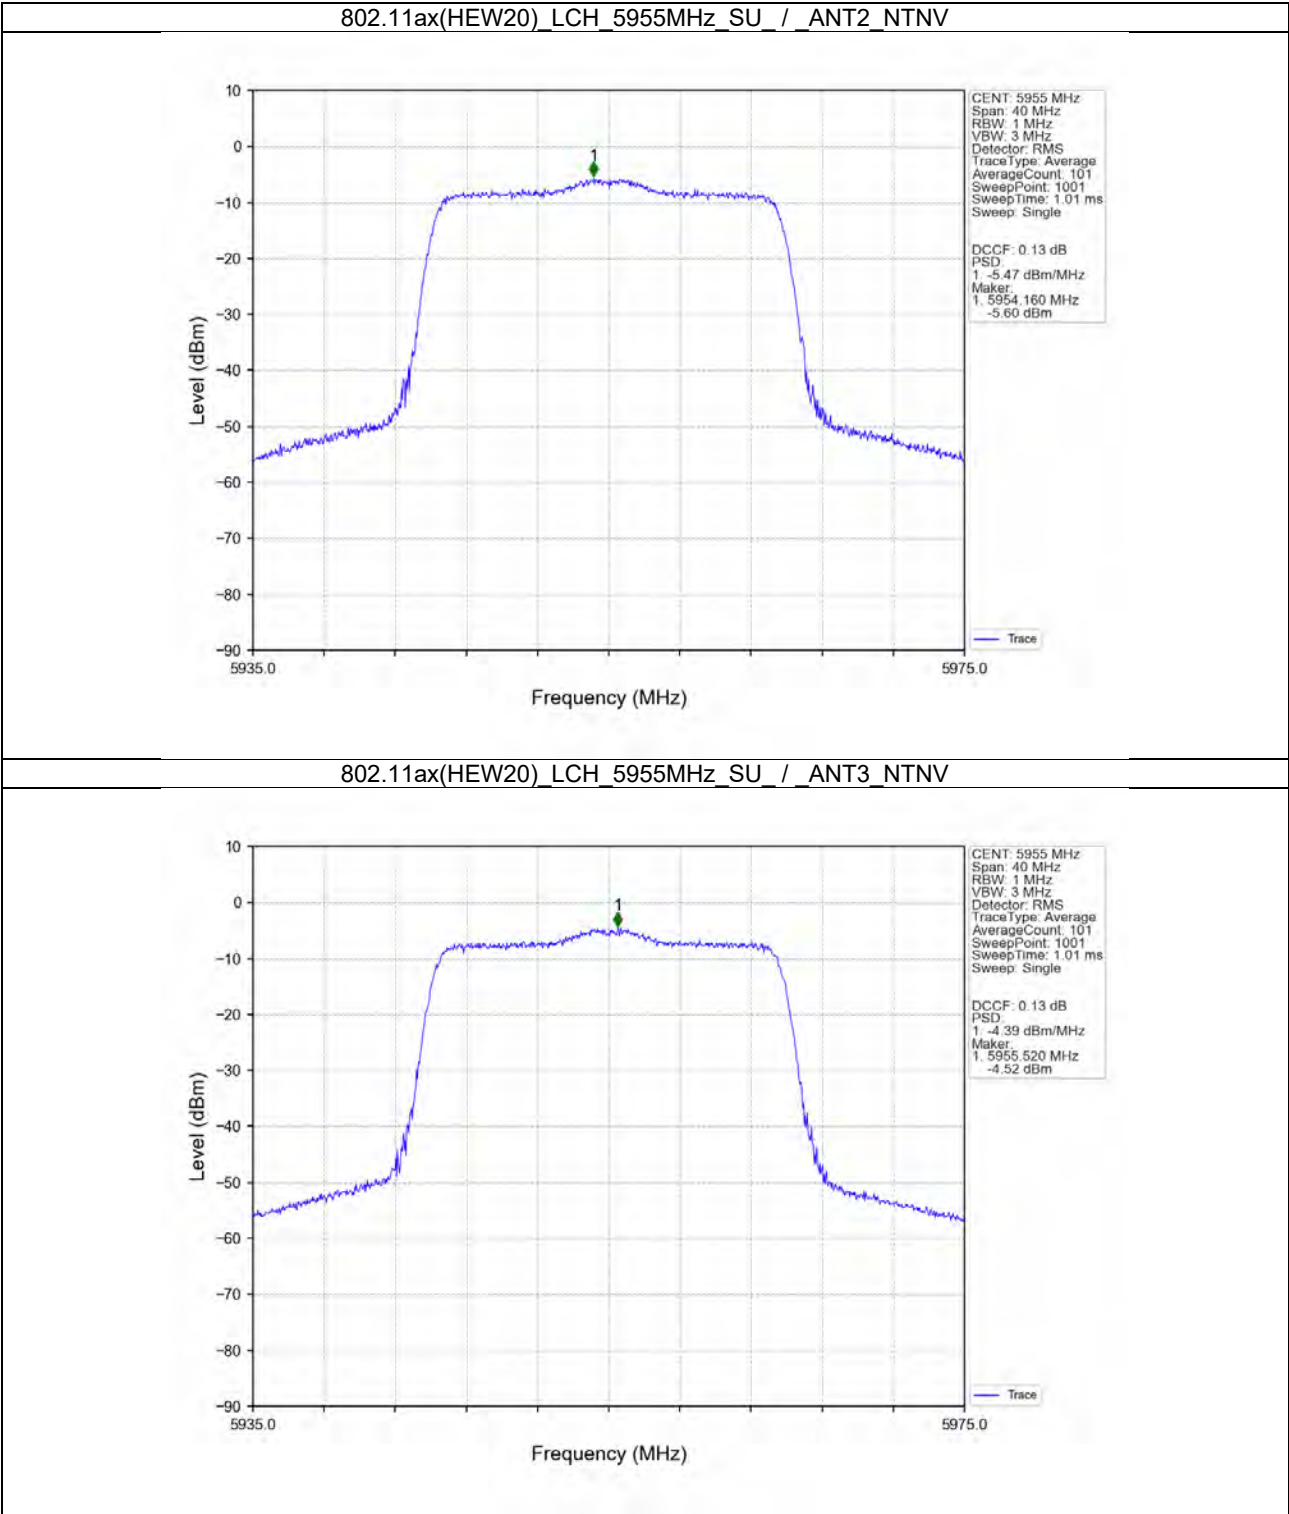



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 118 of 341

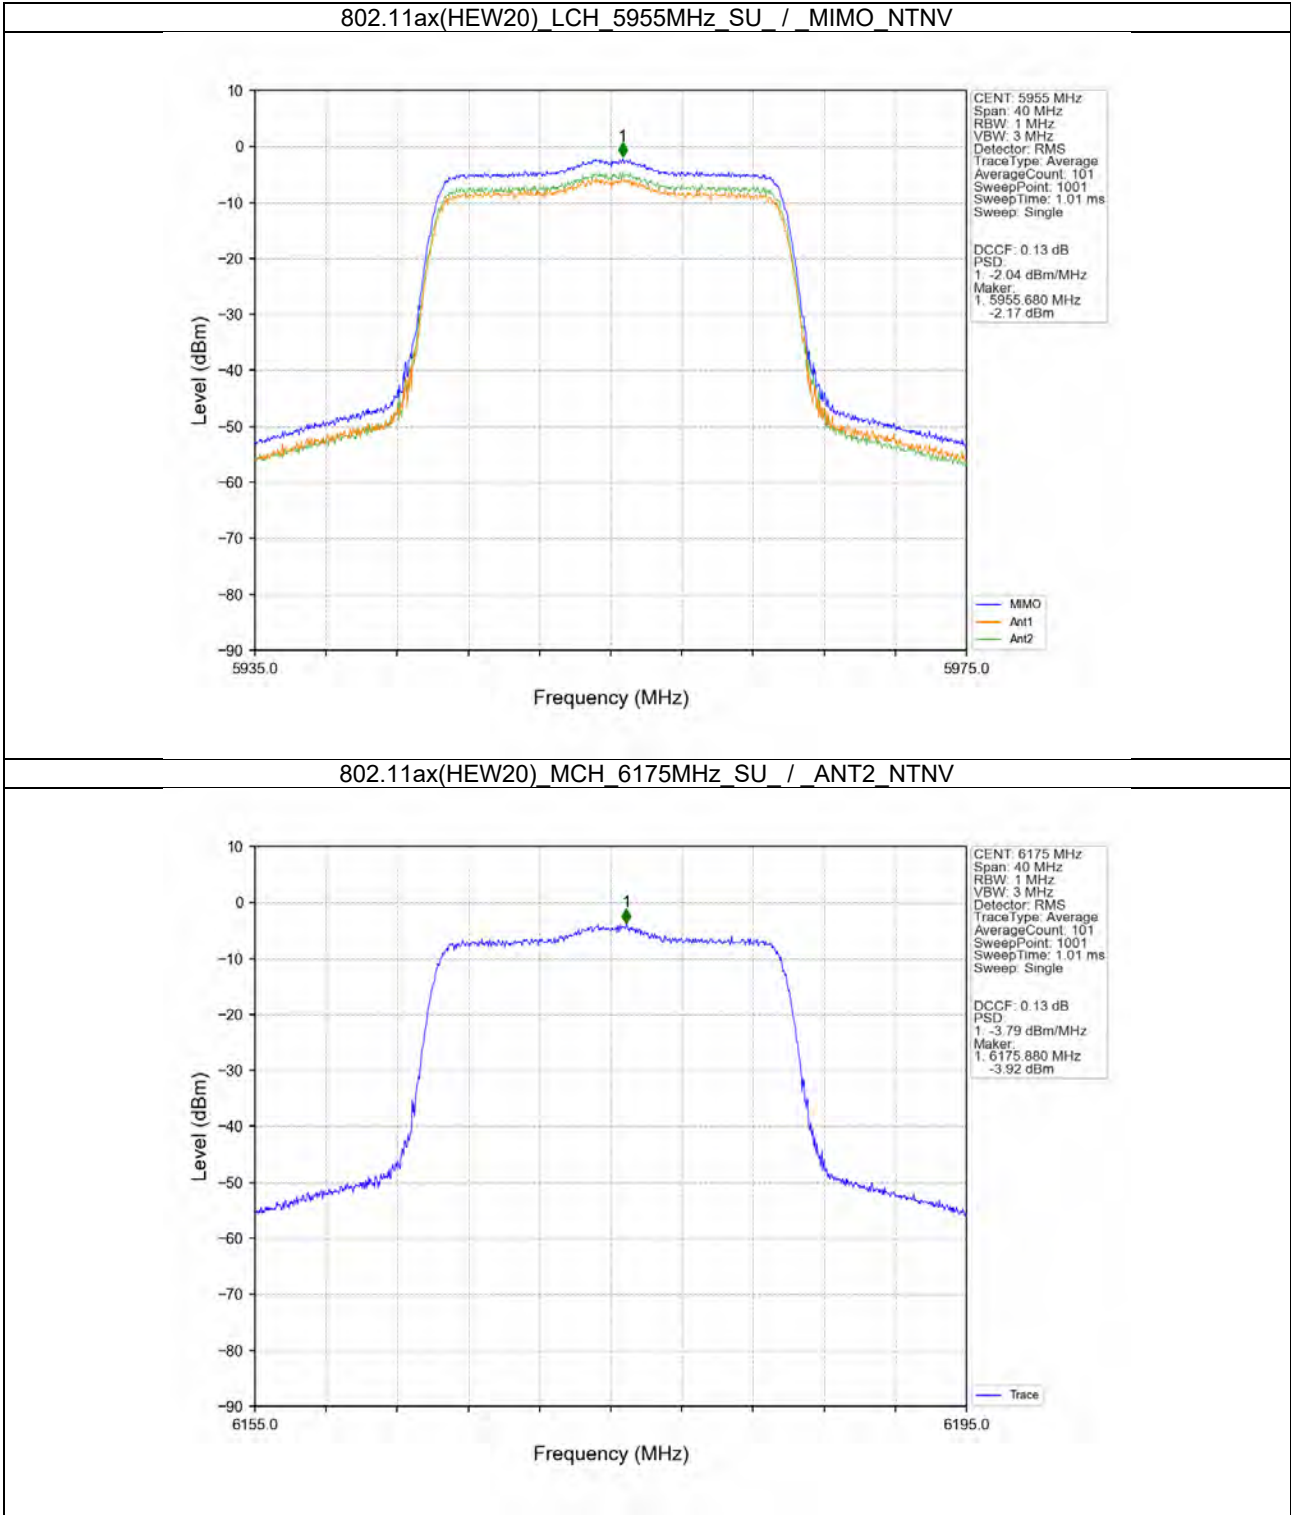


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
 Rev.: 01
 Page: 119 of 341

802.11ax(HEW20)_MCH_6175MHz_SU_/_ANT3_NTNV

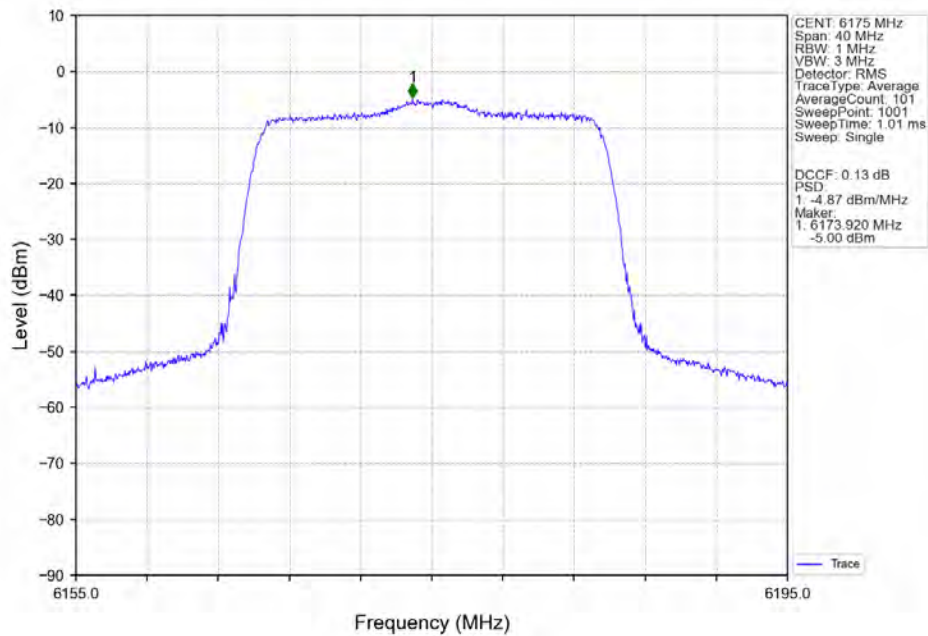


802.11ax(HEW20)_MCH_6175MHz_SU_/_MIMO_NTNV

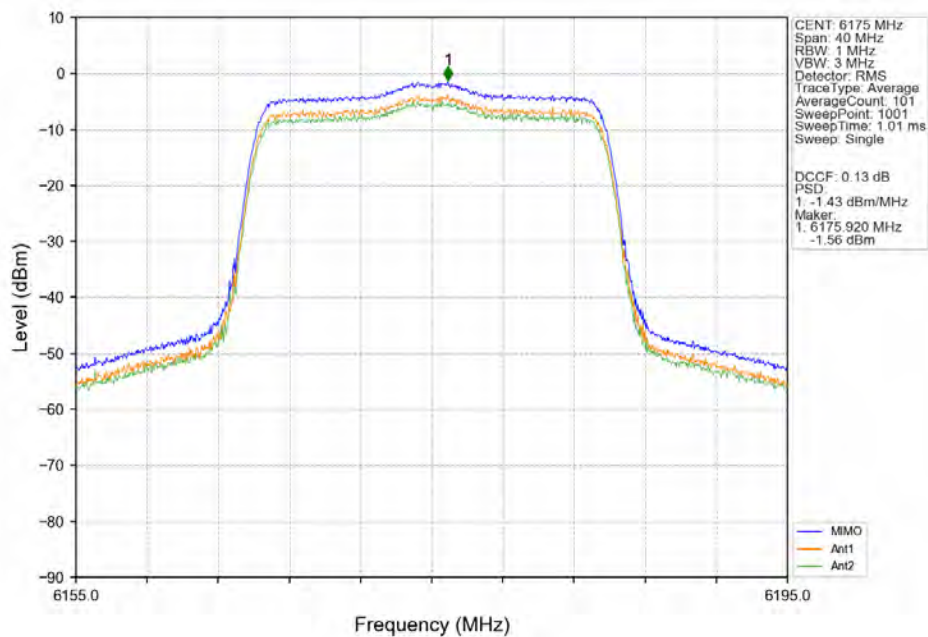




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 120 of 341

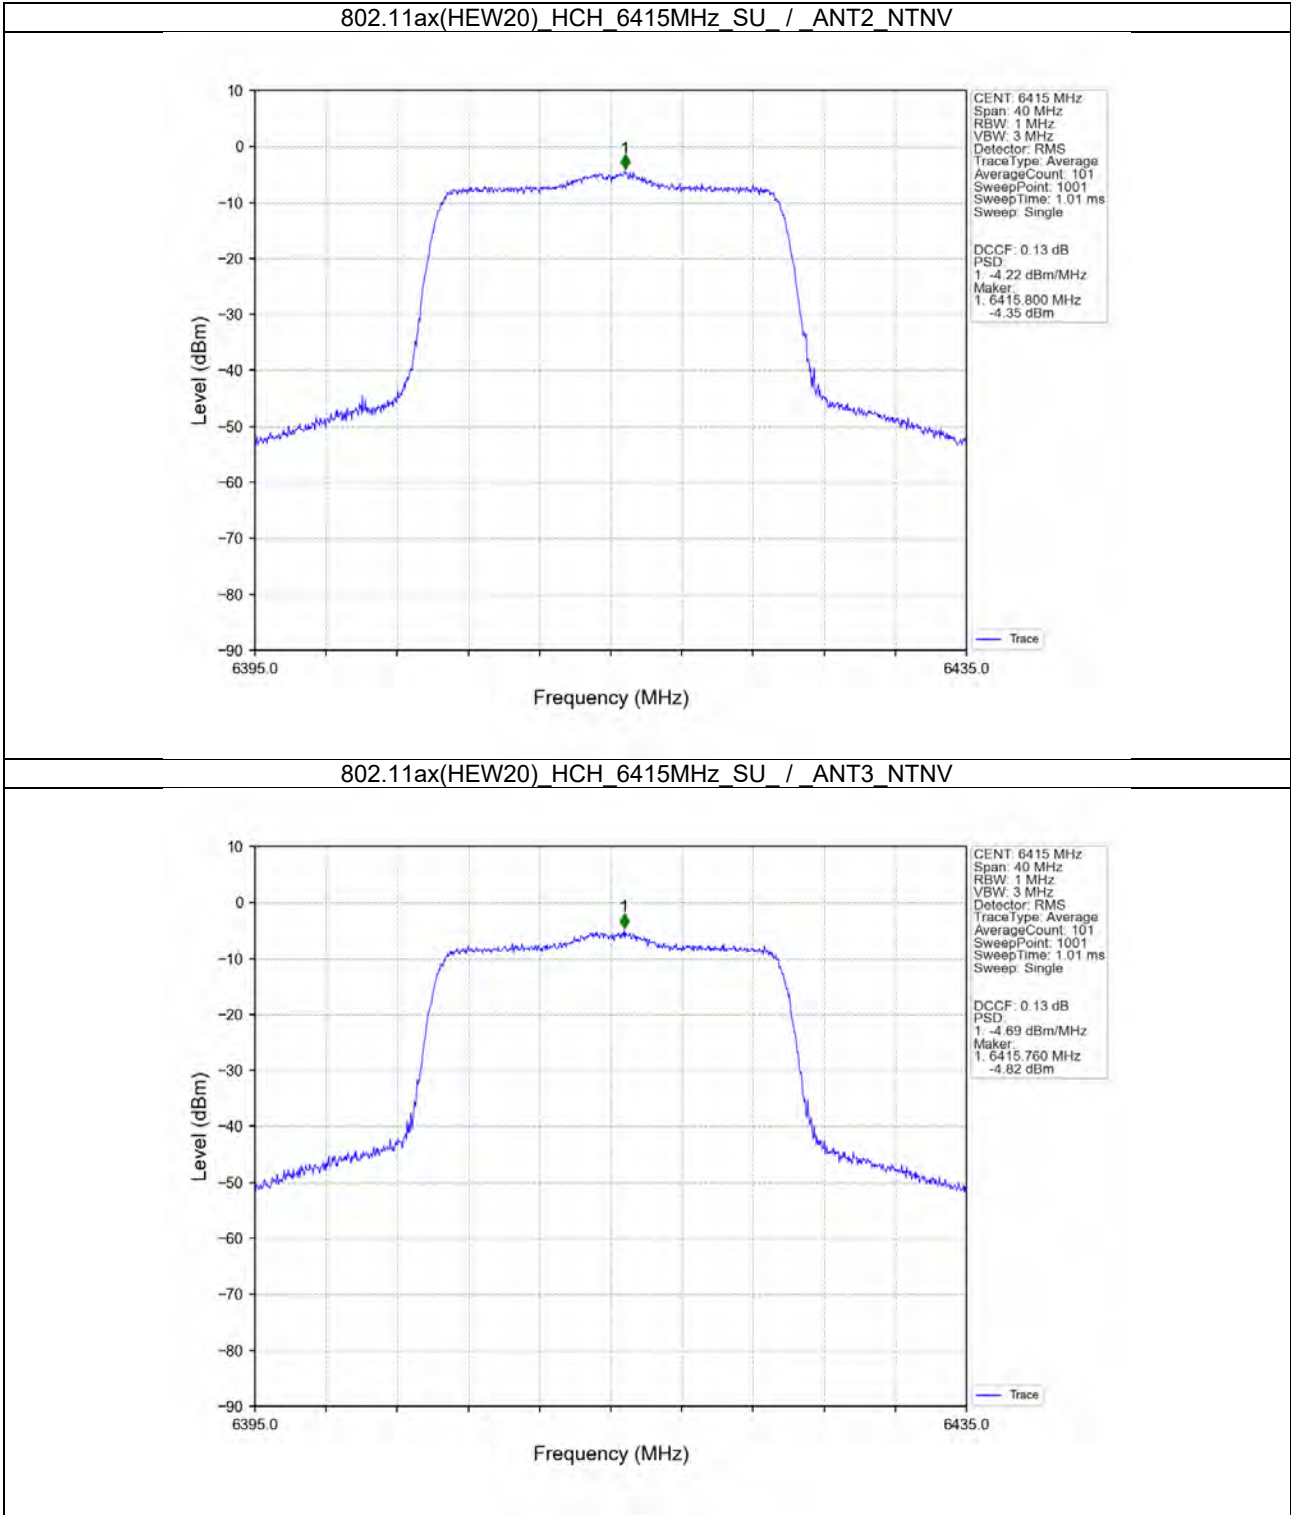

802.11ax(HEW20)_HCH_6415MHz_SU / _MIMO_NTNV

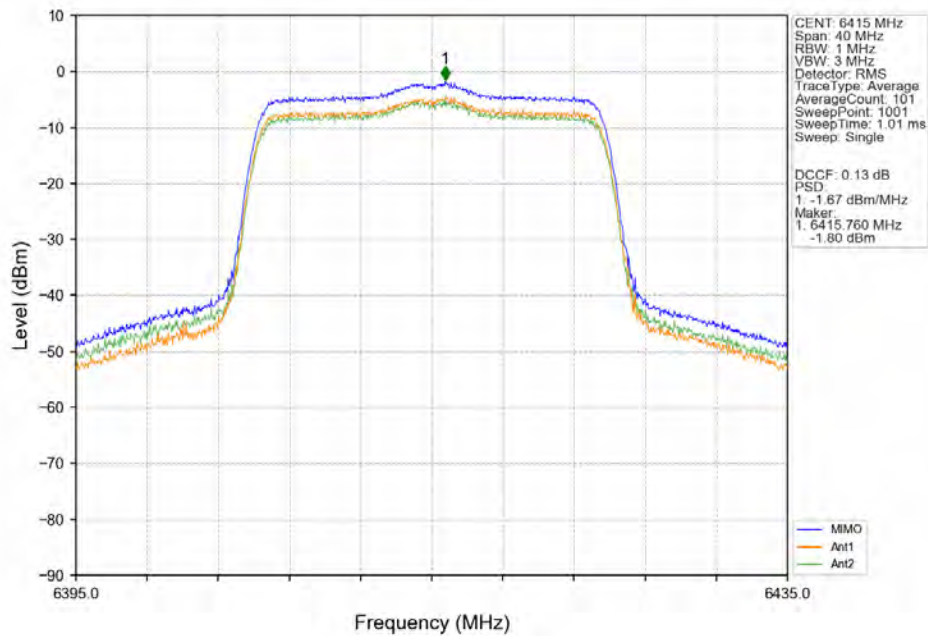


802.11ax(HEW40)_LCH_5965MHz_SU / _ANT2_NTNV

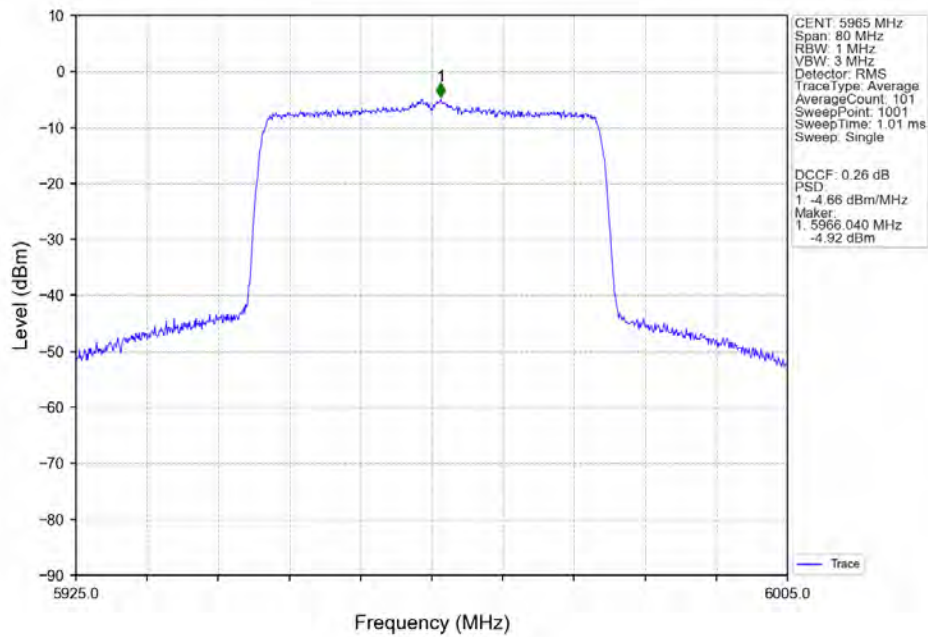



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 122 of 341

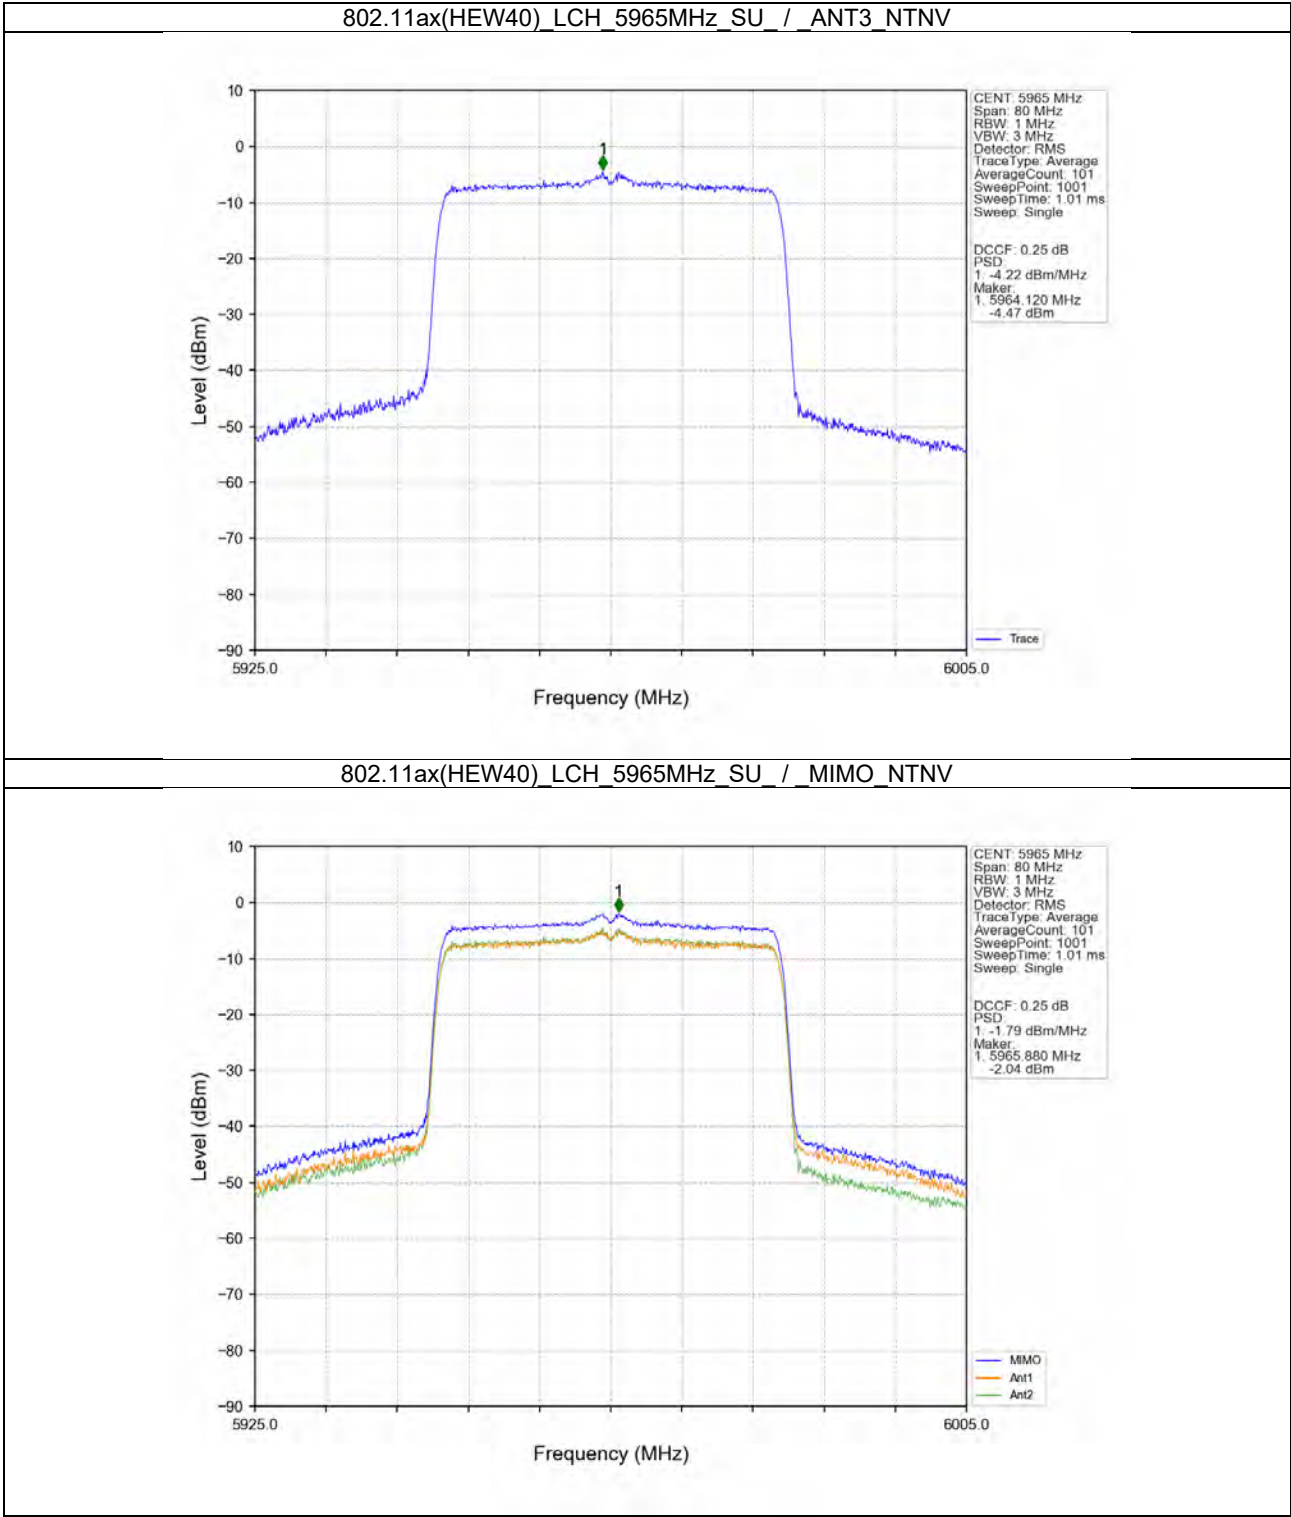



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 123 of 341

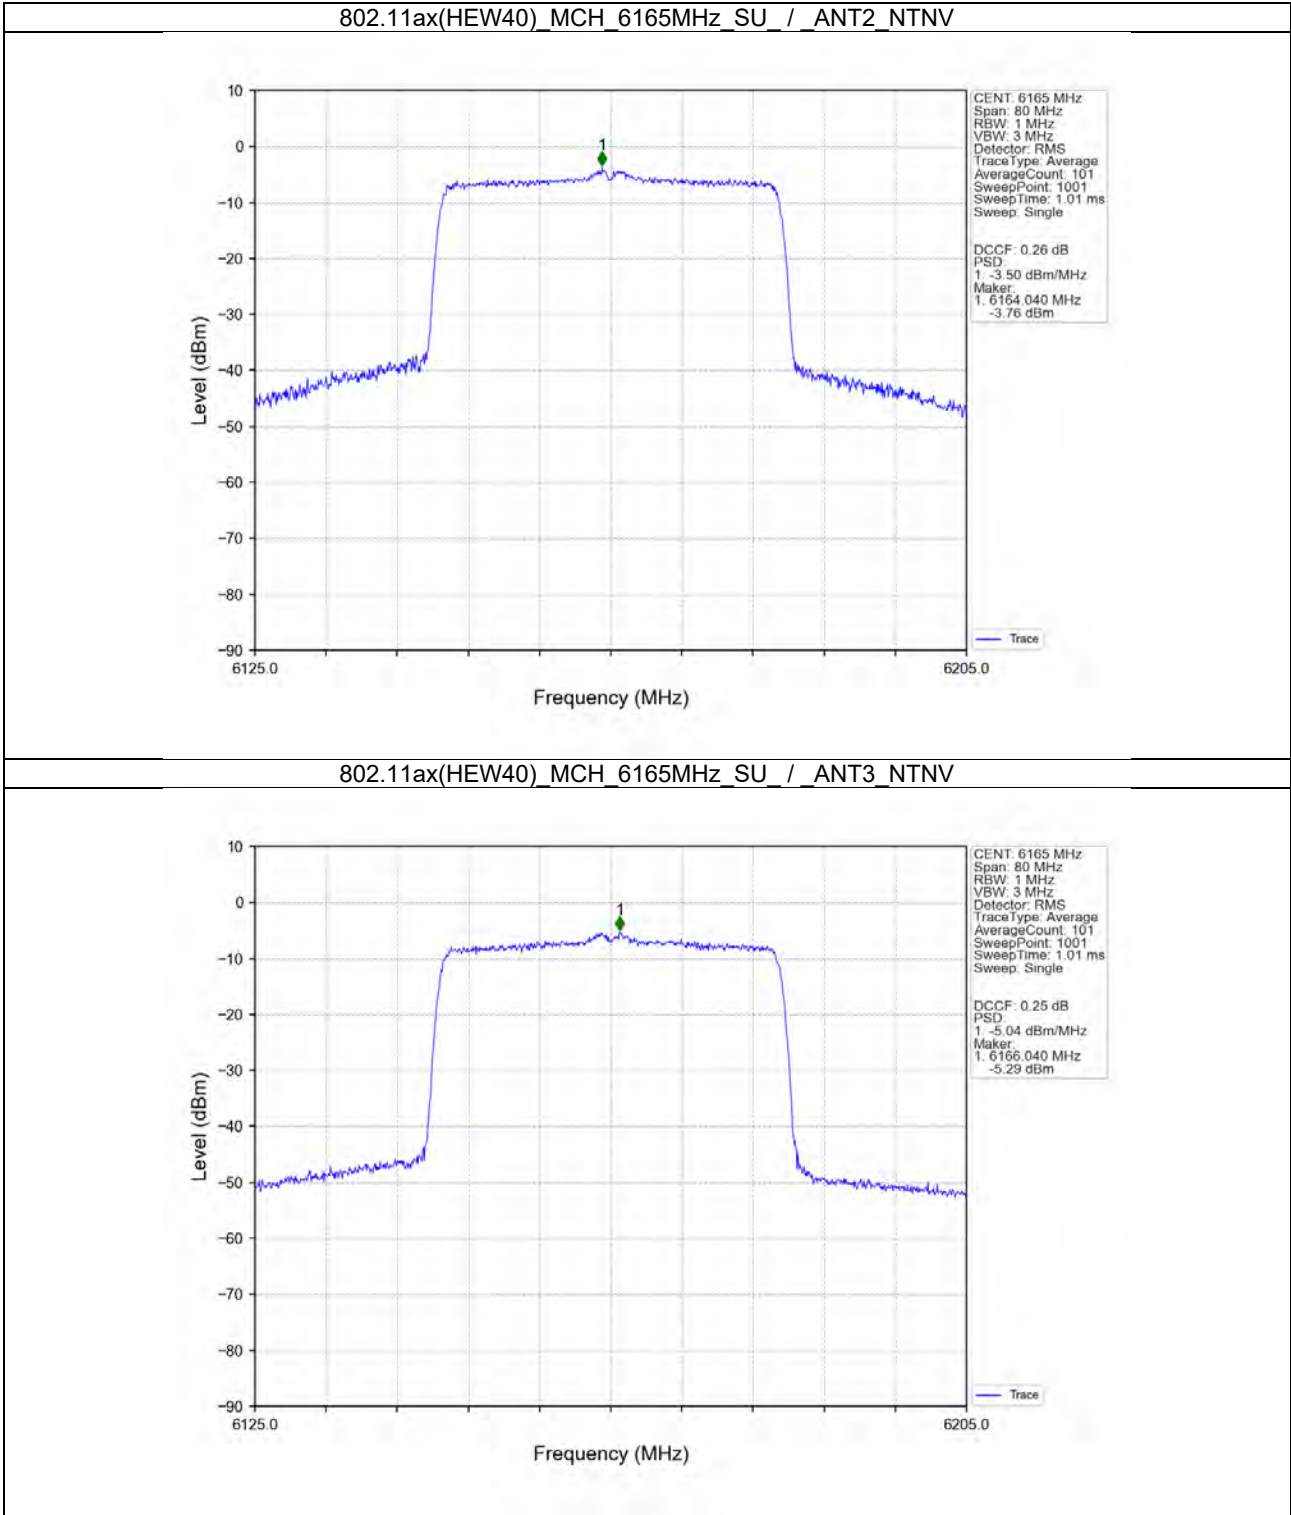



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 124 of 341

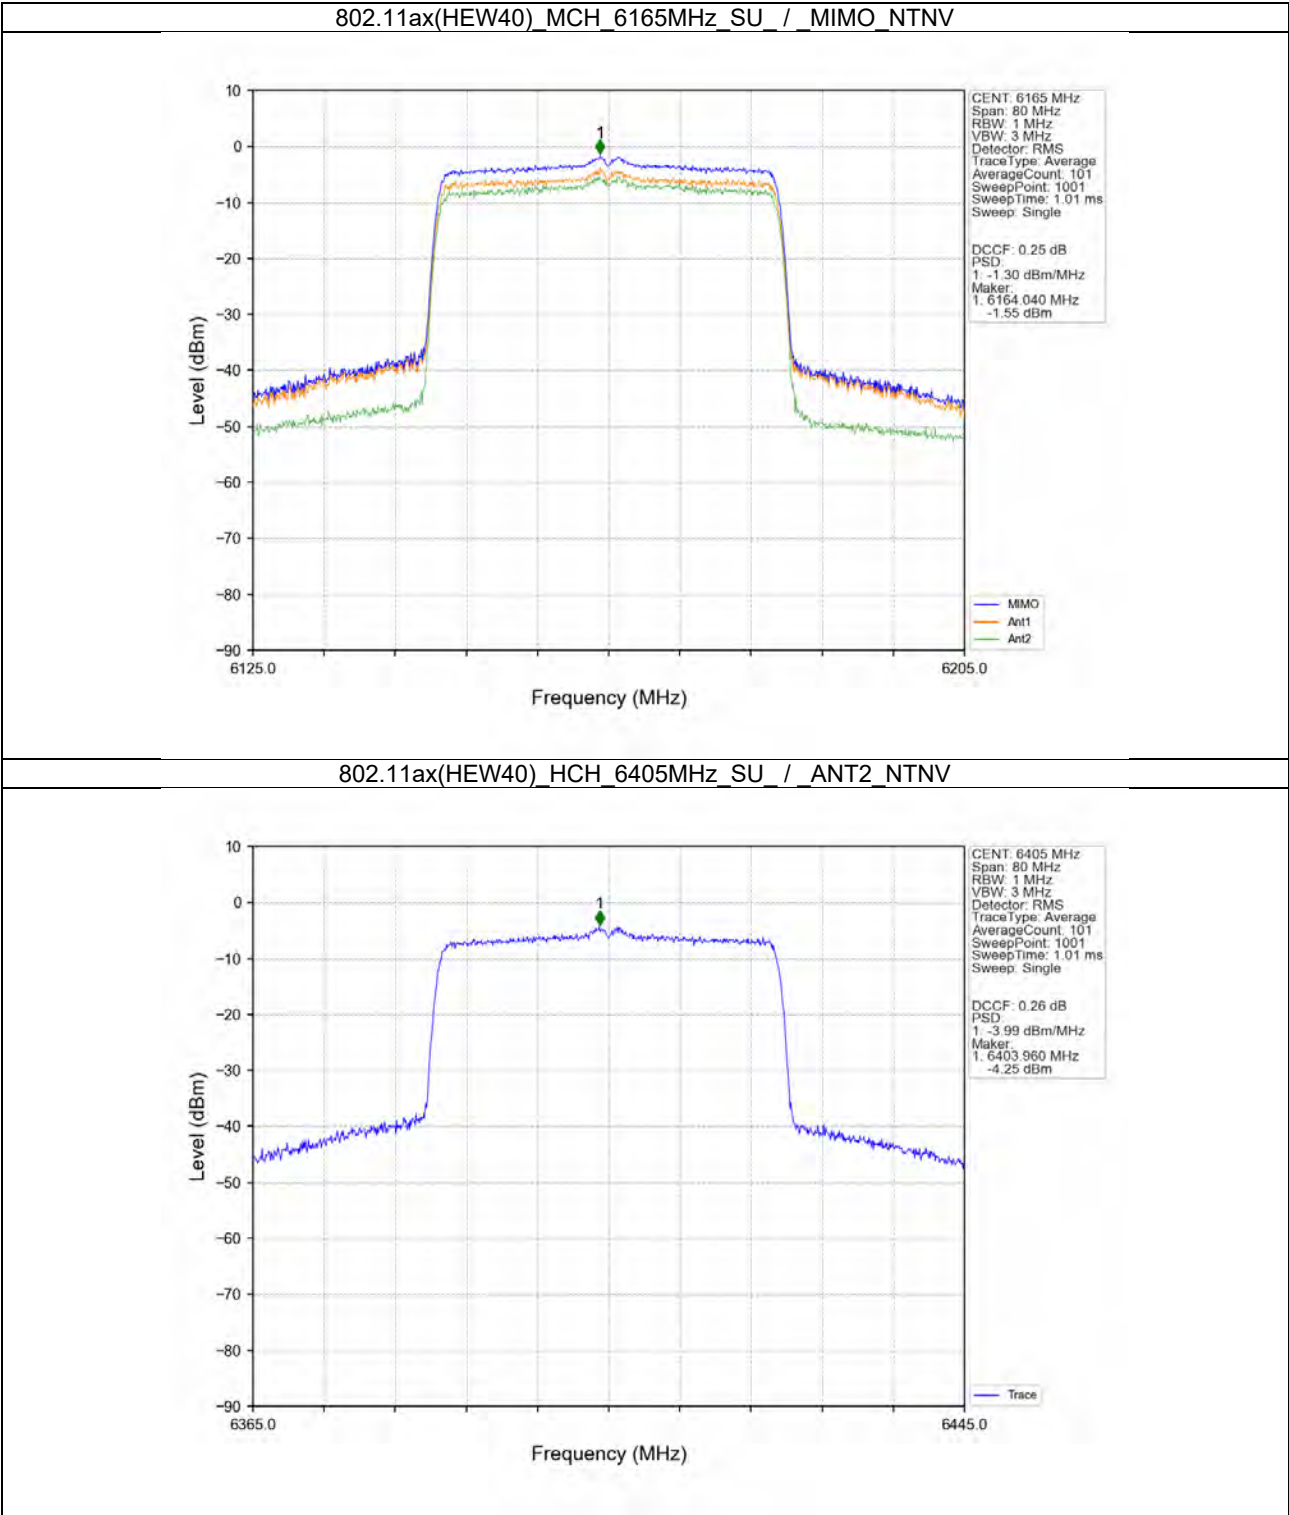



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 125 of 341

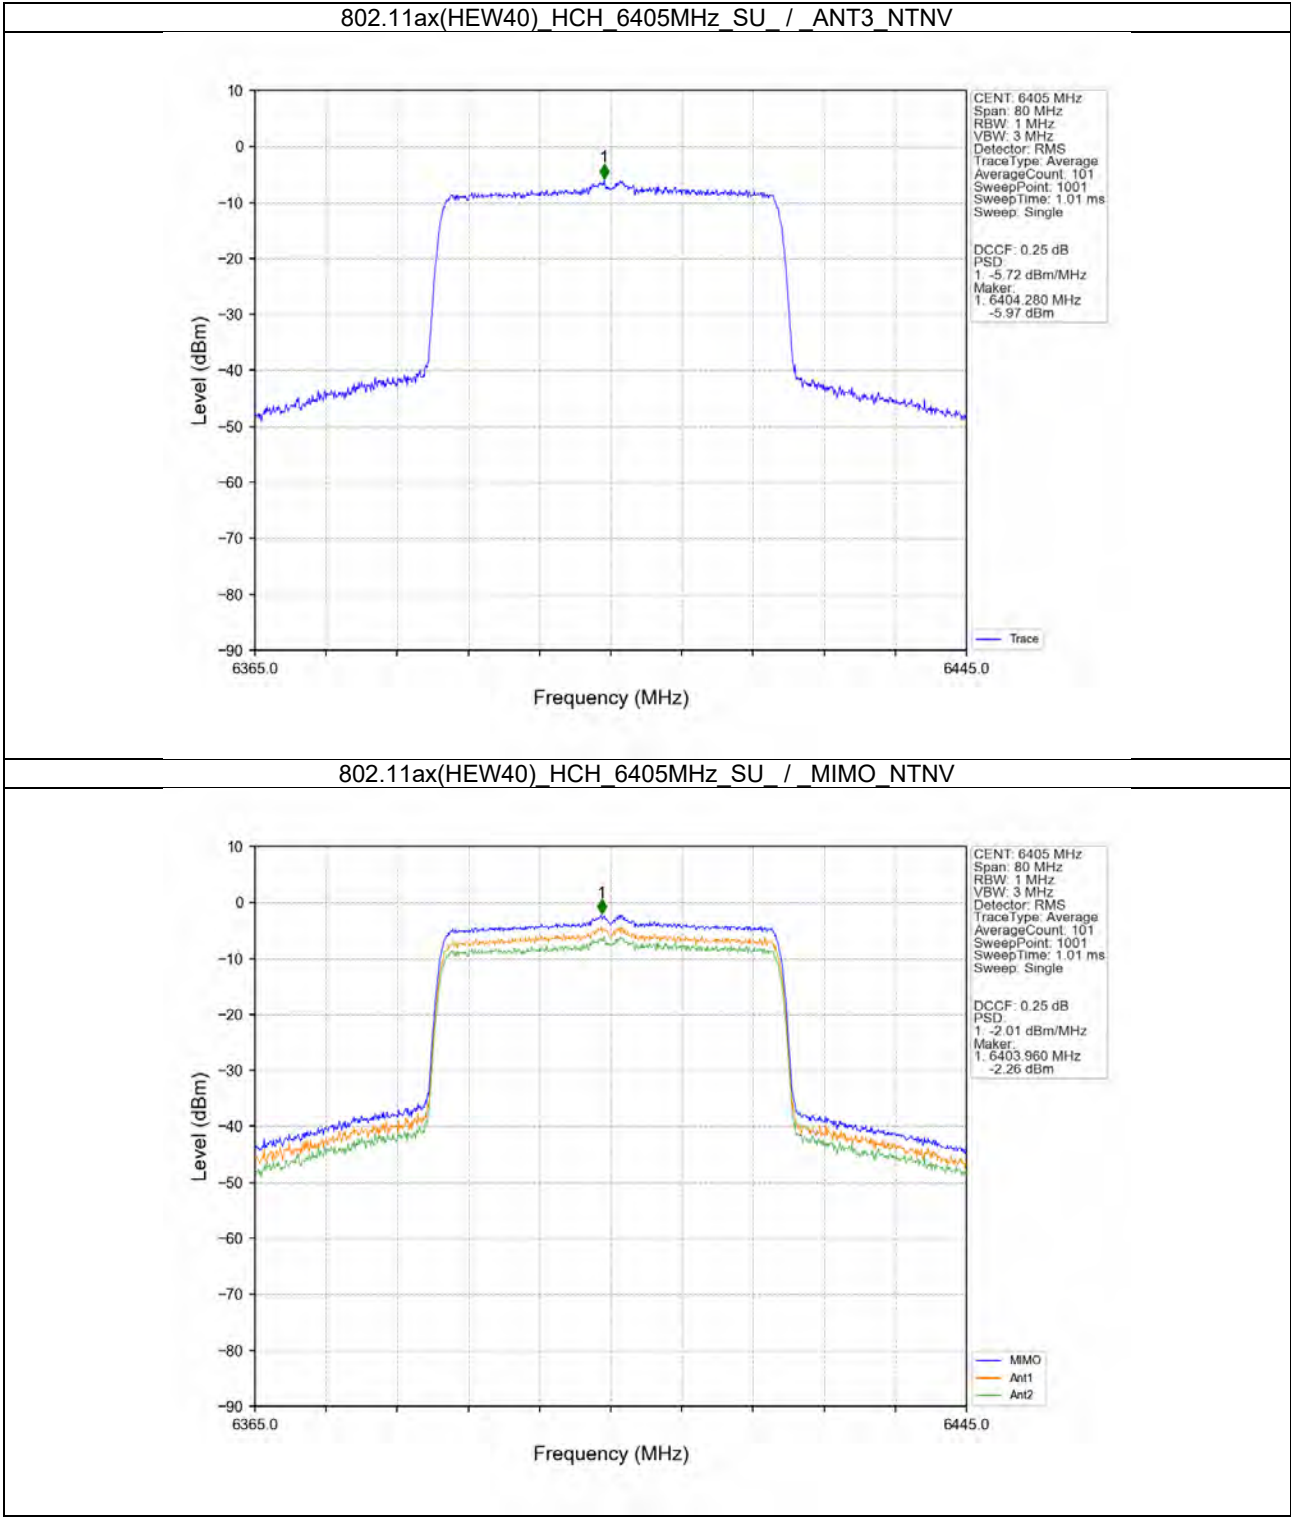




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 126 of 341

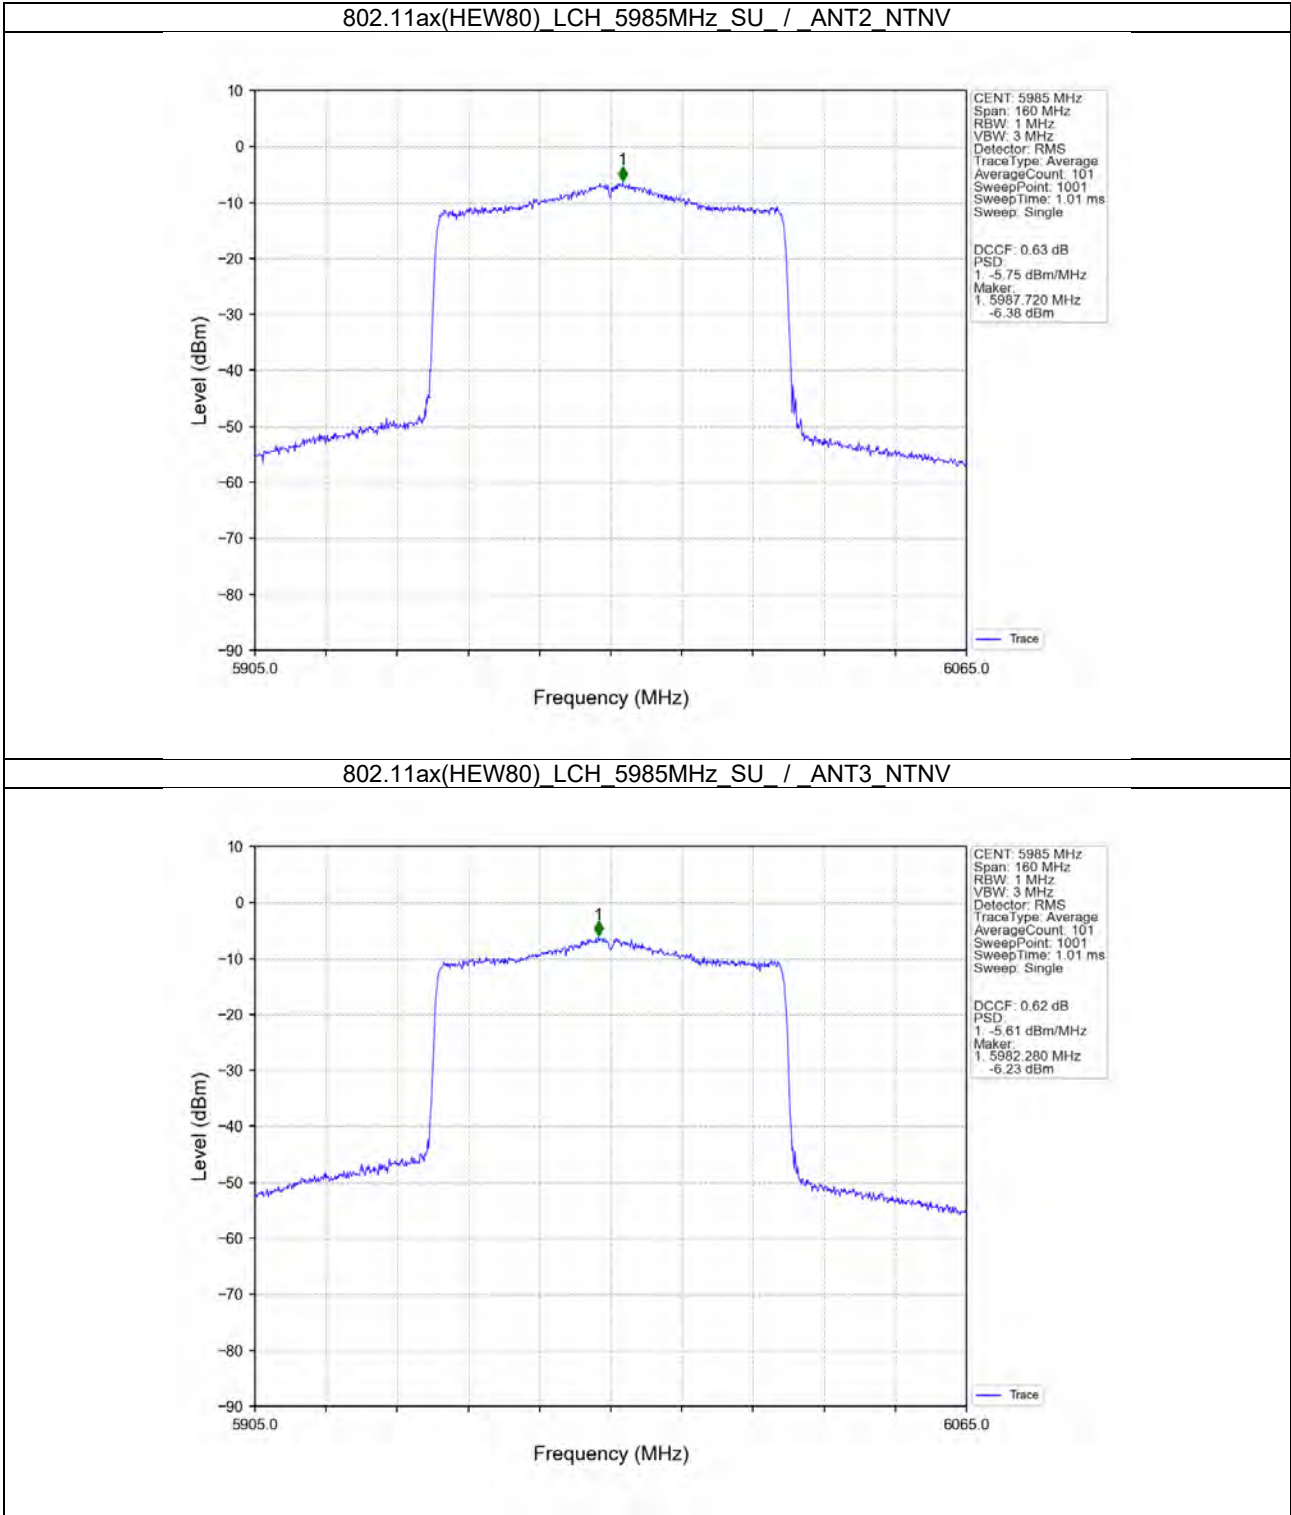

802.11ax(HEW80)_LCH_5985MHz_SU_ / MIMO_NTNV

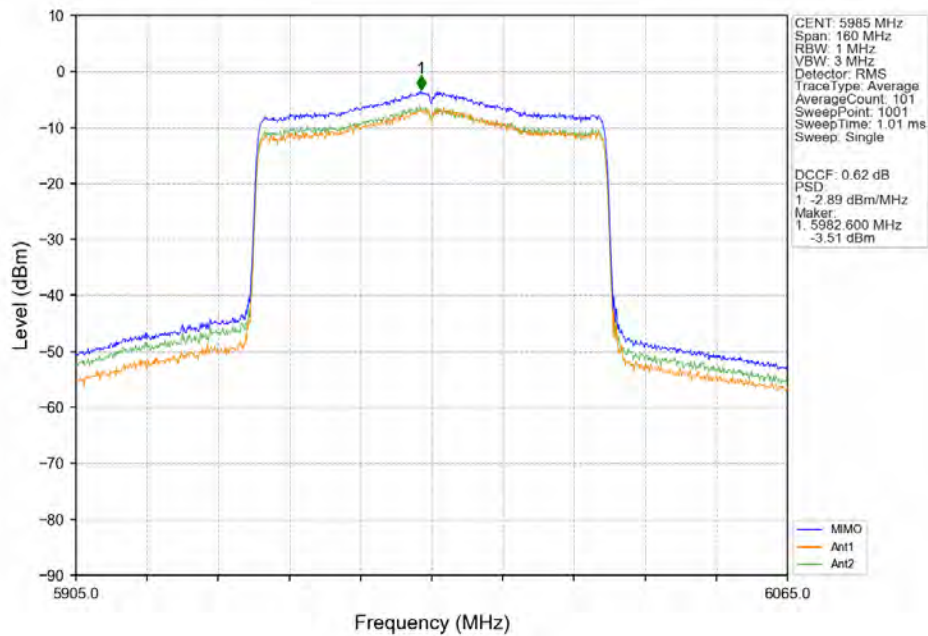


802.11ax(HEW80)_MCH_6145MHz_SU_ / ANT2_NTNV

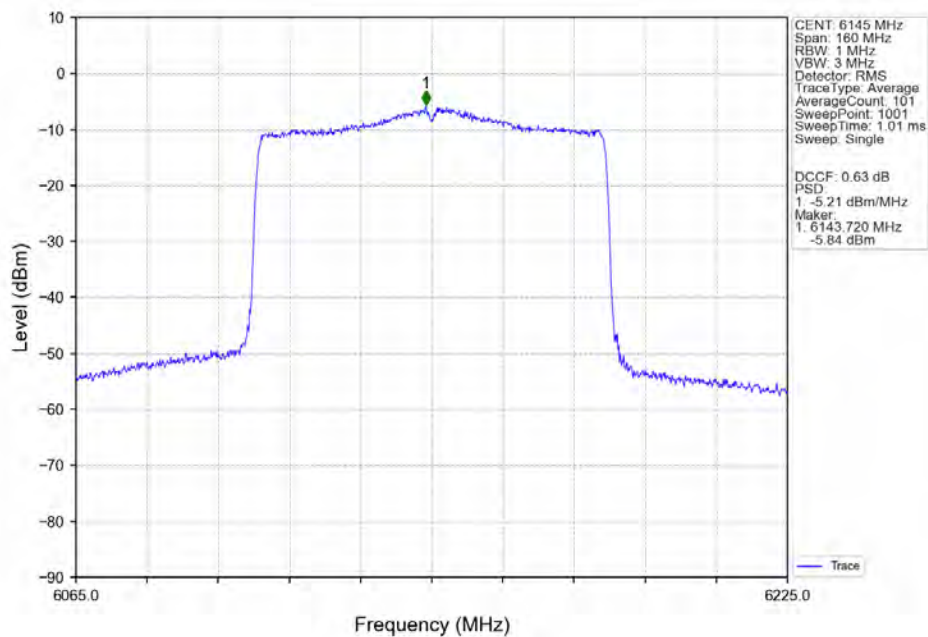



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 128 of 341

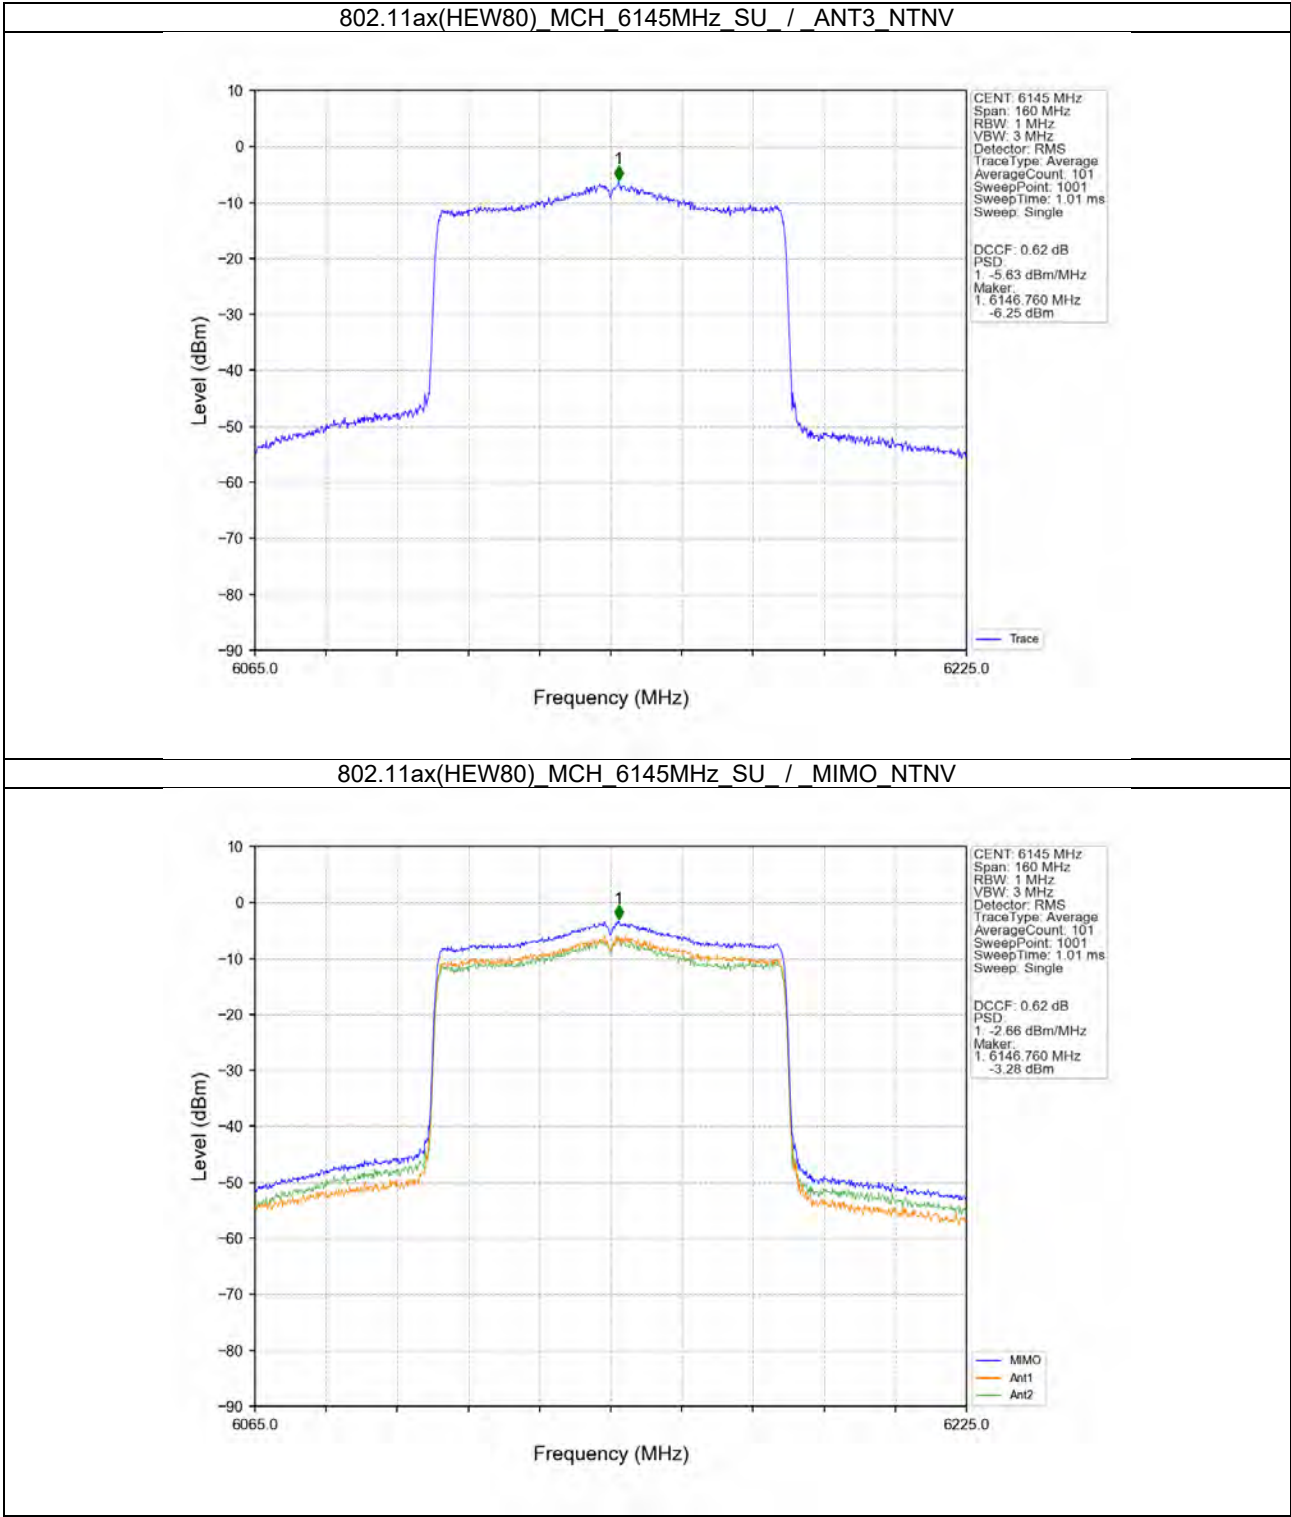



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 129 of 341

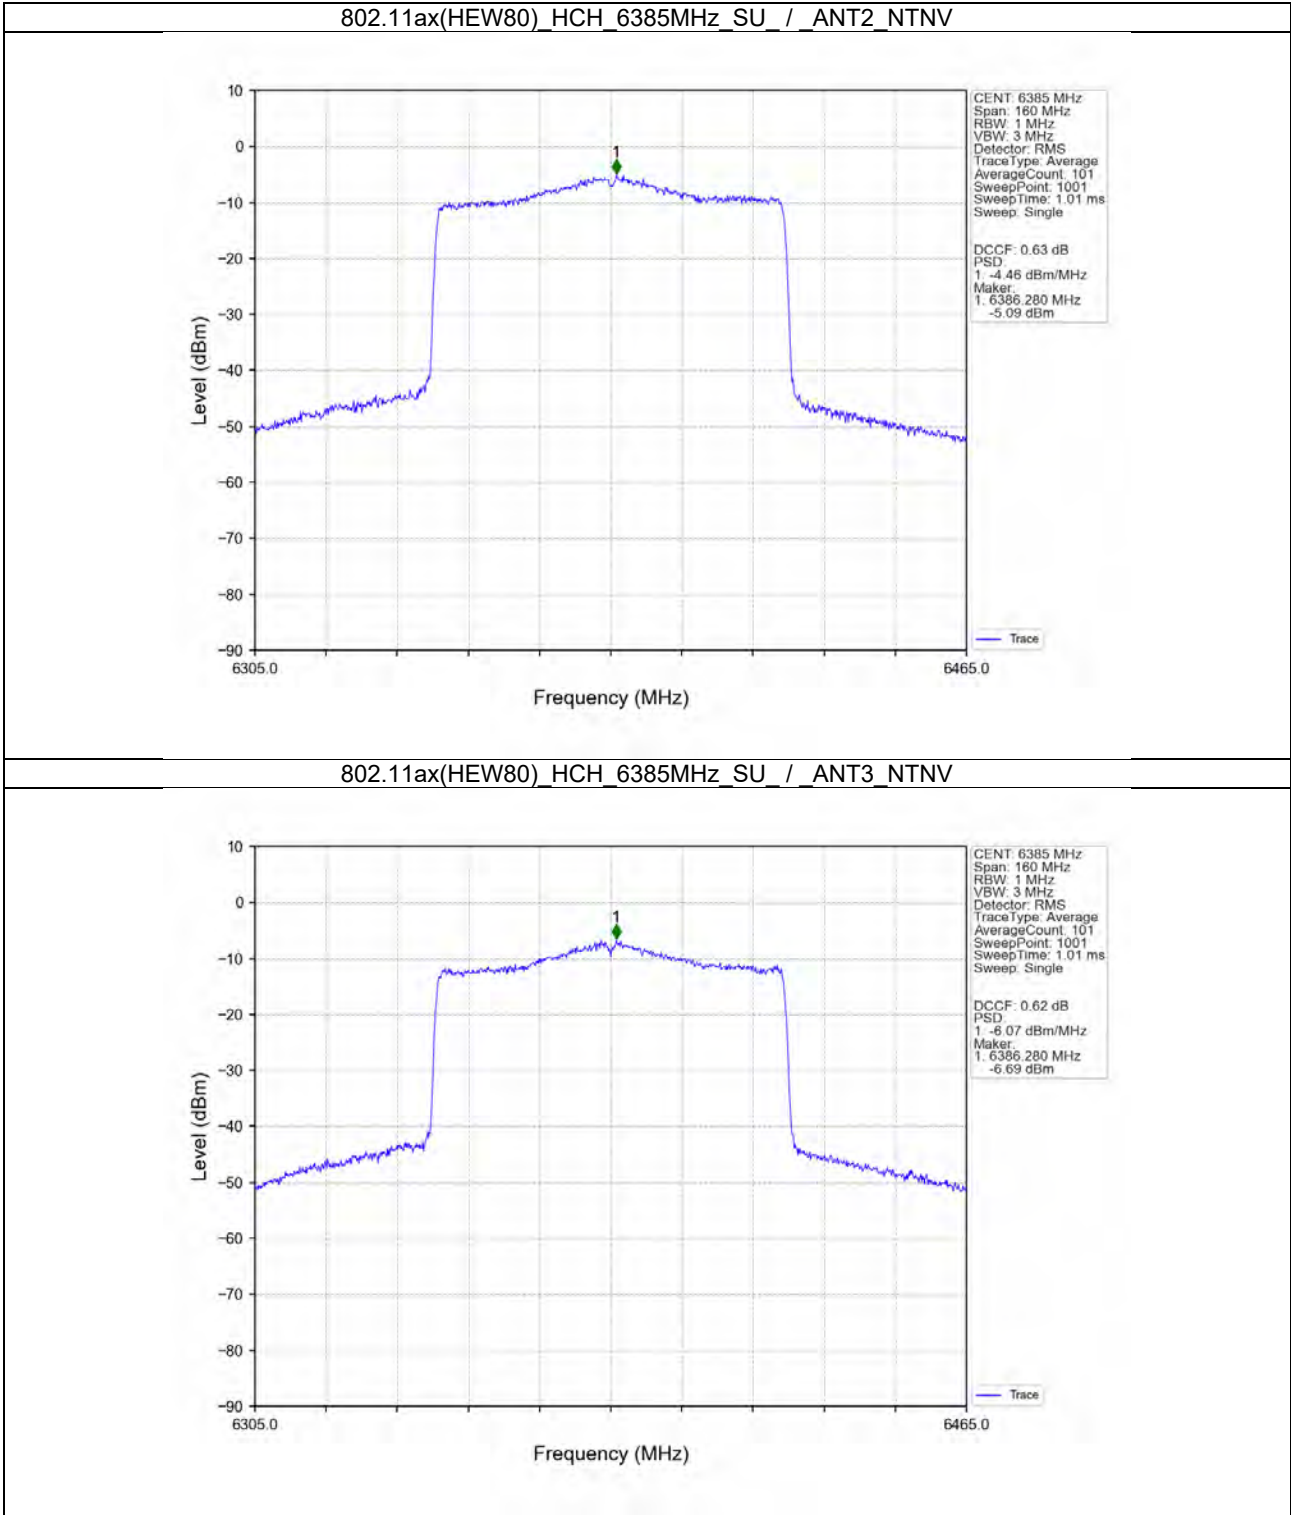



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 130 of 341

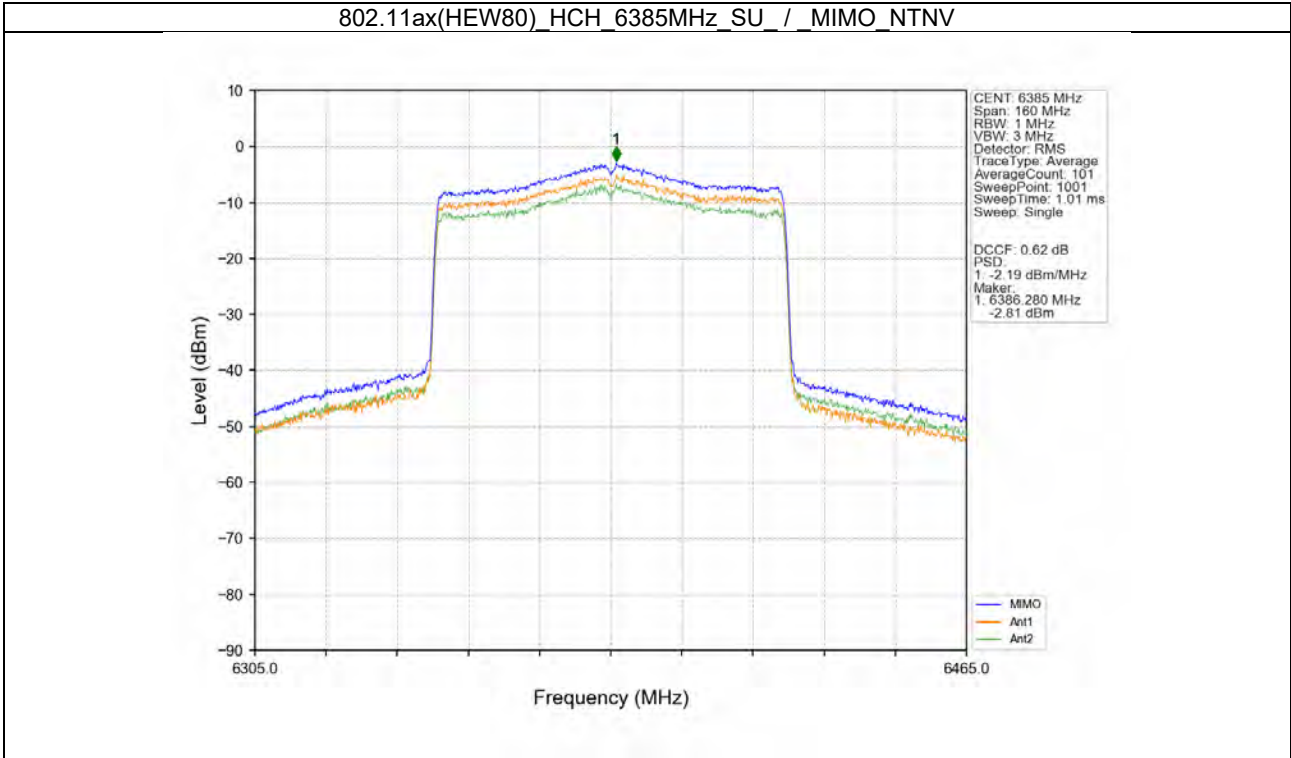





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 131 of 341


4.2.3 PSD

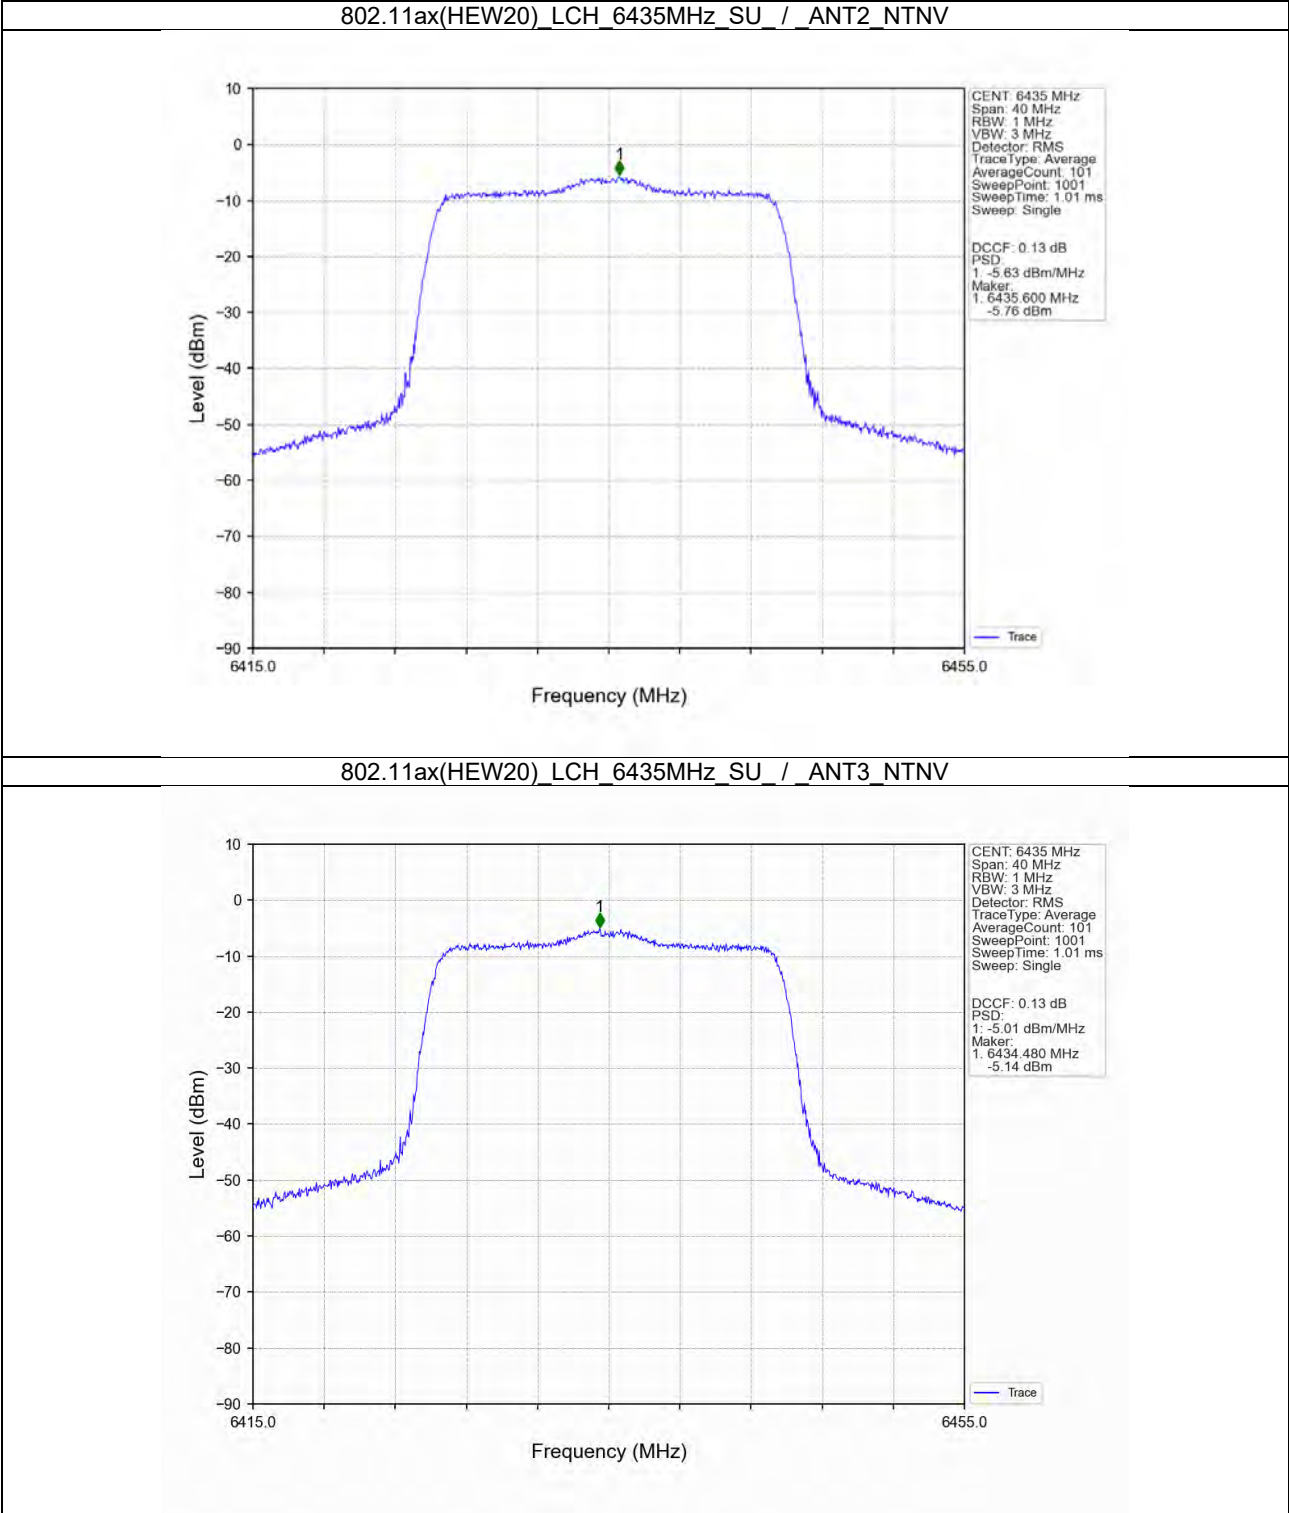

802.11ax(HEW20) LCH_6435MHz_SU_ / MIMO_NTNV

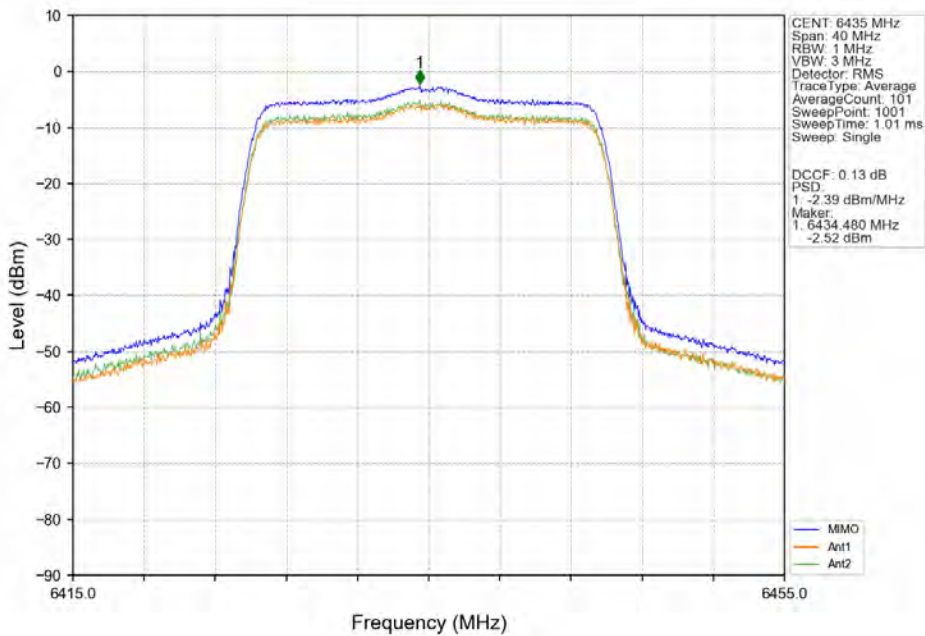


802.11ax(HEW20) MCH_6475MHz_SU_ / ANT2_NTNV

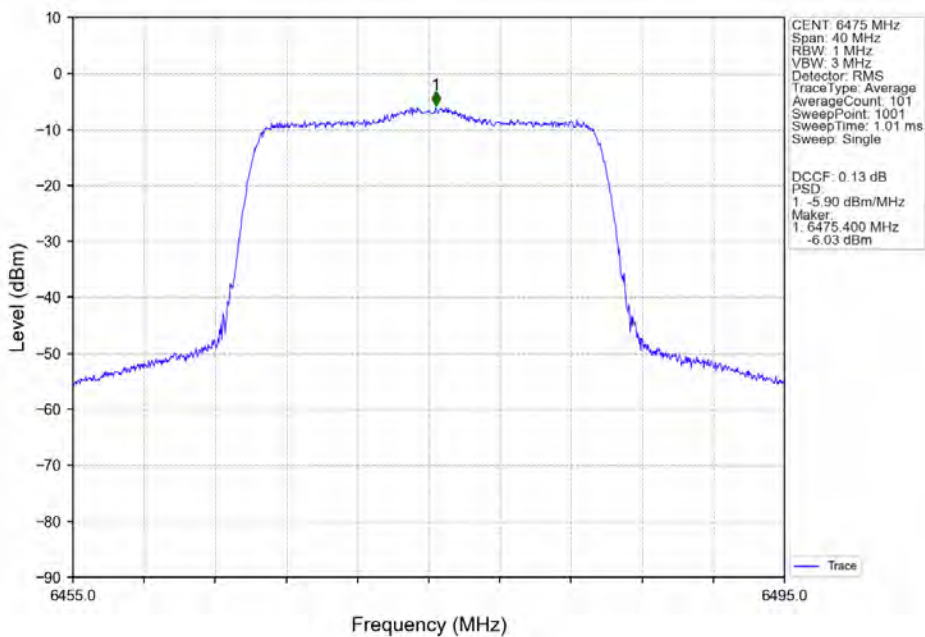



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 133 of 341

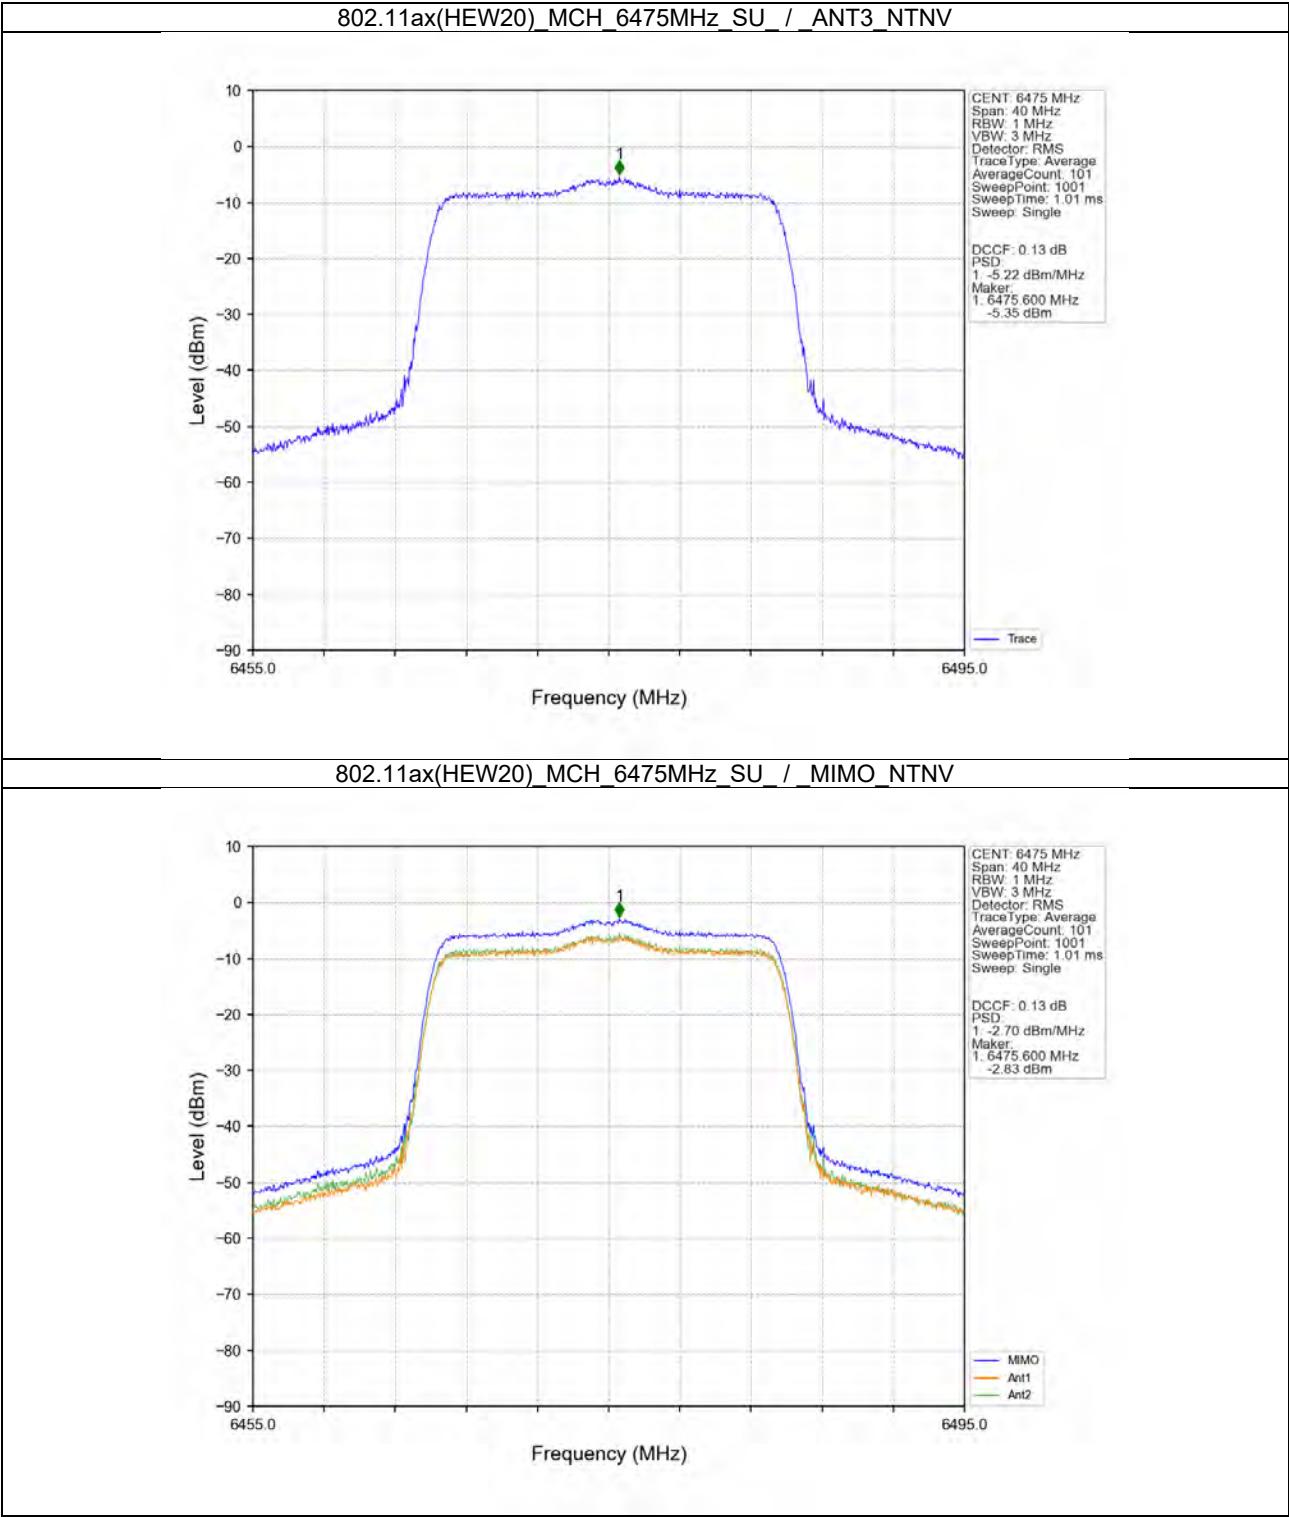



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 134 of 341

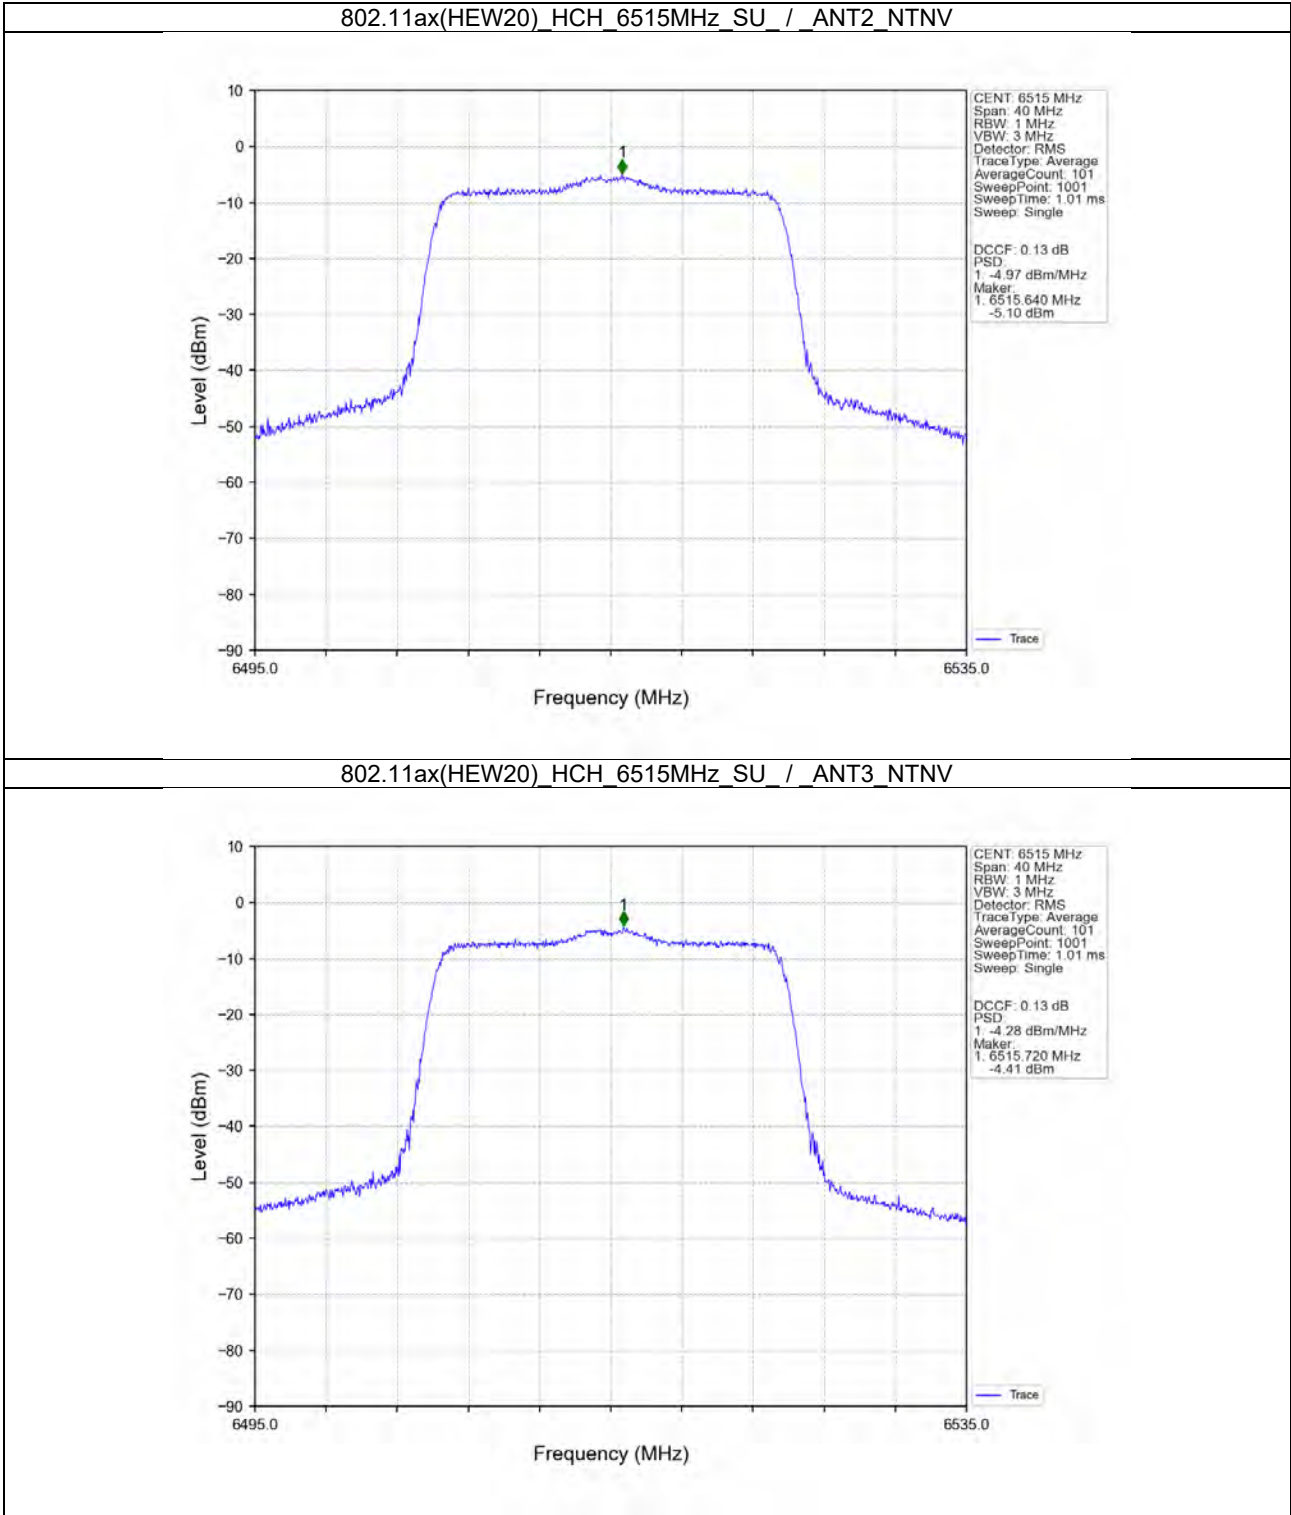



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 135 of 341

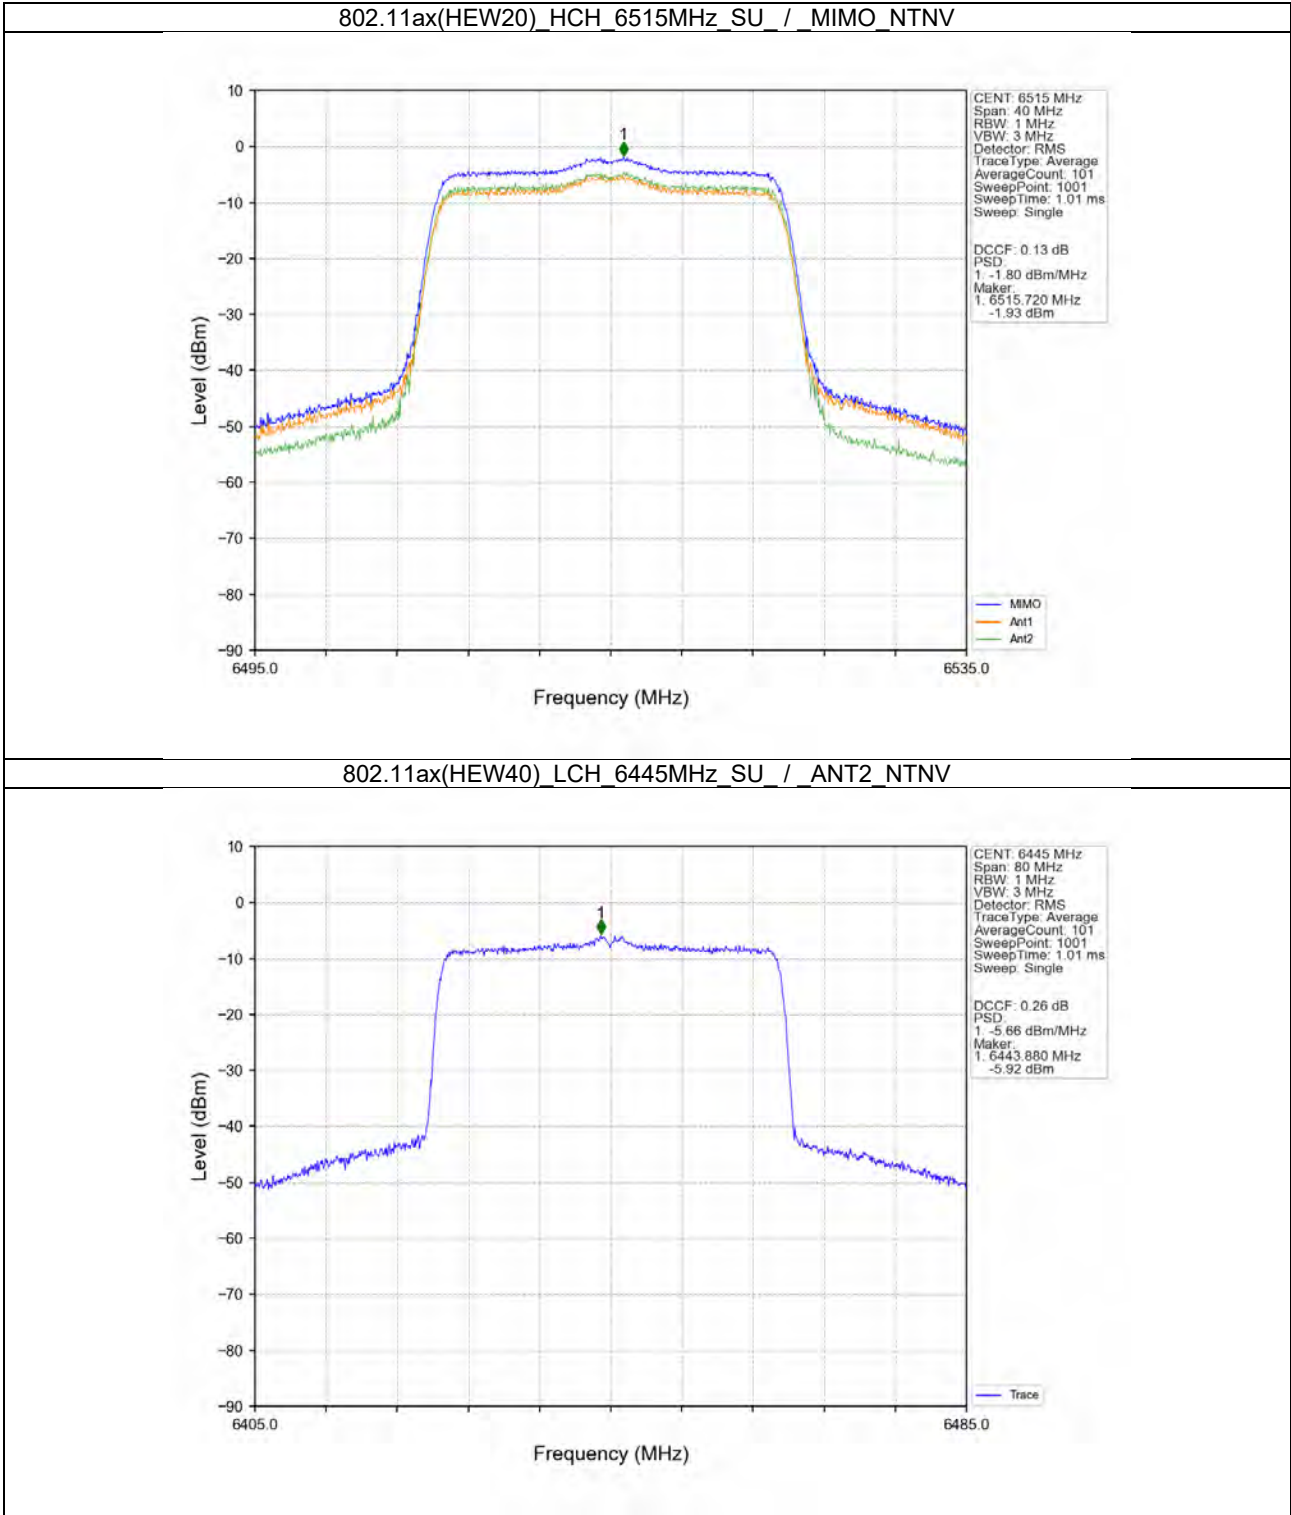



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 136 of 341

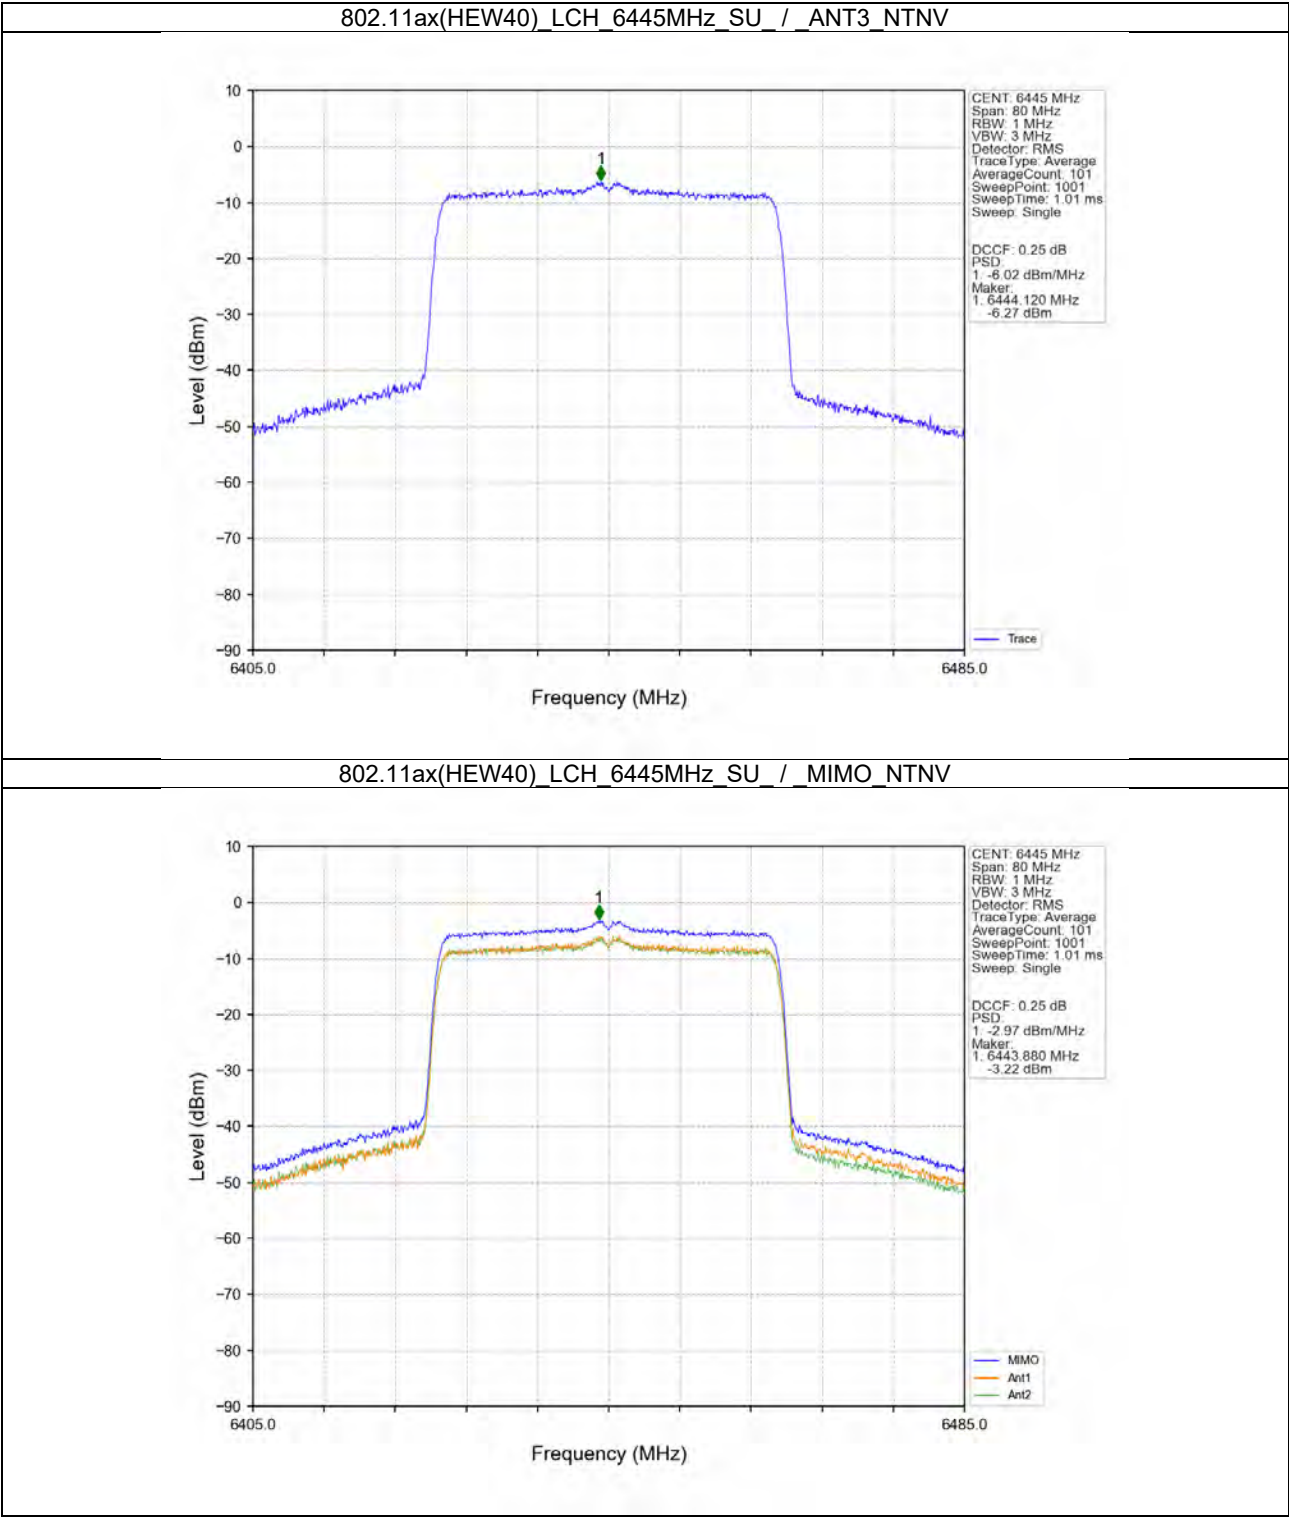





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 137 of 341


802.11ax(HEW40)_MCH_6485MHz_SU_/_ANT2_NTNV

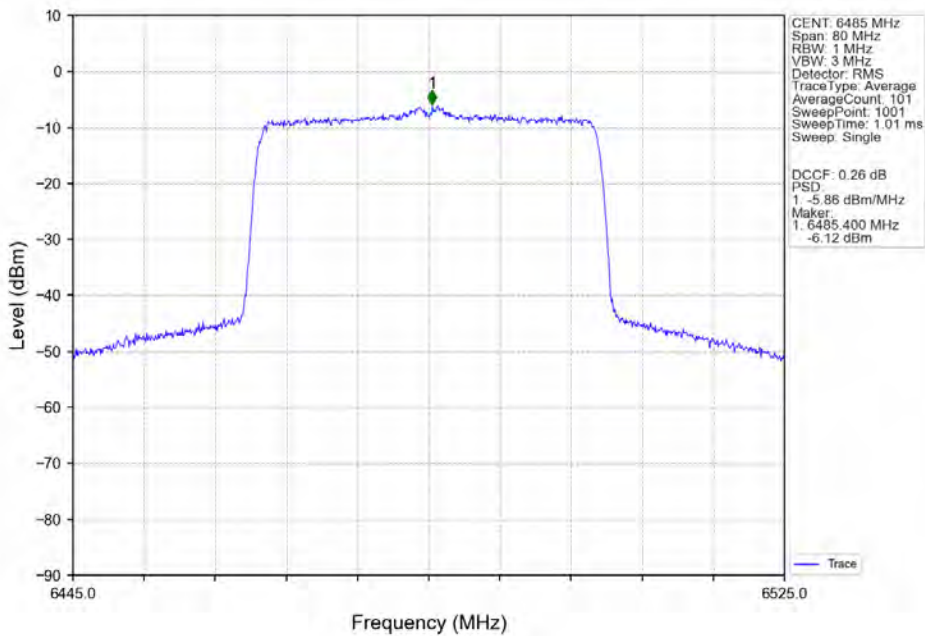


802.11ax(HEW40)_MCH_6485MHz_SU_/_ANT3_NTNV

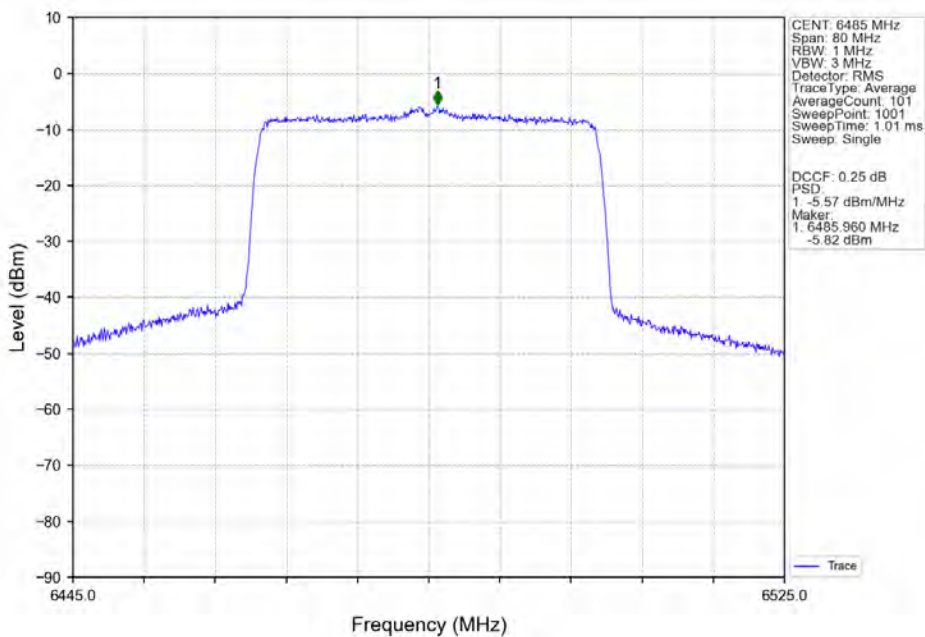

802.11ax(HEW40)_MCH_6485MHz_SU / _MIMO_NTNV

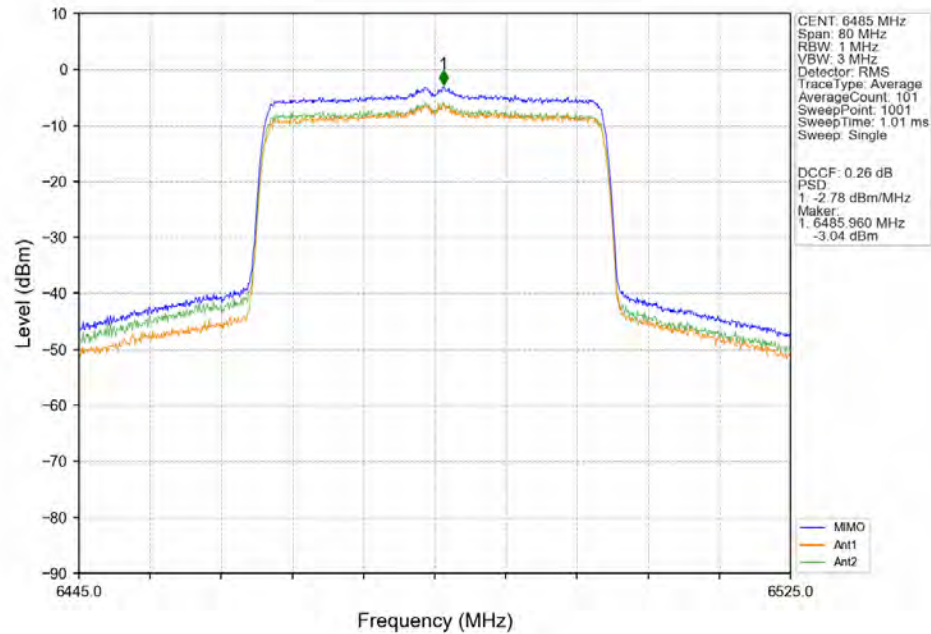


802.11ax(HEW80)_LCH_6465MHz_SU / _ANT2_NTNV

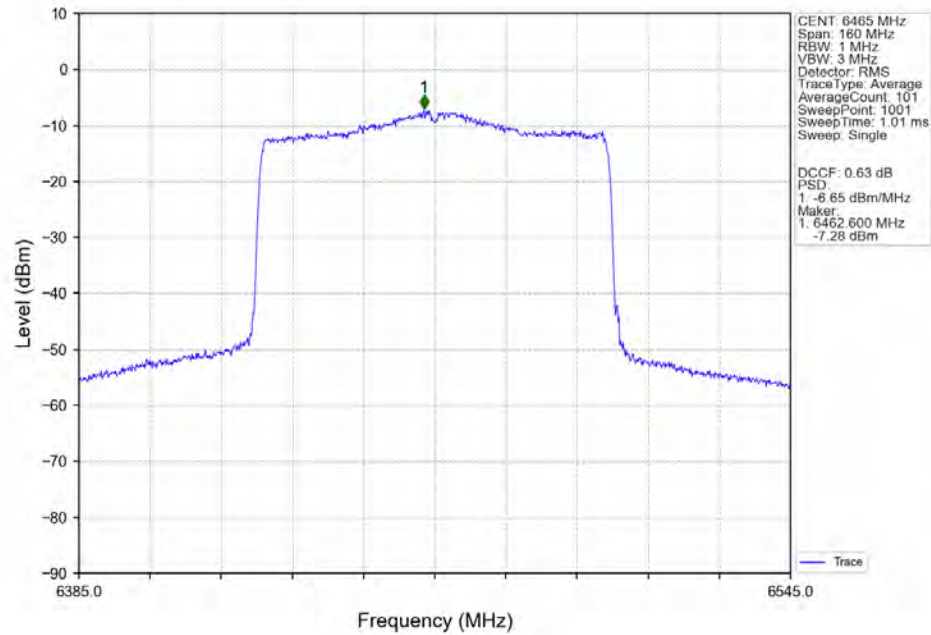



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 139 of 341

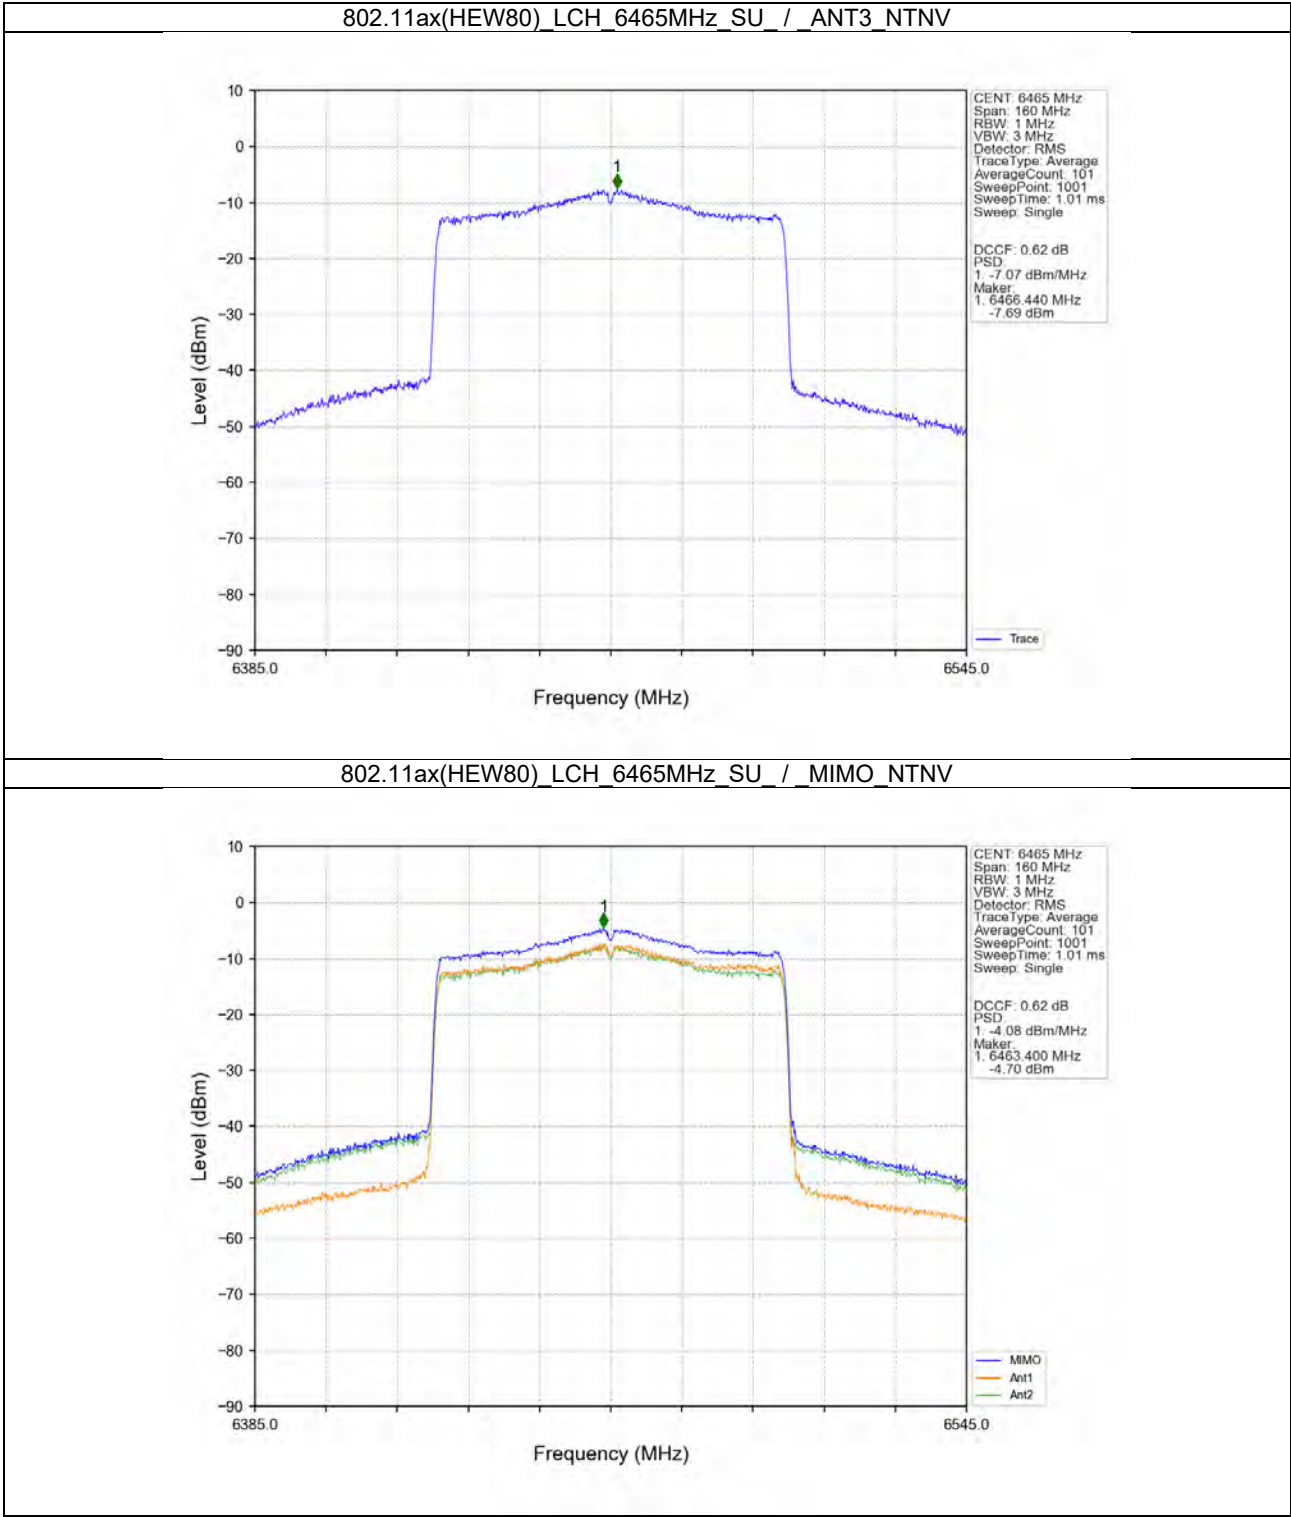




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 140 of 341


4.2.5 PSD

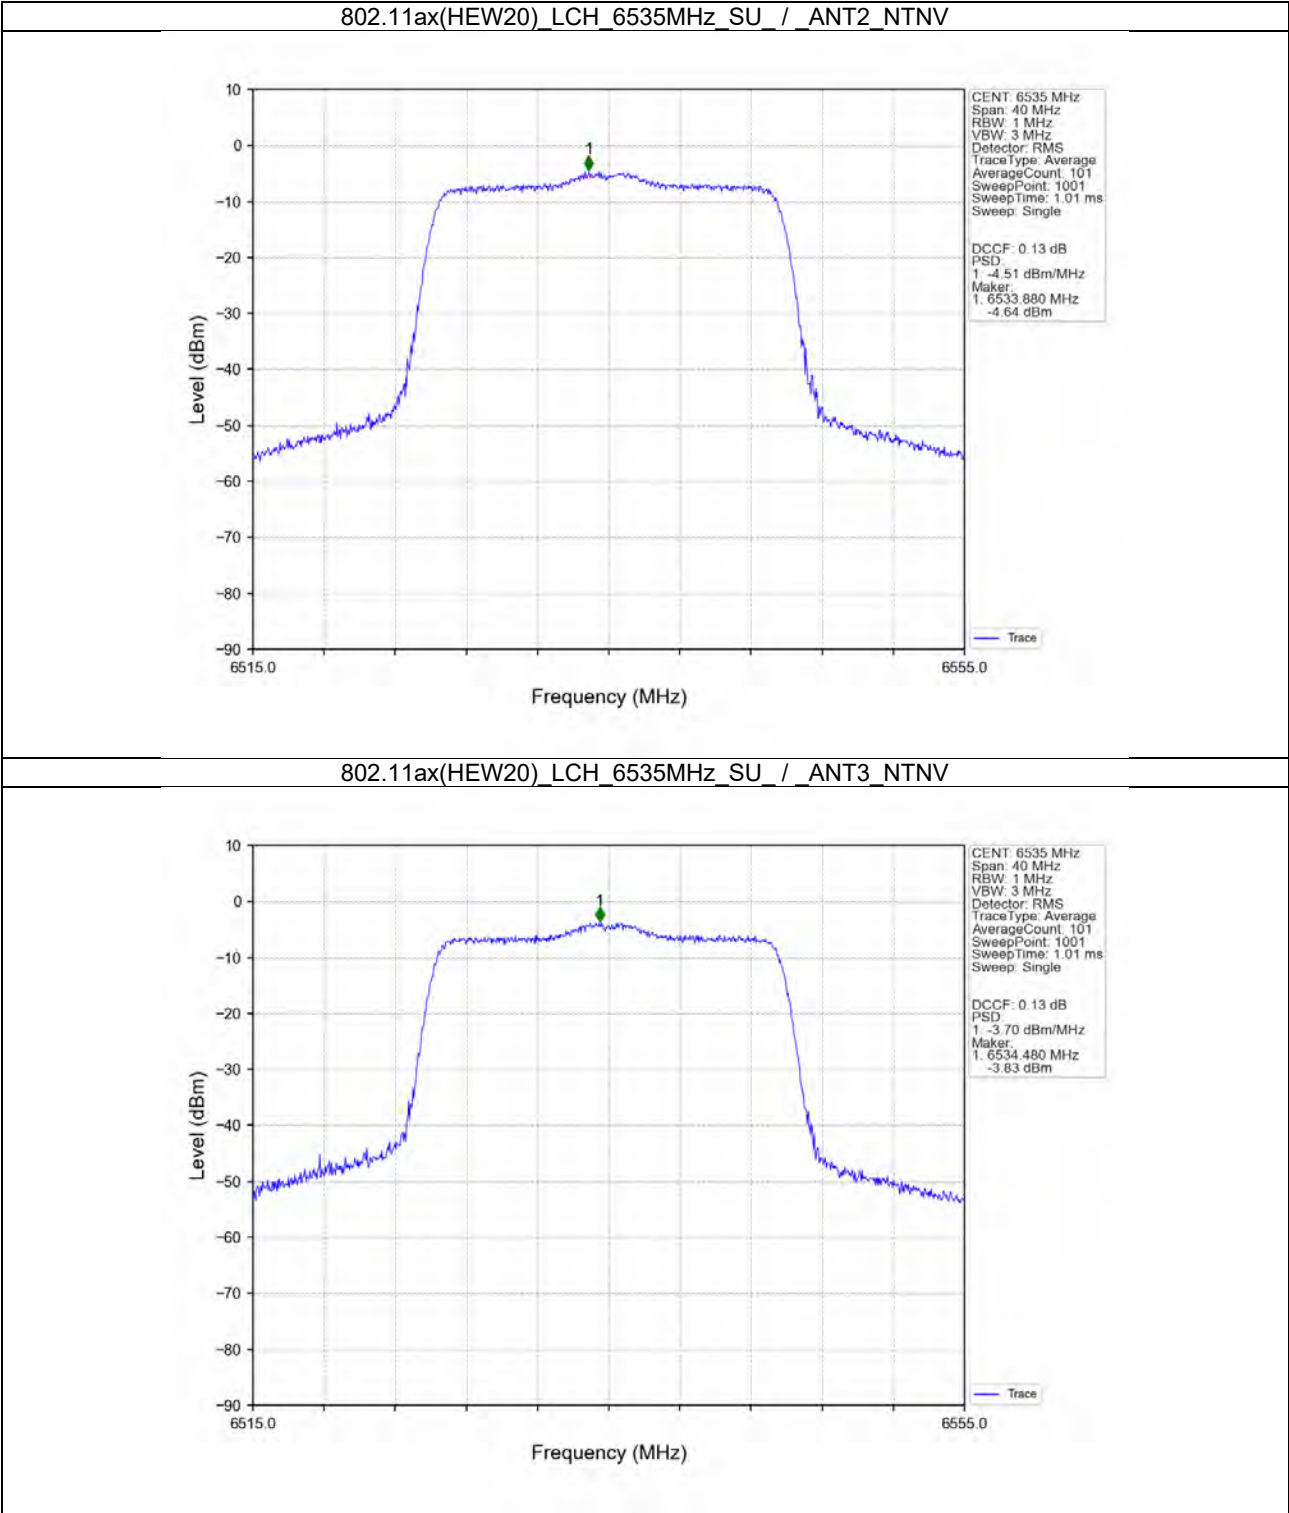



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 141 of 341

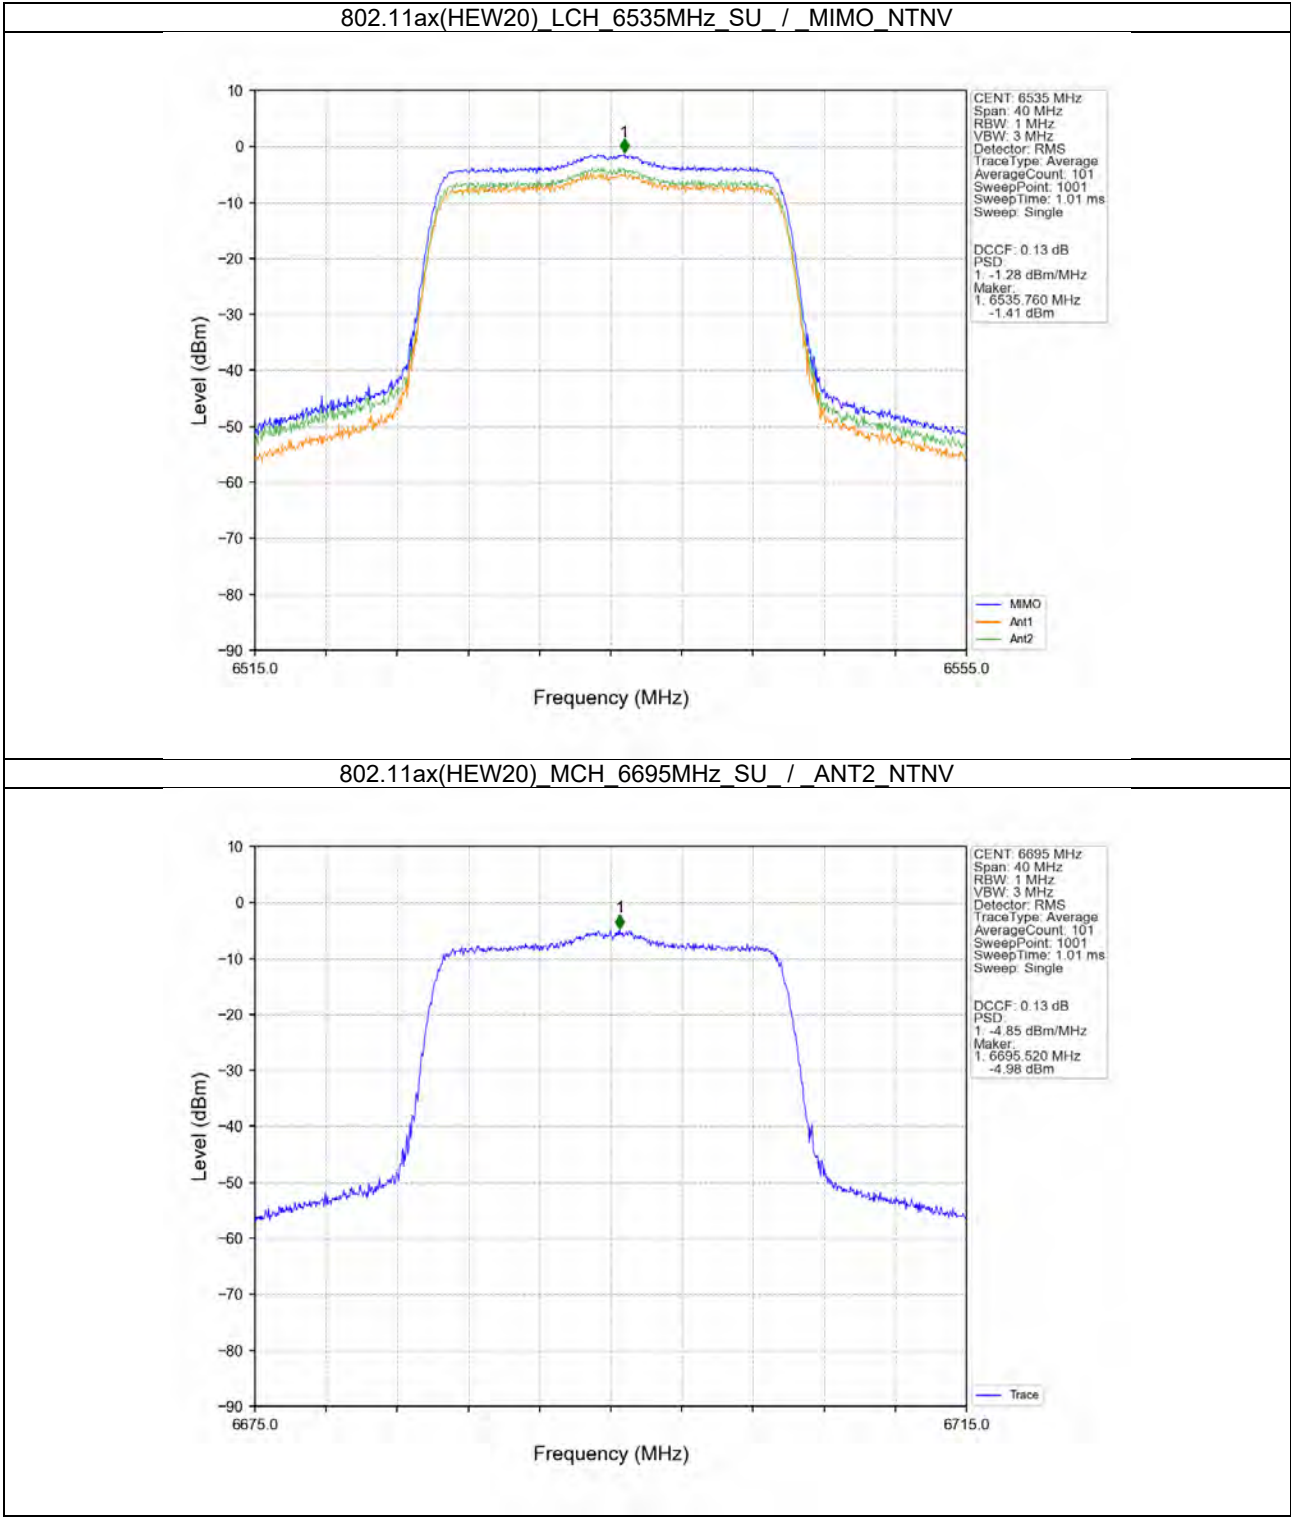



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 142 of 341

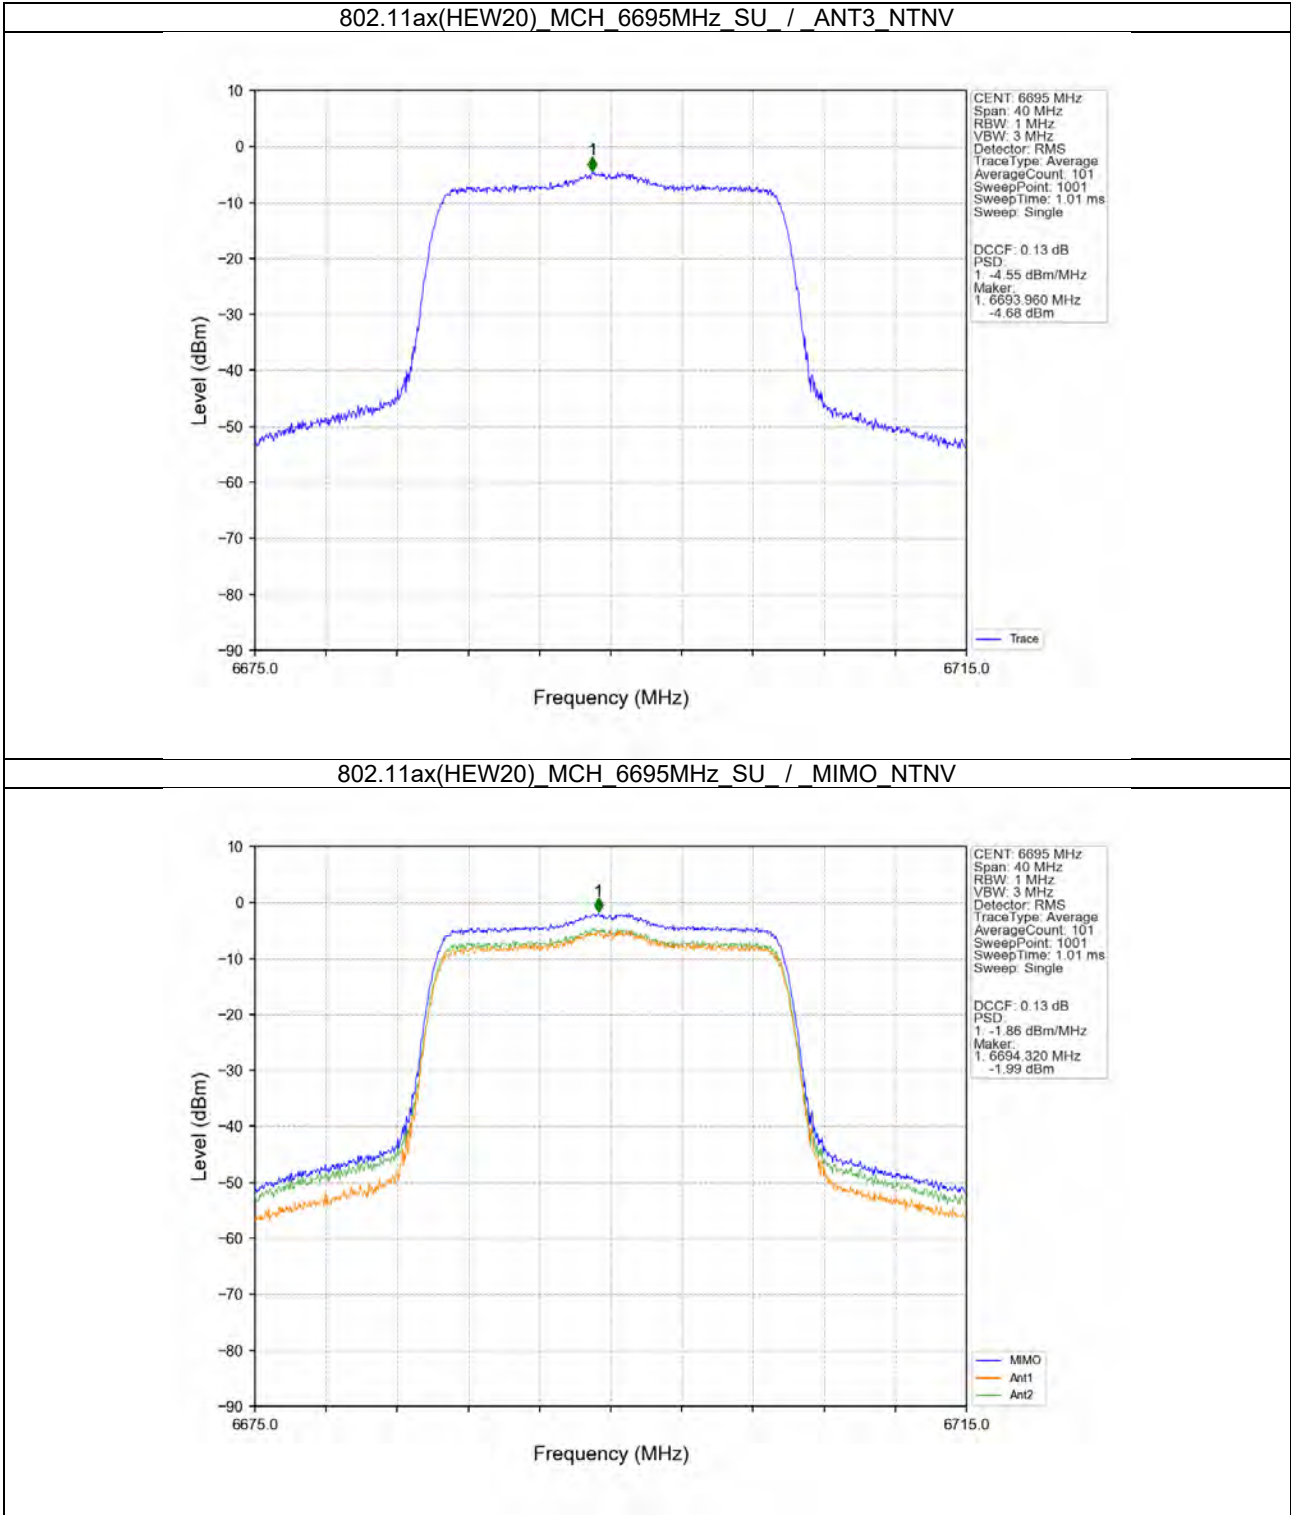





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 143 of 341


802.11ax(HEW20) HCH_6855MHz_SU_ / _ANT2_NTNV

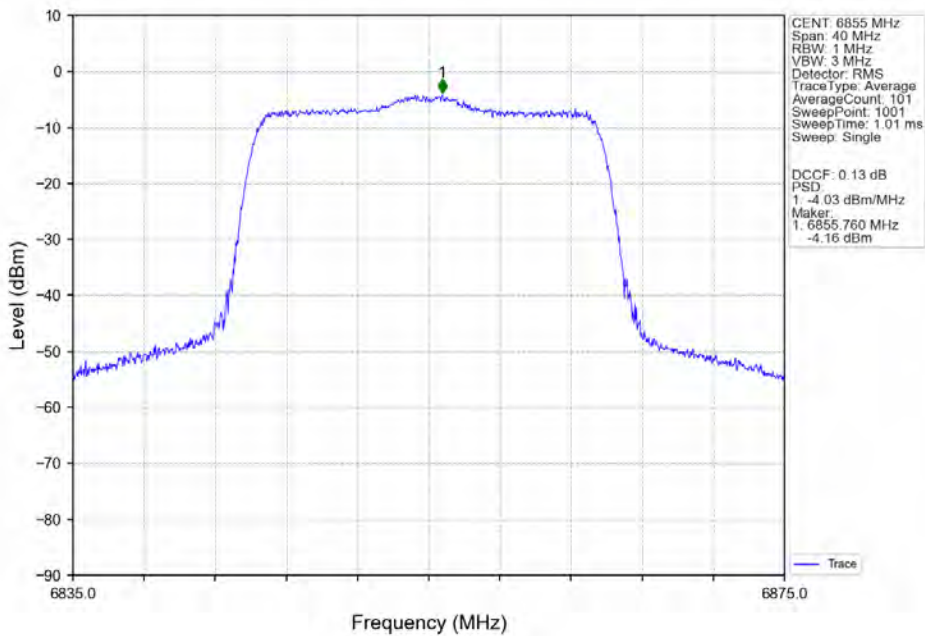


802.11ax(HEW20) HCH_6855MHz_SU_ / _ANT3_NTNV

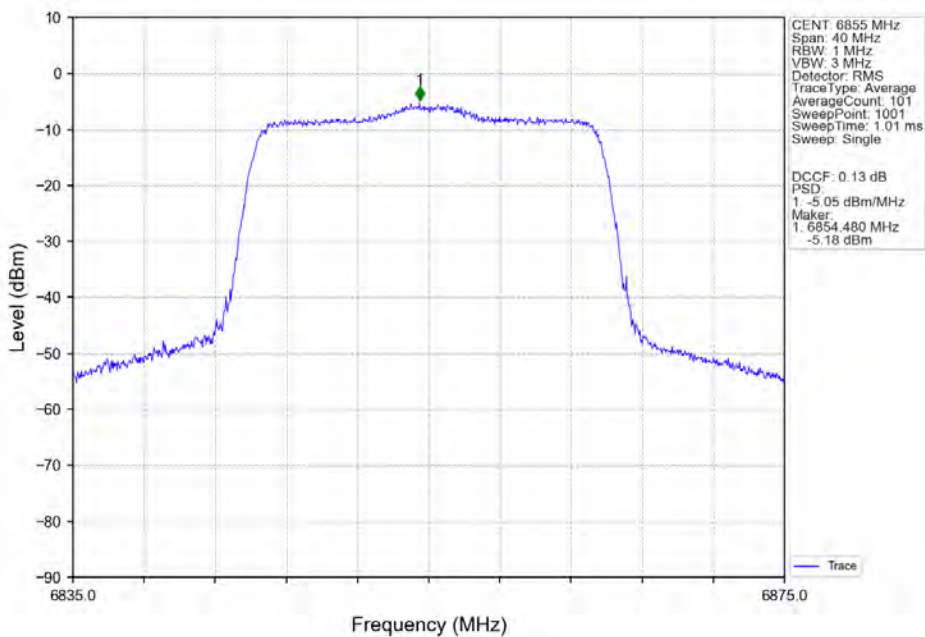

802.11ax(HEW20)_HCH_6855MHz_SU / _MIMO_NTNV

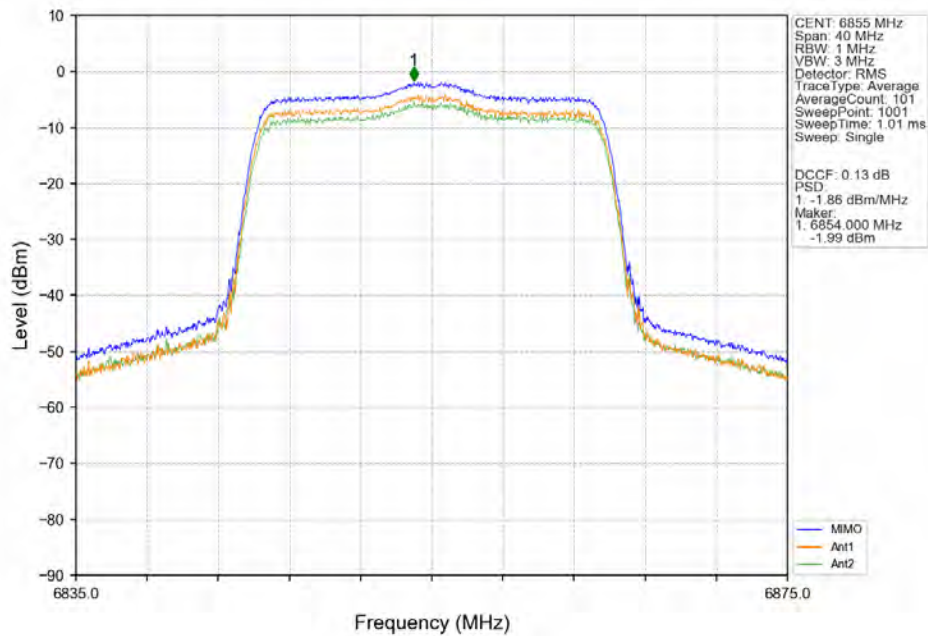


802.11ax(HEW40)_LCH_6565MHz_SU / _ANT2_NTNV

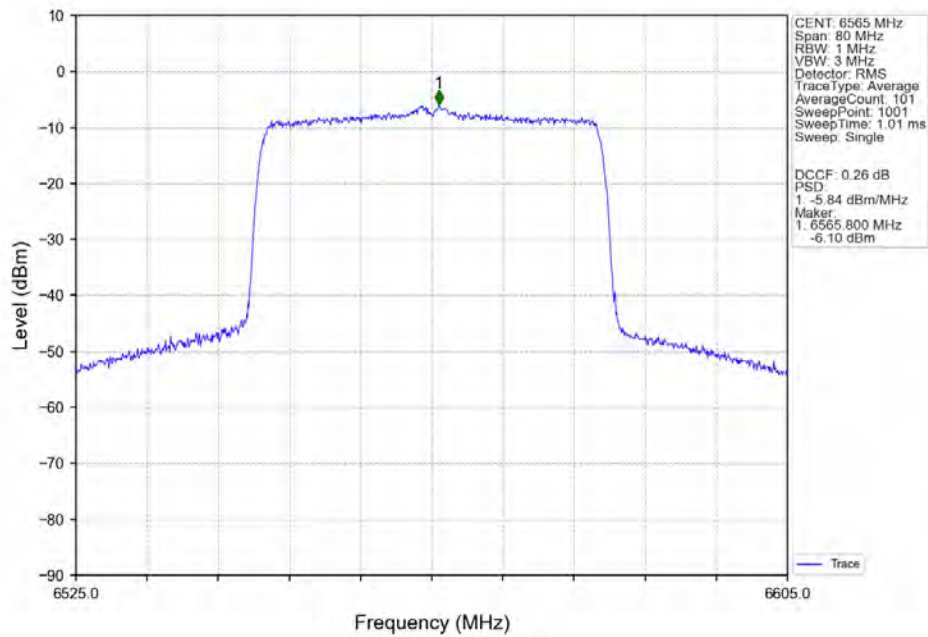



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 145 of 341

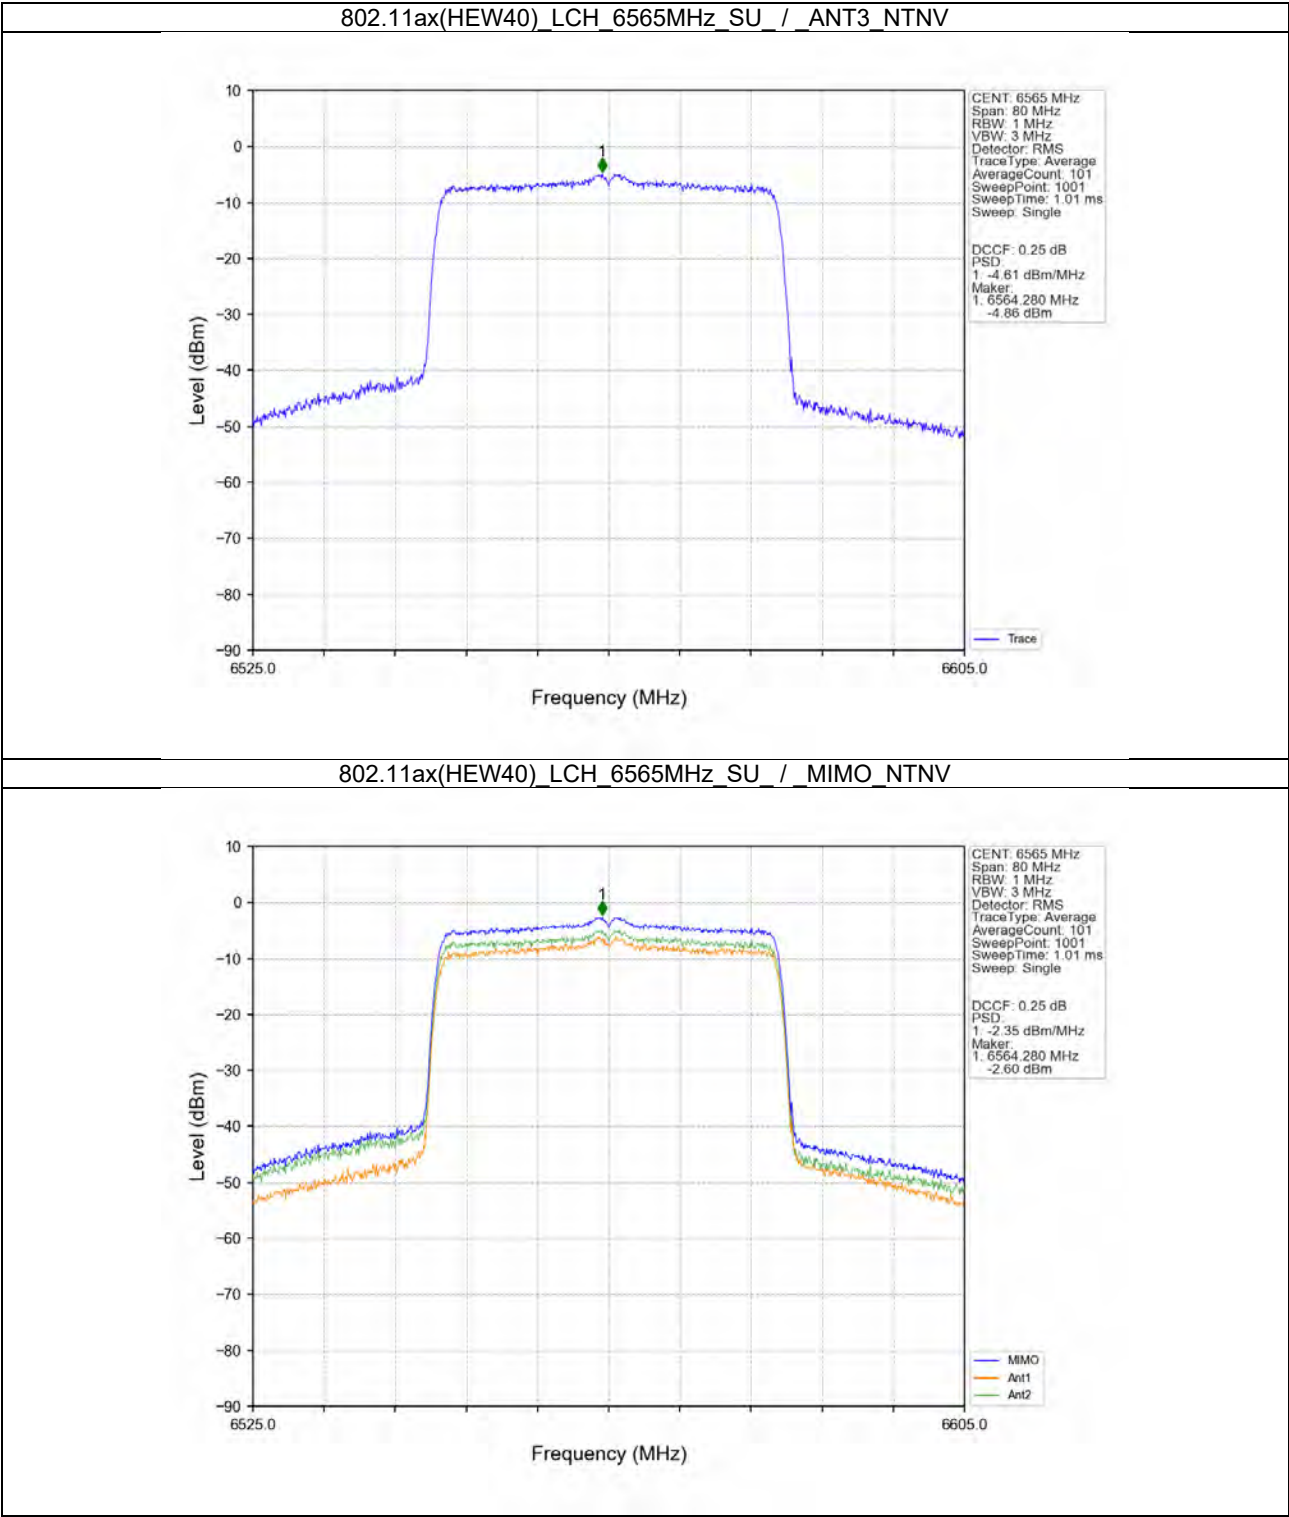




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 146 of 341

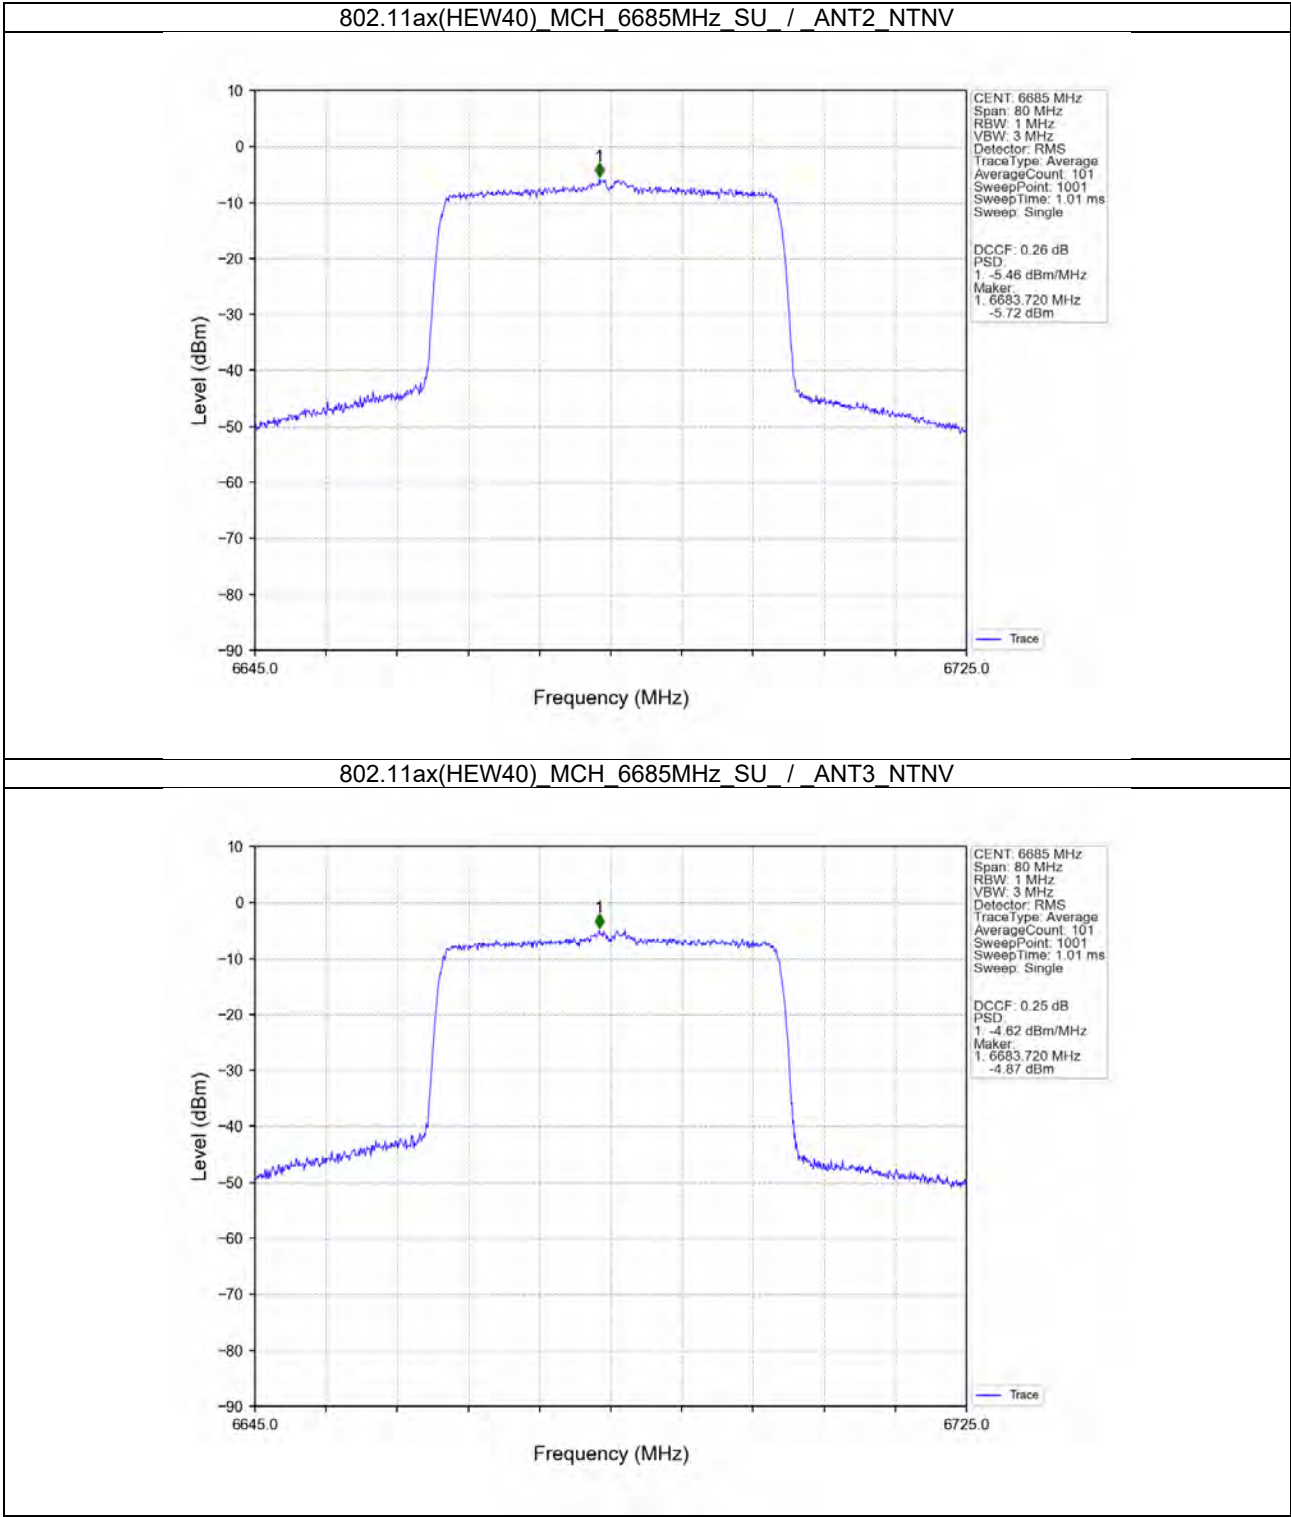

802.11ax(HEW40)_MCH_6685MHz_SU_/_MIMO_NTNV

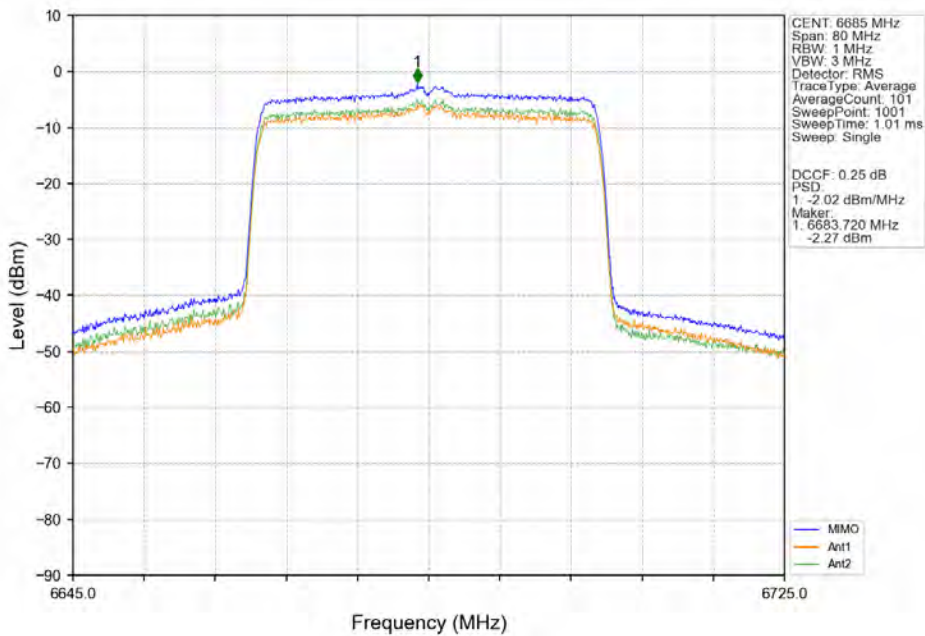


802.11ax(HEW40)_HCH_6845MHz_SU_/_ANT2_NTNV

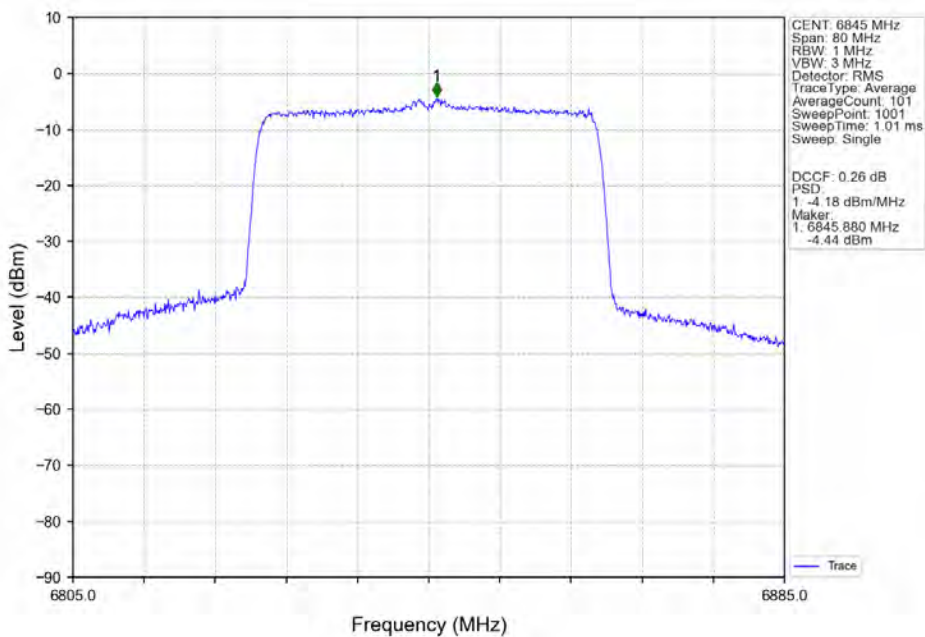


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
 Rev.: 01
 Page: 148 of 341

802.11ax(HEW40) HCH_6845MHz_SU / _ANT3_NTNV

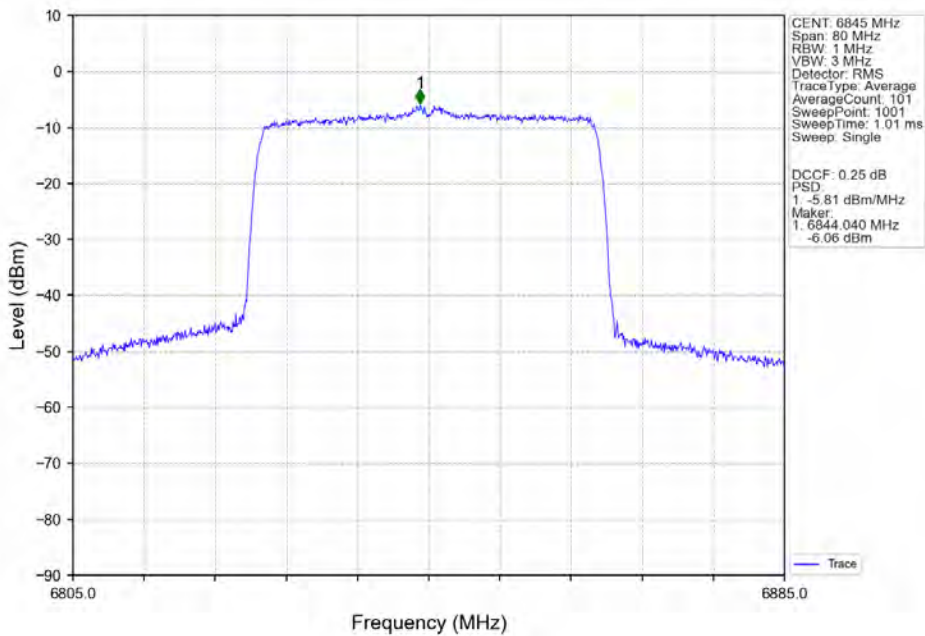


802.11ax(HEW40) HCH_6845MHz_SU / _MIMO_NTNV

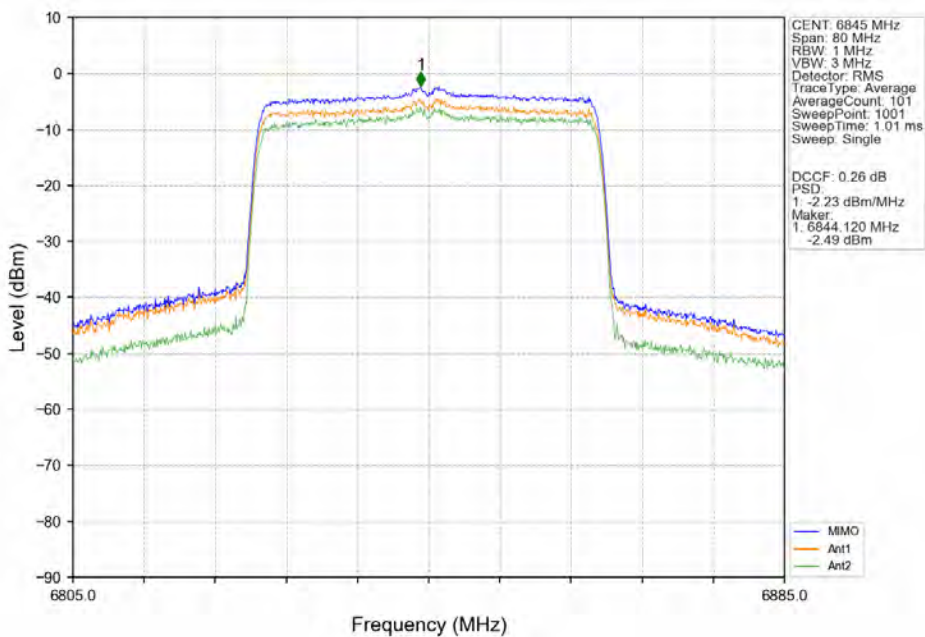



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 149 of 341

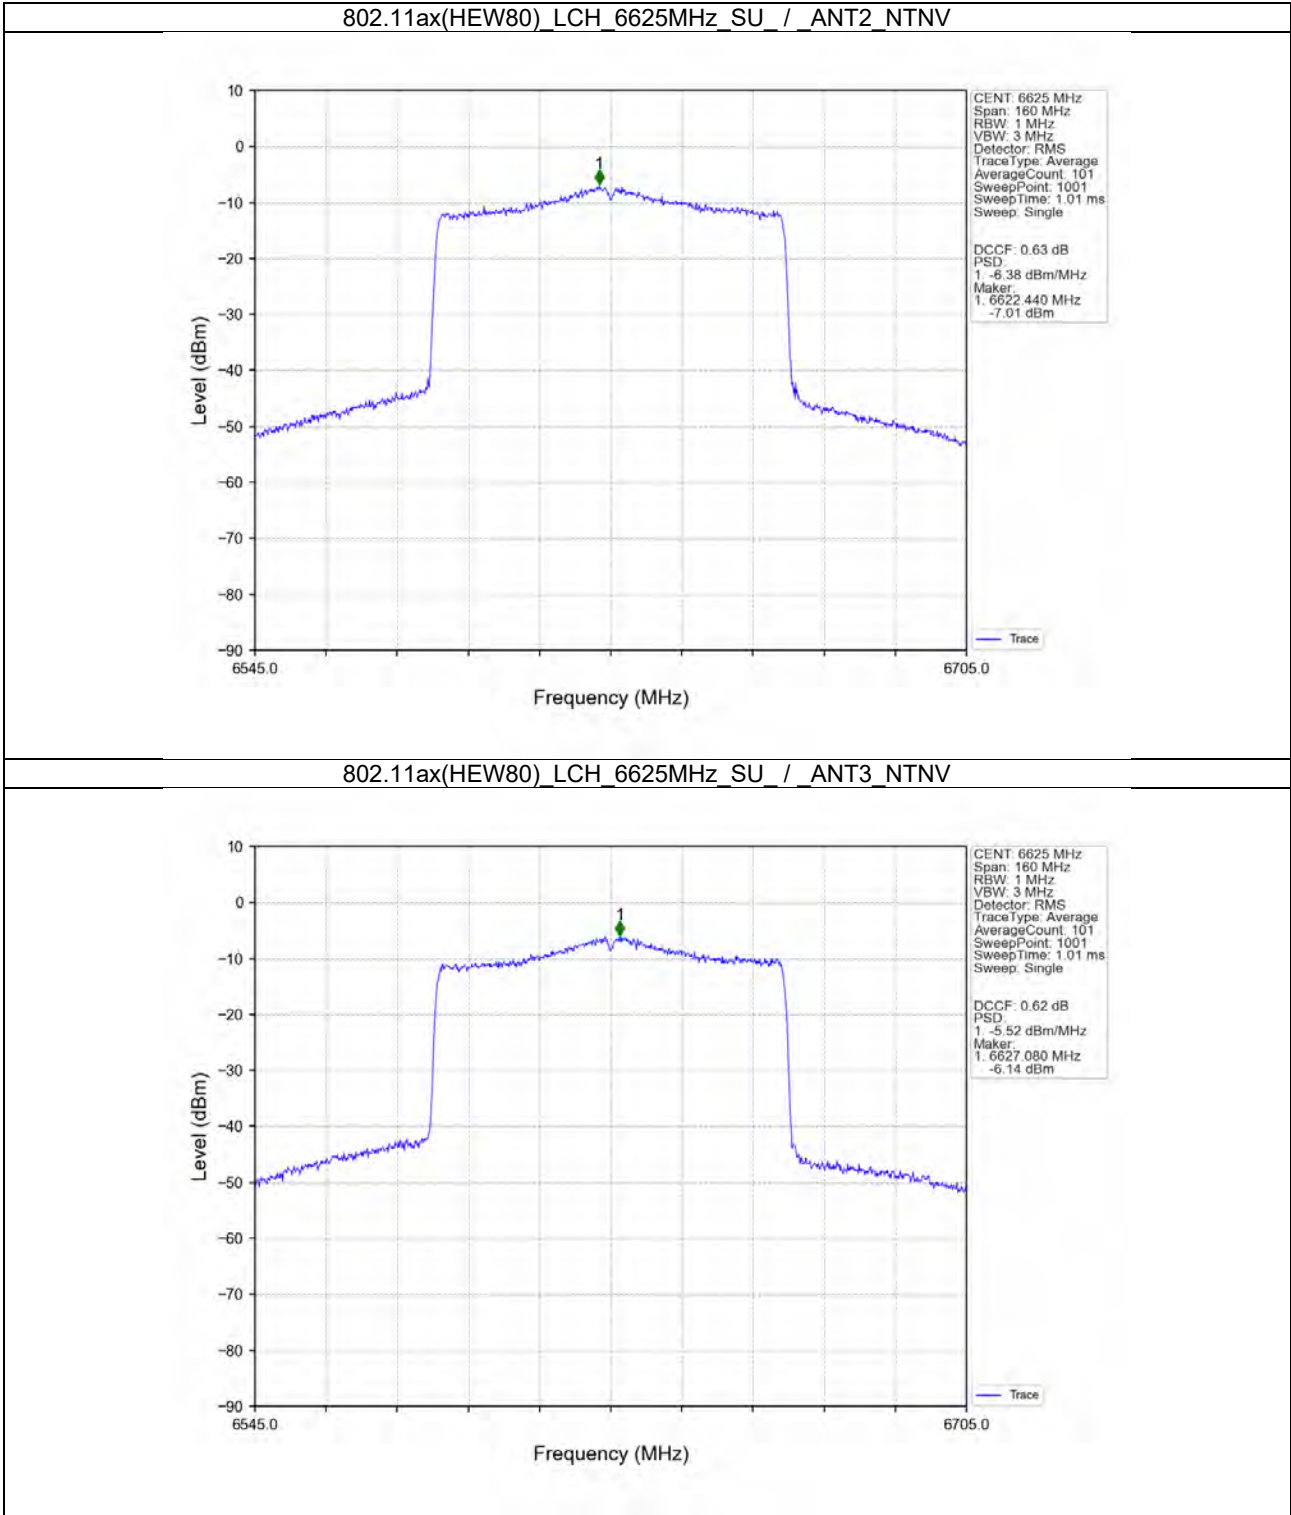



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 150 of 341

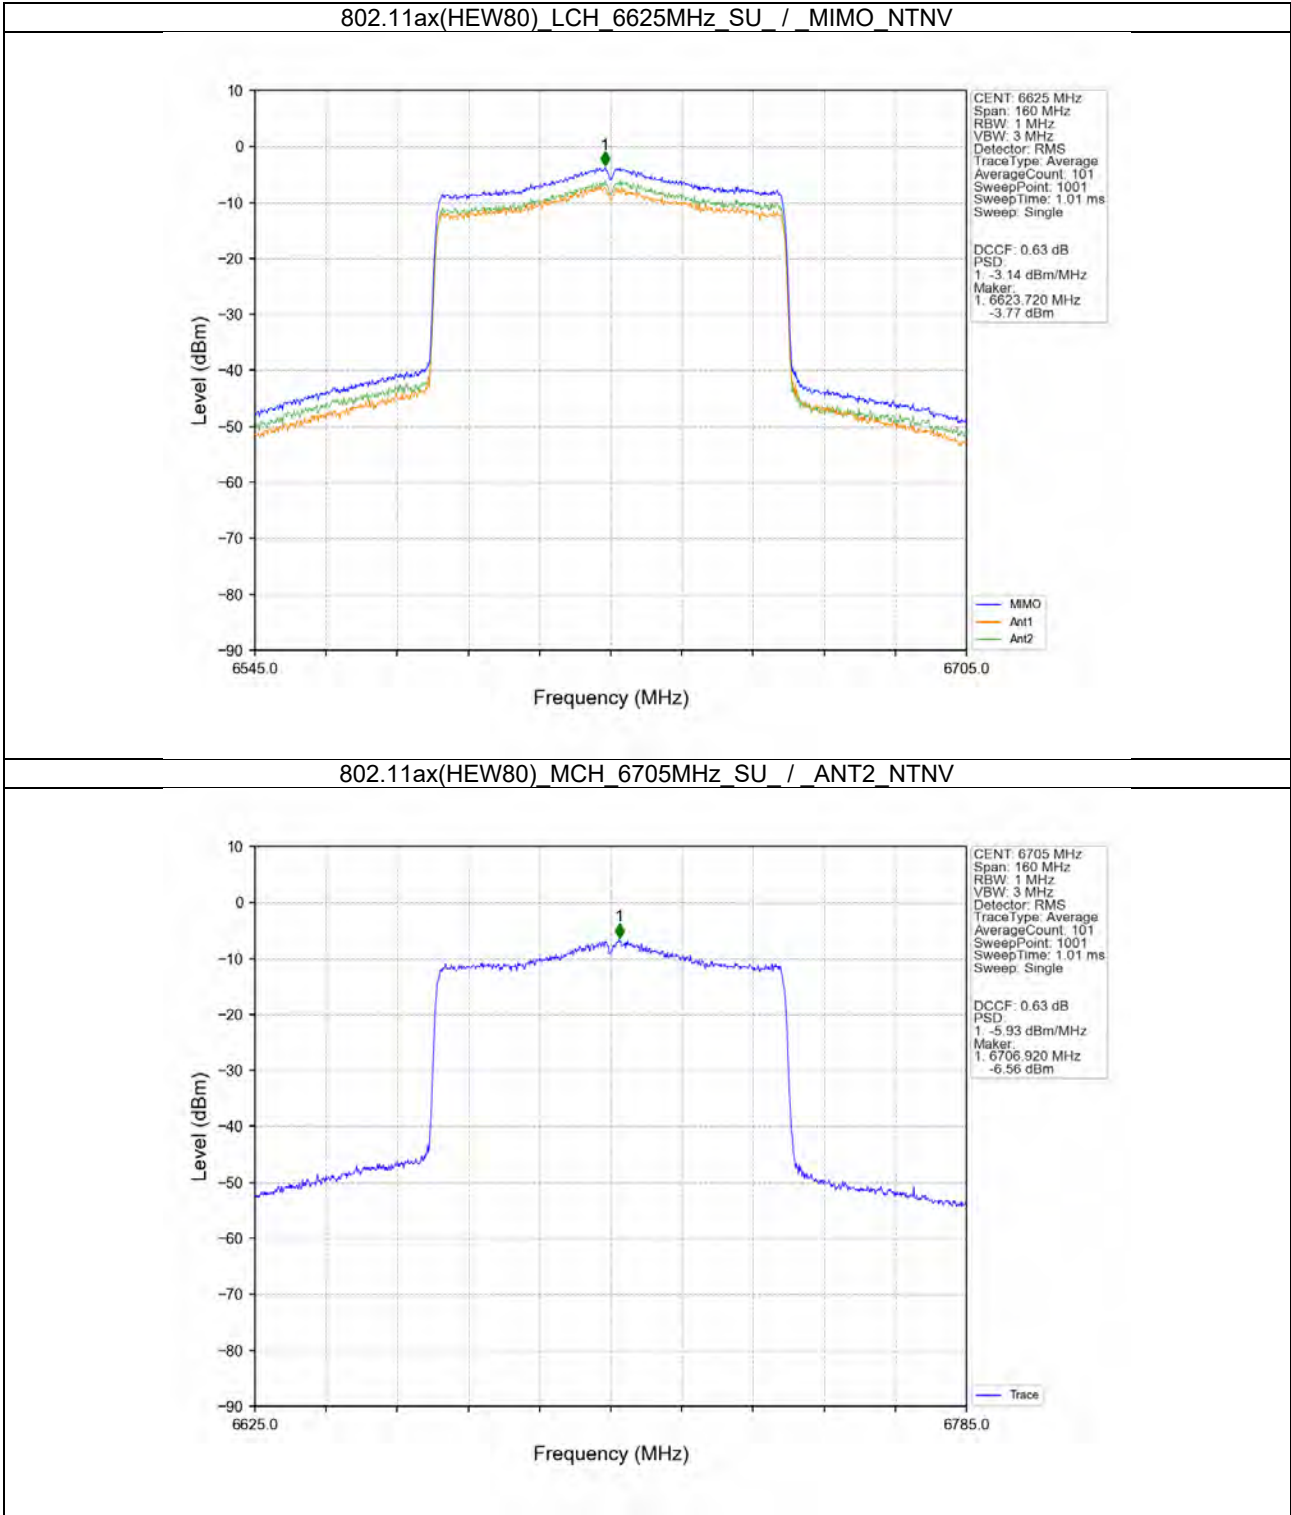



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 151 of 341

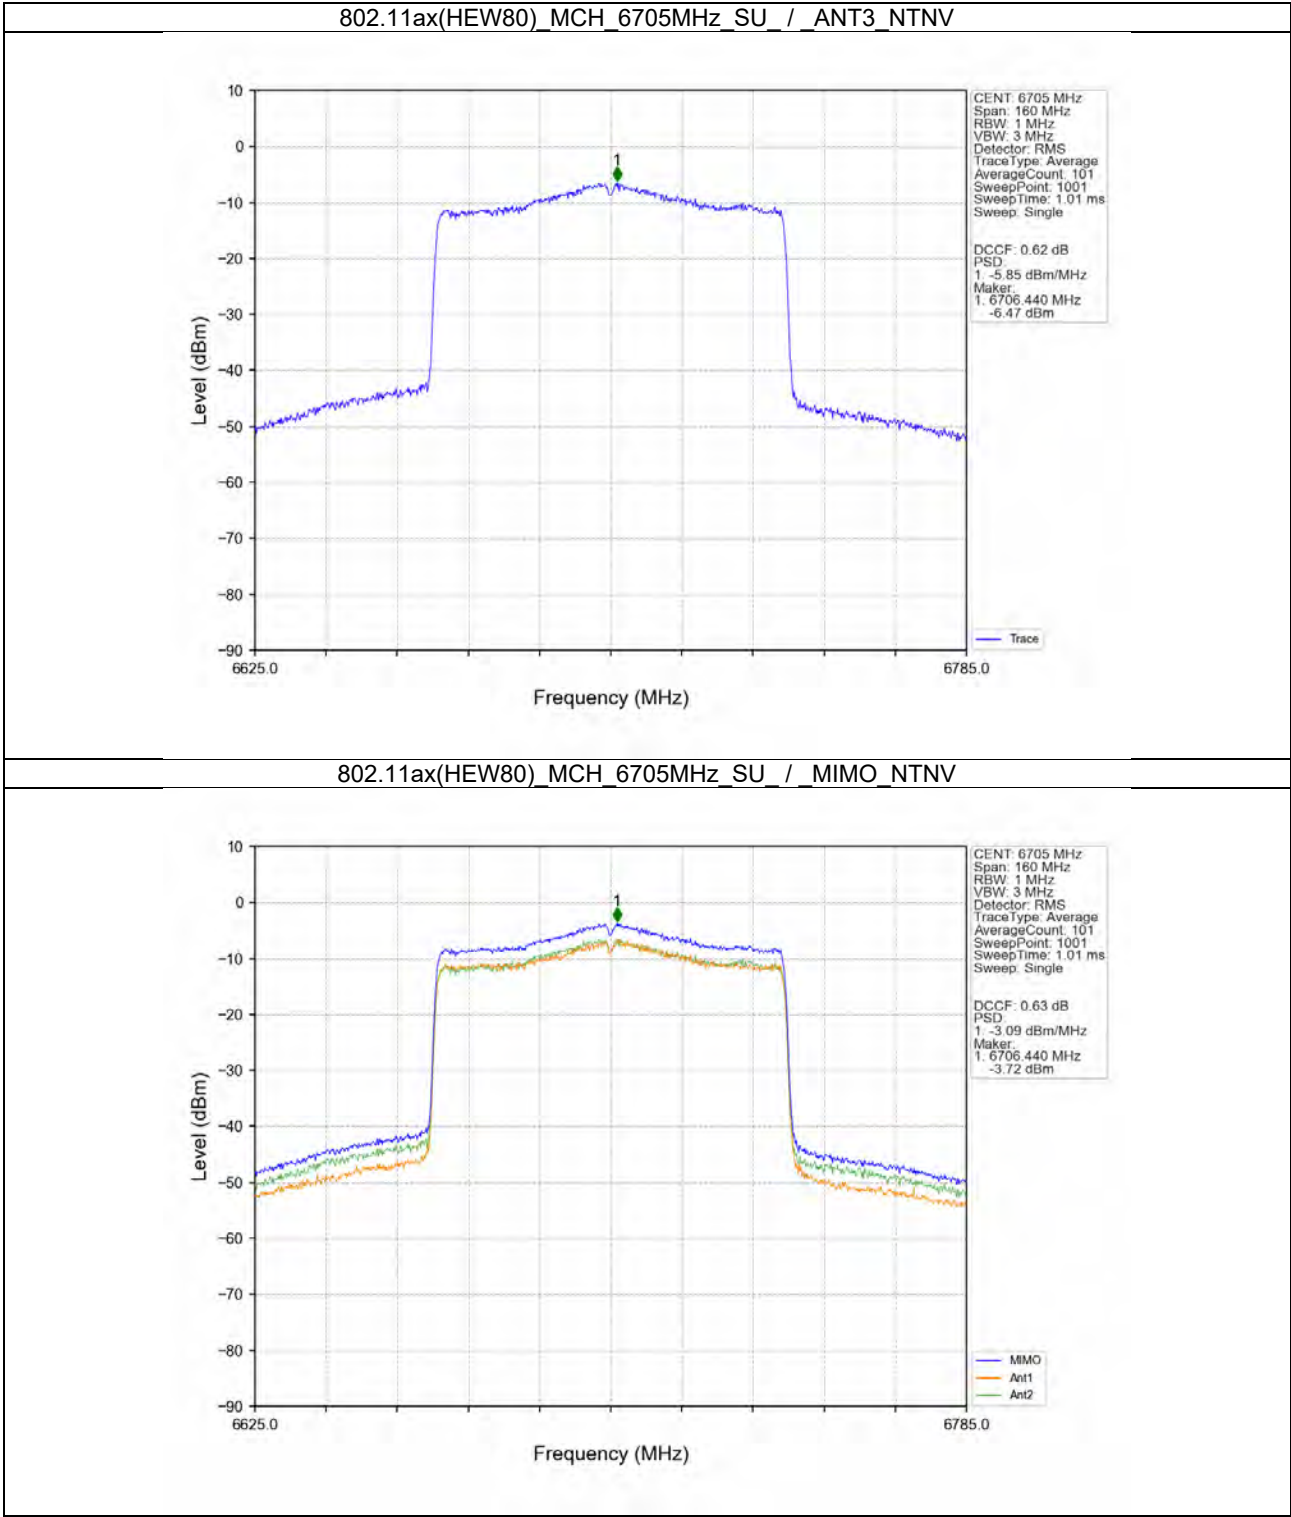




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 152 of 341

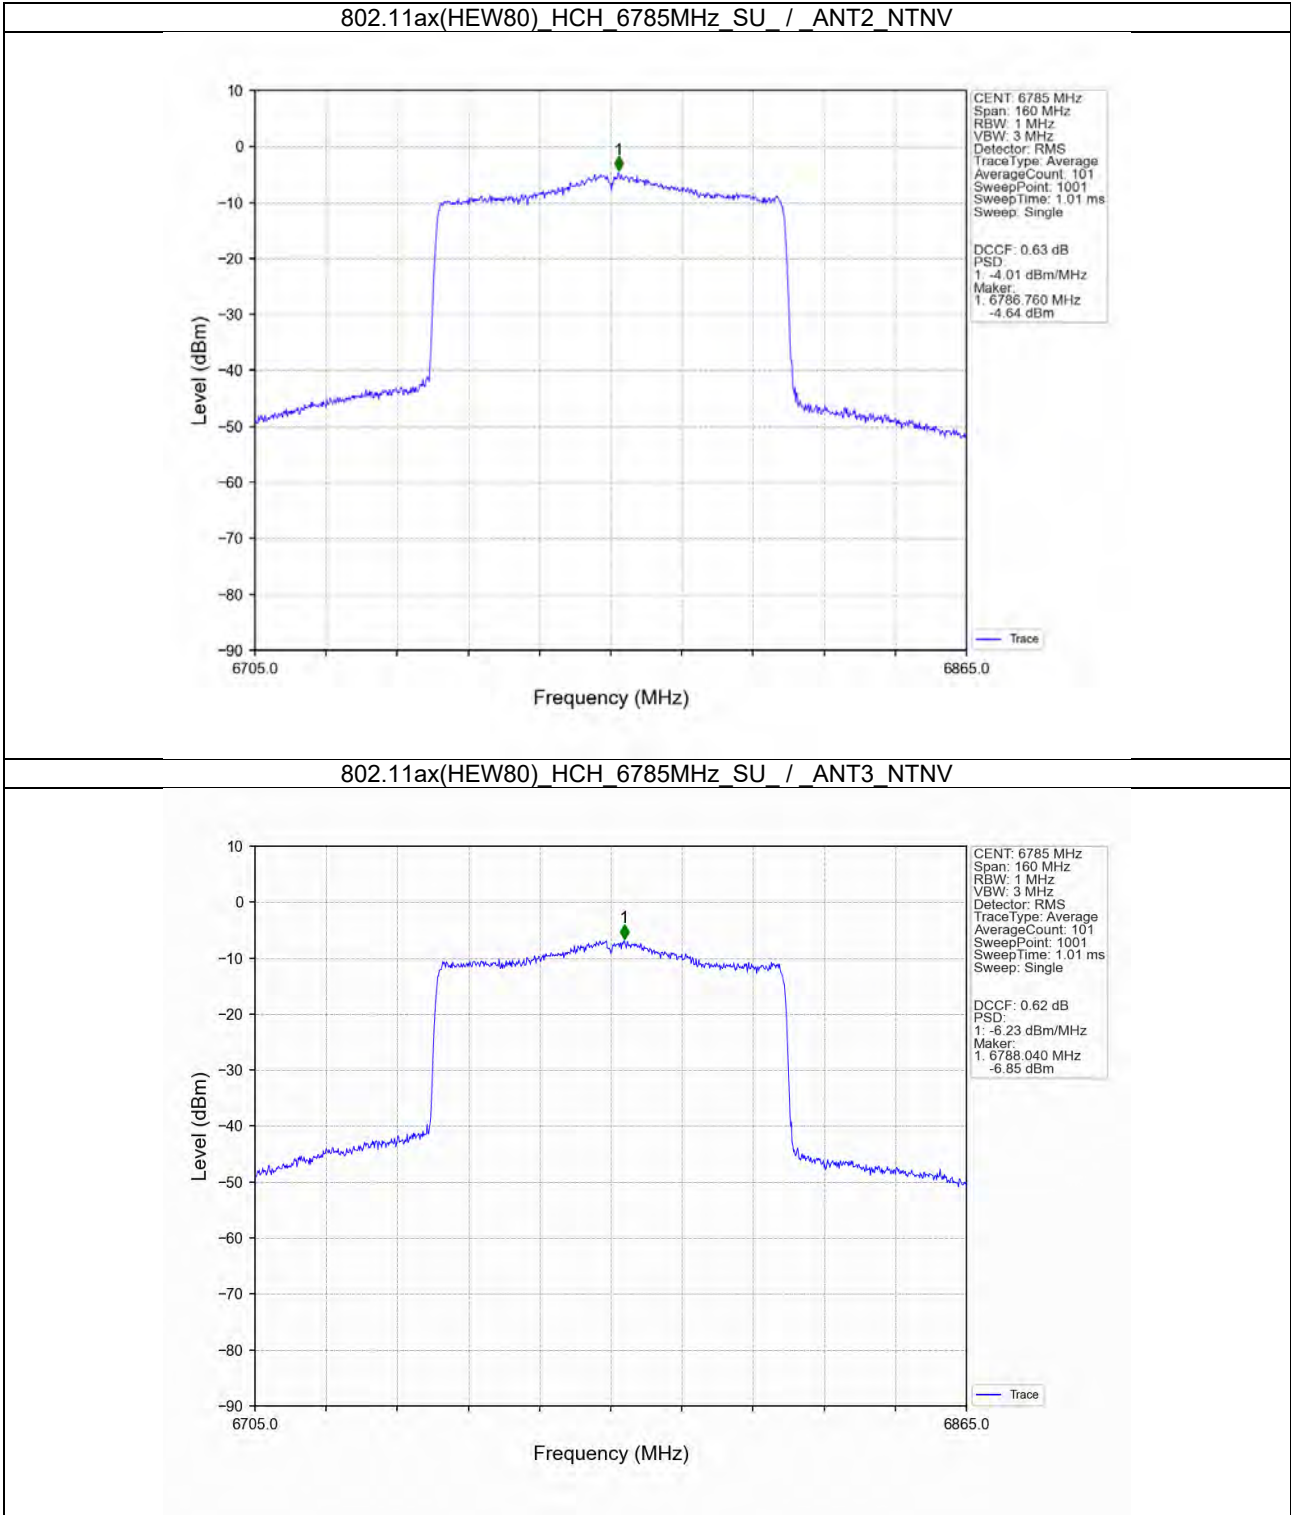

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
 Rev.: 01
 Page: 153 of 341

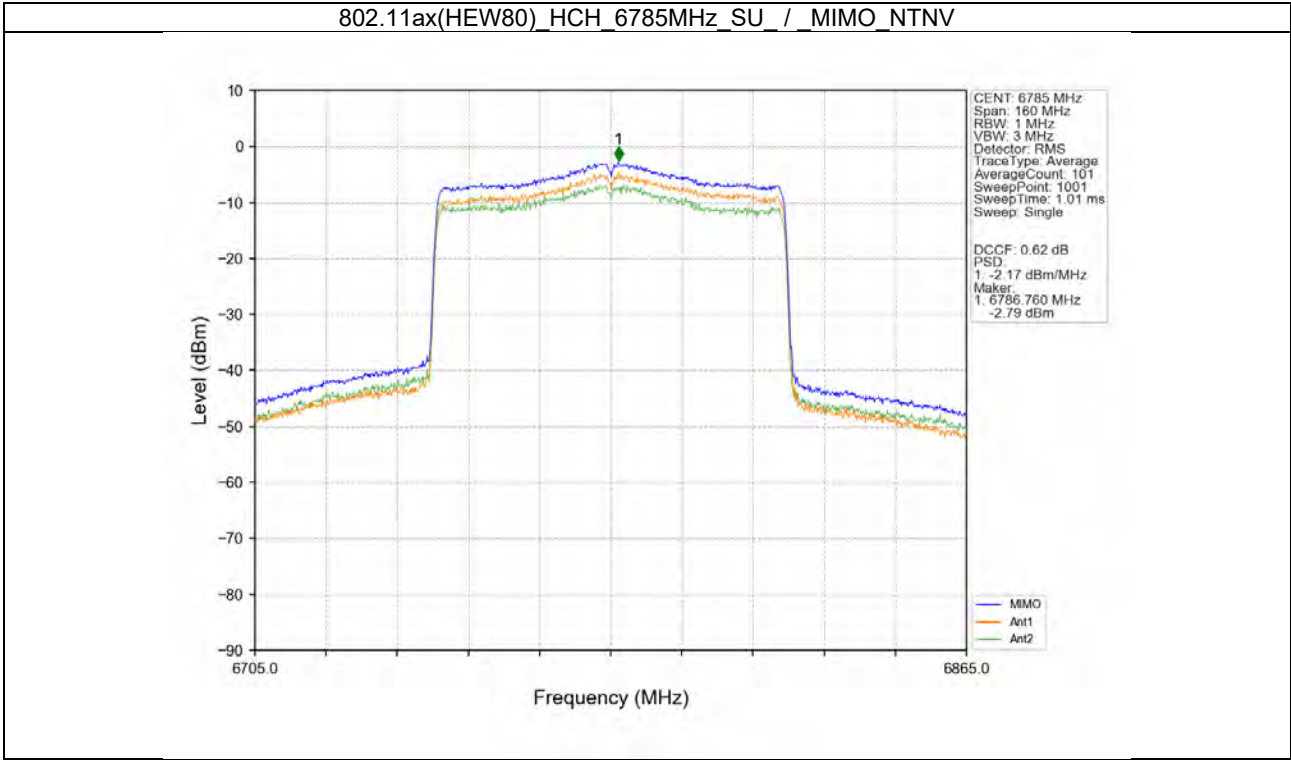





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 154 of 341


4.2.7 PSD

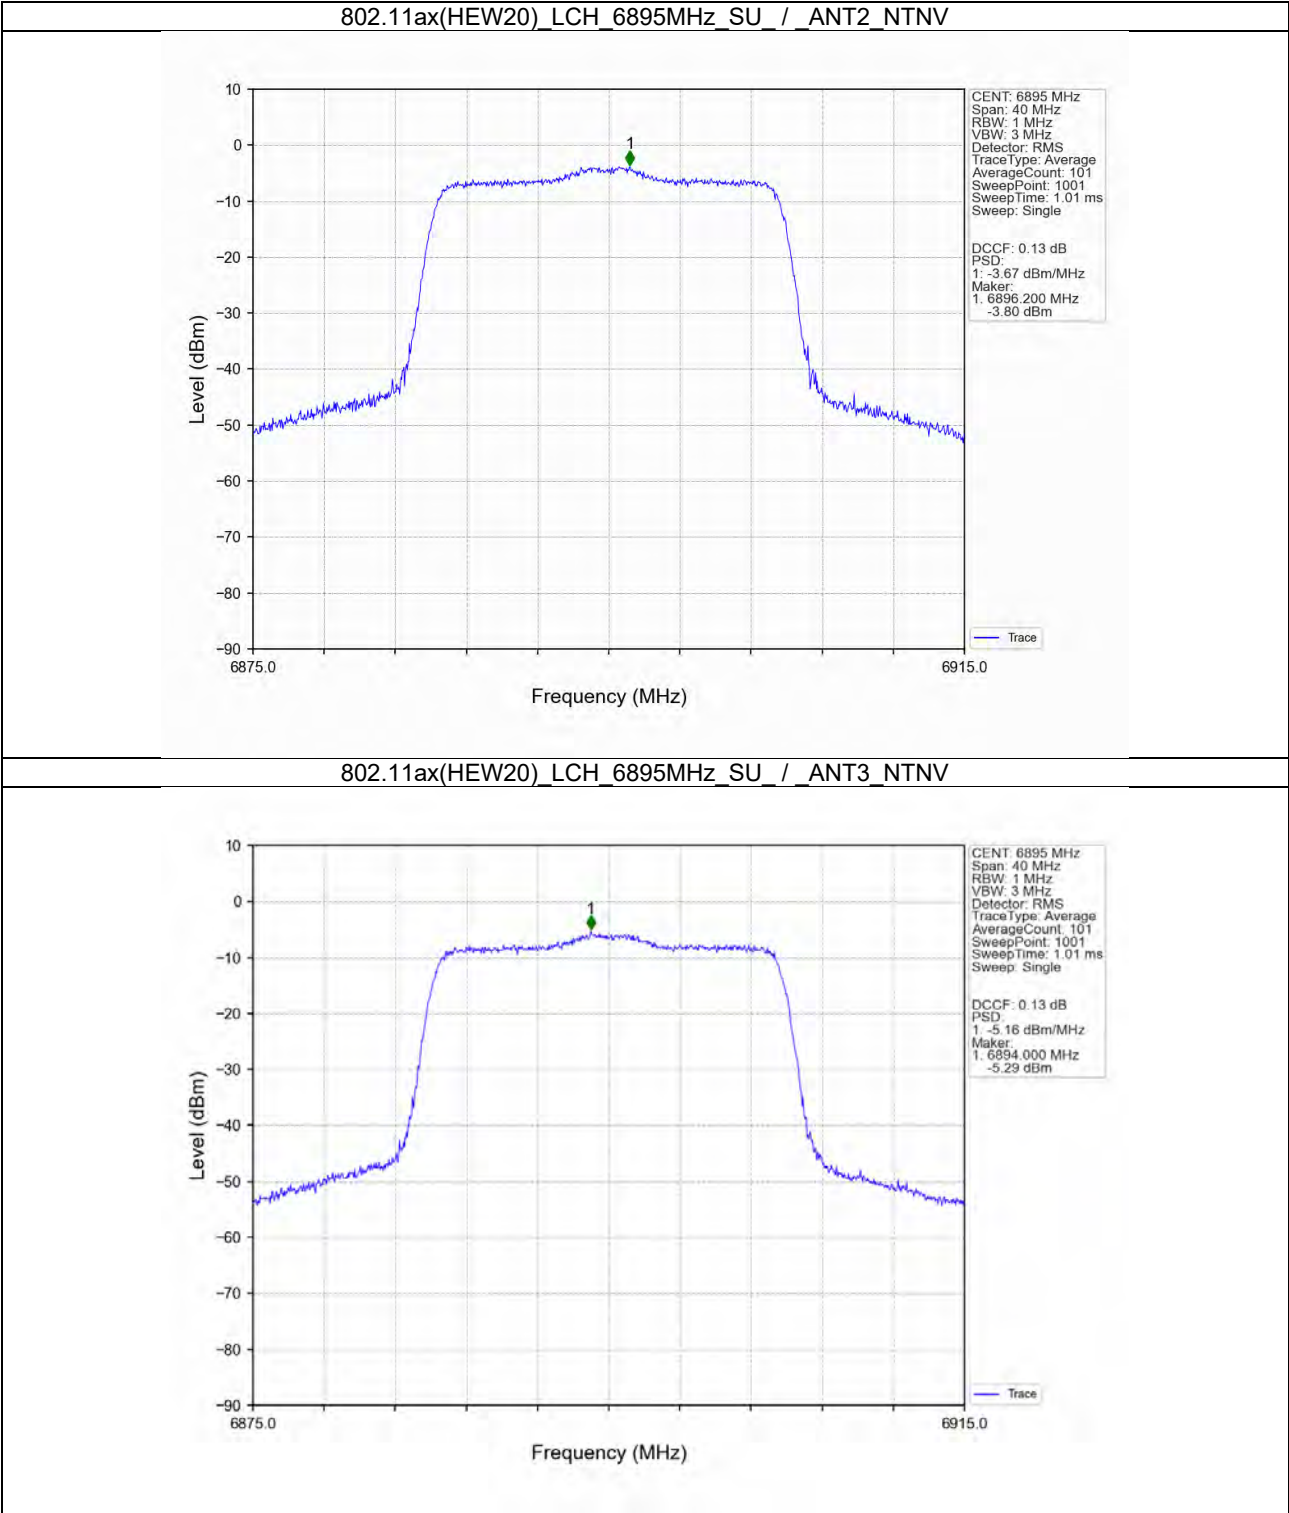

802.11ax(HEW20) LCH_6895MHz_SU_ / MIMO_NTNV

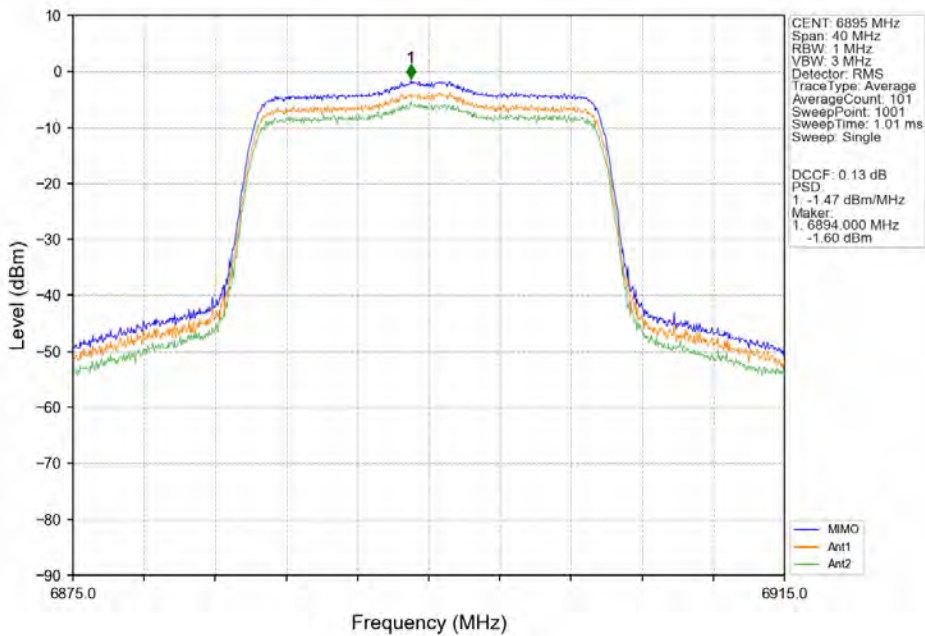


802.11ax(HEW20) MCH_6995MHz_SU_ / ANT2_NTNV

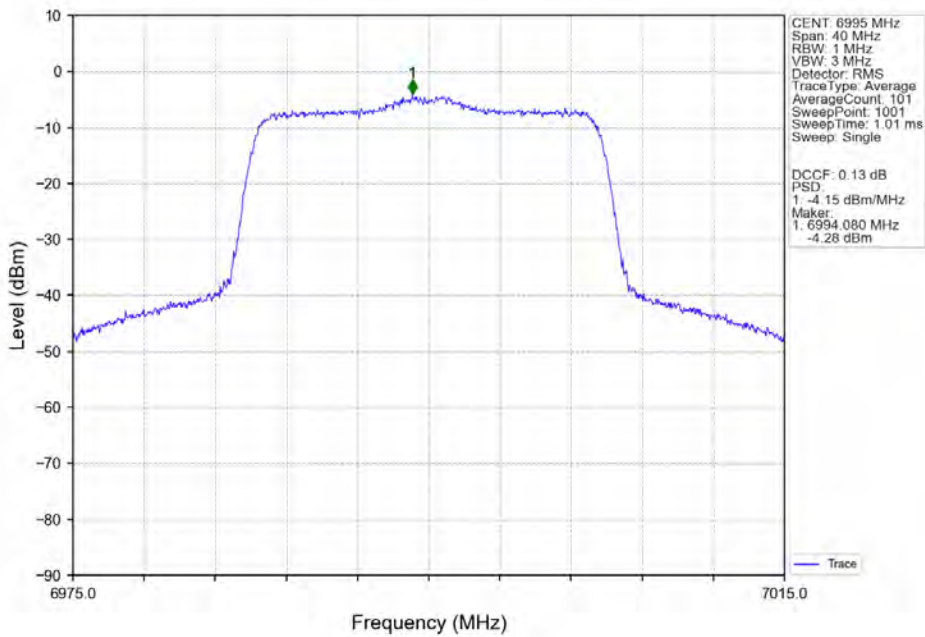



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 156 of 341

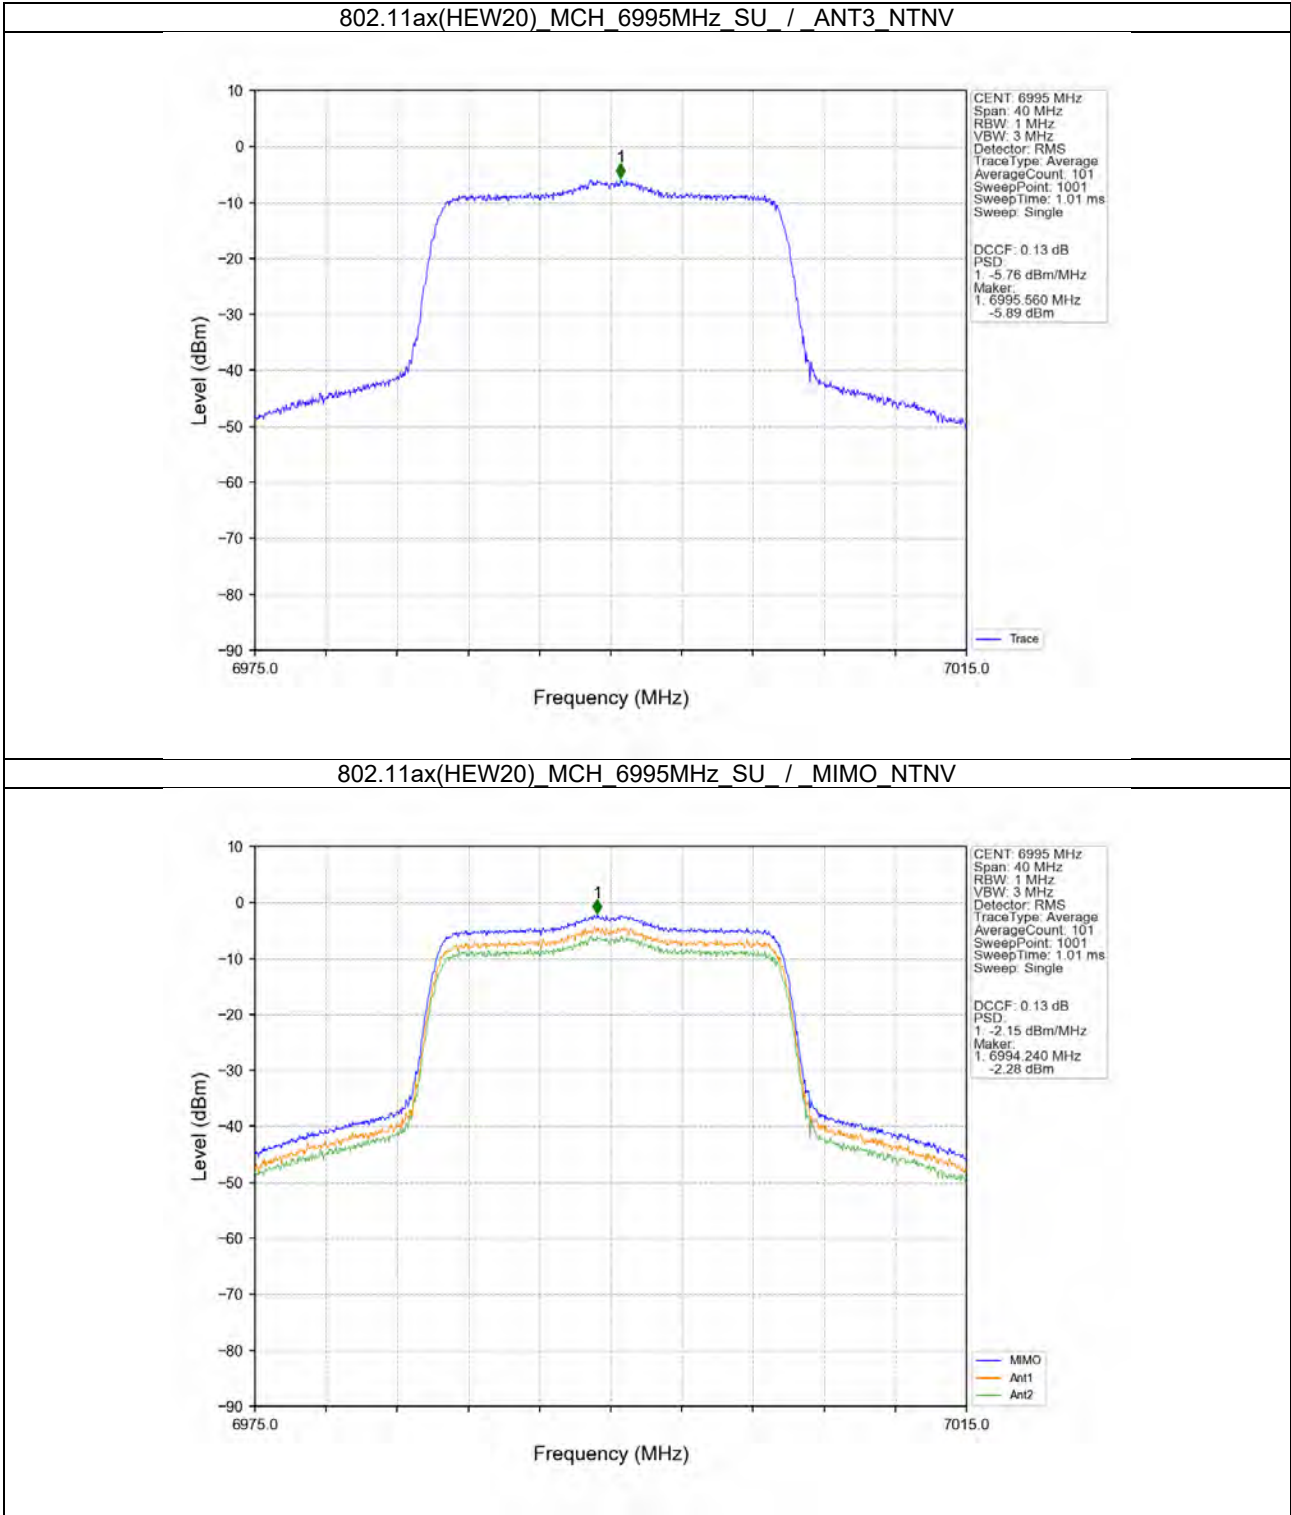



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 157 of 341

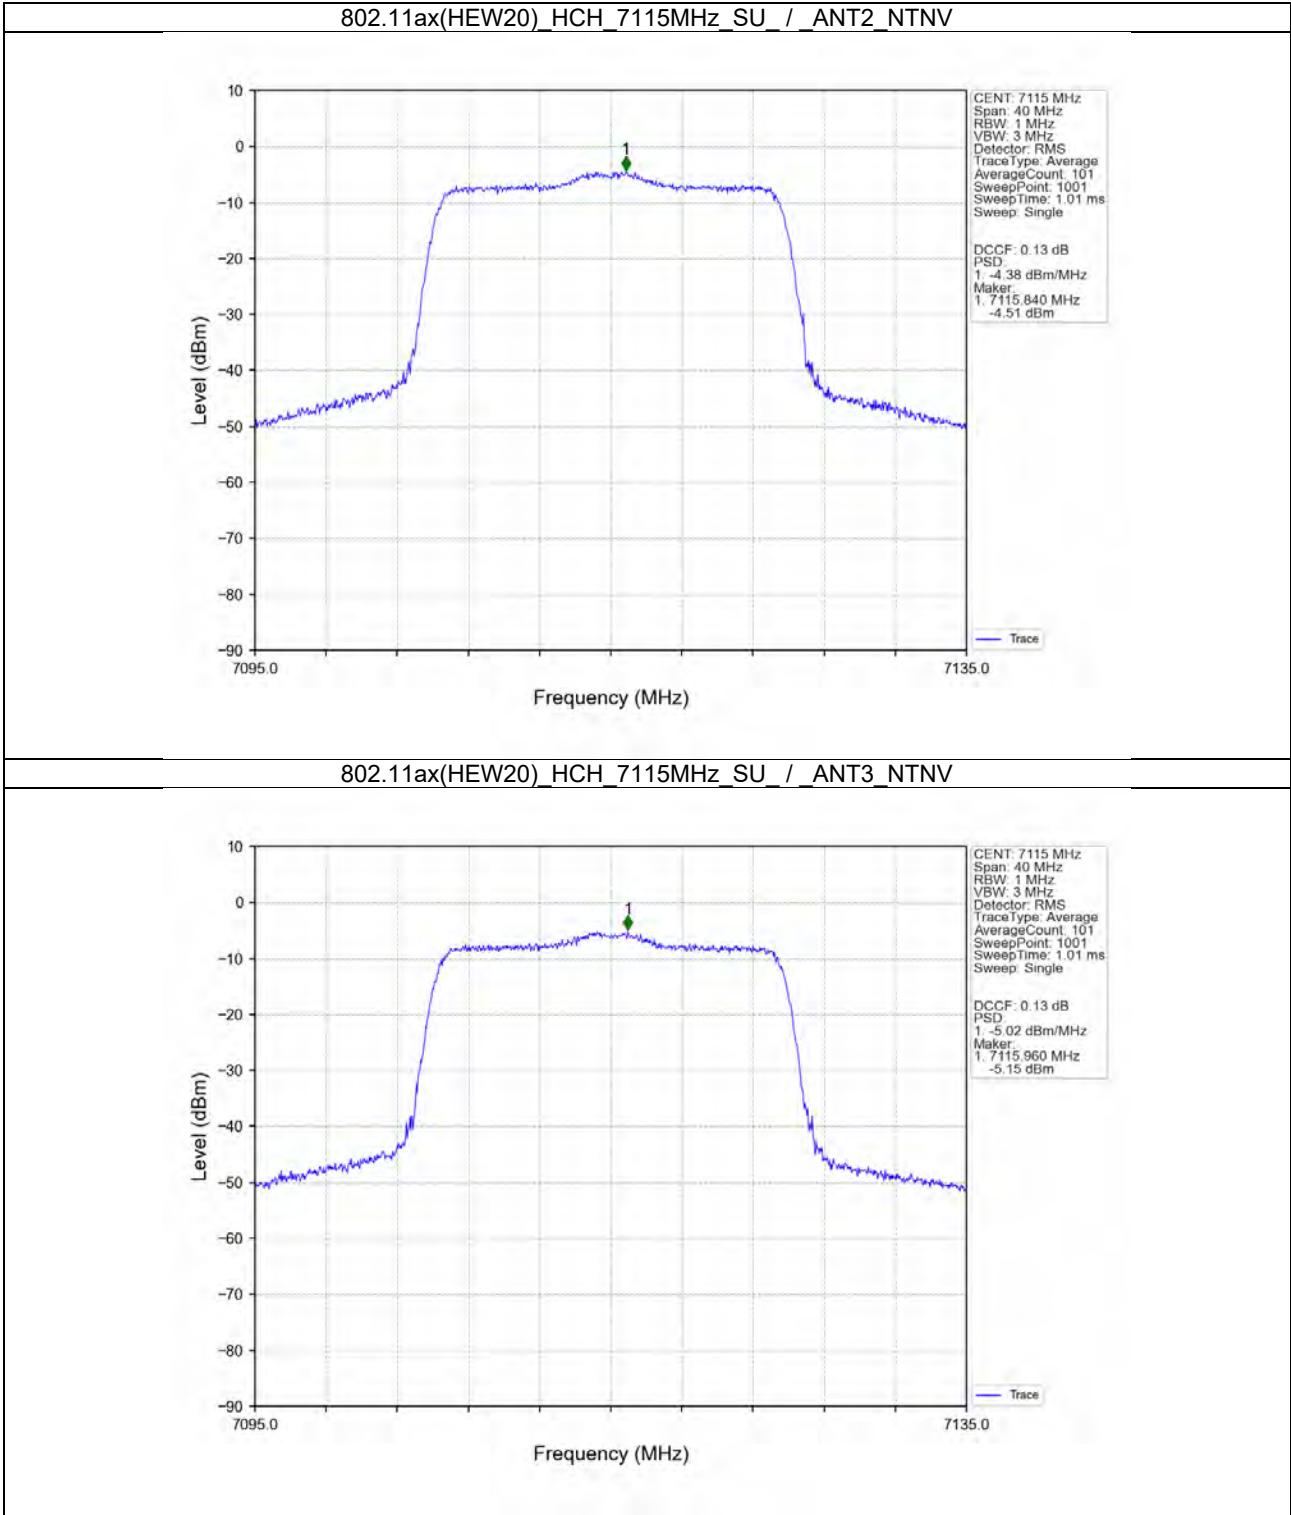



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 158 of 341

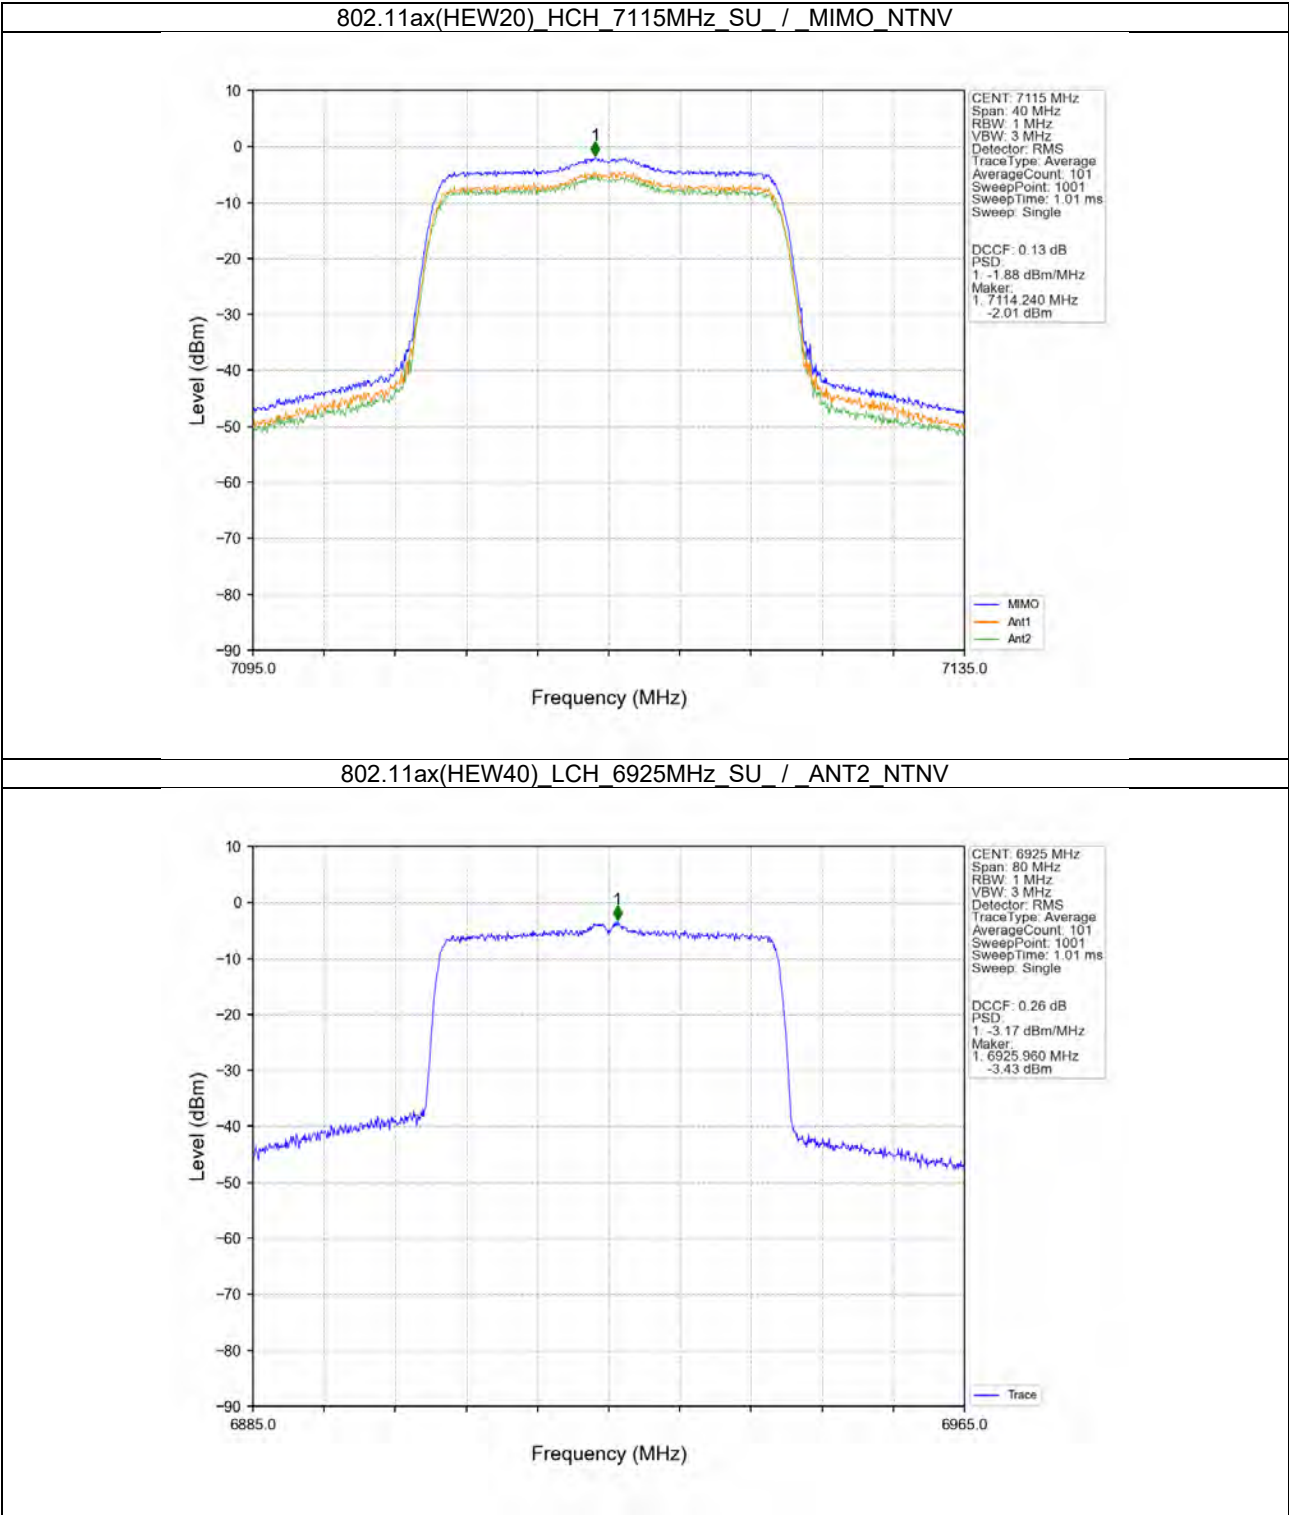



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 159 of 341

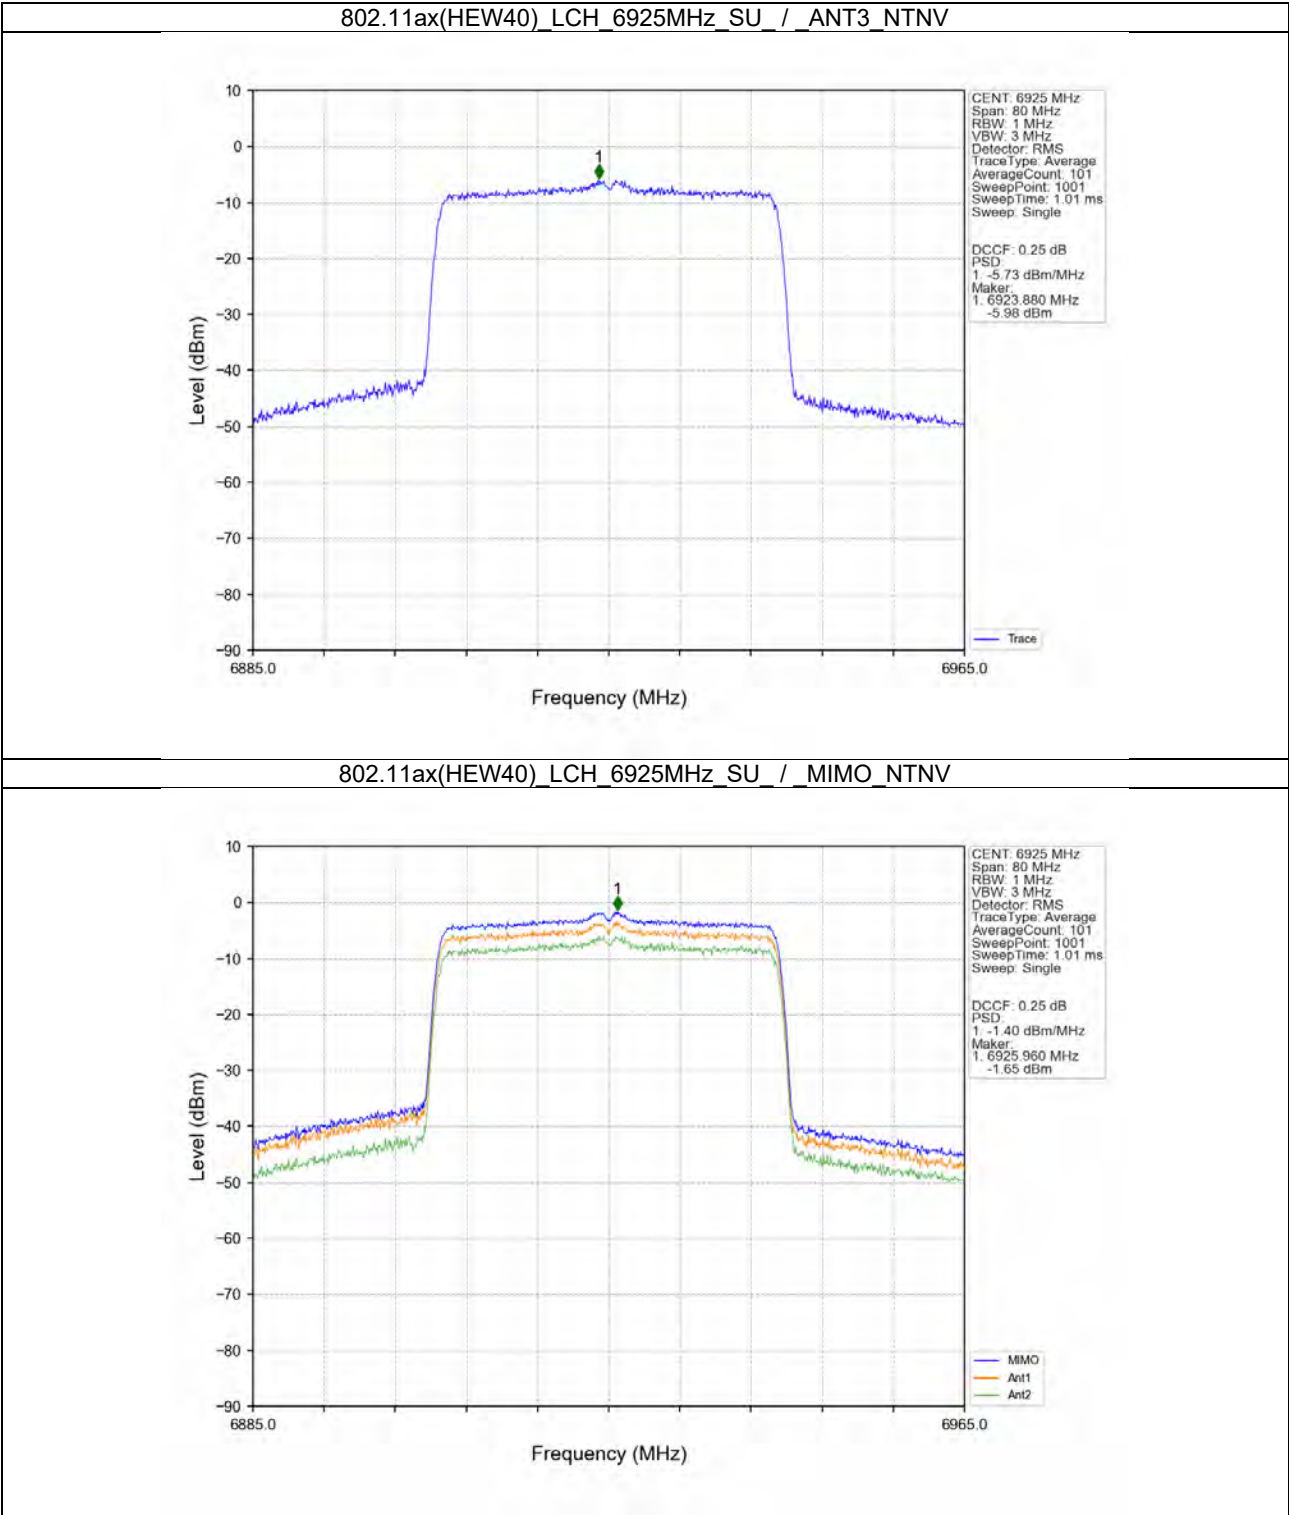



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 160 of 341

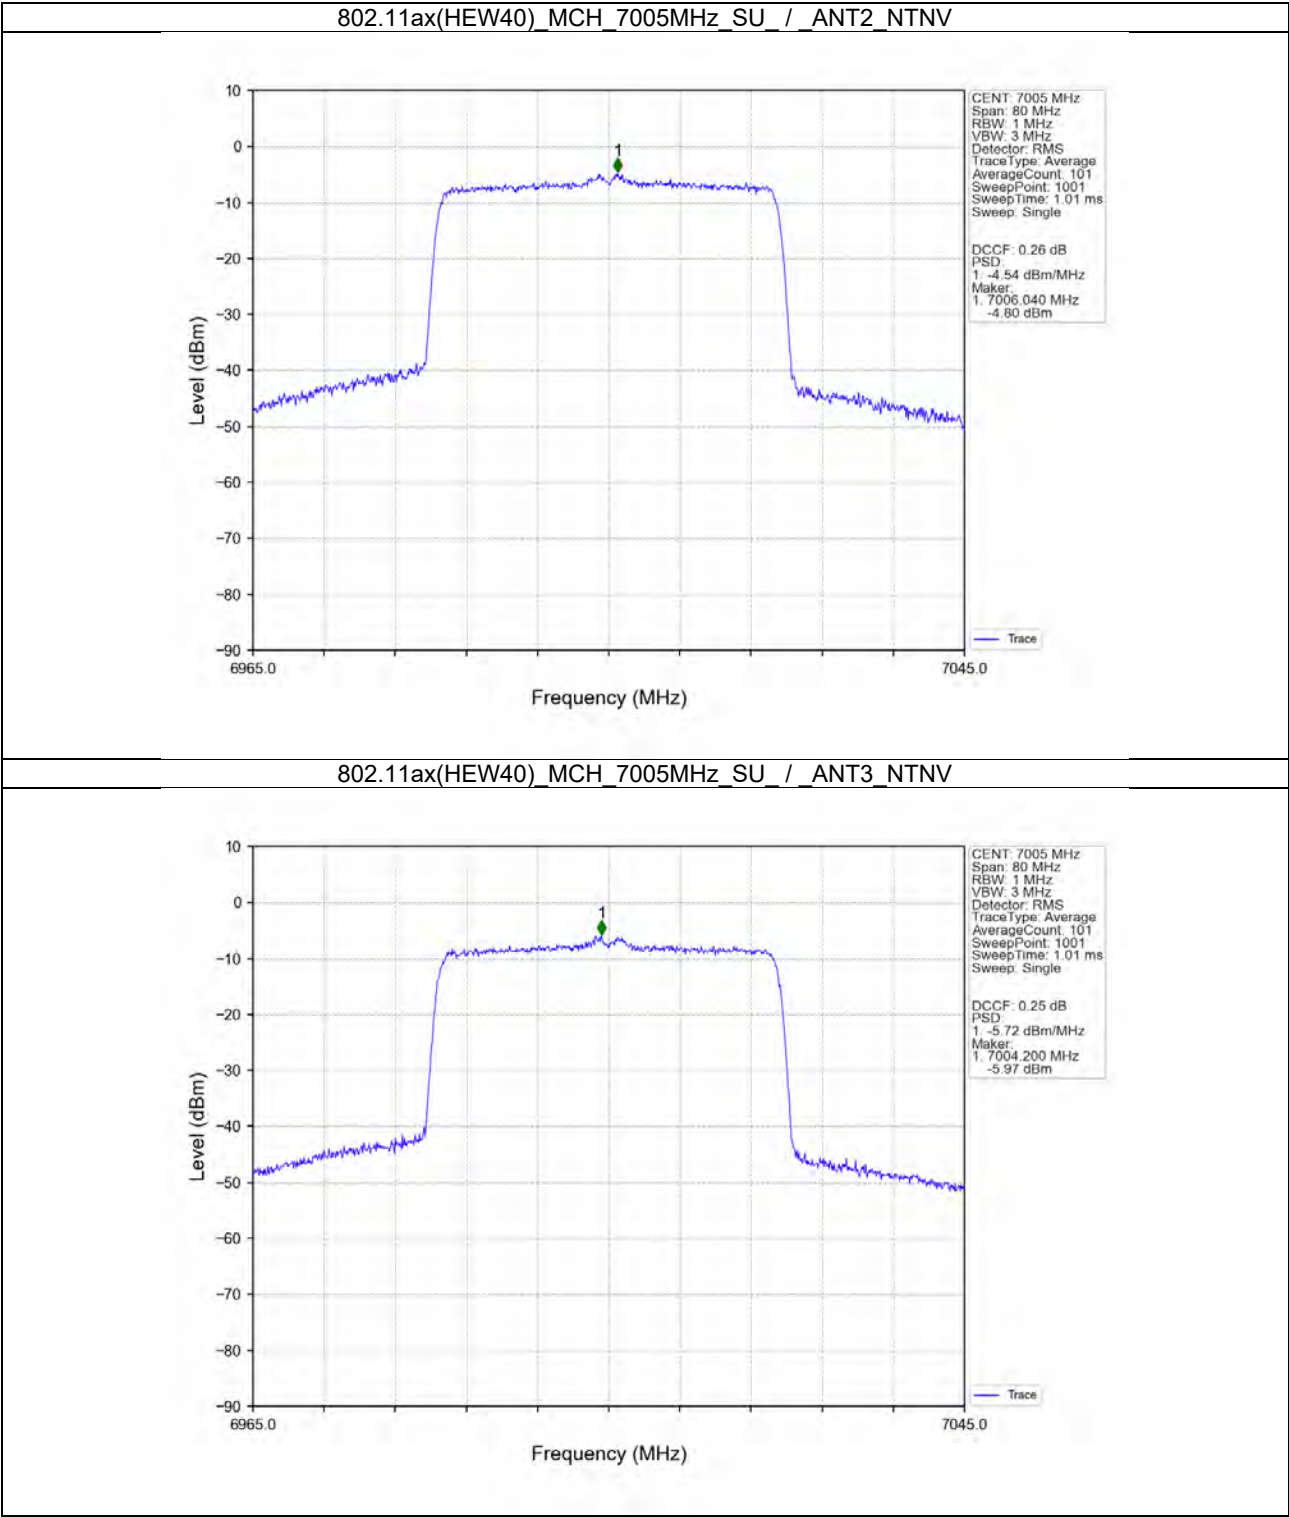



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 161 of 341

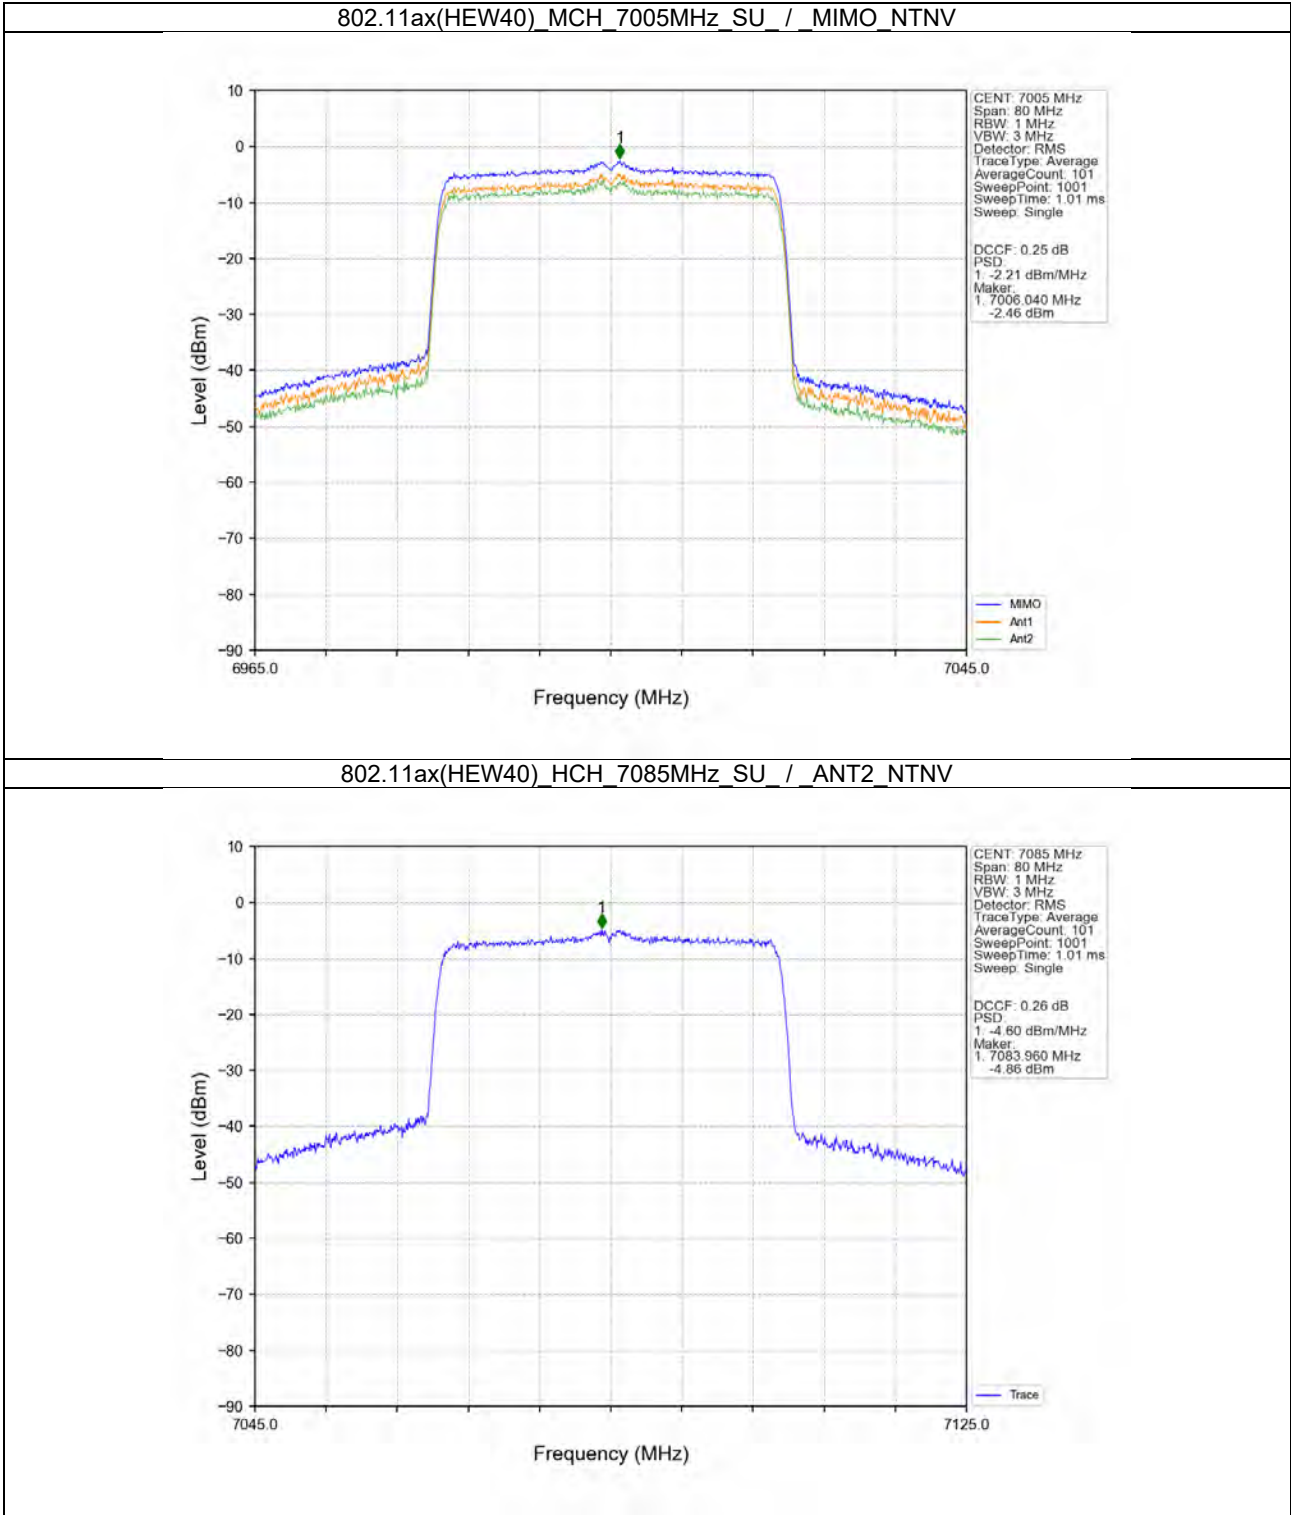



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 162 of 341

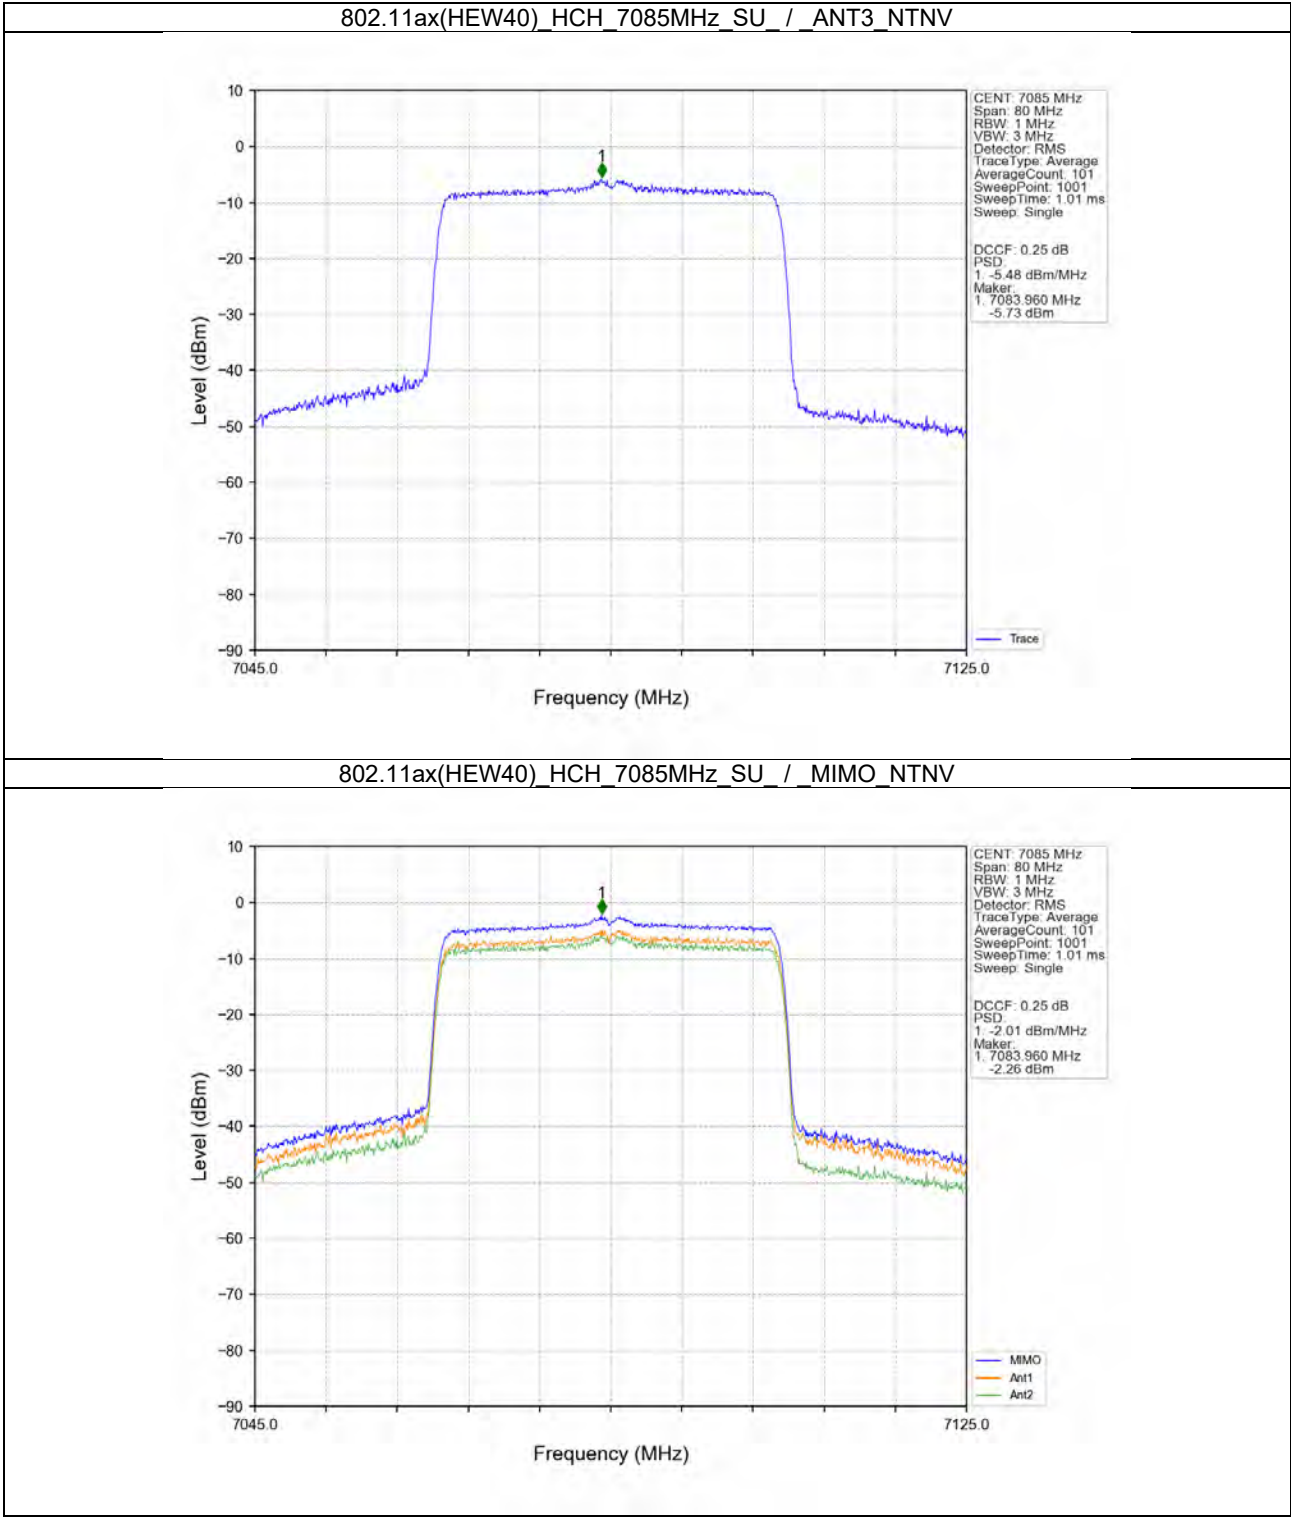



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 163 of 341

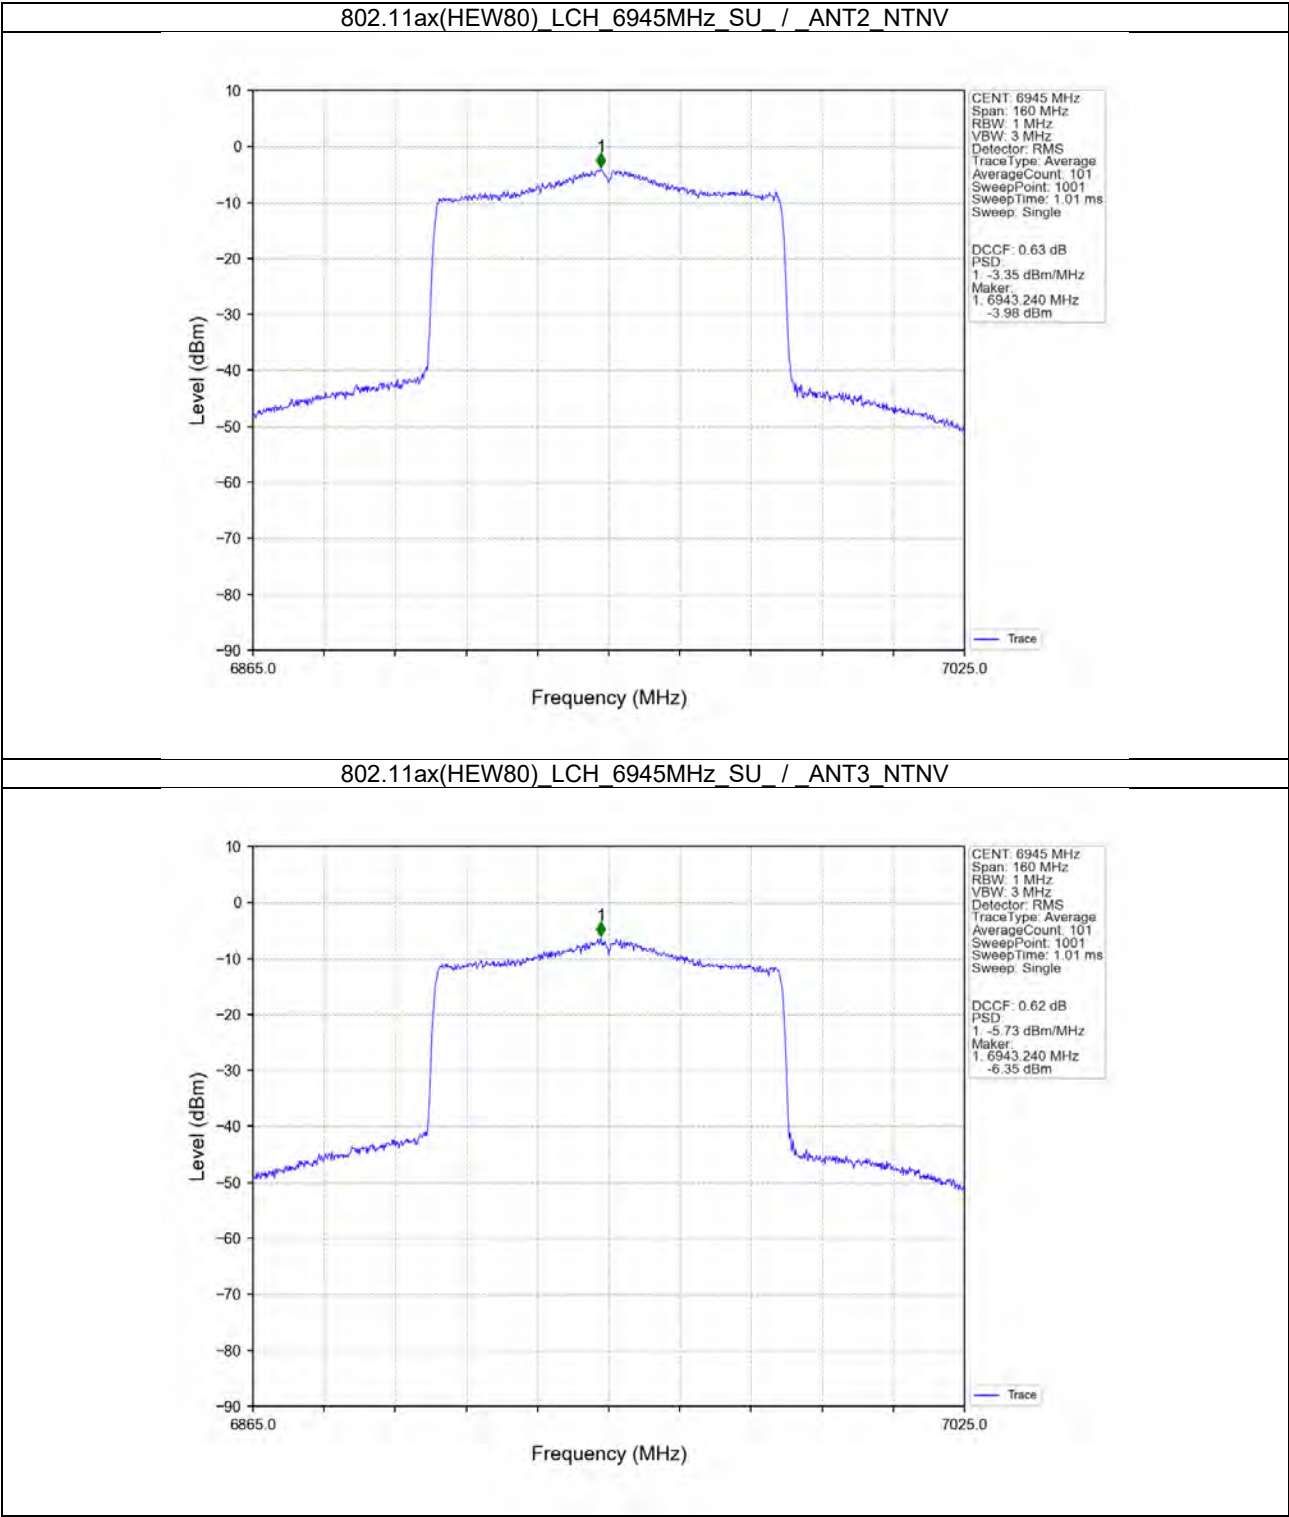



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 164 of 341

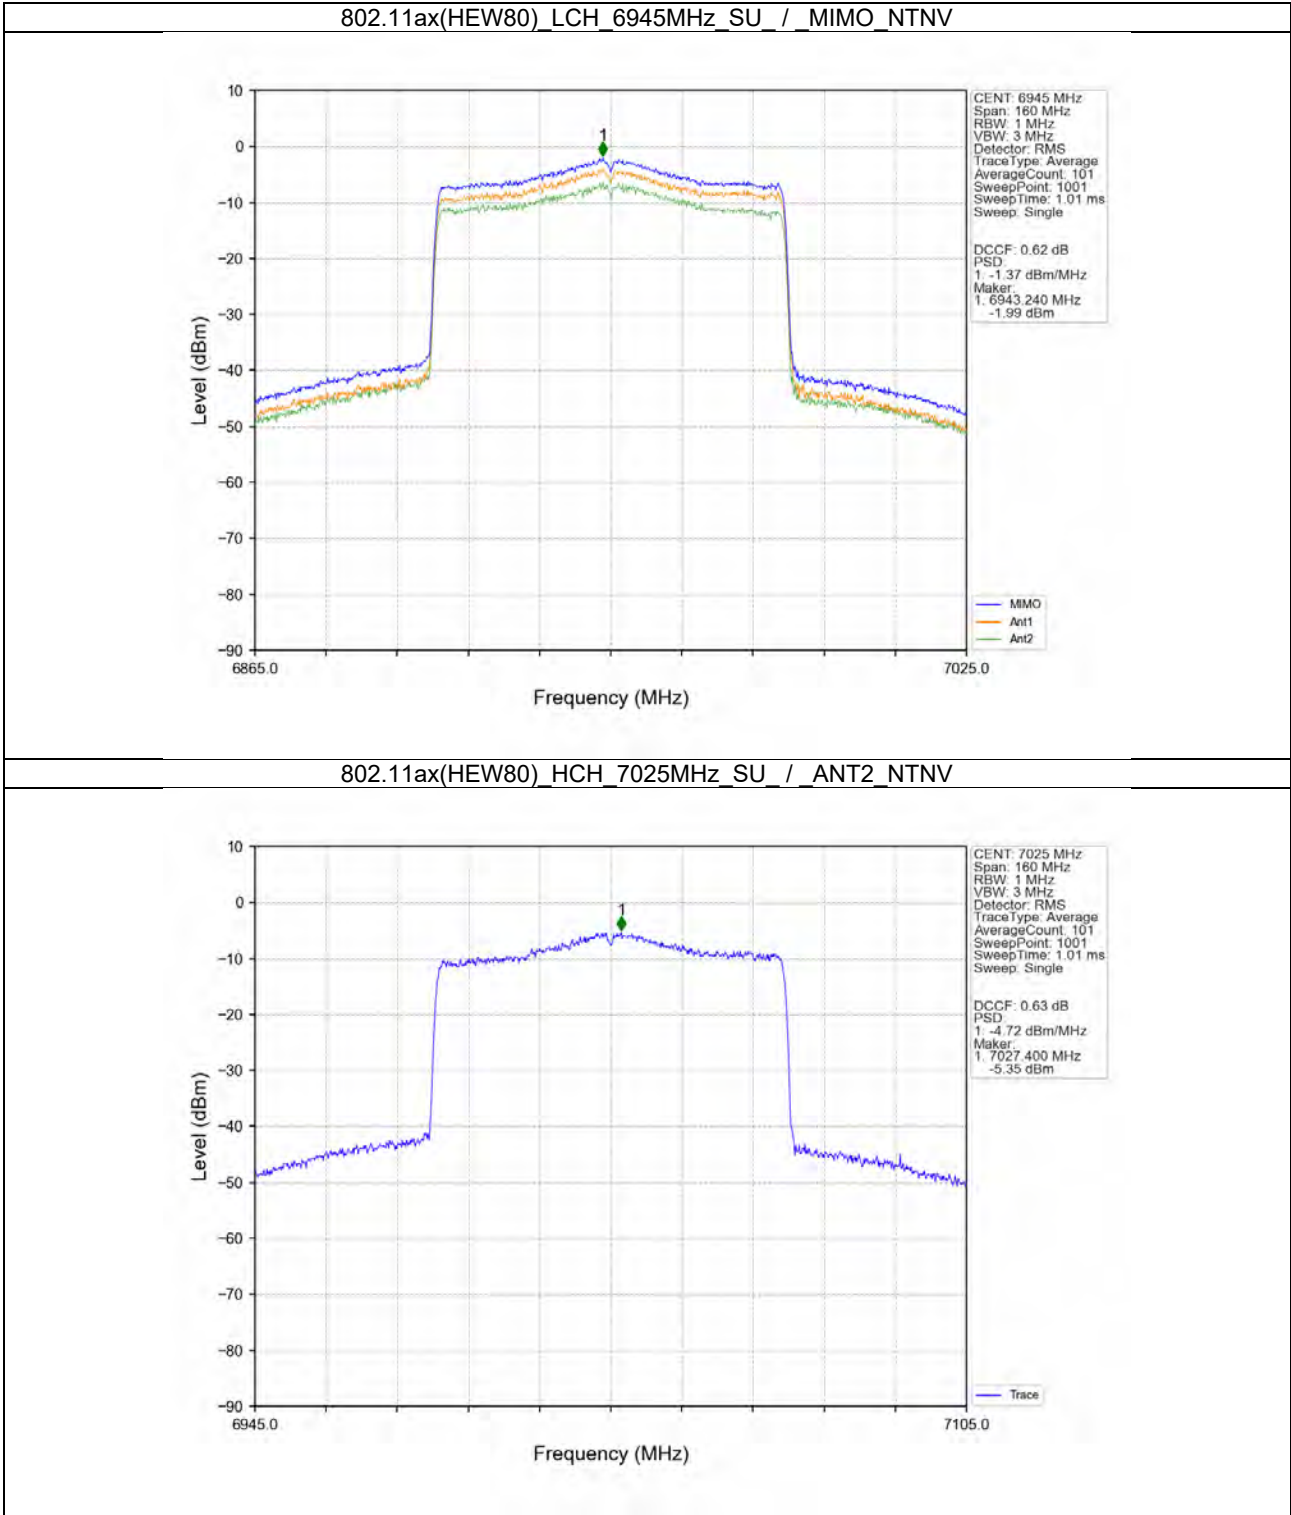



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 165 of 341

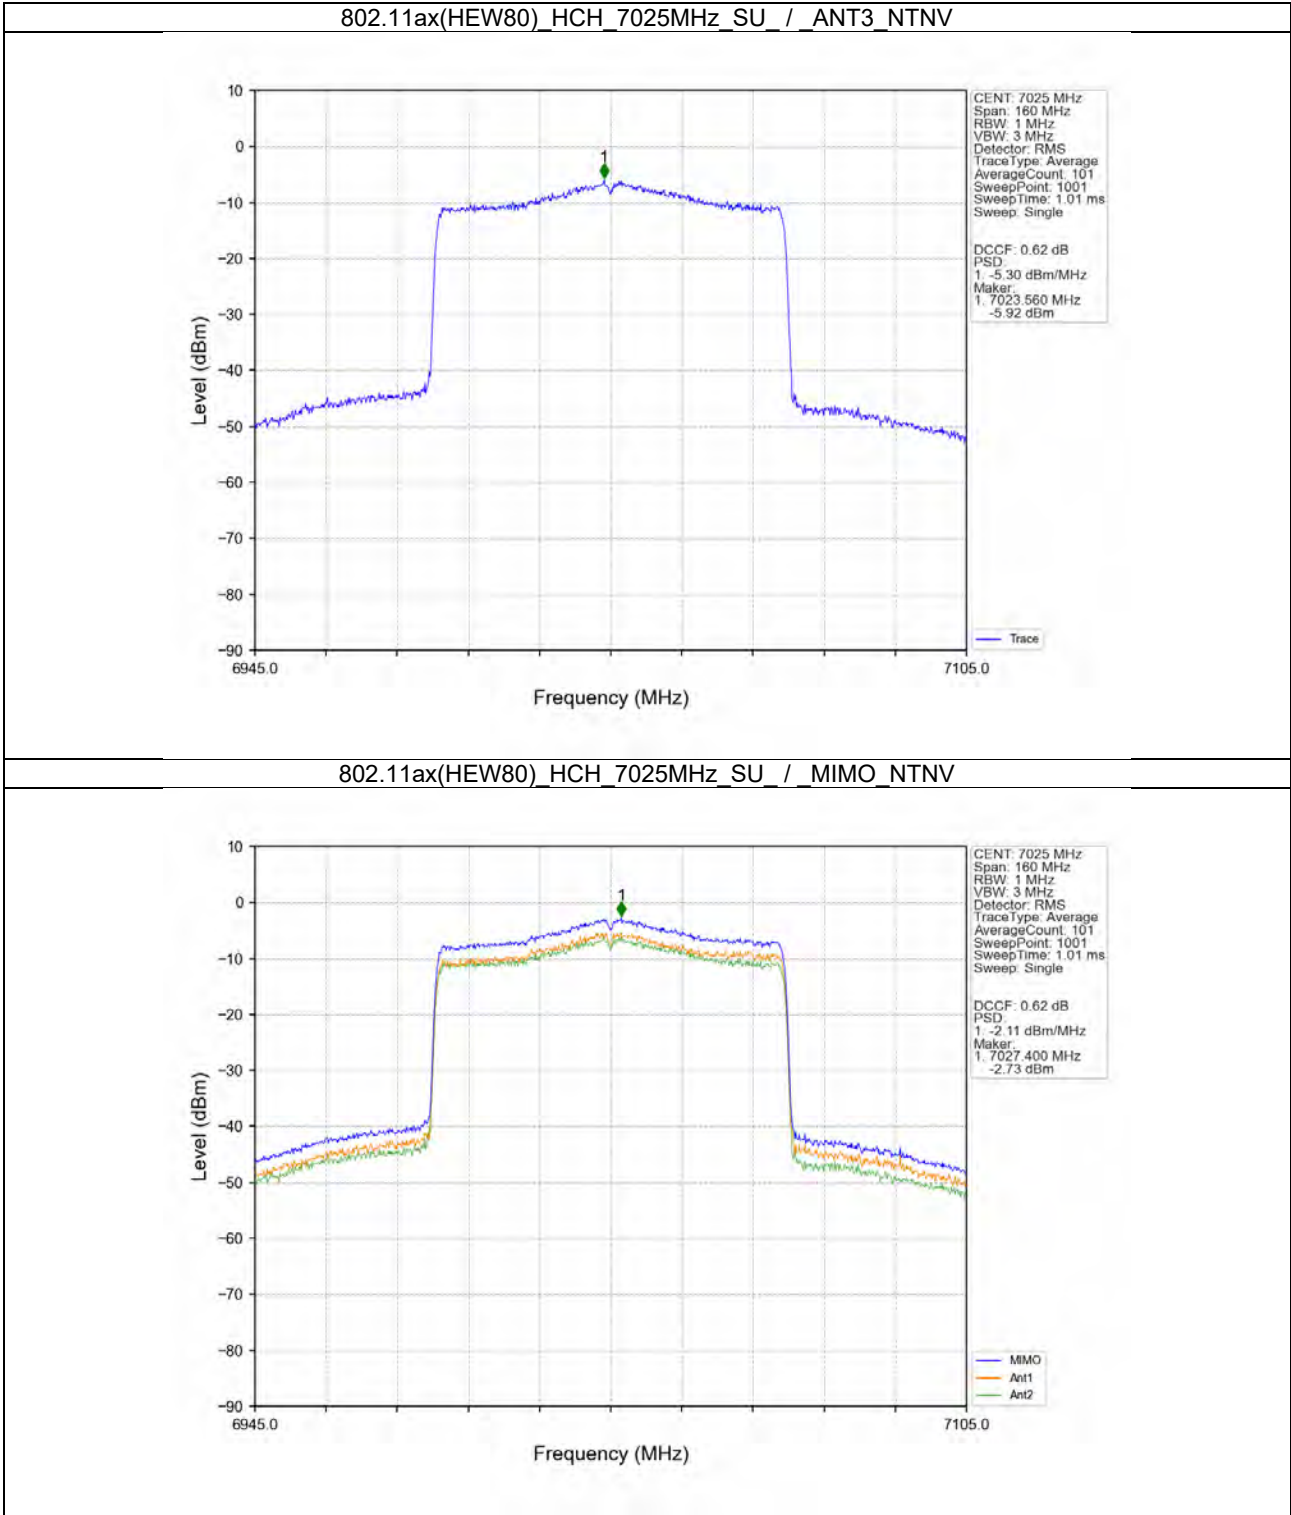




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 166 of 341


4.2.9 PSD

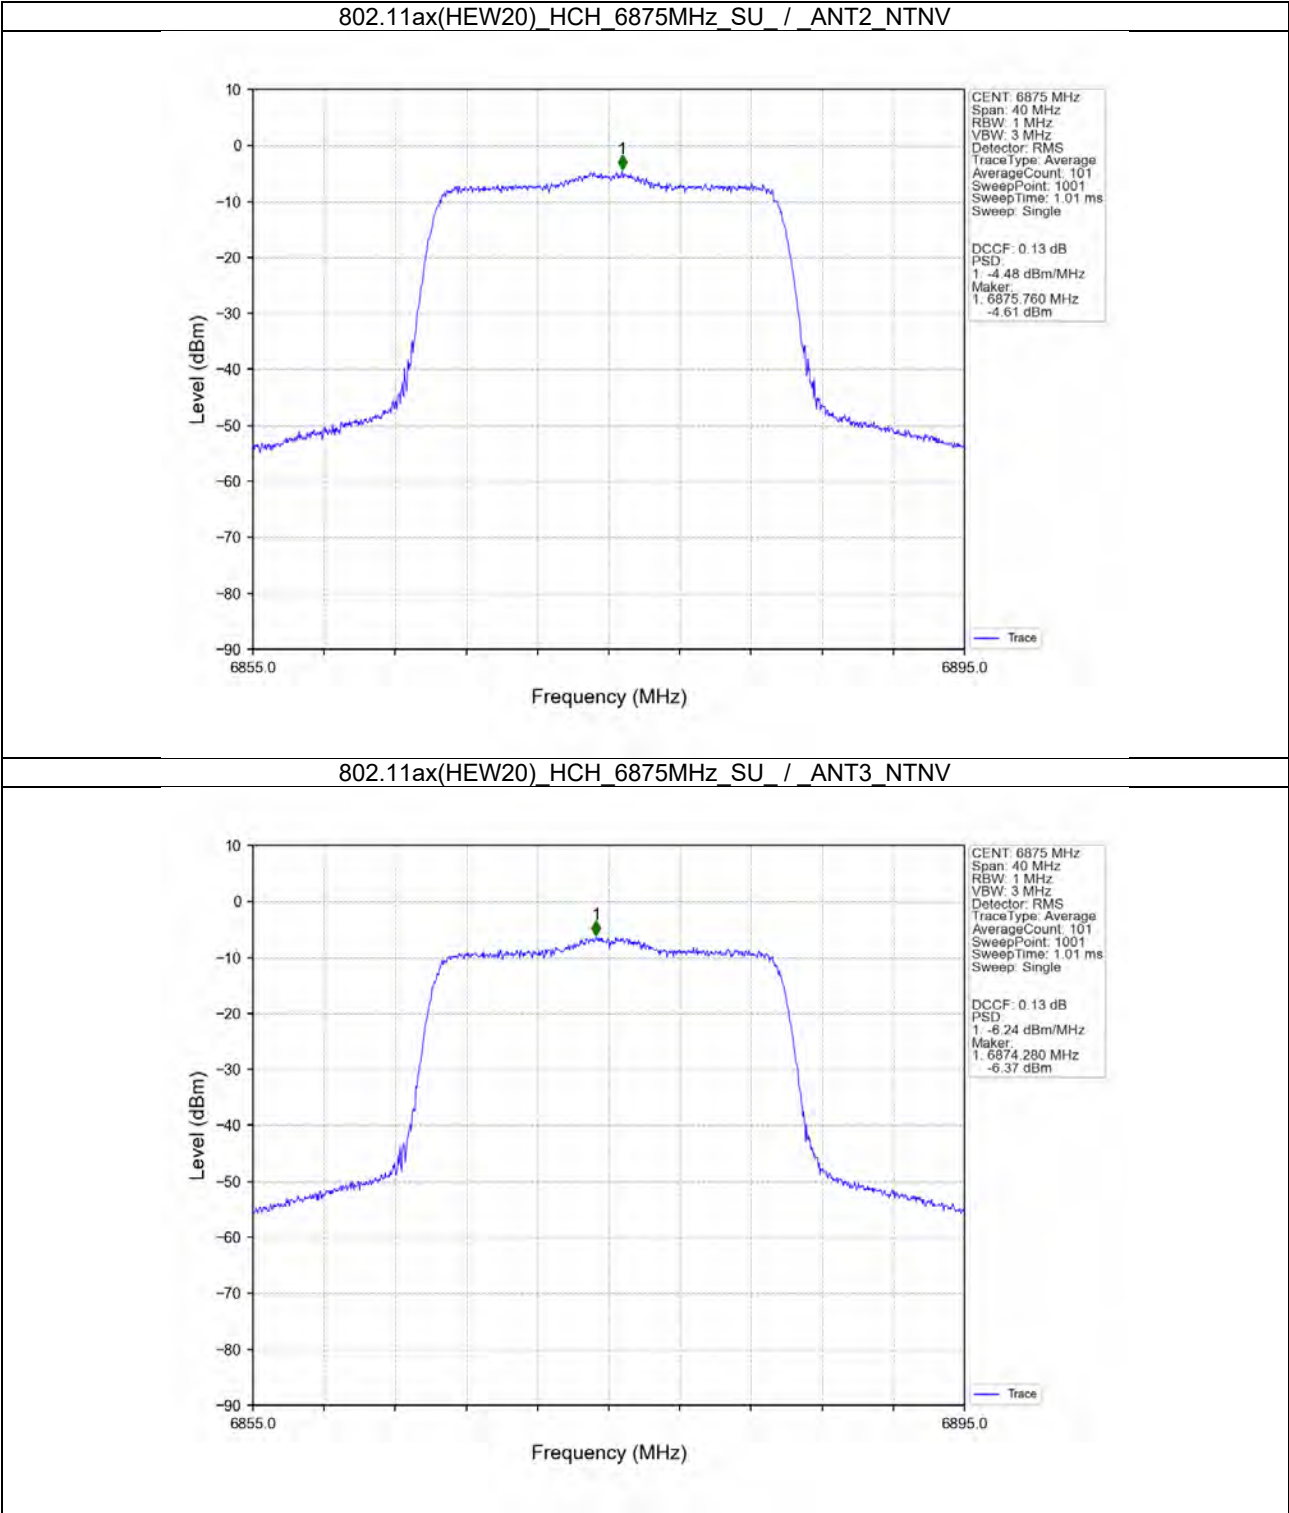



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 167 of 341

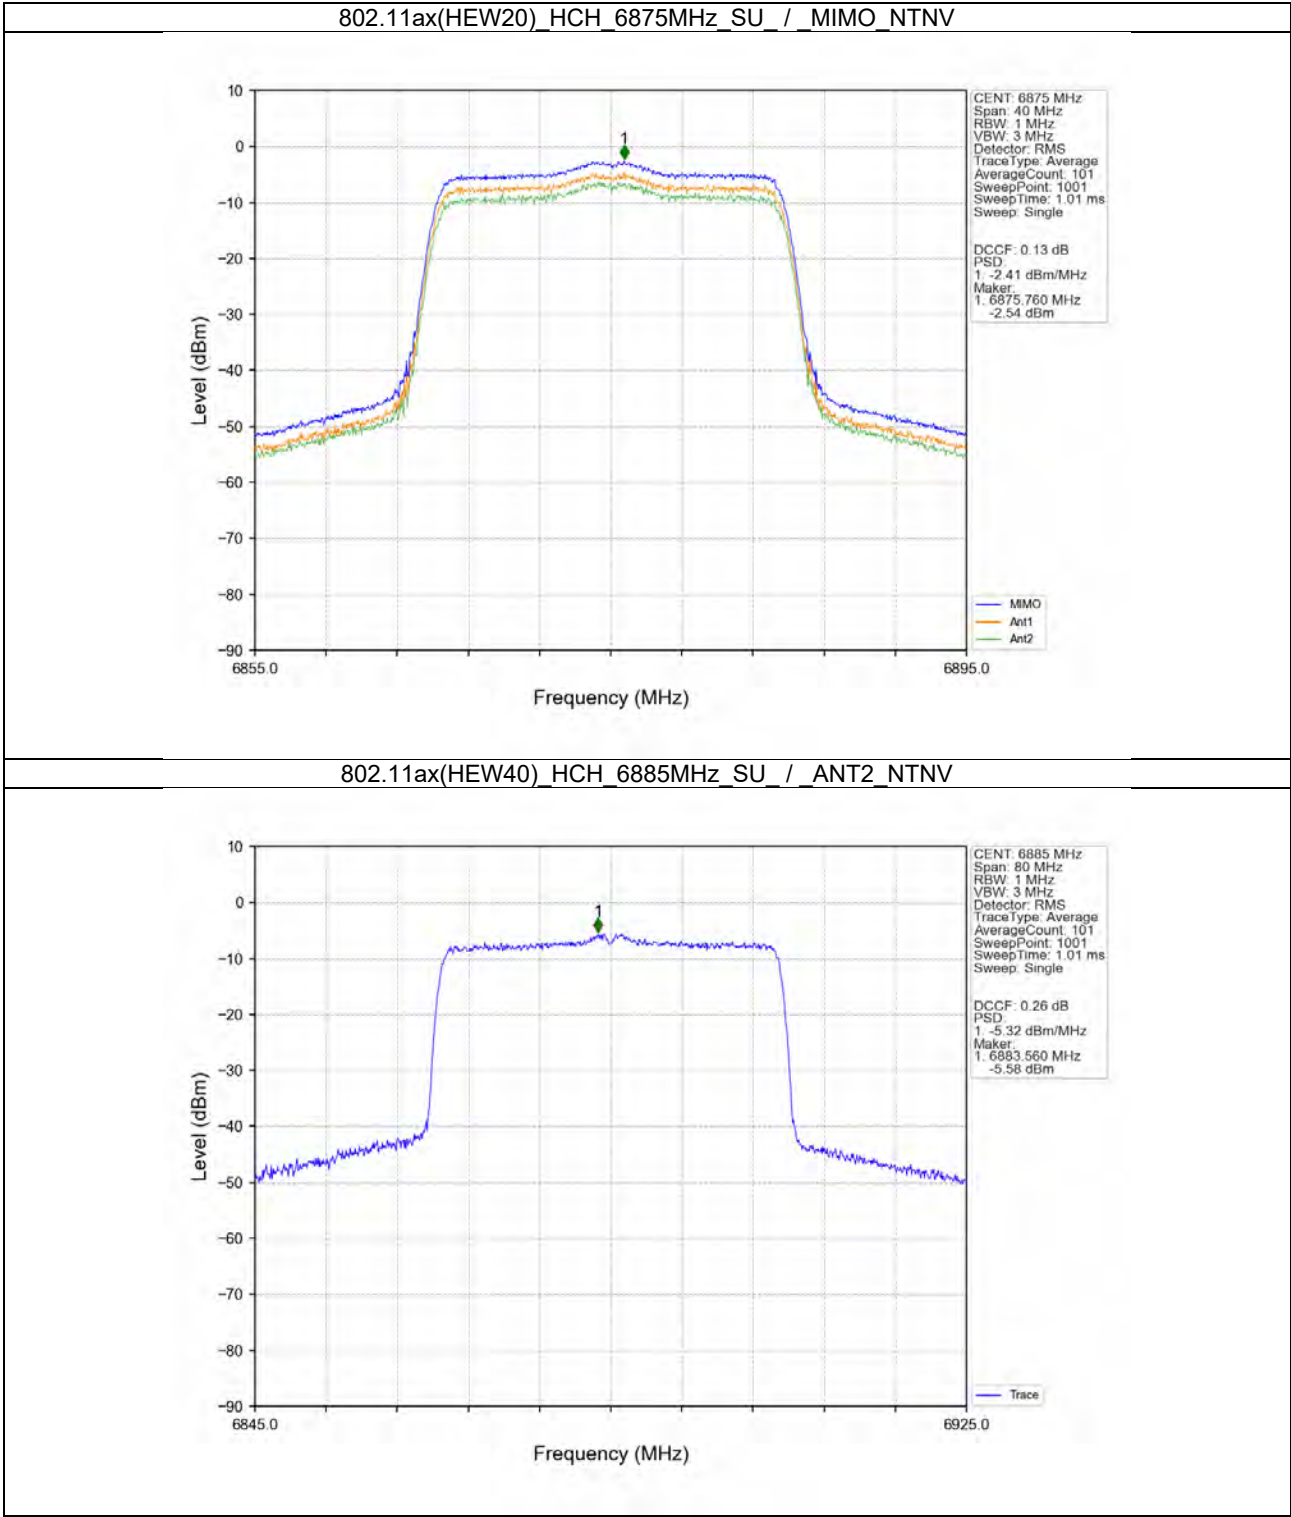



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 168 of 341

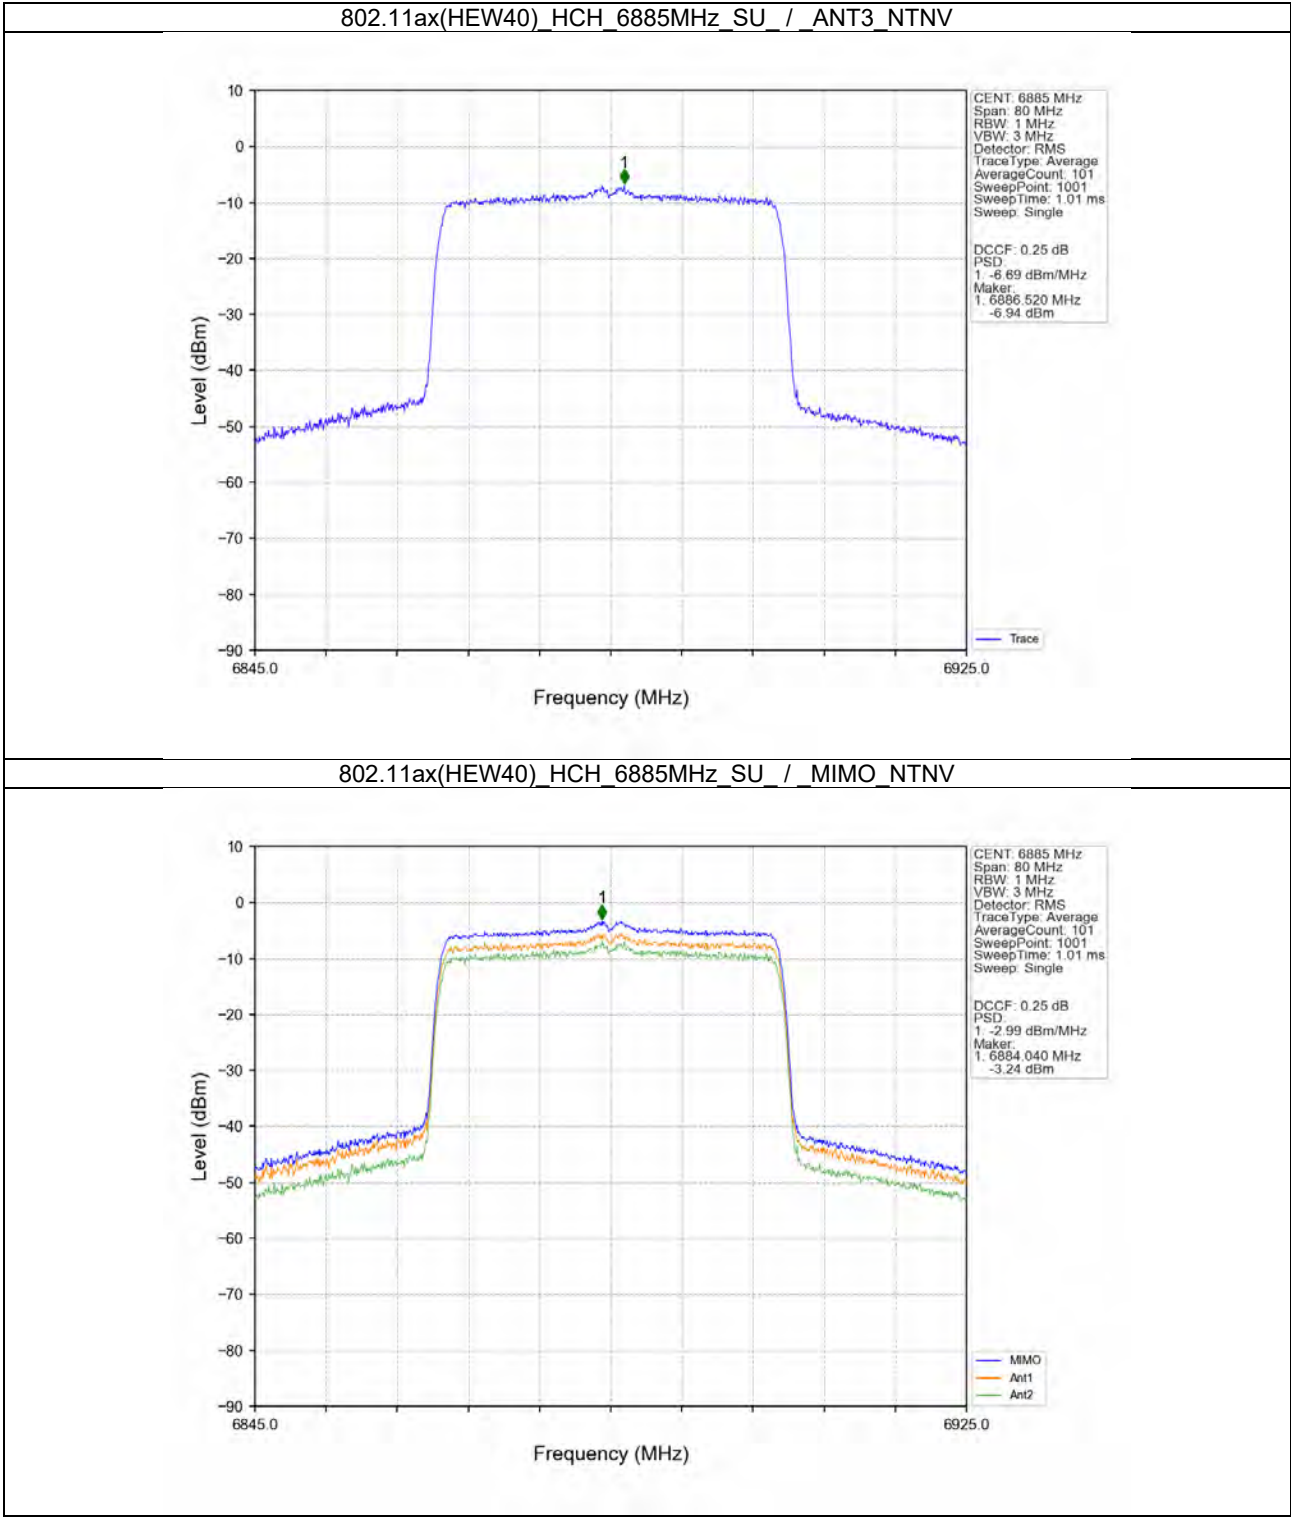



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 169 of 341

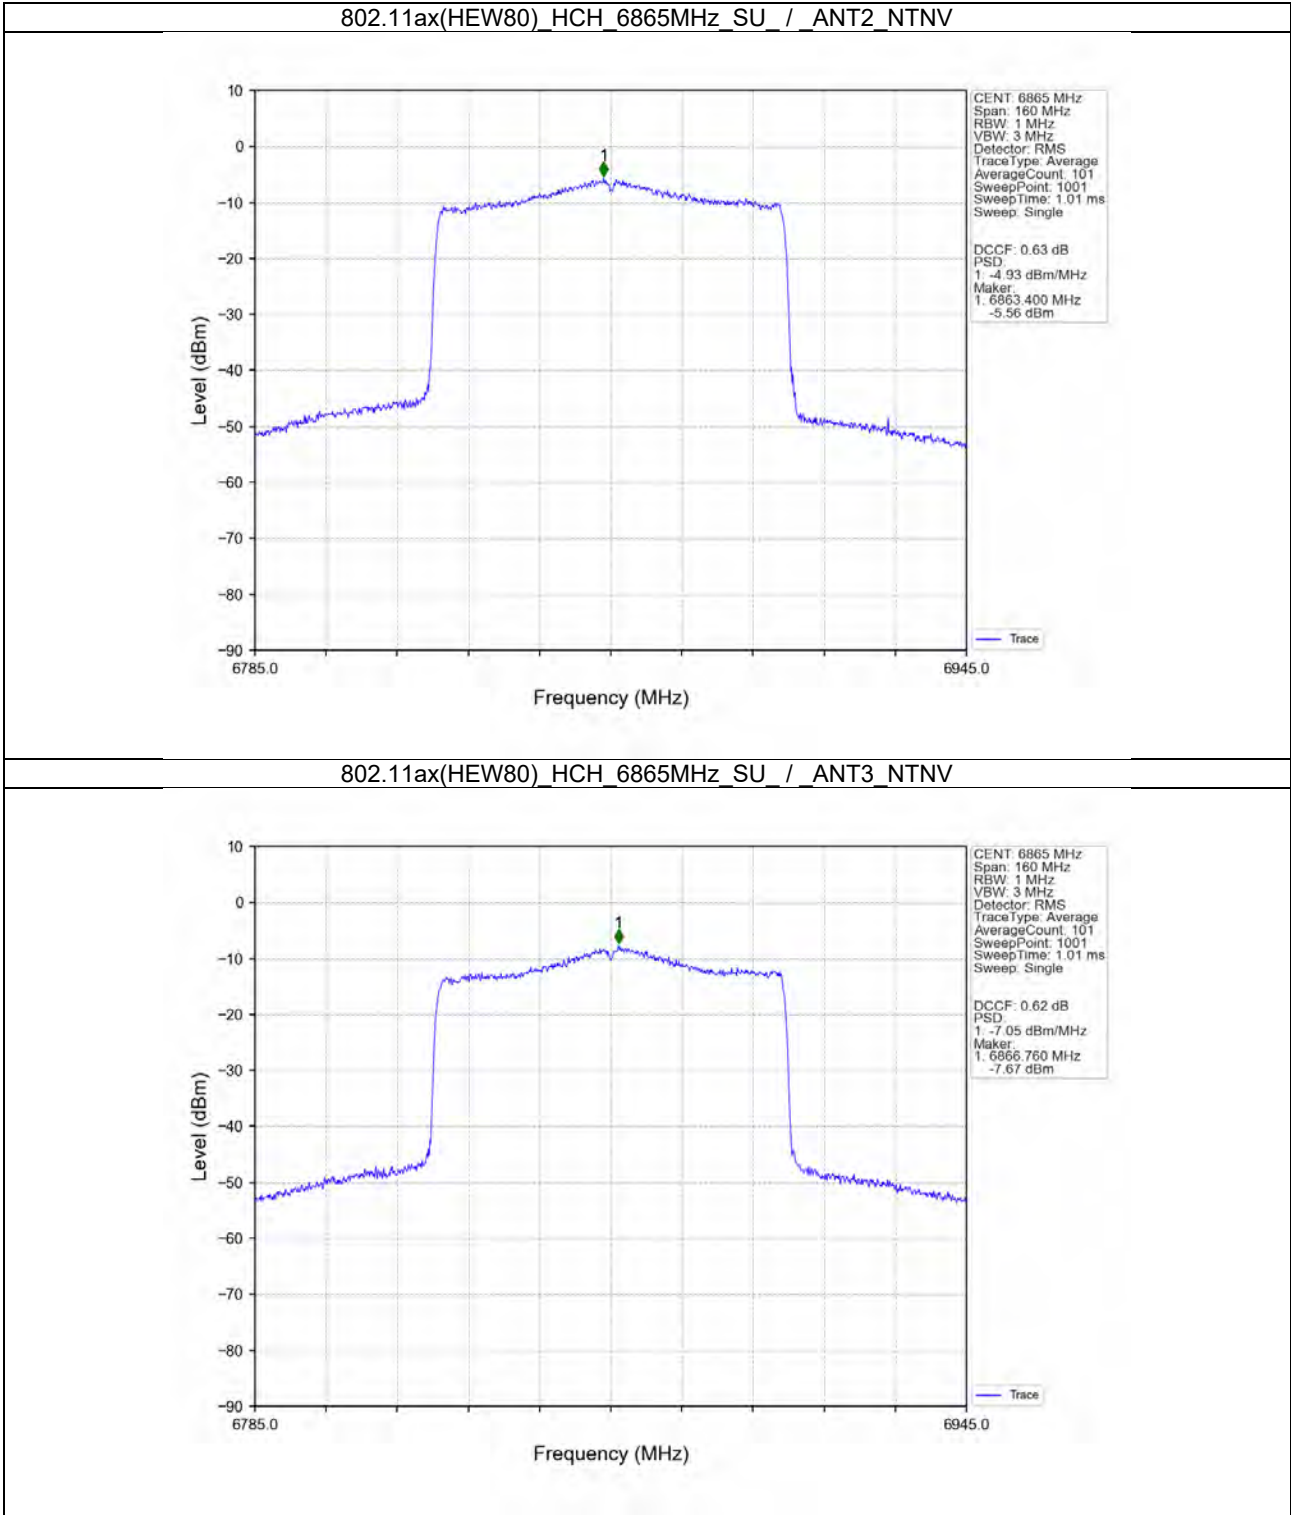



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 170 of 341

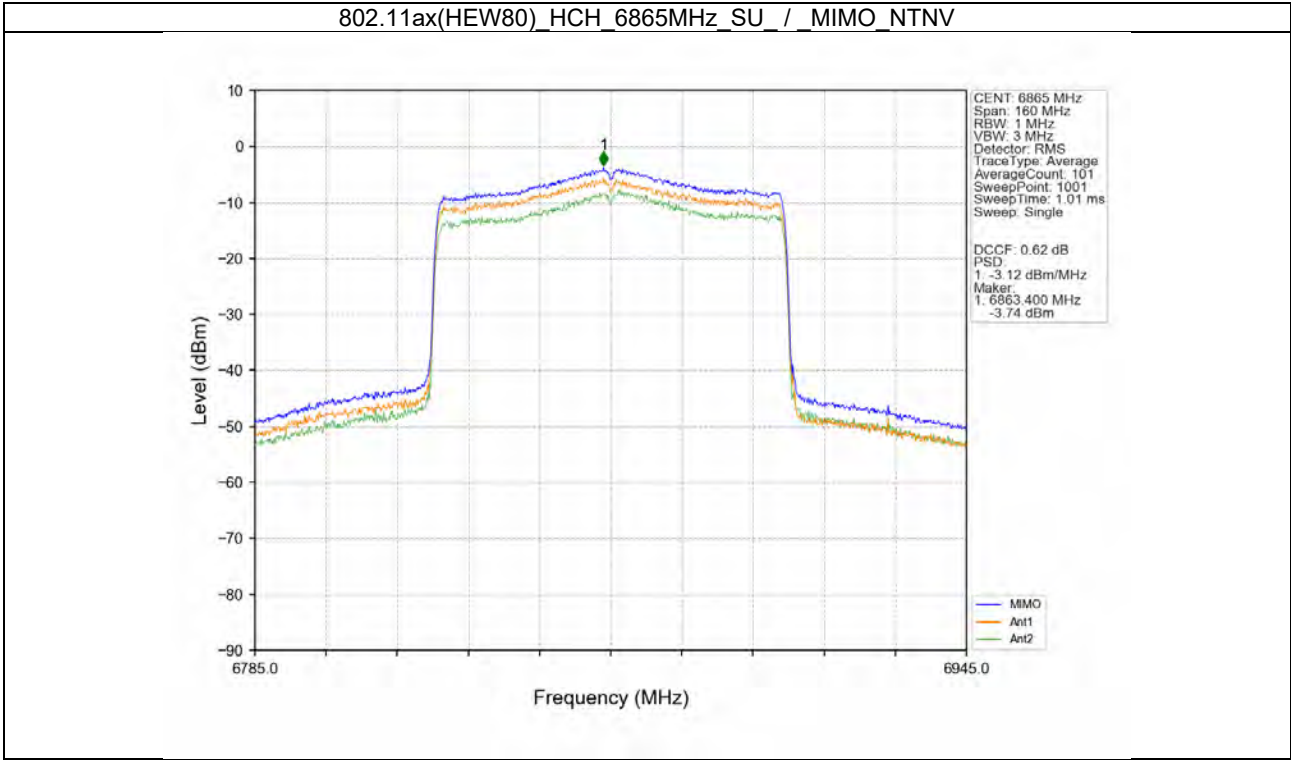




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 171 of 341


4.2.11 PSD

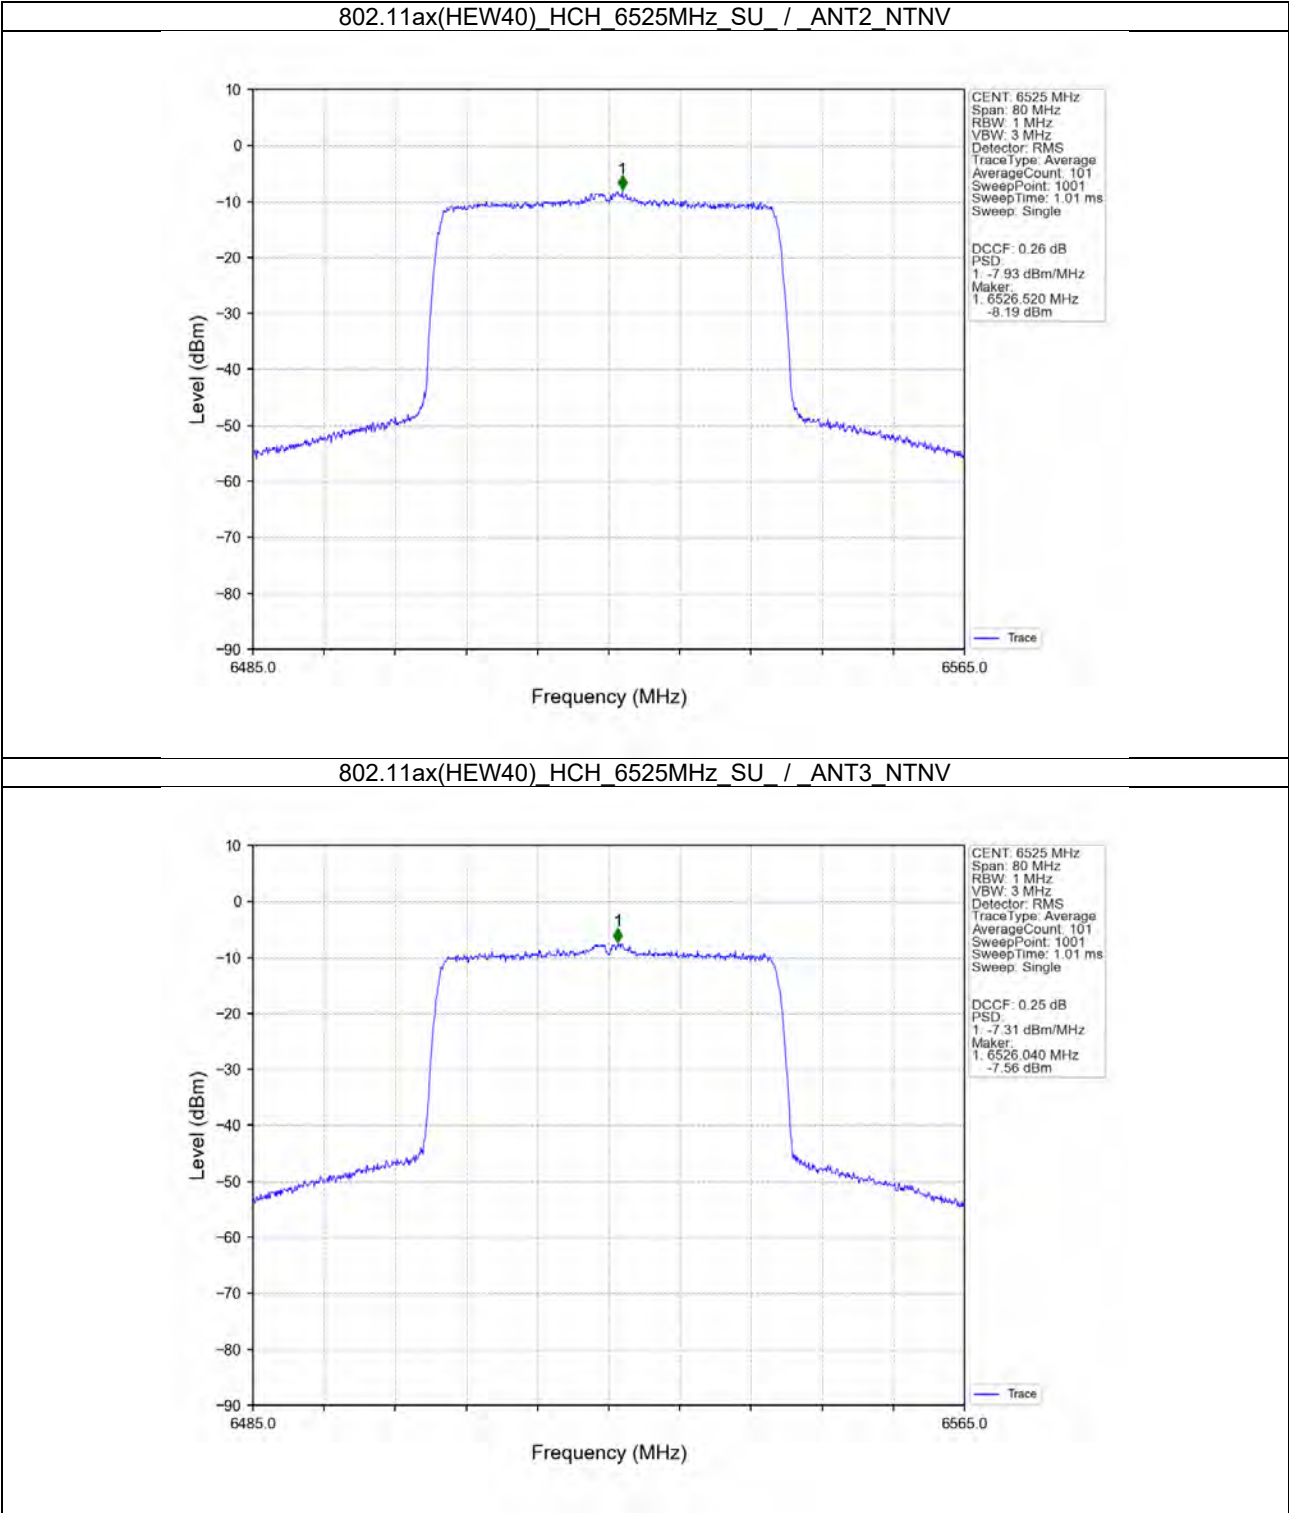



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007205
Rev.: 01
Page: 172 of 341

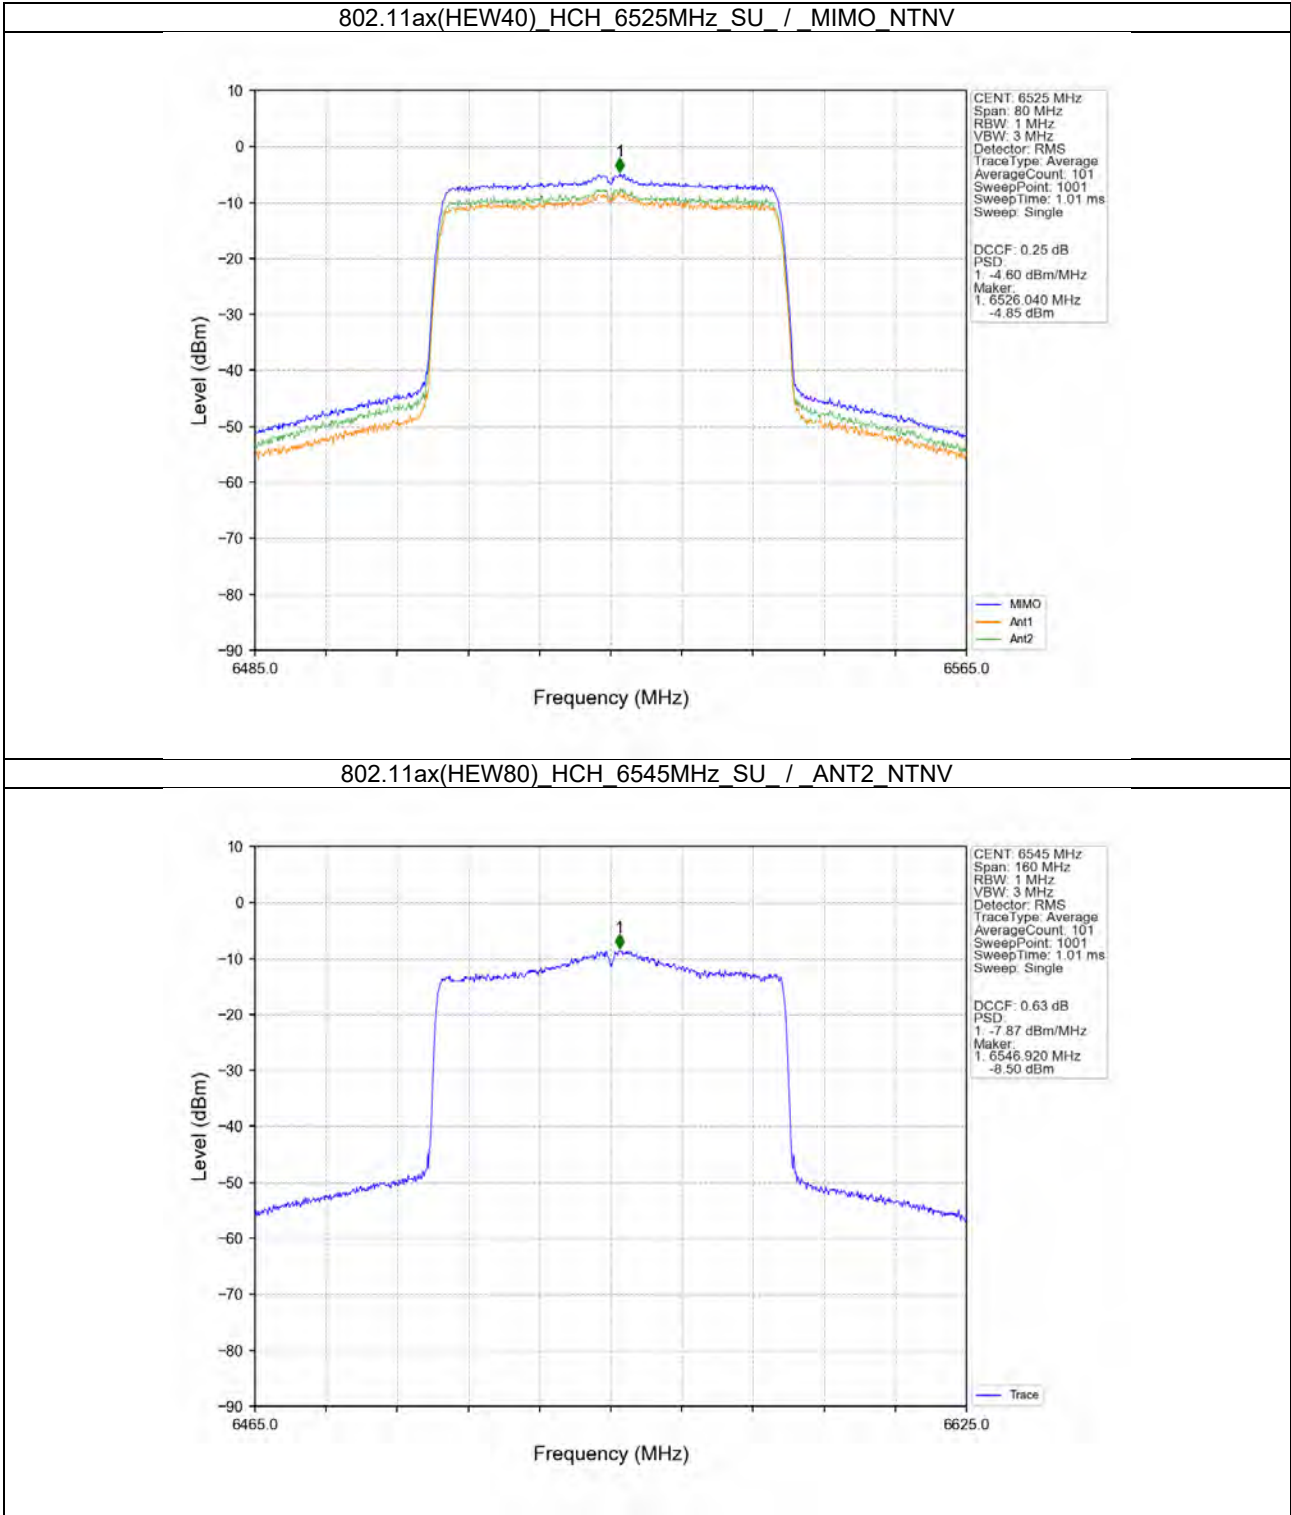



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 173 of 341

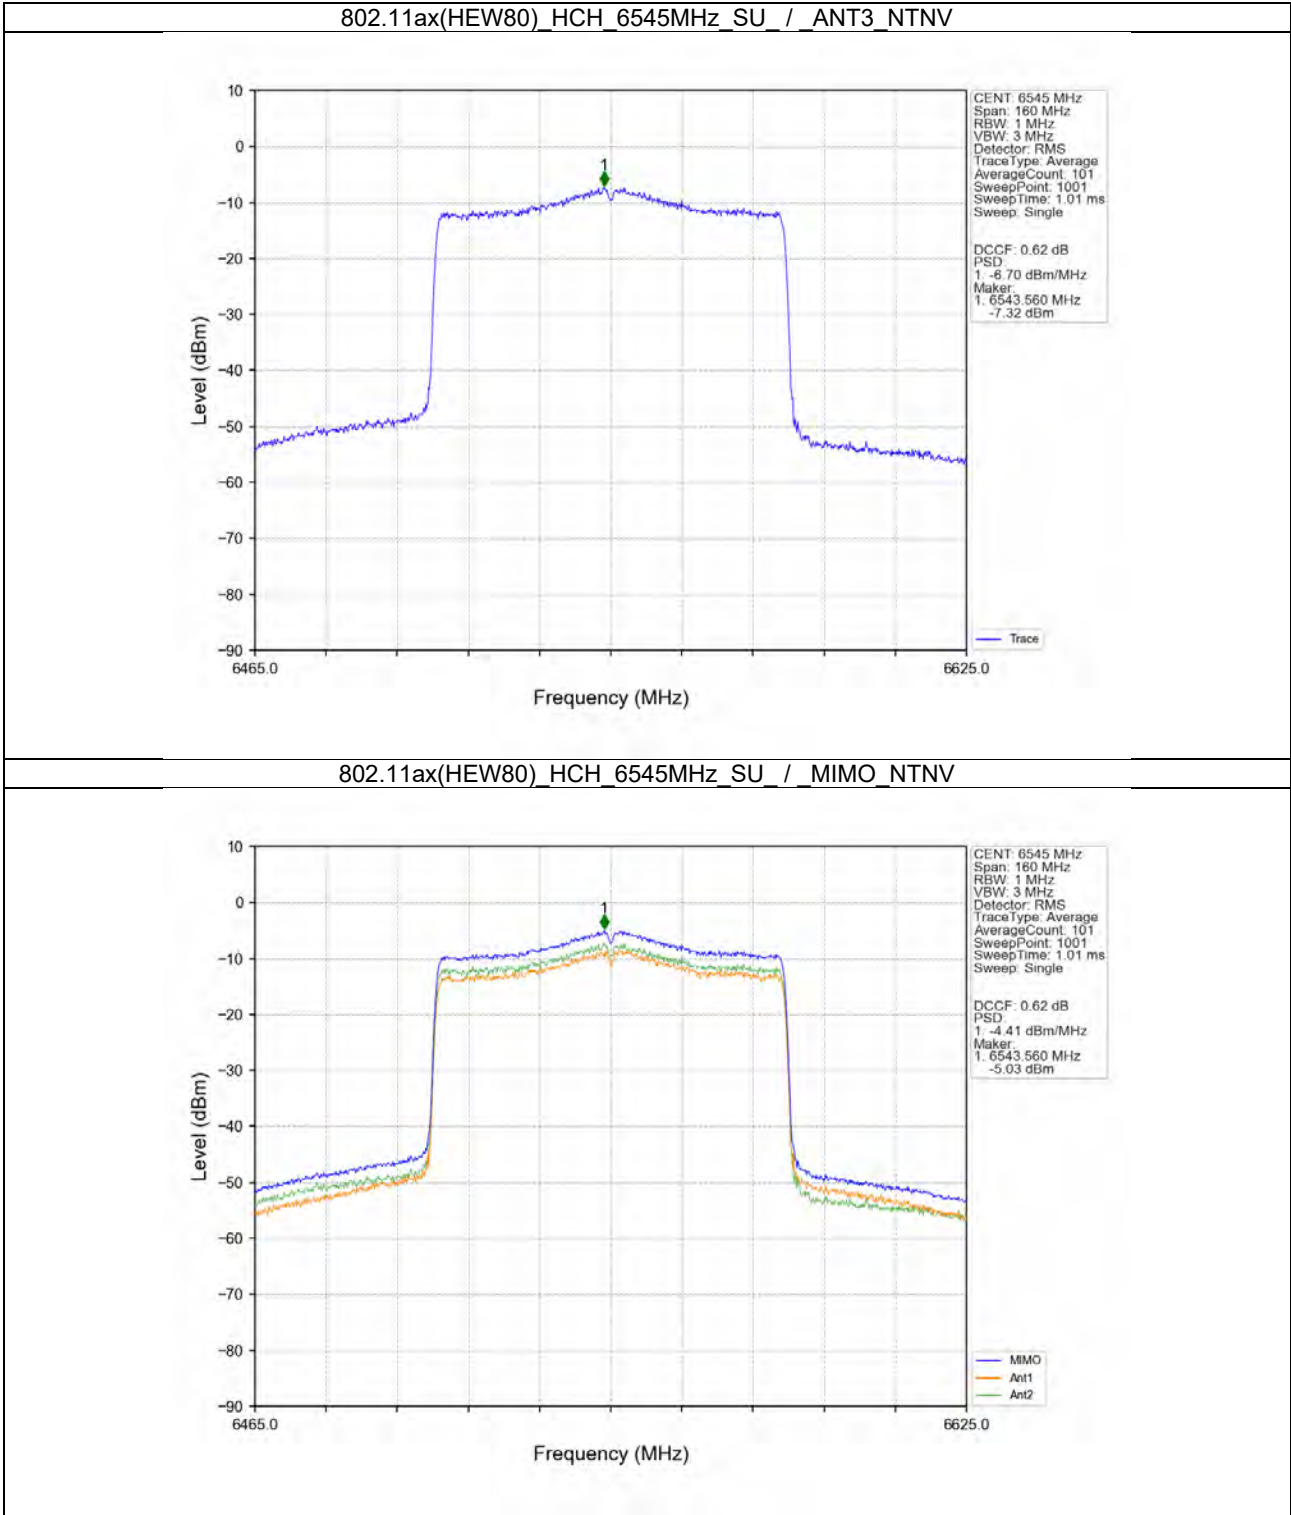



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 174 of 341

5. Frequency Stability

5.1 Test Result

5.1.1 ANT2

ANT2										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	20	102	5954.900	5925 to 6425	Pass
							120	5954.940	5925 to 6425	Pass
							138	5954.880	5925 to 6425	Pass
						-30	120	5954.960	5925 to 6425	Pass
						-20	120	5955.020	5925 to 6425	Pass
						-10	120	5954.980	5925 to 6425	Pass
						0	120	5954.960	5925 to 6425	Pass
						10	120	5954.940	5925 to 6425	Pass
						30	120	5955.000	5925 to 6425	Pass
						40	120	5955.000	5925 to 6425	Pass
						50	120	5955.000	5925 to 6425	Pass
			6175	SU	/	20	102	6174.940	5925 to 6425	Pass
							120	6174.980	5925 to 6425	Pass
							138	6175.000	5925 to 6425	Pass
						-30	120	6175.020	5925 to 6425	Pass
						-20	120	6175.000	5925 to 6425	Pass
						-10	120	6174.960	5925 to 6425	Pass
						0	120	6174.940	5925 to 6425	Pass
						10	120	6174.940	5925 to 6425	Pass
						30	120	6174.960	5925 to 6425	Pass
						40	120	6174.980	5925 to 6425	Pass
						50	120	6175.000	5925 to 6425	Pass
			6415	SU	/	20	102	6414.940	5925 to 6425	Pass
							120	6414.880	5925 to 6425	Pass
							138	6415.040	5925 to 6425	Pass
						-30	120	6414.960	5925 to 6425	Pass
						-20	120	6415.060	5925 to 6425	Pass
						-10	120	6414.940	5925 to 6425	Pass
						0	120	6414.960	5925 to 6425	Pass
						10	120	6414.900	5925 to 6425	Pass
						30	120	6414.980	5925 to 6425	Pass
						40	120	6414.980	5925 to 6425	Pass
						50	120	6414.960	5925 to 6425	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	20	102	5965.000	5925 to 6425	Pass
							120	5965.000	5925 to 6425	Pass
							138	5964.960	5925 to 6425	Pass
						-30	120	5964.960	5925 to 6425	Pass
						-20	120	5964.960	5925 to 6425	Pass
						-10	120	5965.000	5925 to 6425	Pass
						0	120	5964.960	5925 to 6425	Pass
						10	120	5964.960	5925 to 6425	Pass
						30	120	5965.000	5925 to 6425	Pass
						40	120	5964.960	5925 to 6425	Pass
						50	120	5964.960	5925 to 6425	Pass
			6165	SU	/	20	102	6165.000	5925 to 6425	Pass
							120	6164.920	5925 to 6425	Pass
							138	6165.000	5925 to 6425	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 175 of 341

						-30	120	6164.920	5925 to 6425	Pass
						-20	120	6164.960	5925 to 6425	Pass
						-10	120	6165.040	5925 to 6425	Pass
						0	120	6165.000	5925 to 6425	Pass
						10	120	6165.000	5925 to 6425	Pass
						30	120	6165.000	5925 to 6425	Pass
						40	120	6164.960	5925 to 6425	Pass
						50	120	6164.960	5925 to 6425	Pass
			6405	SU	/	20	102	6404.960	5925 to 6425	Pass
							120	6405.000	5925 to 6425	Pass
							138	6405.000	5925 to 6425	Pass
						-30	120	6405.000	5925 to 6425	Pass
						-20	120	6405.000	5925 to 6425	Pass
						-10	120	6405.000	5925 to 6425	Pass
						0	120	6404.920	5925 to 6425	Pass
						10	120	6404.960	5925 to 6425	Pass
						30	120	6404.960	5925 to 6425	Pass
						40	120	6404.960	5925 to 6425	Pass
						50	120	6405.000	5925 to 6425	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	20	102	5985.075	5925 to 6425	Pass
							120	5985.000	5925 to 6425	Pass
							138	5985.000	5925 to 6425	Pass
						-30	120	5985.000	5925 to 6425	Pass
						-20	120	5985.075	5925 to 6425	Pass
						-10	120	5985.075	5925 to 6425	Pass
						0	120	5985.000	5925 to 6425	Pass
						10	120	5985.000	5925 to 6425	Pass
						30	120	5985.000	5925 to 6425	Pass
						40	120	5985.150	5925 to 6425	Pass
						50	120	5985.000	5925 to 6425	Pass
			6145	SU	/	20	102	6145.000	5925 to 6425	Pass
							120	6145.000	5925 to 6425	Pass
							138	6145.000	5925 to 6425	Pass
						-30	120	6145.000	5925 to 6425	Pass
						-20	120	6145.000	5925 to 6425	Pass
						-10	120	6145.000	5925 to 6425	Pass
						0	120	6145.000	5925 to 6425	Pass
						10	120	6144.925	5925 to 6425	Pass
						30	120	6145.000	5925 to 6425	Pass
						40	120	6145.000	5925 to 6425	Pass
						50	120	6145.000	5925 to 6425	Pass
			6385	SU	/	20	102	6384.925	5925 to 6425	Pass
							120	6385.150	5925 to 6425	Pass
							138	6385.000	5925 to 6425	Pass
						-30	120	6385.000	5925 to 6425	Pass
						-20	120	6385.000	5925 to 6425	Pass
						-10	120	6385.075	5925 to 6425	Pass
						0	120	6385.075	5925 to 6425	Pass
						10	120	6385.000	5925 to 6425	Pass
						30	120	6385.150	5925 to 6425	Pass
						40	120	6385.150	5925 to 6425	Pass
						50	120	6385.000	5925 to 6425	Pass

5.1.2 ANT3

ANT3										
ENV	Mode	Tx Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 176 of 341

NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	20	102	5955.000	5925 to 6425	Pass
							120	5955.020	5925 to 6425	Pass
							138	5955.000	5925 to 6425	Pass
						-30	120	5954.920	5925 to 6425	Pass
						-20	120	5954.960	5925 to 6425	Pass
						-10	120	5954.880	5925 to 6425	Pass
						0	120	5954.960	5925 to 6425	Pass
						10	120	5954.980	5925 to 6425	Pass
						30	120	5955.000	5925 to 6425	Pass
						40	120	5954.940	5925 to 6425	Pass
						50	120	5954.980	5925 to 6425	Pass
			6175	SU	/	20	102	6174.940	5925 to 6425	Pass
							120	6175.000	5925 to 6425	Pass
							138	6174.980	5925 to 6425	Pass
						-30	120	6174.940	5925 to 6425	Pass
						-20	120	6174.940	5925 to 6425	Pass
						-10	120	6174.980	5925 to 6425	Pass
						0	120	6175.040	5925 to 6425	Pass
						10	120	6175.000	5925 to 6425	Pass
						30	120	6175.000	5925 to 6425	Pass
						40	120	6175.000	5925 to 6425	Pass
						50	120	6174.980	5925 to 6425	Pass
			6415	SU	/	20	102	6414.920	5925 to 6425	Pass
							120	6414.980	5925 to 6425	Pass
							138	6414.980	5925 to 6425	Pass
						-30	120	6414.960	5925 to 6425	Pass
						-20	120	6414.960	5925 to 6425	Pass
						-10	120	6414.980	5925 to 6425	Pass
						0	120	6415.040	5925 to 6425	Pass
						10	120	6414.940	5925 to 6425	Pass
						30	120	6415.000	5925 to 6425	Pass
						40	120	6414.980	5925 to 6425	Pass
						50	120	6414.900	5925 to 6425	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	20	102	5964.960	5925 to 6425	Pass
							120	5965.000	5925 to 6425	Pass
							138	5964.960	5925 to 6425	Pass
						-30	120	5964.960	5925 to 6425	Pass
						-20	120	5965.000	5925 to 6425	Pass
						-10	120	5964.920	5925 to 6425	Pass
						0	120	5964.960	5925 to 6425	Pass
						10	120	5965.000	5925 to 6425	Pass
						30	120	5965.000	5925 to 6425	Pass
						40	120	5965.000	5925 to 6425	Pass
						50	120	5964.960	5925 to 6425	Pass
			6165	SU	/	20	102	6165.040	5925 to 6425	Pass
							120	6165.040	5925 to 6425	Pass
							138	6165.040	5925 to 6425	Pass
						-30	120	6164.960	5925 to 6425	Pass
						-20	120	6165.000	5925 to 6425	Pass
						-10	120	6165.000	5925 to 6425	Pass
						0	120	6165.040	5925 to 6425	Pass
						10	120	6165.040	5925 to 6425	Pass
						30	120	6165.000	5925 to 6425	Pass
						40	120	6165.000	5925 to 6425	Pass
						50	120	6164.920	5925 to 6425	Pass
			6405	SU	/	20	102	6405.000	5925 to 6425	Pass
							120	6405.000	5925 to 6425	Pass
							138	6405.040	5925 to 6425	Pass
						-30	120	6405.040	5925 to 6425	Pass
						-20	120	6405.000	5925 to 6425	Pass
						-10	120	6405.000	5925 to 6425	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 177 of 341

	802.11ax (HEW80)	MIMO	5985	SU	/	0	120	6404.960	5925 to 6425	Pass
						10	120	6405.000	5925 to 6425	Pass
						30	120	6405.000	5925 to 6425	Pass
						40	120	6405.040	5925 to 6425	Pass
						50	120	6405.040	5925 to 6425	Pass
						20	102	5985.000	5925 to 6425	Pass
							120	5985.000	5925 to 6425	Pass
							138	5985.000	5925 to 6425	Pass
						-30	120	5985.000	5925 to 6425	Pass
						-20	120	5985.000	5925 to 6425	Pass
						-10	120	5984.925	5925 to 6425	Pass
			6145	SU	/	0	120	5985.000	5925 to 6425	Pass
						10	120	5985.000	5925 to 6425	Pass
						30	120	5985.000	5925 to 6425	Pass
						40	120	5985.000	5925 to 6425	Pass
						50	120	5984.850	5925 to 6425	Pass
						20	102	6145.000	5925 to 6425	Pass
							120	6145.075	5925 to 6425	Pass
							138	6145.000	5925 to 6425	Pass
						-30	120	6145.000	5925 to 6425	Pass
						-20	120	6145.000	5925 to 6425	Pass
						-10	120	6145.000	5925 to 6425	Pass
						0	120	6144.925	5925 to 6425	Pass
						10	120	6145.075	5925 to 6425	Pass
						30	120	6145.075	5925 to 6425	Pass
						40	120	6145.075	5925 to 6425	Pass
						50	120	6145.000	5925 to 6425	Pass
			6385	SU	/	20	102	6385.075	5925 to 6425	Pass
							120	6385.000	5925 to 6425	Pass
							138	6385.000	5925 to 6425	Pass
						-30	120	6385.000	5925 to 6425	Pass
						-20	120	6385.000	5925 to 6425	Pass
						-10	120	6385.075	5925 to 6425	Pass
						0	120	6385.075	5925 to 6425	Pass
						10	120	6385.000	5925 to 6425	Pass
						30	120	6385.000	5925 to 6425	Pass
						40	120	6385.000	5925 to 6425	Pass
						50	120	6385.000	5925 to 6425	Pass

5.1.3 ANT2

ANT2										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	20	102	6435.020	6425 to 6525	Pass
							120	6435.060	6425 to 6525	Pass
							138	6434.960	6425 to 6525	Pass
						-30	120	6435.000	6425 to 6525	Pass
						-20	120	6434.940	6425 to 6525	Pass
						-10	120	6434.960	6425 to 6525	Pass
						0	120	6435.040	6425 to 6525	Pass
						10	120	6434.940	6425 to 6525	Pass
						30	120	6434.960	6425 to 6525	Pass
						40	120	6434.980	6425 to 6525	Pass
						50	120	6435.040	6425 to 6525	Pass
			6475	SU	/	20	102	6475.060	6425 to 6525	Pass
							120	6474.960	6425 to 6525	Pass
							138	6475.040	6425 to 6525	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 178 of 341

	802.11ax (HEW40)					-30	120	6474.980	6425 to 6525	Pass
						-20	120	6474.940	6425 to 6525	Pass
						-10	120	6474.980	6425 to 6525	Pass
						0	120	6474.940	6425 to 6525	Pass
						10	120	6475.040	6425 to 6525	Pass
						30	120	6474.980	6425 to 6525	Pass
						40	120	6474.900	6425 to 6525	Pass
						50	120	6475.000	6425 to 6525	Pass
						20	102	6514.980	6425 to 6525	Pass
							120	6514.940	6425 to 6525	Pass
							138	6515.000	6425 to 6525	Pass
						-30	120	6514.960	6425 to 6525	Pass
						-20	120	6514.960	6425 to 6525	Pass
						-10	120	6514.940	6425 to 6525	Pass
						0	120	6514.940	6425 to 6525	Pass
						10	120	6514.960	6425 to 6525	Pass
						30	120	6514.980	6425 to 6525	Pass
						40	120	6514.940	6425 to 6525	Pass
						50	120	6514.960	6425 to 6525	Pass
	802.11ax (HEW80)	MIMO	6445	SU	/	20	102	6445.000	6425 to 6525	Pass
							120	6444.960	6425 to 6525	Pass
							138	6444.960	6425 to 6525	Pass
						-30	120	6445.000	6425 to 6525	Pass
						-20	120	6445.000	6425 to 6525	Pass
						-10	120	6444.920	6425 to 6525	Pass
						0	120	6444.920	6425 to 6525	Pass
						10	120	6445.000	6425 to 6525	Pass
						30	120	6444.960	6425 to 6525	Pass
						40	120	6444.960	6425 to 6525	Pass
						50	120	6444.960	6425 to 6525	Pass
			6485	SU	/	20	102	6484.960	6425 to 6525	Pass
							120	6485.000	6425 to 6525	Pass
							138	6485.000	6425 to 6525	Pass
						-30	120	6485.000	6425 to 6525	Pass
						-20	120	6485.000	6425 to 6525	Pass
						-10	120	6485.000	6425 to 6525	Pass
						0	120	6484.920	6425 to 6525	Pass
						10	120	6484.960	6425 to 6525	Pass
						30	120	6485.000	6425 to 6525	Pass
						40	120	6485.000	6425 to 6525	Pass
						50	120	6484.960	6425 to 6525	Pass
			6465	SU	/	20	102	6465.000	6425 to 6525	Pass
							120	6465.075	6425 to 6525	Pass
							138	6465.000	6425 to 6525	Pass
						-30	120	6465.000	6425 to 6525	Pass
						-20	120	6465.000	6425 to 6525	Pass
						-10	120	6465.075	6425 to 6525	Pass
						0	120	6465.075	6425 to 6525	Pass
						10	120	6465.000	6425 to 6525	Pass
						30	120	6465.000	6425 to 6525	Pass
						40	120	6465.075	6425 to 6525	Pass
						50	120	6465.075	6425 to 6525	Pass

5.1.4 ANT3

ANT3										
ENV	Mode	Tx Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 179 of 341

NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	20	102	6434.980	6425 to 6525	Pass
							120	6435.000	6425 to 6525	Pass
							138	6434.920	6425 to 6525	Pass
						-30	120	6434.960	6425 to 6525	Pass
						-20	120	6434.940	6425 to 6525	Pass
						-10	120	6434.980	6425 to 6525	Pass
						0	120	6435.000	6425 to 6525	Pass
						10	120	6434.960	6425 to 6525	Pass
						30	120	6434.960	6425 to 6525	Pass
						40	120	6434.980	6425 to 6525	Pass
						50	120	6434.940	6425 to 6525	Pass
			6475	SU	/	20	102	6474.960	6425 to 6525	Pass
							120	6474.940	6425 to 6525	Pass
							138	6475.000	6425 to 6525	Pass
						-30	120	6474.960	6425 to 6525	Pass
						-20	120	6474.980	6425 to 6525	Pass
						-10	120	6474.960	6425 to 6525	Pass
						0	120	6474.980	6425 to 6525	Pass
						10	120	6475.000	6425 to 6525	Pass
						30	120	6474.960	6425 to 6525	Pass
						40	120	6474.940	6425 to 6525	Pass
						50	120	6474.980	6425 to 6525	Pass
			6515	SU	/	20	102	6514.940	6425 to 6525	Pass
							120	6515.000	6425 to 6525	Pass
							138	6515.000	6425 to 6525	Pass
						-30	120	6515.020	6425 to 6525	Pass
						-20	120	6515.000	6425 to 6525	Pass
						-10	120	6514.960	6425 to 6525	Pass
						0	120	6514.960	6425 to 6525	Pass
						10	120	6514.960	6425 to 6525	Pass
						30	120	6515.000	6425 to 6525	Pass
						40	120	6515.020	6425 to 6525	Pass
						50	120	6514.980	6425 to 6525	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	20	102	6444.960	6425 to 6525	Pass
							120	6445.000	6425 to 6525	Pass
							138	6444.960	6425 to 6525	Pass
						-30	120	6445.000	6425 to 6525	Pass
						-20	120	6444.960	6425 to 6525	Pass
						-10	120	6444.960	6425 to 6525	Pass
						0	120	6444.920	6425 to 6525	Pass
						10	120	6445.000	6425 to 6525	Pass
						30	120	6444.960	6425 to 6525	Pass
						40	120	6445.000	6425 to 6525	Pass
						50	120	6445.000	6425 to 6525	Pass
			6485	SU	/	20	102	6485.000	6425 to 6525	Pass
							120	6485.000	6425 to 6525	Pass
							138	6485.000	6425 to 6525	Pass
						-30	120	6484.960	6425 to 6525	Pass
						-20	120	6484.960	6425 to 6525	Pass
						-10	120	6484.960	6425 to 6525	Pass
						0	120	6484.960	6425 to 6525	Pass
						10	120	6485.000	6425 to 6525	Pass
						30	120	6485.000	6425 to 6525	Pass
						40	120	6485.000	6425 to 6525	Pass
						50	120	6484.960	6425 to 6525	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	20	102	6464.925	6425 to 6525	Pass
							120	6465.000	6425 to 6525	Pass
							138	6464.925	6425 to 6525	Pass
						-30	120	6465.000	6425 to 6525	Pass
						-20	120	6465.000	6425 to 6525	Pass
						-10	120	6465.000	6425 to 6525	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 180 of 341

						0	120	6465.000	6425 to 6525	Pass
						10	120	6465.000	6425 to 6525	Pass
						30	120	6465.000	6425 to 6525	Pass
						40	120	6465.000	6425 to 6525	Pass
						50	120	6465.000	6425 to 6525	Pass

5.1.5 ANT2

ANT2										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	20	102	6534.920	6525 to 6875	Pass
							120	6534.960	6525 to 6875	Pass
							138	6534.980	6525 to 6875	Pass
						-30	120	6535.040	6525 to 6875	Pass
						-20	120	6534.940	6525 to 6875	Pass
						-10	120	6535.020	6525 to 6875	Pass
						0	120	6535.080	6525 to 6875	Pass
						10	120	6534.980	6525 to 6875	Pass
						30	120	6534.900	6525 to 6875	Pass
						40	120	6534.980	6525 to 6875	Pass
						50	120	6534.940	6525 to 6875	Pass
			6695	SU	/	20	102	6694.960	6525 to 6875	Pass
							120	6694.960	6525 to 6875	Pass
							138	6694.940	6525 to 6875	Pass
						-30	120	6694.980	6525 to 6875	Pass
						-20	120	6695.000	6525 to 6875	Pass
						-10	120	6694.900	6525 to 6875	Pass
						0	120	6694.920	6525 to 6875	Pass
						10	120	6695.000	6525 to 6875	Pass
						30	120	6694.940	6525 to 6875	Pass
						40	120	6694.940	6525 to 6875	Pass
						50	120	6694.940	6525 to 6875	Pass
			6855	SU	/	20	102	6854.980	6525 to 6875	Pass
							120	6854.980	6525 to 6875	Pass
							138	6855.000	6525 to 6875	Pass
						-30	120	6854.960	6525 to 6875	Pass
						-20	120	6854.940	6525 to 6875	Pass
						-10	120	6854.940	6525 to 6875	Pass
						0	120	6854.980	6525 to 6875	Pass
						10	120	6855.020	6525 to 6875	Pass
						30	120	6854.920	6525 to 6875	Pass
						40	120	6854.960	6525 to 6875	Pass
						50	120	6854.980	6525 to 6875	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	20	102	6564.960	6525 to 6875	Pass
							120	6565.000	6525 to 6875	Pass
							138	6565.000	6525 to 6875	Pass
						-30	120	6564.960	6525 to 6875	Pass
						-20	120	6564.920	6525 to 6875	Pass
						-10	120	6565.000	6525 to 6875	Pass
						0	120	6564.960	6525 to 6875	Pass
						10	120	6564.960	6525 to 6875	Pass
						30	120	6565.000	6525 to 6875	Pass
						40	120	6564.960	6525 to 6875	Pass
						50	120	6564.960	6525 to 6875	Pass
			6685	SU	/	20	102	6685.000	6525 to 6875	Pass
							120	6684.960	6525 to 6875	Pass
							138	6684.960	6525 to 6875	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 181 of 341

						-30	120	6685.000	6525 to 6875	Pass
						-20	120	6684.960	6525 to 6875	Pass
						-10	120	6685.000	6525 to 6875	Pass
						0	120	6685.040	6525 to 6875	Pass
						10	120	6684.920	6525 to 6875	Pass
						30	120	6684.960	6525 to 6875	Pass
						40	120	6685.000	6525 to 6875	Pass
						50	120	6685.000	6525 to 6875	Pass
			6845	SU	/	20	102	6844.960	6525 to 6875	Pass
							120	6844.920	6525 to 6875	Pass
							138	6845.000	6525 to 6875	Pass
						-30	120	6844.960	6525 to 6875	Pass
						-20	120	6845.000	6525 to 6875	Pass
						-10	120	6845.000	6525 to 6875	Pass
						0	120	6844.960	6525 to 6875	Pass
						10	120	6844.960	6525 to 6875	Pass
						30	120	6844.960	6525 to 6875	Pass
						40	120	6844.960	6525 to 6875	Pass
						50	120	6844.960	6525 to 6875	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	20	102	6625.000	6525 to 6875	Pass
							120	6625.075	6525 to 6875	Pass
							138	6625.000	6525 to 6875	Pass
						-30	120	6625.000	6525 to 6875	Pass
						-20	120	6625.000	6525 to 6875	Pass
						-10	120	6625.000	6525 to 6875	Pass
						0	120	6625.000	6525 to 6875	Pass
						10	120	6625.000	6525 to 6875	Pass
						30	120	6625.000	6525 to 6875	Pass
						40	120	6625.075	6525 to 6875	Pass
						50	120	6625.000	6525 to 6875	Pass
			6705	SU	/	20	102	6705.000	6525 to 6875	Pass
							120	6705.000	6525 to 6875	Pass
							138	6705.000	6525 to 6875	Pass
						-30	120	6705.000	6525 to 6875	Pass
						-20	120	6705.000	6525 to 6875	Pass
						-10	120	6705.000	6525 to 6875	Pass
						0	120	6704.925	6525 to 6875	Pass
						10	120	6705.000	6525 to 6875	Pass
						30	120	6705.000	6525 to 6875	Pass
						40	120	6705.000	6525 to 6875	Pass
						50	120	6705.000	6525 to 6875	Pass
			6785	SU	/	20	102	6785.000	6525 to 6875	Pass
							120	6785.000	6525 to 6875	Pass
							138	6785.000	6525 to 6875	Pass
						-30	120	6785.000	6525 to 6875	Pass
						-20	120	6785.075	6525 to 6875	Pass
						-10	120	6785.000	6525 to 6875	Pass
						0	120	6785.000	6525 to 6875	Pass
						10	120	6785.075	6525 to 6875	Pass
						30	120	6785.000	6525 to 6875	Pass
						40	120	6785.000	6525 to 6875	Pass
						50	120	6785.000	6525 to 6875	Pass

5.1.6 ANT3

ANT3										
ENV	Mode	Tx Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 182 of 341

NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	20	102	6534.960	6525 to 6875	Pass
							120	6535.020	6525 to 6875	Pass
							138	6534.900	6525 to 6875	Pass
						-30	120	6534.980	6525 to 6875	Pass
						-20	120	6534.980	6525 to 6875	Pass
						-10	120	6534.960	6525 to 6875	Pass
						0	120	6534.960	6525 to 6875	Pass
						10	120	6534.960	6525 to 6875	Pass
						30	120	6534.980	6525 to 6875	Pass
						40	120	6534.980	6525 to 6875	Pass
			50	120	6534.940	6525 to 6875	Pass			
			6695	SU	/	20	102	6695.000	6525 to 6875	Pass
							120	6694.980	6525 to 6875	Pass
							138	6694.980	6525 to 6875	Pass
						-30	120	6694.960	6525 to 6875	Pass
						-20	120	6694.980	6525 to 6875	Pass
						-10	120	6694.940	6525 to 6875	Pass
						0	120	6694.940	6525 to 6875	Pass
						10	120	6694.920	6525 to 6875	Pass
						30	120	6694.980	6525 to 6875	Pass
						40	120	6694.960	6525 to 6875	Pass
			50	120	6694.940	6525 to 6875	Pass			
			6855	SU	/	20	102	6854.980	6525 to 6875	Pass
							120	6855.000	6525 to 6875	Pass
							138	6855.000	6525 to 6875	Pass
						-30	120	6854.960	6525 to 6875	Pass
						-20	120	6854.960	6525 to 6875	Pass
						-10	120	6855.000	6525 to 6875	Pass
						0	120	6854.980	6525 to 6875	Pass
						10	120	6854.940	6525 to 6875	Pass
	30	120				6855.020	6525 to 6875	Pass		
	40	120				6854.940	6525 to 6875	Pass		
	50	120	6854.980	6525 to 6875	Pass					
	802.11ax (HEW40)	MIMO	6565	SU	/	20	102	6565.040	6525 to 6875	Pass
							120	6564.960	6525 to 6875	Pass
							138	6565.000	6525 to 6875	Pass
						-30	120	6565.000	6525 to 6875	Pass
						-20	120	6565.040	6525 to 6875	Pass
						-10	120	6565.040	6525 to 6875	Pass
						0	120	6565.000	6525 to 6875	Pass
						10	120	6565.000	6525 to 6875	Pass
						30	120	6565.000	6525 to 6875	Pass
						40	120	6565.000	6525 to 6875	Pass
			50	120	6565.000	6525 to 6875	Pass			
			6685	SU	/	20	102	6685.000	6525 to 6875	Pass
							120	6685.000	6525 to 6875	Pass
							138	6685.000	6525 to 6875	Pass
						-30	120	6684.960	6525 to 6875	Pass
						-20	120	6685.000	6525 to 6875	Pass
						-10	120	6685.000	6525 to 6875	Pass
0						120	6685.000	6525 to 6875	Pass	
10						120	6685.000	6525 to 6875	Pass	
30						120	6684.960	6525 to 6875	Pass	
40	120					6685.000	6525 to 6875	Pass		
50	120		6685.000	6525 to 6875	Pass					
6845	SU		/	20	102	6844.960	6525 to 6875	Pass		
					120	6845.000	6525 to 6875	Pass		
					138	6845.000	6525 to 6875	Pass		
				-30	120	6845.040	6525 to 6875	Pass		
				-20	120	6845.000	6525 to 6875	Pass		
				-10	120	6844.960	6525 to 6875	Pass		



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 183 of 341

	802.11ax (HEW80)	MIMO	6625	SU	/	0	120	6845.000	6525 to 6875	Pass
						10	120	6845.000	6525 to 6875	Pass
						30	120	6845.040	6525 to 6875	Pass
						40	120	6844.960	6525 to 6875	Pass
						50	120	6845.000	6525 to 6875	Pass
						20	102	6625.000	6525 to 6875	Pass
							120	6625.000	6525 to 6875	Pass
							138	6625.075	6525 to 6875	Pass
						-30	120	6625.000	6525 to 6875	Pass
						-20	120	6625.000	6525 to 6875	Pass
						-10	120	6625.075	6525 to 6875	Pass
			6705	SU	/	0	120	6625.075	6525 to 6875	Pass
						10	120	6625.000	6525 to 6875	Pass
						30	120	6625.000	6525 to 6875	Pass
						40	120	6625.000	6525 to 6875	Pass
						50	120	6625.000	6525 to 6875	Pass
						20	102	6705.000	6525 to 6875	Pass
							120	6705.075	6525 to 6875	Pass
							138	6705.000	6525 to 6875	Pass
						-30	120	6704.925	6525 to 6875	Pass
						-20	120	6705.000	6525 to 6875	Pass
						-10	120	6705.000	6525 to 6875	Pass
						0	120	6705.000	6525 to 6875	Pass
						10	120	6705.000	6525 to 6875	Pass
						30	120	6705.000	6525 to 6875	Pass
						40	120	6705.000	6525 to 6875	Pass
						50	120	6705.000	6525 to 6875	Pass
			6785	SU	/	20	102	6785.000	6525 to 6875	Pass
							120	6785.000	6525 to 6875	Pass
							138	6784.925	6525 to 6875	Pass
						-30	120	6784.925	6525 to 6875	Pass
						-20	120	6785.000	6525 to 6875	Pass
						-10	120	6785.000	6525 to 6875	Pass
						0	120	6785.075	6525 to 6875	Pass
						10	120	6785.000	6525 to 6875	Pass
						30	120	6785.000	6525 to 6875	Pass
						40	120	6785.000	6525 to 6875	Pass
						50	120	6785.000	6525 to 6875	Pass

5.1.7 ANT2

ANT2										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	20	102	6894.980	6875 to 7125	Pass
							120	6895.000	6875 to 7125	Pass
							138	6894.920	6875 to 7125	Pass
						-30	120	6894.940	6875 to 7125	Pass
						-20	120	6894.960	6875 to 7125	Pass
						-10	120	6895.000	6875 to 7125	Pass
						0	120	6895.000	6875 to 7125	Pass
						10	120	6894.900	6875 to 7125	Pass
						30	120	6894.960	6875 to 7125	Pass
						40	120	6894.880	6875 to 7125	Pass
						50	120	6894.940	6875 to 7125	Pass
			6995	SU	/	20	102	6994.980	6875 to 7125	Pass
							120	6994.960	6875 to 7125	Pass
							138	6994.980	6875 to 7125	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 184 of 341

						-30	120	6994.980	6875 to 7125	Pass
						-20	120	6994.940	6875 to 7125	Pass
						-10	120	6995.000	6875 to 7125	Pass
						0	120	6994.940	6875 to 7125	Pass
						10	120	6994.940	6875 to 7125	Pass
						30	120	6994.960	6875 to 7125	Pass
						40	120	6994.880	6875 to 7125	Pass
						50	120	6994.940	6875 to 7125	Pass
			7115	SU	/	20	102	7114.980	6875 to 7125	Pass
							120	7115.000	6875 to 7125	Pass
							138	7114.920	6875 to 7125	Pass
						-30	120	7114.960	6875 to 7125	Pass
						-20	120	7114.980	6875 to 7125	Pass
						-10	120	7114.900	6875 to 7125	Pass
						0	120	7114.960	6875 to 7125	Pass
						10	120	7114.940	6875 to 7125	Pass
						30	120	7114.960	6875 to 7125	Pass
						40	120	7115.000	6875 to 7125	Pass
						50	120	7114.960	6875 to 7125	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	20	102	6925.000	6875 to 7125	Pass
							120	6924.960	6875 to 7125	Pass
							138	6925.000	6875 to 7125	Pass
						-30	120	6924.920	6875 to 7125	Pass
						-20	120	6925.000	6875 to 7125	Pass
						-10	120	6925.000	6875 to 7125	Pass
						0	120	6925.000	6875 to 7125	Pass
						10	120	6925.000	6875 to 7125	Pass
						30	120	6924.960	6875 to 7125	Pass
						40	120	6925.000	6875 to 7125	Pass
						50	120	6924.920	6875 to 7125	Pass
			7005	SU	/	20	102	7004.920	6875 to 7125	Pass
							120	7004.960	6875 to 7125	Pass
							138	7005.000	6875 to 7125	Pass
						-30	120	7004.960	6875 to 7125	Pass
						-20	120	7005.000	6875 to 7125	Pass
						-10	120	7004.920	6875 to 7125	Pass
						0	120	7004.960	6875 to 7125	Pass
						10	120	7004.960	6875 to 7125	Pass
						30	120	7004.920	6875 to 7125	Pass
						40	120	7005.000	6875 to 7125	Pass
						50	120	7004.960	6875 to 7125	Pass
			7085	SU	/	20	102	7084.960	6875 to 7125	Pass
							120	7084.960	6875 to 7125	Pass
							138	7084.960	6875 to 7125	Pass
						-30	120	7084.960	6875 to 7125	Pass
						-20	120	7084.960	6875 to 7125	Pass
						-10	120	7085.000	6875 to 7125	Pass
						0	120	7085.000	6875 to 7125	Pass
						10	120	7085.000	6875 to 7125	Pass
						30	120	7084.960	6875 to 7125	Pass
						40	120	7084.960	6875 to 7125	Pass
						50	120	7085.000	6875 to 7125	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	20	102	6945.000	6875 to 7125	Pass
							120	6945.000	6875 to 7125	Pass
							138	6945.000	6875 to 7125	Pass
						-30	120	6945.000	6875 to 7125	Pass
						-20	120	6945.000	6875 to 7125	Pass
						-10	120	6944.925	6875 to 7125	Pass
						0	120	6945.000	6875 to 7125	Pass
						10	120	6944.925	6875 to 7125	Pass
						30	120	6945.075	6875 to 7125	Pass

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 185 of 341

						40	120	6945.075	6875 to 7125	Pass
						50	120	6945.075	6875 to 7125	Pass
			7025	SU	/	20	102	7025.000	6875 to 7125	Pass
							120	7025.000	6875 to 7125	Pass
							138	7025.075	6875 to 7125	Pass
						-30	120	7025.000	6875 to 7125	Pass
						-20	120	7024.925	6875 to 7125	Pass
						-10	120	7025.000	6875 to 7125	Pass
						0	120	7025.000	6875 to 7125	Pass
						10	120	7025.000	6875 to 7125	Pass
						30	120	7025.000	6875 to 7125	Pass
						40	120	7025.225	6875 to 7125	Pass
						50	120	7025.000	6875 to 7125	Pass

5.1.8 ANT3

ANT3										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	20	102	6895.000	6875 to 7125	Pass
							120	6895.000	6875 to 7125	Pass
							138	6894.960	6875 to 7125	Pass
						-30	120	6894.940	6875 to 7125	Pass
						-20	120	6894.960	6875 to 7125	Pass
						-10	120	6894.980	6875 to 7125	Pass
						0	120	6894.960	6875 to 7125	Pass
						10	120	6894.940	6875 to 7125	Pass
						30	120	6894.900	6875 to 7125	Pass
			40	120	6895.000	6875 to 7125	Pass			
			50	120	6894.980	6875 to 7125	Pass			
			6995	SU	/	20	102	6995.020	6875 to 7125	Pass
							120	6994.980	6875 to 7125	Pass
							138	6994.960	6875 to 7125	Pass
						-30	120	6994.920	6875 to 7125	Pass
						-20	120	6994.920	6875 to 7125	Pass
						-10	120	6994.880	6875 to 7125	Pass
						0	120	6994.960	6875 to 7125	Pass
						10	120	6995.000	6875 to 7125	Pass
						30	120	6994.940	6875 to 7125	Pass
			40	120	6995.000	6875 to 7125	Pass			
			50	120	6994.960	6875 to 7125	Pass			
			7115	SU	/	20	102	7115.000	6875 to 7125	Pass
							120	7115.000	6875 to 7125	Pass
							138	7114.960	6875 to 7125	Pass
						-30	120	7114.940	6875 to 7125	Pass
						-20	120	7114.900	6875 to 7125	Pass
	-10	120				7114.960	6875 to 7125	Pass		
	0	120				7115.000	6875 to 7125	Pass		
	10	120				7114.960	6875 to 7125	Pass		
30	120	7115.000				6875 to 7125	Pass			
40	120	7114.920	6875 to 7125	Pass						
50	120	7114.960	6875 to 7125	Pass						
802.11ax (HEW40)	MIMO	6925	SU	/	20	102	6924.960	6875 to 7125	Pass	
						120	6924.960	6875 to 7125	Pass	
						138	6925.000	6875 to 7125	Pass	
					-30	120	6925.000	6875 to 7125	Pass	
					-20	120	6925.000	6875 to 7125	Pass	
					-10	120	6925.000	6875 to 7125	Pass	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 186 of 341

						0	120	6925.000	6875 to 7125	Pass
						10	120	6924.960	6875 to 7125	Pass
						30	120	6925.000	6875 to 7125	Pass
						40	120	6924.960	6875 to 7125	Pass
						50	120	6925.040	6875 to 7125	Pass
			7005	SU	/	20	102	7005.000	6875 to 7125	Pass
							120	7005.000	6875 to 7125	Pass
							138	7004.960	6875 to 7125	Pass
						-30	120	7004.960	6875 to 7125	Pass
						-20	120	7004.920	6875 to 7125	Pass
						-10	120	7005.000	6875 to 7125	Pass
						0	120	7004.960	6875 to 7125	Pass
						10	120	7005.000	6875 to 7125	Pass
						30	120	7004.960	6875 to 7125	Pass
						40	120	7005.000	6875 to 7125	Pass
						50	120	7004.960	6875 to 7125	Pass
			7085	SU	/	20	102	7084.960	6875 to 7125	Pass
							120	7084.960	6875 to 7125	Pass
							138	7084.960	6875 to 7125	Pass
						-30	120	7085.000	6875 to 7125	Pass
						-20	120	7085.000	6875 to 7125	Pass
						-10	120	7085.000	6875 to 7125	Pass
						0	120	7085.000	6875 to 7125	Pass
						10	120	7085.040	6875 to 7125	Pass
						30	120	7085.000	6875 to 7125	Pass
						40	120	7084.960	6875 to 7125	Pass
						50	120	7085.000	6875 to 7125	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	20	102	6944.925	6875 to 7125	Pass
							120	6945.000	6875 to 7125	Pass
							138	6944.925	6875 to 7125	Pass
						-30	120	6944.925	6875 to 7125	Pass
						-20	120	6945.075	6875 to 7125	Pass
						-10	120	6944.925	6875 to 7125	Pass
						0	120	6945.000	6875 to 7125	Pass
						10	120	6944.925	6875 to 7125	Pass
						30	120	6944.925	6875 to 7125	Pass
						40	120	6945.000	6875 to 7125	Pass
						50	120	6944.925	6875 to 7125	Pass
			7025	SU	/	20	102	7024.925	6875 to 7125	Pass
							120	7024.925	6875 to 7125	Pass
							138	7025.000	6875 to 7125	Pass
						-30	120	7024.925	6875 to 7125	Pass
						-20	120	7024.925	6875 to 7125	Pass
						-10	120	7025.000	6875 to 7125	Pass
						0	120	7024.925	6875 to 7125	Pass
						10	120	7025.000	6875 to 7125	Pass
						30	120	7024.925	6875 to 7125	Pass
						40	120	7024.925	6875 to 7125	Pass
						50	120	7025.000	6875 to 7125	Pass

5.1.9 ANT2

ANT2										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
NTNV	802.11ax (HEW20)	MIMO	6875	SU	/	20	102	6875.020	6525 to 7125	Pass
							120	6874.960	6525 to 7125	Pass
							138	6874.920	6525 to 7125	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 187 of 341

						-30	120	6874.980	6525 to 7125	Pass
						-20	120	6874.920	6525 to 7125	Pass
						-10	120	6875.000	6525 to 7125	Pass
						0	120	6874.940	6525 to 7125	Pass
						10	120	6874.940	6525 to 7125	Pass
						30	120	6874.960	6525 to 7125	Pass
						40	120	6875.000	6525 to 7125	Pass
						50	120	6874.980	6525 to 7125	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	20	102	6884.960	6525 to 7125	Pass
							120	6885.000	6525 to 7125	Pass
							138	6885.000	6525 to 7125	Pass
						-30	120	6885.000	6525 to 7125	Pass
						-20	120	6884.960	6525 to 7125	Pass
						-10	120	6885.000	6525 to 7125	Pass
						0	120	6884.960	6525 to 7125	Pass
						10	120	6885.000	6525 to 7125	Pass
						30	120	6884.960	6525 to 7125	Pass
						40	120	6884.960	6525 to 7125	Pass
						50	120	6884.960	6525 to 7125	Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	20	102	6865.000	6525 to 7125	Pass
							120	6865.000	6525 to 7125	Pass
							138	6865.075	6525 to 7125	Pass
						-30	120	6865.075	6525 to 7125	Pass
						-20	120	6865.000	6525 to 7125	Pass
						-10	120	6865.000	6525 to 7125	Pass
						0	120	6865.000	6525 to 7125	Pass
						10	120	6865.075	6525 to 7125	Pass
						30	120	6865.075	6525 to 7125	Pass
						40	120	6865.000	6525 to 7125	Pass
						50	120	6865.000	6525 to 7125	Pass

5.1.10 ANT3

ANT3										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
NTNV	802.11ax (HEW20)	MIMO	6875	SU	/	20	102	6874.980	6525 to 7125	Pass
							120	6874.960	6525 to 7125	Pass
							138	6875.000	6525 to 7125	Pass
						-30	120	6874.980	6525 to 7125	Pass
						-20	120	6874.980	6525 to 7125	Pass
						-10	120	6875.000	6525 to 7125	Pass
						0	120	6875.020	6525 to 7125	Pass
						10	120	6874.960	6525 to 7125	Pass
						30	120	6875.000	6525 to 7125	Pass
						40	120	6875.000	6525 to 7125	Pass
						50	120	6874.940	6525 to 7125	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	20	102	6885.040	6525 to 7125	Pass
							120	6885.000	6525 to 7125	Pass
							138	6884.960	6525 to 7125	Pass
						-30	120	6885.040	6525 to 7125	Pass
						-20	120	6885.000	6525 to 7125	Pass
						-10	120	6885.000	6525 to 7125	Pass
						0	120	6885.000	6525 to 7125	Pass
						10	120	6884.960	6525 to 7125	Pass
						30	120	6885.000	6525 to 7125	Pass
						40	120	6885.040	6525 to 7125	Pass
						50	120	6885.000	6525 to 7125	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 188 of 341

	802.11ax (HEW80)	MIMO	6865	SU	/	20	102	6865.075	6525 to 7125	Pass
							120	6865.075	6525 to 7125	Pass
							138	6865.150	6525 to 7125	Pass
						-30	120	6865.075	6525 to 7125	Pass
						-20	120	6865.000	6525 to 7125	Pass
						-10	120	6865.000	6525 to 7125	Pass
						0	120	6865.000	6525 to 7125	Pass
						10	120	6865.075	6525 to 7125	Pass
						30	120	6865.000	6525 to 7125	Pass
						40	120	6865.075	6525 to 7125	Pass
						50	120	6865.150	6525 to 7125	Pass

5.1.11 ANT2

ANT2										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	20	102	6524.920	6425 to 6875	Pass
							120	6525.000	6425 to 6875	Pass
							138	6525.000	6425 to 6875	Pass
						-30	120	6524.920	6425 to 6875	Pass
						-20	120	6525.000	6425 to 6875	Pass
						-10	120	6524.960	6425 to 6875	Pass
						0	120	6524.960	6425 to 6875	Pass
						10	120	6524.960	6425 to 6875	Pass
						30	120	6525.000	6425 to 6875	Pass
	802.11ax (HEW80)	MIMO	6545	SU	/	20	102	6544.925	6425 to 6875	Pass
							120	6545.000	6425 to 6875	Pass
							138	6545.075	6425 to 6875	Pass
						-30	120	6545.000	6425 to 6875	Pass
						-20	120	6545.000	6425 to 6875	Pass
						-10	120	6545.000	6425 to 6875	Pass
						0	120	6545.000	6425 to 6875	Pass
						10	120	6545.000	6425 to 6875	Pass
						30	120	6544.925	6425 to 6875	Pass
						40	120	6545.000	6425 to 6875	Pass
						50	120	6545.000	6425 to 6875	Pass

5.1.12 ANT3

ANT3										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	20	102	6525.000	6425 to 6875	Pass
							120	6524.960	6425 to 6875	Pass
							138	6524.960	6425 to 6875	Pass
						-30	120	6524.960	6425 to 6875	Pass
						-20	120	6524.920	6425 to 6875	Pass
						-10	120	6525.000	6425 to 6875	Pass
						0	120	6525.000	6425 to 6875	Pass
						10	120	6524.960	6425 to 6875	Pass
						30	120	6524.960	6425 to 6875	Pass
						40	120	6525.000	6425 to 6875	Pass
						50	120	6524.960	6425 to 6875	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 189 of 341

802.11ax (HEW80)	MIMO	6545	SU	/	20	102	6545.000	6425 to 6875	Pass
						120	6544.925	6425 to 6875	Pass
						138	6544.925	6425 to 6875	Pass
					-30	120	6544.925	6425 to 6875	Pass
					-20	120	6544.925	6425 to 6875	Pass
					-10	120	6544.925	6425 to 6875	Pass
					0	120	6544.850	6425 to 6875	Pass
					10	120	6544.925	6425 to 6875	Pass
					30	120	6544.925	6425 to 6875	Pass
					40	120	6544.925	6425 to 6875	Pass
					50	120	6544.925	6425 to 6875	Pass

6. Emission Mask

6.1 Test Result

6.1.1 EMask

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Test Result	Limit	Verdict
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6175	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6415	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6165	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6405	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6145	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6385	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass

6.1.2 EMask

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Test Result	Limit	Verdict
NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6475	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6515	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6485	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205

Rev.: 01

Page: 190 of 341

6.1.3 EMask

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Test Result	Limit	Verdict
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6695	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6855	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6685	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6845	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6705	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6785	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass

6.1.4 EMask

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Test Result	Limit	Verdict
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			6995	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			7115	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			7005	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			7085	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
			7025	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass

6.1.5 EMask

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Test Result	Limit	Verdict
NTNV	802.11ax (HEW20)	MIMO	6875	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass

6.1.6 EMask



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007205
Rev.: 01
Page: 191 of 341

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Test Result	Limit	Verdict
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass
	802.11ax (HEW80)	MIMO	6545	SU	/	1	Refer To Test Graph		Pass
						2	Refer To Test Graph		Pass