



TEST REPORT

No.25T04N000894-006-RF GSM

for

Shanghai Sunmi Technology Co.,Ltd.

Wireless data POS System

Model Name: T5F1A

FCC ID: 2AH25T5F1A

with

Hardware Version: SM03_MB_V1.1

Software Version: QSC625VPBCJ10R01A03_BA01BP01GLM03V01

Issued Date: 2025-05-20

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04N000894-006-RF GSM	Rev.0	1st edition	2025-05-20

CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS.....	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA	4
1.6. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS	9
7. STATEMENT.....	10
8. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12
 A.1 OUTPUT POWER	12
 A.2 FIELD STRENGTH OF SPURIOUS RADIATION.....	18
 A.3 FREQUENCY STABILITY	23
 A.4 OCCUPIED BANDWIDTH.....	25
 A.5 EMISSION BANDWIDTH	38
 A.6 BAND EDGE COMPLIANCE	51
 A.7 CONDUCTED SPURIOUS EMISSION	58
 A.8 PEAK-TO-AVERAGE POWER RATIO	64
ANNEX B: ACCREDITATION CERTIFICATE	74

1. SUMMARY OF TEST REPORT

1.1. Test Items

Description	Wireless data POS System
Model Name	T5F1A
Brand Name	SUNMI
Applicant's name	Shanghai Sunmi Technology Co.,Ltd.
Manufacturer's Name	Shanghai Sunmi Technology Co.,Ltd.

1.2. Test Standards

FCC Part 2/22/24 10-1-23 Edition
ANSI C63.26 2015
KDB971168 D01 v03r01

1.3. Test Result

All test items are passed. Please refer to "6 Summary of Test Results" for detail.

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000

1.5. Project Data

Testing Start Date: 2024-11-04 Testing End Date: 2025-01-15

1.6. Signature

謝石名耽

Xie Chuhang
(Prepared this test report)

黃取次

Huang Qiuqin
(Reviewed this test report)

3m
P

Zhang Hao
(Approved this test report)

2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: Shanghai Sunmi Technology Co.,Ltd.
Address /Post: Room 505, NO.388 Song Hu Road, Yang Pu District, Shanghai 200433, China
Contact Person: Emma Yang
Contact Email: chan.yang@sunmi.com
Telephone: 13510126210
Fax: /

2.2. Manufacturer Information

Company Name: Shanghai Sunmi Technology Co.,Ltd.
Address /Post: Room 505, NO.388 Song Hu Road, Yang Pu District, Shanghai 200433, China
Contact Person: Emma Yang
Contact Email: chan.yang@sunmi.com
Telephone: 13510126210
Fax: /

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)

3.1. About EUT

Description	Wireless data POS System
Model Name	T5F1A
FCC ID	2AH25T5F1A
Frequency Bands	GSM 850/PCS 1900
Antenna	Integrated
Extreme vol. Limits	6.60V to 8.80V (nominal: 7.70V)
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of SAICT.

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
/	/	/	/	/

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	SN
AE2	Battery	---
AE1	RF cable	---

*AE ID: is used to identify the test sample in the lab internally.

AE: ancillary equipment

3.4. General Description

The Equipment Under Test (EUT) is a model T5F1A with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-23 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-23 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-23 Edition
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB971168 D01	Power Meas License Digital Systems	v03r01

5. LABORATORY ENVIRONMENT

Shielded room did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
Verdict Column	P
	F
	NA
	NM
	Pass
	Fail
	Not applicable
	Not measured

GSM850

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.5	P
6	Band Edge Compliance	2.1051/22.917	A.6	P
7	Conducted Spurious Emission	2.1051/22.917	A.7	P
8	Peak-to-Average Power Ratio	KDB971168 D01	A.8	P

PCS1900

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/KDB971168 D01	A.8	P

7. STATEMENT

The Wireless data POS System, T5F1A, Shanghai Sunmi Technology Co.,Ltd. is a variant of T5F1A for testing.

According to the declaration, reused all test data from No.24T04N002645-003-RF GSM. For detail information please check the declaration provided by the manufacturer.

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

8. TEST EQUIPMENTS UTILIZED

/

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: CFR Part 2.1046, 22.913, 24.232.

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

This result contains max output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

GSM850

	Power step	Nominal Peak output power (dBm)
GSM	5	33dBm(2W)
GPRS	3	33dBm(2W)
EGPRS	6	27dBm(0.5W)

Measurement result

GSM(GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	5	33.87
836.6	5	33.99
848.8	5	33.91

GPRS(GMSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	3	33.87
836.6	3	33.73
848.8	3	33.59

EGPRS(8PSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	6	27.59
836.6	6	27.62
848.8	6	27.52

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

PCS1900

	Power step	Nominal Peak output power (dBm)
GSM	0	30dBm(1W)
GPRS	3	30dBm(1W)
EGPRS	5	26dBm(0.4W)

Measurement result
GSM(GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	0	31.25
1880.0	0	30.82
1909.8	0	31.14

GPRS(GMSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	3	31.71
1880.0	3	30.78
1909.8	3	31.06

EGPRS(8PSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	5	27.30
1880.0	5	26.67
1909.8	5	26.86

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

A.1.3 Radiated

A.1.3.1 Description

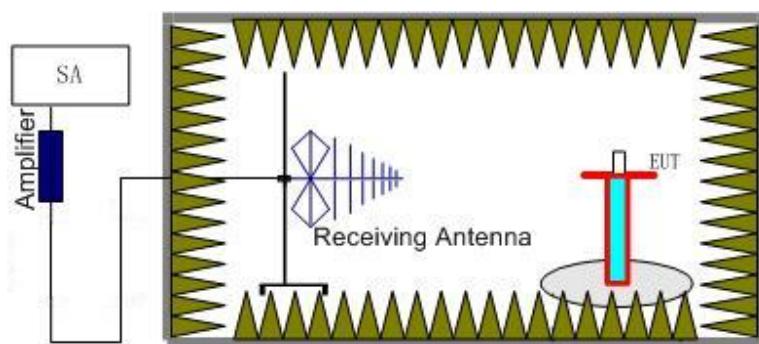
This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

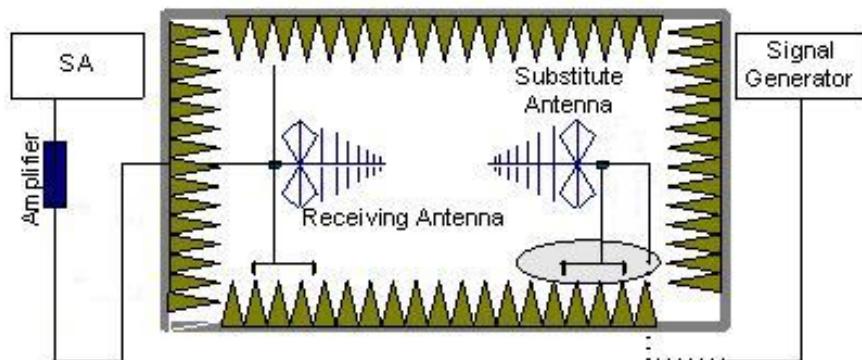
Rule Part 22.913(a) specifies " The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

A.1.3.2 Method of Measurement

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.



2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.



In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the

receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain(dBi) (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dB$.

GSM 850-ERP 22.913(a)
Limits

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EGPRS	6	≤38.45dBm (7W)

Measurement result
GSM 850

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)+P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Polarization
824.20	-3.45	-33.60	-0.79	2.15	27.21	38.45	V
836.60	-2.88	-33.50	-0.74	2.15	27.74	38.45	V
848.80	-2.81	-33.50	-0.73	2.15	27.81	38.45	V

GPRS 850

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)+P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Polarization
824.20	-5.13	-33.60	-0.79	2.15	25.53	38.45	V
836.60	-4.82	-33.50	-0.74	2.15	25.79	38.45	V
848.80	-4.67	-33.50	-0.73	2.15	25.95	38.45	V

EGPRS-8PSK 850

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)+P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Polarization
824.20	-9.48	-33.60	-0.79	2.15	21.18	38.45	V
836.60	-9.05	-33.50	-0.74	2.15	21.56	38.45	V
848.80	-8.93	-33.50	-0.73	2.15	21.69	38.45	V

Frequency: 848.80MHz

 Peak ERP(dBm)=PMea(-2.81dBm)-(Pcl+P_{Ag})(-33.50dB)+Ga(-0.73dB)-2.15dB=27.81

ANALYZER SETTINGS: RBW = VBW = 3MHz

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.87dB(30MHz-3GHz)/3.35dB(3GHz-18GHz)/2.68dB(18GHz-40GHz), k = 2

Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.

PCS1900-EIRP 24.232(c)
Limits

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)
EGPRS	5	≤33dBm (2W)

Measurement result
GSM 1900

Frequency (MHz)	Pmea (dBm)	Pcl(dB)+ PAg(dB)	Ga Antenna Gain(dBi)	EIRP (dBm)	Limit(dBm)	Polarization
1850.20	-9.45	-29.30	8.10	25.80	33.00	H
1880.00	-10.17	-29.40	8.10	25.18	33.00	H
1909.80	-9.95	-29.30	8.10	25.30	33.00	H

GPRS 1900

Frequency (MHz)	Pmea (dBm)	Pcl(dB)+ PAg(dB)	Ga Antenna Gain(dBi)	EIRP (dBm)	Limit(dBm)	Polarization
1850.20	-13.84	-29.40	8.10	21.51	33.00	H
1880.00	-14.16	-29.30	8.10	21.09	33.00	H
1909.80	-14.00	-29.30	8.10	21.25	33.00	H

EGPRS-8PSK 1900

Frequency (MHz)	Pmea (dBm)	Pcl(dB)+ PAg(dB)	Ga Antenna Gain(dBi)	EIRP (dBm)	Limit(dBm)	Polarization
1850.20	-17.94	-29.40	8.10	17.41	33.00	H
1880.00	-18.22	-29.30	8.10	17.03	33.00	H
1909.80	-18.03	-29.30	8.10	17.22	33.00	H

Frequency: 1850.20MHz

Peak EIRP(dBm)= PMea(-9.45dBm) -(Pcl+PAg)(-29.30dB)+Ga (8.10dB) =25.80dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

Note: The maximum value of expanded measurement uncertainty for this test item is

U = 2.87dB(30MHz-3GHz)/3.35dB(3GHz-18GHz)/2.68dB(18GHz-40GHz), k = 2

Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.

A.2 FIELD STRENGTH OF SPURIOUS RADIATION

Reference

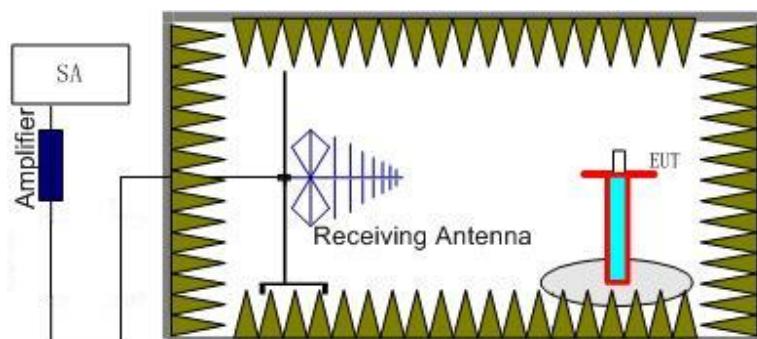
FCC: CFR 2.1053, 22.917, 24.238.

A.2.1 Measurement Method

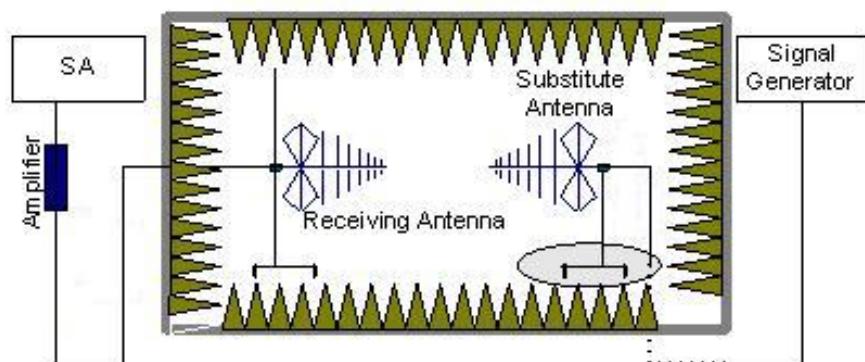
The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910MHz. The resolution bandwidth is set 1MHz as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.



2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.



In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain(dBi) (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
GSM 850MHz	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
GSM 1900MHz	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
850MHz	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
1900MHz	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

GSM Mode Channel 128/824.2MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
2473.12	-43.79	0.90	9.80	-37.04	-13.00	V
9098.50	-47.56	2.20	11.60	-40.31	-13.00	H
9223.00	-47.61	2.10	11.60	-40.26	-13.00	H
9295.00	-47.42	2.00	11.60	-39.97	-13.00	H
9422.00	-48.25	2.10	11.60	-40.90	-13.00	H
9474.50	-47.09	2.10	11.60	-39.74	-13.00	V

GSM Mode Channel 190/836.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
1673.06	-45.27	0.80	8.10	-40.12	-13.00	H
2511.19	-44.16	0.90	10.70	-36.51	-13.00	H
9099.50	-47.96	2.20	11.60	-40.71	-13.00	H
9226.50	-47.35	2.10	11.60	-40.00	-13.00	H
9299.00	-47.53	2.00	11.60	-40.08	-13.00	H
9791.00	-47.08	2.30	11.20	-40.33	-13.00	H

GSM Mode Channel 251/848.8MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
1697.44	-45.22	0.80	8.10	-40.07	-13.00	H
2546.25	-46.67	0.90	10.70	-39.02	-13.00	H
9156.00	-47.58	2.10	11.60	-40.23	-13.00	H
9224.00	-46.93	2.10	11.60	-39.58	-13.00	H
9299.50	-47.69	2.00	11.60	-40.24	-13.00	H
9715.00	-47.51	2.20	11.20	-40.66	-13.00	H

GSM Mode Channel 512/1850.2MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
16960.62	-41.61	2.90	16.50	-28.01	-13.00	H
17129.38	-40.54	2.90	14.50	-28.94	-13.00	H
17361.25	-39.56	3.20	14.50	-28.26	-13.00	H
17501.88	-37.10	2.90	12.80	-27.20	-13.00	H
17599.38	-35.58	3.30	12.80	-26.08	-13.00	H
17774.38	-36.95	3.60	12.80	-27.75	-13.00	H

GSM Mode Channel 661/1880.0MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
17004.38	-39.62	2.90	14.50	-28.02	-13.00	H
17111.25	-40.98	2.90	14.50	-29.38	-13.00	H
17229.38	-40.37	3.20	14.50	-29.07	-13.00	H
17502.50	-36.76	2.90	12.80	-26.86	-13.00	H
17578.75	-36.43	3.30	12.80	-26.93	-13.00	H
17775.00	-37.28	3.60	12.80	-28.08	-13.00	H

GSM Mode Channel 810/1909.8MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
16991.25	-41.99	2.90	16.50	-28.39	-13.00	H
17118.75	-40.84	2.90	14.50	-29.24	-13.00	H
17277.50	-40.74	3.20	14.50	-29.44	-13.00	H
17520.00	-37.52	2.90	12.80	-27.62	-13.00	H
17580.00	-36.32	3.30	12.80	-26.82	-13.00	H
17770.62	-37.38	3.60	12.80	-28.18	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

A.3 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.355, 24.235.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.3.2 Measurement results

GSM 850

Frequency Error vs Voltage

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	7.70	824.042	848.900	4.68	0.0112
50				1.36	0.0032
40				-0.03	0.0001
30				0.90	0.0022
10				5.13	0.0123
0				0.00	0.0000
-10				-1.97	0.0047
-20				-1.49	0.0036
-30					

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
6.60	20	824.042	848.900	3.04	0.0073
8.80				1.03	0.0025

Expanded measurement uncertainty is 10Hz, $k = 2$

PCS 1900

Frequency Error vs Voltage

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	7.70	1850.043	1909.900	-0.03	0.0000
50				-1.55	0.0016
40				-5.52	0.0059
30				-6.55	0.0070
10				-5.71	0.0061
0				-5.07	0.0054
-10				-8.81	0.0094
-20				-11.17	0.0119
-30					

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
6.60	20	1850.043	1909.900	-10.30	0.0110
8.80				-8.01	0.0085

Expanded measurement uncertainty is 10Hz, $k = 2$

A.4 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238.

A.4.1 Measurement Procedure

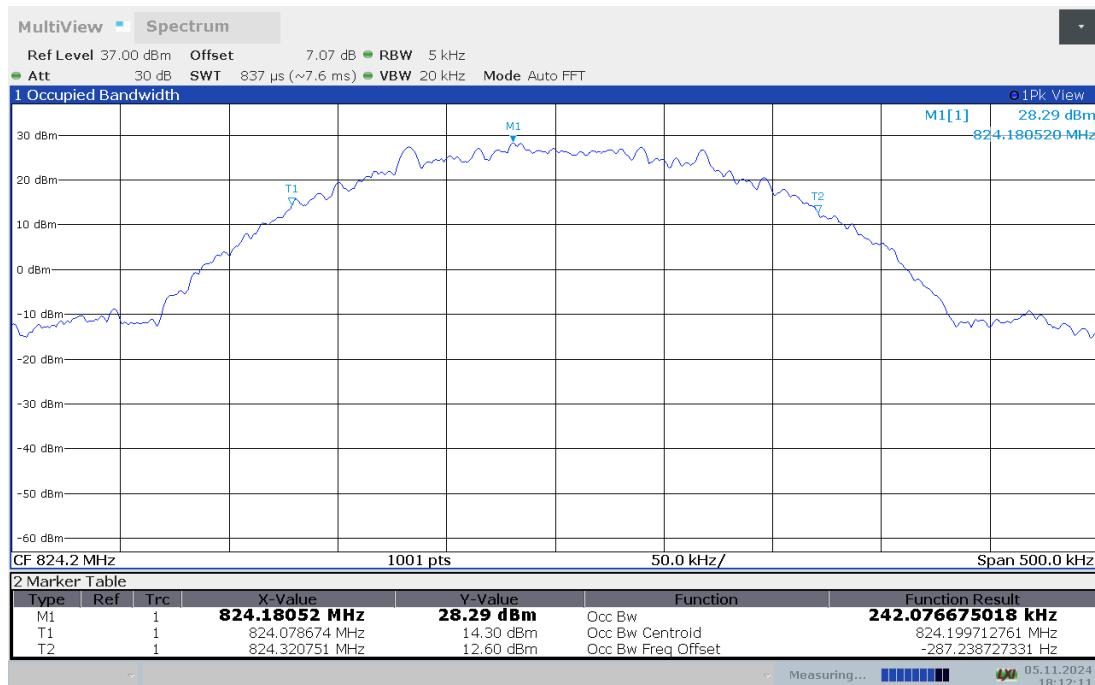
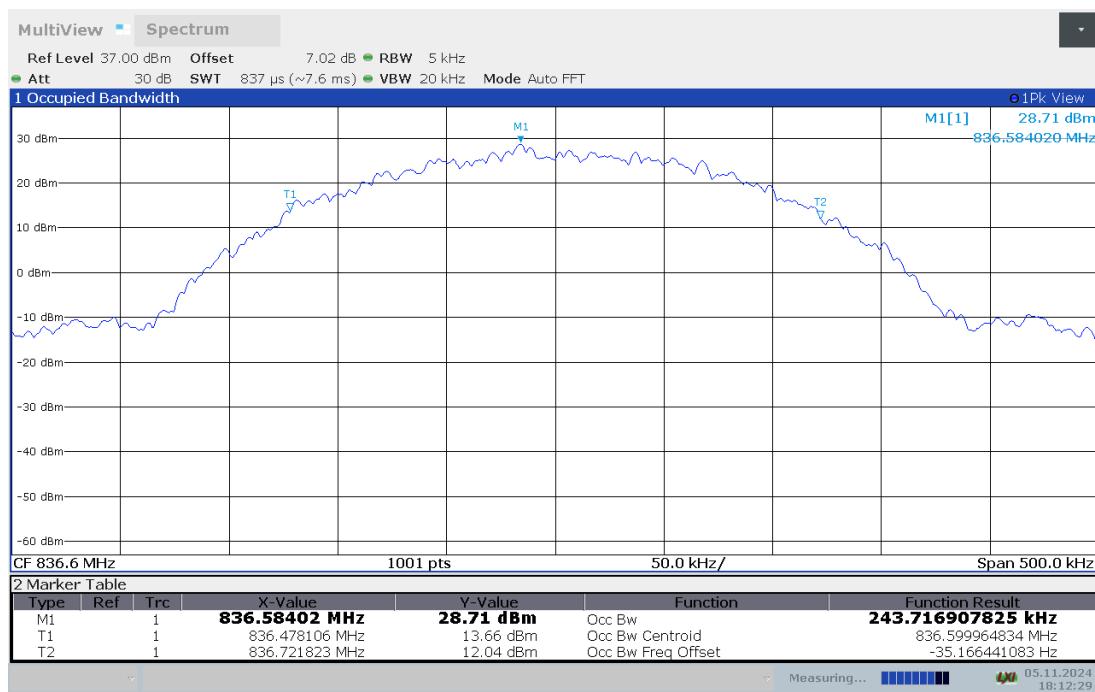
- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log (\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

A.4.2 Occupied Bandwidth Results

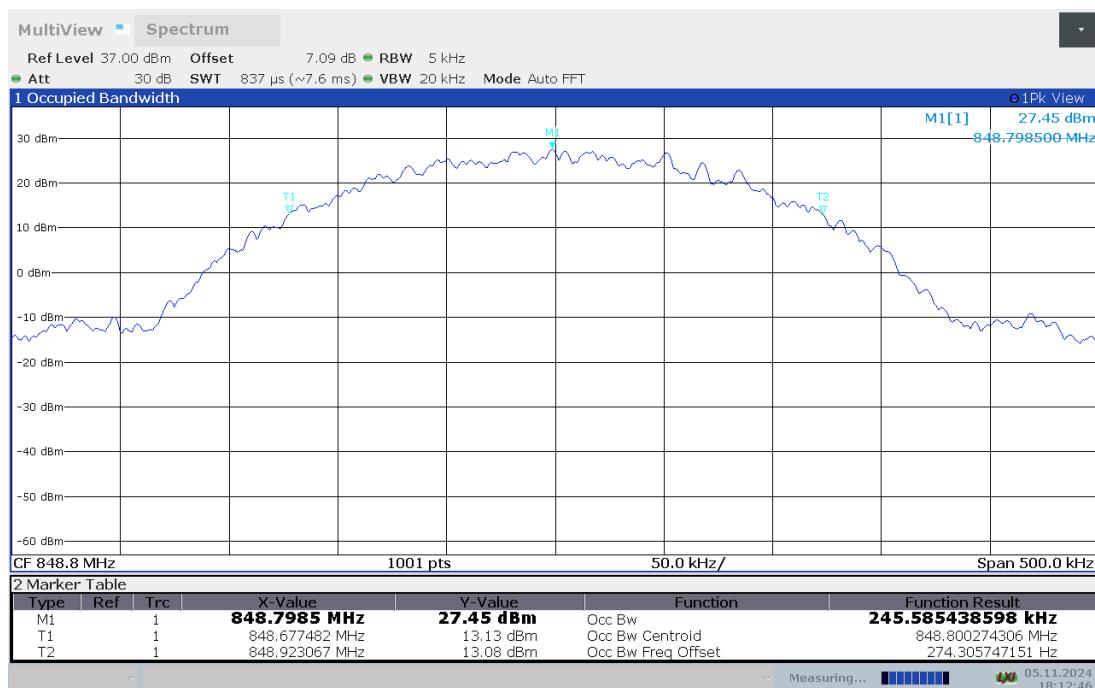
Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

GSM 850(99% BW)
GSM

Frequency (MHz)	Occupied Bandwidth (99% OBW) (kHz)
824.2	242.077
836.6	243.717
848.8	245.585

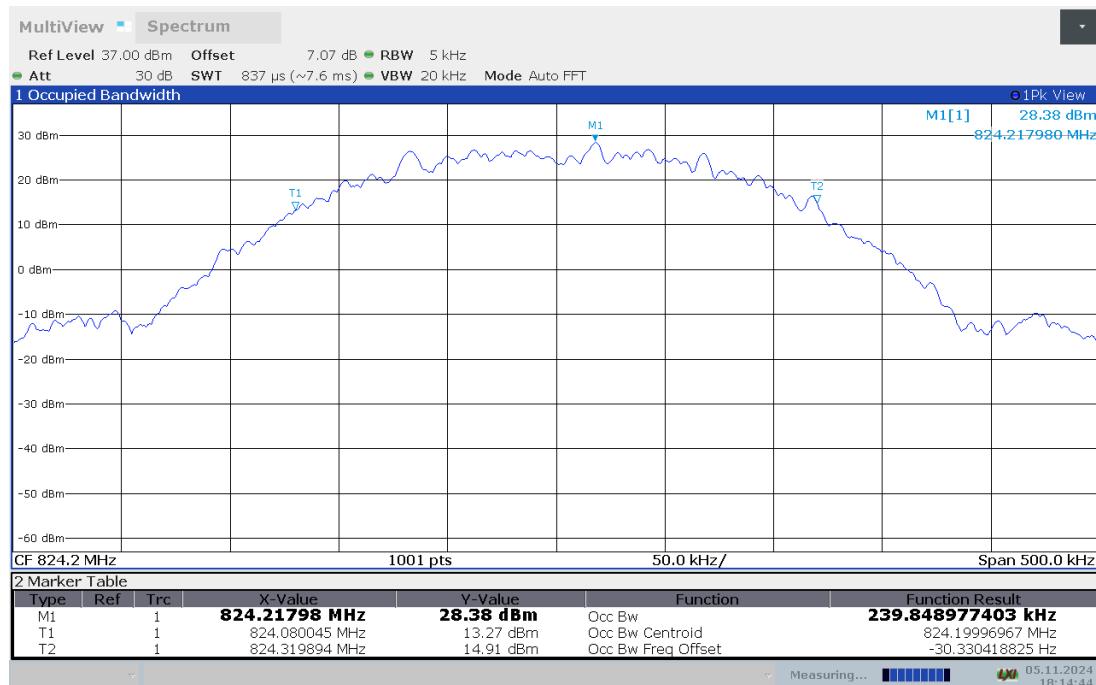
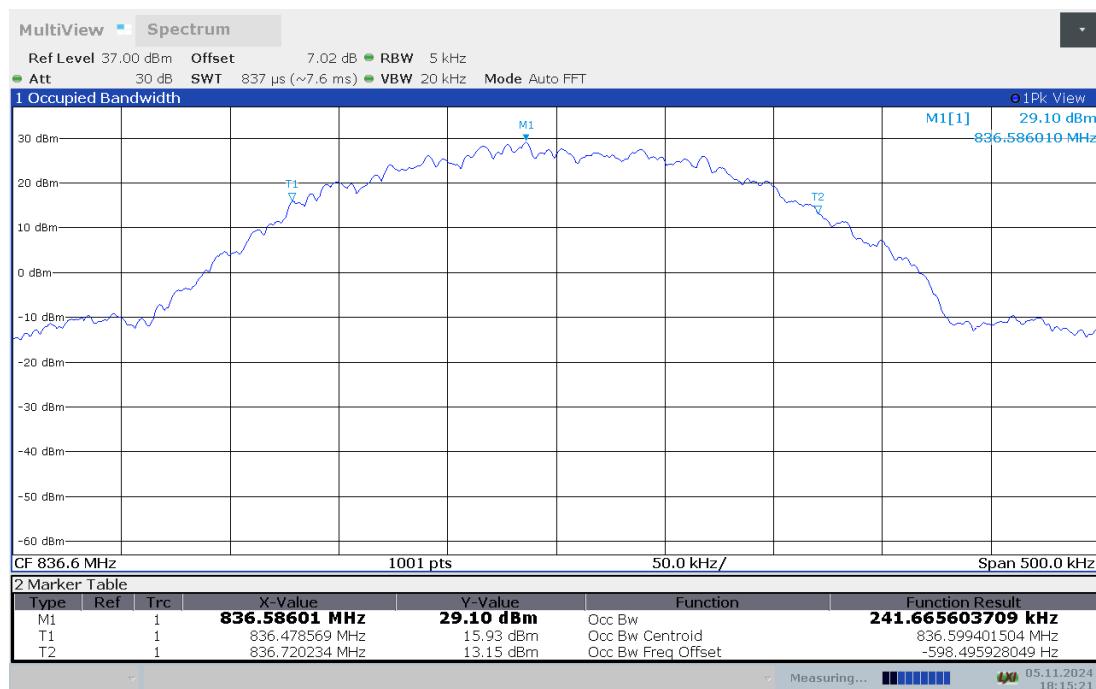
GSM850
Channel 128-Occupied Bandwidth (99% BW)

Channel 190-Occupied Bandwidth (99% BW)


Channel 251-Occupied Bandwidth (99% BW)



GSM850 (99% BW)
GPRS

Frequency (MHz)	Occupied Bandwidth (99% OBW) (kHz)
824.2	239.849
836.6	241.666
848.8	241.357

GSM850
Channel 128-Occupied Bandwidth (99% BW)

Channel 190-Occupied Bandwidth (99% BW)


Channel 251-Occupied Bandwidth (99% BW)



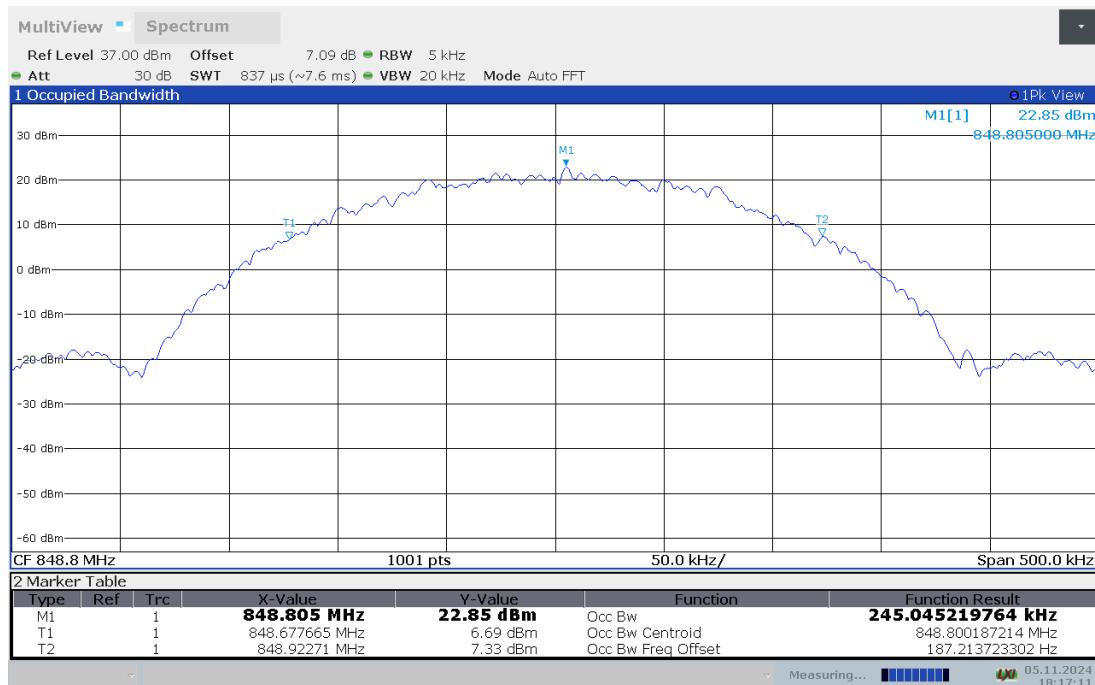
GSM850 (99% BW)
EGPRS

Frequency (MHz)	Occupied Bandwidth (99% OBW) (kHz)
824.2	245.059
836.6	247.413
848.8	245.045

GSM850
Channel 128-Occupied Bandwidth (99% BW)

Channel 190-Occupied Bandwidth (99% BW)

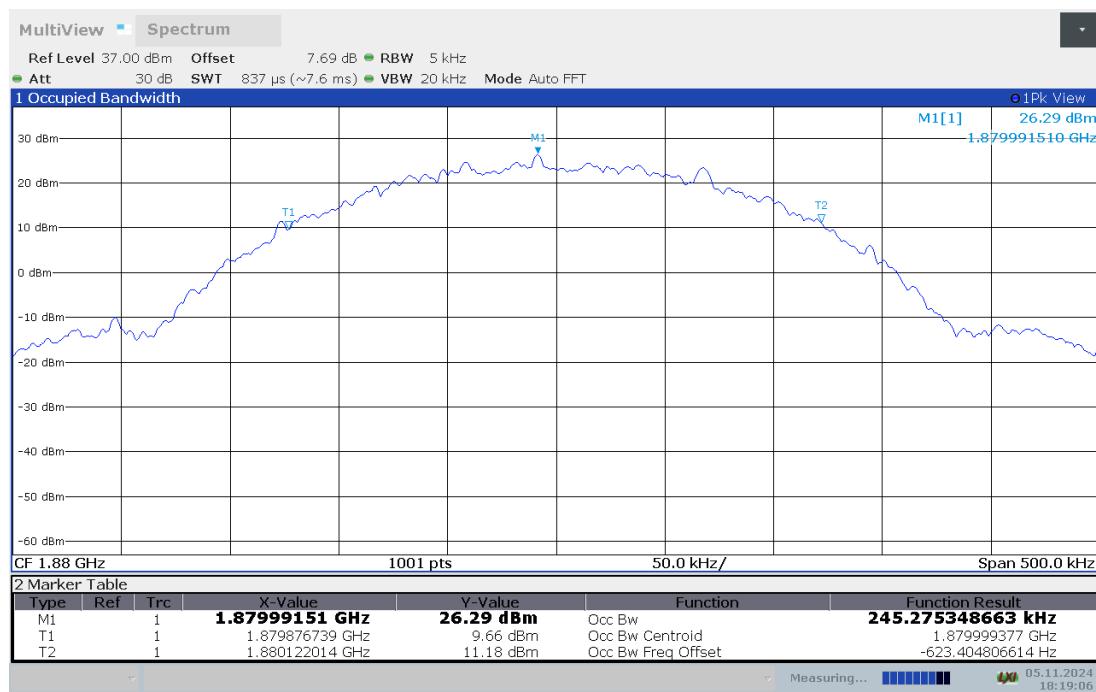

Channel 251-Occupied Bandwidth (99% BW)



PCS1900 (99% BW)
GSM

Frequency (MHz)	Occupied Bandwidth (99% OBW) (kHz)
1850.2	242.798
1880	245.275
1909.8	249.191

PCS1900
Channel 512-Occupied Bandwidth (99% BW)

Channel 661-Occupied Bandwidth (99% BW)


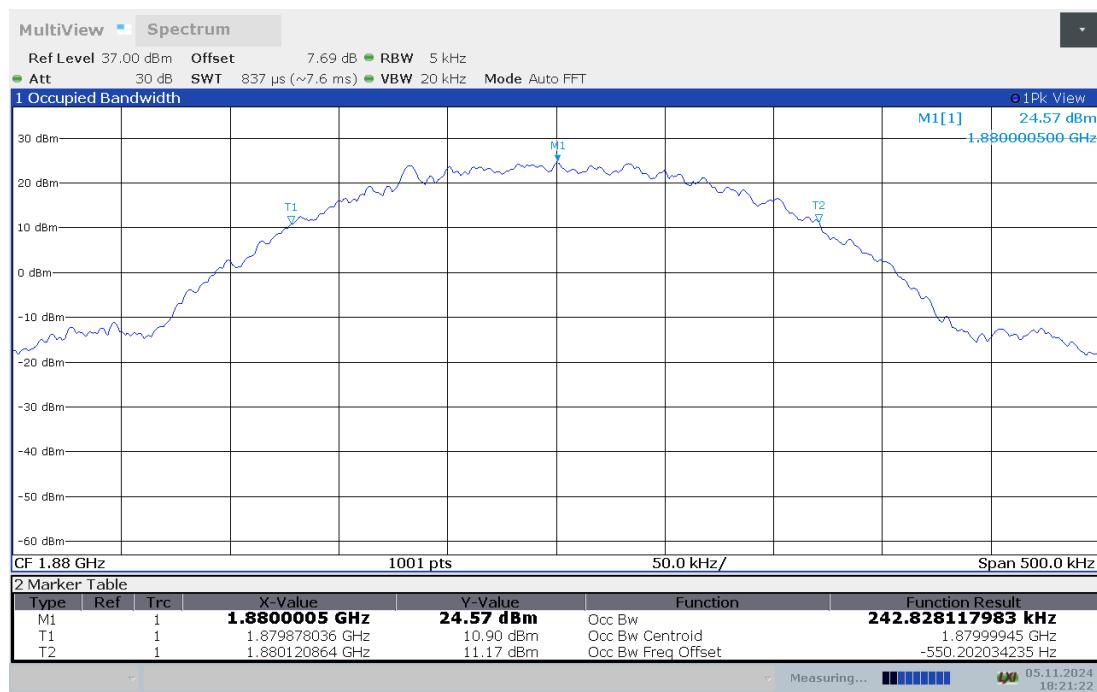
Channel 810-Occupied Bandwidth (99% BW)



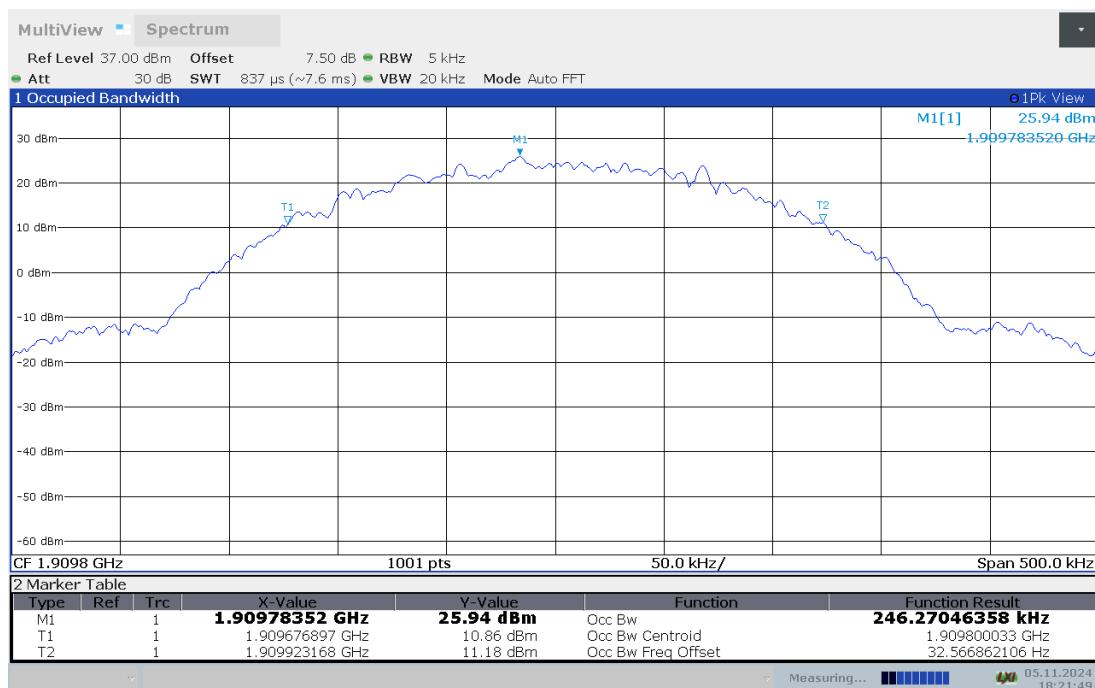
PCS1900 (99% BW)
GPRS

Frequency (MHz)	Occupied Bandwidth (99% OBW) (kHz)
1850.2	246.678
1880	242.828
1909.8	246.270

PCS1900
Channel 512-Occupied Bandwidth (99% BW)

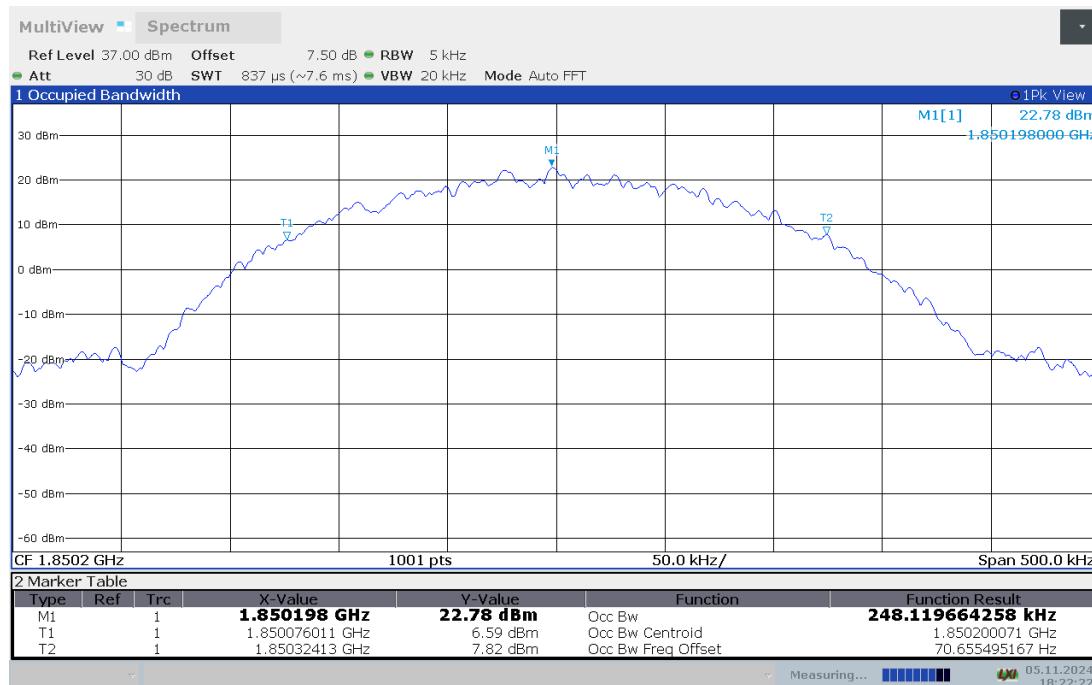
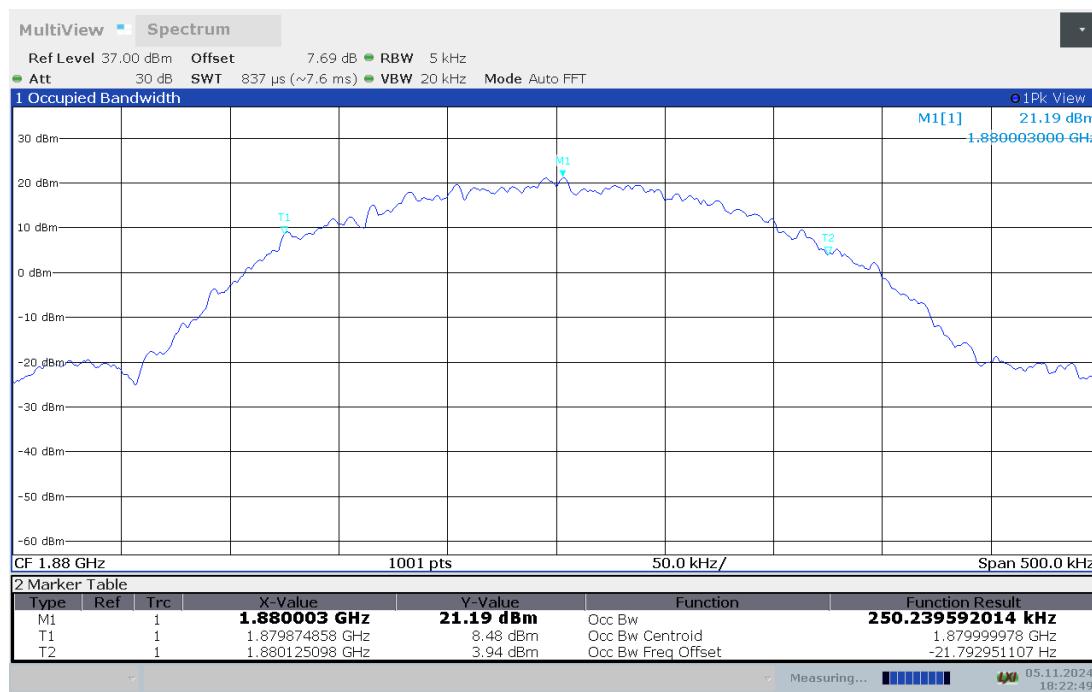
Channel 661-Occupied Bandwidth (99% BW)


Channel 810-Occupied Bandwidth (99% BW)

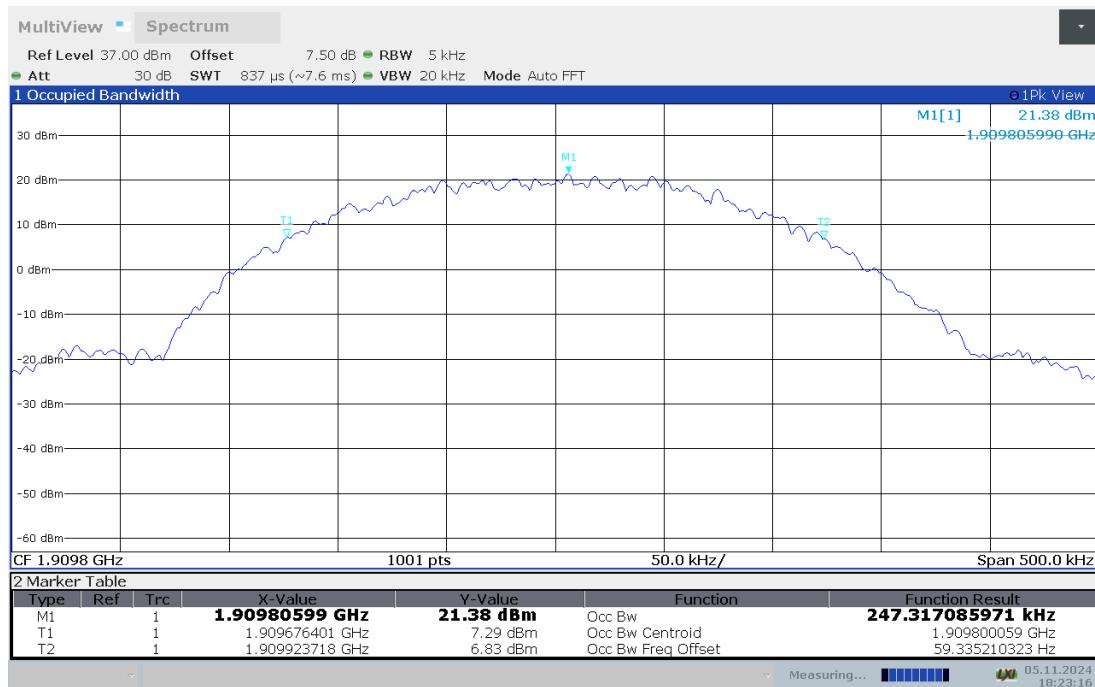


PCS1900 (99% BW)
EGPRS

Frequency (MHz)	Occupied Bandwidth (99% OBW) (kHz)
1850.2	248.120
1880	250.240
1909.8	247.317

PCS1900
Channel 512-Occupied Bandwidth (99% BW)

Channel 661-Occupied Bandwidth (99% BW)


Channel 810-Occupied Bandwidth (99% BW)



Note: Expanded measurement uncertainty is $U = 3428\text{Hz}$, $k = 2$

A.5 EMISSION BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238

A.5.1 Measurement Procedure

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 26dB bandwidth function of the spectrum analyzer and report the measured bandwidth.

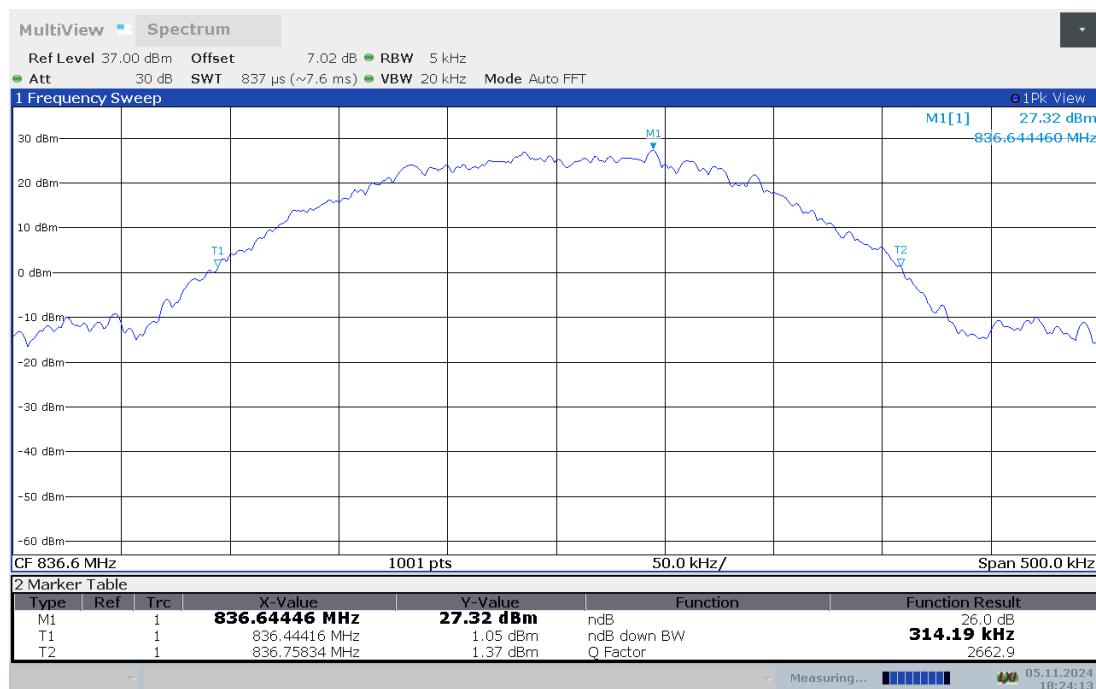
A.5.2 Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

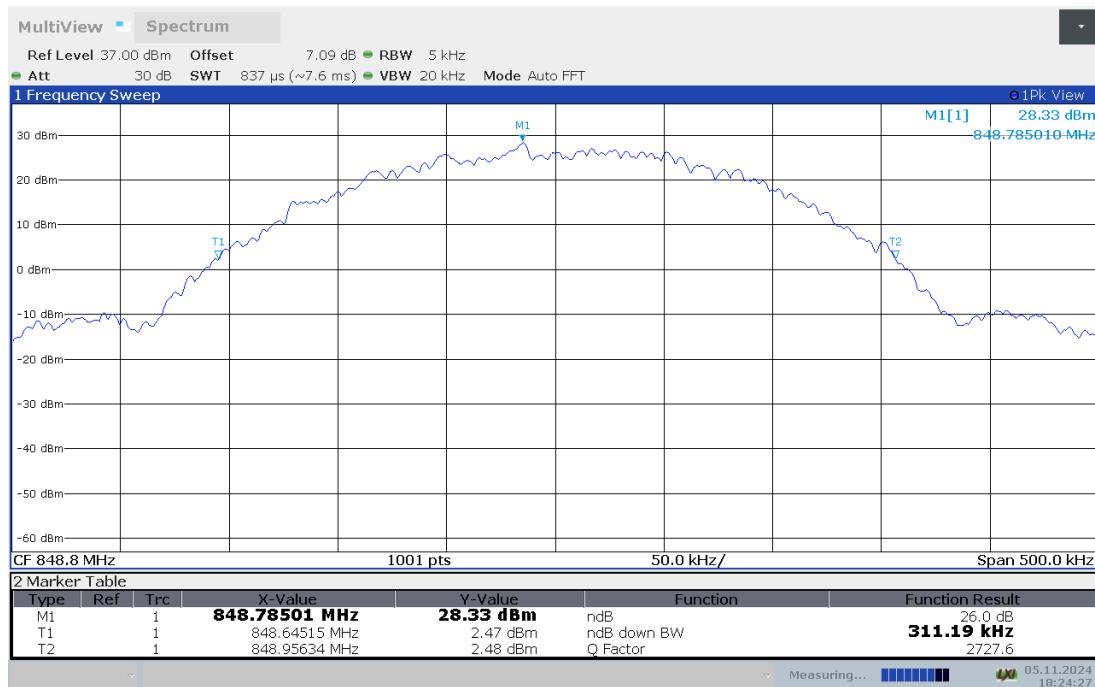
GSM 850(-26dBc BW)
GSM

Frequency (MHz)	Emission Bandwidth (-26dBc OBW)(kHz)
824.2	311.690
836.6	314.190
848.8	311.190

GSM850
Channel 128-Emission Bandwidth (-26dBc BW)

Channel 190-Emission Bandwidth (-26dBc BW)


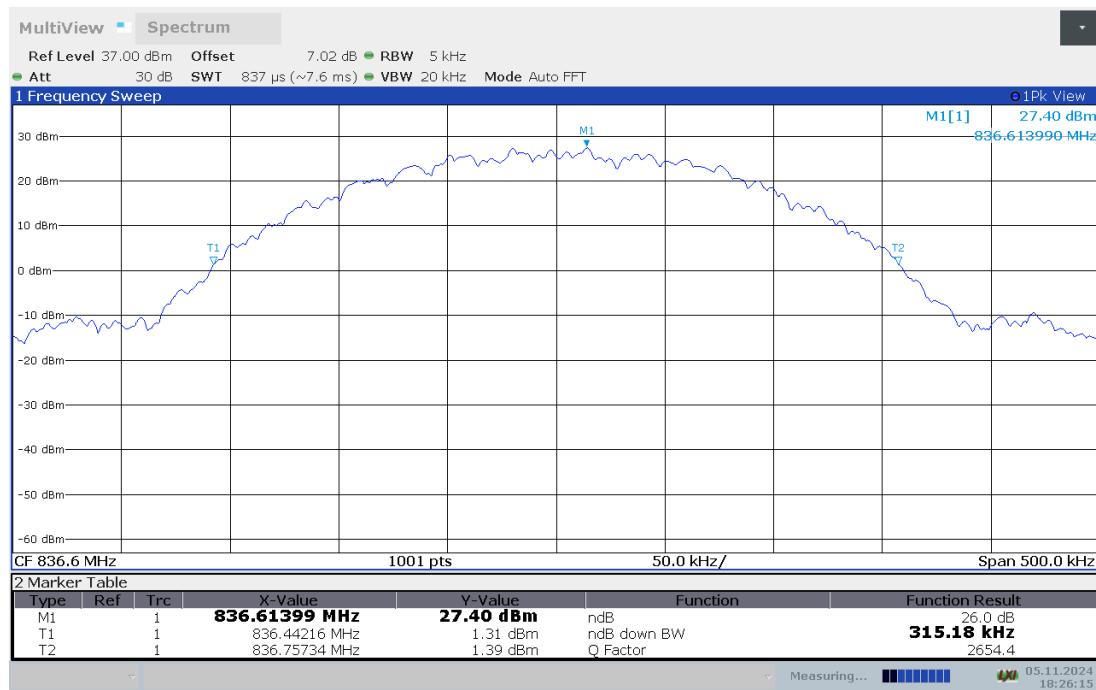
Channel 251-Emission Bandwidth (-26dBc BW)



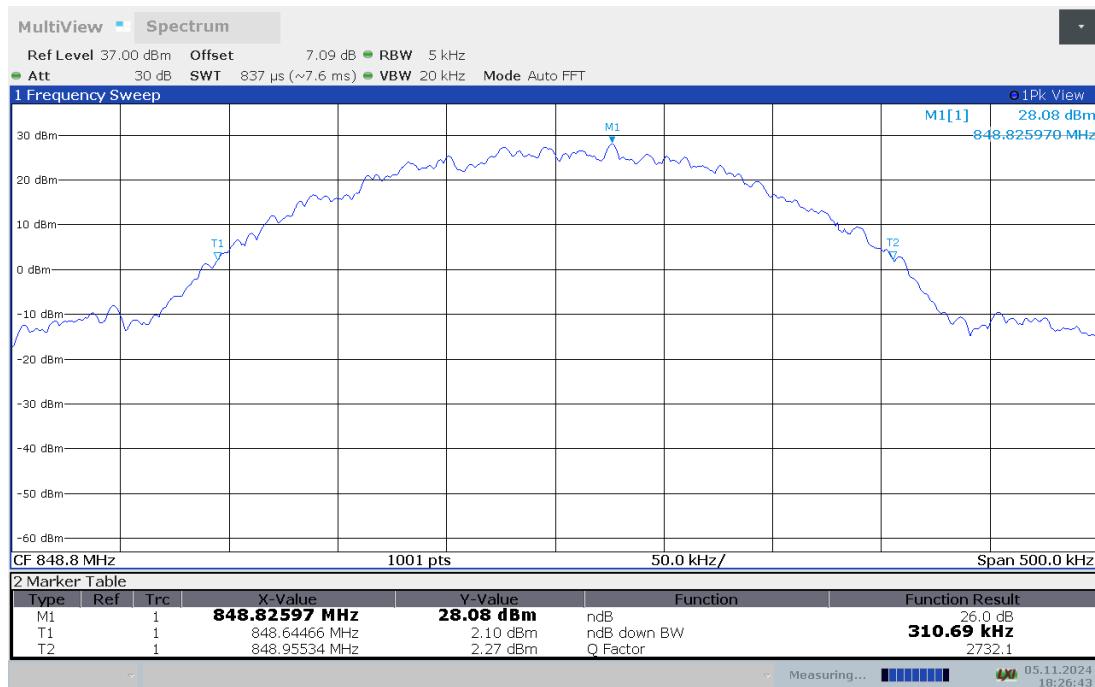
GSM850 (-26dBc OBW)
GPRS

Frequency (MHz)	Emission Bandwidth (-26dBc OBW)(kHz)
824.2	313.690
836.6	315.180
848.8	310.690

GSM850
Channel 128-Emission Bandwidth (-26dBc BW)

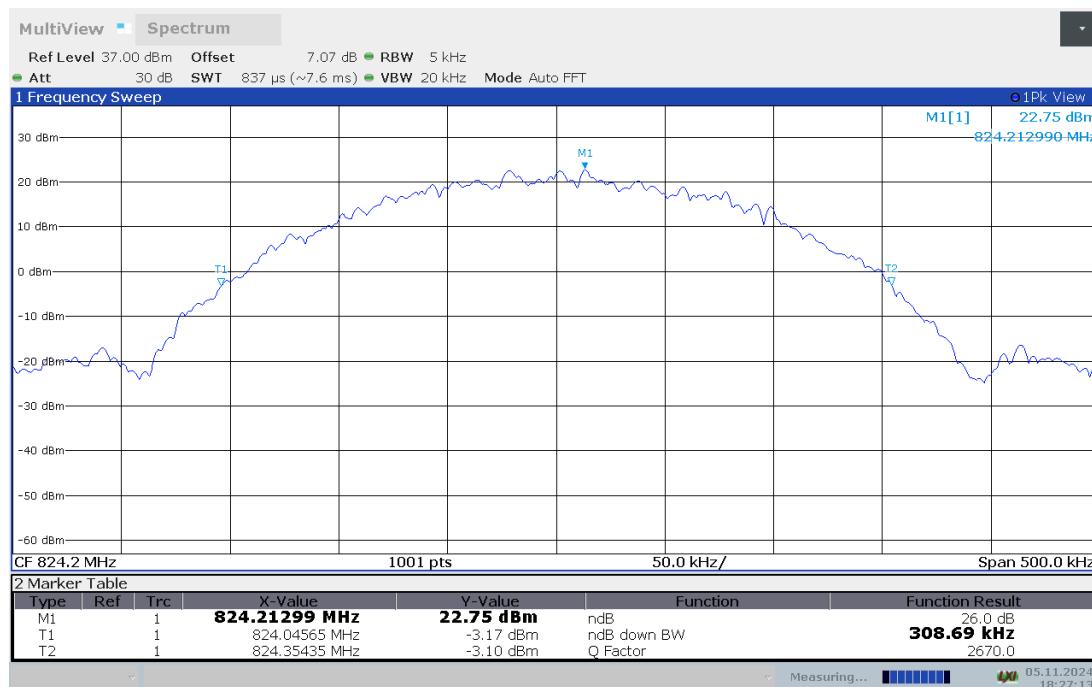
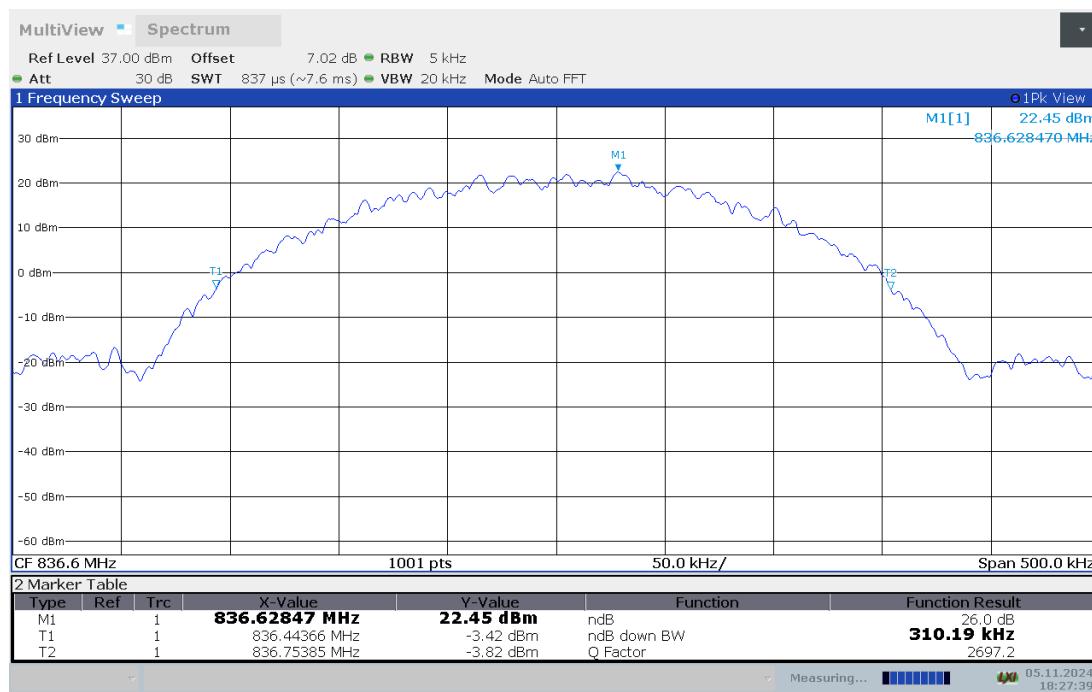
Channel 190-Emission Bandwidth (-26dBc BW)


Channel 251-Emission Bandwidth (-26dBc BW)

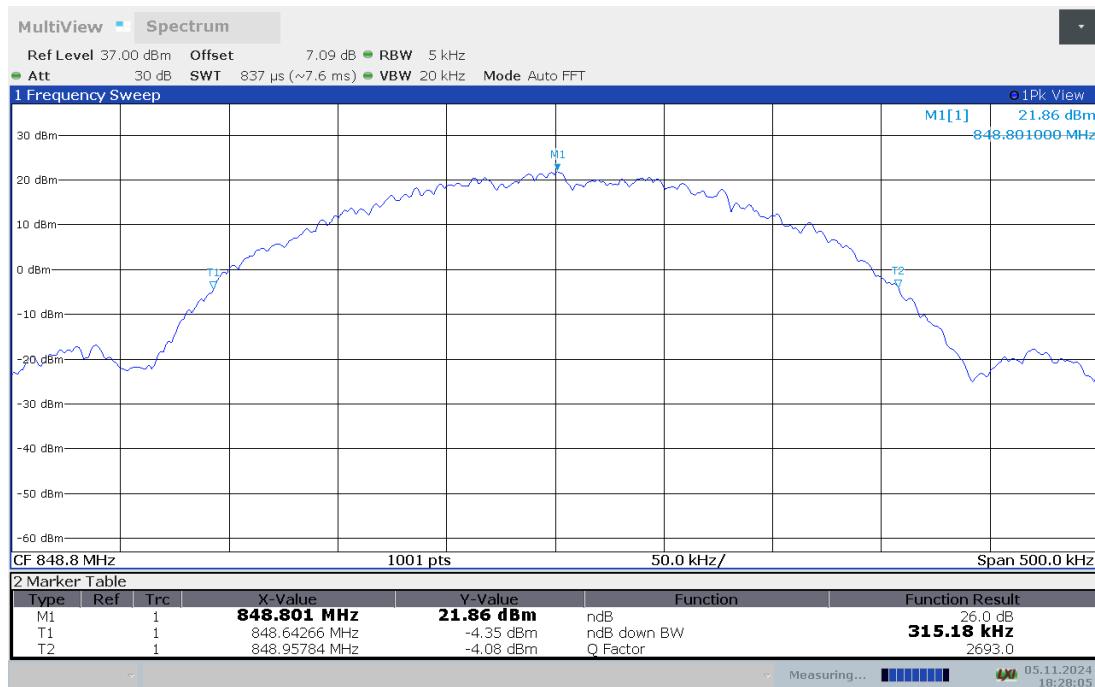


GSM850 (-26dBc OBW)
EGPRS

Frequency (MHz)	Emission Bandwidth (-26dBc OBW)(kHz)
824.2	308.690
836.6	310.190
848.8	315.180

GSM850
Channel 128-Emission Bandwidth (-26dBc BW)

Channel 190-Emission Bandwidth (-26dBc BW)


Channel 251-Emission Bandwidth (-26dBc BW)



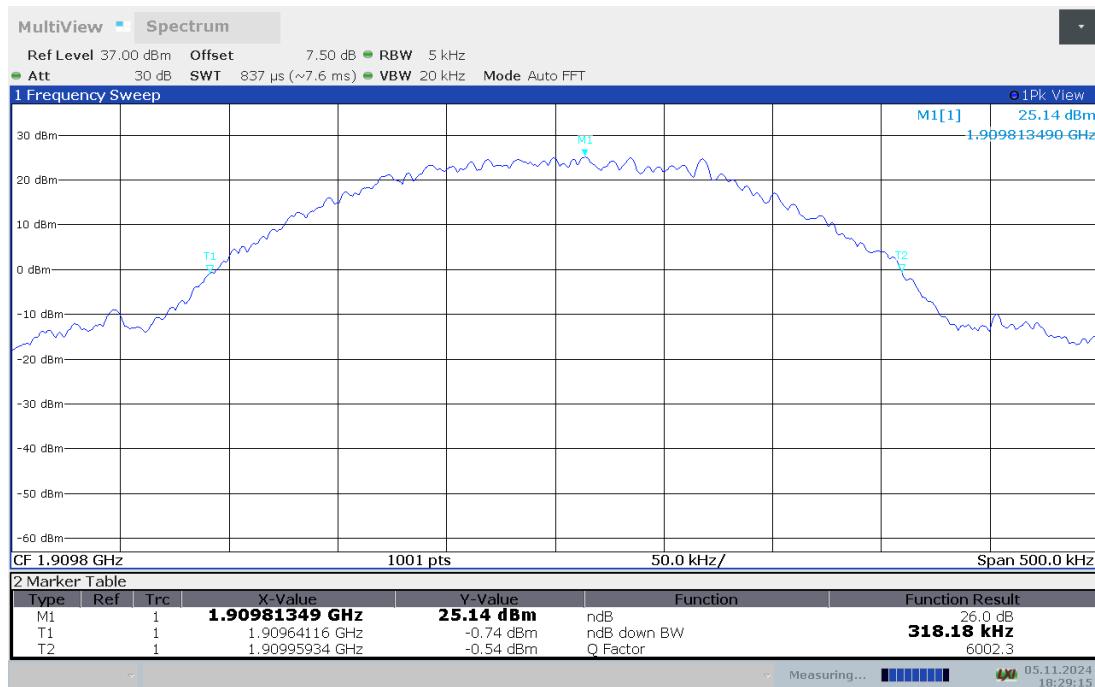
PCS1900 (-26dBc OBW)
GSM

Frequency (MHz)	Emission Bandwidth (-26dBc OBW)(kHz)
1850.2	317.180
1880	314.190
1909.8	318.180

PCS1900
Channel 512-Emission Bandwidth (-26dBc BW)

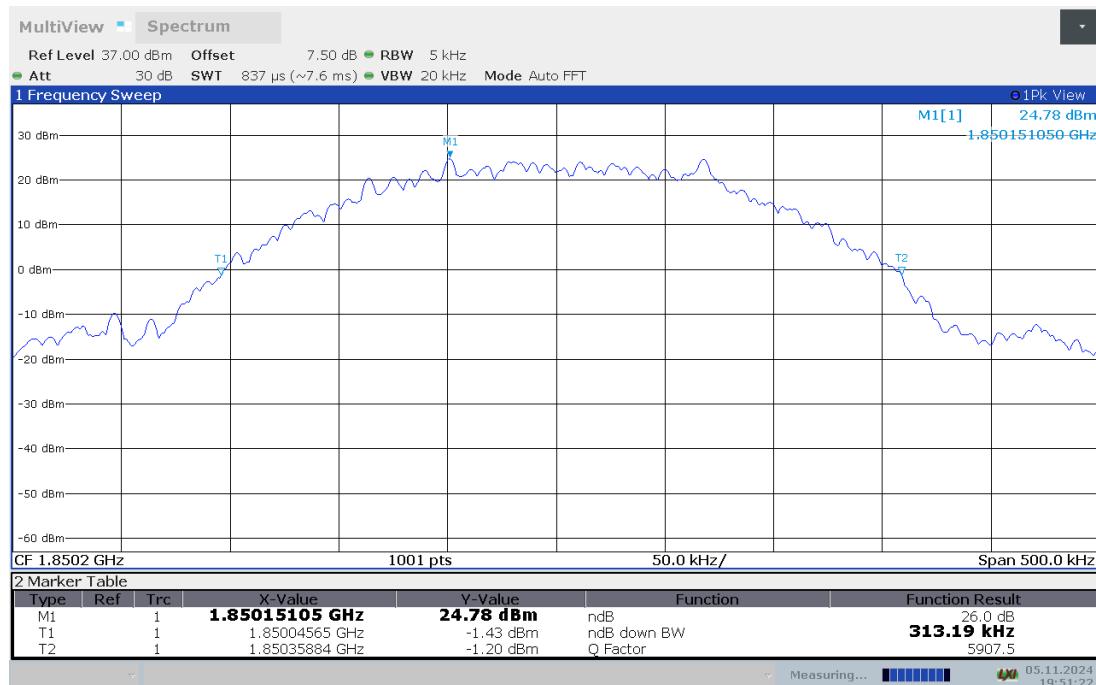
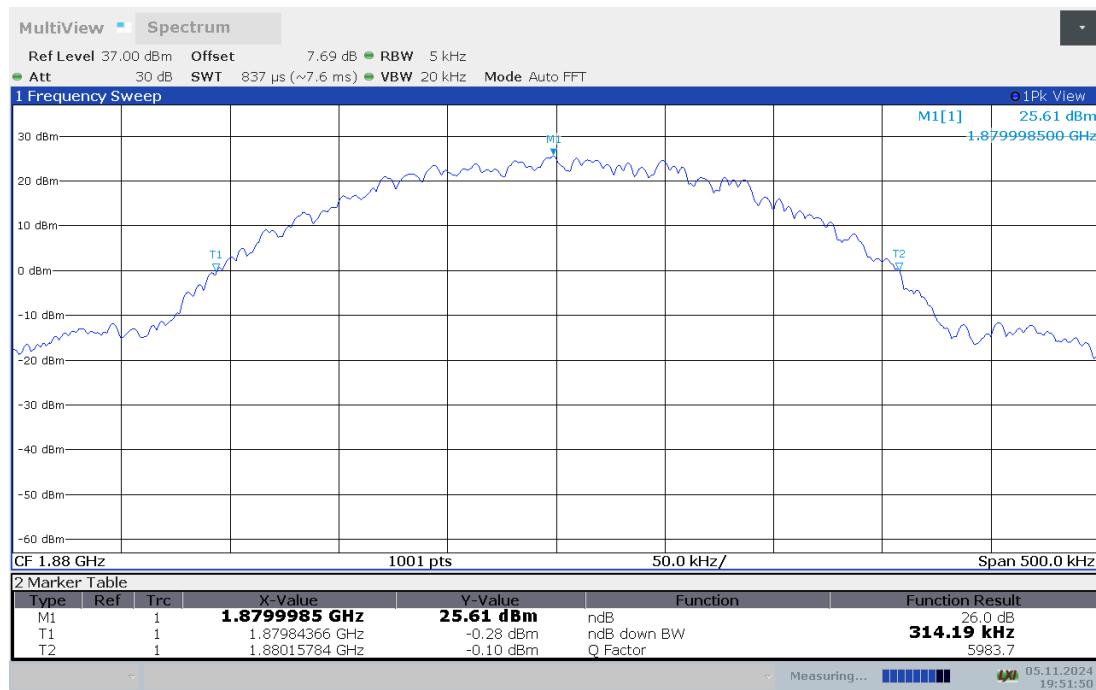
Channel 661-Emission Bandwidth (-26dBc BW)


Channel 810-Emission Bandwidth (-26dBc BW)



PCS1900 (-26dBc OBW)
GPRS

Frequency (MHz)	Emission Bandwidth (-26dBc OBW)(kHz)
1850.2	313.190
1880	314.190
1909.8	315.680

PCS1900
Channel 512-Emission Bandwidth (-26dBc BW)

Channel 661-Emission Bandwidth (-26dBc BW)


Channel 810-Emission Bandwidth (-26dBc BW)



PCS1900 (-26dBc OBW)
EGPRS

Frequency (MHz)	Emission Bandwidth (-26dBc OBW)(kHz)
1850.2	316.180
1880	311.690
1909.8	315.680

PCS1900
Channel 512-Emission Bandwidth (-26dBc BW)

Channel 661-Emission Bandwidth (-26dBc BW)


Channel 810-Emission Bandwidth (-26dBc BW)



Note: Expanded measurement uncertainty is $U = 3428\text{Hz}$, $k = 2$

A.6 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 2.1051, 22.917, 24.238

Measurement limit

On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm. A relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

Measurement Procedure

The testing follows ANSI C63.26

- a) The EUT was connected to spectrum analyzer and system simulator via a power divider.
- b) The band edges of low and high channels for the highest RF powers were measured.
- c) Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- d) Set spectrum analyzer with RMS detector.
- e) The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- f) Checked that all the results comply with the emission limit line.

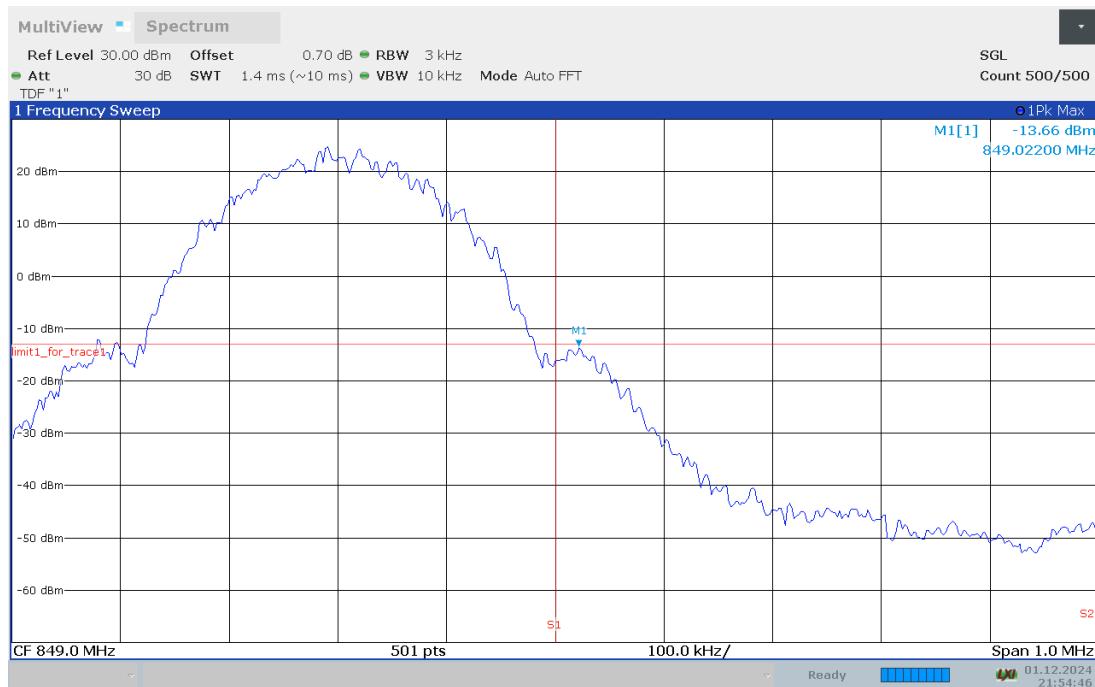
Only worst case result is given below

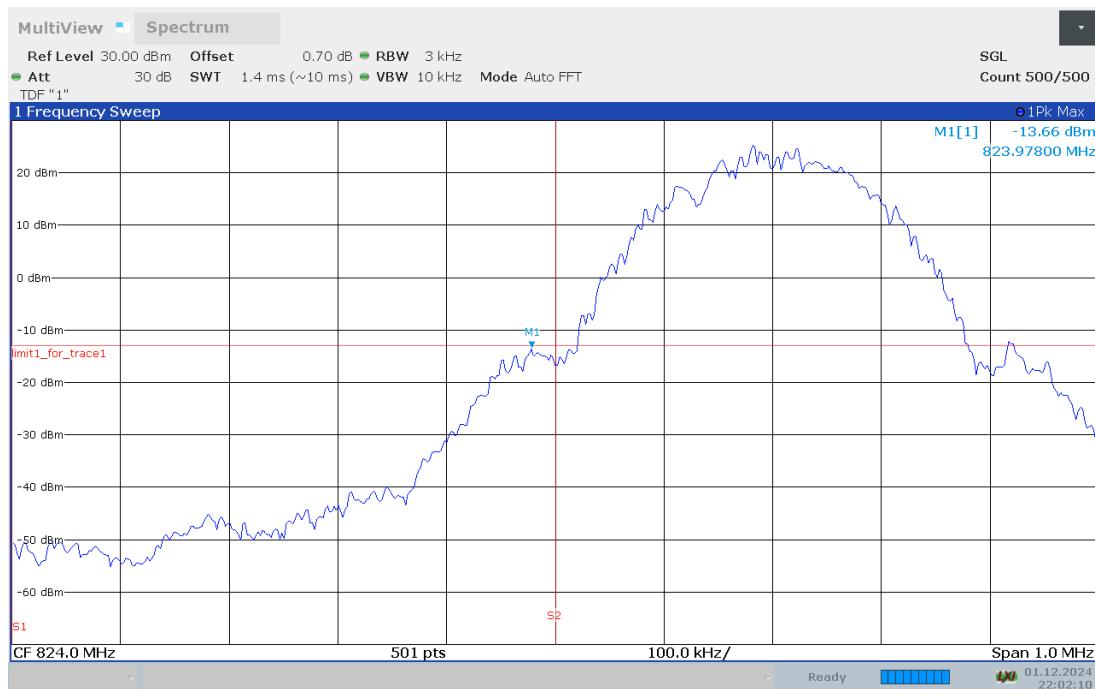
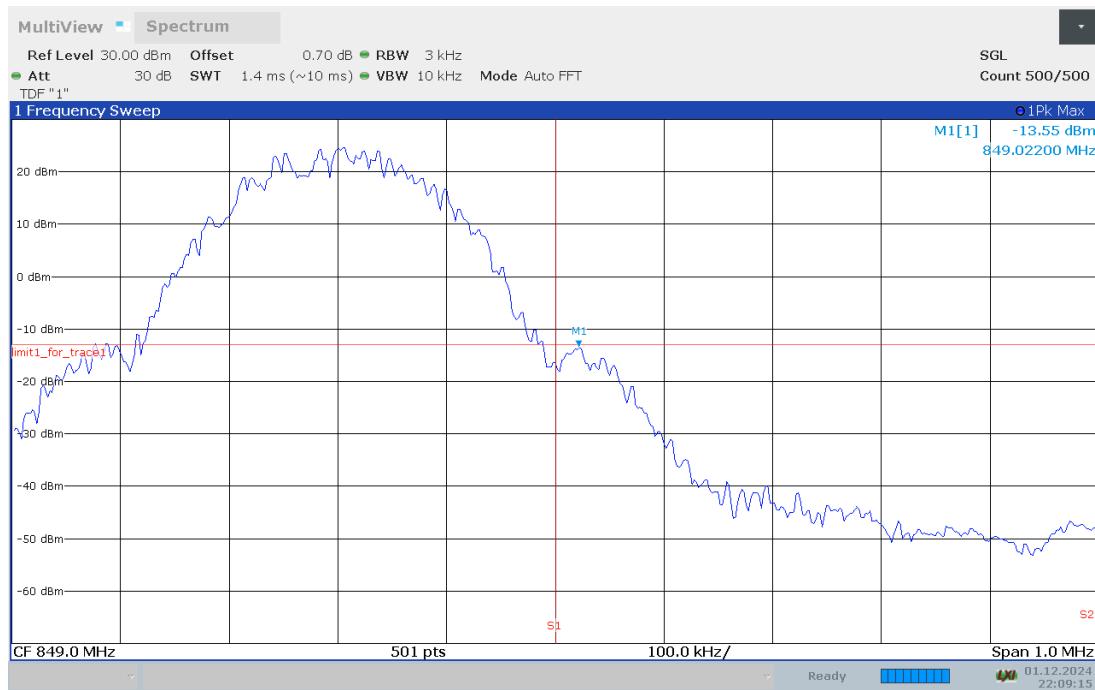
GSM 850

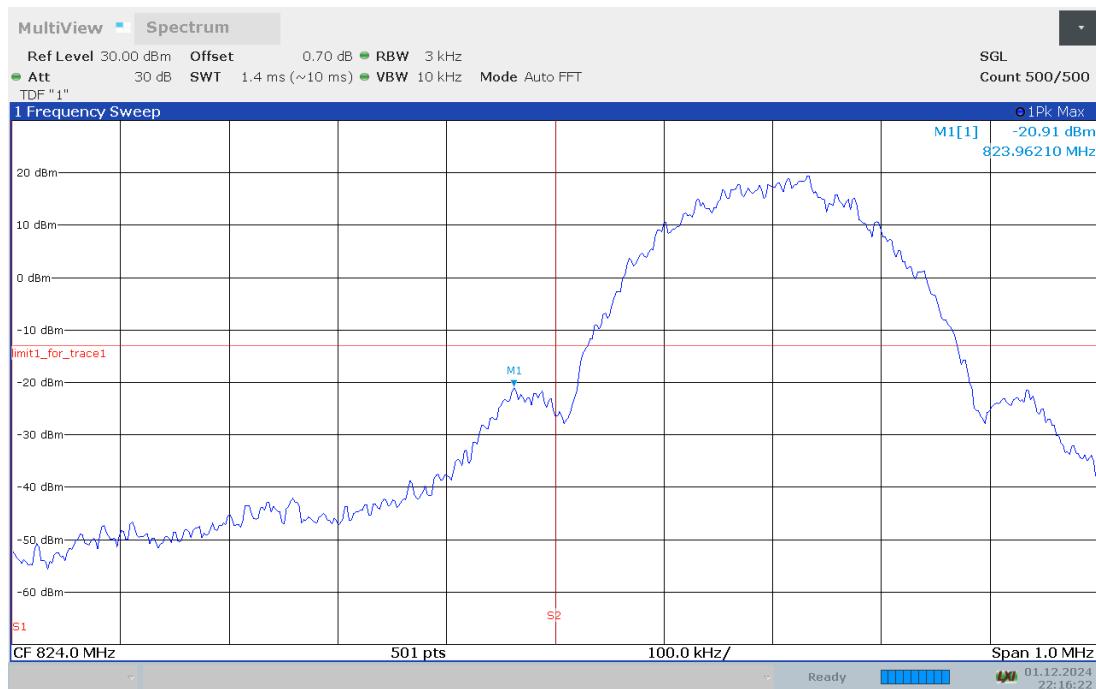
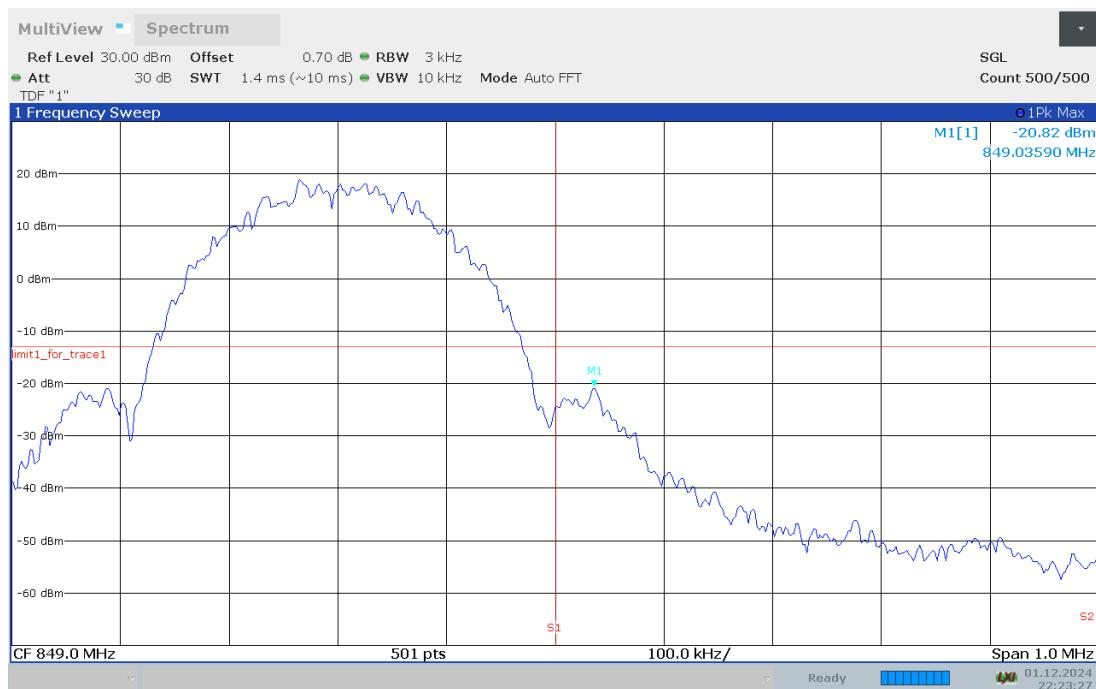
LOW BAND EDGE BLOCK-A-Channel 128

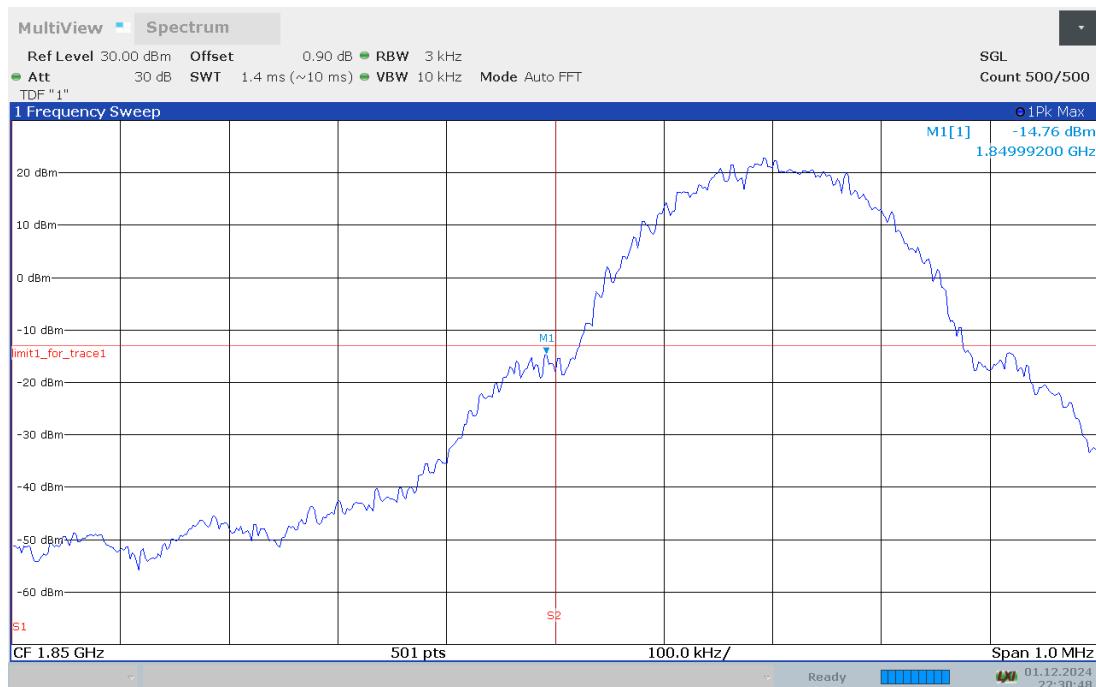


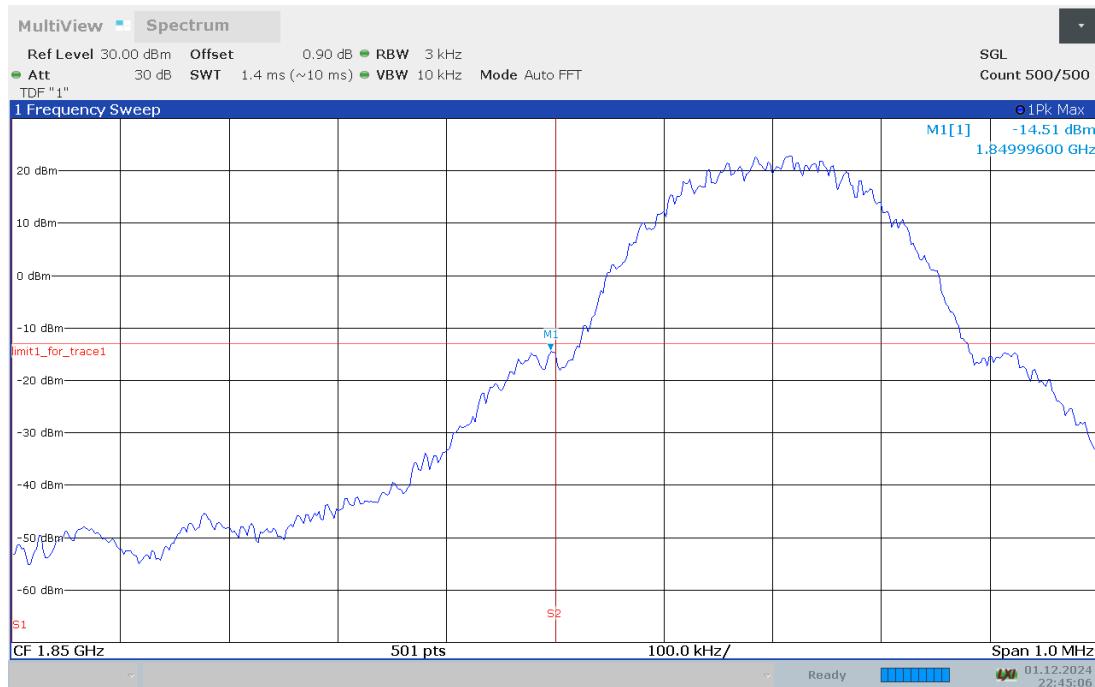
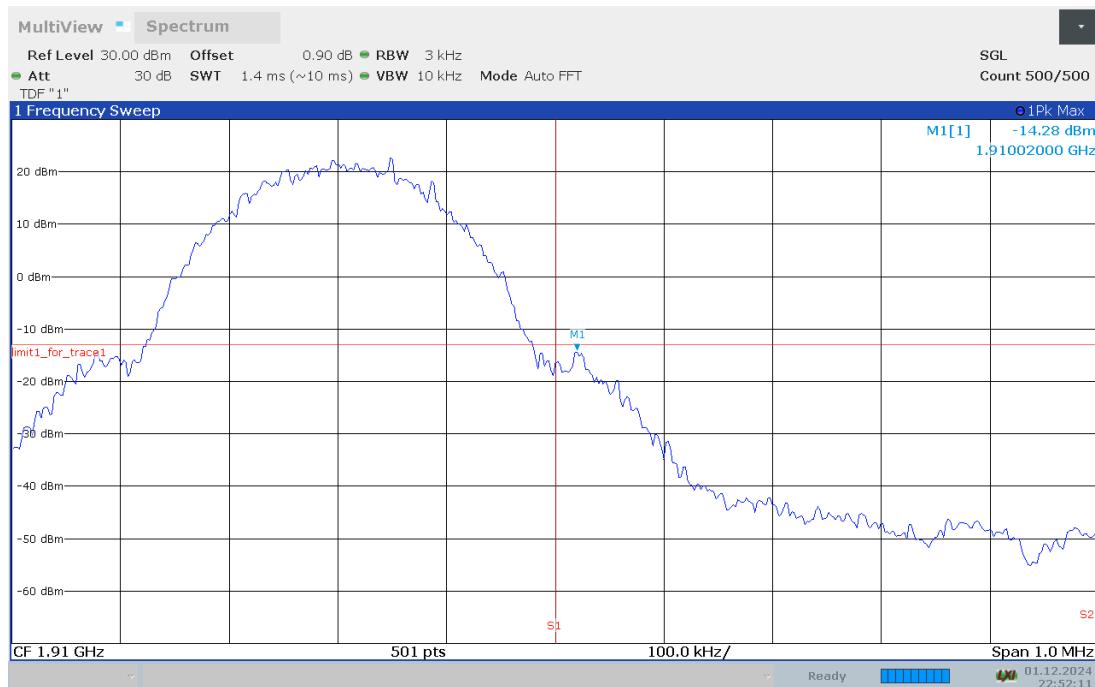
HIGH BAND EDGE BLOCK-C –Channel 251

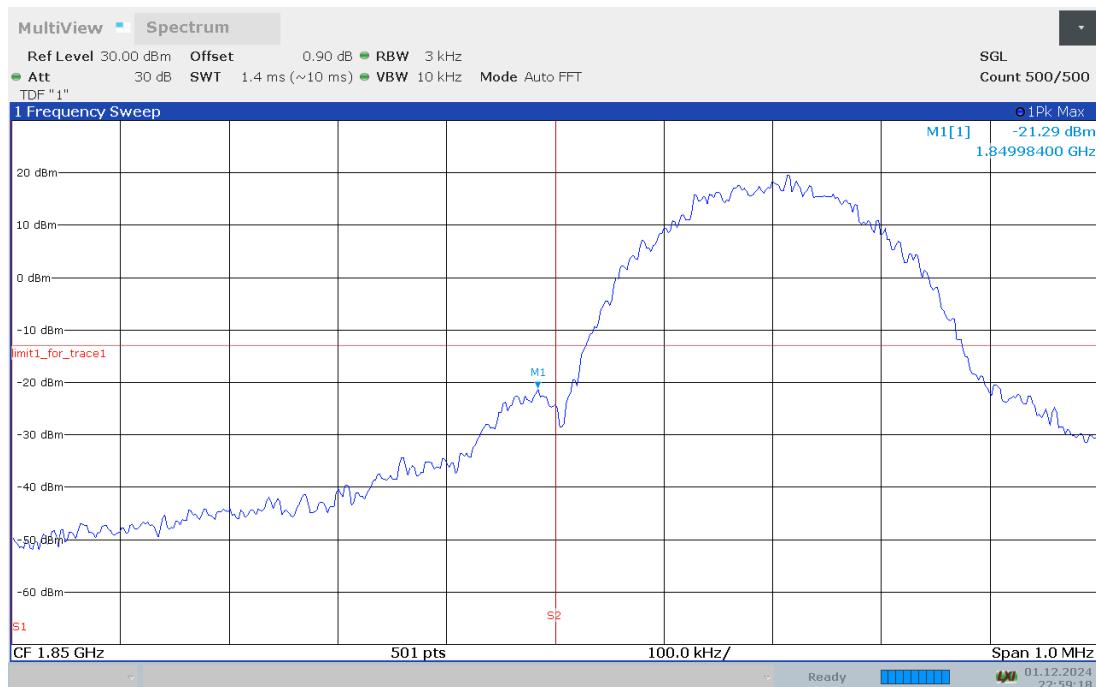
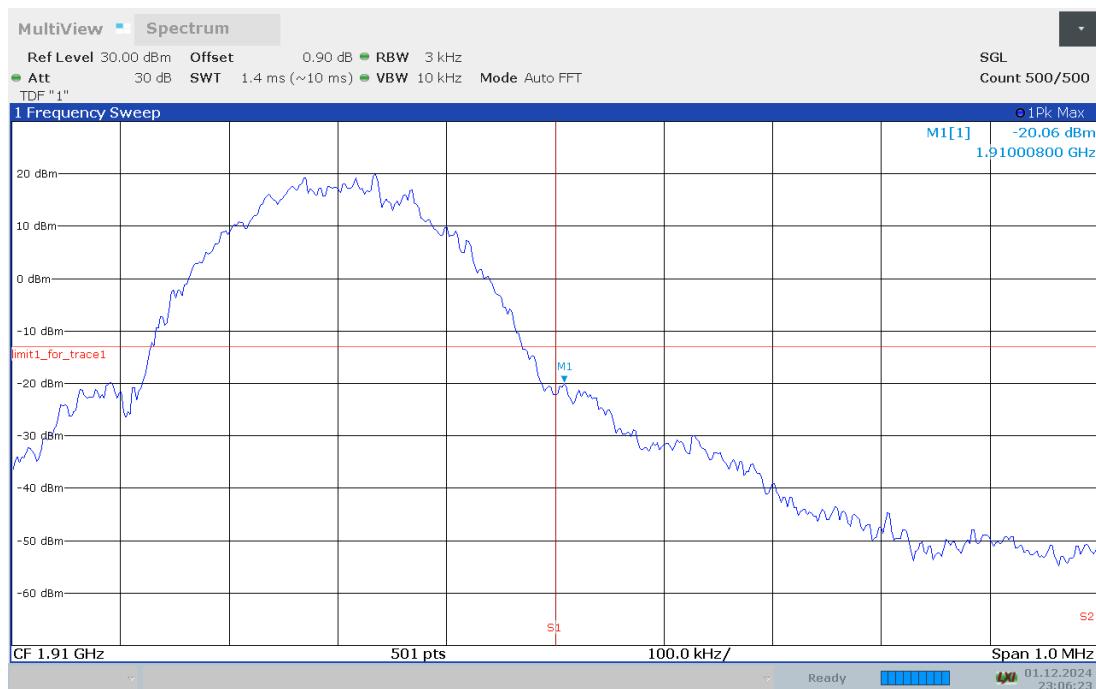


GPRS 850
LOW BAND EDGE BLOCK-A-Channel 128

HIGH BAND EDGE BLOCK-C-Channel 251


EGPRS 850
LOW BAND EDGE BLOCK-A-Channel 128

HIGH BAND EDGE BLOCK-C-Channel 251


PCS 1900
LOW BAND EDGE BLOCK-A-Channel 512

HIGH BAND EDGE BLOCK-C-Channel 810


GPRS 1900
LOW BAND EDGE BLOCK-A-Channel 512

HIGH BAND EDGE BLOCK-C-Channel 810


EGPRS 1900
LOW BAND EDGE BLOCK-A-Channel 512

HIGH BAND EDGE BLOCK-C-Channel 810


Note: Expanded measurement uncertainty is $U = 0.49\text{dB}(100\text{KHz}-2\text{GHz})/1.21\text{dB}(2\text{GHz}-26.5\text{GHz})$, $k = 1.96$

A.7 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1051, 22.917, 24.238

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1051 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM850 Transmitter

Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

PCS1900 Transmitter

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

A. 7.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.7.3 Measurement result

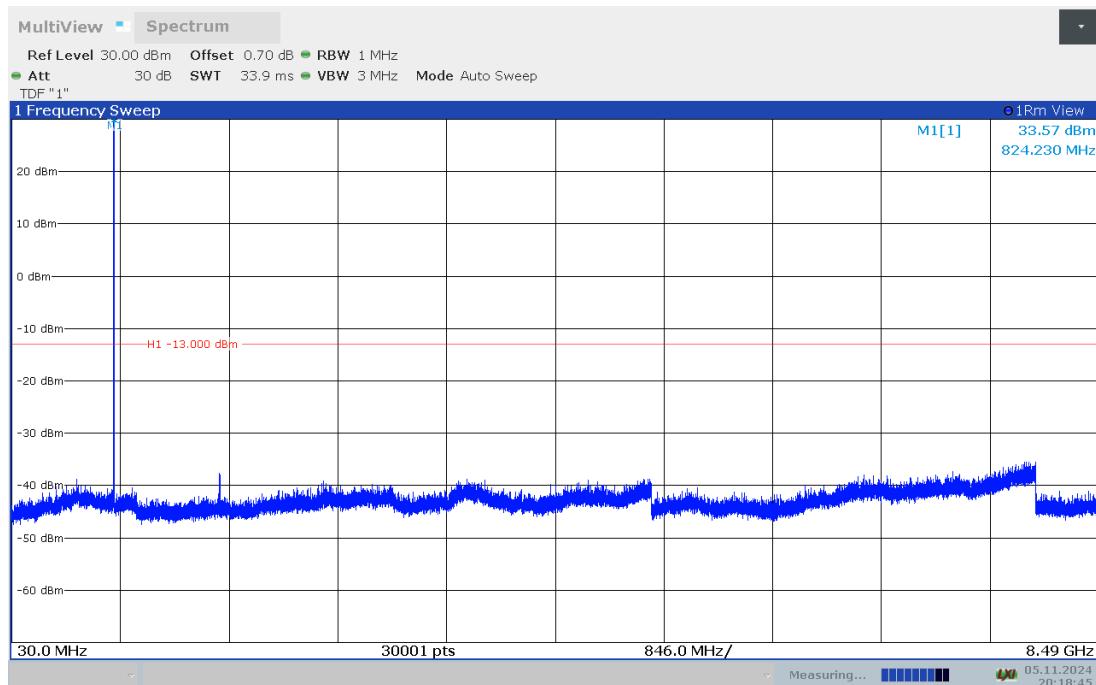
Only worst case result is given below

GSM850

Channel 128: 30MHz–8.49 GHz

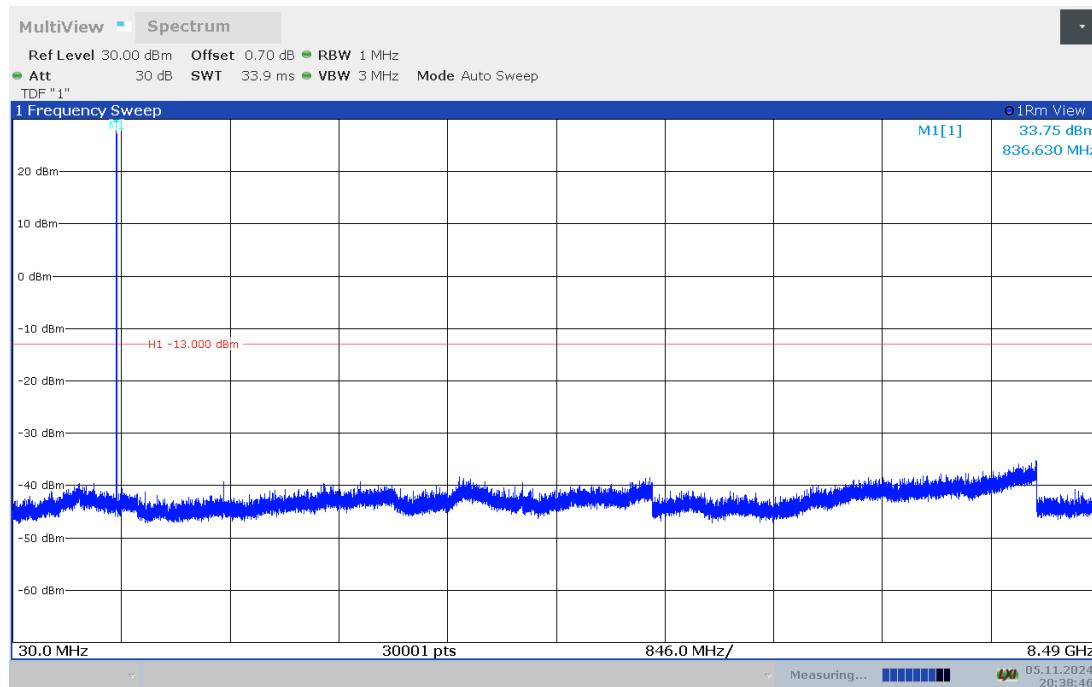
Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency..



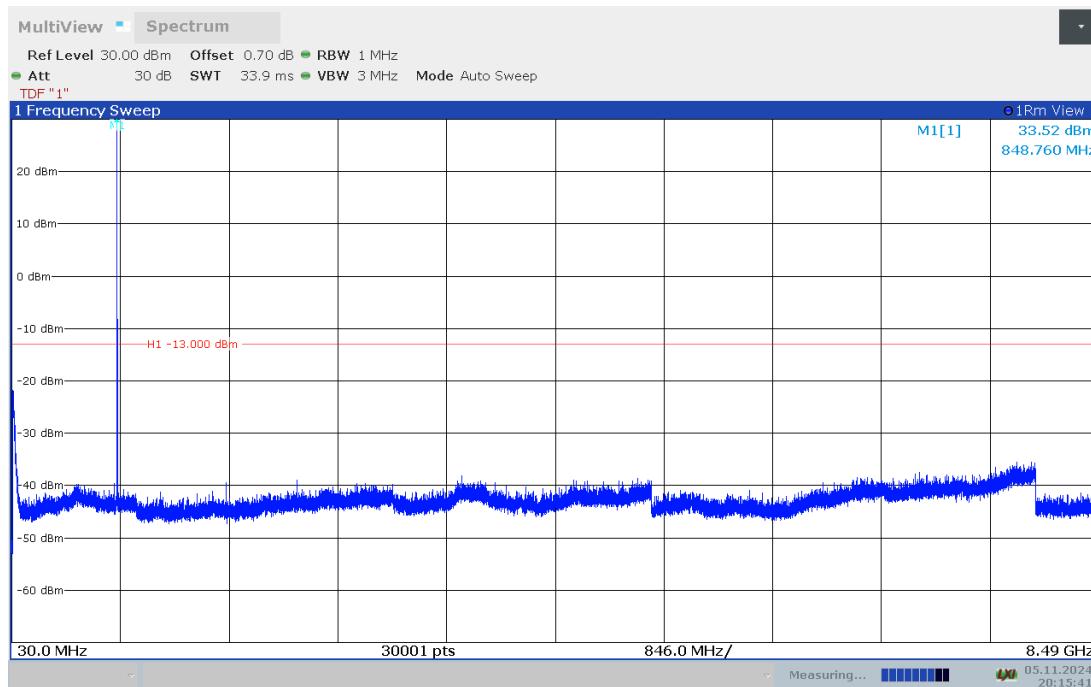
Channel 190: 30MHz – 8.49GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

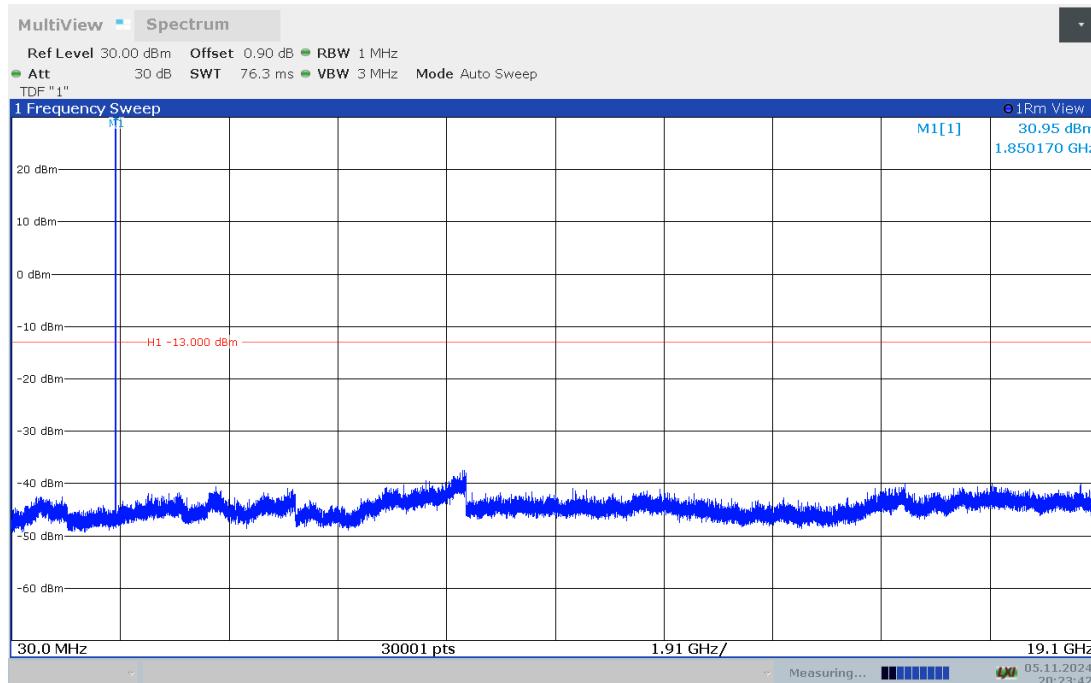
Channel 251: 30MHz – 8.49 GHz

Spurious emission limit –13dBm.

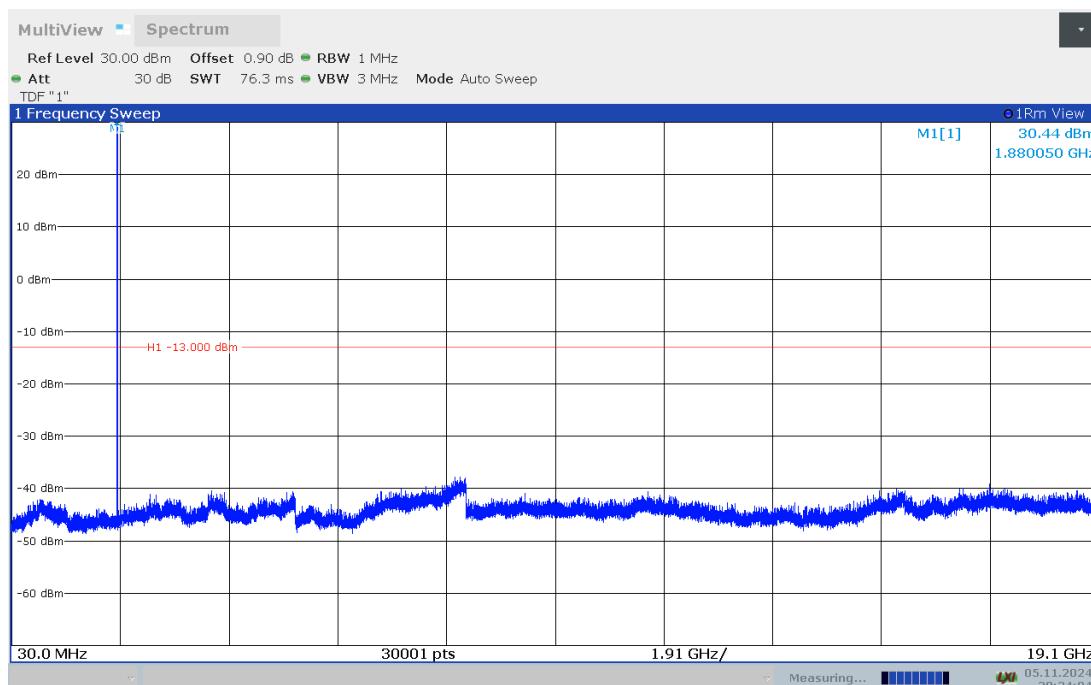
NOTE: peak above the limit line is the carrier frequency.


PCS1900
Channel 512: 30MHz – 19.1GHz

Spurious emission limit –13dBm.

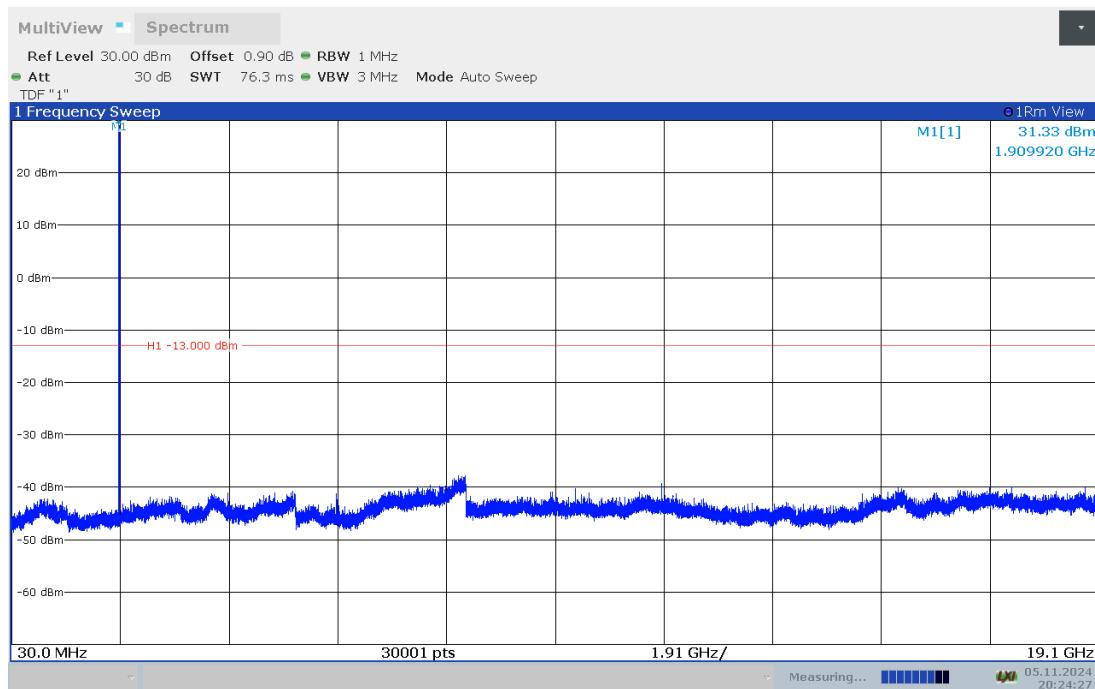

Channel 661: 30MHz –19.1GHz

Spurious emission limit –13dBm



Channel 810: 30MHz –19.1GHz

Spurious emission limit –13dBm.



Note: Expanded measurement uncertainty is $U = 0.49\text{dB}(100\text{KHz}-2\text{GHz})/1.21\text{dB}(2\text{GHz}-26.5\text{GHz})$, $k = 1.96$

A.8 PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 24.232, KDB971168 D01.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results

Only worst case result is given below

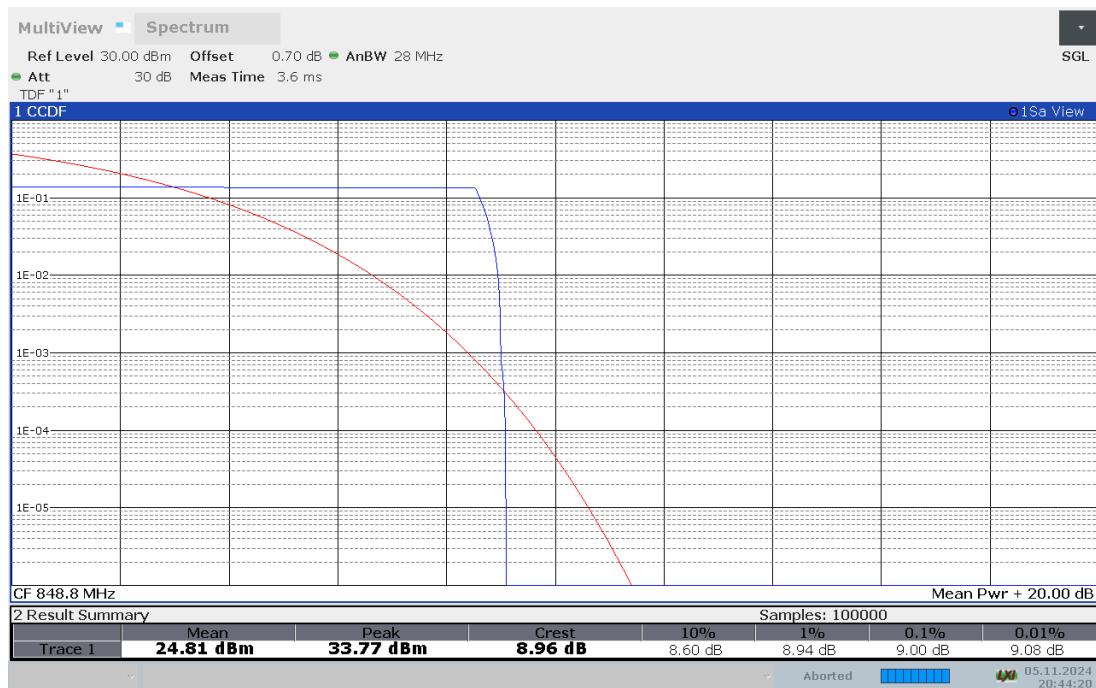
GSM850
Measurement result

GSM850	Frequency (MHz)	PAPR (dB)
GSM	824.2	8.54
GSM	836.6	8.56
GSM	848.8	9.00

Channel GSM-824.2MHz

Channel GSM-836.6MHz


Channel GSM-848.8MHz



GPRS 850

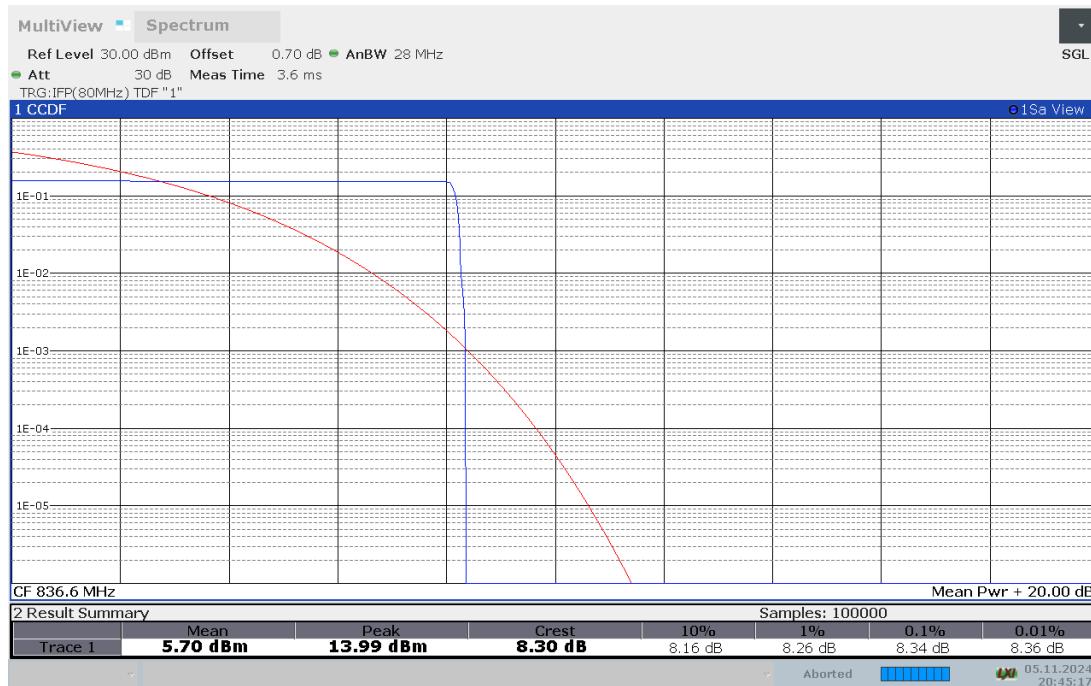
Measurement result

GSM850	Frequency (MHz)	PAPR (dB)
GPRS	824.2	8.54
GPRS	836.6	8.34
GPRS	848.8	8.30

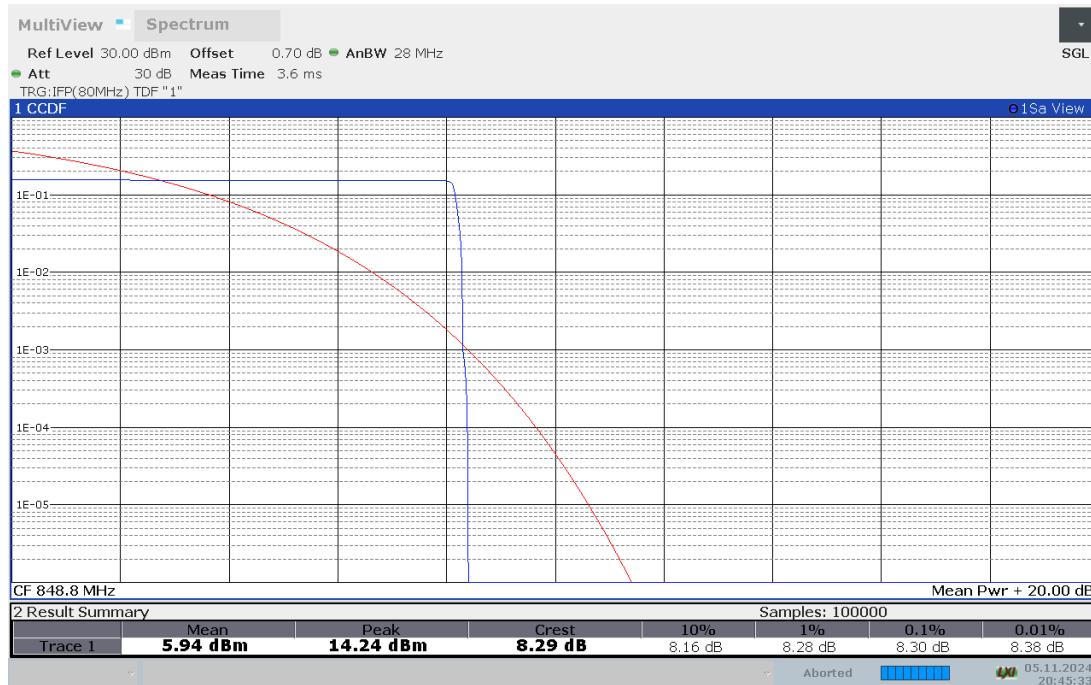
Channel GPRS-824.2MHz



Channel GPRS-836.6MHz



Channel GPRS-848.8MHz



EGPRS 850

Measurement result

GSM850	Frequency (MHz)	PAPR (dB)
EGPRS	824.2	10.98
EGPRS	836.6	11.06
EGPRS	848.8	11.10

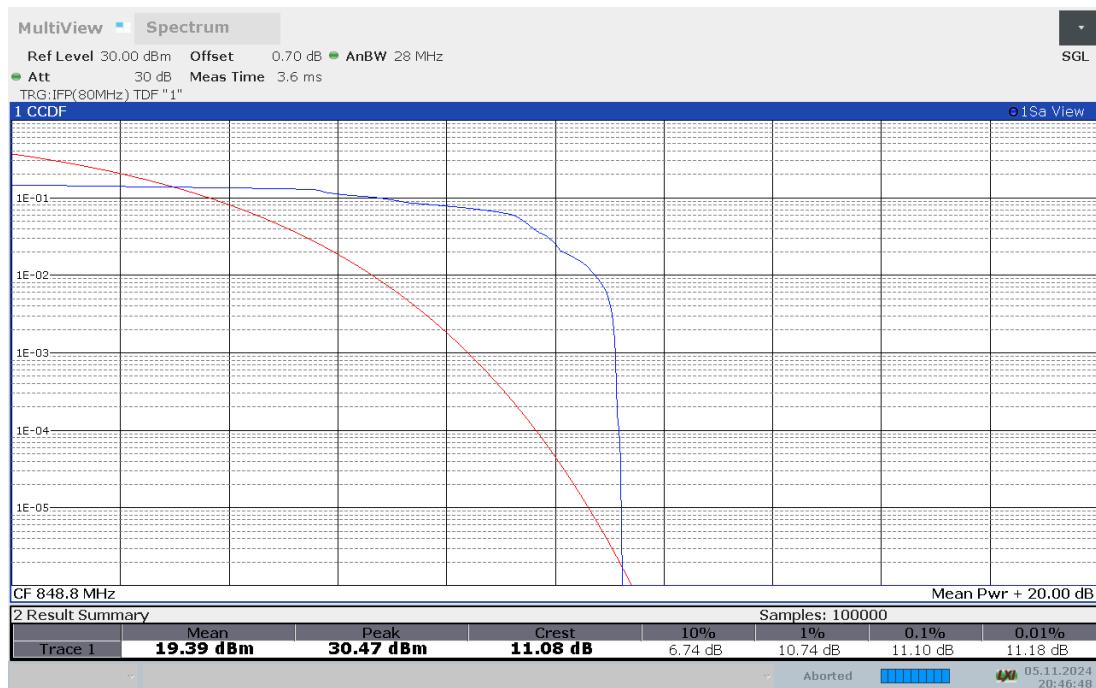
Channel EGPRS-824.2MHz



Channel EGPRS-836.6MHz



Channel EGPRS-848.8MHz

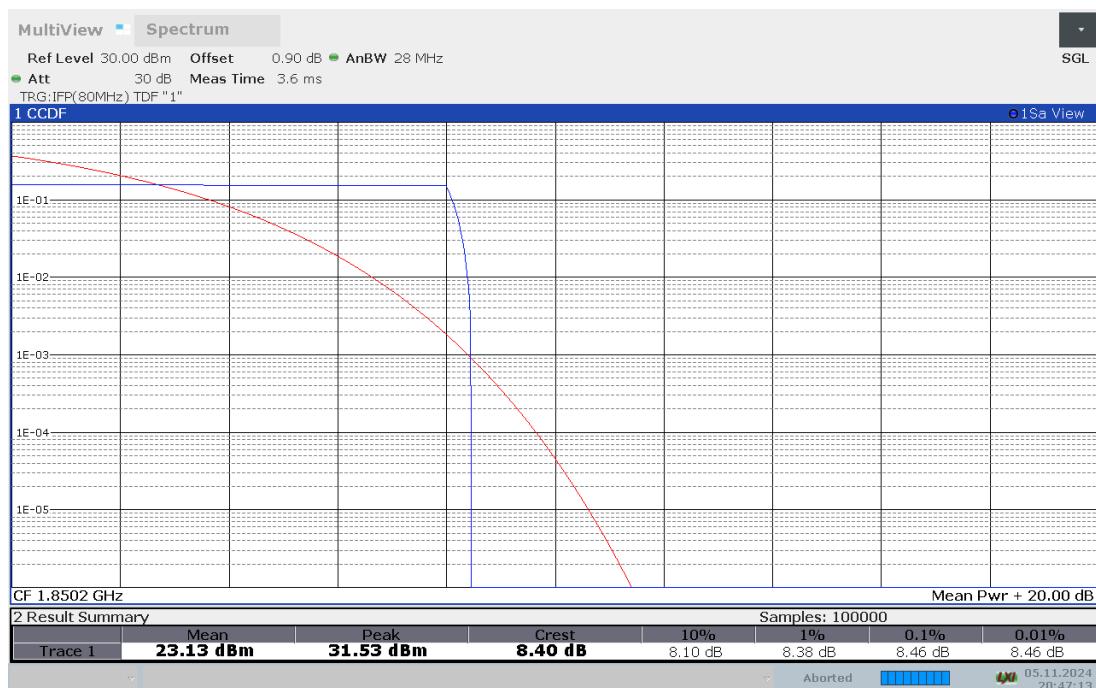


PCS1900

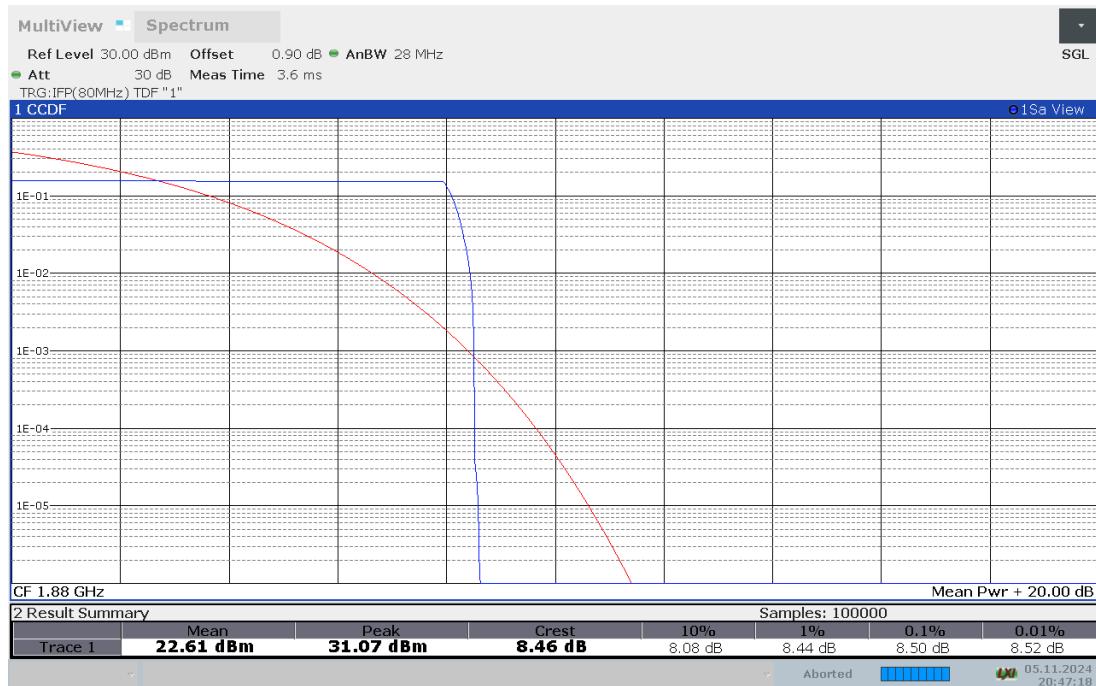
Measurement result

PCS1900	Frequency (MHz)	PAPR (dB)
GSM	1850.2	8.46
GSM	1880	8.50
GSM	1909.8	8.50

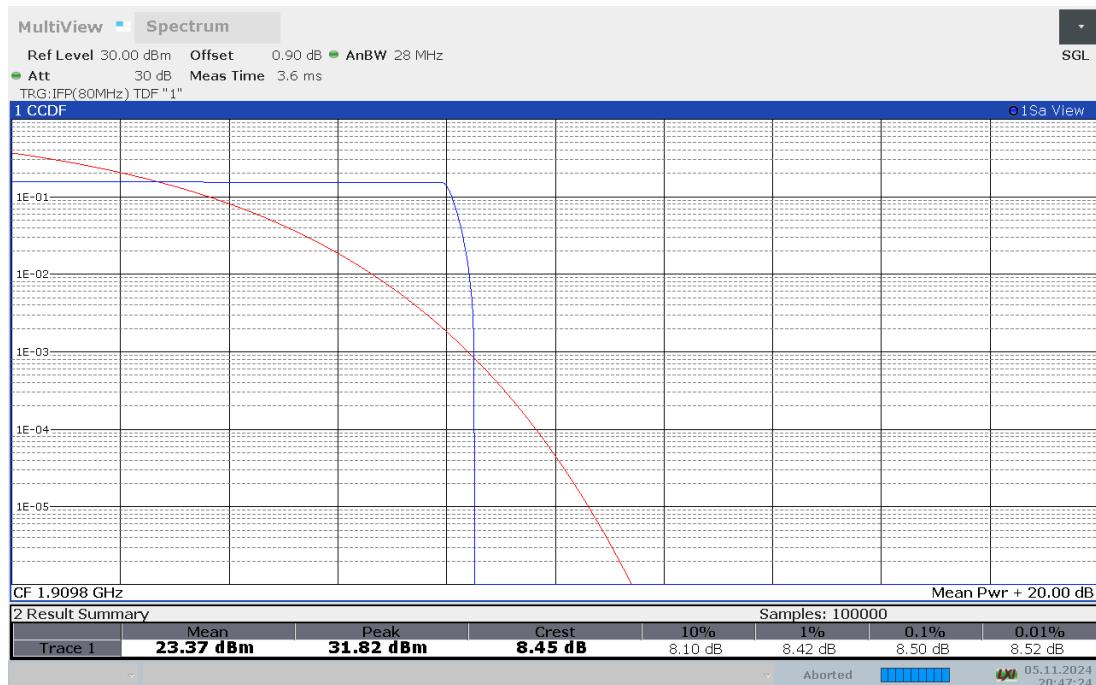
Channel GSM-1850.2MHz



Channel GSM-1880MHz



Channel GSM-1909.8MHz

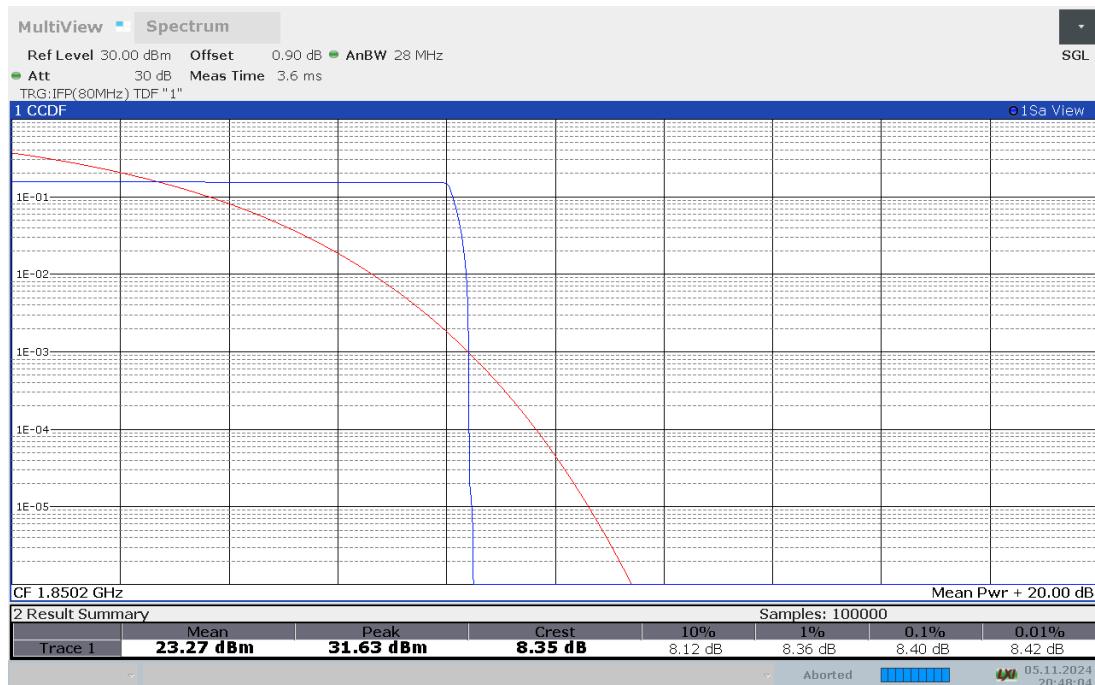


GPRS 1900

Measurement result

PCS1900	Frequency (MHz)	PAPR (dB)
GPRS	1850.2	8.40
GPRS	1880	8.48
GPRS	1909.8	8.48

Channel GPRS-1850.2MHz



Channel GPRS-1880MHz



Channel GPRS-1909.8MHz



EGPRS 1900

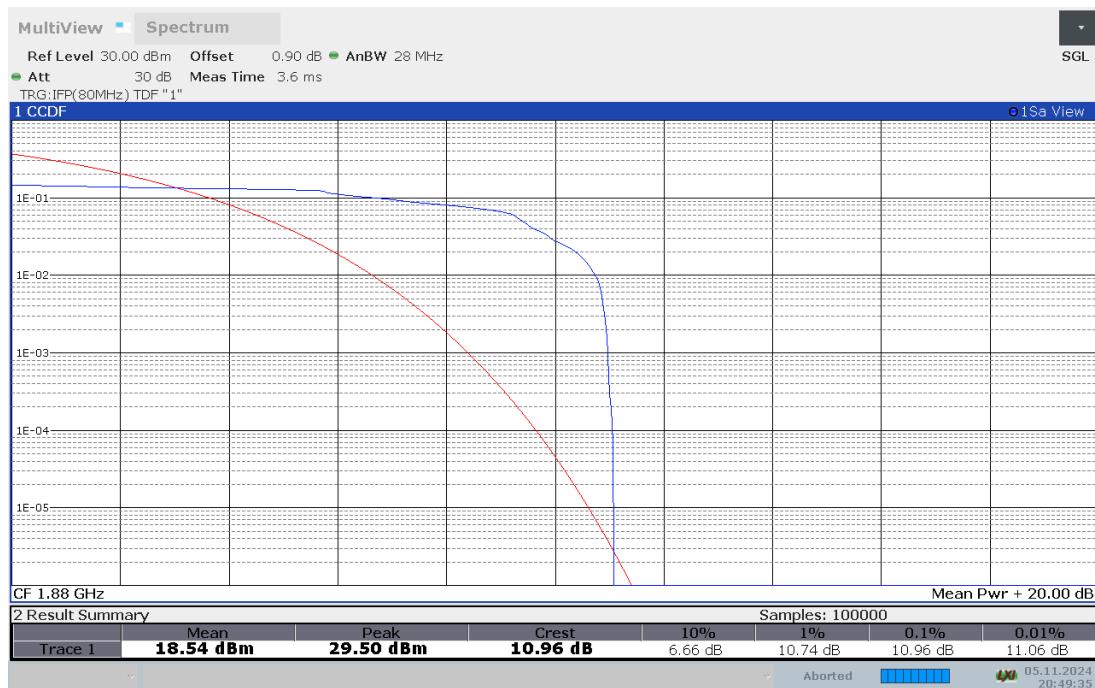
Measurement result

PCS1900	Frequency (MHz)	PAPR (dB)
EGPRS	1850.2	10.66
EGPRS	1880	10.96
EGPRS	1909.8	11.16

Channel EGPRS-1850.2MHz



Channel EGPRS-1880MHz



Channel EGPRS-1909.8MHz



Note: Expanded measurement uncertainty is $U = 0.48 \text{ dB}$, $k = 2$

ANNEX B: Accreditation Certificate**Accredited Laboratory**

A2LA has accredited

**SHENZHEN ACADEMY OF INFORMATION AND
COMMUNICATIONS TECHNOLOGY**

Shenzhen, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 14th day of November 2023.

Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 4353.01
Valid to November 30, 2025

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****